

CETECOM™

CETECOM ICT Services
consulting - testing - certification >>>

TEST REPORT

Test report no.: 1-9924/15-01-05-C



Deutsche
Akkreditierungsstelle
D-PL-12076-01-01

Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

Applicant

X-Rite Switzerland GmbH
Althardstrasse 70
8105 Regensdorf / SWITZERLAND
Phone: +41 44 842 24 00
Fax: +41 44 842 22 22
Contact: Beat Käppeli
e-mail: bkaeppli@xrite.com
Phone: +41 44 842 27 41

Manufacturer

X-Rite Incorporated
4300 44th Street SE
Grand Rapids, MI 49512 / USA

Test standard/s

47 CFR Part 15 Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 247 Issue 1 Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Spectrophotometer
Model name: KOH Spectrophotometer
FCC ID: LSV-KOHSPEC
IC: 20894-KOHSPEC
Frequency: DTS band 2.4 GHz
Technology tested: WLAN 2G4 (b, g, n HT20 & n HT40)
Antenna: Integrated antenna
Power supply: 12 V DC by external power mains
Temperature range: 0°C to +40°C



This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

Marco Bertolino
Lab Manager
Radio Communications & EMC

Test performed:

Andreas Luckenbill
Lab Manager
Radio Communications & EMC

1	Table of contents	
1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
3	Test standard/s	3
3.1	Measurement guidance	4
4	Test environment	5
5	Test item	5
5.1	General description	5
5.2	Additional information	6
6	Test laboratories sub-contracted	6
7	Description of the test setup	7
7.1	Shielded semi anechoic chamber	8
7.2	Shielded fully anechoic chamber	9
7.3	Radiated measurements > 12.75 GHz	10
7.4	Conducted measurements	11
7.5	AC conducted	12
8	Sequence of testing	13
8.1	Sequence of testing radiated spurious 9 kHz to 30 MHz	13
8.2	Sequence of testing radiated spurious 30 MHz to 1 GHz	14
8.3	Sequence of testing radiated spurious 1 GHz to 12.75 GHz	15
8.4	Sequence of testing radiated spurious above 12.75 GHz	16
9	Measurement uncertainty	17
10	Summary of measurement results	18
11	Additional comments	19
12	Measurement results	20
12.1	Antenna gain	20
12.2	Identify worst case data rate	23
12.3	Duty cycle	24
12.4	Maximum output power	25
12.5	Peak power spectral density	26
12.6	6 dB DTS bandwidth	35
12.7	Occupied bandwidth – 99% emission bandwidth	44
12.8	Spurious emissions conducted	51
12.9	Band edge compliance radiated	66
12.10	Spurious emissions radiated below 30 MHz	71
12.11	Spurious emissions radiated 30 MHz to 1 GHz	78
12.12	Spurious emissions radiated above 1 GHz	89
12.13	Spurious emissions conducted below 30 MHz (AC conducted)	103
Annex A	Document history	105
Annex B	Further information	105
Annex C	Accreditation Certificate	106

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

This test report replaces the test report with the number 1-9924/15-01-05-B and dated 2016-08-11

2.2 Application details

Date of receipt of order:	2015-08-17
Date of receipt of test item:	2015-09-15
Start of test:	2015-09-15
End of test:	2016-08-10
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	-/-	Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 247 Issue 1	May 2015	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices
RSS - Gen Issue 4	November 2014	Spectrum Management and Telecommunications Radio Standards Specifications - General Requirements and Information for the Certification of Radio Apparatus

3.1 Measurement guidance

Guidance	Version	Description
DTS: KDB 558074 D01	v03r05	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
ANSI C63.4-2014	-/-	American national standard for methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American national standard of procedures for compliance testing of unlicensed wireless devices

4 Test environment

Temperature	:	T_{nom} T_{max} T_{min}	+22 °C during room temperature tests No tests under extreme conditions required. No tests under extreme conditions required.
Relative humidity content	:		50 %
Barometric pressure	:		not relevant for this kind of testing
Power supply	:	V_{nom} V_{max} V_{min}	12 V DC by external power mains No tests under extreme conditions required. No tests under extreme conditions required.

5 Test item

5.1 General description

Kind of test item	:	Spectrophotometer
Type identification	:	KOH Spectrophotometer
PMN	:	KOH Spectrophotometer
HVIN	:	KOH Spectrophotometer
FVIN	:	-/-
HMN	:	-/-
S/N serial number	:	2010
HW hardware status	:	B2
SW software status	:	0.42a01
Frequency band	:	DTS band 2.4 GHz (lowest channel: 2412 MHz; highest channel: 2462 MHz)
Type of radio transmission	:	DSSS, OFDM
Use of frequency spectrum	:	
Type of modulation	:	BPSK, QPSK, 16 – QAM, 64 – QAM
Number of channels	:	11
Antenna	:	Integrated antenna
Power supply	:	12 V DC by external power mains
Temperature range	:	0°C to +40°C

7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).


In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
v/k!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

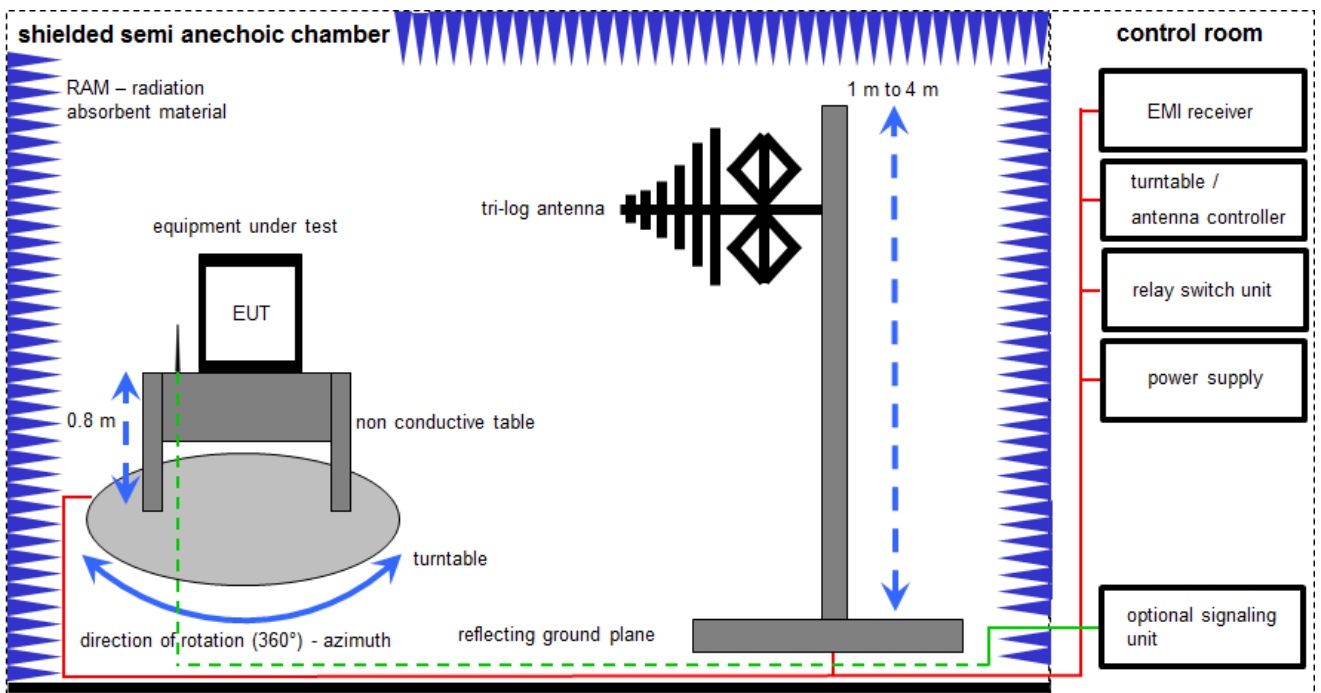

Measurement distance: tri-log antenna 10 meter

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	EMI-Receiver	8542E	HP	3617A00170	300000568	k	28.01.2015	28.01.2016
3	A	RF-Filter-section	85420E	HP	3427A00162	300002214	k	-/-	-/-
4	A	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	26.01.2015	26.01.2016
5	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
6	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
7	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
8	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	22.04.2014	22.04.2016
9	A	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	26.01.2015	26.01.2016

7.2 Shielded fully anechoic chamber

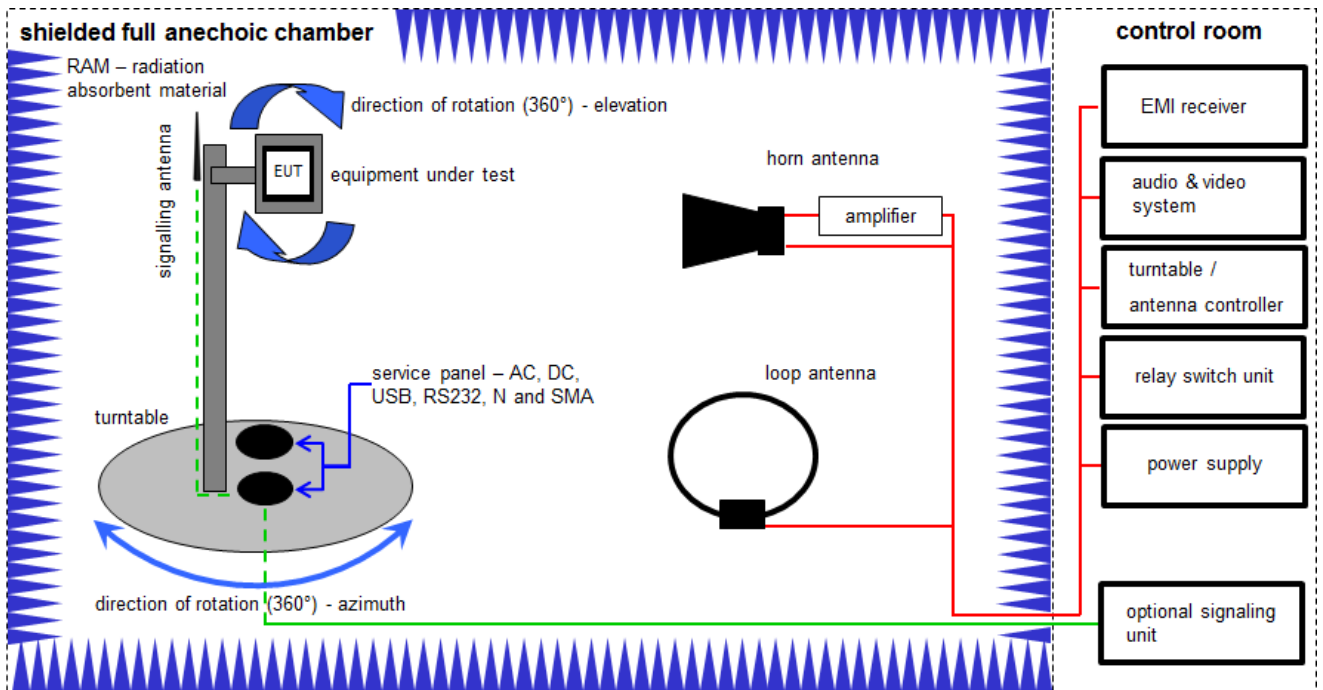

Measurement distance: horn antenna 3 meter; loop antenna 3 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB\mu V/m] (71.61 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vKII!	20.05.2015	20.05.2017
2	A, B	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev	-/-	-/-
3	A, B	Switch / Control Unit	3488A	HP	*	300000199	ne	-/-	-/-
4	B	Active Loop Antenna 10 kHz to 30 MHz	6502	EMCO/2	8905-2342	300000256	k	24.06.2015	24.06.2017
5	A	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne	-/-	-/-
6	A	Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev	-/-	-/-
7	A, B	MXE EMI Receiver 20 Hz to 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405	k	06.03.2015	06.03.2016
8	A, B	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne	-/-	-/-

7.3 Radiated measurements > 12.75 GHz

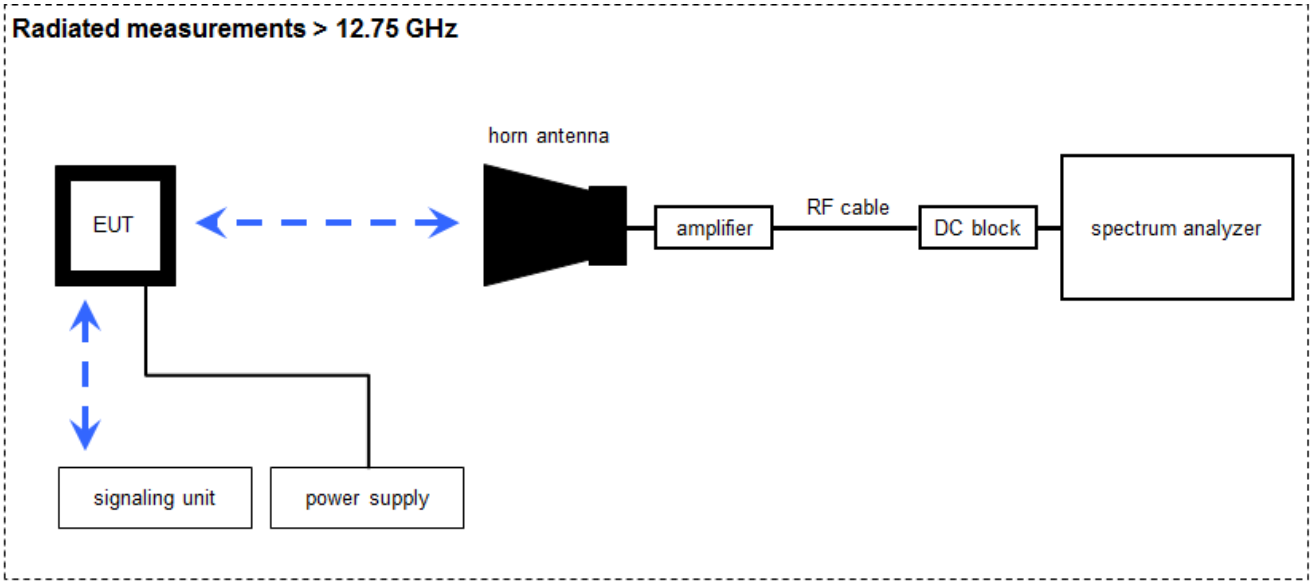

Measurement distance: horn antenna 50 cm

$$FS = U_R + CA + AF$$

(FS-field strength; U_R -voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:


$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-60.1) [dB] + 36.74 [dB/m] = 16.64 [dB\mu V/m] (6.79 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A	Horn Antenna 18,0-40,0 GHz	LHAF180	Microw.Devel	39180-103-022	300001748	k	22.05.2015	22.05.2018
2	A	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda	8402	300000787	k	14.08.2015	14.08.2017
3	A	Amplifier 2-40 GHz	JS32-02004000-57-5P	MITEQ	1777200	300004541	ev	-/-	-/-
4	A	Signal Analyzer 40 GHz	FSV40	R&S	101353	300004819	k	24.08.2015	24.08.2016
5	A	RF-Cable	ST18/SMAm/SMAm/48	Huber & Suhner	Batch no. 600918	400001182	ev	-/-	-/-
6	A	RF-Cable	ST18/SMAm/SMm/48	Huber & Suhner	Batch no. 127377	400001183	ev	-/-	-/-

7.4 Conducted measurements

Conducted measurements normal conditions

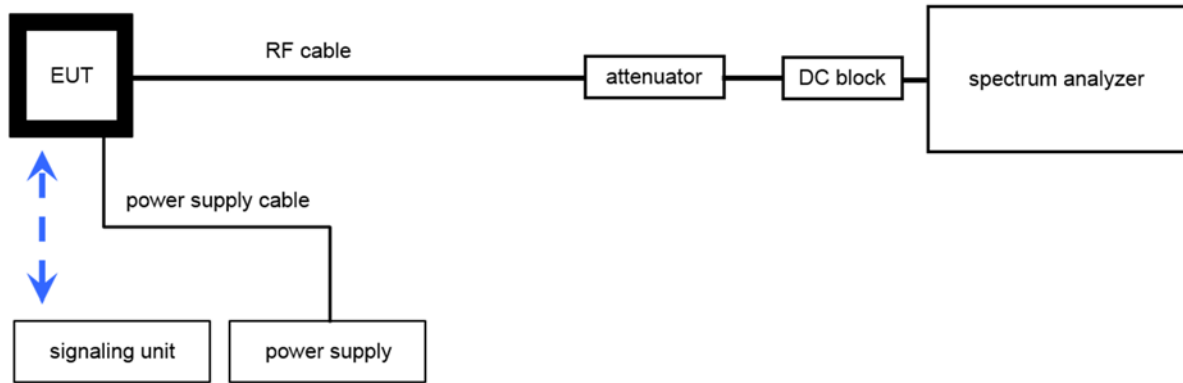

OP = AV + CA
 (OP-output power; AV-analyzer value; CA-loss signal path)


Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	22.01.2015	22.01.2017
2	A,B	RF-Cable	ST18/SMAm/SMAm/60	Huber & Suhner	Batch no. 606844	400001181	ev	-/-	-/-
3	A,B	DC-Blocker 0.1-40 GHz	8141A	Inmet	Batch no. 606844	400001185	ev	-/-	-/-
4	A,B	Coax Attenuator 10 dB 2W 0-40 GHz	MCL BW-K10-2W44+	Mini Circuits	Batch no. 606844	400001186	ev	-/-	-/-
5	A,B	PC-WLAN Tester	Intel Core i3 3220/3,3 GHz, Prozessor	R&S	2V2403033A45 23	300004589	ne	-/-	-/-
6	A,B	Teststand	Teststand Custom Sequence Editor	National Instruments GmbH	2V2403033A45 23	300004590	ne	-/-	-/-
7	B	Power Sensor	NRP-Z81	R&S	100010	300003780	k	25.01.2016	25.01.2017

7.5 AC conducted

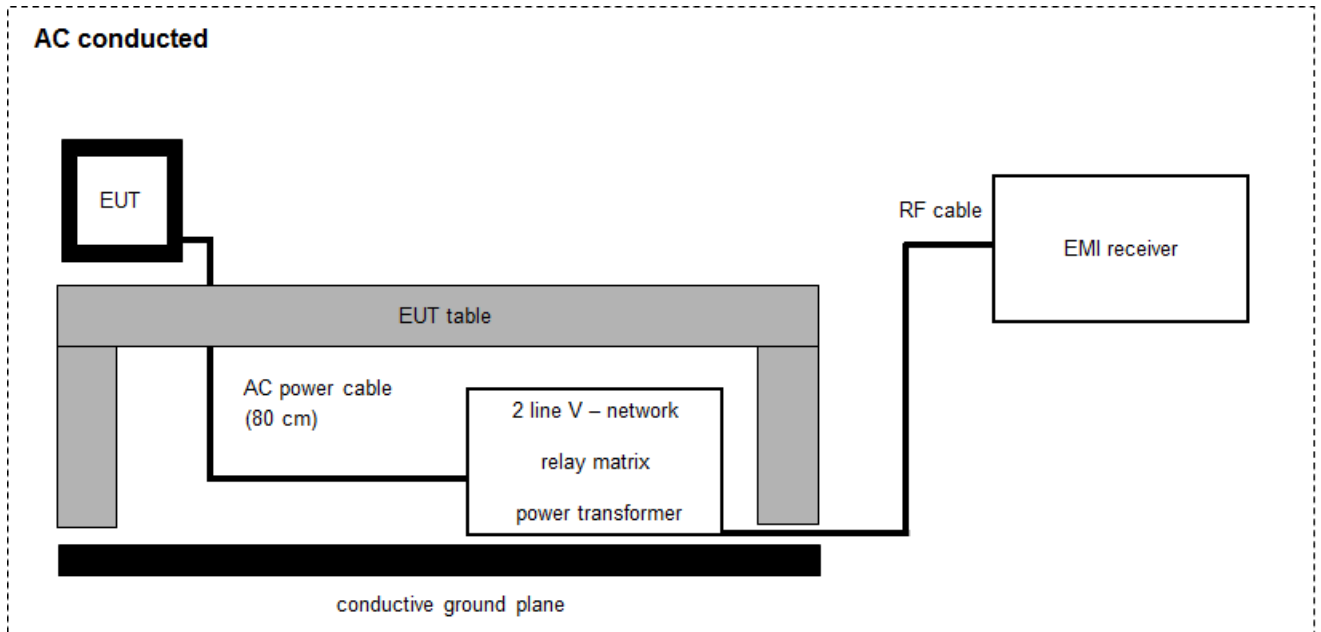

$$FS = UR + CF + VC$$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

Example calculation:

$$FS [dB\mu V/m] = 37.62 [dB\mu V/m] + 9.90 [dB] + 0.23 [dB] = 47.75 [dB\mu V/m] (244.06 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A	Two-line V-Network (LISN) 9 kHz to 30 MHz	ESH3-Z5	R&S	893045/004	300000584	k	02.02.2016	02.02.2017
2	A	AC-Spannungsquelle variabel	MV2616-V	EM-Test	0397-12	300003259	k	11.12.2015	11.12.2017
3	A	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	Ve	02.02.2016	02.02.2018
4	A	MXE EMI Receiver 20 Hz to 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405	k	04.02.2016	04.02.2017

8 Sequence of testing

8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the premeasurement are maximized by the software by rotating the turntable from 0° to 360°. In case of the 2-axis positioner is used the elevation axis is also rotated from 0° to 360°.
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8.3 Sequence of testing radiated spurious 1 GHz to 12.75 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8.4 Sequence of testing radiated spurious above 12.75 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

9 Measurement uncertainty

Measurement uncertainty	
Test case	Uncertainty
Antenna gain	± 3 dB
Power spectral density	± 1.5 dB
DTS bandwidth	± 100 kHz (depends on the used RBW)
Occupied bandwidth	± 100 kHz (depends on the used RBW)
Maximum output power	± 1.5 dB
Detailed spurious emissions @ the band edge - conducted	± 1.5 dB
Band edge compliance radiated	± 3 dB
Spurious emissions conducted	± 3 dB
Spurious emissions radiated below 30 MHz	± 3 dB
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB
Spurious emissions radiated above 12.75 GHz	± 4.5 dB
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB

10 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS - 247, Issue 1	See table!	2016-08-18	-/-

Test specification clause	Test case	Guideline	Temperature conditions	Power source voltages	Mode	C	NC	NA	NP	Remark
§15.247(b)(4) RSS - 247 / 5.4 (4)	Antenna gain	-/-	Nominal	Nominal	DSSS	-/-				-/-
§15.247(e) RSS - 247 / 5.2 (2)	Power spectral density	KDB 558074 DTS clause: 10.2	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(a)(2) RSS - 247 / 5.2 (1)	DTS bandwidth	KDB 558074 DTS clause: 8.1	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
RSS Gen clause 4.6.1	Occupied bandwidth	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(b)(3) RSS - 247 / 5.4 (4)	Maximum output power	KDB 558074 DTS clause: 9.1.2	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5	Detailed spurious emissions @ the band edge - conducted	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance conducted or radiated	KDB 558074 DTS clause: 13.3.2 and clause 12.2.2	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5	TX spurious emissions conducted	KDB 558074 DTS clause: 11.1 & 11.2 11.3	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.209(a) RSS-Gen	TX spurious emissions radiated below 30 MHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions radiated 30 MHz to 1 GHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions radiated above 1 GHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.109 RSS-Gen	RX spurious emissions radiated 30 MHz to 1 GHz	-/-	Nominal	Nominal	RX / idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.109 RSS-Gen	RX spurious emissions radiated above 1 GHz	-/-	Nominal	Nominal	RX / idle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.107(a) §15.207	Conducted emissions < 30 MHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

Note: C = Compliant; NC = Not compliant; NA = Not applicable; NP = Not performed

11 Additional comments

Reference documents: Module Test report FR3N2752-01C from TI Website

Special test descriptions: None

Configuration descriptions: None

Test mode: No test mode available.
Iperf was used to ping another device with the largest support packet size

Special software is used.
EUT is transmitting pseudo random data by itself

Antennas and transmit operating modes:

Operating mode 1 (single antenna)

- Equipment with 1 antenna,
- Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,
- Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)

Operating mode 2 (multiple antennas, no beamforming)

- Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.

Operating mode 3 (multiple antennas, with beamforming)

- Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.

12 Measurement results

12.1 Antenna gain

Measurement:

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the DSSS mode is used.

Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	3 MHz
Video bandwidth:	3 MHz
Trace mode:	Max hold
Test setup:	See sub clause 7.2A and 7.4A
Measurement uncertainty	See sub clause 9

Limits:


FCC	IC
6 dBi	

Results:

T_{nom}	V_{nom}	lowest channel 2412 MHz	middle channel 2437 MHz	highest channel 2462 MHz
Conducted power [dBm] Measured with DSSS modulation		13.2	13.1	13.0
Radiated power [dBm] Measured with DSSS modulation		12.0	12.3	13.4
Gain [dBi] Calculated		-1.2	-0.8	0.4


Plots: DSSS / b – mode

Plot 1: TX mode, lowest channel

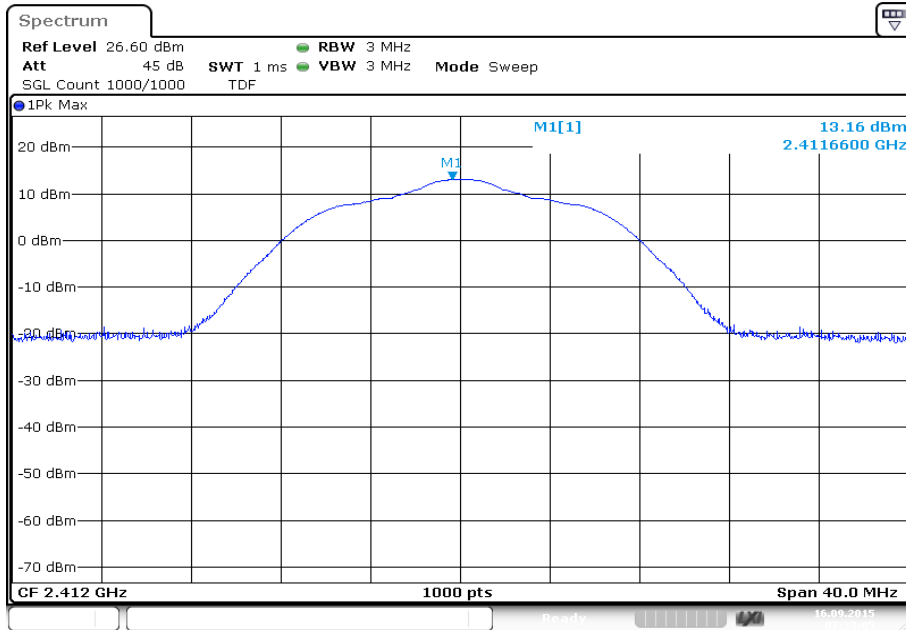


Date: 16.SEP.2015 07:33:06

Plot 2: TX mode, middle channel

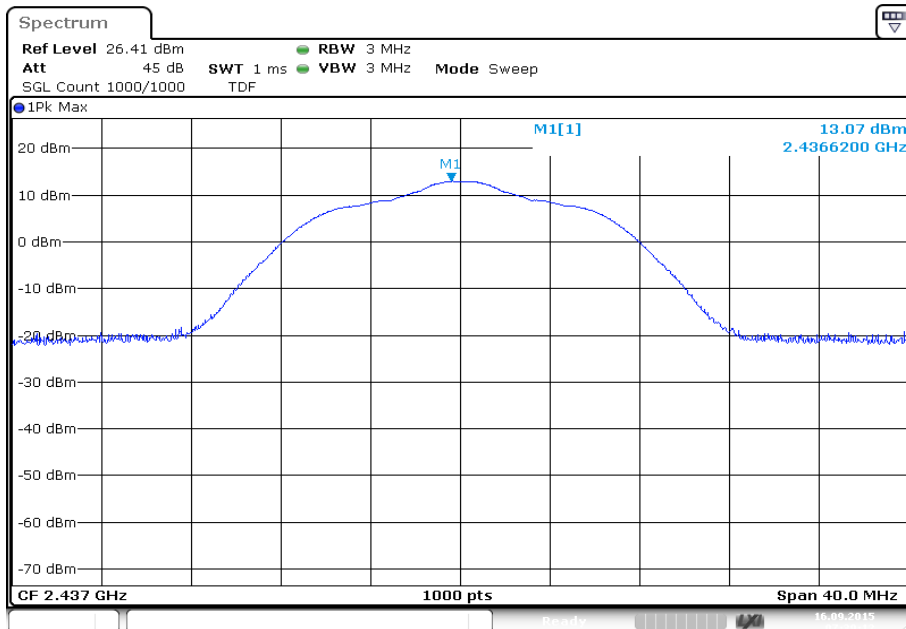

Date: 16.SEP.2015 07:39:13

Plot 3: TX mode, highest channel

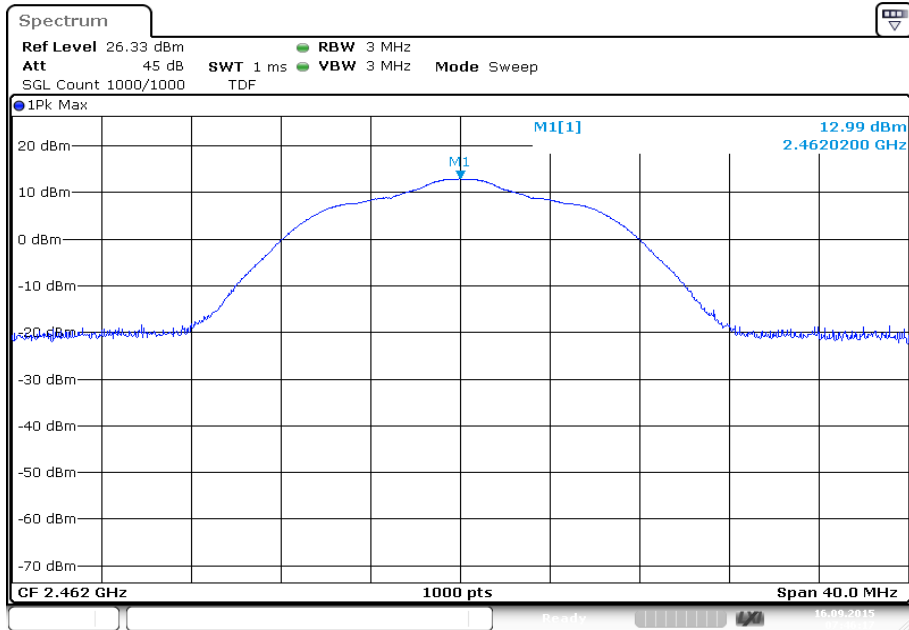

Date: 16.SEP.2015 07:46:18

12.2 Identify worst case data rate

Worst case data rate is taken from module test report.

Results:

Modulation	Modulation scheme / bandwidth
DSSS / b – mode	1Mbit/s
OFDM / g – mode	6Mbit/s
OFDM / n HT20 – mode	MCS0
OFDM / n HT40 – mode	MCS0

Measurements made in b-mode; g-mode and n HT40 mode.

12.3 Duty cycle

Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Depends on the signal see plot
Resolution bandwidth:	10 MHz
Video bandwidth:	10 MHz
Trace mode:	Max hold
Test setup:	See sub clause 7.4 - A
Measurement uncertainty:	See sub clause 9

Limits:

FCC	IC
-/-	

Results:

T _{nom}	V _{nom}	lowest channel 2412 MHz	middle channel 2437 MHz	highest channel 2462 MHz
DSSS / b – mode		99.10 % / 0.04 dB	98.80 % / 0.05 dB	99.10 % / 0.04 dB
OFDM / g – mode		93.69 % / 0.28 dB	93.41 % / 0.30 dB	93.69 % / 0.28 dB
OFDM / n HT20 – mode		92.49 % / 0.34 dB	92.49 % / 0.34 dB	92.49 % / 0.34 dB
T _{nom}	V _{nom}	lowest channel 2422 MHz	middle channel 2437 MHz	highest channel 2452 MHz
OFDM / n HT40 – mode		85.29 % / 0.69 dB	85.29 % / 0.69 dB	85.59 % / 0.68 dB

12.4 Maximum output power

Description:

Measurement of the maximum output power conducted and radiated. The measurements are performed using the data rate producing the highest conducted output power.

Measurement:

Measurement parameter	
According to DTS clause: 9.1.2	
Peak power meter	
Test setup:	See sub clause 7.4 – B
Measurement uncertainty	See sub clause 9

Limits:

FCC	IC
Conducted: 1.0 W – Antenna gain with max. 6 dBi	

Results:

Frequency	Maximum Output Power [dBm]		
	2412 MHz	2437 MHz	2462 MHz
Output power conducted DSSS / b – mode	16.4	16.7	16.5
Output power conducted OFDM / g – mode	19.1	19.4	19.1
Output power conducted OFDM / n HT20 – mode	19.2	19.4	19.6
Frequency	2422 MHz	2437 MHz	2452 MHz
Output power conducted OFDM / n HT40 – mode	19.5	19.8	19.5

12.5 Peak power spectral density

Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated for both modulations at the lowest, middle and highest channel.

Measurement:

Measurement parameter	
According to DTS clause: 10.2	
Detector:	Positive Peak
Sweep time:	Auto
Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Span:	30 MHz
Trace mode:	Max hold (allow trace to fully stabilize)
Test setup:	See sub clause 7.4 – A
Measurement uncertainty	See sub clause 9

Limits:


FCC	IC
8 dBm / 3kHz (conducted)	

Results:

Modulation	Peak power spectral density [dBm/100kHz]		
	2412 MHz	2437 MHz	2462 MHz
Frequency			
DSSS / b – mode	4.53	4.53	4.42
OFDM / g – mode	0.15	3.30	-0.04
OFDM / n HT20 – mode	0.49	2.68	0.14
Frequency	2422 MHz	2437 MHz	2452 MHz
OFDM / n HT40 – mode	-3.72	-1.40	-4.18


Plots: DSSS / b – mode

Plot 1: Lowest channel

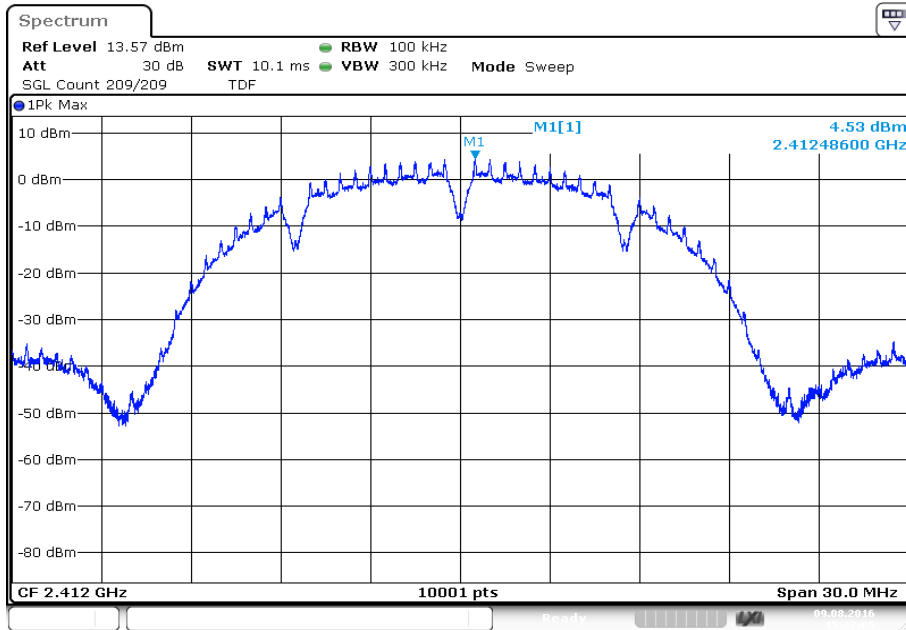


Date: 9.AUG.2016 15:27:06

Plot 2: Middle channel

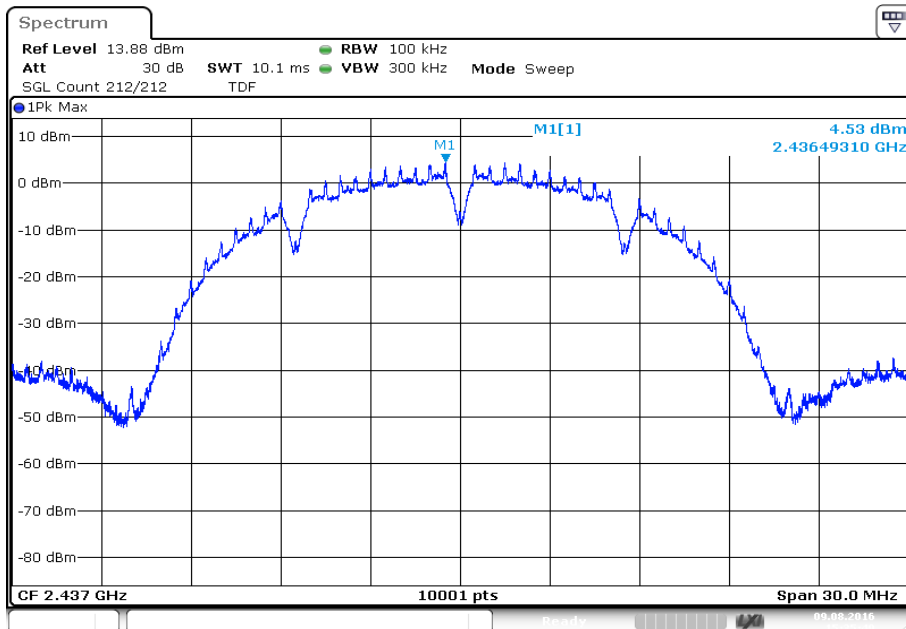


Date: 9.AUG.2016 15:35:50

Plot 3: Highest channel

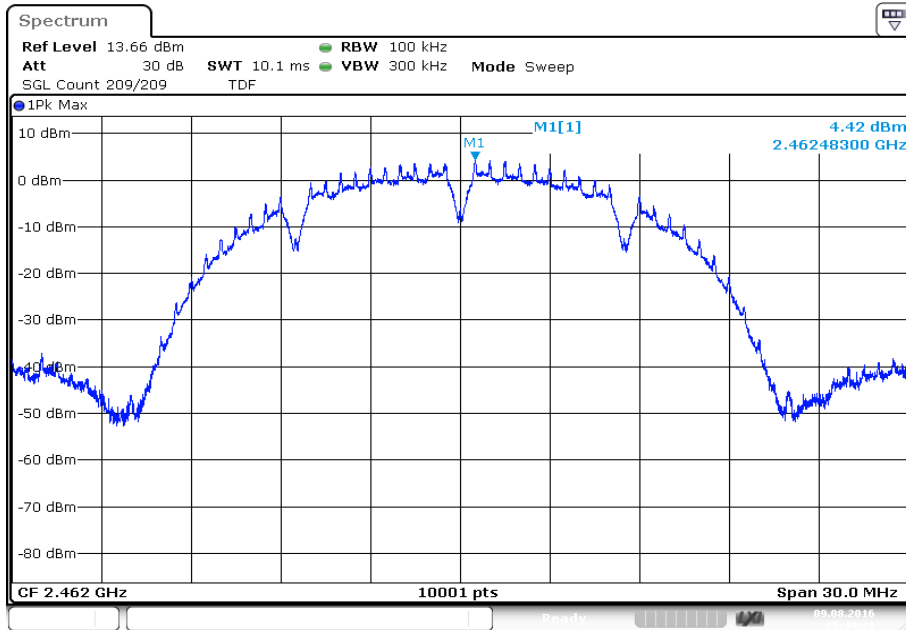


Plots: OFDM / g – mode

Plot 1: Lowest channel

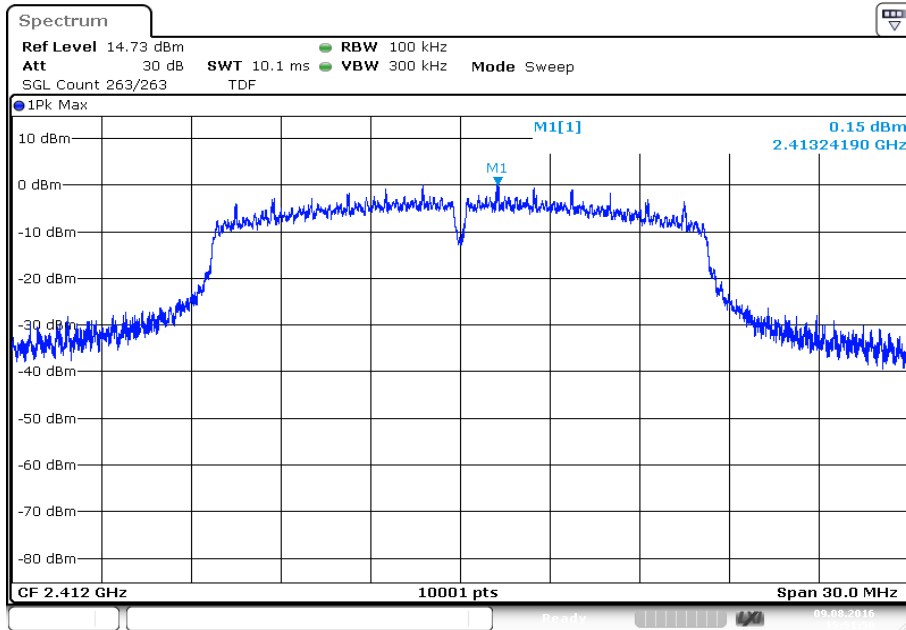


Date: 9.AUG.2016 15:51:51

Plot 2: Middle channel

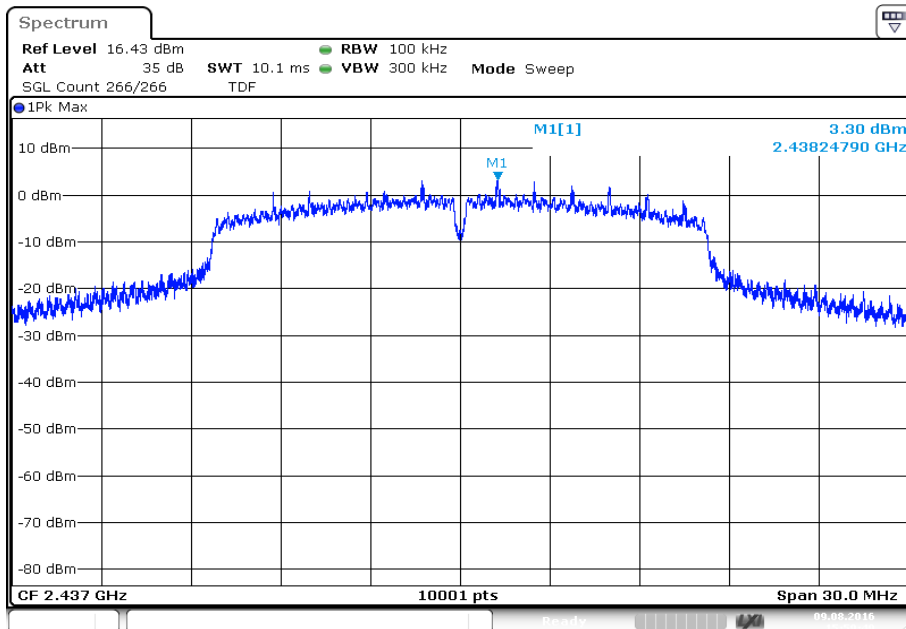

Date: 9.AUG.2016 15:59:50


Plot 3: Highest channel

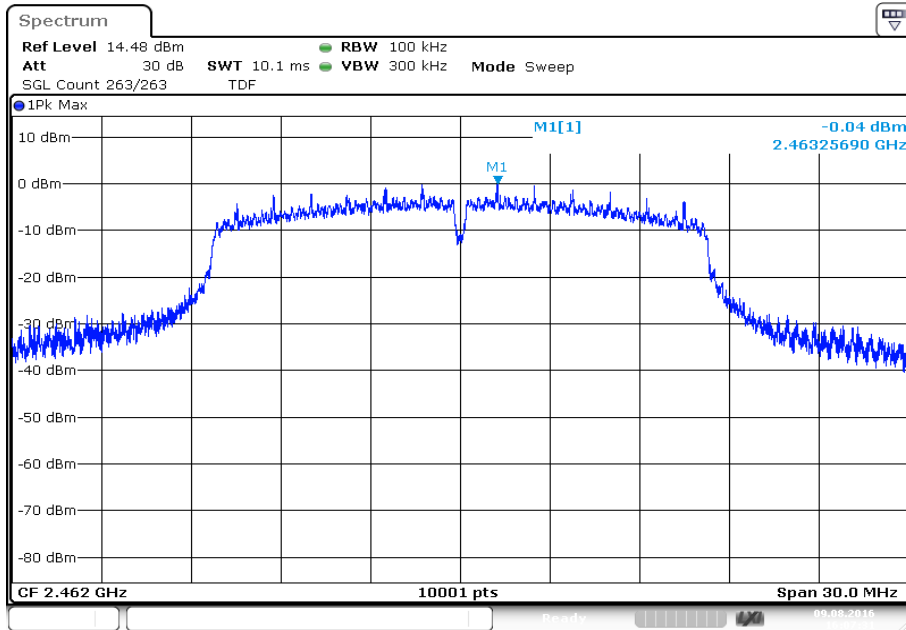

Date: 9.AUG.2016 16:07:32


Plots: OFDM / n HT20 – mode

Plot 1: Lowest channel

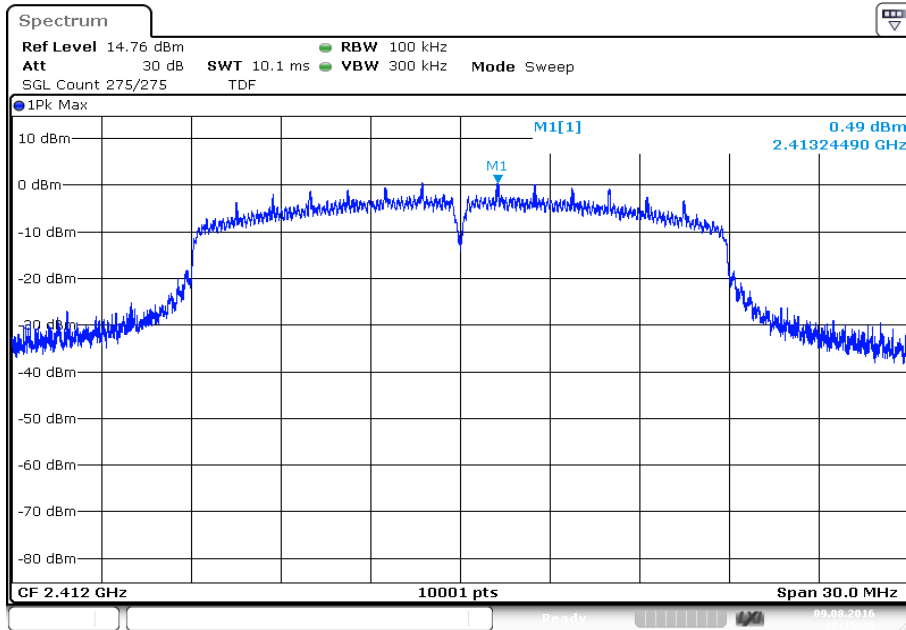


Date: 9.AUG.2016 16:15:26

Plot 2: Middle channel

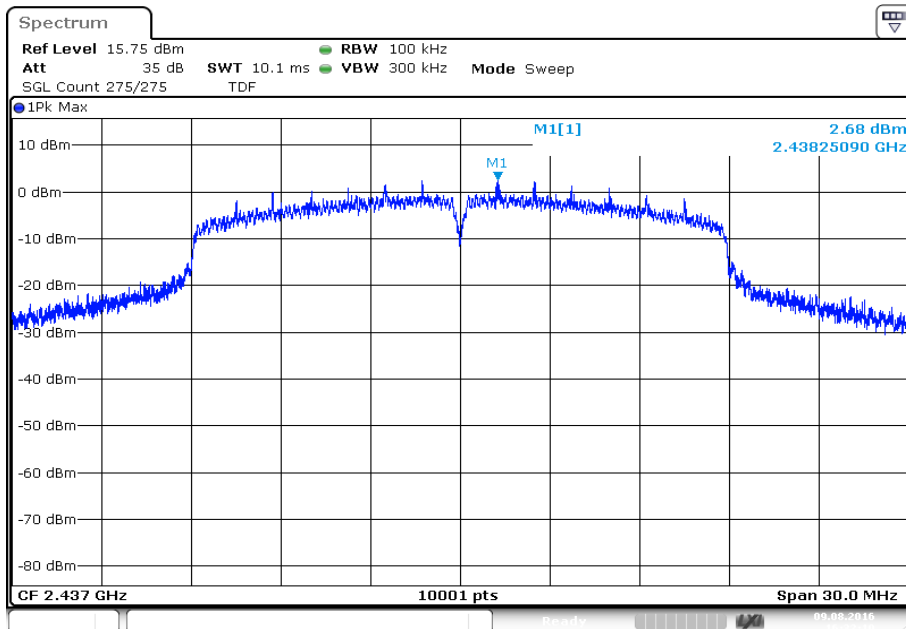

Date: 9.AUG.2016 16:32:11


Plot 3: Highest channel

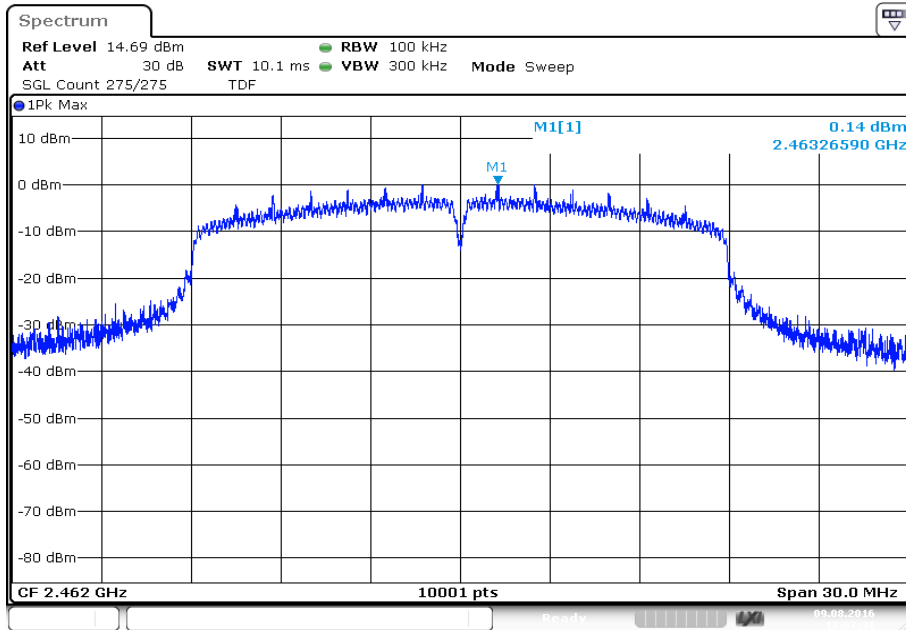

Date: 9.AUG.2016 17:07:32


Plots: OFDM / n HT40 – mode

Plot 1: Lowest channel

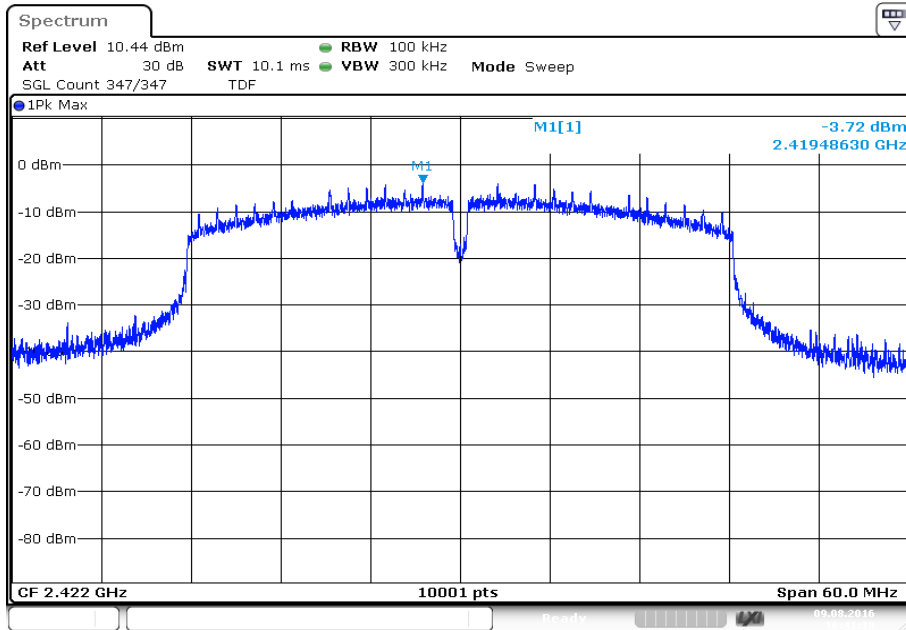


Date: 9.AUG.2016 16:41:19

Plot 2: Middle channel

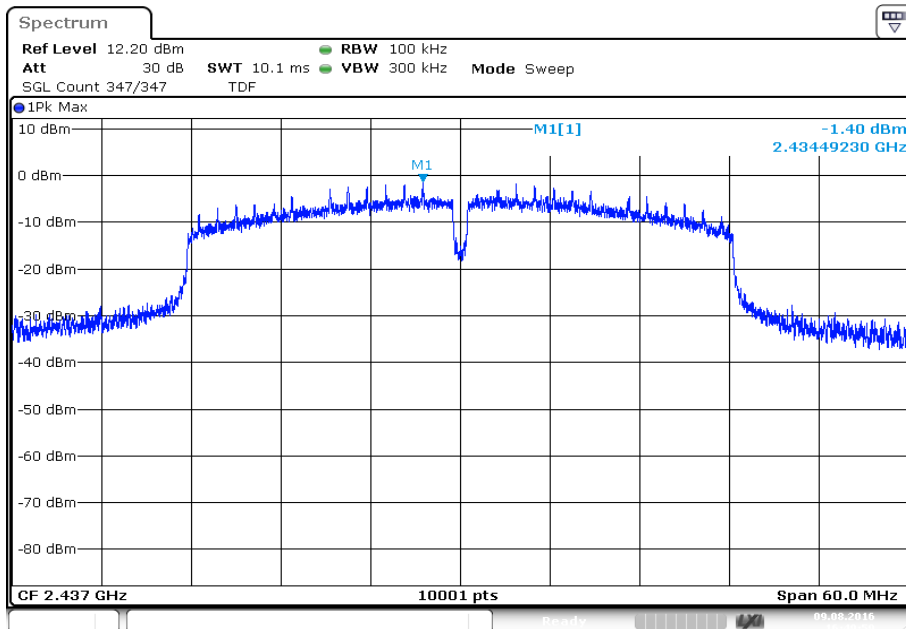

Date: 9.AUG.2016 16:49:59

Plot 3: Highest channel

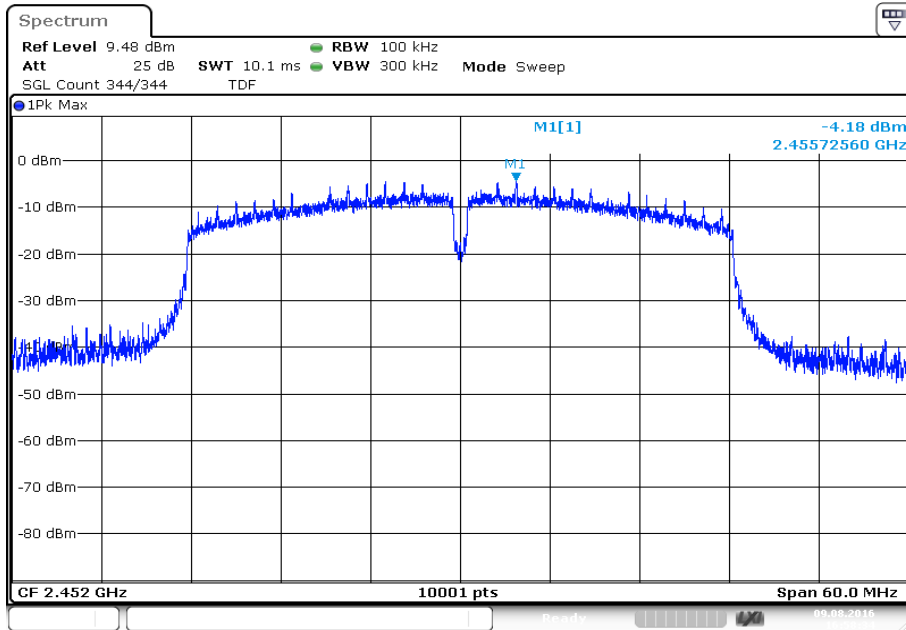

Date: 9.AUG.2016 16:58:35

12.6 6 dB DTS bandwidth

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
According to DTS clause: 8.1	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	100 kHz
Video bandwidth:	500 kHz
Span:	30 MHz / 50 MHz
Measurement procedure:	Measurement of the 75% bandwidth using the integration function of the analyzer
Trace mode:	Single count with 200 counts
Test setup:	See sub clause 7.4 – A
Measurement uncertainty	See sub clause 9

Limits:


FCC	IC
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	

Results:

Frequency	6 dB DTS bandwidth [kHz]		
	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode	10055	10049	10052
OFDM / g – mode	15074	15098	15079
OFDM / n HT20 – mode	15091	15098	15101
Frequency	2422 MHz	2437 MHz	2452 MHz
OFDM / n HT40 – mode	32565	32553	31311


Plots: DSSS / b – mode

Plot 1: Lowest channel

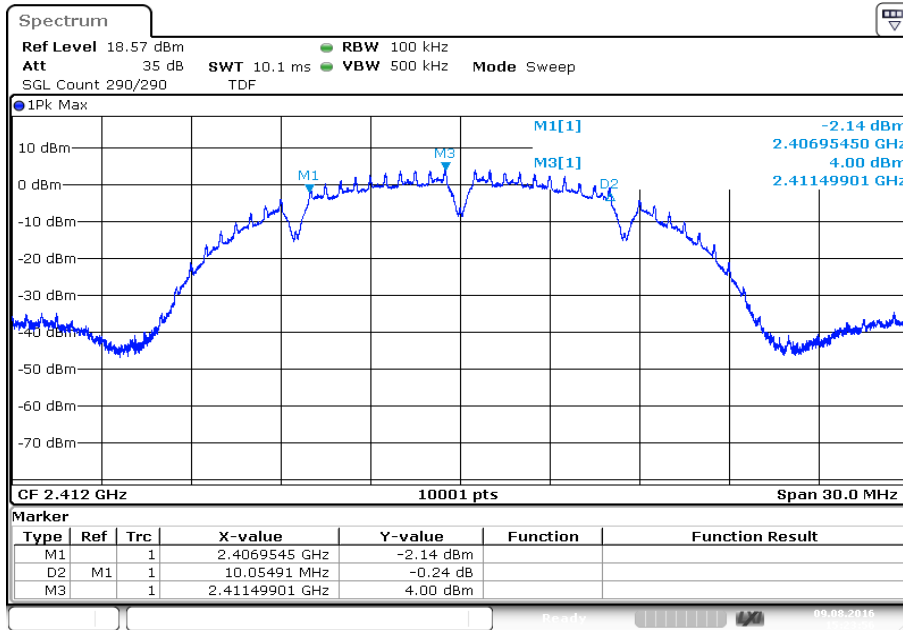


Date: 9.AUG.2016 15:23:57

Plot 2: Middle channel

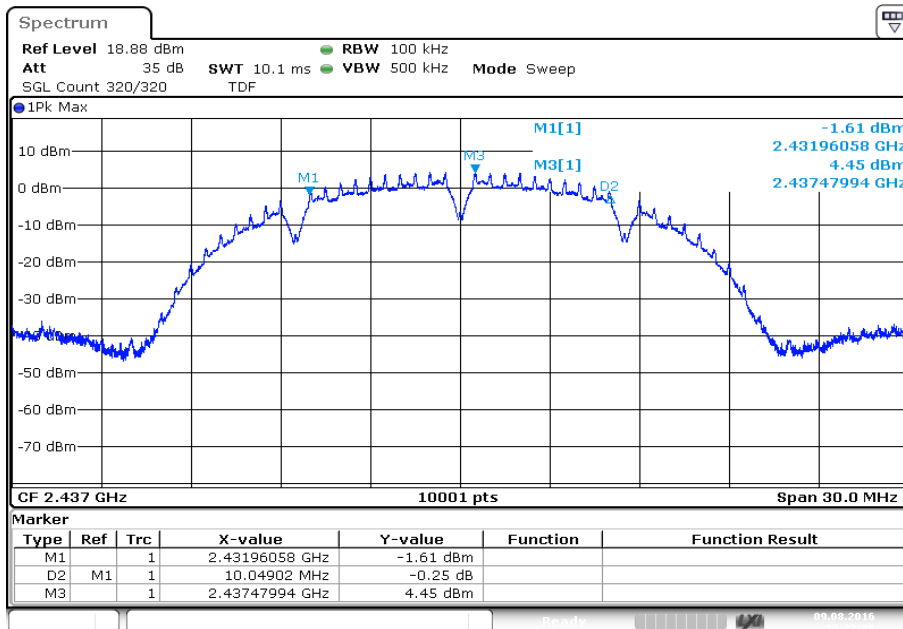

Date: 9.AUG.2016 15:32:39


Plot 3: Highest channel

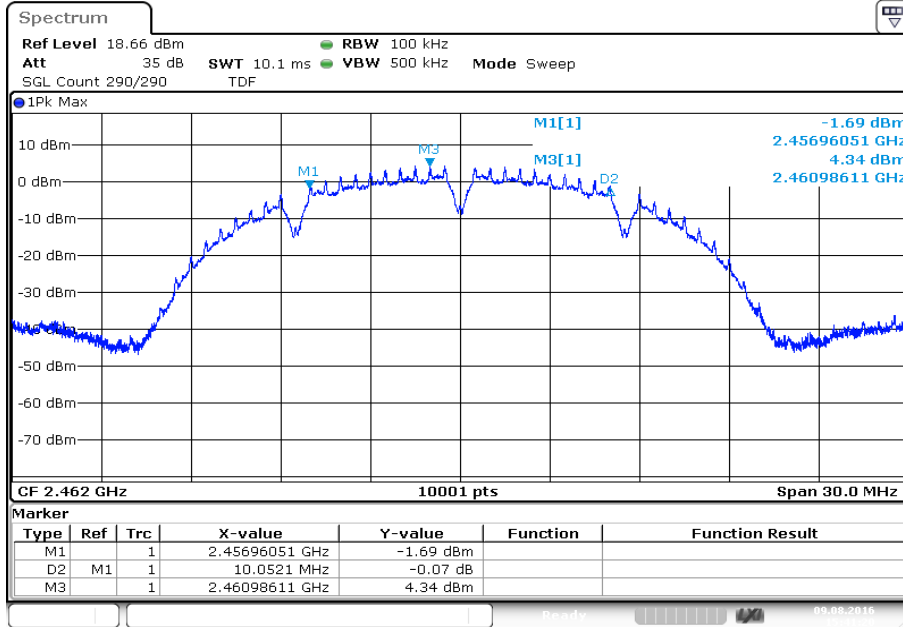


Date: 9.AUG.2016 15:41:20

Plots: OFDM / g – mode


Plot 1: Lowest channel

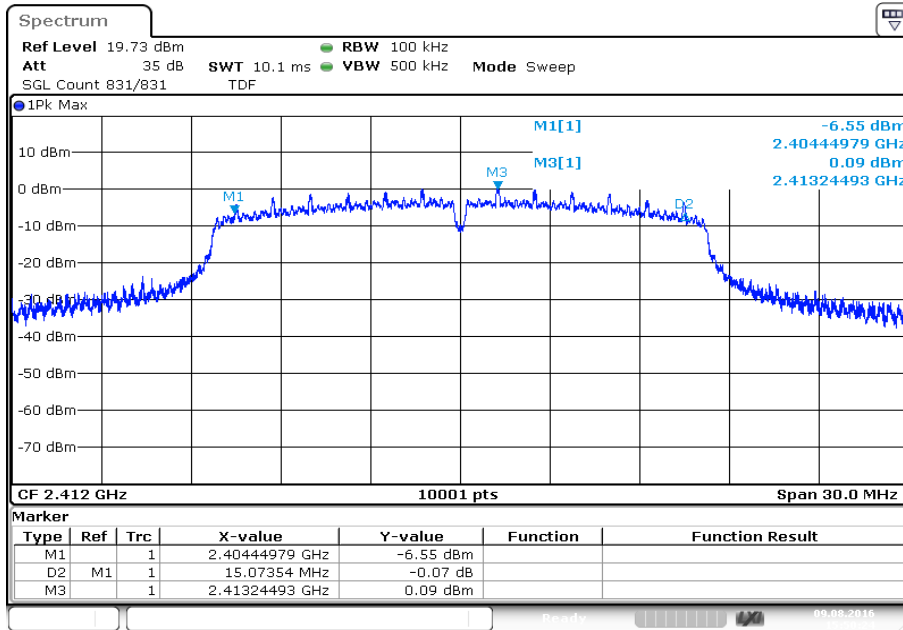

Plot 2: Middle channel

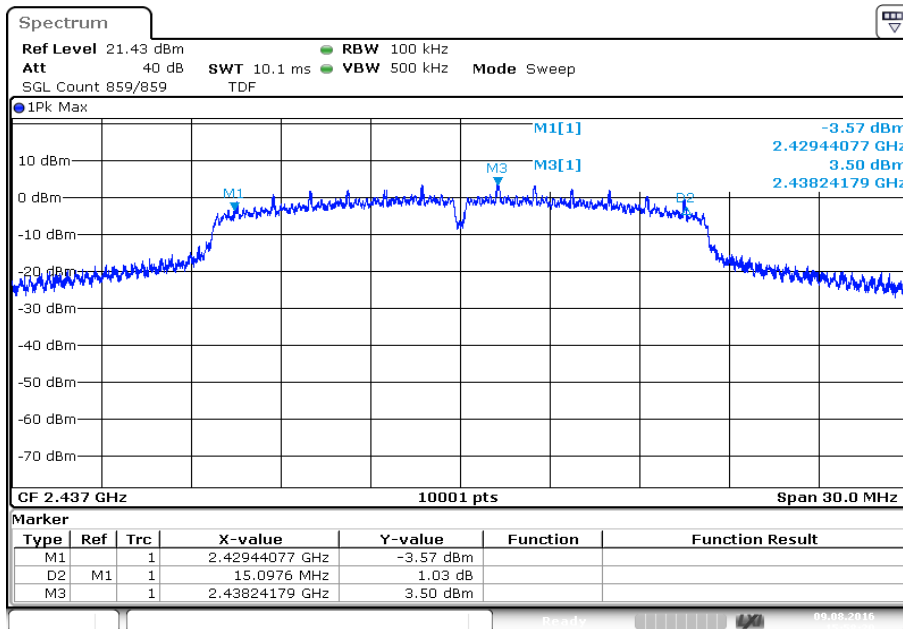


Plot 3: Highest channel

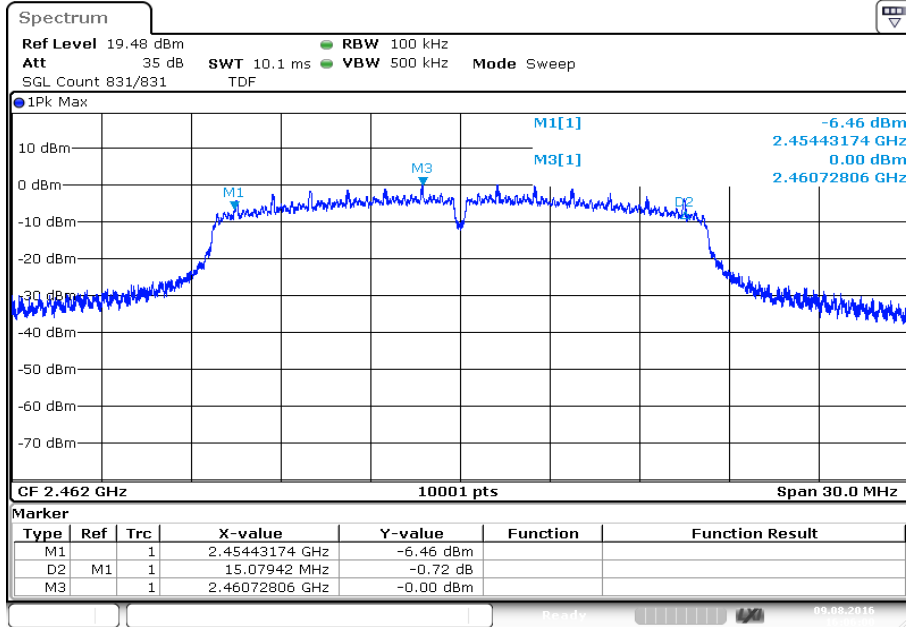

Date: 9.AUG.2016 16:06:01


Plots: OFDM / n HT20 – mode

Plot 1: Lowest channel

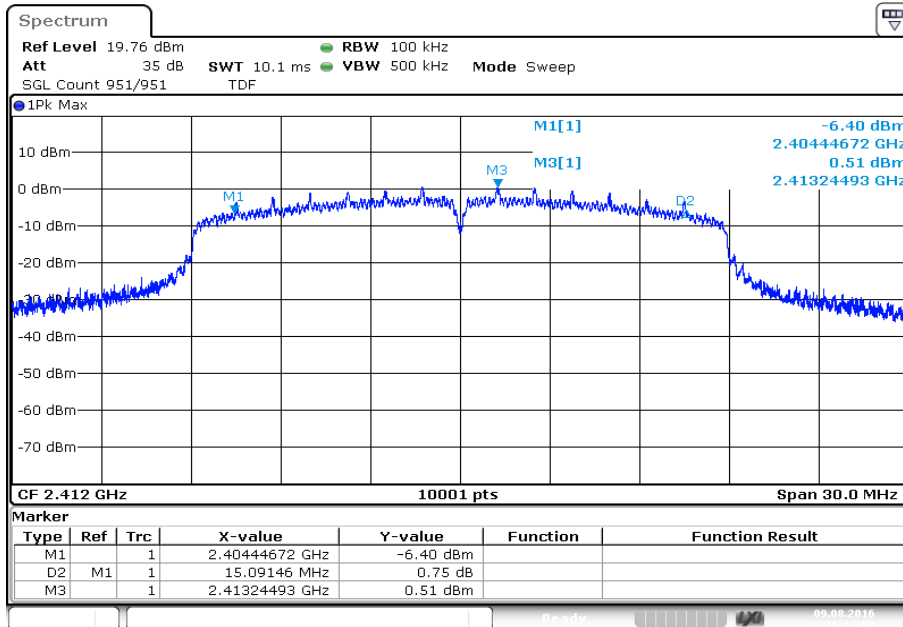


Date: 9.AUG.2016 16:13:58

Plot 2: Middle channel

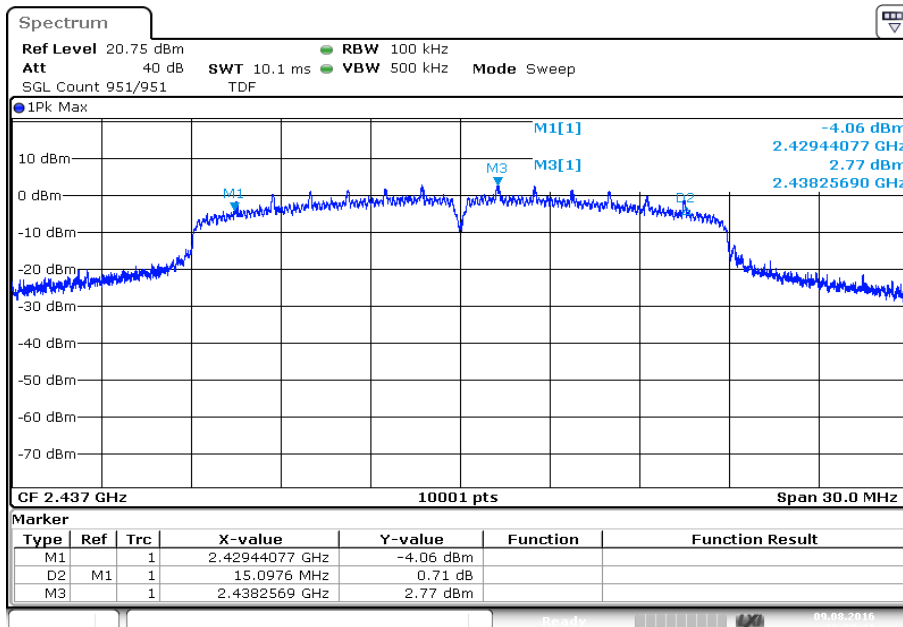

Date: 9.AUG.2016 16:30:42


Plot 3: Highest channel

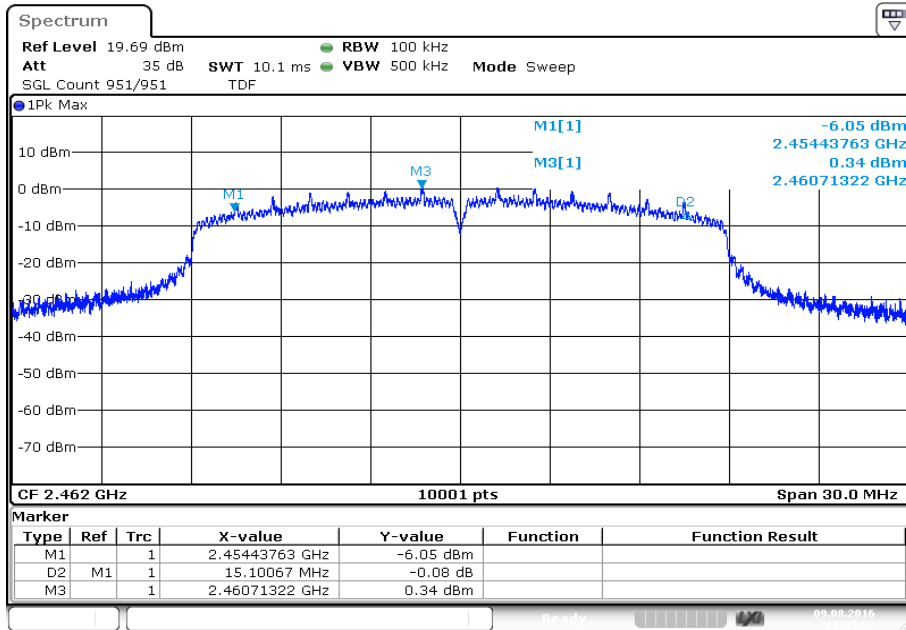

Date: 9.AUG.2016 17:05:59


Plots: OFDM / n HT40 – mode

Plot 1: Lowest channel

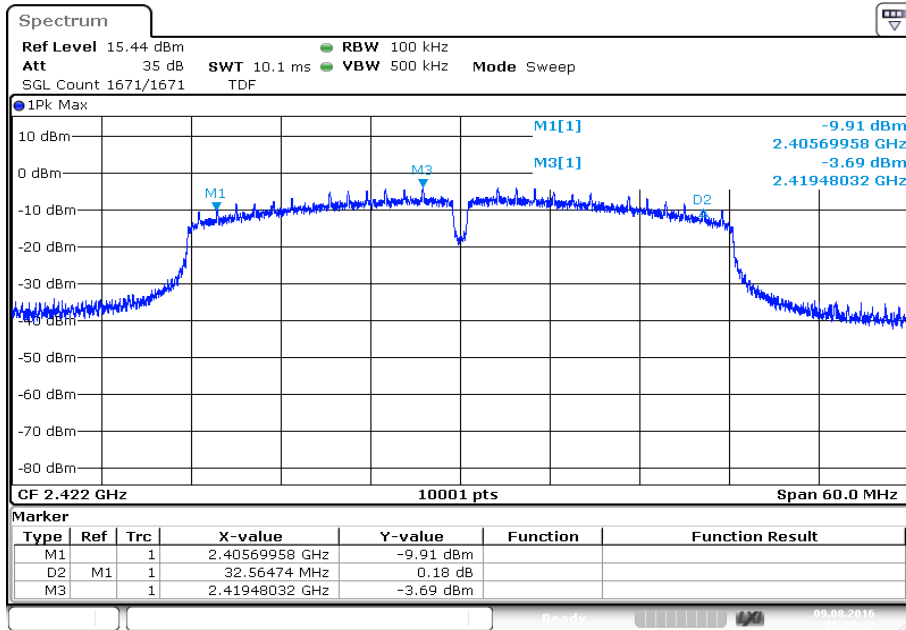


Date: 9.AUG.2016 16:39:43

Plot 2: Middle channel

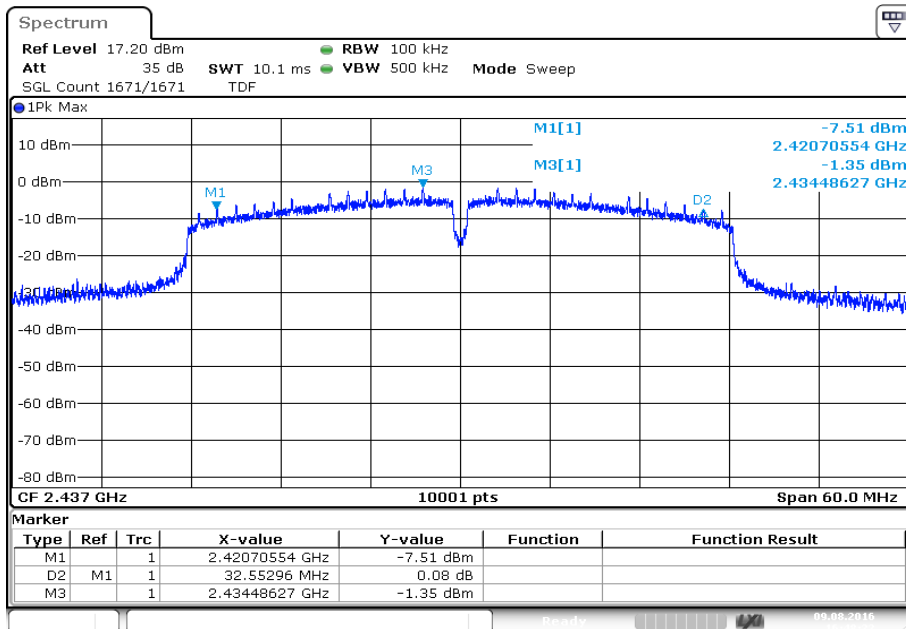

Date: 9.AUG.2016 16:48:23

Plot 3: Highest channel

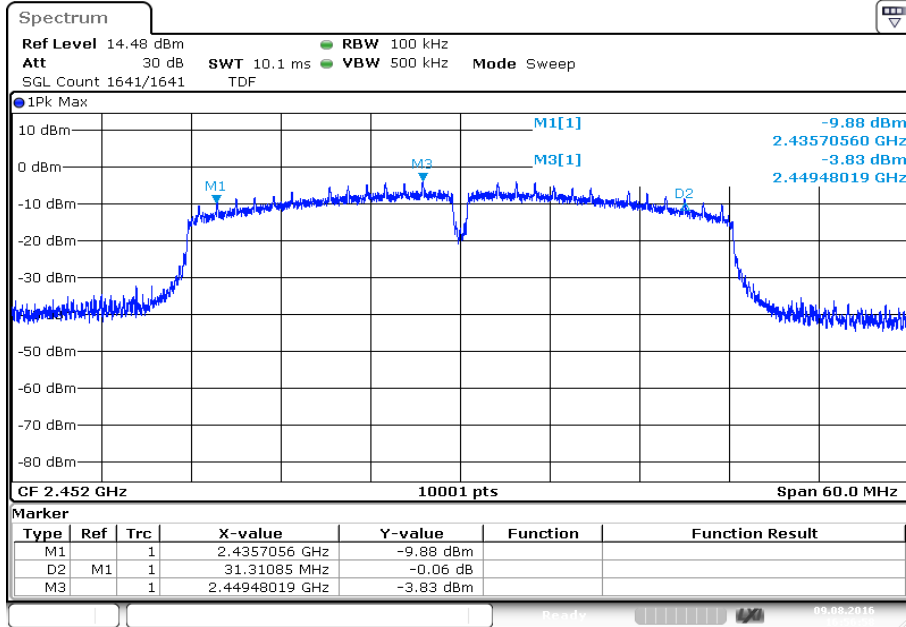

Date: 9.AUG.2016 16:56:59

12.7 Occupied bandwidth – 99% emission bandwidth

Description:

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	300 kHz
Video bandwidth:	1 MHz
Span:	30 MHz
Measurement procedure:	Measurement of the 99% bandwidth using the integration function of the analyzer
Trace mode:	Max hold (allow trace to stabilize)
Test setup:	See sub clause 7.4 - A
Measurement uncertainty	See sub clause 9

Usage:


-/-	IC
OBW is necessary for Emission Designator	

Results:

Modulation	99% bandwidth [kHz]		
	2412 MHz	2437 MHz	2462 MHz
Frequency			
DSSS / b – mode	14645	14675	14696
OFDM / g – mode	16420	17644	16420
Frequency	2422 MHz	2437 MHz	2452 MHz
OFDM / n HT40 – mode	35768	36530	35720


Plots: DSSS / b – mode

Plot 1: TX mode, lowest channel

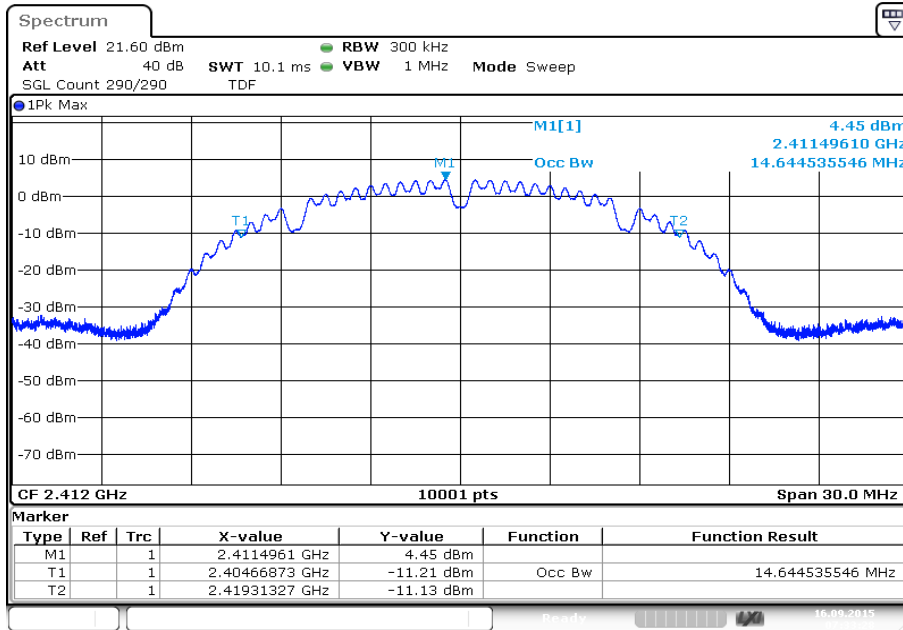


Date: 16.SEP.2015 07:33:29

Plot 2: TX mode, middle channel

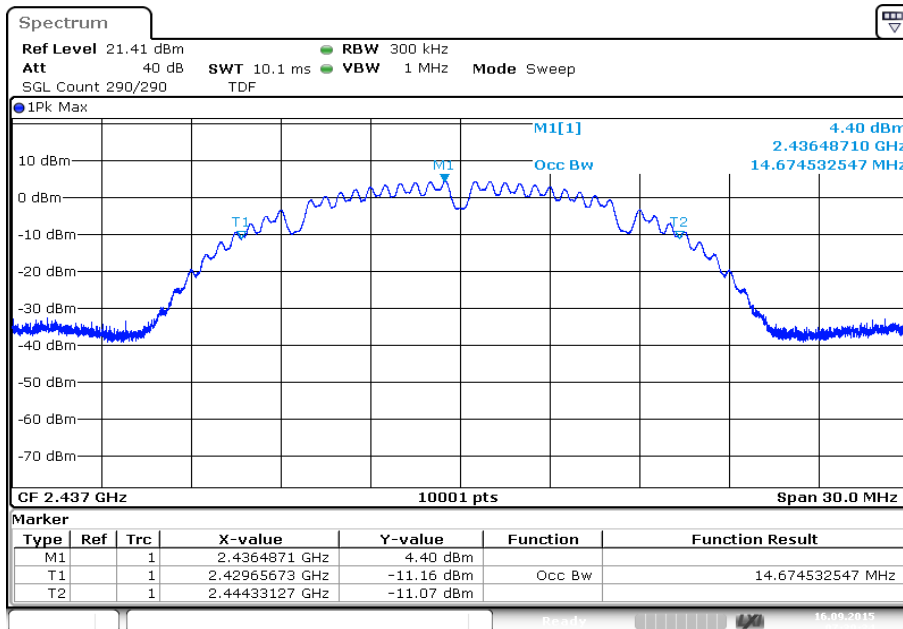


Date: 16.SEP.2015 07:39:34

Plot 3: TX mode, highest channel

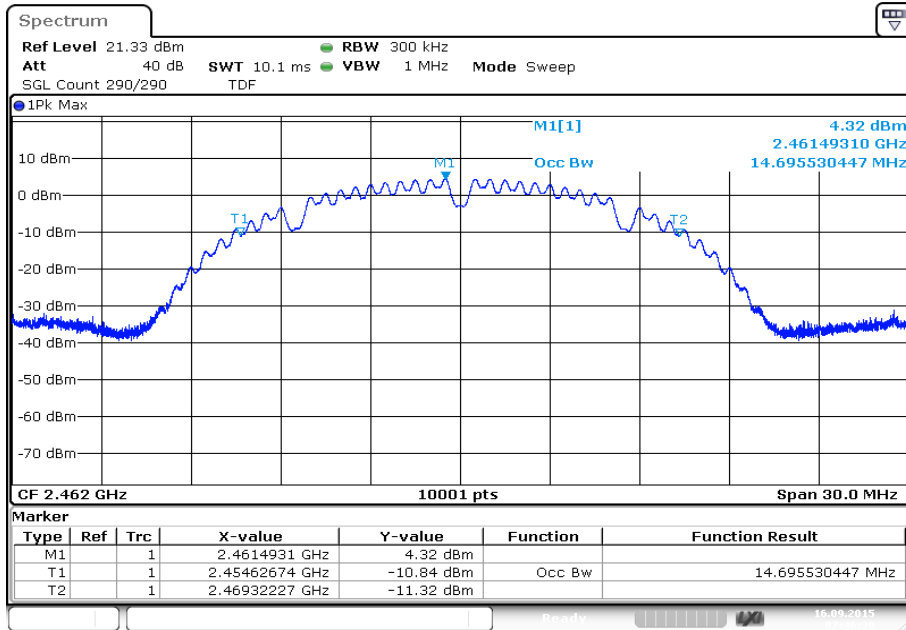


Plots: OFDM / g – mode

Plot 1: TX mode, lowest channel

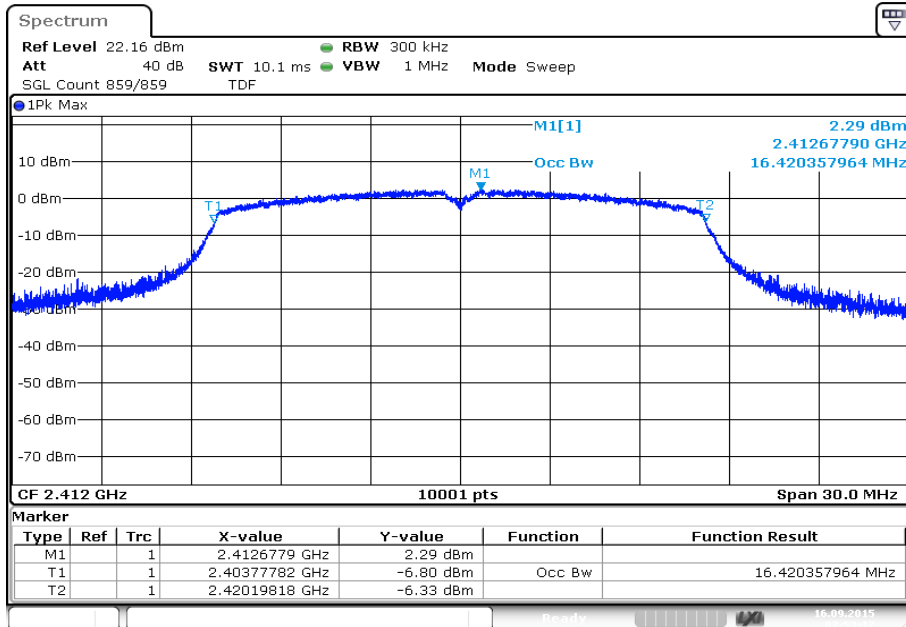


Date: 16.SEP.2015 07:53:17

Plot 2: TX mode, middle channel

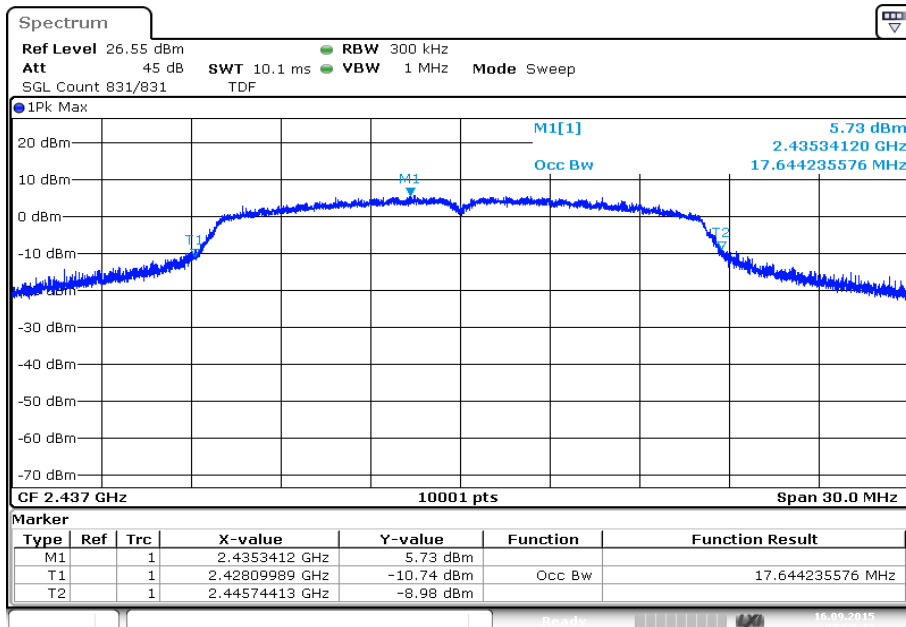

Date: 16.SEP.2015 07:58:18


Plot 3: TX mode, highest channel

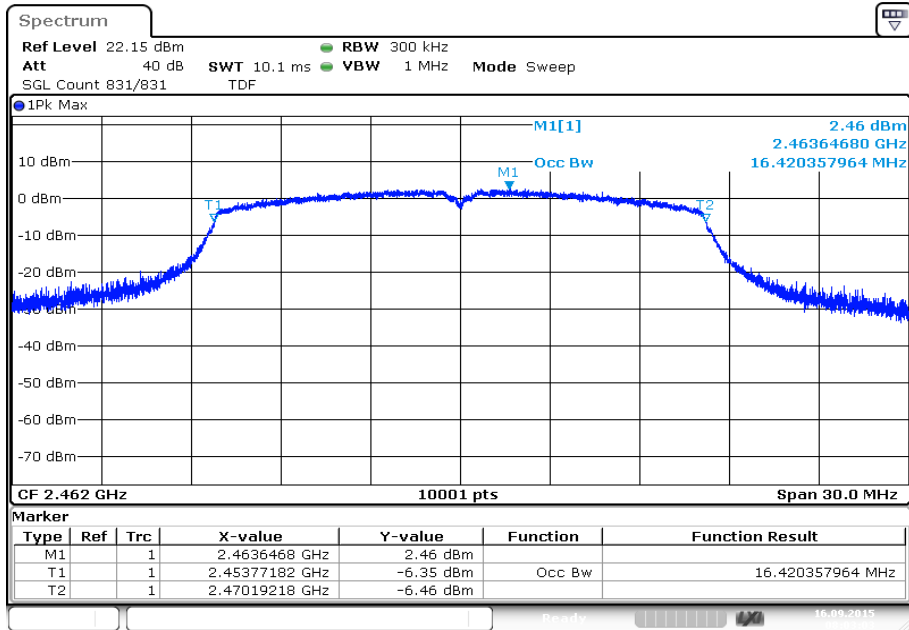


Date: 16.SEP.2015 08:03:03

Plots: OFDM / n HT40 – mode


Plot 1: TX mode, lowest channel

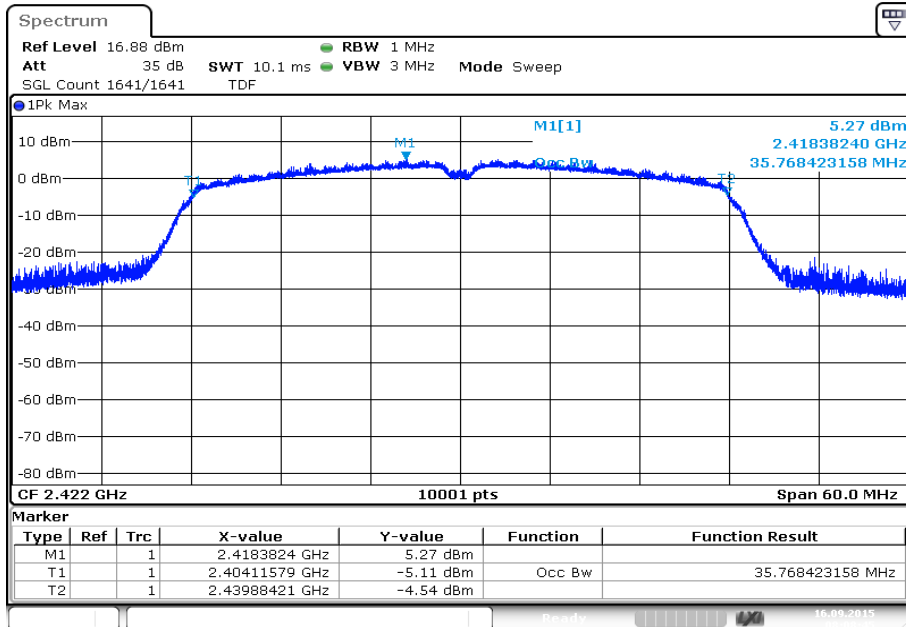

Plot 2: TX mode, middle channel

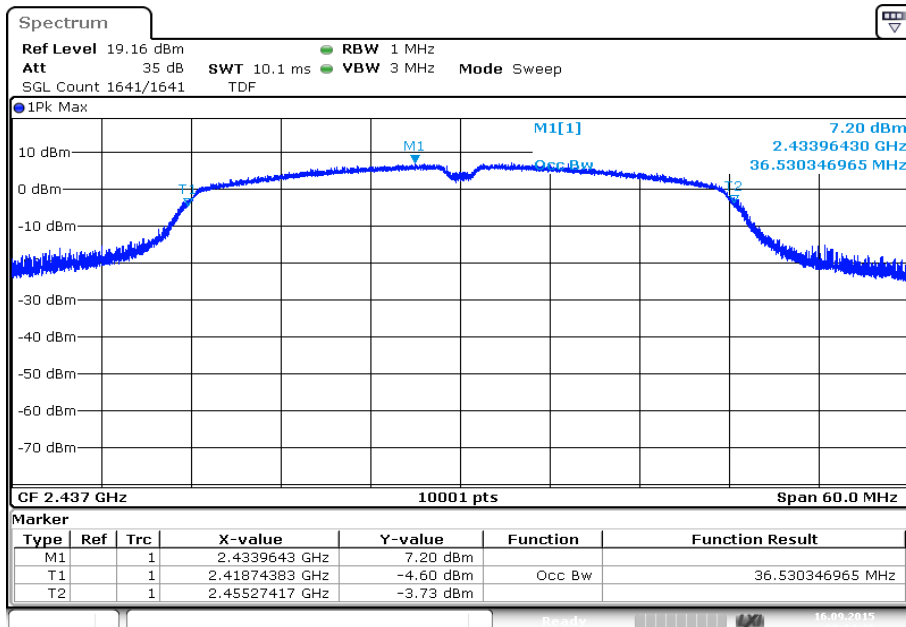

Plot 3: TX mode, highest channel

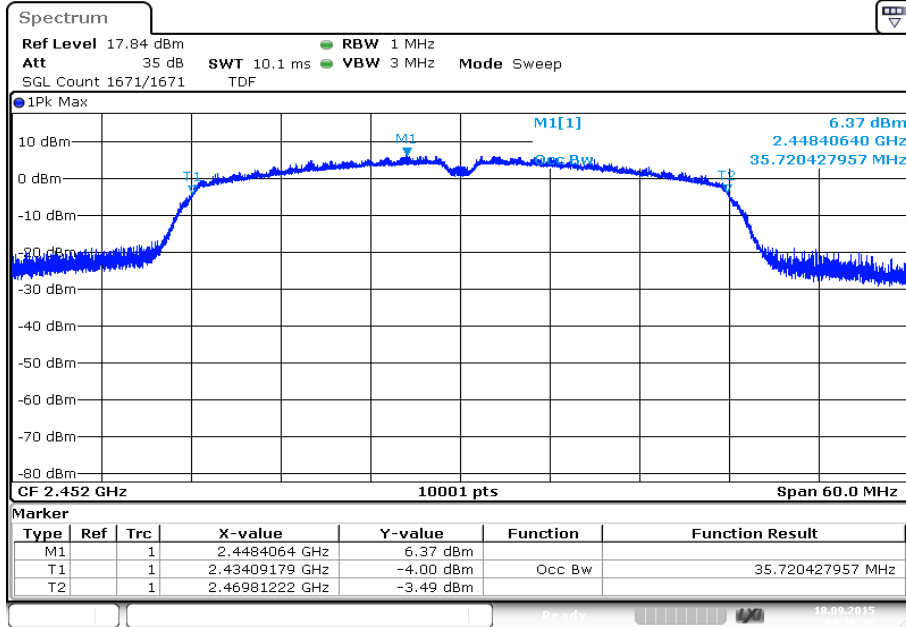

Date: 18.SEP.2015 09:16:36

12.8 Spurious emissions conducted

Description:

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at channel 1, 6 and 11. The measurement is repeated for all modulations.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	100 kHz
Video bandwidth:	500 kHz
Span:	9 kHz to 25 GHz
Trace mode:	Max Hold
Test setup:	See sub clause 7.4 – A
Measurement uncertainty	See sub clause 9

Limits:

FCC	IC
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required</p>	

Results: DSSS / b – mode

TX Spurious Emissions Conducted					
DSSS / b – mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		3.5	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
2437		4.7	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
2462		3.6	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant

Results: OFDM / g – mode

TX Spurious Emissions Conducted					
OFDM / g – mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		-0.4	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
2437		-0.1	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
2462		-0.1	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant

Results: OFDM / n HT20 – mode


TX Spurious Emissions Conducted					
OFDM / n HT20 – mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		0.4	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
2437		2.4	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
2462		-0.5	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant

Results: OFDM / n HT40 – mode

TX Spurious Emissions Conducted					
OFDM / n HT40 – mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2422		-5.8	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
2437		-2.3	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant
2452		-4.6	30 dBm		Operating frequency
No peaks detected. All detected emissions are below the -20 dBc & -30 dBc criteria.			-20 dBc (peak) -30 dBc (average)		compliant


Plots: DSSS / b – mode

Plot 1: Lowest channel, up to 25 GHz

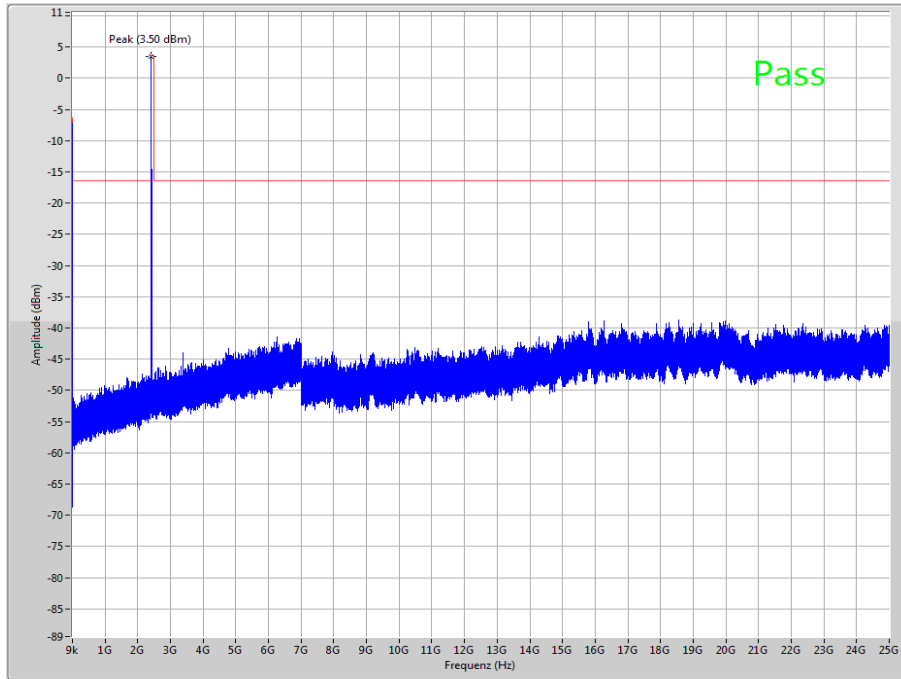


The peak at the beginning of the plot is the LO from the SA.

Plot 2: Lowest channel, zoomed carrier

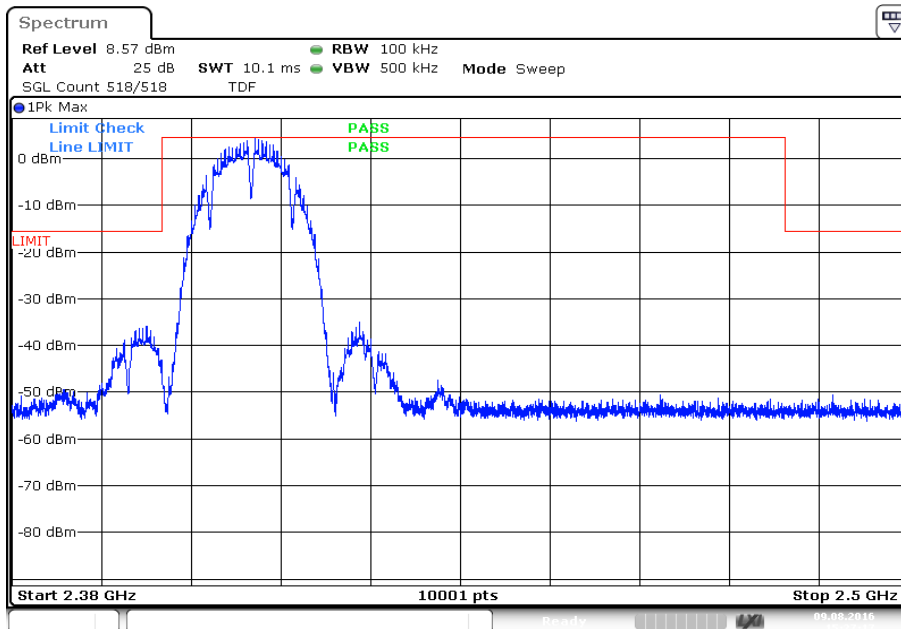


Date: 9.AUG.2016 15:27:18

Plot 3: Middle channel, up to 25 GHz

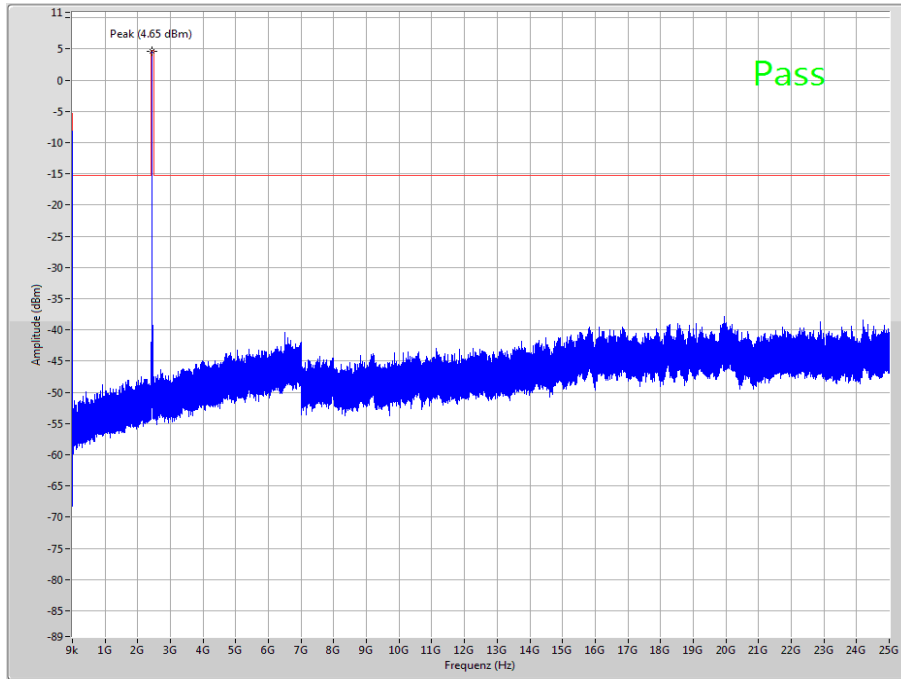


The peak at the beginning of the plot is the LO from the SA.

Plot 4: Middle channel, zoomed carrier

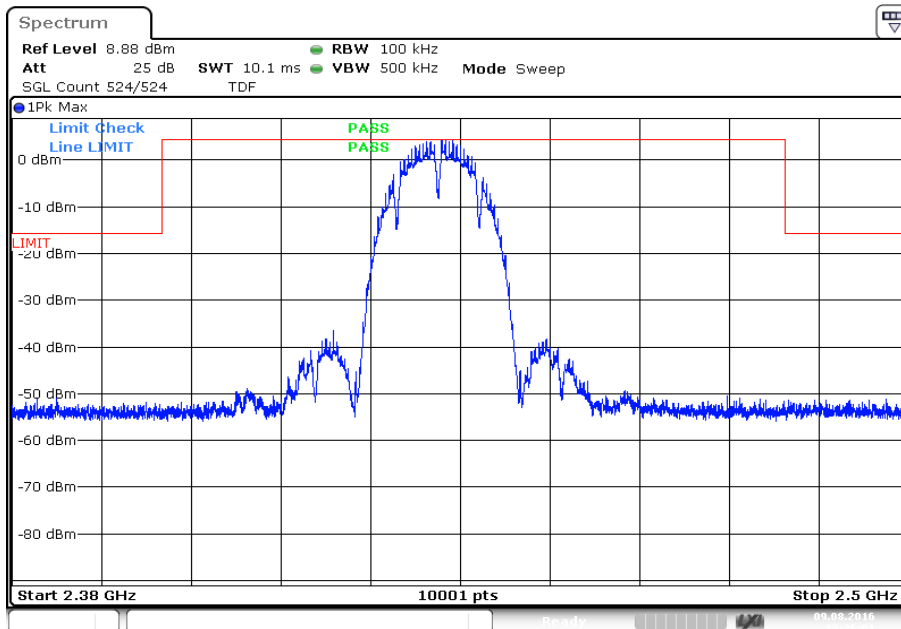


Date: 9.AUG.2016 15:36:02

Plot 5: Highest channel, up to 25 GHz

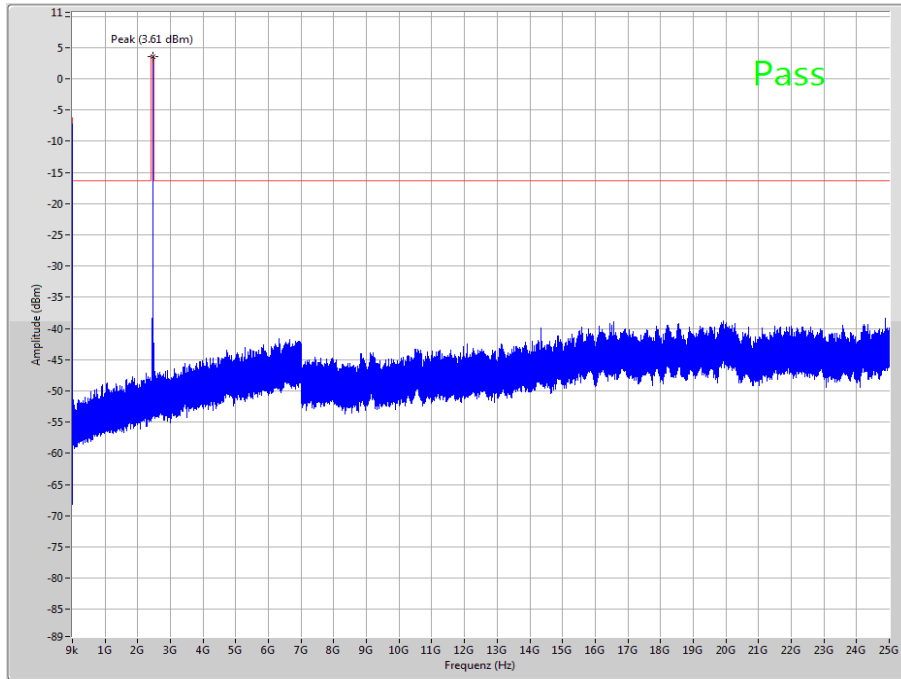

The peak at the beginning of the plot is the LO from the SA.


Plot 6: Highest channel, zoomed carrier

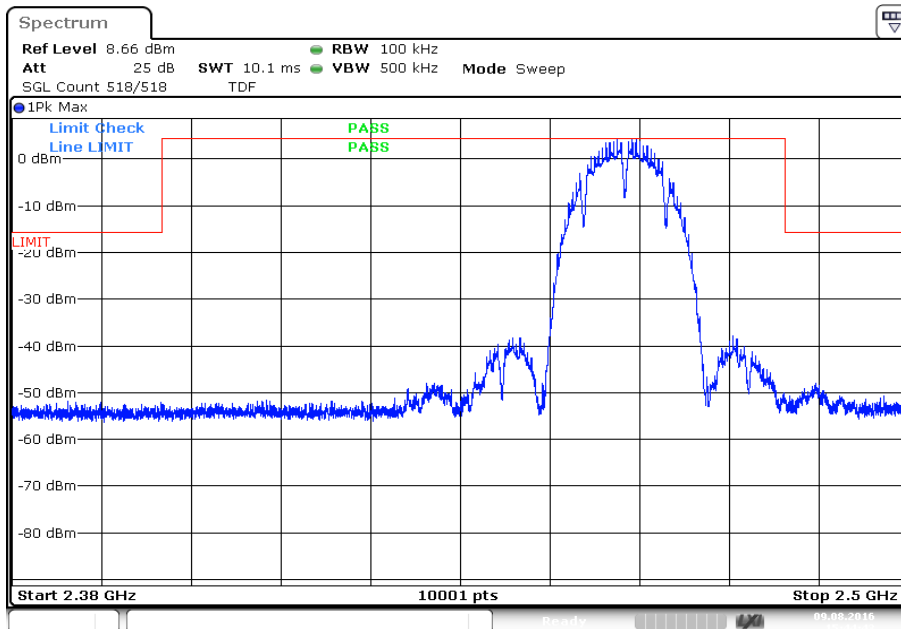

Date: 9.AUG.2016 15:44:43


Plots: OFDM / g – mode

Plot 1: Lowest channel, up to 25 GHz

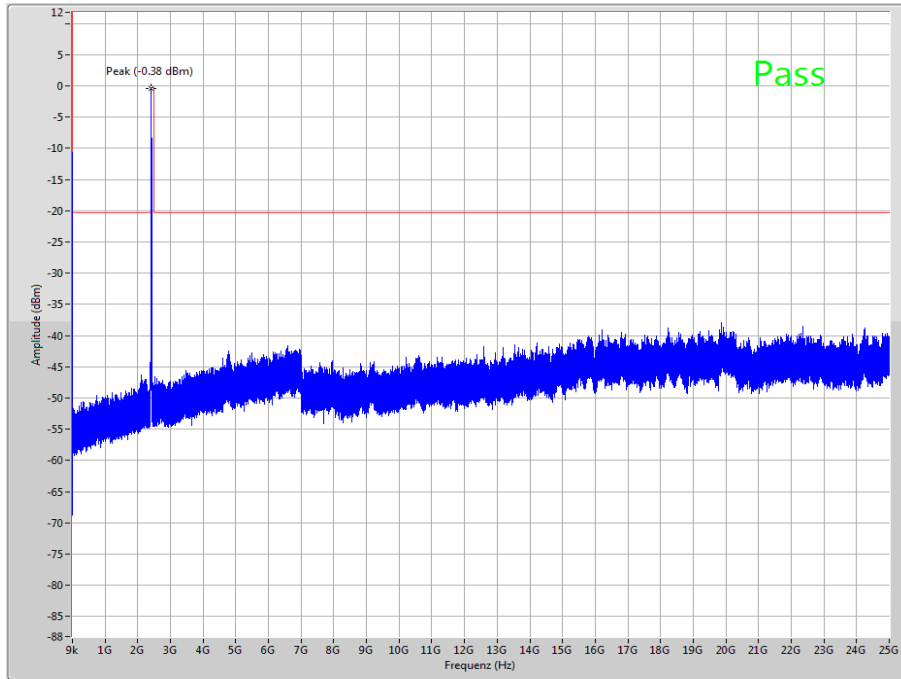


The peak at the beginning of the plot is the LO from the SA.

Plot 2: Lowest channel, zoomed carrier

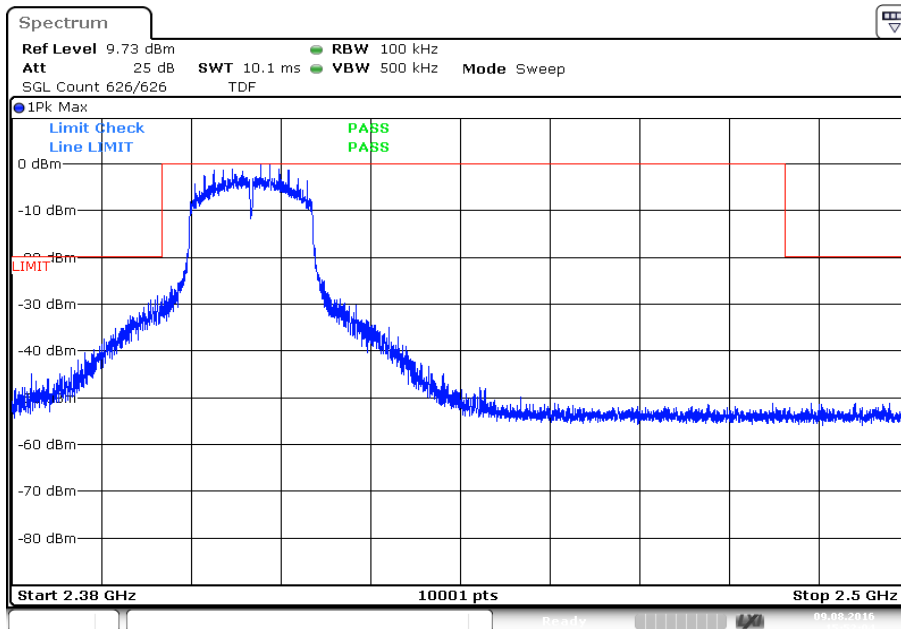


Date: 9.AUG.2016 15:52:05

Plot 3: Middle channel, up to 25 GHz

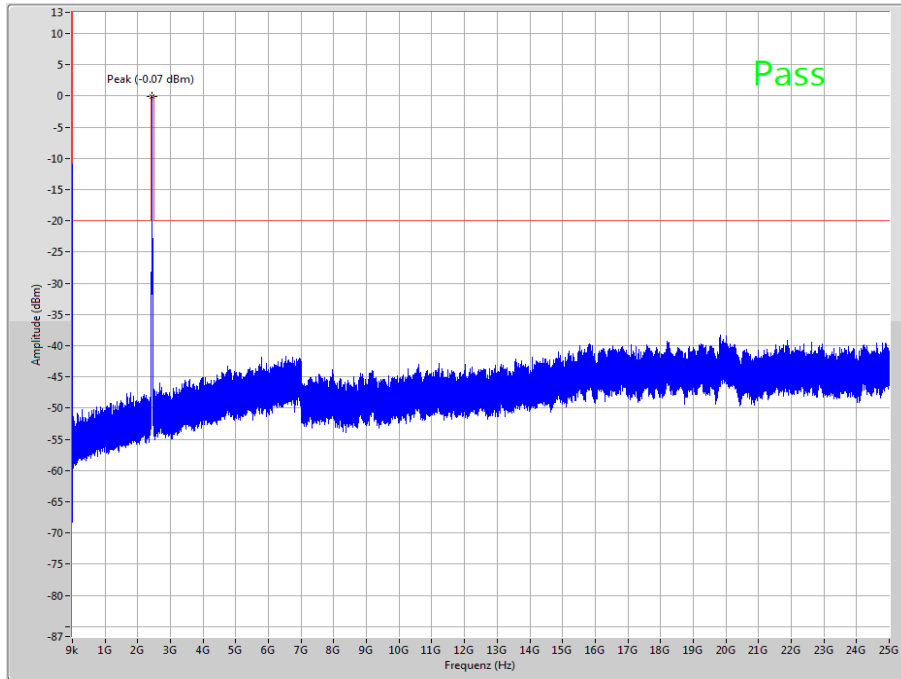


The peak at the beginning of the plot is the LO from the SA.

Plot 4: Middle channel, zoomed carrier

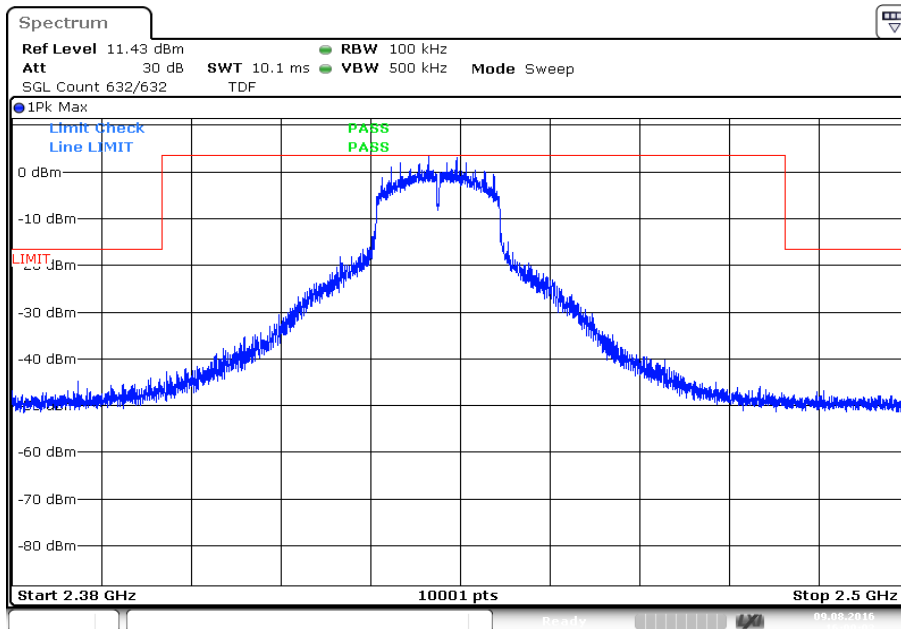


Date: 9.AUG.2016 16:00:04

Plot 5: Highest channel, up to 25 GHz

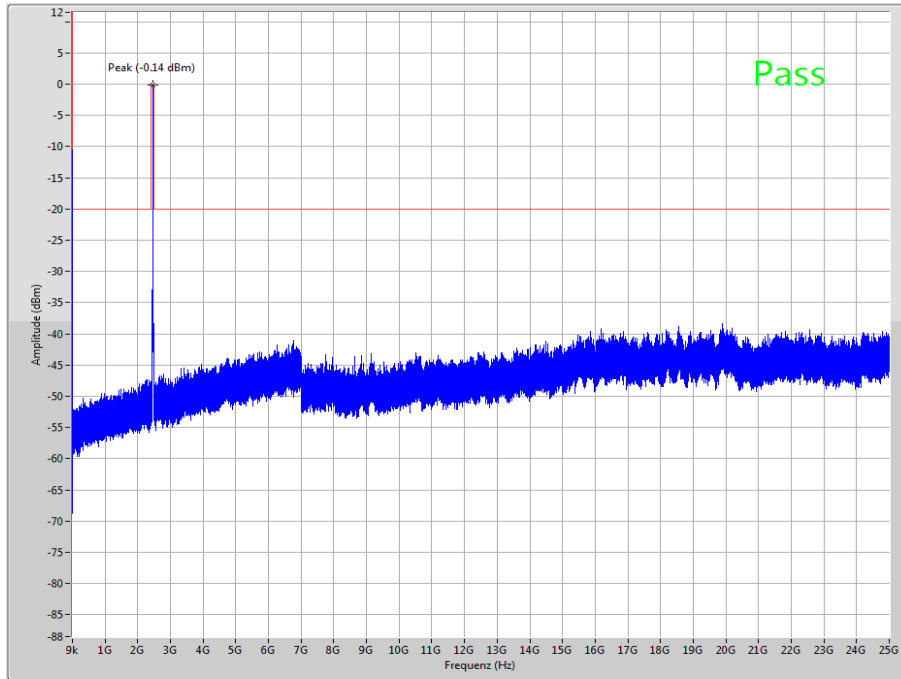

The peak at the beginning of the plot is the LO from the SA.


Plot 6: Highest channel, zoomed carrier

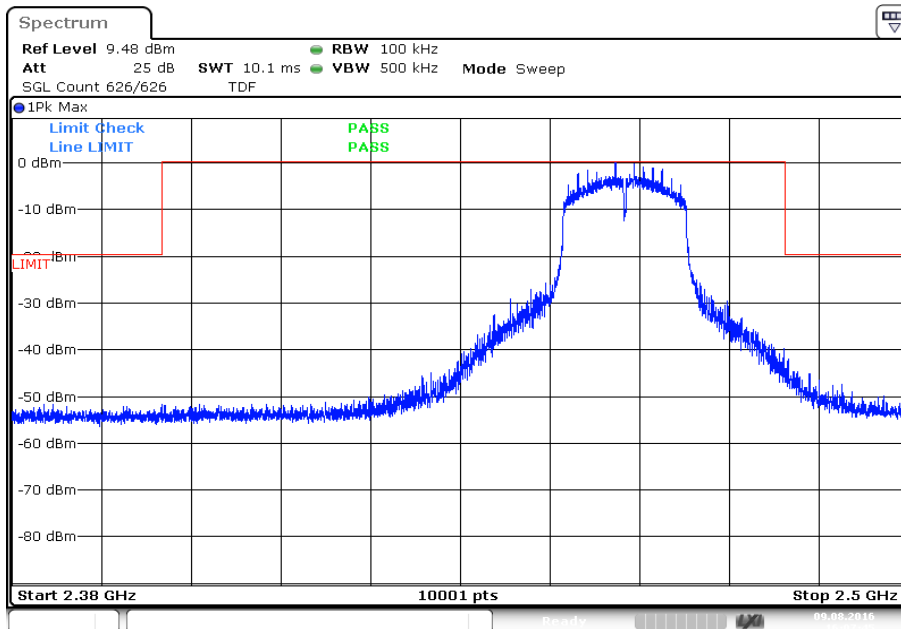

Date: 9.AUG.2016 16:07:46


Plots: OFDM / n HT 20 – mode

Plot 1: Lowest channel, up to 25 GHz

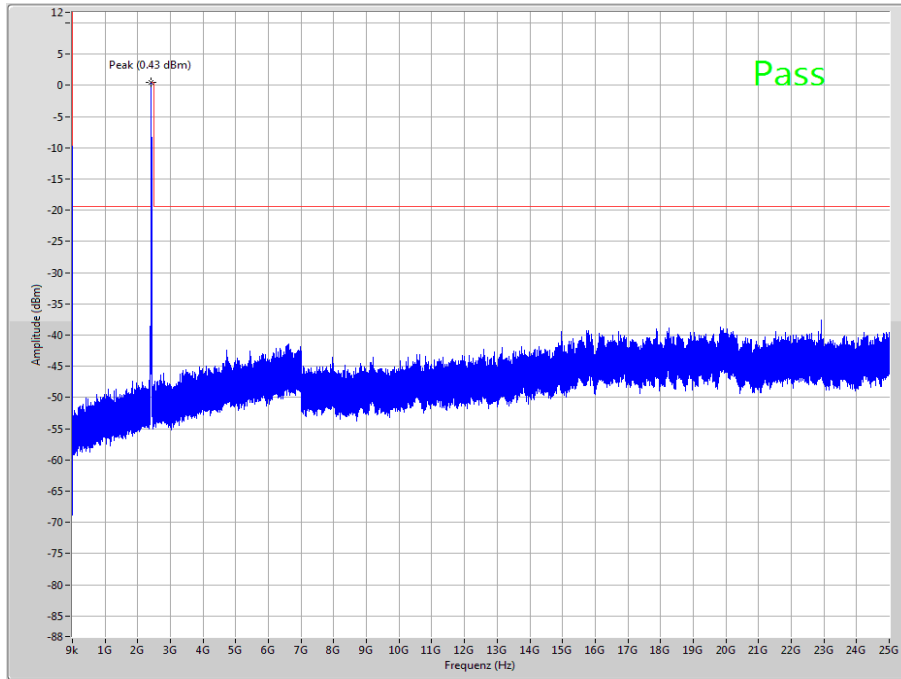


The peak at the beginning of the plot is the LO from the SA.

Plot 2: Lowest channel, zoomed carrier

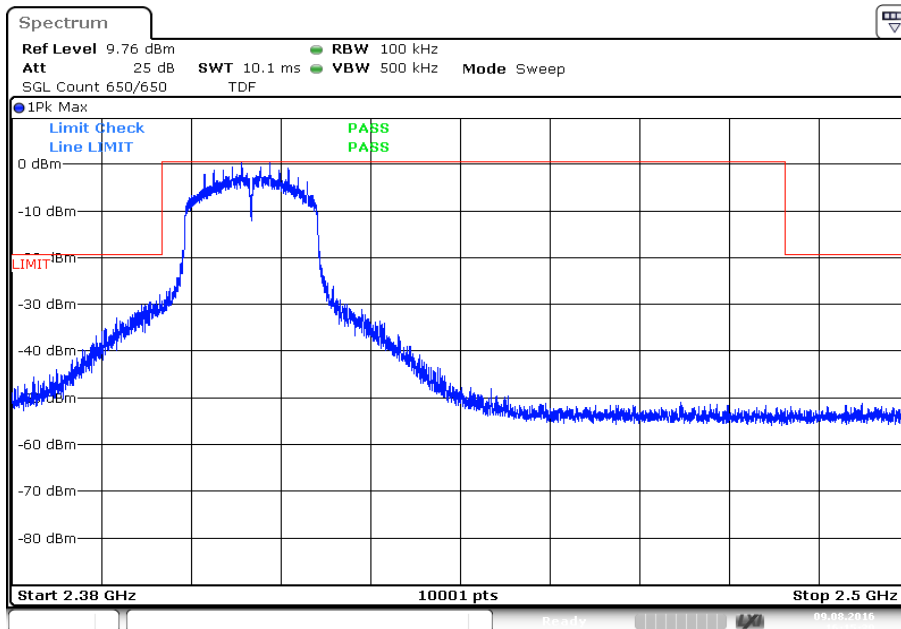


Date: 9.AUG.2016 16:15:40

Plot 3: Middle channel, up to 25 GHz

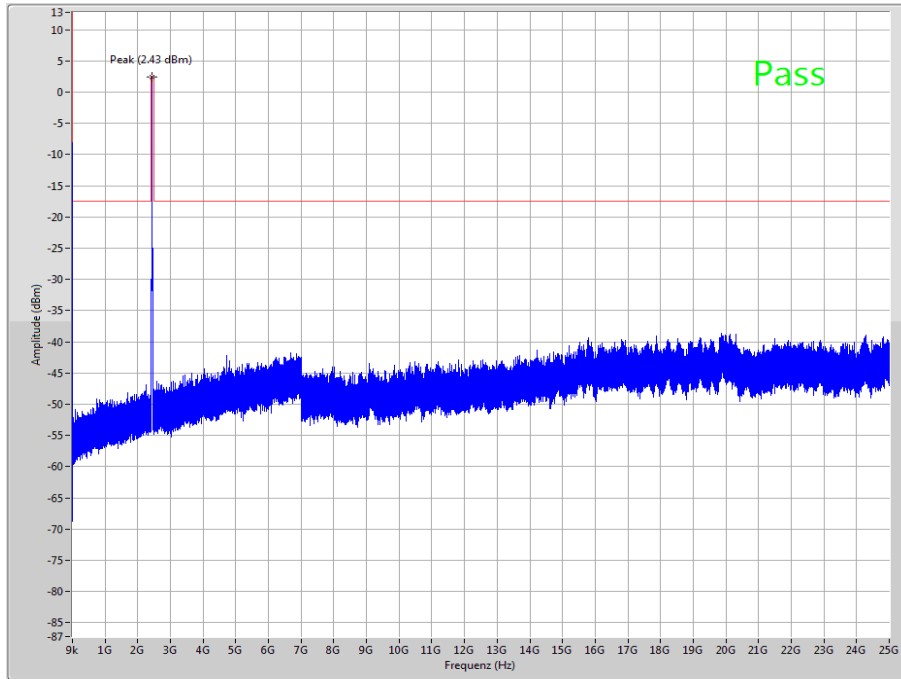


The peak at the beginning of the plot is the LO from the SA.

Plot 4: Middle channel, zoomed carrier

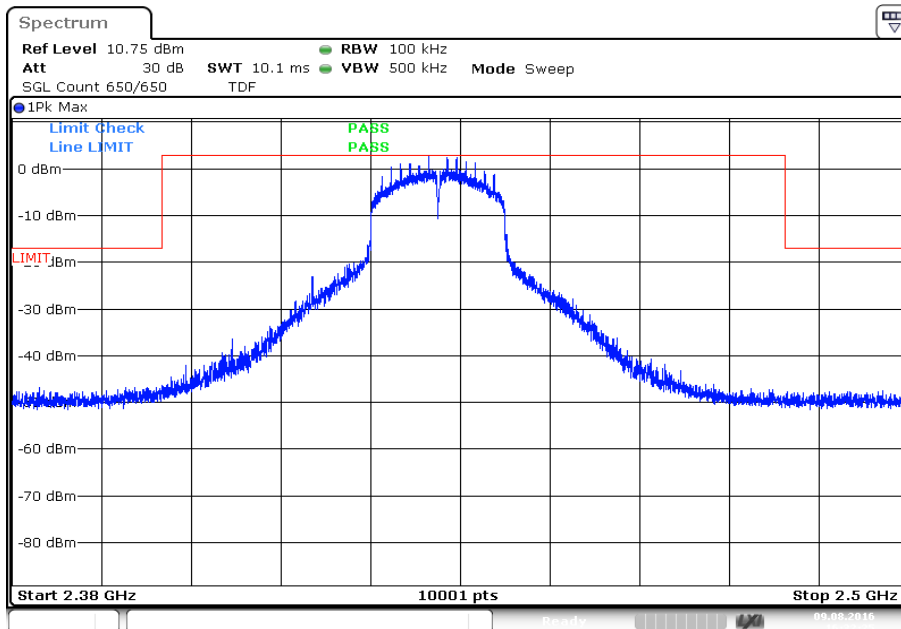


Date: 9.AUG.2016 16:32:25

Plot 5: Highest channel, up to 25 GHz

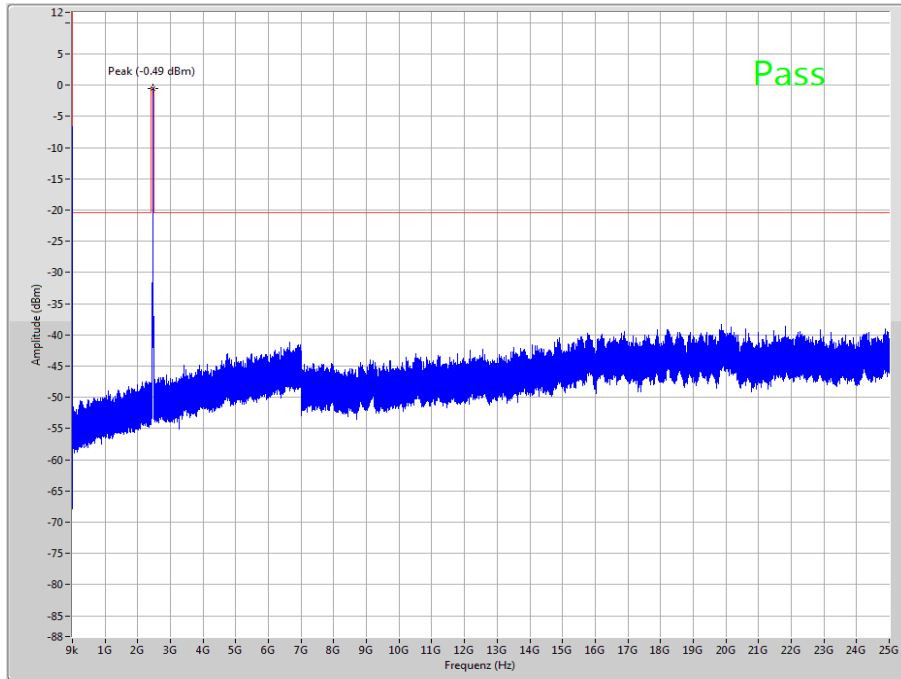

The peak at the beginning of the plot is the LO from the SA.


Plot 6: Highest channel, zoomed carrier

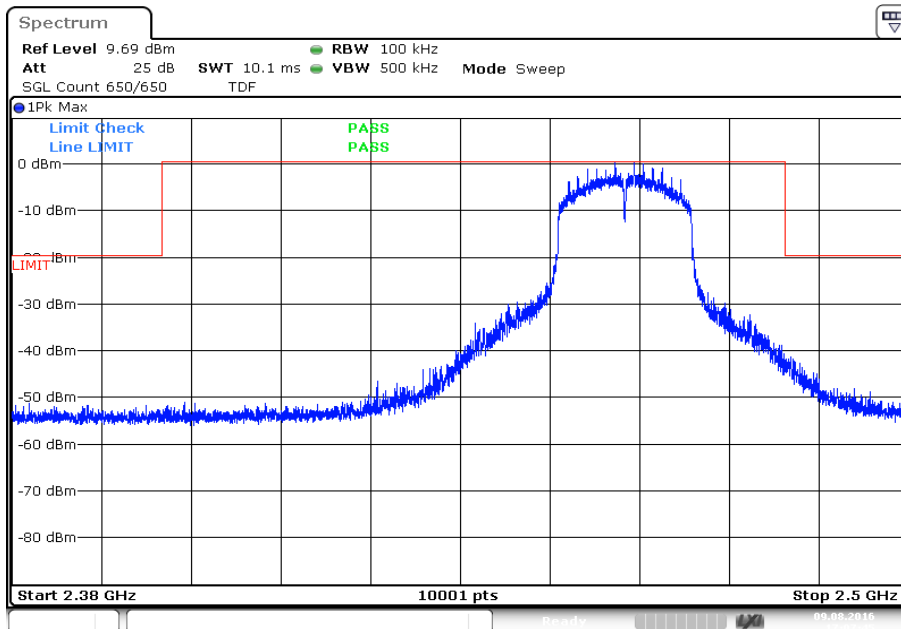

Date: 9.AUG.2016 17:07:46


Plots: OFDM / n HT 40 – mode

Plot 1: Lowest channel, up to 25 GHz

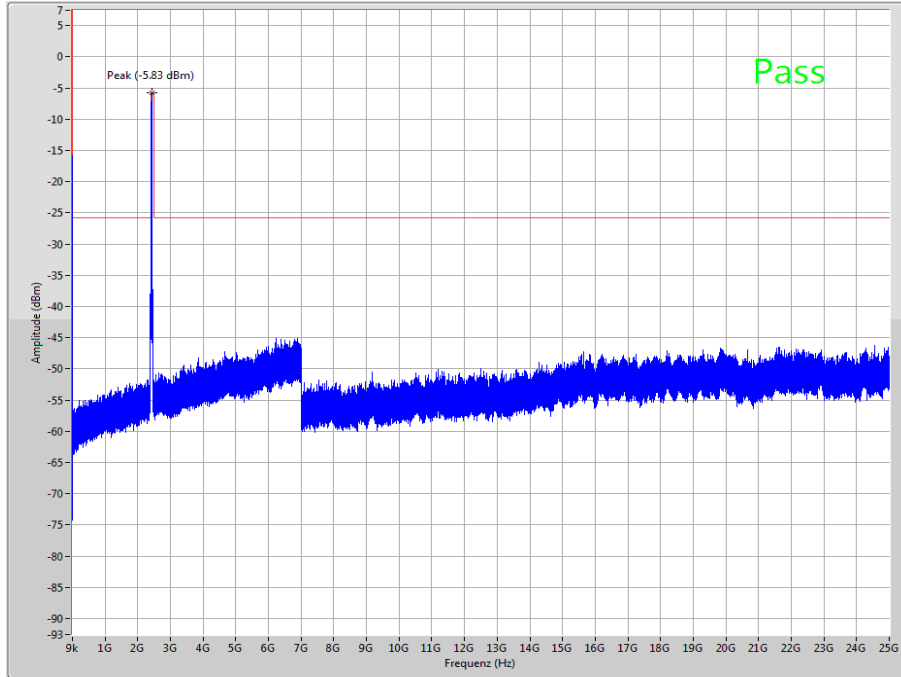


The peak at the beginning of the plot is the LO from the SA.

Plot 2: Lowest channel, zoomed carrier

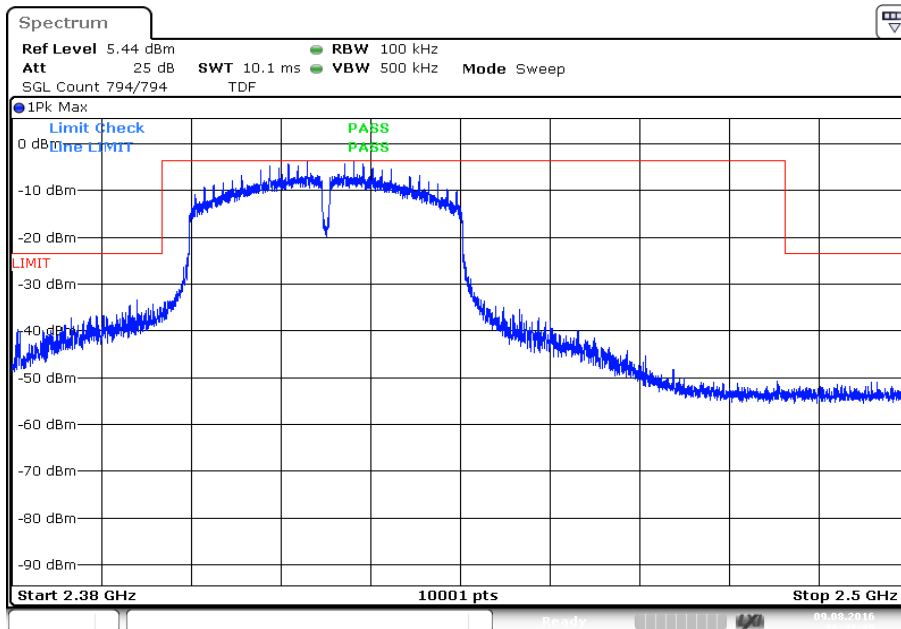


Date: 9.AUG.2016 16:41:36

Plot 3: Middle channel, up to 25 GHz

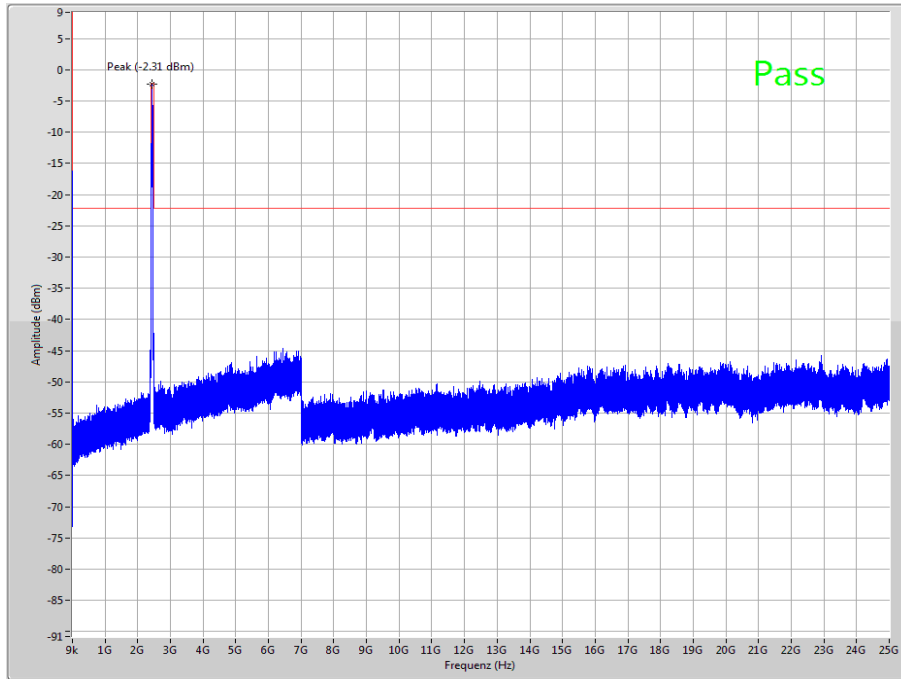


The peak at the beginning of the plot is the LO from the SA.

Plot 4: Middle channel, zoomed carrier

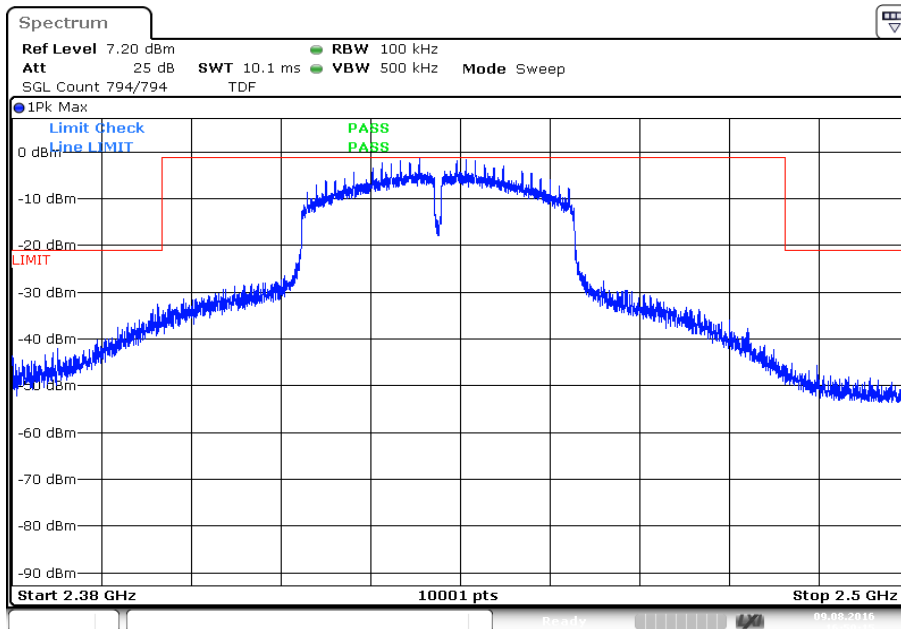


Plot 5: Highest channel, up to 25 GHz

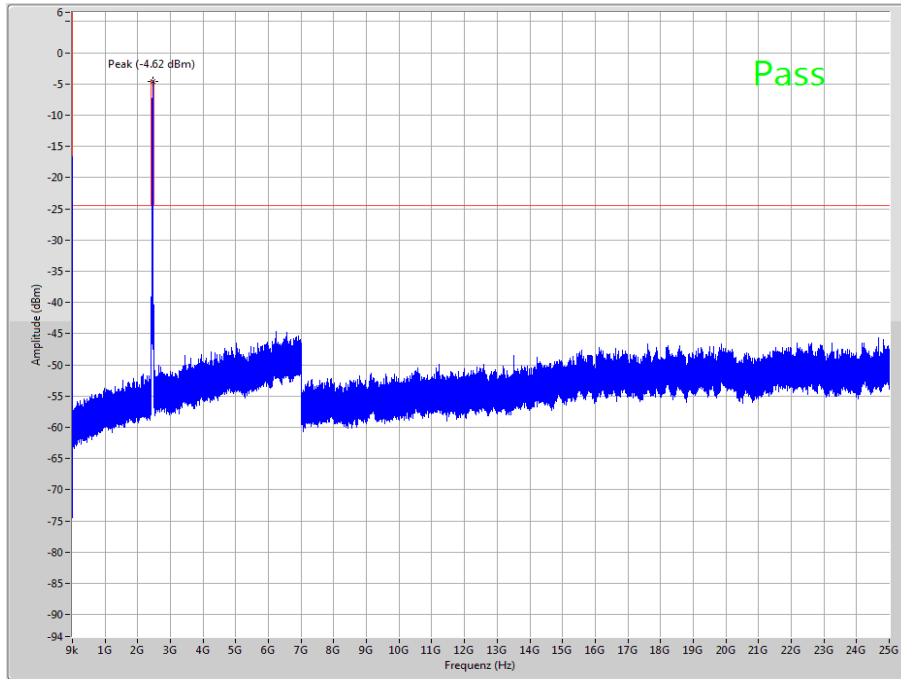

The peak at the beginning of the plot is the LO from the SA.

Plot 6: Highest channel, zoomed carrier

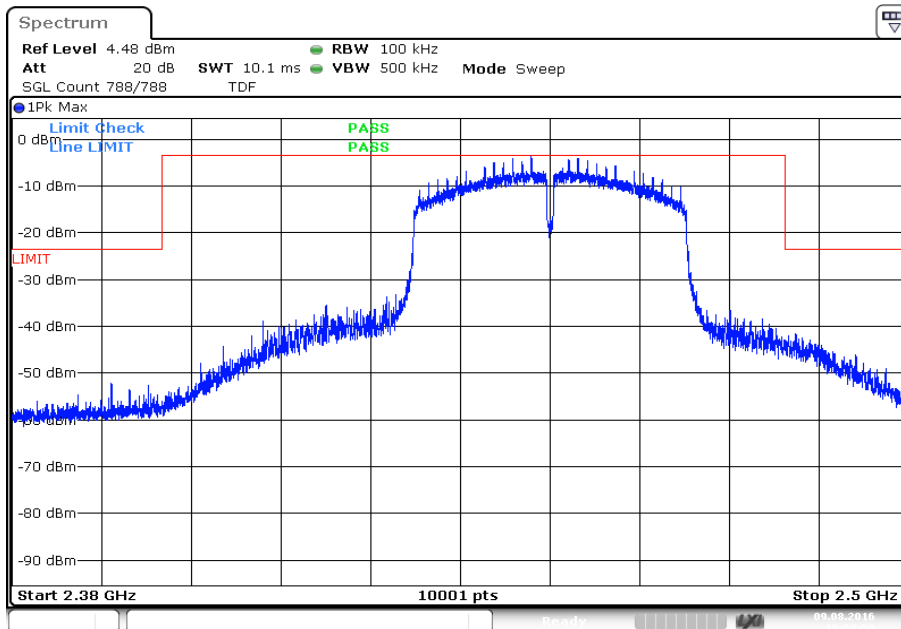

Date: 9.AUG.2016 16:58:51

12.9 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to channel 1 for the lower restricted band and to channel 11 for the upper restricted band. The measurement is repeated for all modulations. Measurement distance is 3 m.

Measurement:

Measurement parameter for peak measurements	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	1 MHz
Span:	See plot!
Trace mode:	Max Hold
Test setup:	See sub clause 7.2 – A
Measurement uncertainty	See sub clause 9

Measurement parameter for average measurements	
According to DTS clause: 13.3.2	
Detector:	RMS
Sweep time:	Auto
Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Span:	2 MHz
Trace mode:	RMS Average over 101 sweeps
Test setup:	See sub clause 7.2 – A
Measurement uncertainty	See sub clause 9

Limits:


FCC	IC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).	
74 dBµV/m Peak 54 dBµV/m AVG	

Results:


Scenario Modulation	Band edge compliance radiated [dB]		
	DSSS / b – mode	OFDM / g – mode	OFDM / n HT40 – mode
Lower band edge	> 20 dB (Peak) > 20 dB (AVG)	> 20 dB (Peak) > 20 dB (AVG)	> 20 dB (Peak) > 20 dB (AVG)
Upper band edge	> 20 dB (Peak) > 20 dB (AVG)	> 20 dB (Peak) > 20 dB (AVG)	> 20 dB (Peak) > 20 dB (AVG)

Plots: DSSS/ b – mode peak / average

Plot 1: TX mode, lower band edge, vertical & horizontal polarization

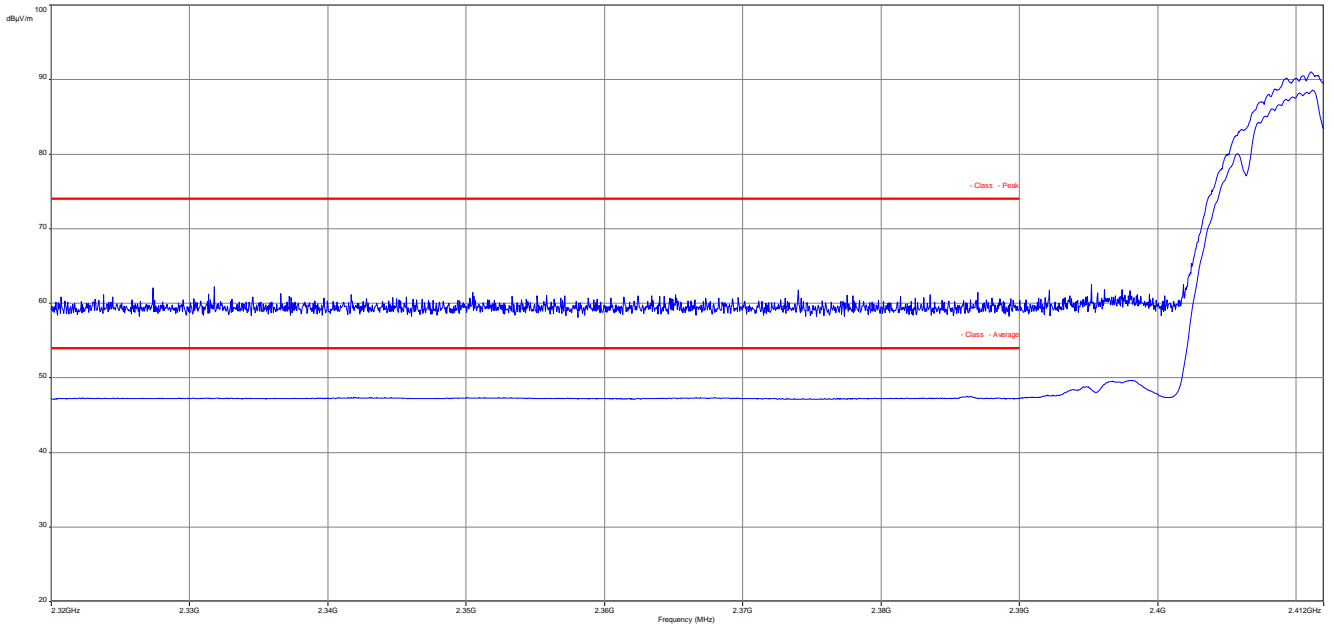


Plot 2: TX mode, upper band edge, vertical & horizontal polarization

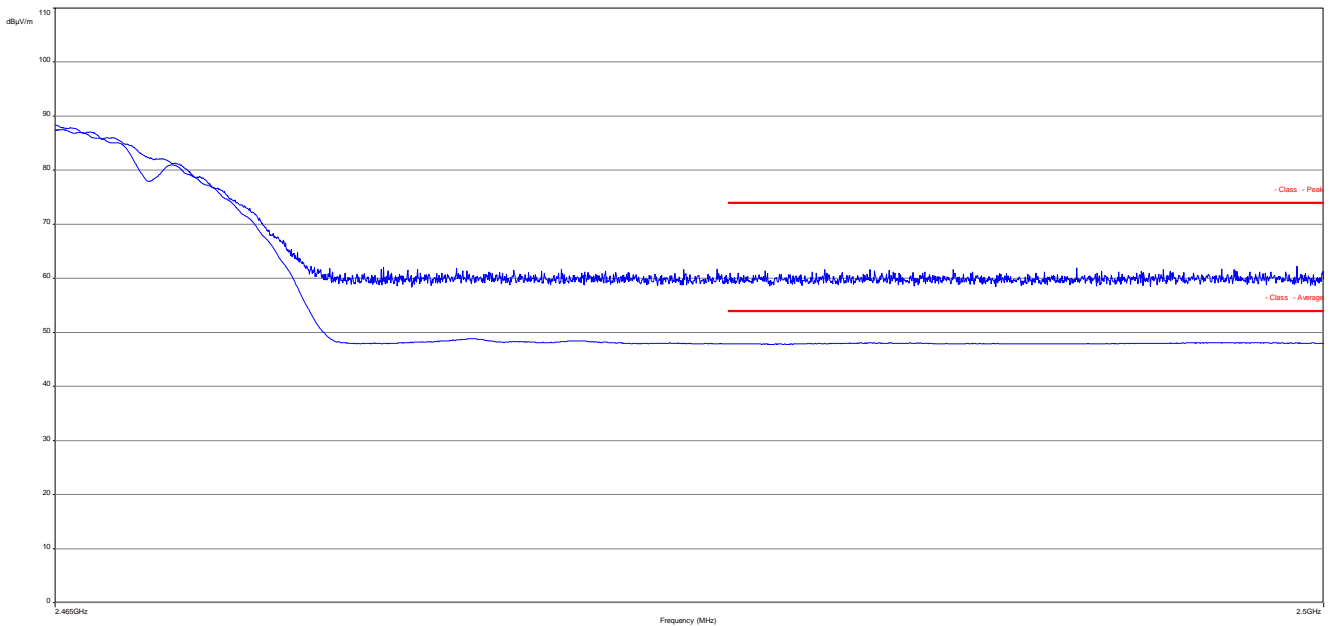


Plots: OFDM / g – mode peak / average

Plot 1: TX mode, lower band edge, vertical & horizontal polarization

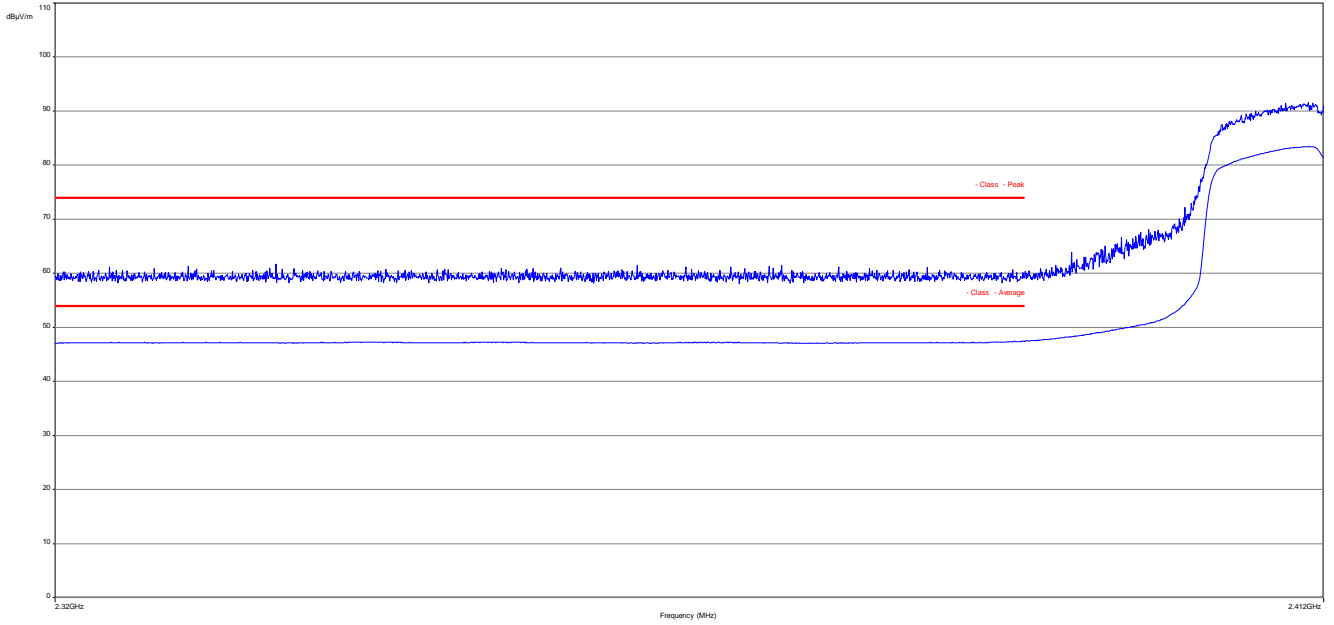


Plot 2: TX mode, upper band edge, vertical & horizontal polarization

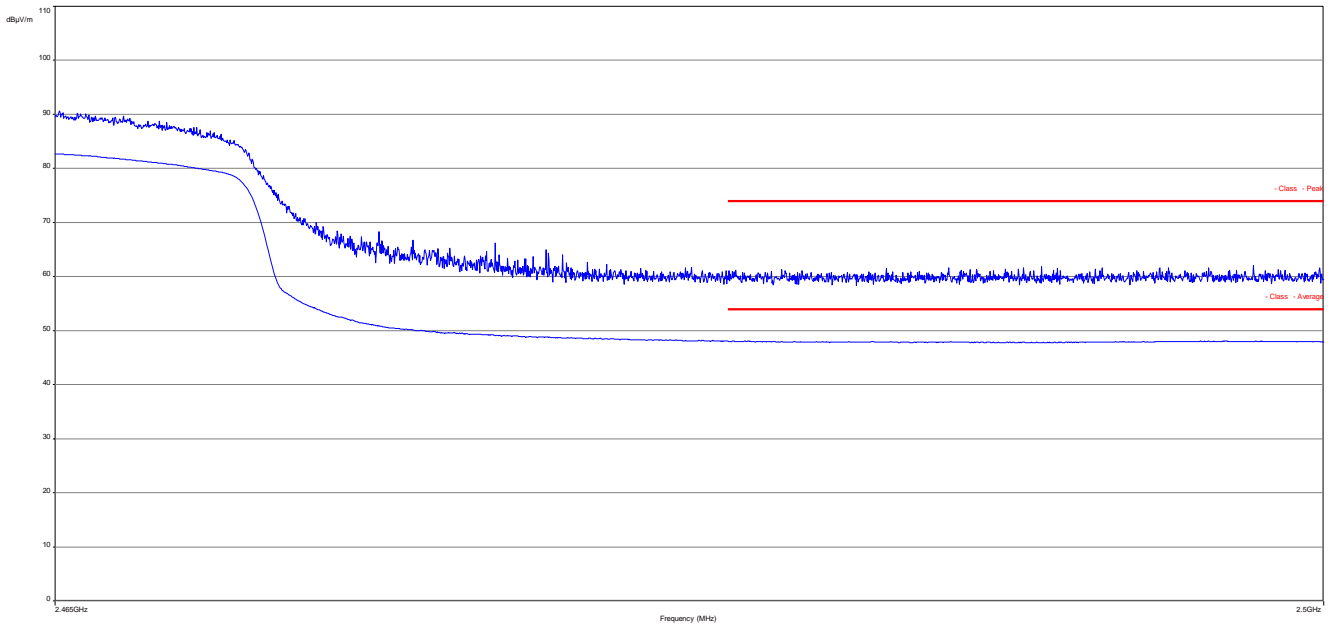


Plots: OFDM / n HT40 – mode peak / average

Plot 1: TX mode, lower band edge, vertical & horizontal polarization

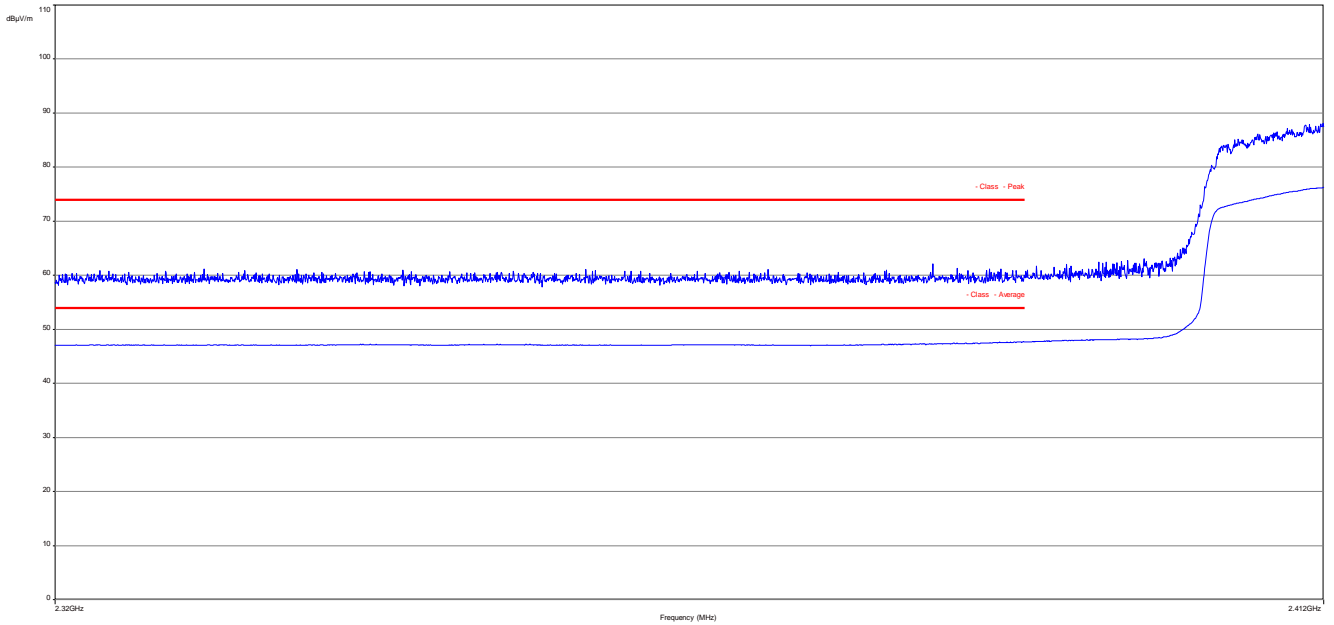

Plot 2: TX mode, upper band edge, vertical & horizontal polarization

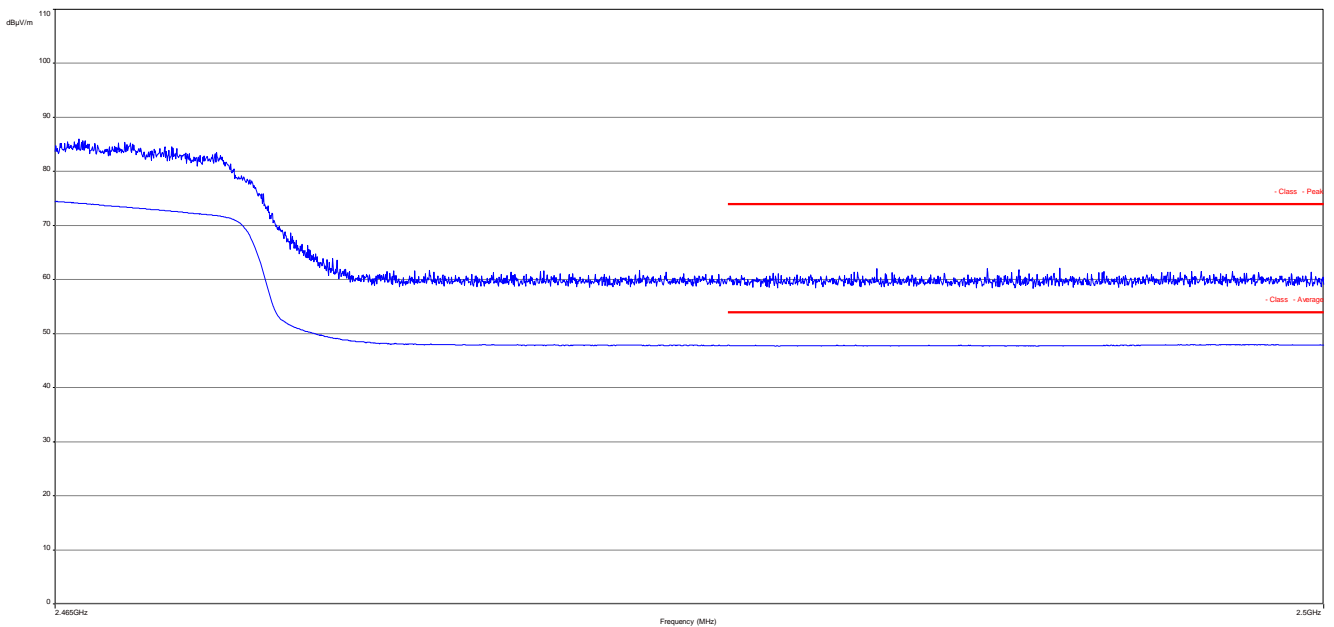

12.10 Spurious emissions radiated below 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is representative for all channels and modes. If peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace mode:	Max Hold
Measured modulation	<input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input type="checkbox"/> OFDM n HT20 – mode <input checked="" type="checkbox"/> OFDM n HT40 – mode
Test setup:	See sub clause 7.2 – B
Measurement uncertainty	See sub clause 9

Limits:


FCC		IC
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Results:


TX Spurious Emissions Radiated < 30 MHz [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
All detected peaks are more than 20 dB below the limit.		

Plots: DSSS


Plot 1: 9 kHz to 30 MHz, low channel

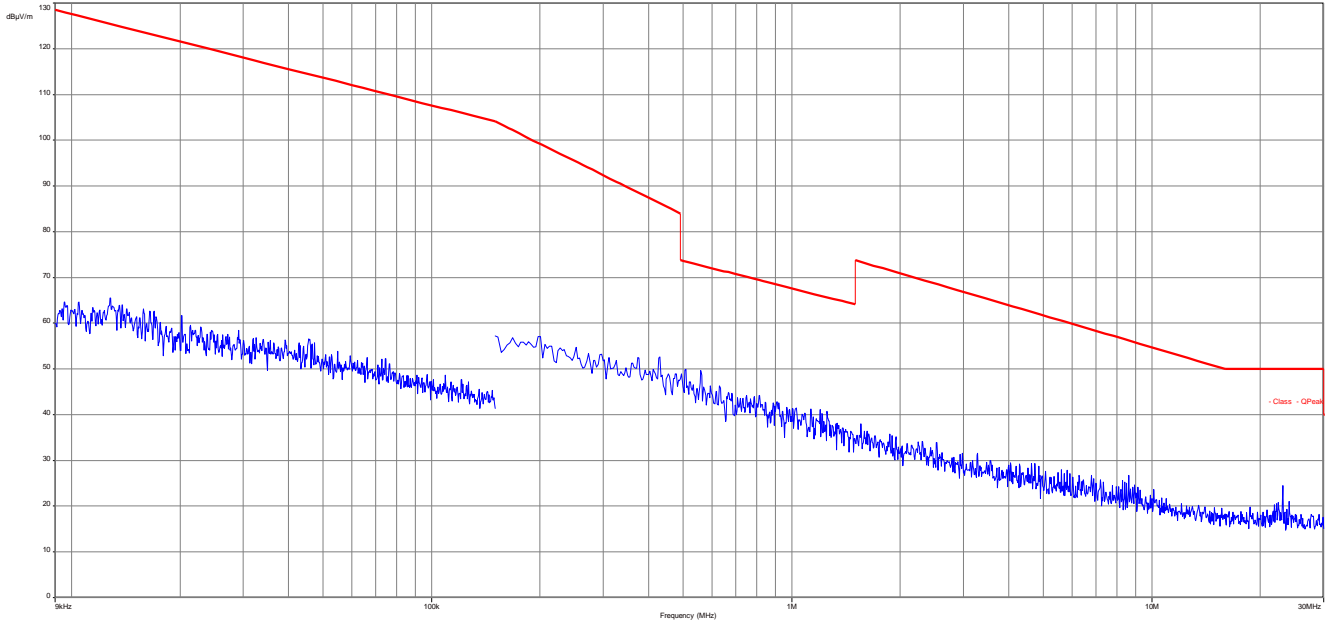

Plot 2: 9 kHz to 30 MHz, mid channel

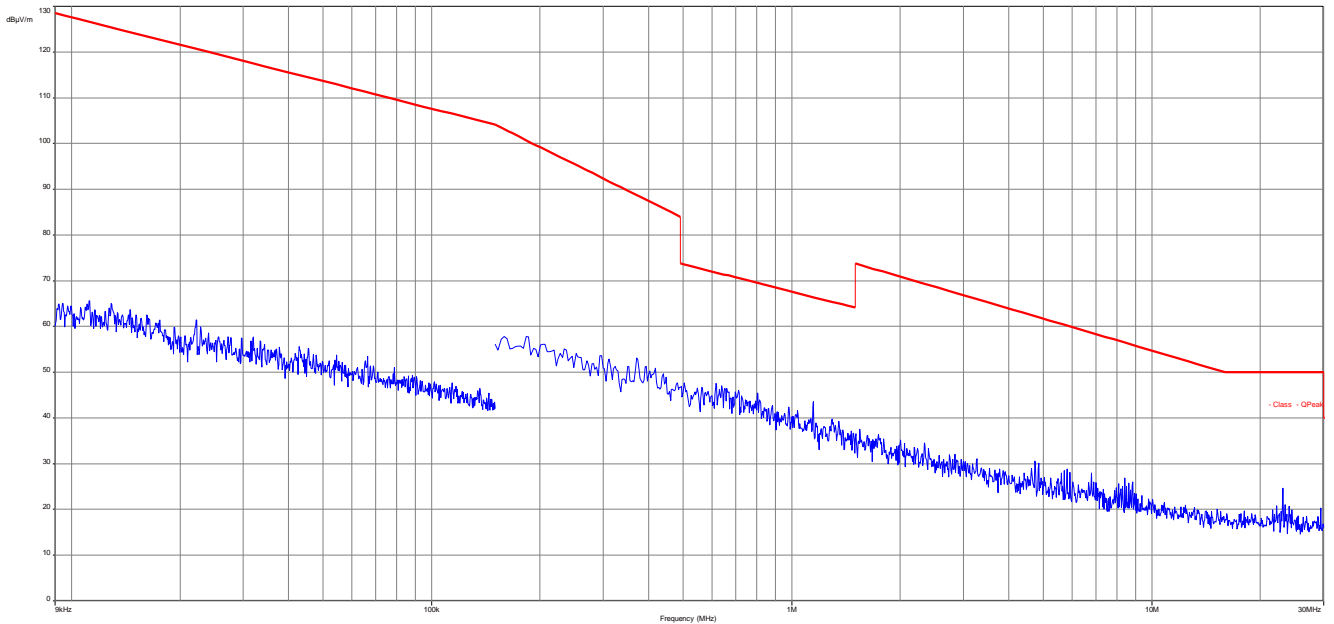


Plot 3: 9 kHz to 30 MHz, high channel

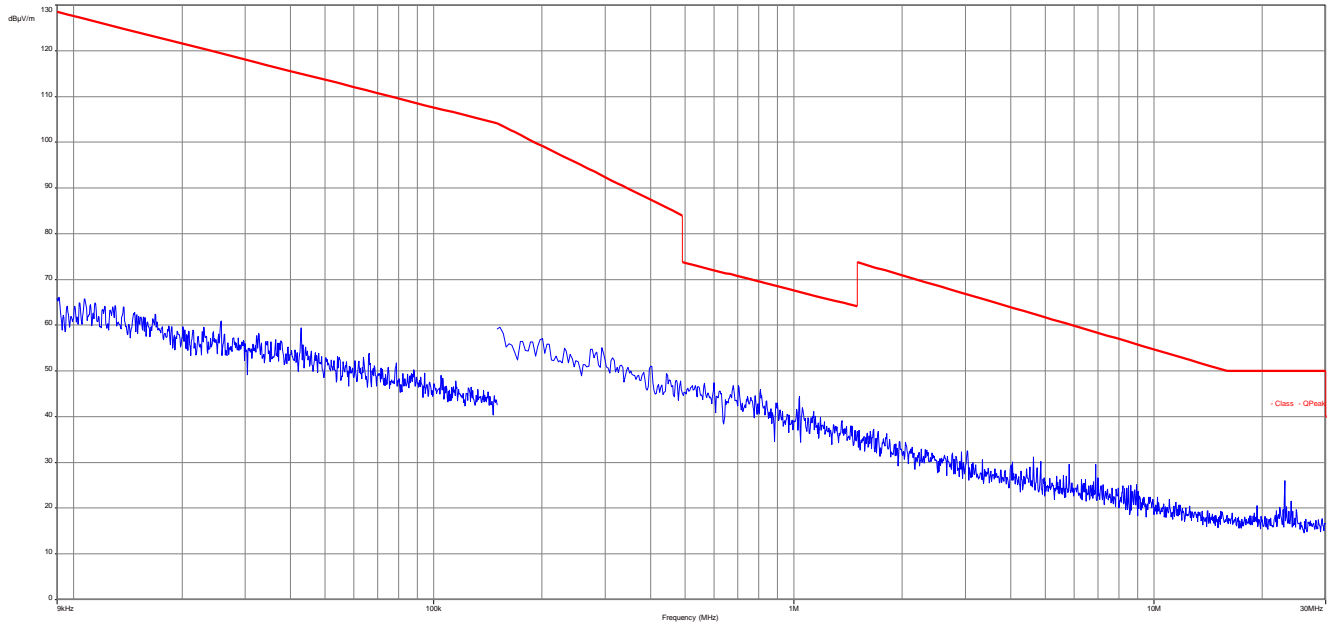


Plots: OFDM 20 MHz


Plot 1: 9 kHz to 30 MHz, low channel

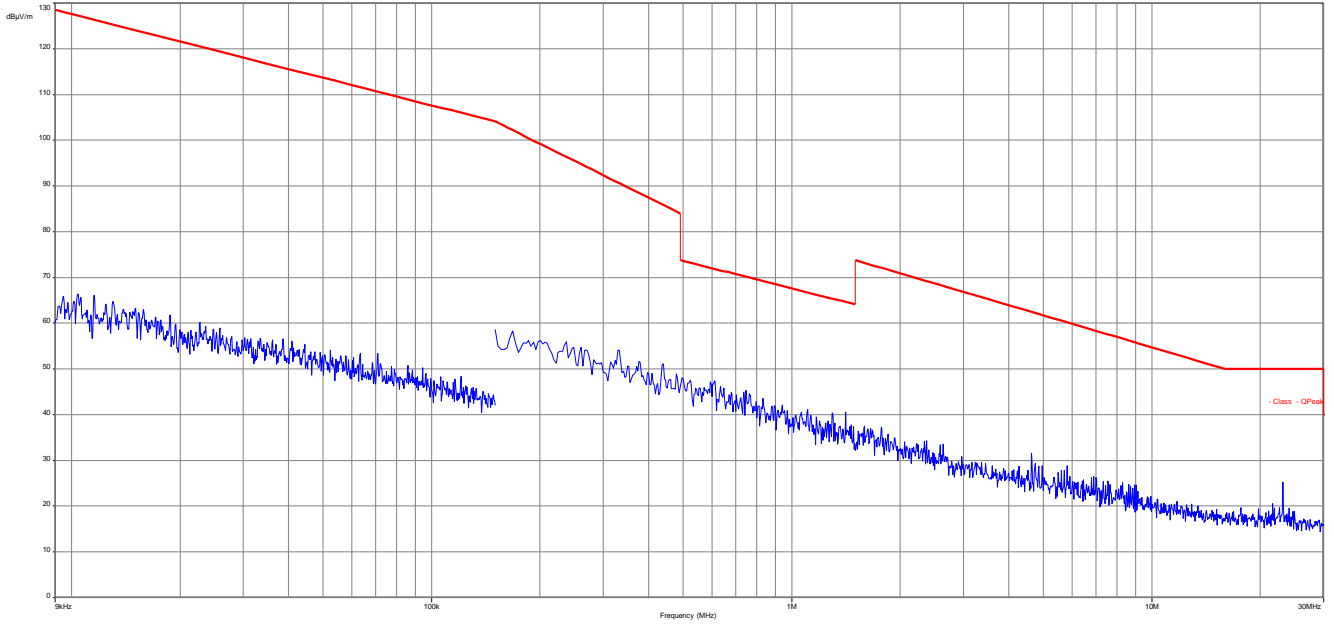

Plot 2: 9 kHz to 30 MHz, mid channel

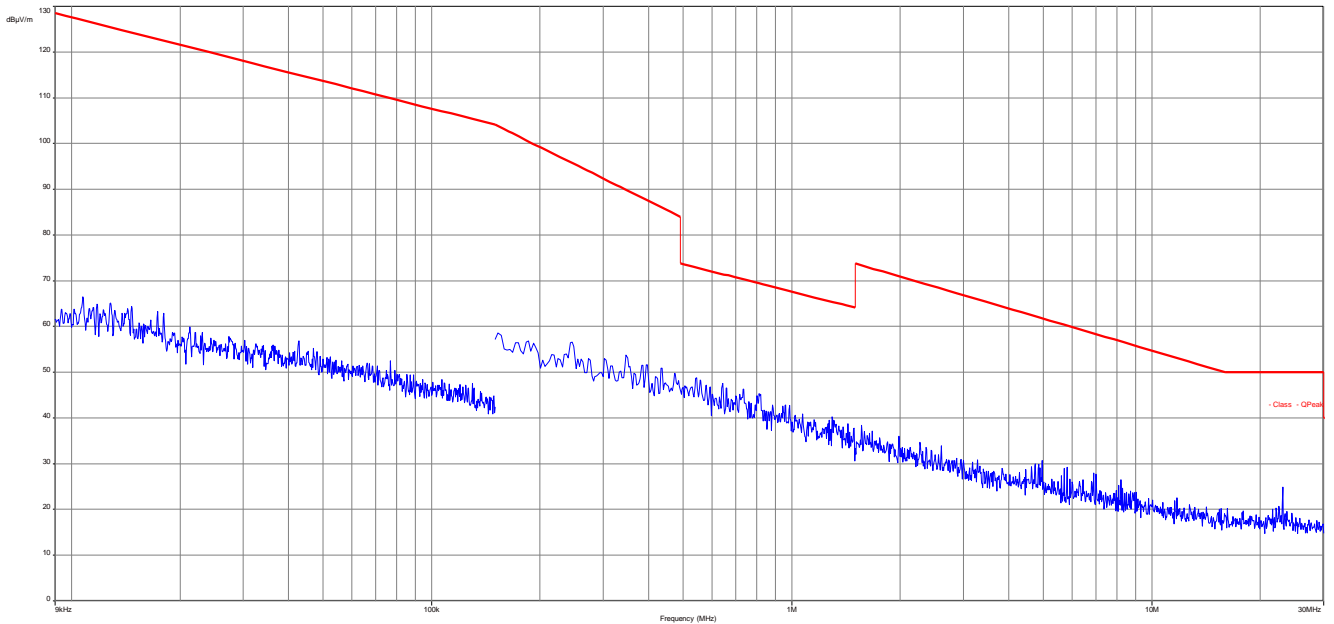


Plot 3: 9 kHz to 30 MHz, high channel

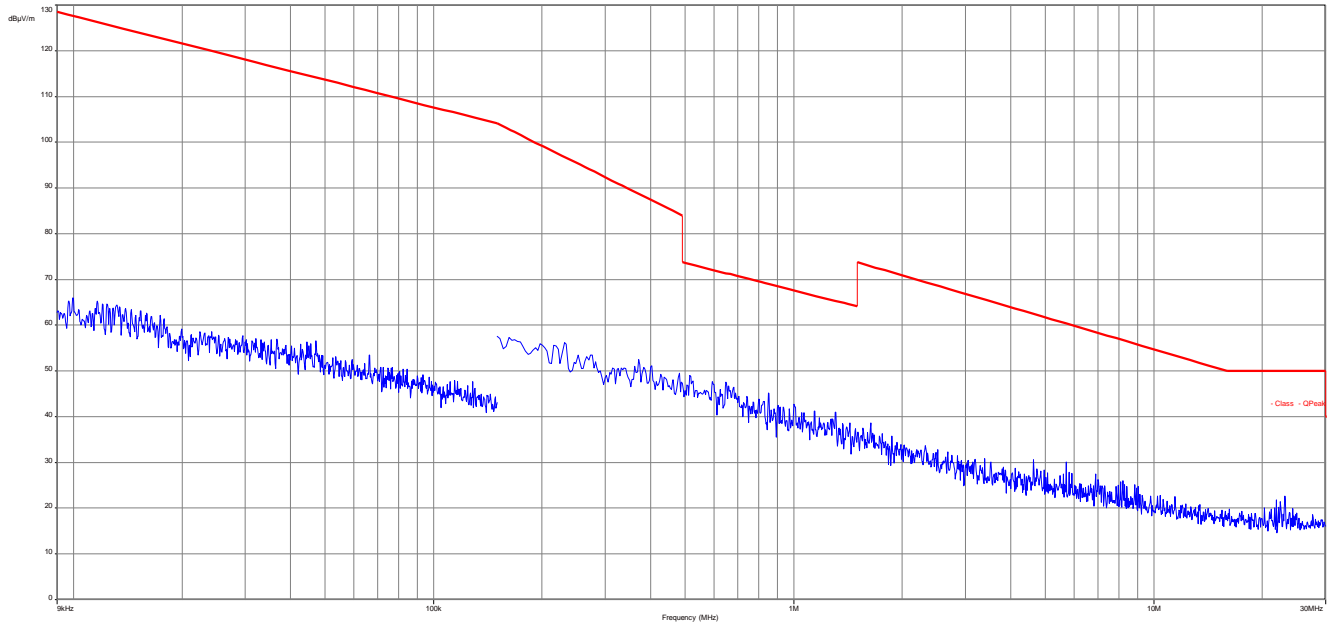


Plots: OFDM 40 MHz


Plot 1: 9 kHz to 30 MHz, low channel

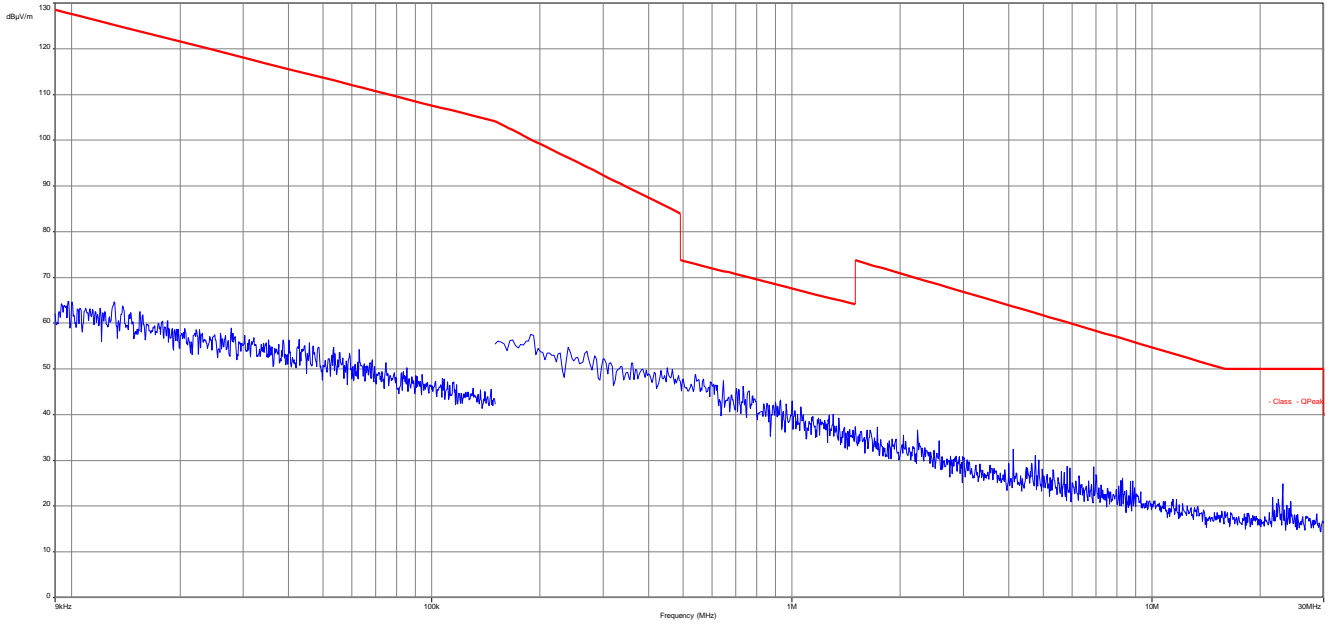

Plot 2: 9 kHz to 30 MHz, mid channel

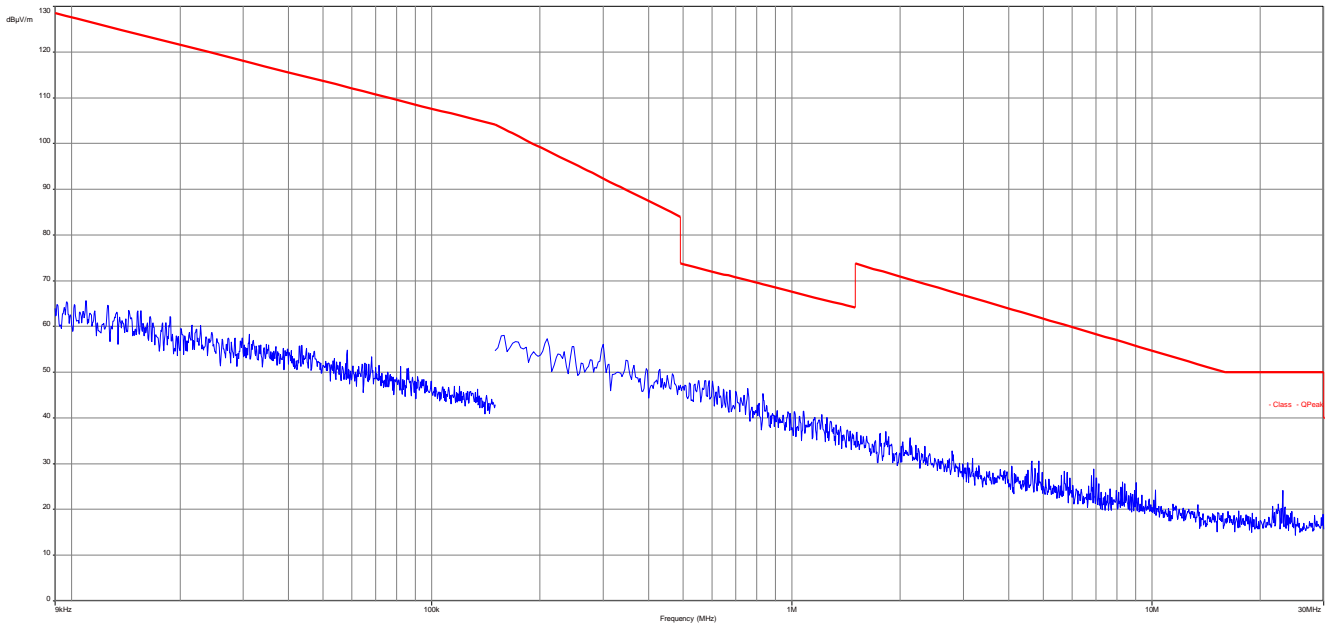

Plot 3: 9 kHz to 30 MHz, high channel

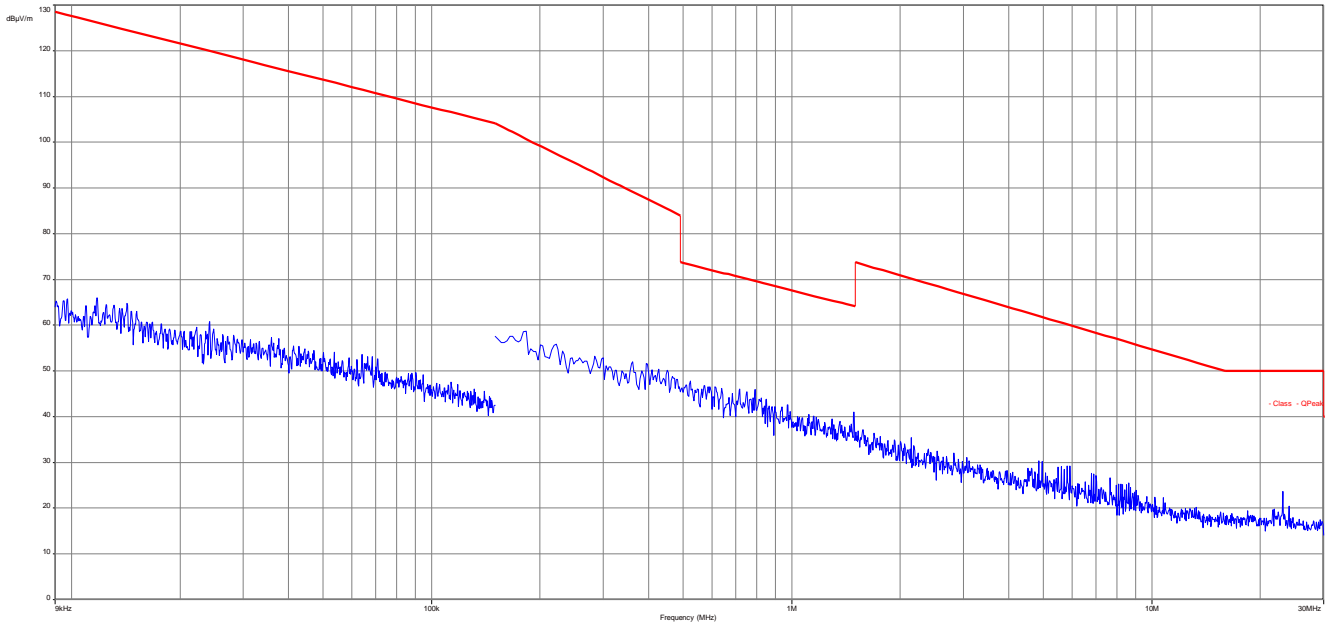

12.11 Spurious emissions radiated 30 MHz to 1 GHz

Description:

Measurement of the radiated spurious emissions and cabinet radiations below 1 GHz.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 120 kHz
Video bandwidth:	3 x RBW
Span:	30 MHz to 1 GHz
Trace mode:	Max Hold
Measured modulation	<input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input type="checkbox"/> OFDM n HT20 – mode <input checked="" type="checkbox"/> OFDM n HT40 – mode <input checked="" type="checkbox"/> RX / Idle – mode
Test setup:	See sub clause 7.1 – A
Measurement uncertainty	See sub clause 9


The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

Limits:

FCC		IC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10


Plot: DSSS

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization, low channel

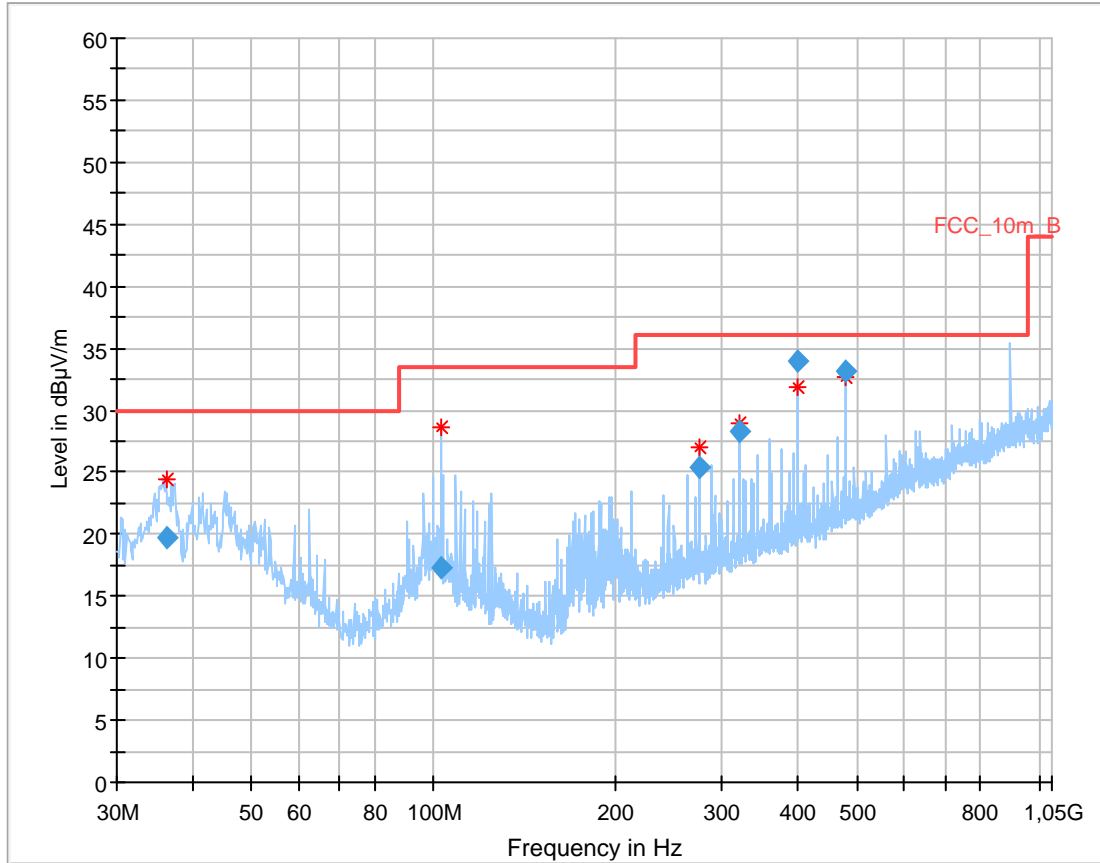


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
36.171150	19.71	30.00	10.29	1000.0	120.000	103.0	V	187	13.9
103.112250	17.24	33.50	16.26	1000.0	120.000	100.0	V	73	11.8
275.011800	25.47	36.00	10.53	1000.0	120.000	100.0	V	33	13.9
320.000700	28.25	36.00	7.75	1000.0	120.000	98.0	V	2	15.1
400.003200	34.02	36.00	1.98	1000.0	120.000	200.0	H	98	16.9
479.999550	33.09	36.00	2.91	1000.0	120.000	98.0	V	298	18.3

Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, mid channel

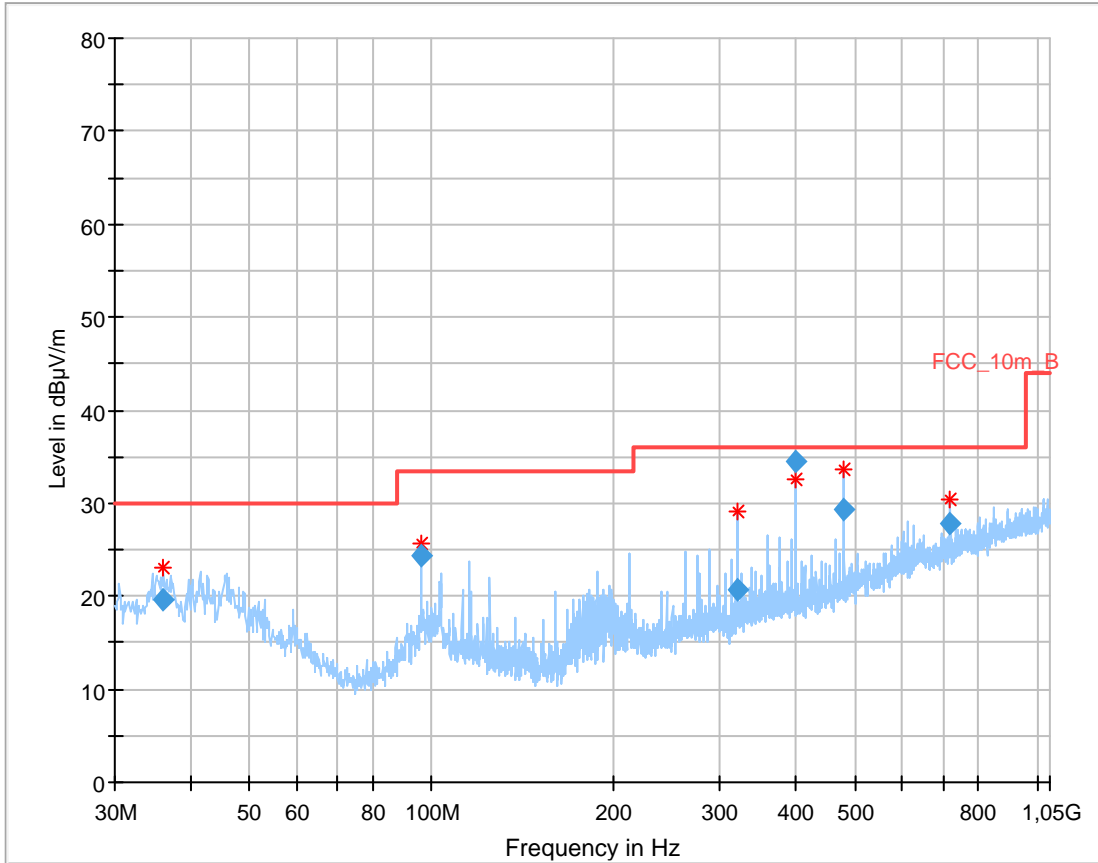

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
36.133500	19.63	30.00	10.37	1000.0	120.000	170.0	V	171	13.9
96.432150	24.45	33.50	9.05	1000.0	120.000	98.0	V	100	11.6
319.974150	20.80	36.00	15.20	1000.0	120.000	100.0	H	10	15.1
399.990150	34.45	36.00	1.55	1000.0	120.000	170.0	H	80	16.9
479.976900	29.43	36.00	6.57	1000.0	120.000	101.0	H	-9	18.3
720.007500	27.85	36.00	8.15	1000.0	120.000	101.0	H	280	22.0


Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, high channel

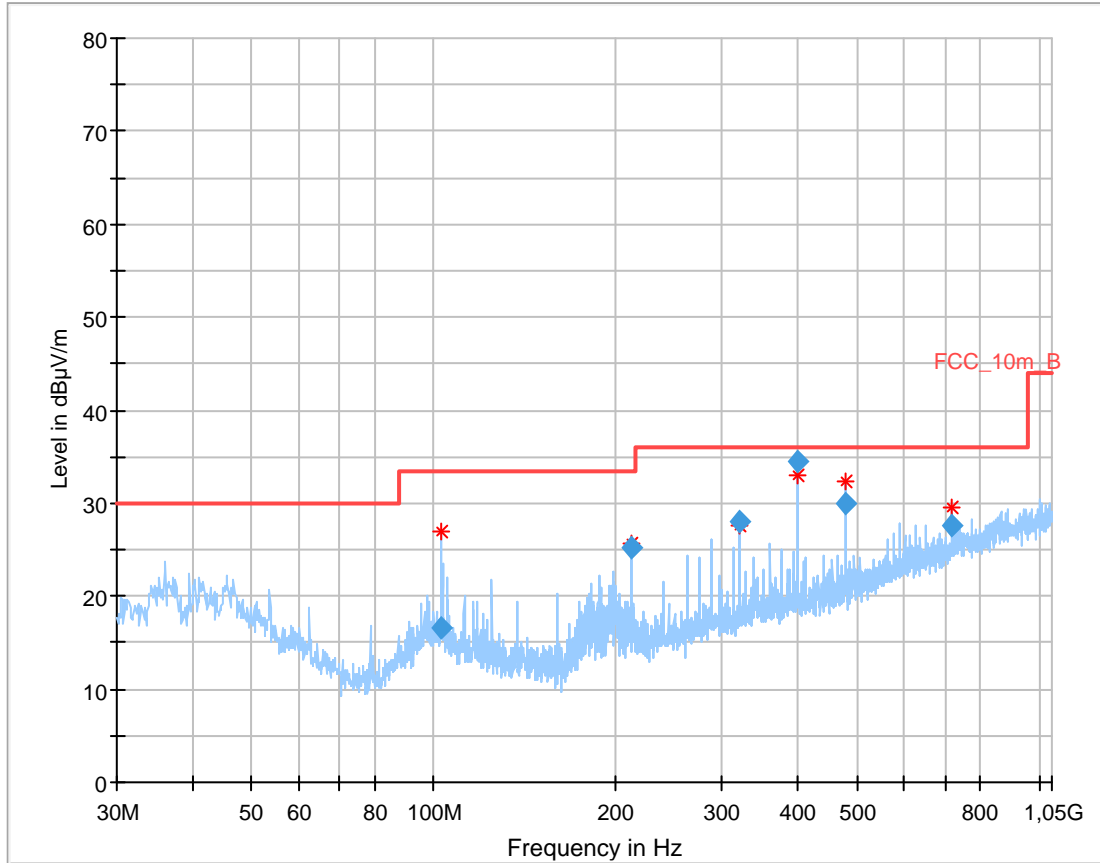

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
103.130100	16.53	33.50	16.97	1000.0	120.000	170.0	V	81	11.8
212.495400	25.18	33.50	8.32	1000.0	120.000	98.0	V	-10	12.1
319.998450	28.02	36.00	7.98	1000.0	120.000	98.0	V	-9	15.1
400.003800	34.44	36.00	1.56	1000.0	120.000	170.0	H	80	16.9
479.996550	30.07	36.00	5.93	1000.0	120.000	101.0	H	10	18.3
720.008100	27.58	36.00	8.42	1000.0	120.000	101.0	H	280	22.0


Plot: OFDM 20 MHz

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization, low channel

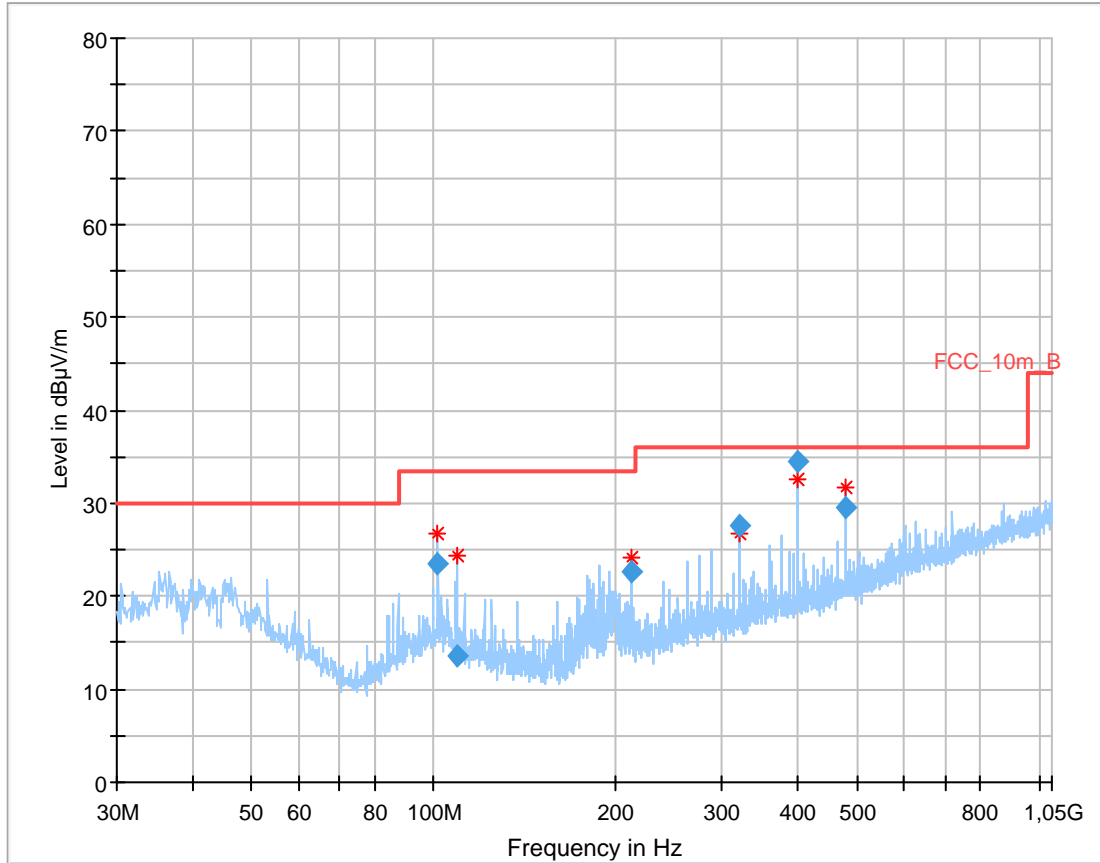


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
101.793900	23.51	33.50	9.99	1000.0	120.000	98.0	V	100	12.0
109.328700	13.68	33.50	19.82	1000.0	120.000	101.0	V	100	11.2
212.512350	22.67	33.50	10.83	1000.0	120.000	98.0	V	-10	12.1
319.999800	27.50	36.00	8.50	1000.0	120.000	98.0	V	10	15.1
400.009050	34.42	36.00	1.58	1000.0	120.000	170.0	H	80	16.9
479.981100	29.46	36.00	6.54	1000.0	120.000	101.0	H	10	18.3

Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, mid channel

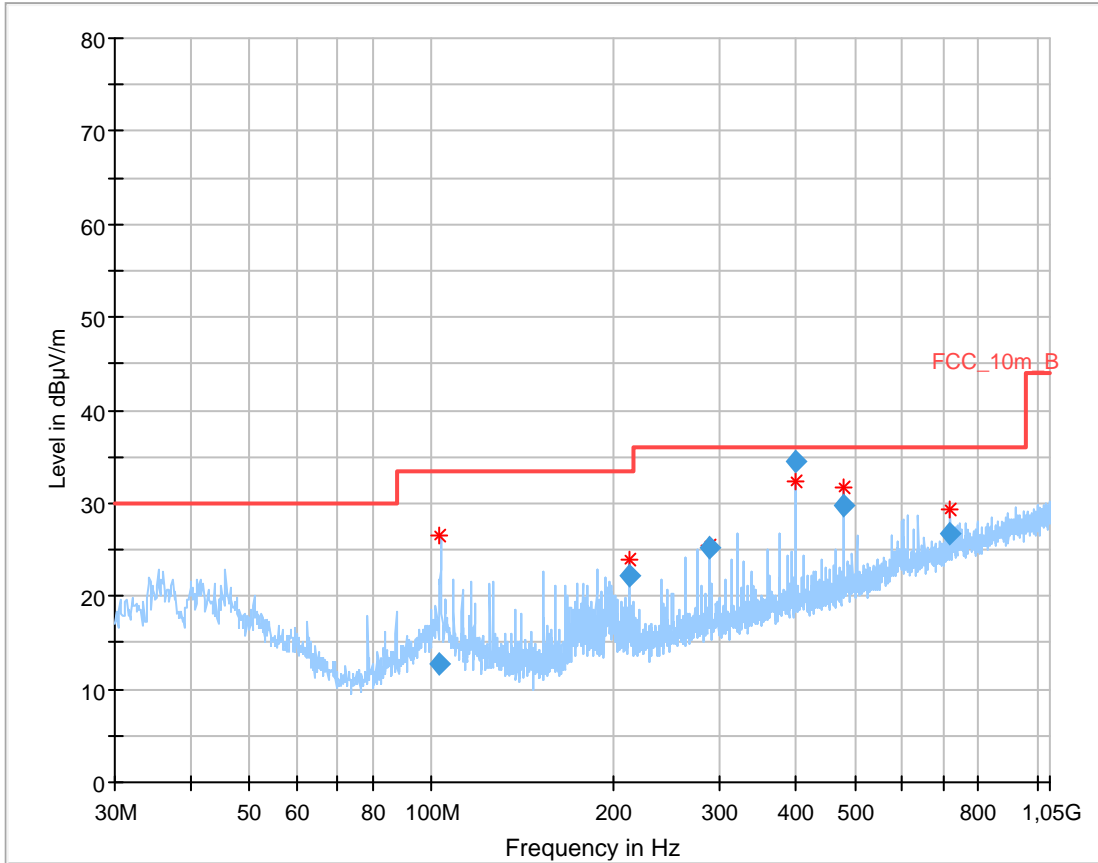

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
103.113150	12.76	33.50	20.74	1000.0	120.000	170.0	V	10	11.8
212.481900	22.24	33.50	11.26	1000.0	120.000	98.0	V	-10	12.1
287.497500	25.29	36.00	10.71	1000.0	120.000	98.0	V	-9	14.2
399.993450	34.45	36.00	1.55	1000.0	120.000	170.0	H	80	16.9
479.999850	29.69	36.00	6.31	1000.0	120.000	101.0	H	10	18.3
719.955300	26.76	36.00	9.24	1000.0	120.000	101.0	H	280	22.0


Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, high channel

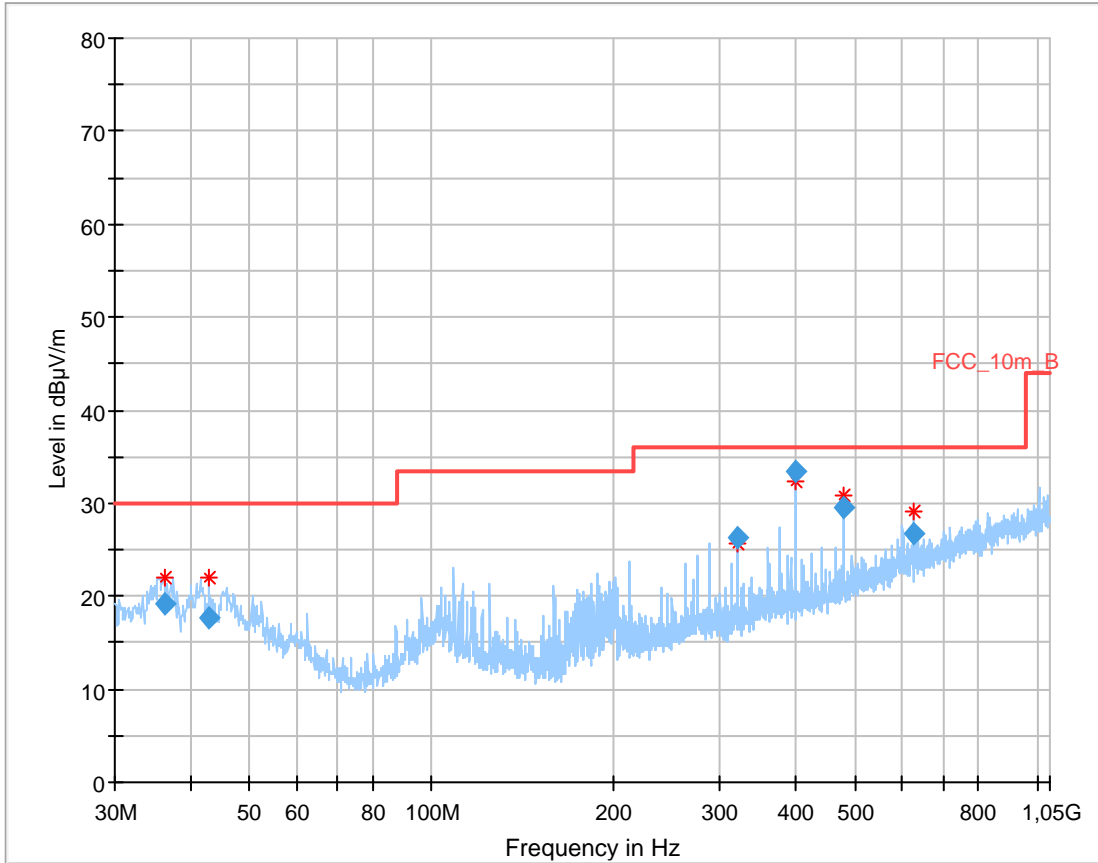

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
36.187500	19.23	30.00	10.77	1000.0	120.000	101.0	V	100	13.9
42.996900	17.71	30.00	12.29	1000.0	120.000	98.0	V	10	13.9
319.980000	26.23	36.00	9.77	1000.0	120.000	98.0	V	10	15.1
400.024050	33.46	36.00	2.54	1000.0	120.000	170.0	H	80	16.9
480.007350	29.44	36.00	6.56	1000.0	120.000	101.0	H	-9	18.3
625.022400	26.84	36.00	9.16	1000.0	120.000	101.0	H	100	20.9


Plot: OFDM 40 MHz

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization, low channel

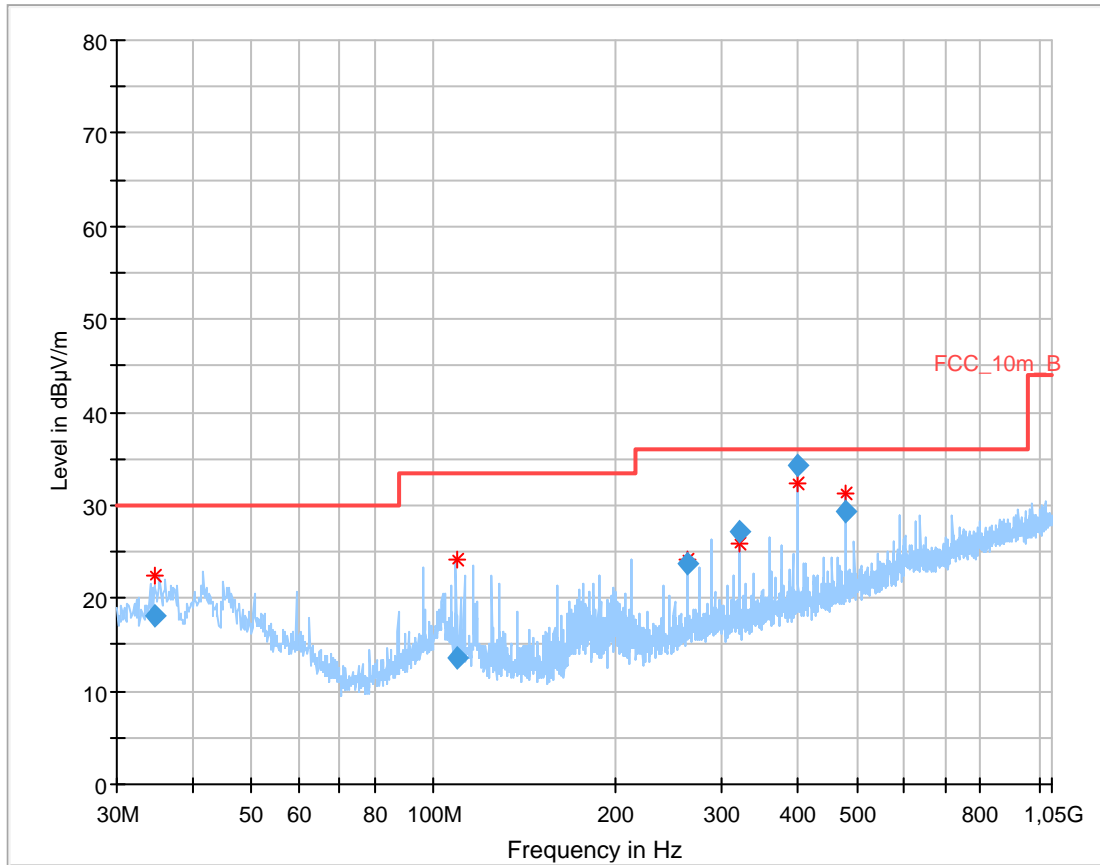


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
34.672350	18.03	30.00	11.97	1000.0	120.000	101.0	V	10	13.8
109.339950	13.49	33.50	20.01	1000.0	120.000	101.0	V	170	11.2
262.500300	23.72	36.00	12.28	1000.0	120.000	98.0	V	-9	13.6
320.001750	27.19	36.00	8.81	1000.0	120.000	98.0	V	10	15.1
400.000800	34.23	36.00	1.77	1000.0	120.000	170.0	H	80	16.9
479.983350	29.38	36.00	6.62	1000.0	120.000	101.0	H	10	18.3

Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, mid channel

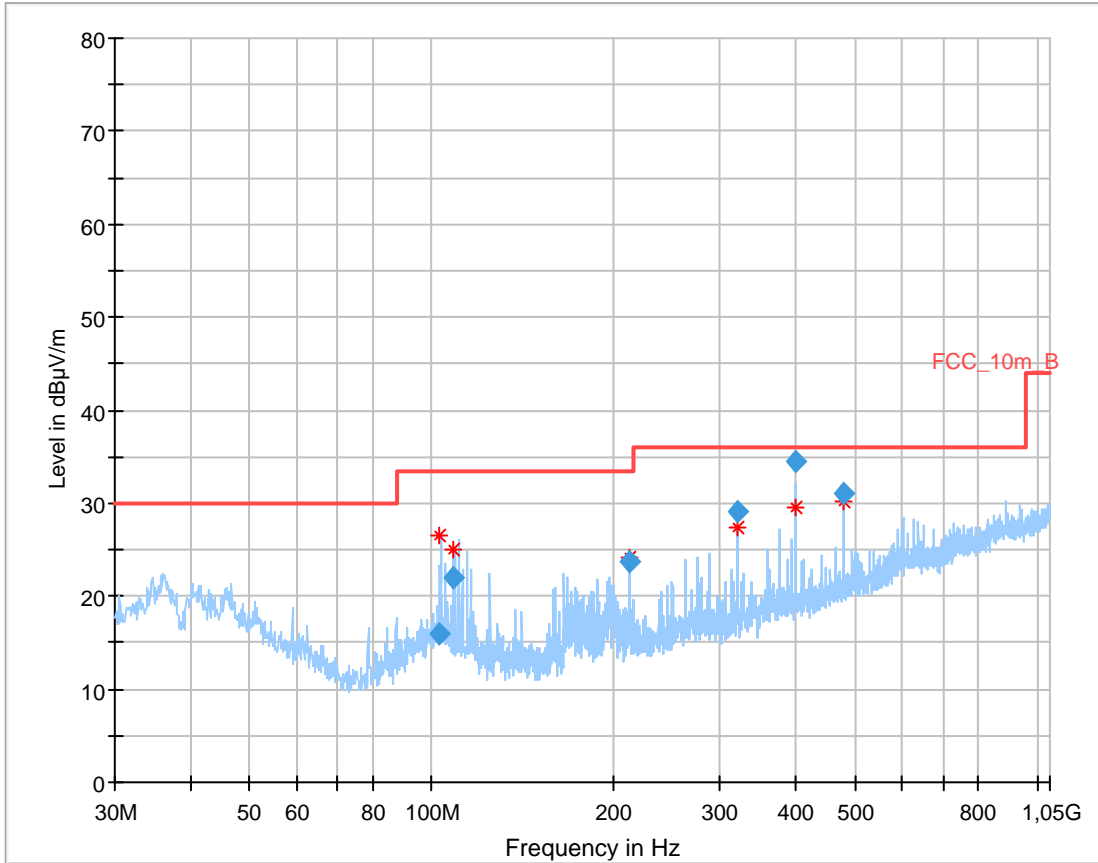

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
103.120200	15.85	33.50	17.65	1000.0	120.000	170.0	V	10	11.8
108.917250	21.99	33.50	11.51	1000.0	120.000	101.0	V	100	11.2
212.478450	23.77	33.50	9.73	1000.0	120.000	98.0	V	10	12.1
319.997550	29.10	36.00	6.90	1000.0	120.000	98.0	V	-10	15.1
399.987150	34.57	36.00	1.43	1000.0	120.000	170.0	H	80	16.9
479.997150	31.03	36.00	4.97	1000.0	120.000	98.0	V	260	18.3


Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, high channel

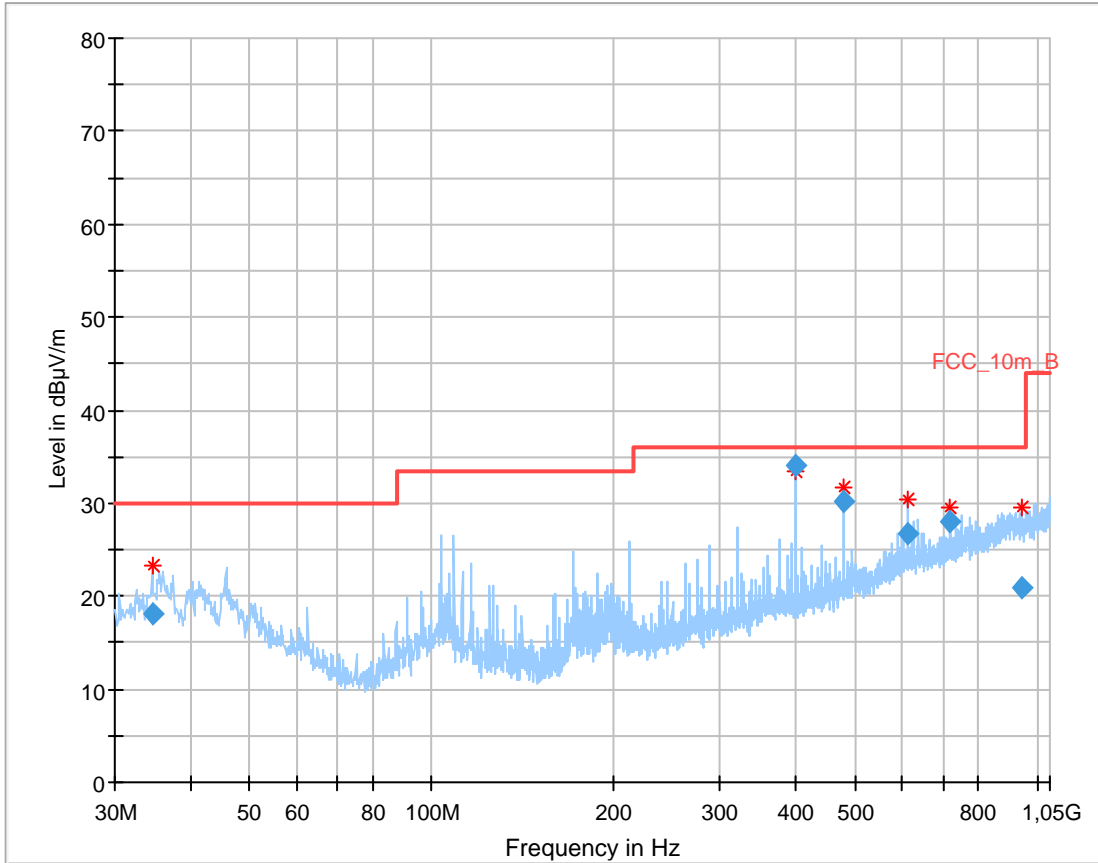

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
34.580850	18.22	30.00	11.78	1000.0	120.000	101.0	V	100	13.8
400.016700	34.17	36.00	1.83	1000.0	120.000	170.0	H	80	16.9
479.992950	30.18	36.00	5.82	1000.0	120.000	101.0	H	-9	18.3
612.494250	26.64	36.00	9.36	1000.0	120.000	98.0	H	100	20.8
720.012300	28.03	36.00	7.97	1000.0	120.000	101.0	H	260	22.0
943.731450	21.02	36.00	14.98	1000.0	120.000	170.0	H	280	24.2

Plot: RX / Idle mode

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization

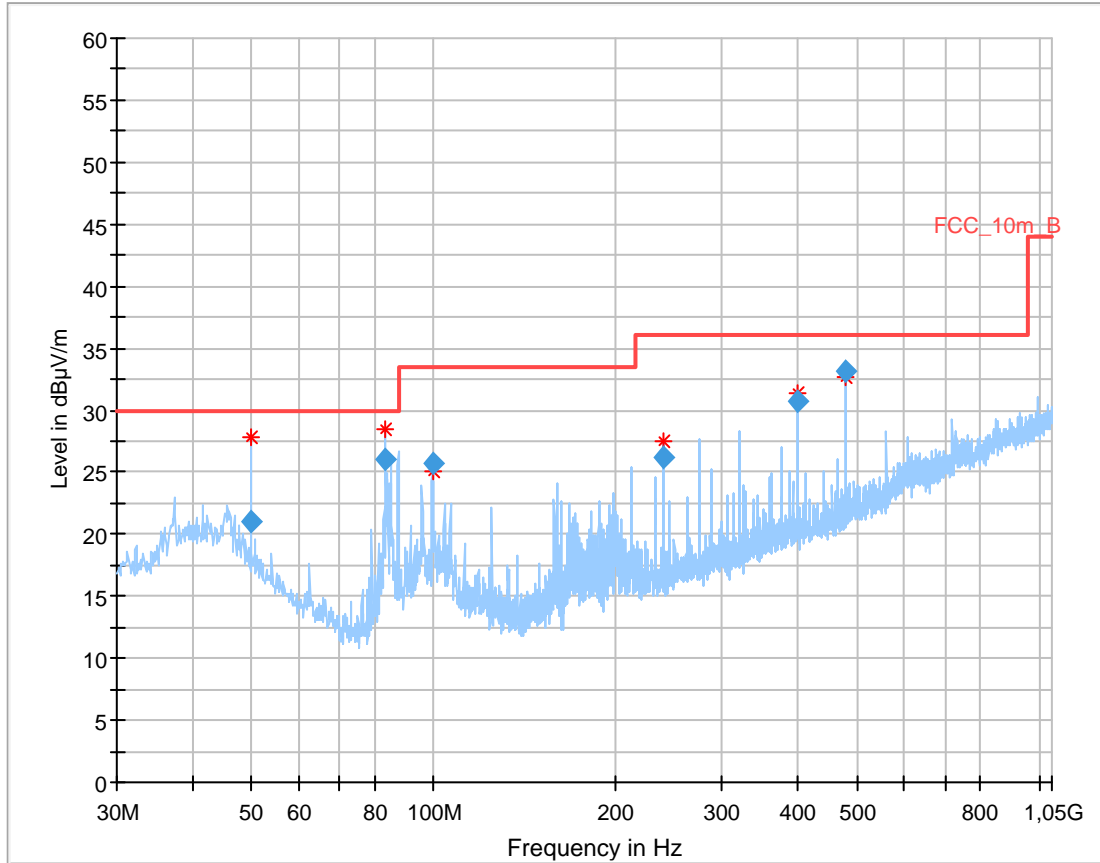

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
50.011050	21.04	30.00	8.96	1000.0	120.000	100.0	V	-50	12.6
83.338800	26.06	30.00	3.94	1000.0	120.000	103.0	V	282	8.9
99.595800	25.72	33.50	7.78	1000.0	120.000	103.0	V	73	12.1
240.011850	26.16	36.00	9.84	1000.0	120.000	354.0	H	298	13.0
400.004250	30.67	36.00	5.33	1000.0	120.000	273.0	H	162	16.9
480.012600	33.10	36.00	2.90	1000.0	120.000	179.0	H	54	18.3

12.12 Spurious emissions radiated above 1 GHz

Description:

Measurement of the radiated spurious emissions above 1 GHz in transmit mode and receiver / idle mode.

Measurement:

Measurement parameter	
Detector:	Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	F > 1 GHz: 1 MHz
Video bandwidth:	3 x RBW
Span:	1 GHz to 26 GHz
Trace mode:	Max Hold
Measured modulation	<input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input type="checkbox"/> OFDM n HT20 – mode <input checked="" type="checkbox"/> OFDM n HT40 – mode <input checked="" type="checkbox"/> RX / Idle – mode
Test setup:	See sub clause 7.2 – A
Measurement uncertainty	See sub clause 9

Limits:

FCC		IC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
Above 960	54.0	3

Results: DSSS

TX Spurious Emissions Radiated [dBµV/m]								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
All detected peak emissions are below the average limit.			All detected peak emissions are below the average limit.			All detected peak emissions are below the average limit.		
	Peak			Peak			Peak	
	AVG			AVG			AVG	
	Peak			Peak			Peak	
	AVG			AVG			AVG	

Results: OFDM


TX Spurious Emissions Radiated [dBµV/m]								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
All detected peak emissions are below the average limit.			All detected peak emissions are below the average limit.			All detected peak emissions are below the average limit.		
	Peak			Peak			Peak	
	AVG			AVG			AVG	
	Peak			Peak			Peak	
	AVG			AVG			AVG	

Results: RX / idle – mode

TX Spurious Emissions Radiated [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
All detected peak emissions are below the average limit.		
	Peak	
	AVG	
	Peak	
	AVG	


Plots: DSSS

Plot 1: Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

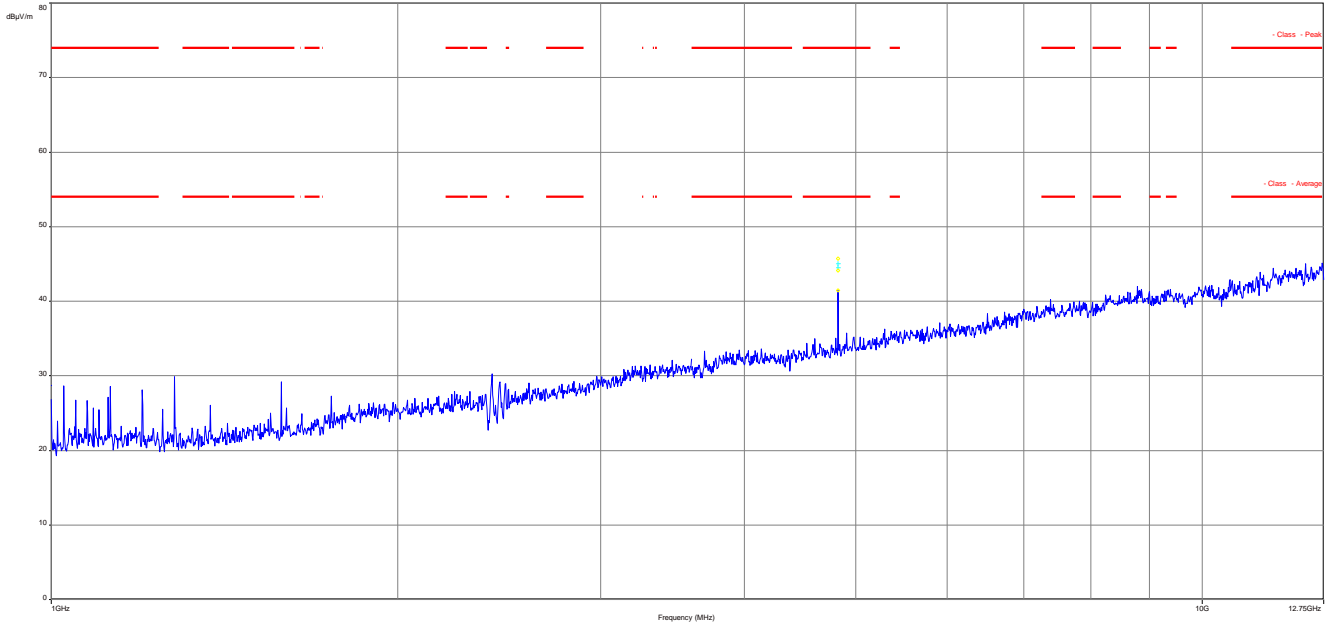


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 2: Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

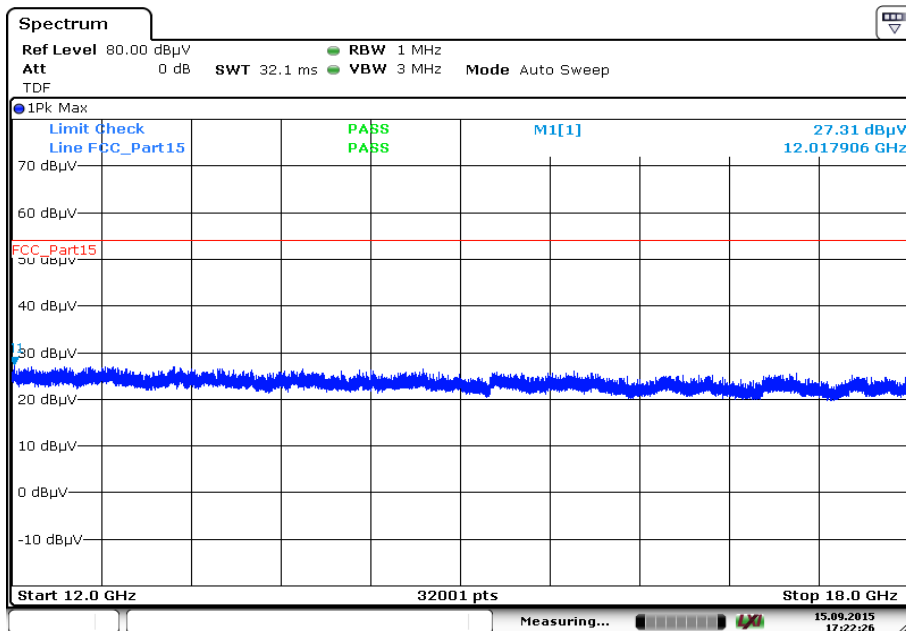


Date: 15.SEP.2015 17:22:26

Plot 3: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

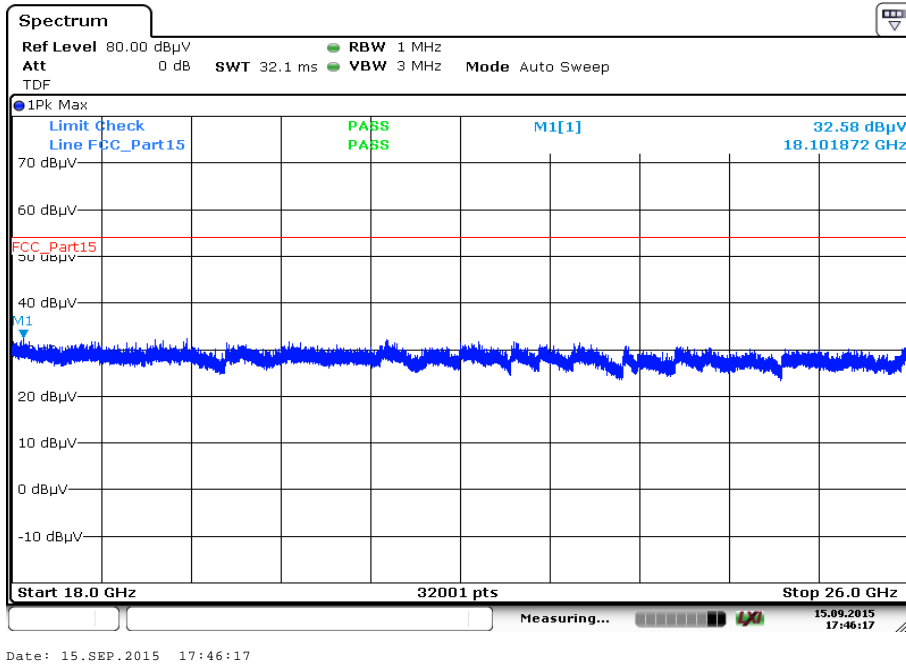


Plot 4: Middle channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

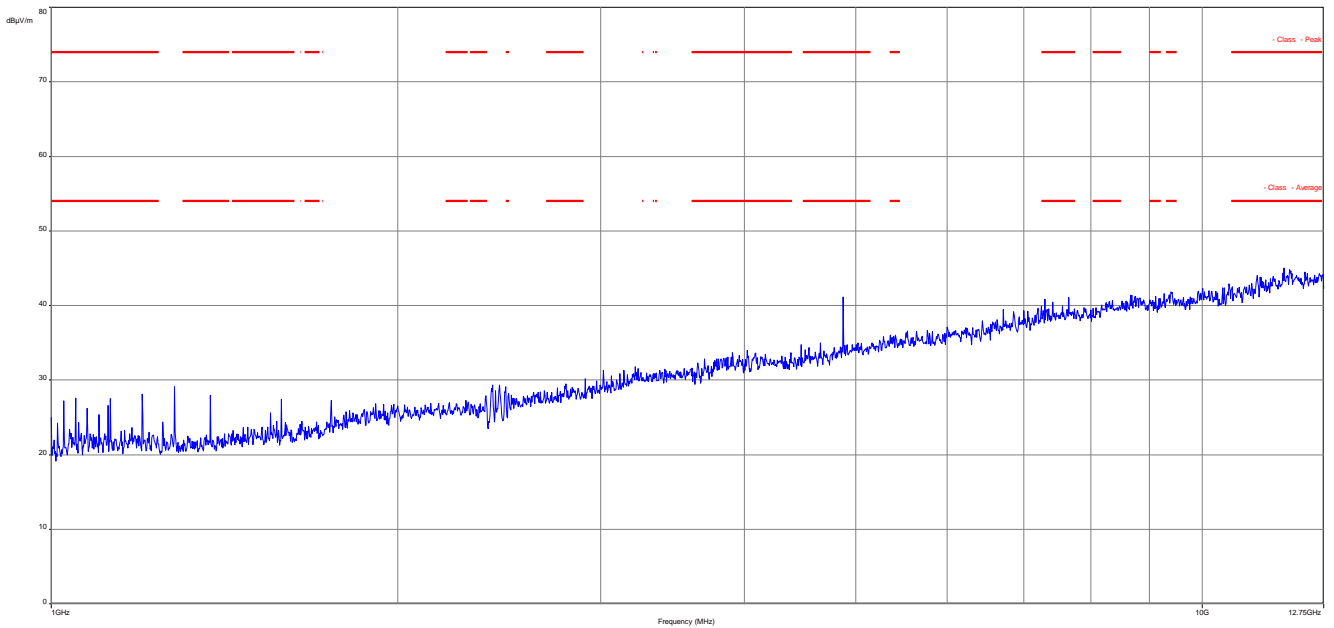


The carrier signal is notched with a 2.4 GHz band rejection filter.


Plot 5: Middle channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

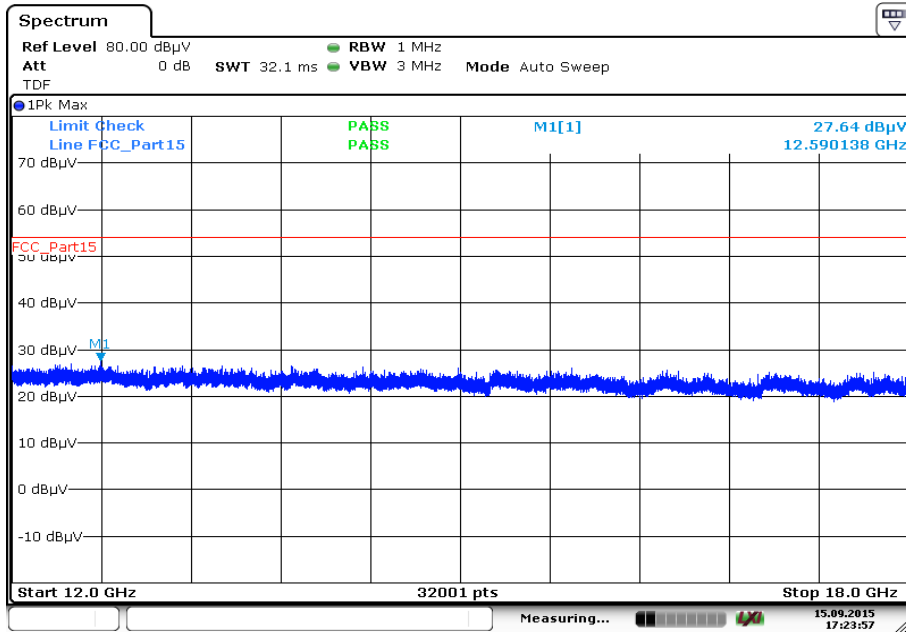

Plot 6: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

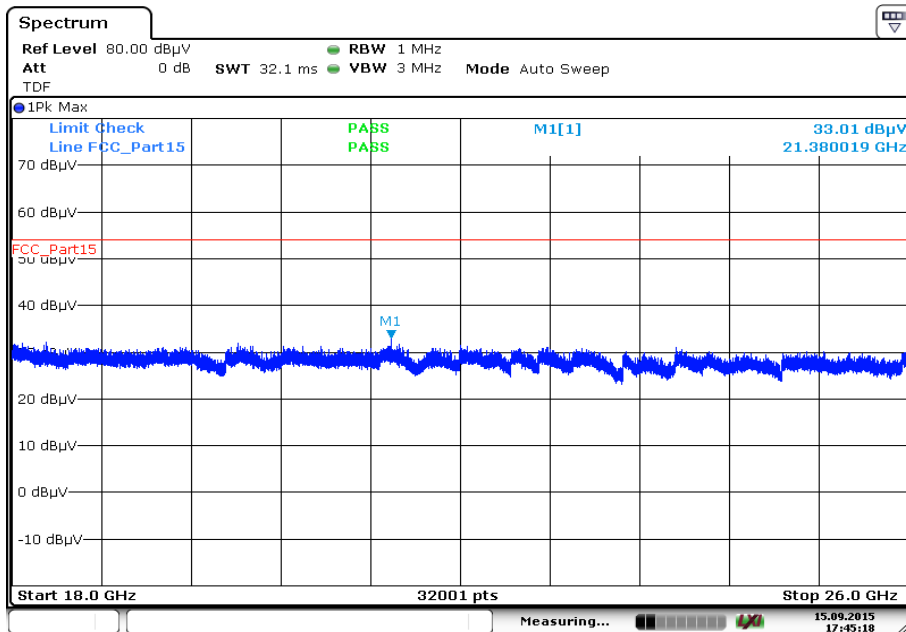


Plot 7: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

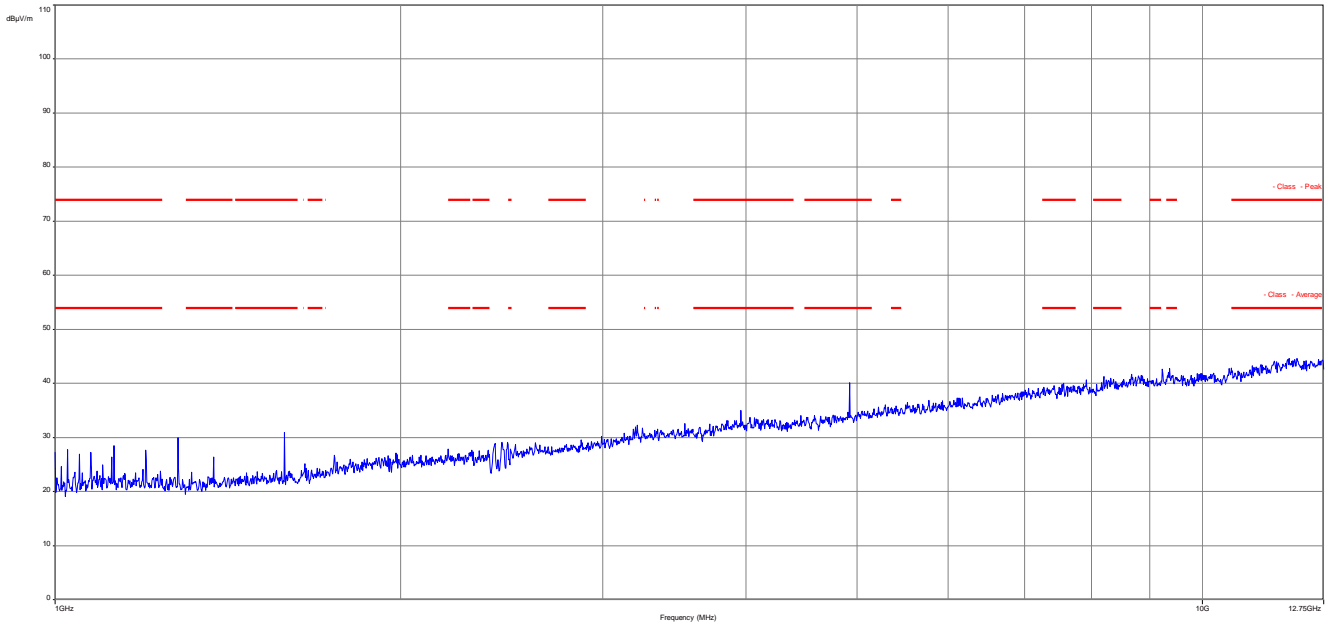


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 8: Highest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

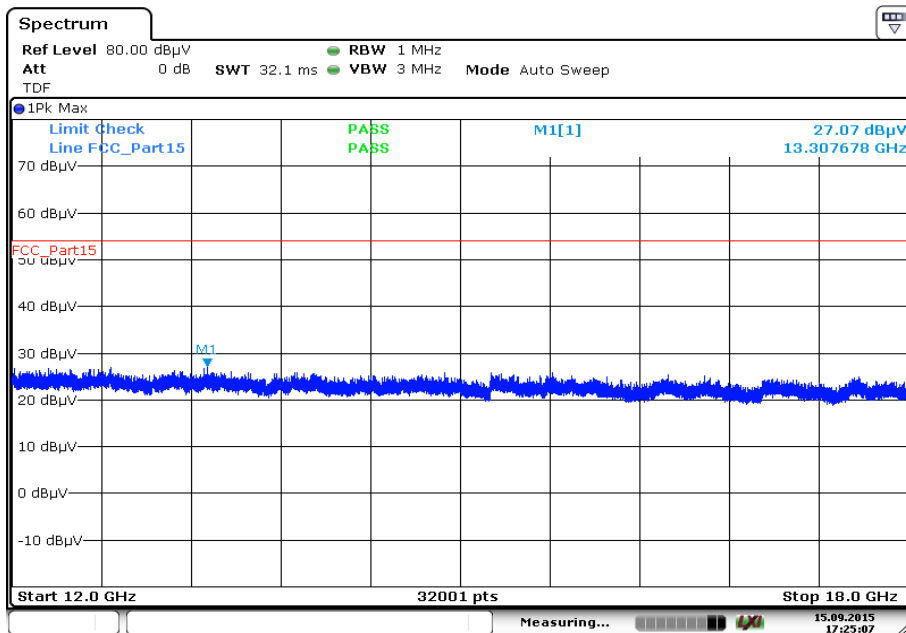

Date: 15.SEP.2015 17:25:07


Plot 9: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

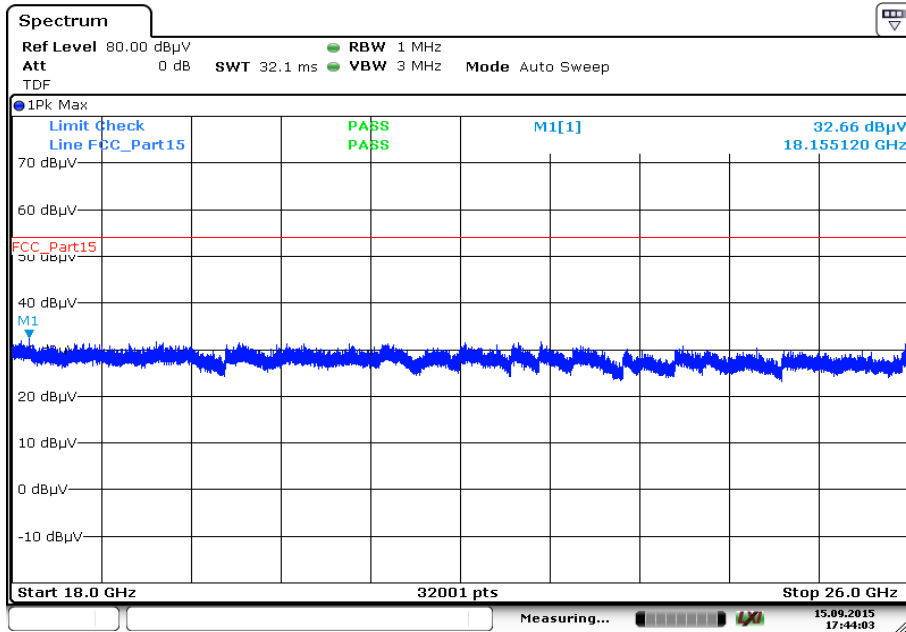

Date: 15.SEP.2015 17:44:03


Plots: OFDM

Plot 1: Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

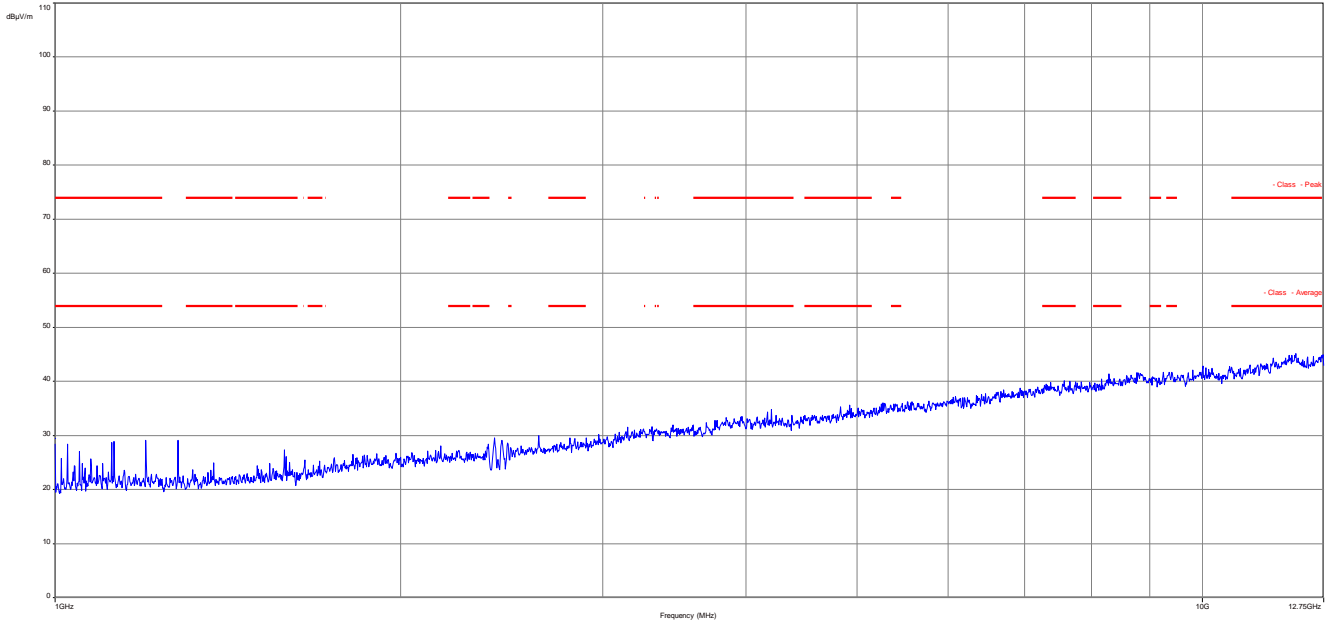


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 2: Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

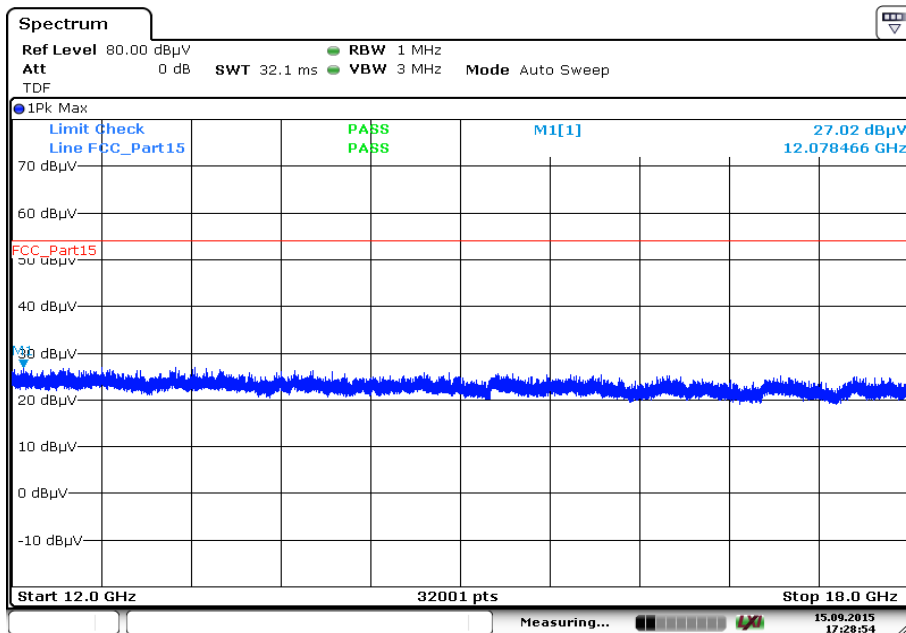


Date: 15.SEP.2015 17:28:54

Plot 3: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

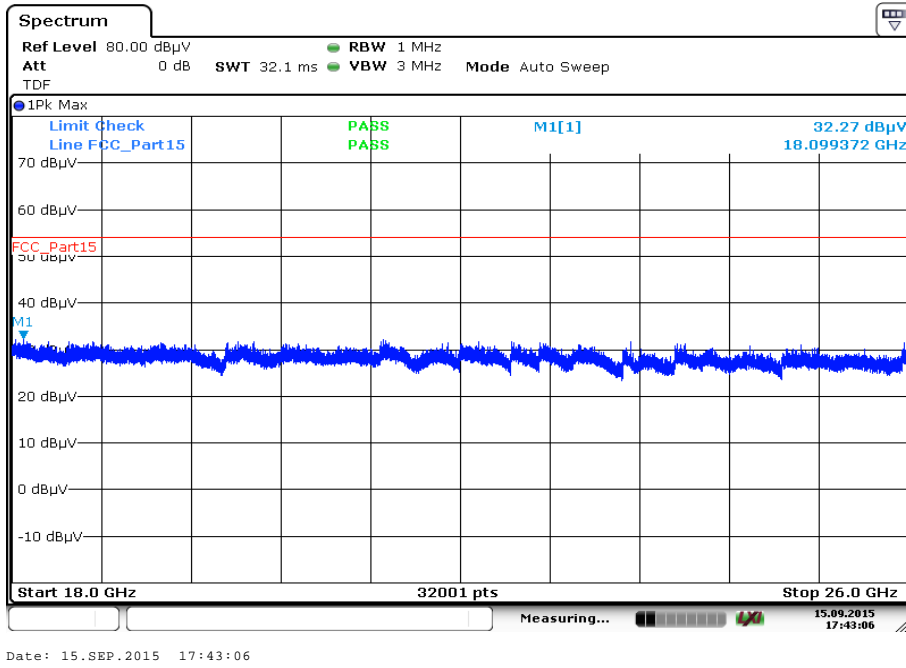


Plot 4: Middle channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

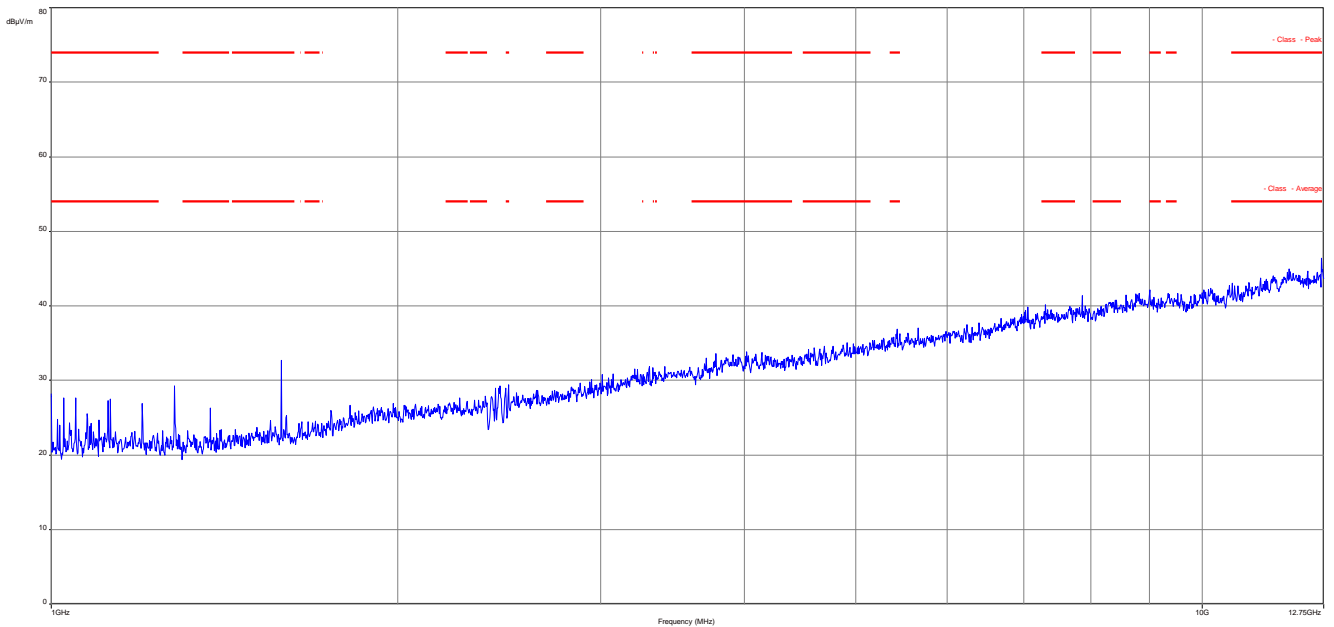


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 5: Middle channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

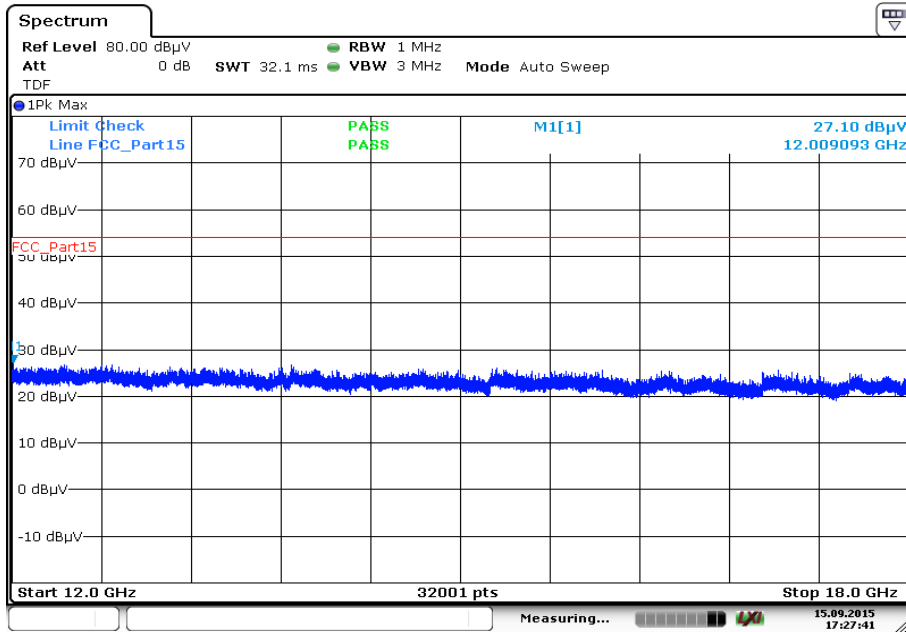


Date: 15.SEP.2015 17:27:41

Plot 6: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

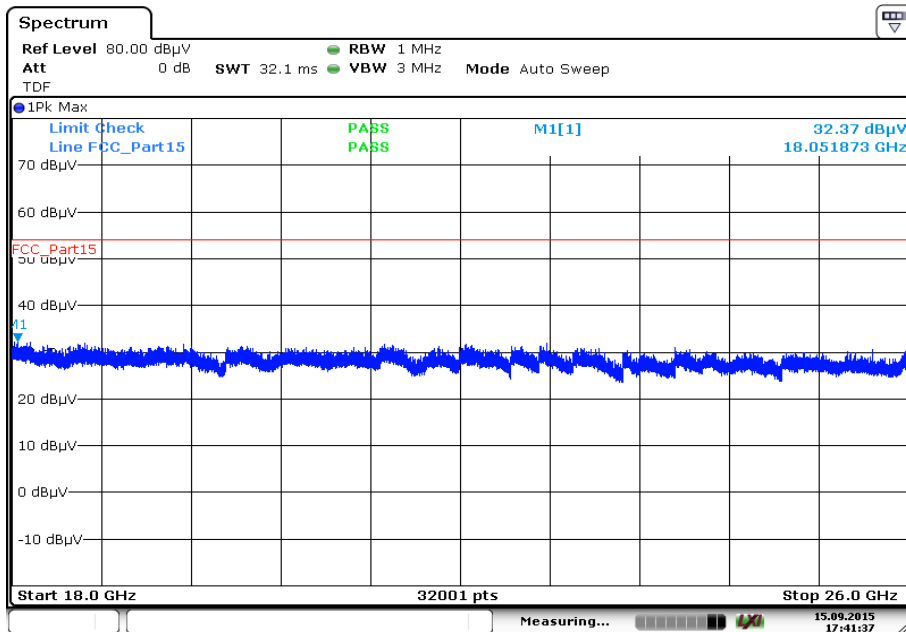


Date: 15.SEP.2015 17:41:37

Plot 7: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

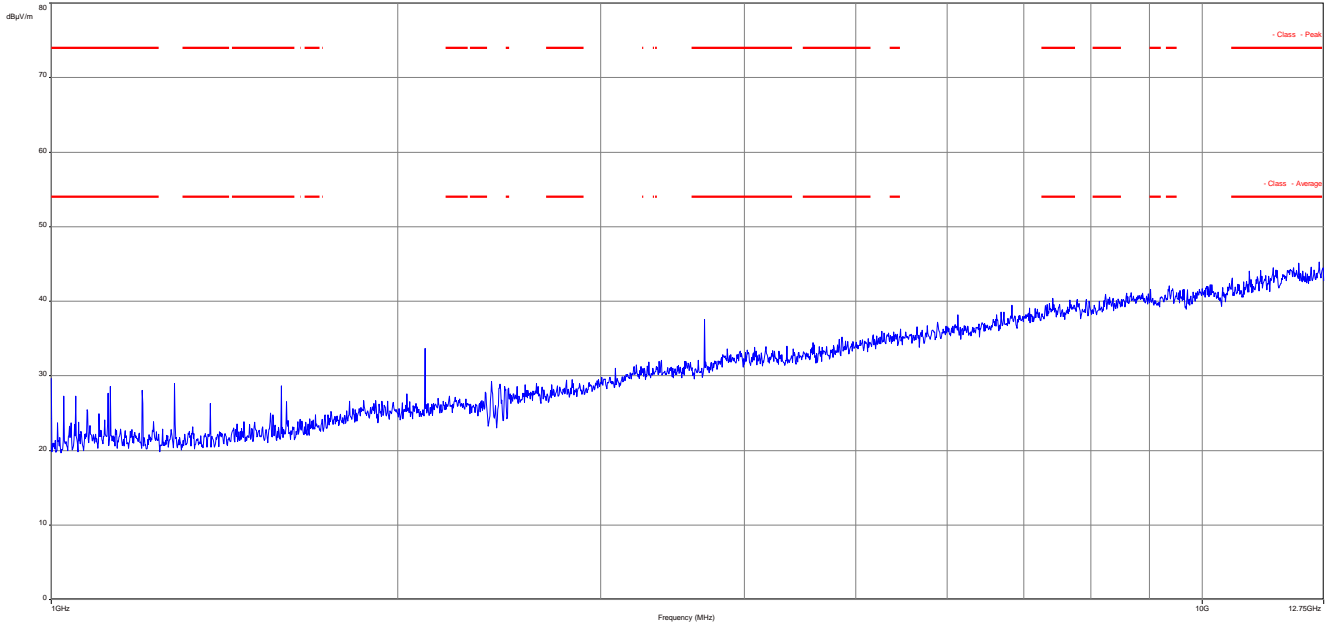


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 8: Highest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

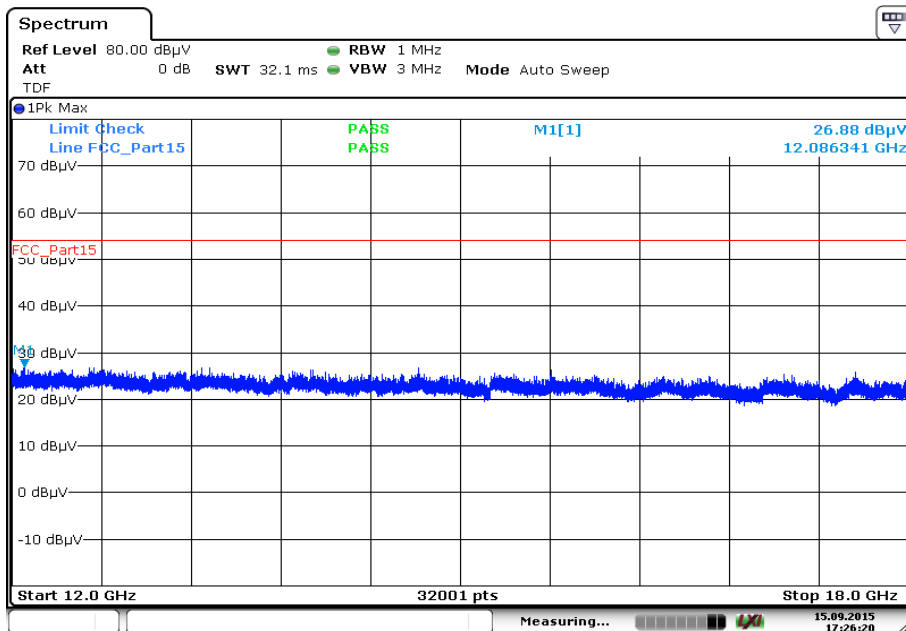


Date: 15.SEP.2015 17:26:20

Plot 9: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

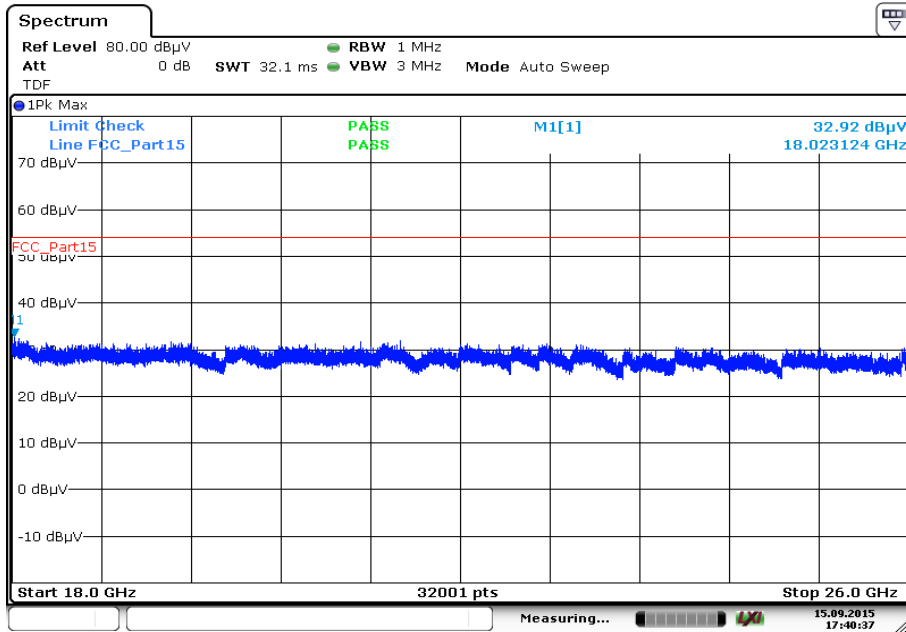


Plots: RX / idle mode


Plot 1: 1 GHz to 12.75 GHz, vertical & horizontal polarization

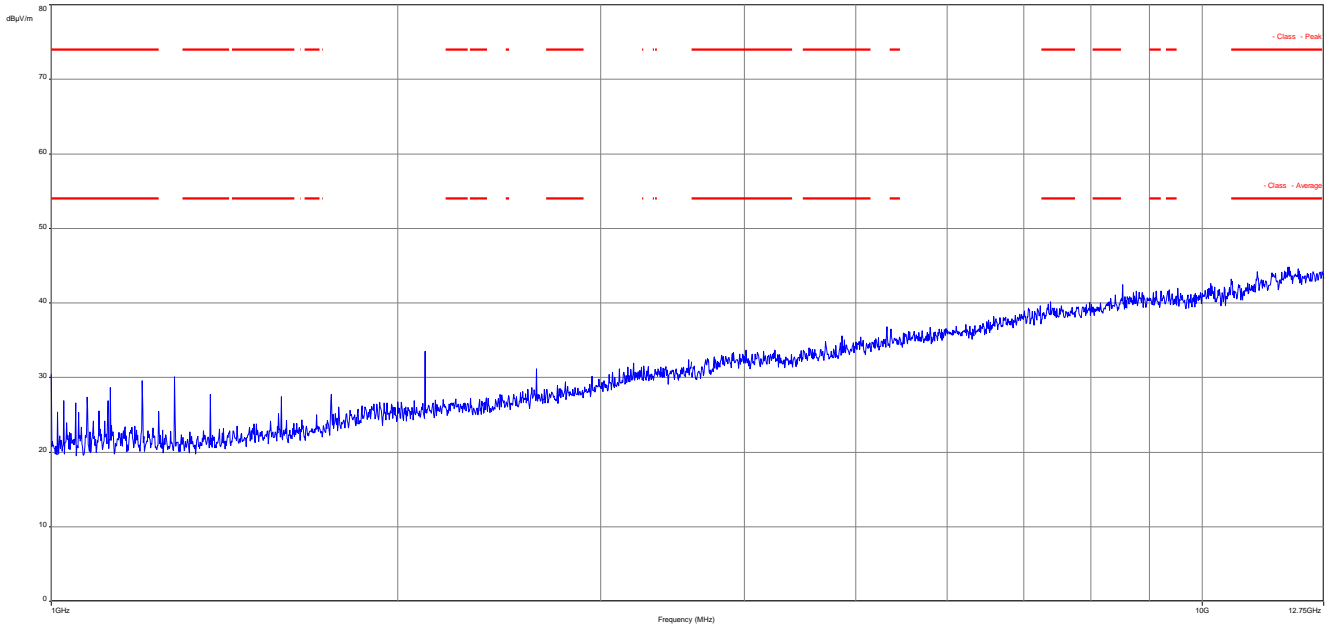

Plot 2: 12.75 GHz to 18 GHz, vertical & horizontal polarization

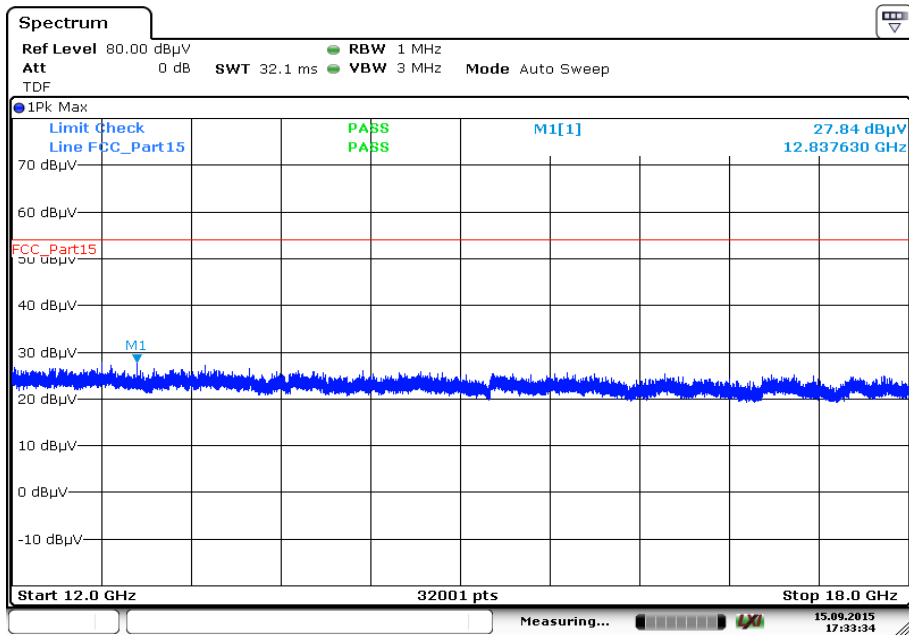

Plot 3: 18 GHz to 26 GHz, vertical & horizontal polarization

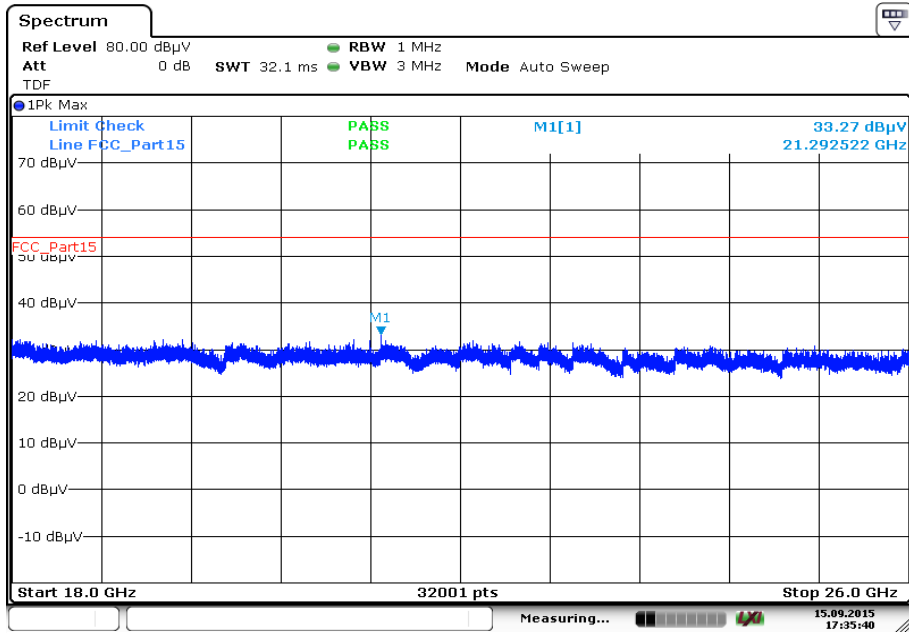

Date: 15.SEP.2015 17:35:40

12.13 Spurious emissions conducted below 30 MHz (AC conducted)

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is repeated for DSSS and OFDM modulation. If peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Resolution bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace mode:	Max Hold
Test setup:	See sub clause 7.5 - A
Measurement uncertainty:	See sub clause 9

Limits:

FCC		IC
Frequency (MHz)	Quasi-Peak (dBµV/m)	Average (dBµV/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50


*Decreases with the logarithm of the frequency

Results:


TX Spurious Emissions Conducted < 30 MHz [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
All detected peaks are more than 20 dB below the limit.		

Plots:

Plot 1: 150 kHz to 30 MHz, phase line

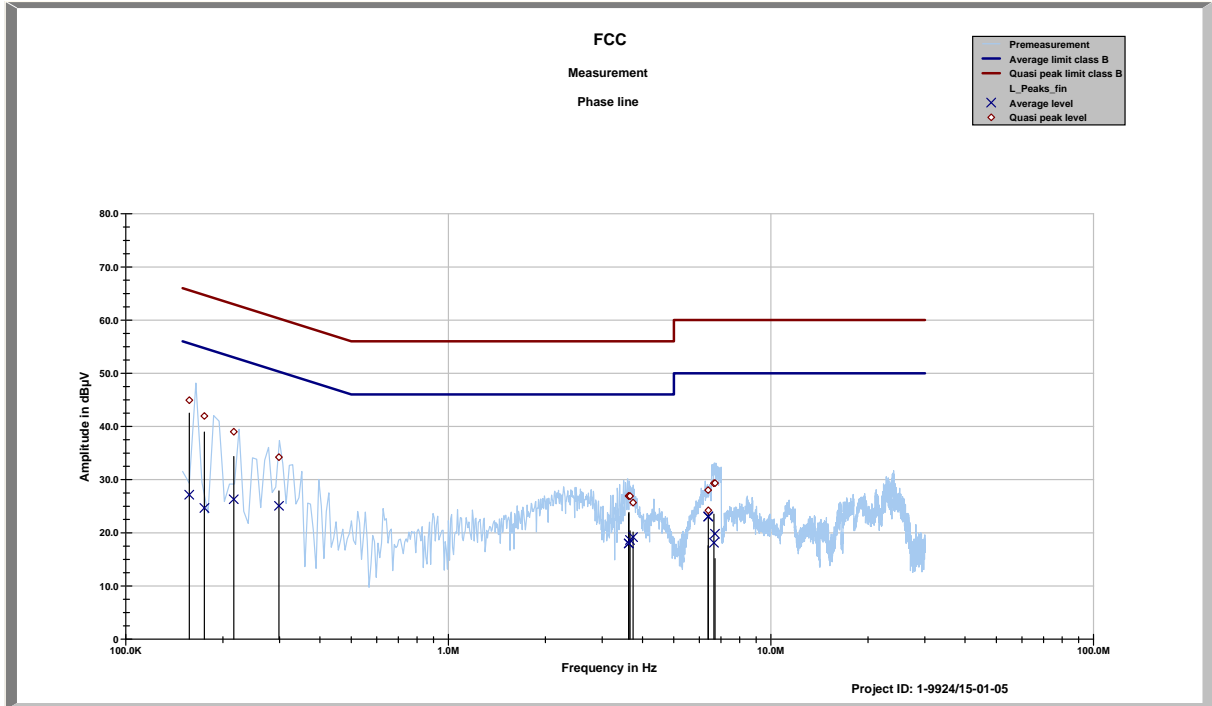

Plot 2: 150 kHz to 30 MHz, neutral line

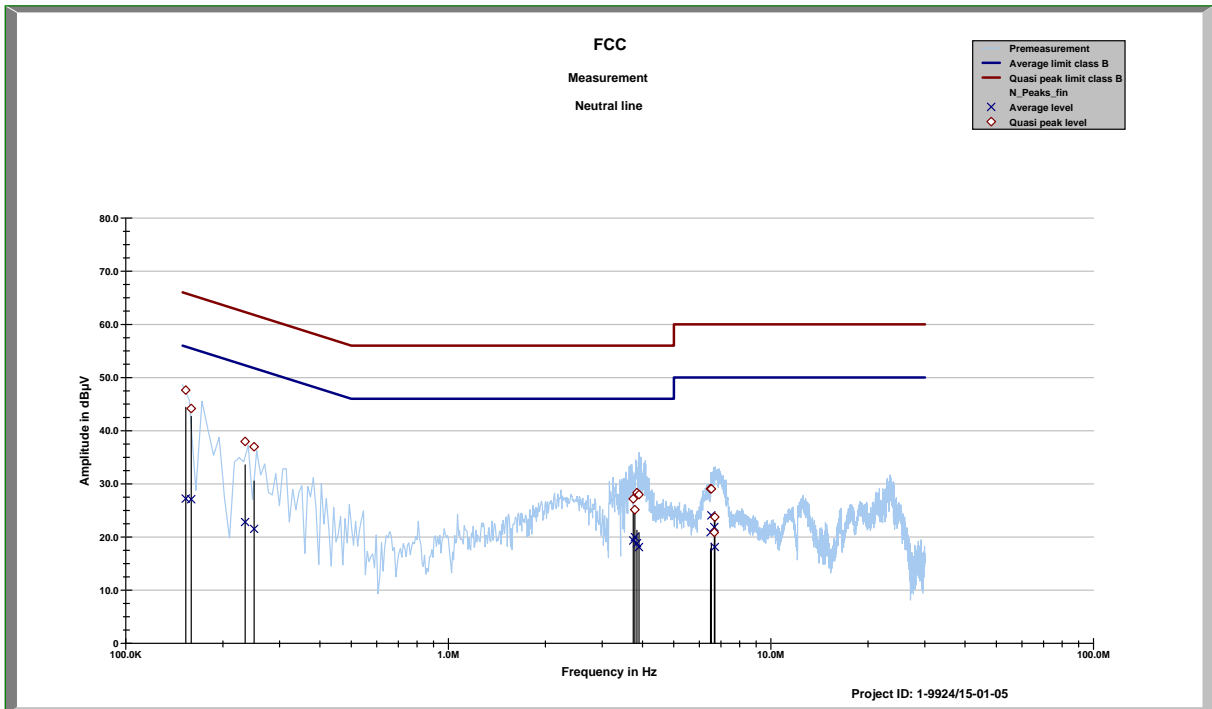

Annex A Document history

Version	Applied changes	Date of release
	Initial release	2016-01-07
A	Editorial changes: Applicant, Manufacturer and EUT information	2016-03-03
B	Additional measurements to create a full test report	2016-08-11
C	HVIN and PMN changed	2016-08-18

Annex B Further information**Glossary**

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software
PMN		Product marketing name
HMN		Host marketing name
HVIN		Hardware version identification number
FVIN		Firmware version identification number

Annex C Accreditation Certificate

Front side of certificate

Back side of certificate



Deutsche Akkreditierungsstelle GmbH

Befehle gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV
 Unterzeichnerin der Multilateralen Abkommen
 von EA, ILAC und IAF zur gegenseitigen Anerkennung

Akkreditierung



Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium

CETECOM ICT Services GmbH
 Untertürkheimer Straße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:

- Funk
- Mobilfunk (GSM / DCS) + OTA
- Elektromagnetische Verträglichkeit (EMV)
- Produktsicherheit
- SAR / EMF
- Umwelt
- Smart Card Technology
- Bluetooth®
- Automotive
- Wi-Fi-Services
- Kanadische Anforderungen
- US-Anforderungen
- Akustik
- Near Field Communication (NFC)

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 04.05.2016 mit der Akkreditierungsnummer D-PL-12076-01 und ist gültig bis 17.01.2018. Sie besteht aus diesem Deckblatt, der Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 63 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-01

Frankfurt, 04.05.2016

Siehe Hinweise auf der Rückseite

RSE
 Im Auftrag Dipl.-Ing. (FH) Ralf Eigner
 Abteilungsleiter

Deutsche Akkreditierungsstelle GmbH

Standort Berlin
 Spittelmarkt 10
 10117 Berlin

Standort Frankfurt am Main
 Europa-Allee 52
 60327 Frankfurt am Main

Standort Braunschweig
 Bundesallee 100
 38116 Braunschweig

Die auszugsweise Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAkkS). Ausgenommen davon ist die separate Weiterverbreitung des Deckblatts durch die umseitig genannte Konformitätsbewertungsstelle in unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt, die über den durch die DAkkS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom 31. Juli 2009 (BGBl. I S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung im Zusammenhang mit der Vermarktung von Produkten (Abt. L 218 vom 9. Juli 2008, S. 30). Die DAkkS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der European co-operation for Accreditation (EA), des International Accreditation Forum (IAF) und der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:
 EA: www.european-accreditation.org
 ILAC: www.ilac.org
 IAF: www.iaf.nu

Note:

The current certificate including annex can be received from CETECOM ICT Services GmbH on request.