

Recognized by the
Federal Communications Commission
Anechoic chamber registration no.: 90462 (FCC)
Anechoic chamber registration no.: 3463 (IC)
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number
DAT-P-176/94-D1
Deutscher
Akkreditierungs
Rat
DAR

Independent ETSI
compliance test house



Accredited Bluetooth® Test Facility (BQTF)

Test report no.: 2-4318-01-01/06
FCC Part 15.407 / CANADA RSS-210
FCC ID:LYHW700-1-V1 and LYHW700-2-V1
IC:267AA-W700V1

SCALANCE W744-1PRO / SCALANCE W788-1PRO /
SCALANCE W788-2PRO

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Cetecom ICT is under license

Table of contents

1.	ADMINISTRATIVE DATA	3
1.1.	ADMINISTRATIVE DATA OF THE TEST FACILITY	3
1.1.1	<i>Identification of the testing laboratory</i>	3
1.1.2	<i>Organizational items.....</i>	3
1.1.3	<i>Applicant's details</i>	4
1.2	ADMINISTRATIVE DATA OF MANUFACTURER / MEMBER	4
1.3	DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	5
1.3.1	<i>EUT: Type, S/N etc.</i>	5
1.3.2	<i>If RF component testing only, description of additional used HW/SW.....</i>	5
1.3.3	<i>ADDITIONAL EUT INFORMATION</i>	5
1.3.4	<i>EUT operating modes.....</i>	6
1.3.5	<i>Extreme conditions testing values.....</i>	6
2	TEST STANDARD & SUMMARY LIST OF ALL PERFORMED TEST CASES	7
3	RF MEASUREMENT TESTING	8
3.1	DESCRIPTION OF TEST SET-UP	8
3.1.1	<i>Radiated measurements</i>	8
3.1.2	<i>Conducted measurements</i>	8
3.1.3	<i>AC-conducted measurements.....</i>	8
3.2	REFERENCED DOCUMENTS	9
3.3	ADDITIONAL COMMENTS	9
3.4	ANTENNA GAIN	9
3.5	PEAK TRANSMIT POWER §15.407A(1).....	10
3.6	OCCUPIED BANDWIDTH (-26dB, -20 dB) §15.407A(1	12
3.7	RATIO OF PEAK EXCURSION §15.407A(6.....	16
3.8	SPECTRAL DENSITY CONDUCTED §15.407(A5)	18
3.9	UNDESIRABLE EMISSION LIMITS CONDUCTED 15.407 (B)(1).....	20
3.10	MPE CALCULATION	23
3.11	MAX. PEAK OUTPUT POWER (RADIATED) §15.247 (B) (1)	24
3.12	SPURIOUS EMISSIONS - RADIATED (TRANSMITTER) §15.209	25
3.13	SPURIOUS EMISSIONS RADIATED (RX) 15.209	39
3.14	SPURIOUS EMISSIONS - RADIATED <30 MHz (VALID FOR ALL ANTENNA TYPES) §15.109	43
3.15	CONDUCTED EMISSIONS <30 MHz §15.107/207	44
3	PHOTOGRAPHS	49

ANNEX 1: ANTENNA MEASUREMENTS

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 3 of 65

1. Administrative data

1.1. Administrative data of the test facility

1.1.1 Identification of the testing laboratory

Company name:	Cetecom ICT Services GmbH
Address:	Untertürkheimerstr. 6-10 D-66117 Saarbruecken Germany
Laboratory accreditation:	DAR-Registration No. DAT-P-176/94-D1 Bluetooth Qualification Test Facility (BQTF)
Responsible for testing laboratory:	Harro Ames, Michael Berg Phone: +49 681 598 0 Fax: +49 681 598 9075 email: info@ict.cetecom.de

 / 
Responsible for testing laboratory
(Harro Ames, Michael Berg)

1.1.2 Organizational items

Reference No.:	2-4318-01-01/06
Order No.:	
Responsible for test report and project leader:	Harro Ames, Michael Berg
Receipt of EUT:	2006-08-04
Date(s) of test:	2006-08-04 to 2006-08-29
Date of report:	2006-08-30
Number of report pages:	66
Number of diagram pages (annex):	
Version of template:	1.2

 / 
Responsible for test report
(Harro Ames, Michael Berg)

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 4 of 65

Note:

The test results of this test report relate exclusively to the item tested as specified in this report. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

During the test no hardware and software changes are allowed to be performed at the EUT.

1.1.3 Applicant's details

Applicant's name:	Siemens AG A&D PT2
Address:	Gleiwitzer Strasse 555 D-90475 Nürnberg Germany
Contact person:	Mr. Christoph Weiler Phone: +49 (0) 721 595 4406 Fax: +49 (0) 721 595 2326 email: christoph.weiler@khe.siemens.de

1.2 Administrative data of manufacturer / member

Manufacturer's name:	- applicant -
Address:	

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 5 of 65

1.3 Description of the Equipment under test (EUT)

1.3.1 EUT: Type, S/N etc.

Product name	Product ID	Description	Serial number	HW hardware status	SW software status
SCALANCE W700	W788-1(2)Pro	WLAN AP			T3.13
	W744-1Pro	WLAN Client			
Frequency Band [GHz]	Type of Modulation	Number of channels	Antenna-connectors	Power Supply	Temperature Range
5.15 – 5.25	OFDM	4 / 4	2 external	24 V DC	-20°C - +55°C

FCC ID: LYHWW700-1-V1 and LYHWW700-2-V1

IC: 267AA-W700-V1

1.3.2 If RF component testing only, description of additional used HW/SW

	Product name	Product ID	Description	S/N serial number	HW hardware status	SW software status
1						
2						

1.3.3 Additional EUT information

The Siemens A&D PT2 Wireless LAN Product Family „SCALANCE W700 V1“ consists of three variants, namely

- SCALANCE W744-1PRO, 1 WLAN card inside
- SCALANCE W788-1PRO, 1 WLAN card inside
- SCALANCE W788-2PRO, 2 WLAN cards inside

The SCALANCE W788-2PRO is the superset of all variants and include the whole functionality of all three products. This functionality can be divided into

- Simple WLAN client functionality, i.e. the device can bridge Ethernet traffic to a wireless LAN
- Single Access Point functionality
- Access Point functionality supporting two WLAN cells in parallel using two radio interfaces

The SCALANCE W744-1PRO only supports the client functionality. The SCALANCE W788-1PRO includes the single access point functionality and the client mode. The SCALANCE W788-2PRO additionally allows operating two WLAN cells in parallel, since it is fitted with two WLAN radio cards.

All variants are based on the same WLAN chipset (ATHEROS AR5212 + AR5112) and even on the same WLAN minipCI module from Alpha-Networks.

PCB-boards, layout, parts and housing are identical on all three variants, only the SCALANCE W788-2PRO has two additional antenna ports.

The radiated tests were performed with two different antennas.

The first antenna, here called antenna 1 is a dualband rod antenna for mounting directly on the housing.

The second antenna, here called antenna 2 is a „high gain“ dualband antenna to mount separately from the access point, connected with reverse sma connectors and a dedicated coax cable.

1.3.4 EUT operating modes

EUT operating mode no.*)	Description of operating modes	Additional information
Op. 0	Normal mode	Normal temperature and power source conditions
Op. 1		low temperature, low power source conditions
Op. 3		low temperature, high power source conditions
Op. 4		high temperature, low power source conditions
Op. 5		high temperature, high power source conditions

*) EUT operating mode no. is used to simplify the test report.

1.3.5 Extreme conditions testing values

Description	Shortcut	Unit	Value
Nominal Temperature / humidity	T _{nom}	°C / %	22/ 33
Low Temperature	T _{low}	°C	-20
High Temperature	T _{high}	°C	+55
Nominal Power Source	V _{nom}	V	24
Low Power Source	V _{low}	V	20
High Power Source	V _{high}	V	28

Type of powersource: External DC power supply from our house

2 Test standard & summary list of all performed test cases

TC identifier	Description	Verdict	Date	Remark
RF-Testing	FCC Part 15 §15.407 - CANADA RSS-210	PASS	2006-08-31	

Test Specification Clause	Test Case	Pass	Fail	Not applicable	Not performed
None	Antenna Gain	Yes			
Range:	5.150 to 5.250 GHz				
§15.407a(1)	Peak transmit power	Yes			
§15.407a(1)	Occupied bandwidth	Yes			
§ 15.407a (6)	Ratio of peak excursion	Yes			
§15.407a(5)	Peak power spectral density conducted	Yes			
§ 15.407b (1)	Undesirable emissions conducted	Yes			
§ 15.209	Spurious Emission -radiated (TX)	Yes			
§ 15.209	Spurious Emission -radiated (RX)	Yes			
§ 15.107/207	Conducted Emissions <30 MHz	Yes			

3 RF measurement testing

3.1 Description of test set-up

3.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-2003 clause 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.


30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

>1GHz: Average, RBW 1MHz, VBW 10 MHz, waveguide horn with lownoise preamp

3.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is connected to the spectrum analyzer. The specific losses for signal paths are first checked within a calibration. The measurement readings on the spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signaling unit and the spectrum analyzer are impedance matched on 50 Ohm.

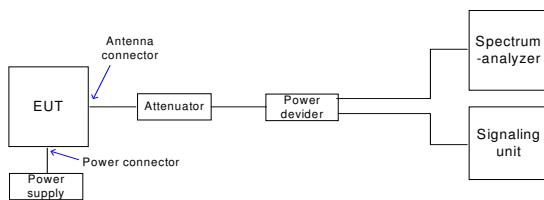

3.1.3 AC-conducted measurements

As the product is sold without any power supply, we used a power supply from our company to show compliance with AC-conducted requirements.

3.2 Referenced Documents

none

3.3 Additional comments

Hardware / software changes during testing

Setup revision	Description of change	Change referenced to setup revision	Already perf. testcases influenced yes (reapeted) / no

3.4 Antenna gain

The antenna gain for the three used antennas was measured in a so called “compact range” in our house (see results on annex 1)

Antenna 1: “Joymax” TMX 614RSXXX-403 (for direct connection at the housing)

-Max gain at 5.2 GHz = 1,7 dBi


Antenna 2: “Joymax” FG102 (delivered with a 5m fix mounted coax cable)

-Max gain at 5.2 GHz = 5,3 dBi (antenna itself) – 3.7 dB loss of the cable = 1.6 dBi.

Frequency range of the sample : 5150 to 5250 MHz**3.5 Peak Transmit Power****§15.407a(1)****3.5.1 Measurement True RMS**

Plot 1: 5180 MHz (result calculated by the FSU50 from Rohde & Schwarz with a true RMS filter)

here measured in time domain

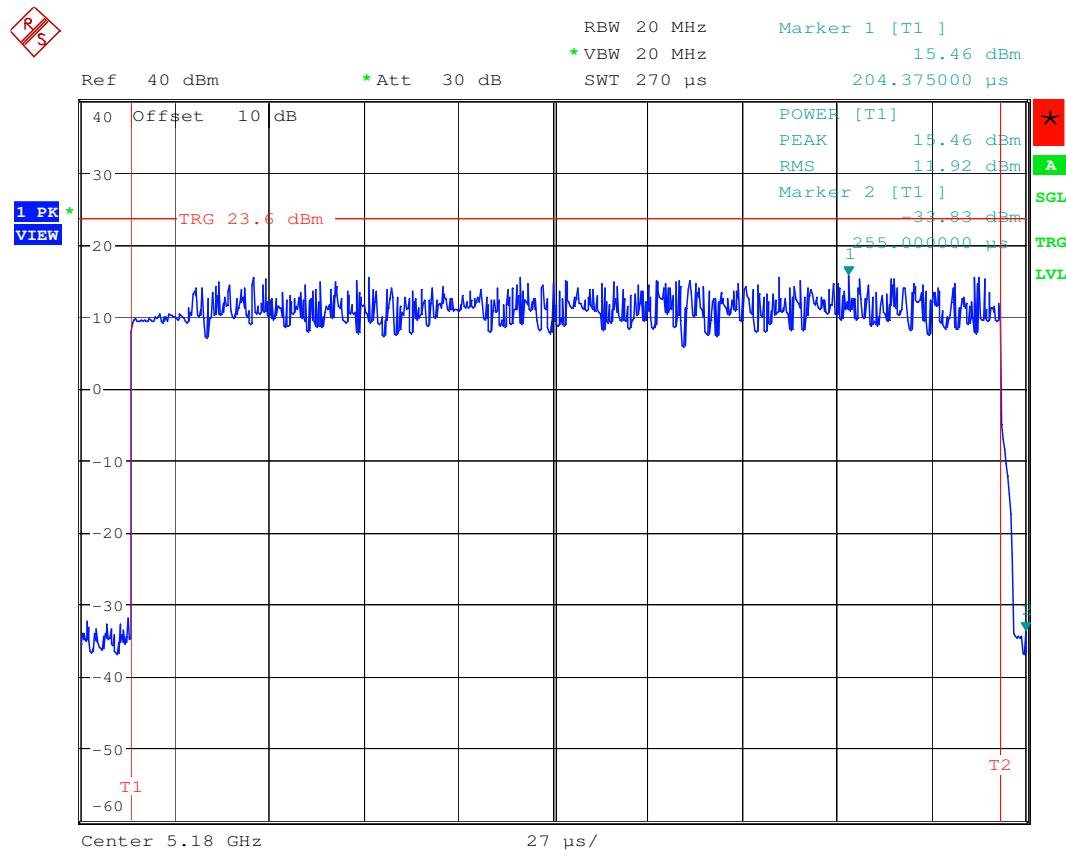

Date: 29.AUG.2006 11:53:03

calculated result during time of continuous emissions, required in 15.407 (a)(4)

Peak value in this burst: 15.46 dBm

RMS value in this burst: 11.92 dBm

Delta dB = 3.54 dB

Limit: 17 dBm RMS

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

CETECOM™


Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 11 of 65

Plot 2: 5240 MHz (result calculated by the FSU50 from Rohde & Schwarz with a true RMS filter)

here measured in time domain

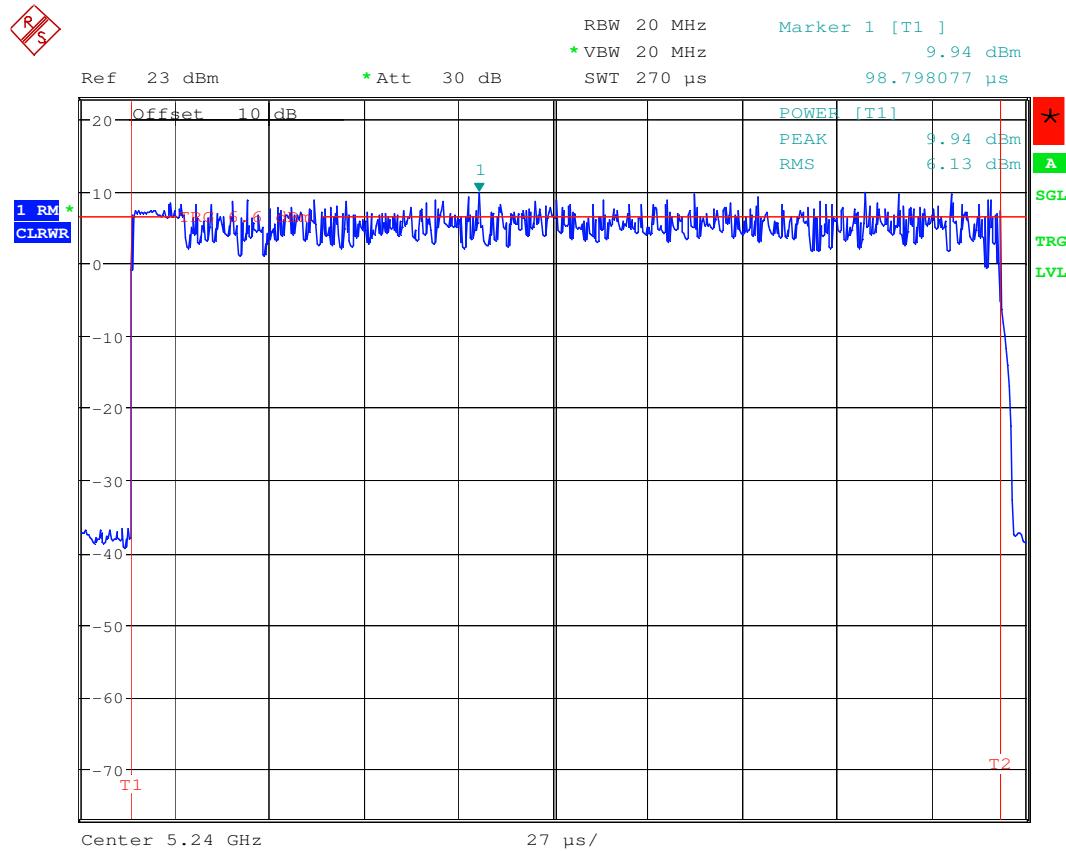

Date: 29.AUG.2006 10:08:42

calculated result during time of continuous emissions, required in 15.407 (a)(4)

Peak value in this burst: 9.94 dBm

RMS value in this burst: 6.13 dBm


Delta dB = 3.81 dB

Limit: 17 dBm RMS

3.6 Occupied bandwidth (-26dB, -20 dB)

§15.407a(1)

5180 MHz -26 dB emission BW

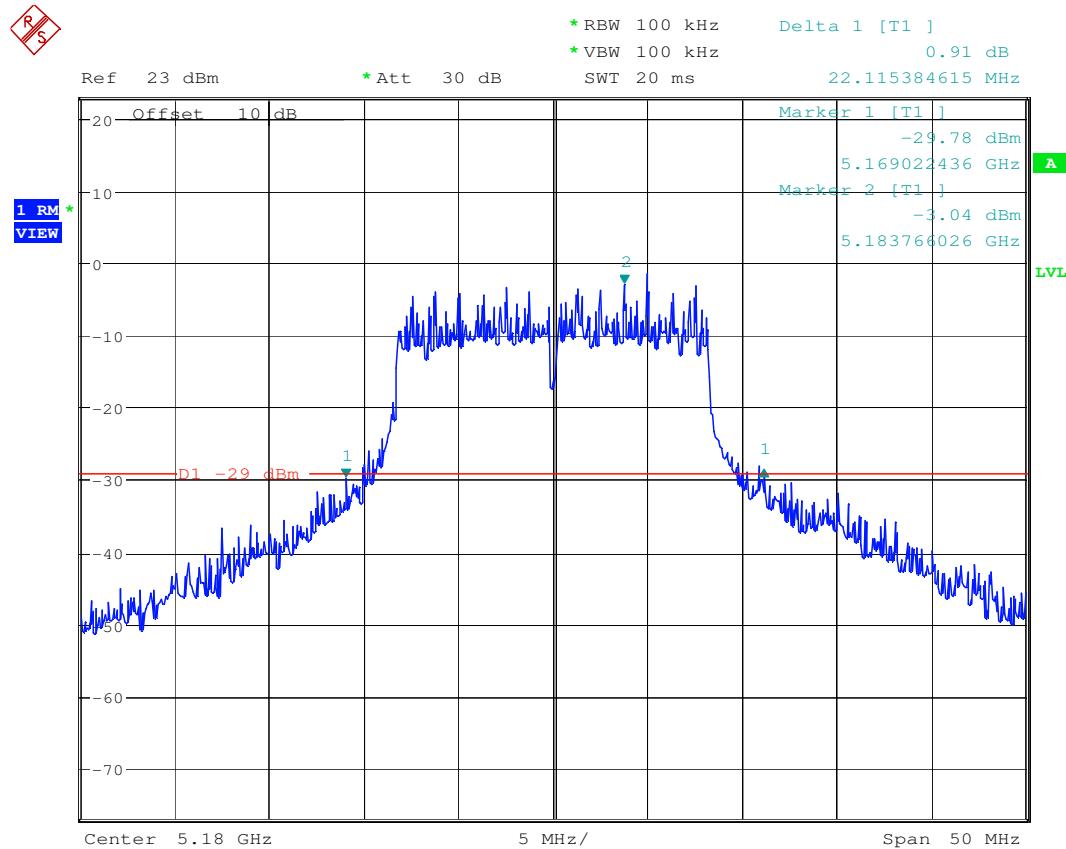

Date: 29.AUG.2006 11:45:27

The -26 dB-BW is 22.12 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 13 of 65

5180 MHz -20 dB emission BW

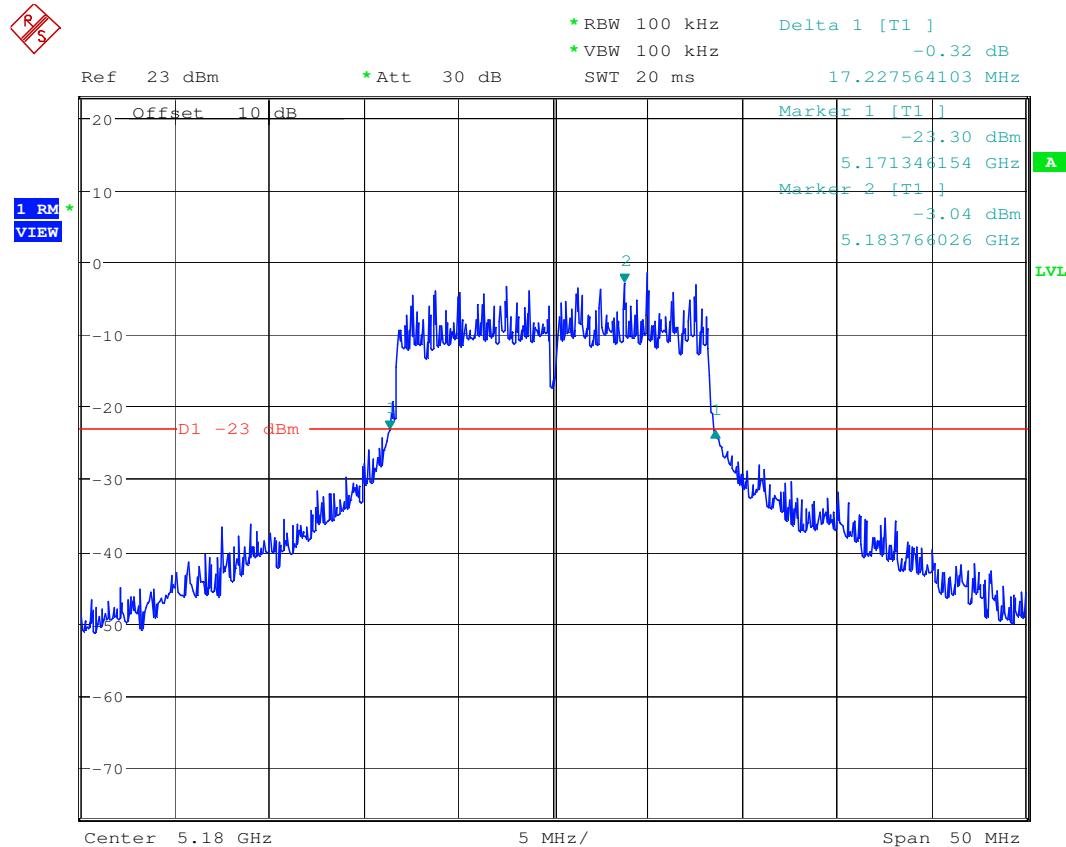

Date: 29.AUG.2006 11:44:44

The -20 dB-BW is 17.23 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 14 of 65

5240 MHz -26 dB emission BW

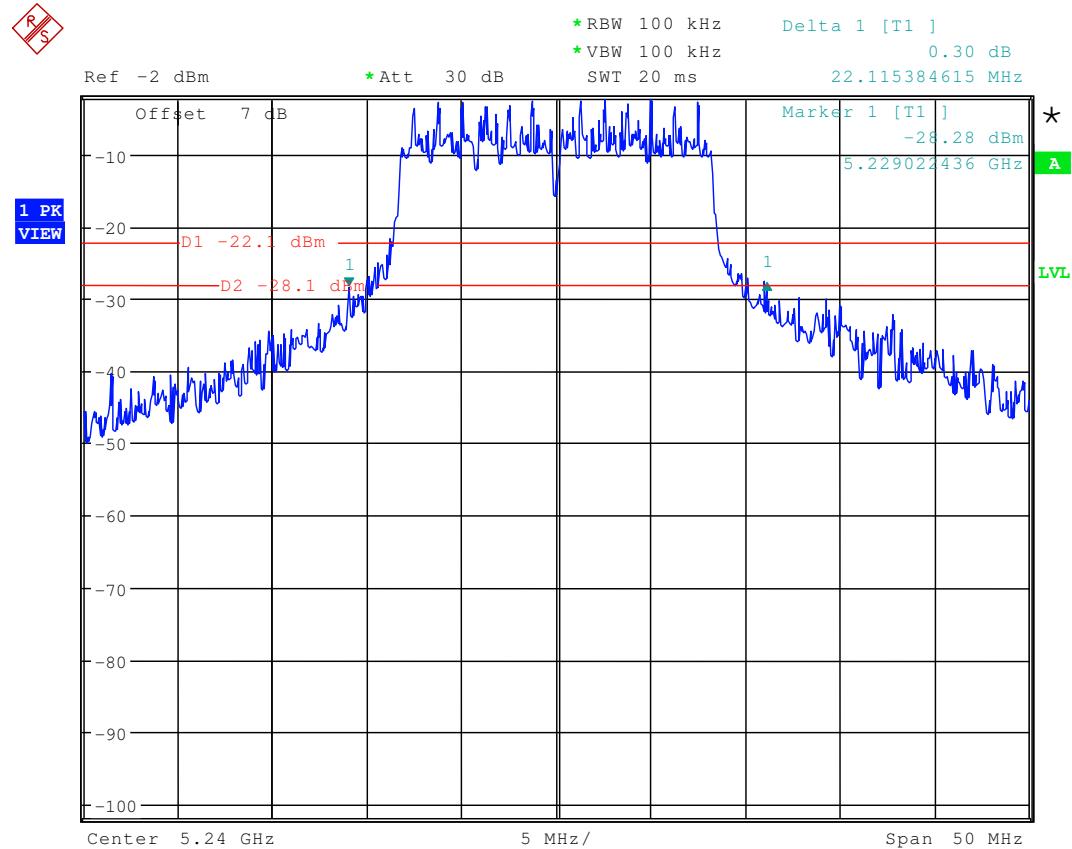

The -26 dB-BW is 22.12 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 15 of 65

5240 MHz -20 dB emission BW

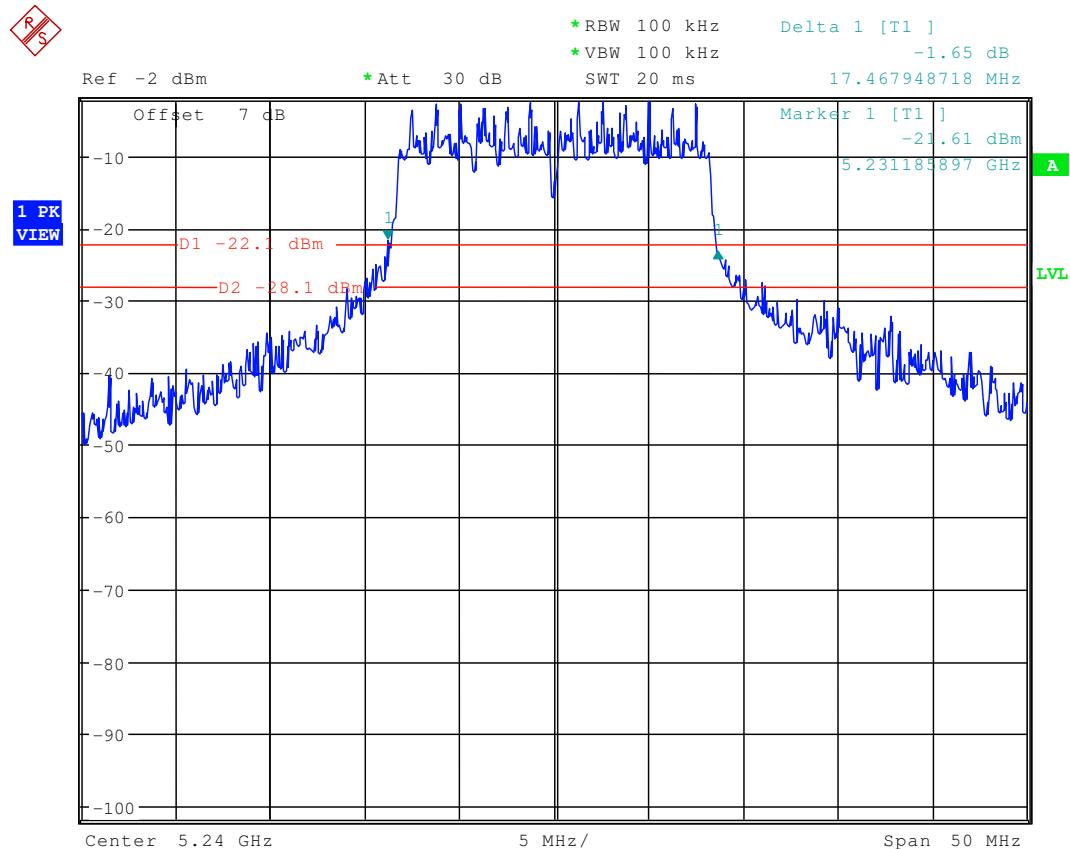


The -20 dB-BW is 17.47 MHz

3.7 Ratio of peak excursion

§15.407a(6)

here measured in the frequency domain

5180 MHz

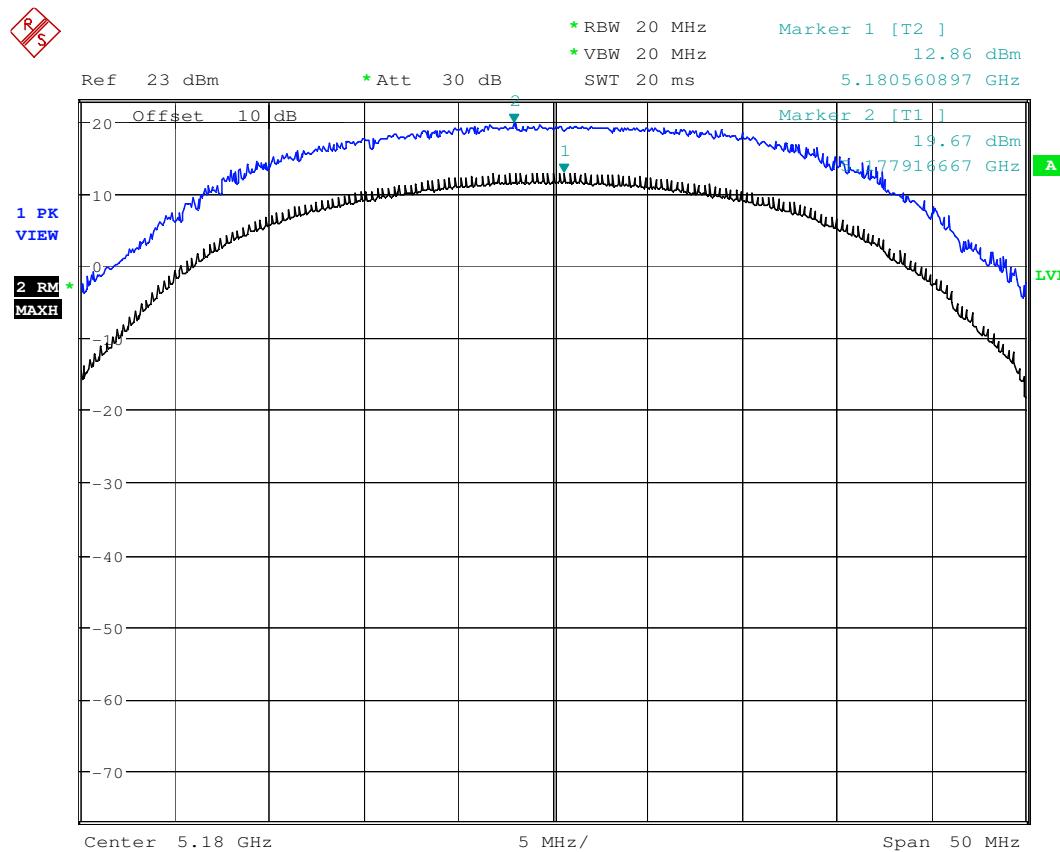

Date: 29.AUG.2006 11:50:52

In this plot you see the difference between peak emissions and RMS emissions.
The delta is 6.81 dB.

LIMIT: Difference between the two values < 13 dB across any 1 MHz bandwidth

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

CETECOM™


Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 17 of 65

here measured in frequency domain

5240 MHz

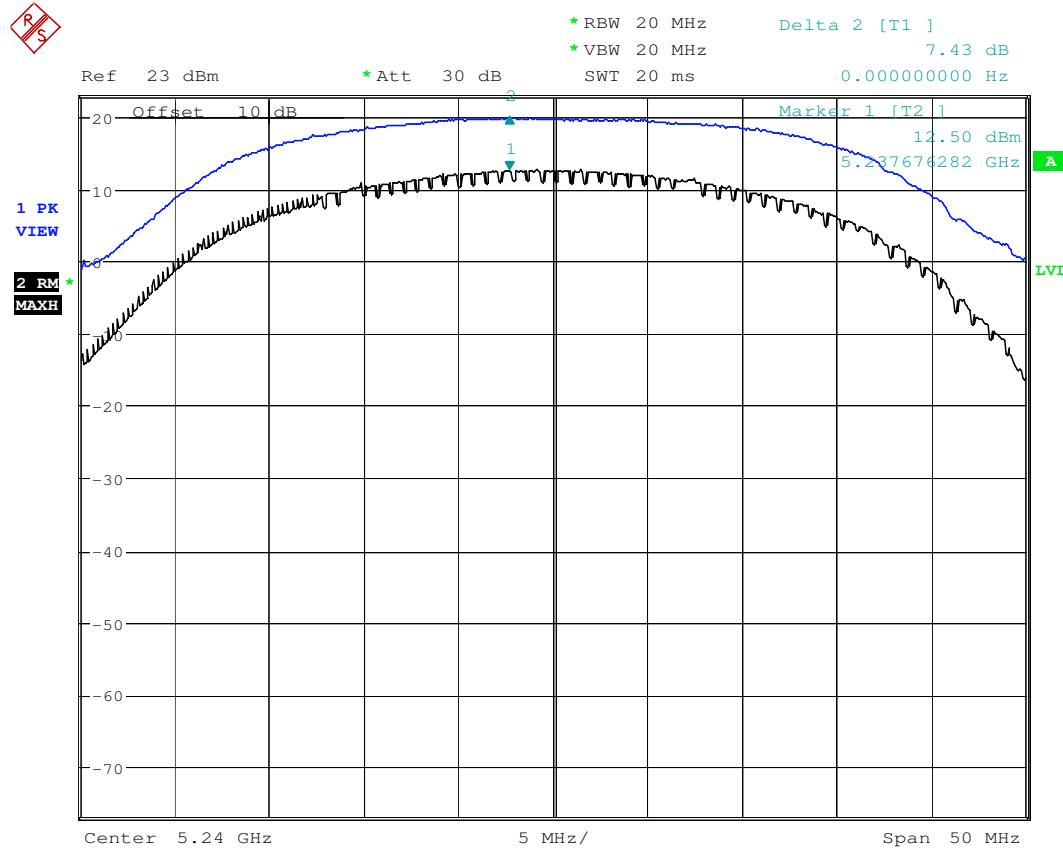

Date: 29.AUG.2006 11:30:40

In this plot you see the difference between peak emissions and RMS emissions.
The delta is 7.43 dB.


LIMIT: Difference between the two values < 13 dB across any 1 MHz bandwidth

3.8 Spectral Density Conducted

§15.407(a5)

Plot 1 : 5180 MHz

Result is calculated to 1 Hz with the power density function of the analyzer FSU50. To get the result related to 1 MHz according to FCC you have to add 60 dB.

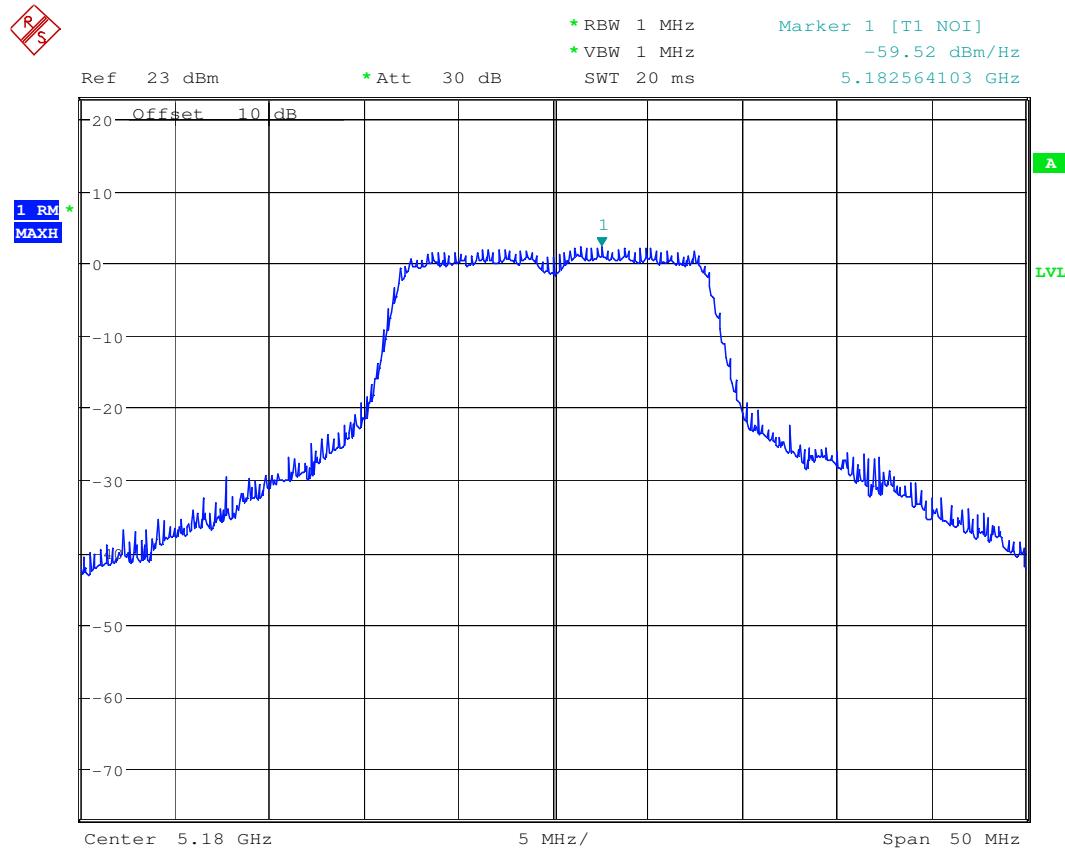

Date: 29.AUG.2006 11:42:22

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 19 of 65

Plot 2: 5240 MHz

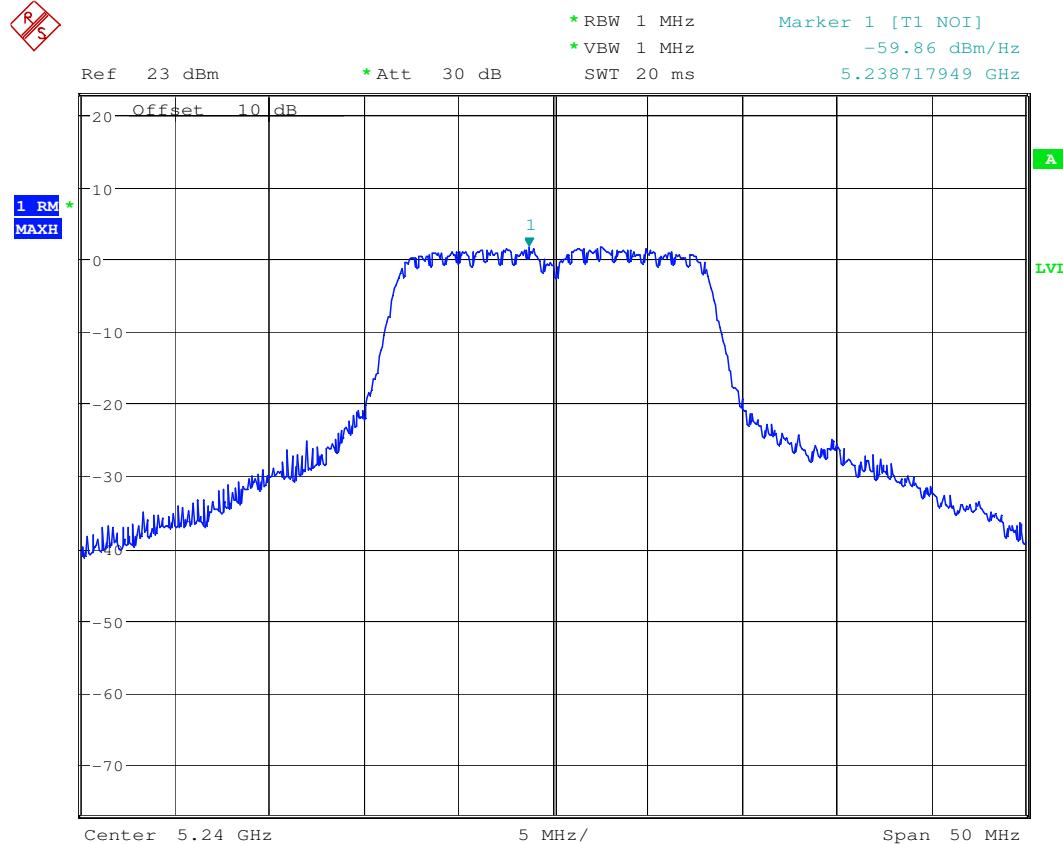


Date: 29.AUG.2006 11:35:18

Results: with correction factors +60 dB regarding the BW from 1 Hz to 1 MHz.

Test conditions		Spectral density Including +60 dB correction factor		
Frequency [MHz]		Result	Limit	Verdict
	5180 MHz	0.5 dBm	4 dBm	Pass
	5240 MHz	0.1 dBm	4 dBm	Pass
Measurement uncertainty		±1dB		

3.9 Undesirable emission limits conducted**15.407 (b)(1)****The measurement was performed up to 40 GHz.**

Plot 1: 5180 MHz

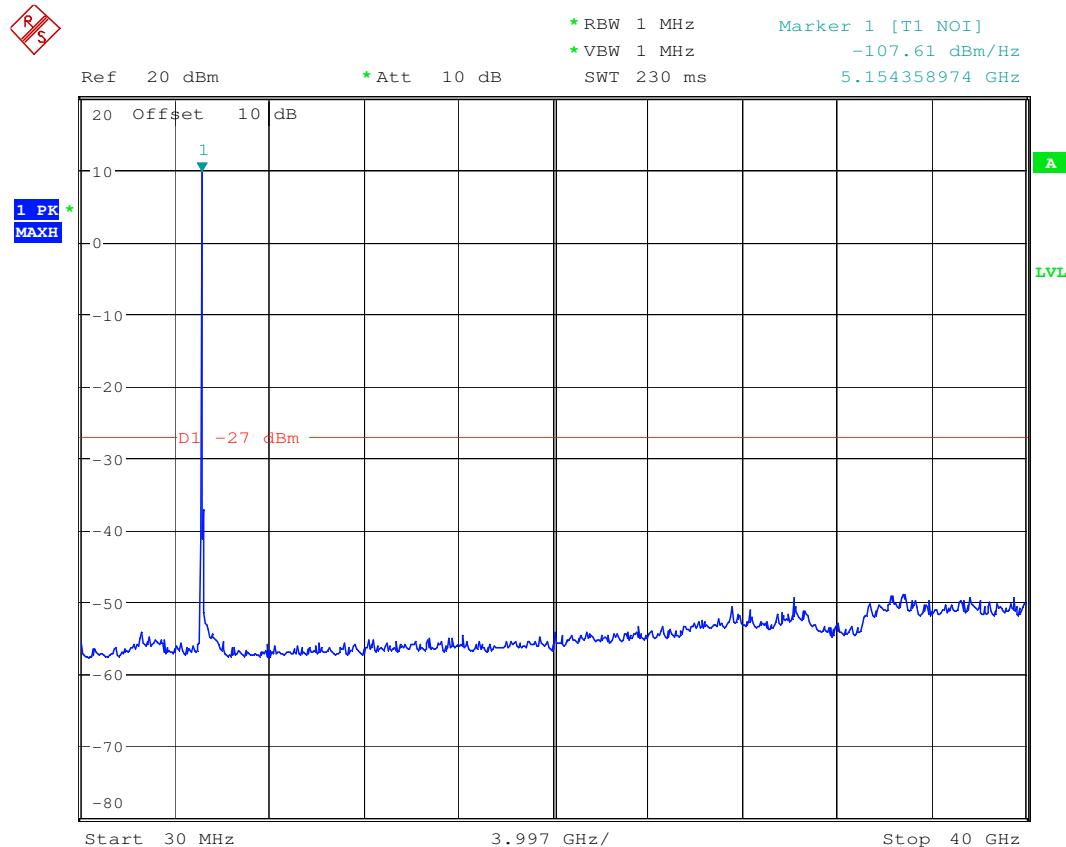

Date: 29.AUG.2006 12:52:22

RBW / VBW : 1 MHz

LIMIT: -27 dBm/MHz outside the band 5150 to 5350 MHz.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 21 of 65

Plot 2: 5240 MHz

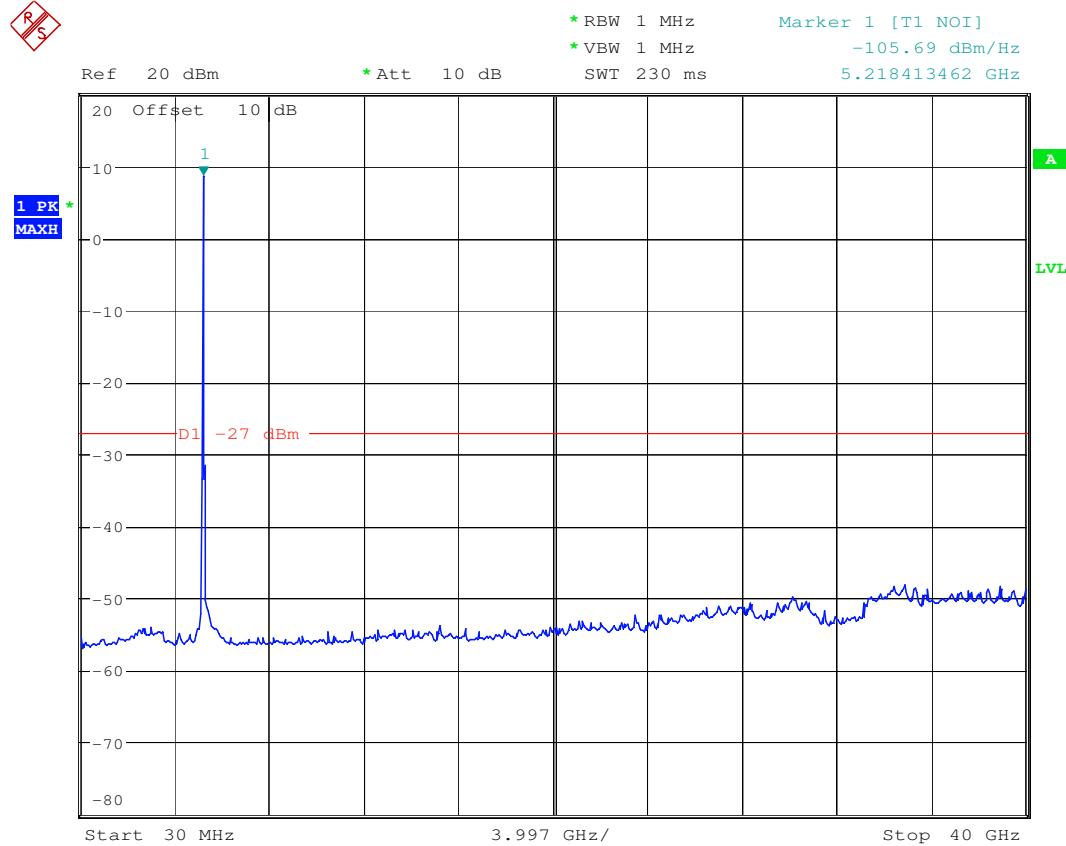

Date: 29.AUG.2006 13:30:46

RBW / VBW : 1 MHz

LIMIT: -27 dBm/MHz outside the band 5150 to 5350 MHz.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 22 of 65

Spurious emissions conducted

Result & Limits

Emission Limitations					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emmision power	actual attenuation below frequency of operation [dB]	results
5180			17 dBm	-	Operating frequency
no	peaks	found		< 20 dB below	limit
5240			17 dBm	-	Operating frequency
no	peaks	found		< 20 dB below	limit
Measurement uncertainty		± 3dB			

RBW : 1 MHz VBW: 1 MHz

Under normal test conditions only	In any 1 MHz bandwidth outside the frequency band at least -27 dBm/MHz. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
-----------------------------------	--

3.10 MPE calculation

These equations are generally accurate in the far field of an antenna but will over predict power density in the near field, where they could be used for making a “worst case” prediction.

$$S = PG/4\pi R^2$$

where S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units e.g. mW)

G = power gain of the antenna in the direction of interest relative to the isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units e.g. cm)

Or

$$S = EIRP/4\pi R^2$$

where $EIRP$ = equivalent isotropically radiated power

Calculation: (Antenna 1) (highest gain)

(Calculated for max. EIRP)

EIRP: 12.9 dBm + 1.7 dBi = 14.6 dBm = 28.8 mW
calculated at distance of 20 cm:

$$\text{power density} = 28.8 /4\pi20^2 = 0.006 \text{ mW/cm}^2$$

Limit:

1mW/cm² is the reference level for general public exposure according to the OET Bulletin 65,
Edition 97-01 Table 1.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 24 of 65

3.11 Max. peak output power (radiated) §15.247 (b) (1)

Results:

Test conditions		Max. peak output power EIRP [dBm]		
Antenna 1 (gain 1.7dBi)				
Frequency [MHz]		5180 MHz	5240 MHz	
T _{nom}	V _{nom}	14.6	14.2	
Measurement uncertainty		±3dB		

Measured with the channel power function of the analyzer

Test conditions		Max. peak output power EIRP [dBm]		
Antenna 2 (gain 1.6 dBi)				
Frequency [MHz]		5180 MHz	5240 MHz	
T _{nom}	V _{nom}	14.5	14.1	
Measurement uncertainty		±3dB		

Limits:

Under normal test conditions	Max. 0.05 Watt / 13 dBm
	As long as the antenna gain is < 6 dBi

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30


Page 25 of 65

3.12 Spurious Emissions - radiated (Transmitter)

§15.209

5180 MHz: Antenna 1:

Plot 1: 0.03 - 1 GHz (lowest channel)

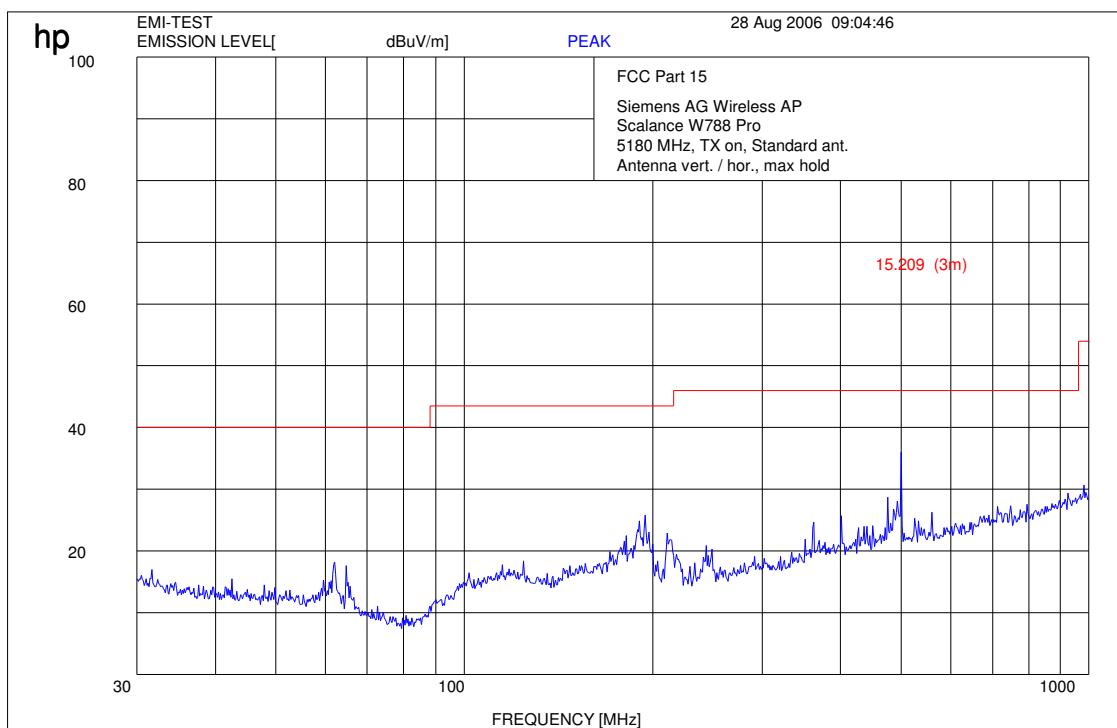

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1 GHz : RBW/VBW: 1 MHz

Limits: § 15.209

Frequency [MHz]	Field strength [μ V/m]	Measurement distance (m)
30 - 88	100 (40 dB μ V/m)	3
88 - 216	150 (43.5 dB μ V/m)	3
216 - 960	200 (46 dB μ V/m)	3
above 960	500 (54 dB μ V/m)	3

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 26 of 65

Plot 2: 1 GHz – 4 GHz (lowest channel)

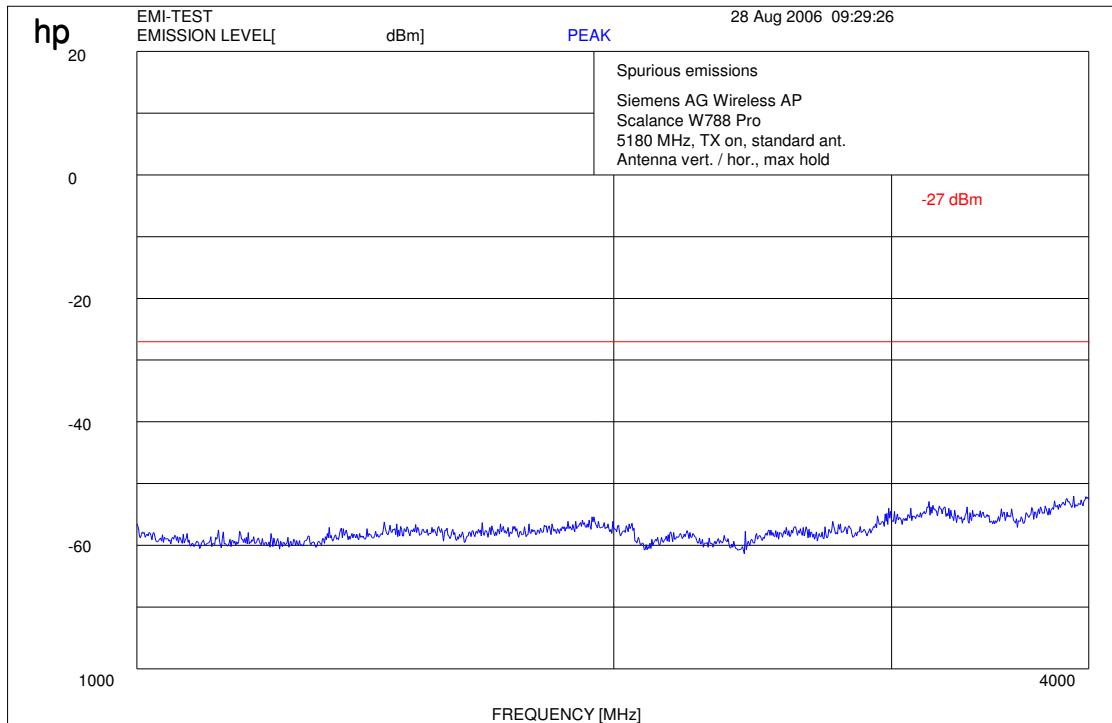

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

LIMIT: -27 dBm/MHz above 1 GHz and outside the band 5150 to 5350 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 27 of 65

Plot 3: 4 GHz - 12 GHz (lowest channel)

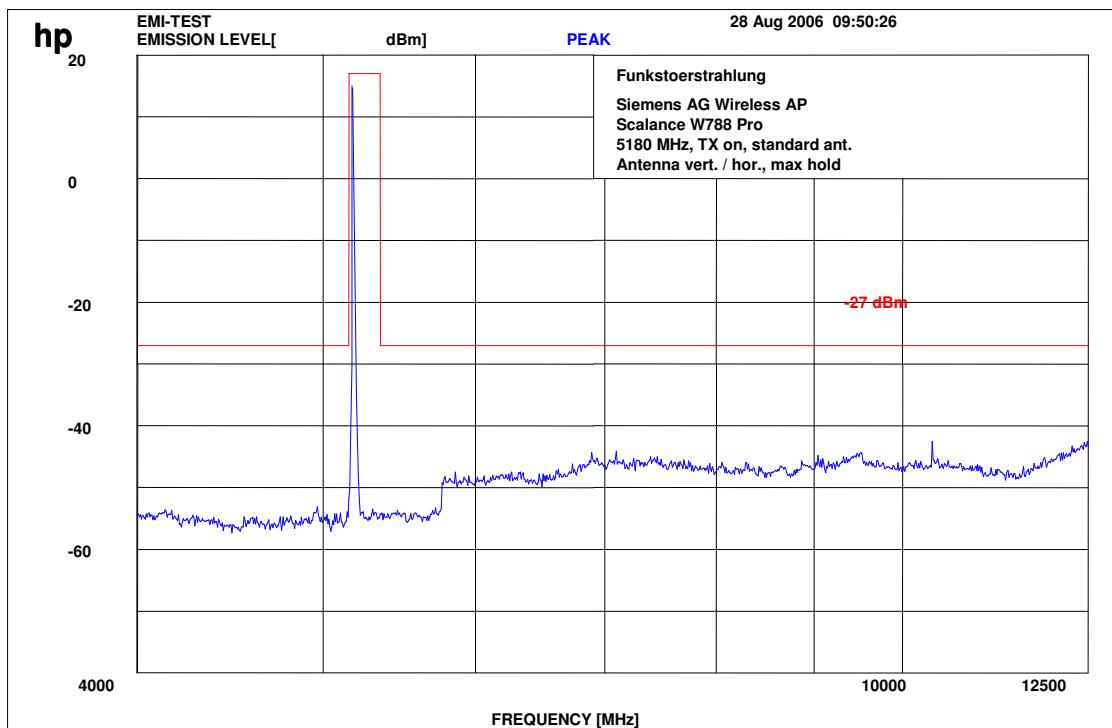

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1 GHz : RBW/VBW: 1 MHz

LIMIT: -27 dBm/MHz above 1 GHz and outside the band 5150 to 5350 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 28 of 65

Plot 4: 12 GHz - 26 GHz vertical (valid for all channels)

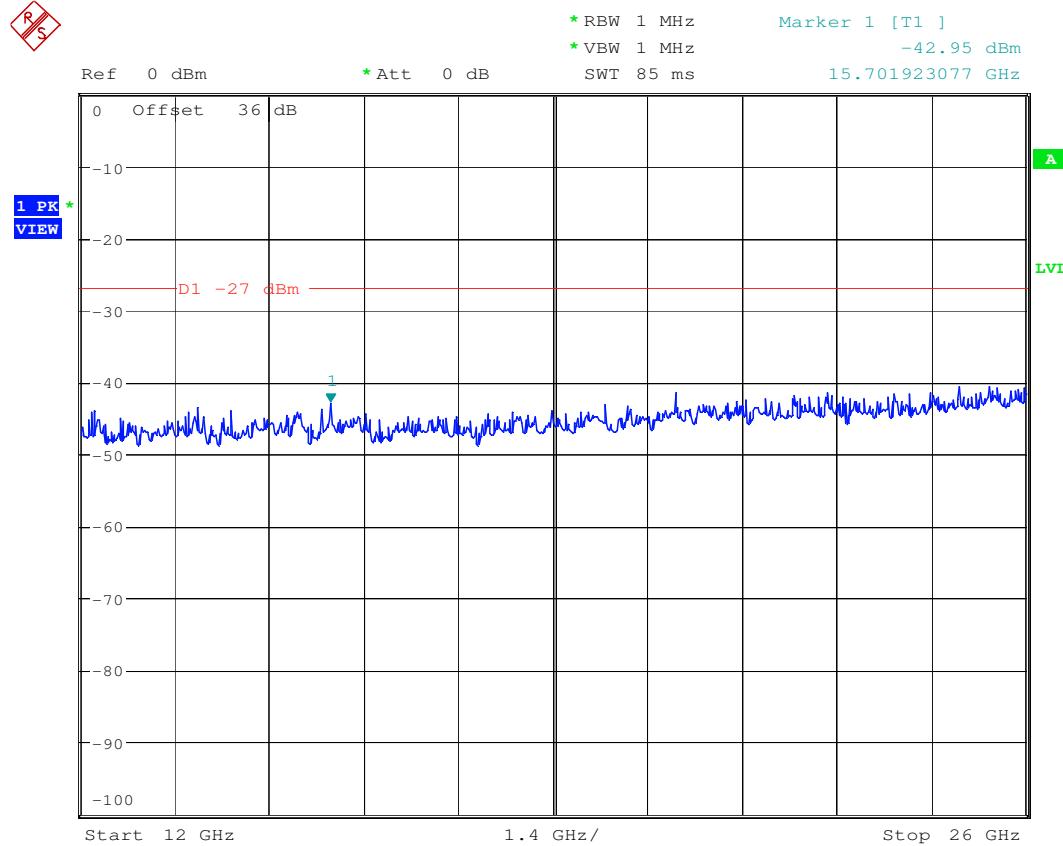

Date: 29.AUG.2006 13:42:55

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1 GHz : RBW/VBW: 1 MHz

LIMIT: -27 dBm/MHz above 1 GHz and outside the band 5150 to 5350 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 29 of 65

Plot 5: 26 GHz to 40 GHz vertical (valid for all channels)

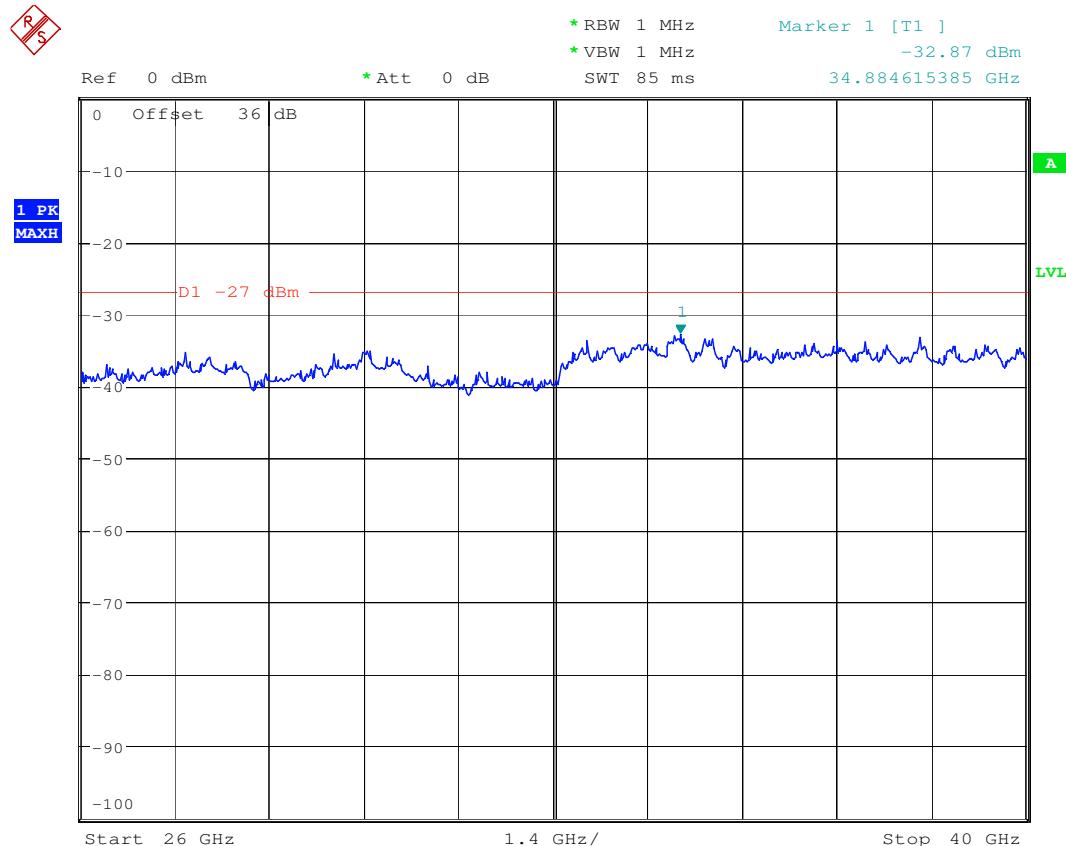

Date: 29.AUG.2006 13:35:57

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1 GHz : RBW/VBW: 1 MHz

LIMIT: -27 dBm/MHz above 1 GHz and outside the band 5150 to 5350 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

CETECOM™


Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 30 of 65

5240 MHz: Antenna 1:

Plot 6: 30 MHz to 1 GHz (highest channel)

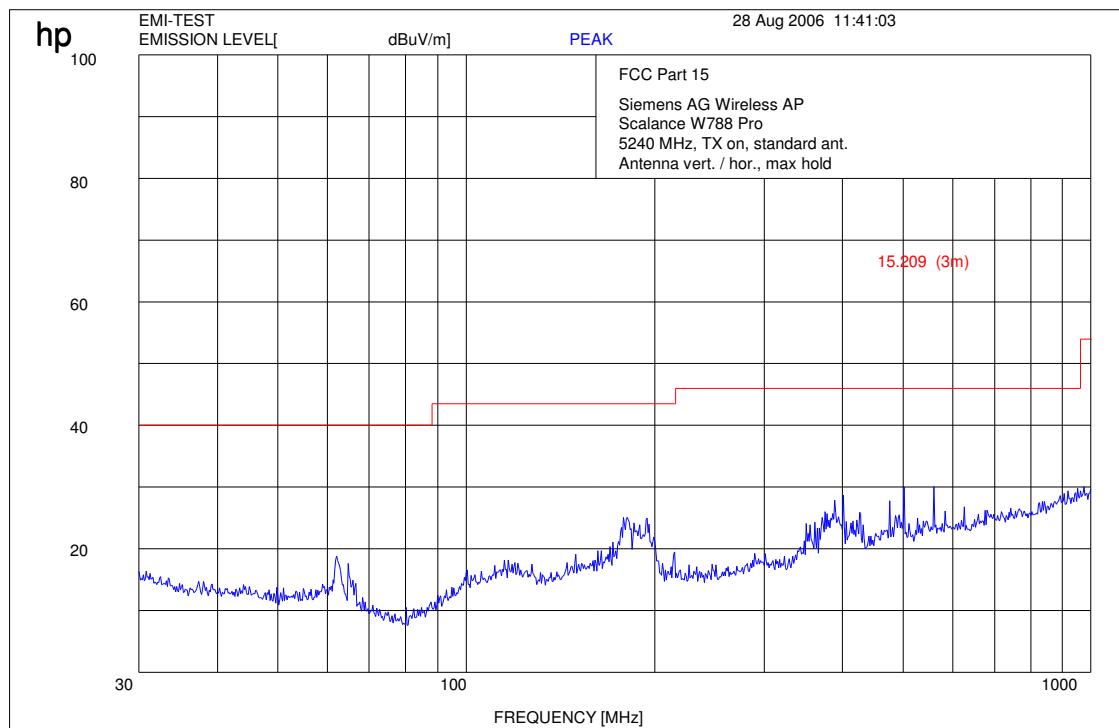

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1 GHz : RBW/VBW: 1 MHz

Limits: § 15.209

Frequency [MHz]	Field strength [μ V/m]	Measurement distance (m)
30 - 88	100 (40 dB μ V/m)	3
88 - 216	150 (43.5 dB μ V/m)	3
216 - 960	200 (46 dB μ V/m)	3
above 960	500 (54 dB μ V/m)	3

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 31 of 65

Plot 7: 1 GHz to 4 GHz (highest channel)

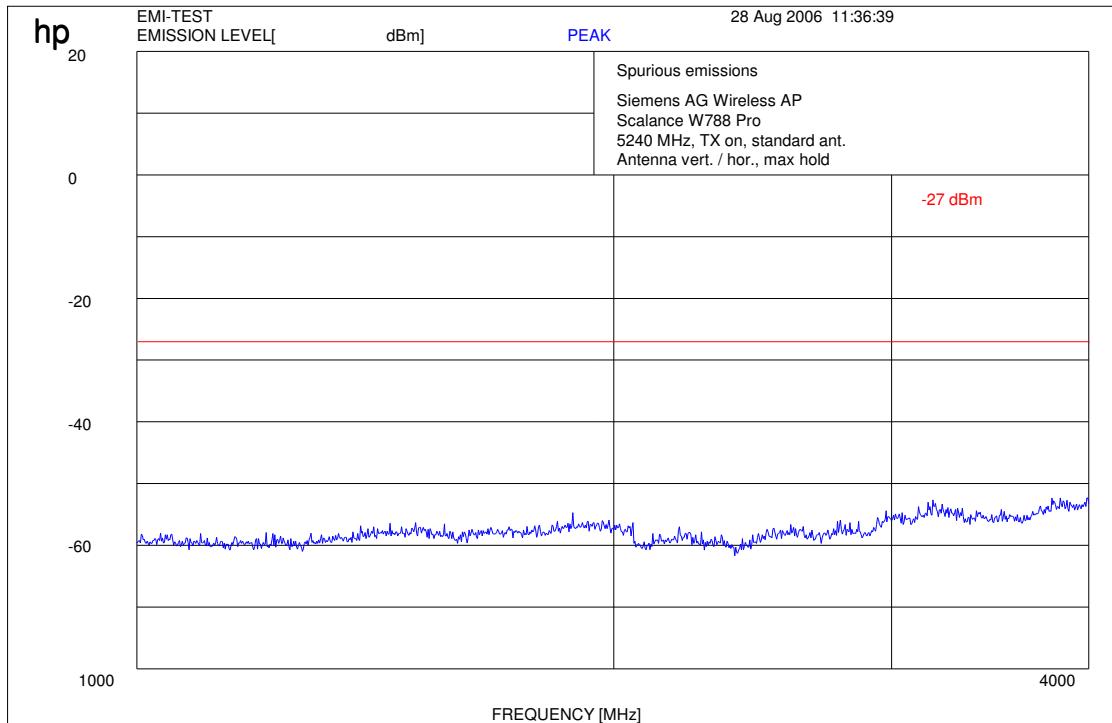

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

LIMIT: -27 dBm/MHz above 1 GHz and outside the band 5150 to 5350 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 32 of 65

Plot 8: 4 GHz to 12 GHz (highest channel)

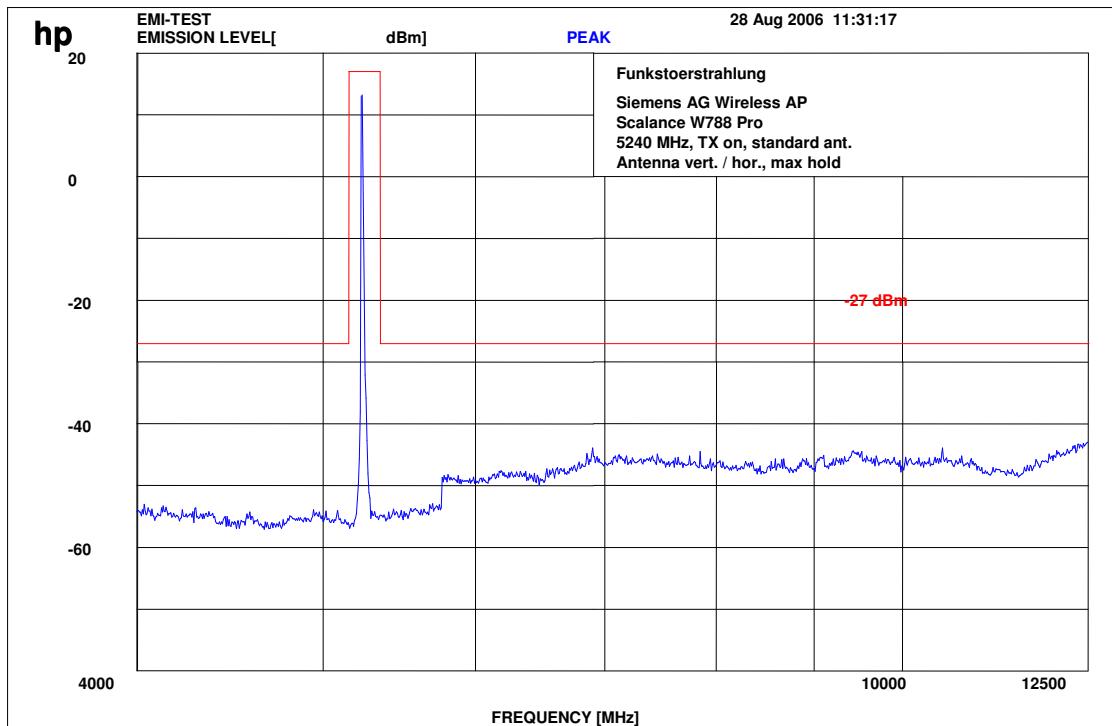

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

LIMIT: -27 dBm/MHz above 1 GHz and outside the band 5150 to 5350 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

CETECOM™


Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 33 of 65

5180 MHz: Antenna 2:

Plot 9: 30 MHz to 1 GHz (lowest channel)

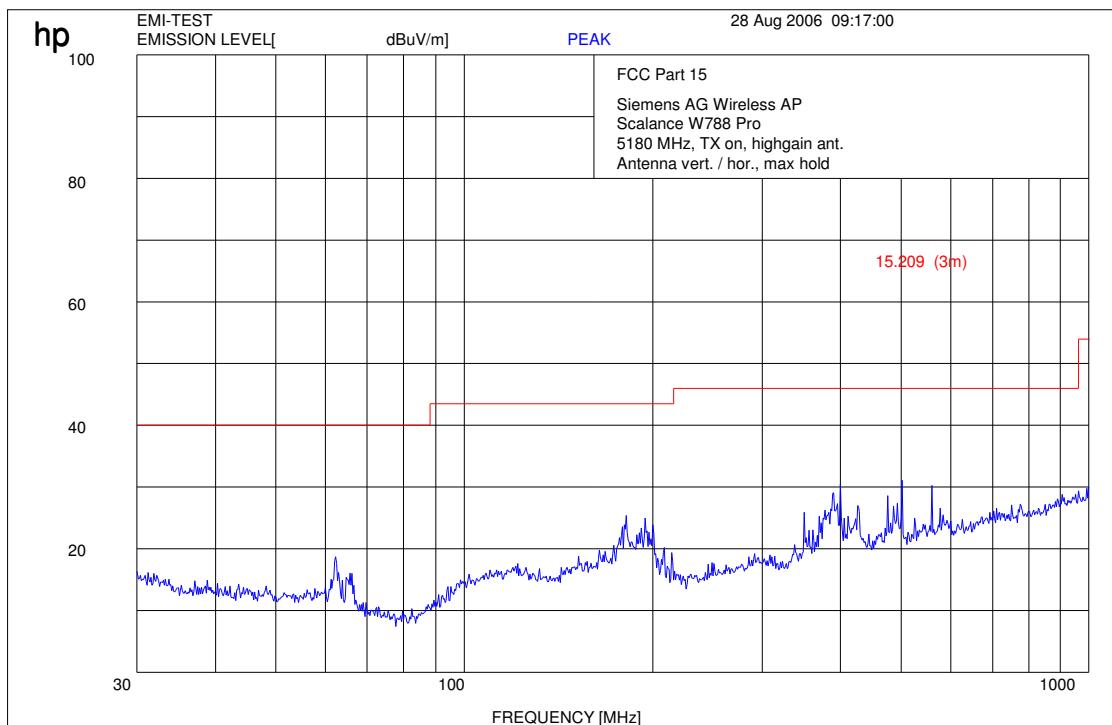

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Limits: § 15.209

Frequency [MHz]	Field strength [μ V/m]	Measurement distance (m)
30 - 88	100 (40 dB μ V/m)	3
88 - 216	150 (43.5 dB μ V/m)	3
216 - 960	200 (46 dB μ V/m)	3
above 960	500 (54 dB μ V/m)	3

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 34 of 65

Plot 10: 1 GHz to 4 GHz (lowest channel)

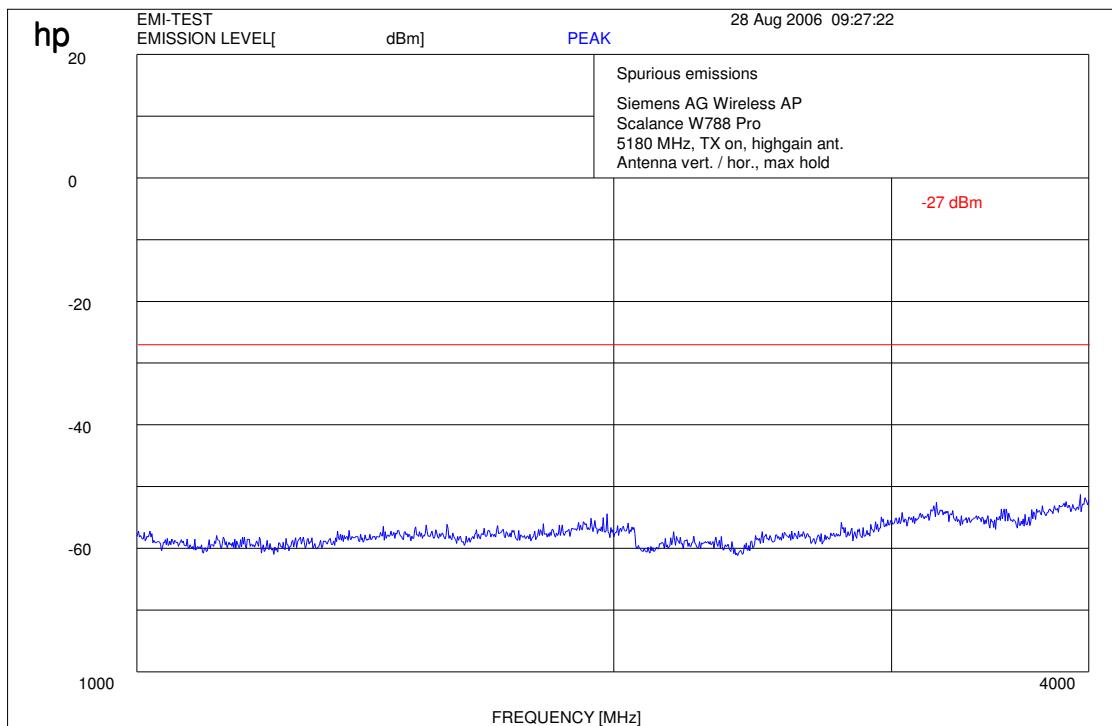

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

LIMIT: -27 dBm/MHz above 1 GHz and outside the band 5150 to 5350 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 35 of 65

Plot 11: 4 GHz to 12 GHz (lowest channel)

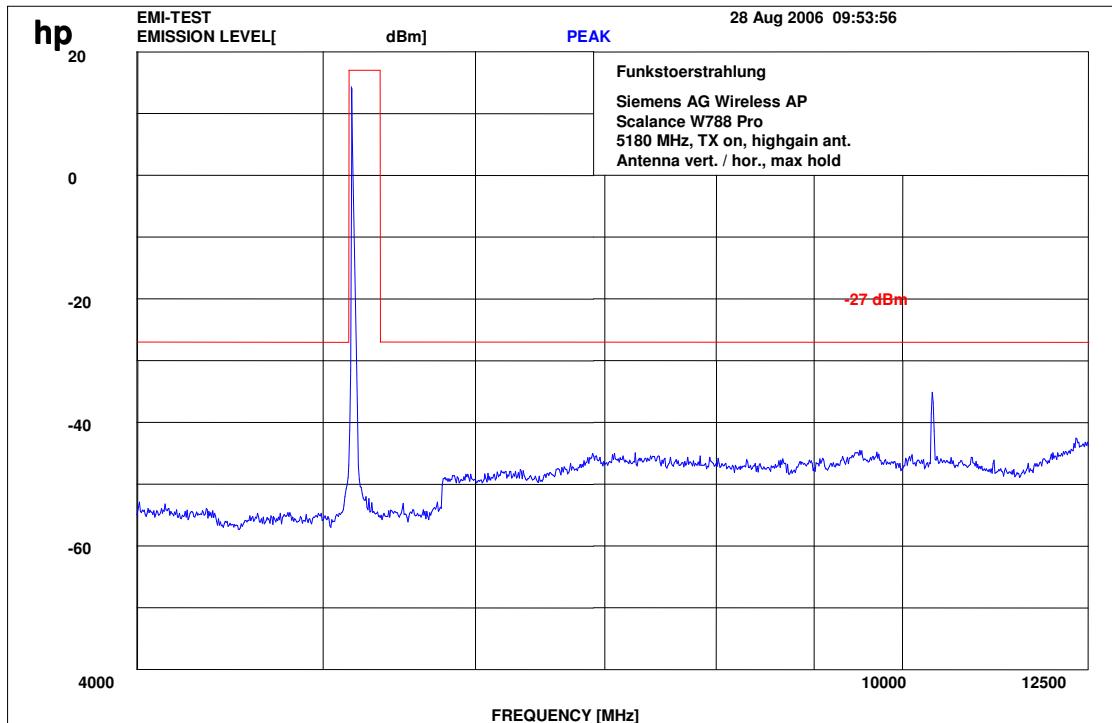

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1 GHz : RBW/VBW: 1 MHz

The unwanted emission at 10360 MHz is -33.4 dBm/MHz

LIMIT: -27 dBm/MHz above 1 GHz and outside the band 5150 to 5350 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 36 of 65

Plot 12: 30 MHz to 1GHz (highest channel)

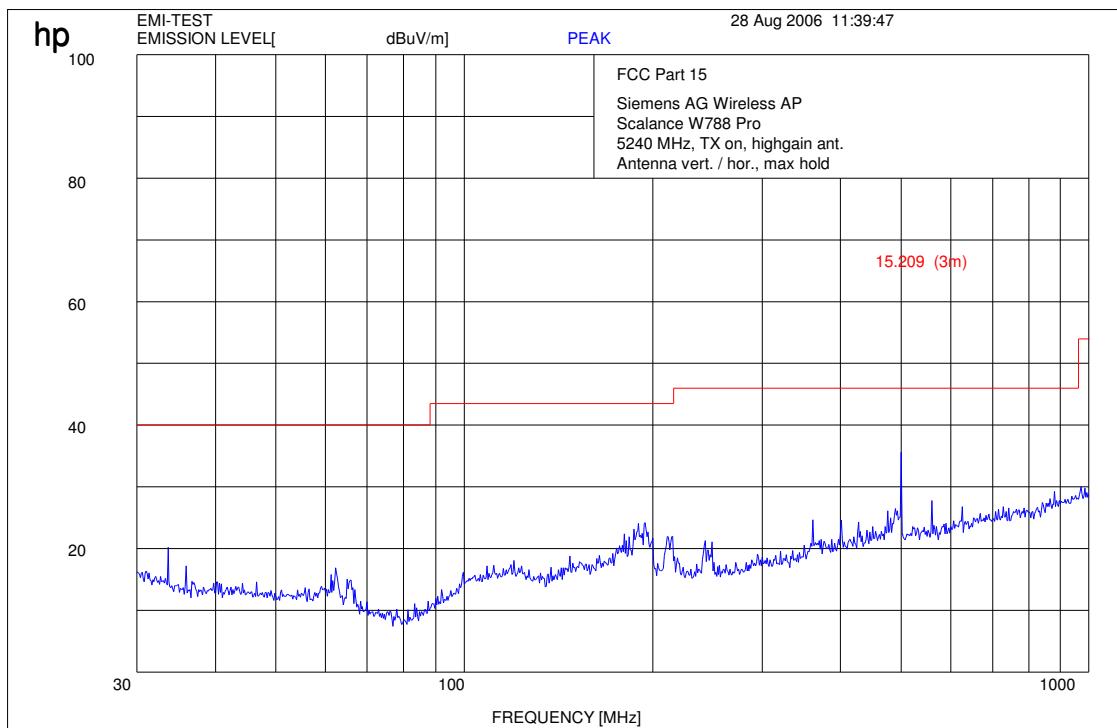

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Limits: § 15.209

Frequency [MHz]	Field strength [μ V/m]	Measurement distance (m)
30 - 88	100 (40 dB μ V/m)	3
88 - 216	150 (43.5 dB μ V/m)	3
216 - 960	200 (46 dB μ V/m)	3
above 960	500 (54 dB μ V/m)	3

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 37 of 65

Plot 13: 1- 4 GHz (highest channel)

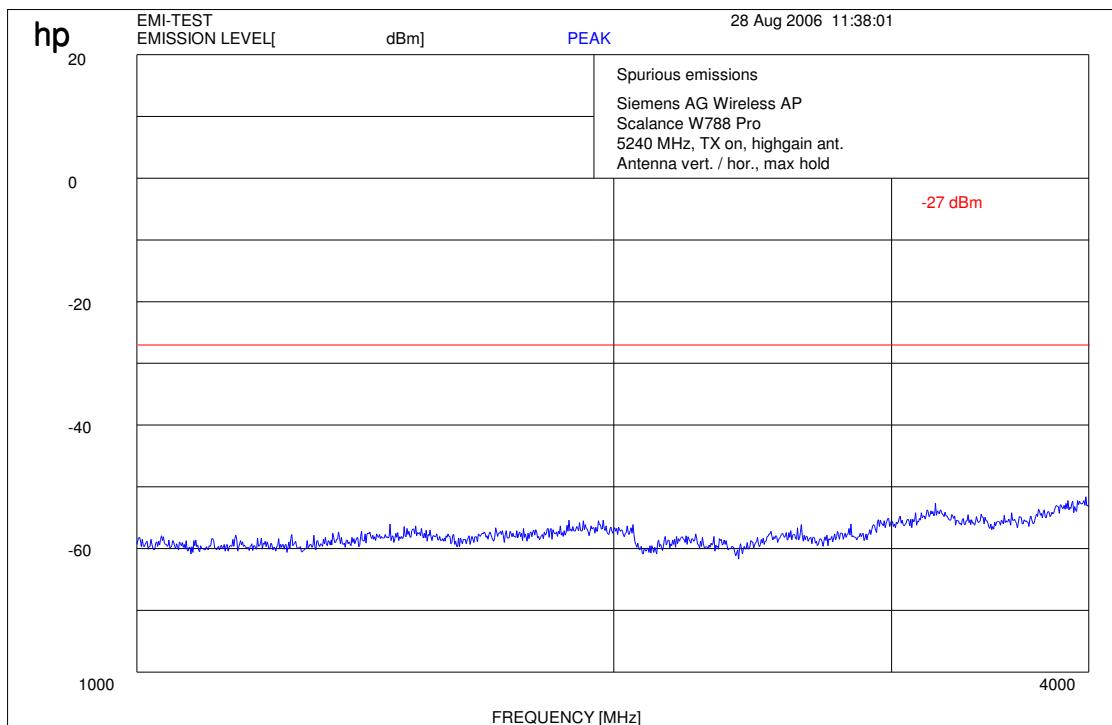

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

LIMIT: -27 dBm/MHz above 1 GHz and outside the band 5150 to 5350 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 38 of 65

Plot 14: 4- 12 GHz (highest channel)

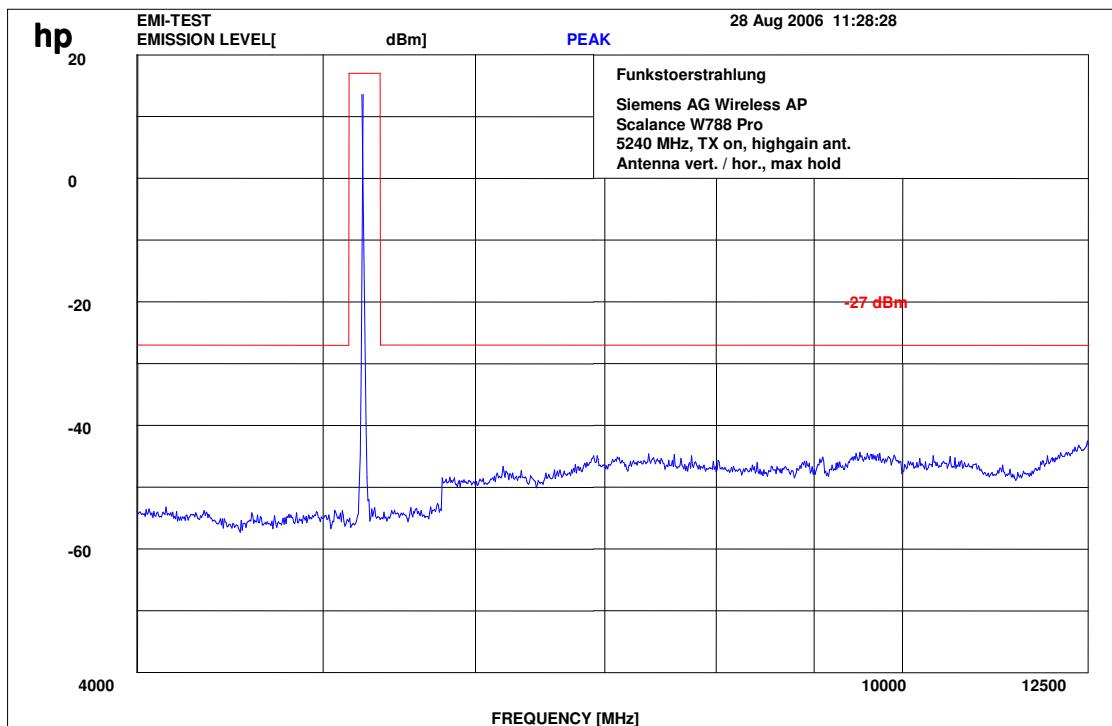


f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

LIMIT: -27 dBm/MHz above 1 GHz and outside the band 5150 to 5350 MHz

3.13 Spurious emissions radiated (RX)**15.209****Valid for all antennas**

Plot 1: 30 to 4000 MHz

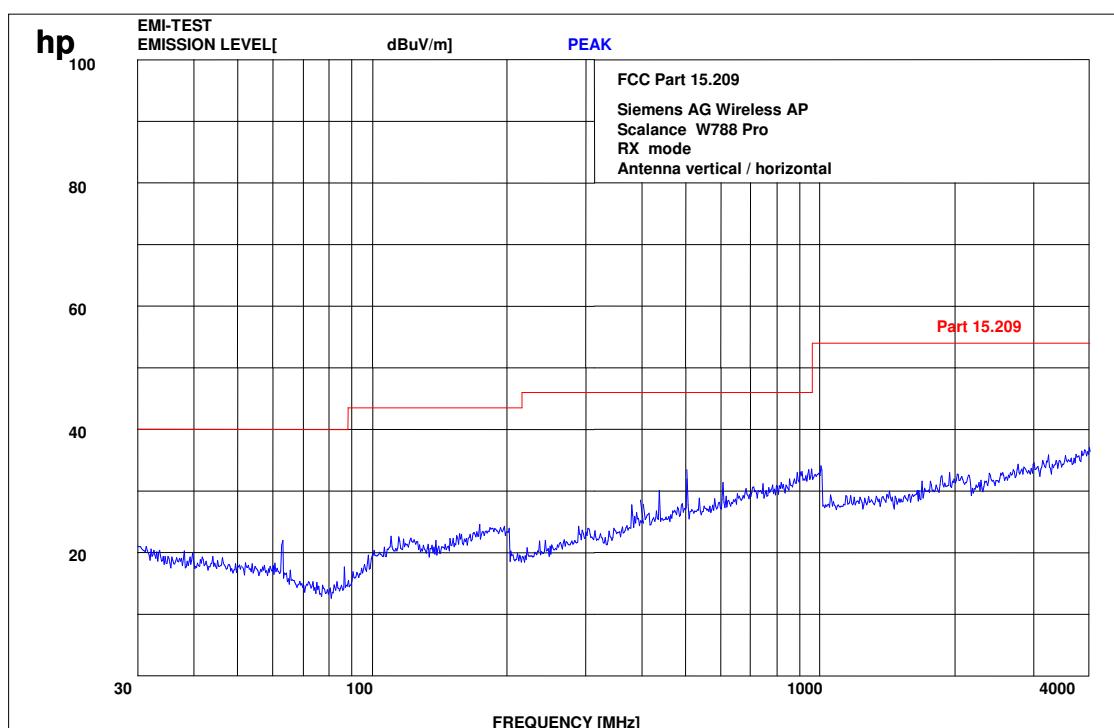

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1 GHz : RBW/VBW: 1 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 40 of 65

Plot 2: 4 GHz to 12 GHz

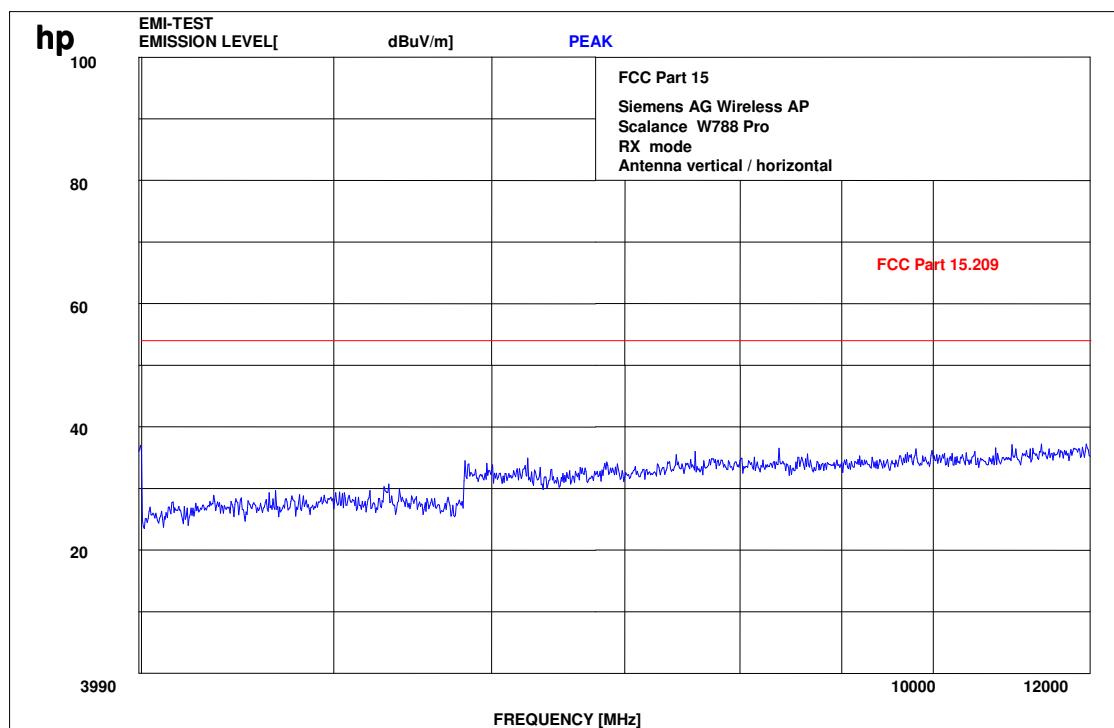

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 41 of 65

Plot 3: - 25 GHz

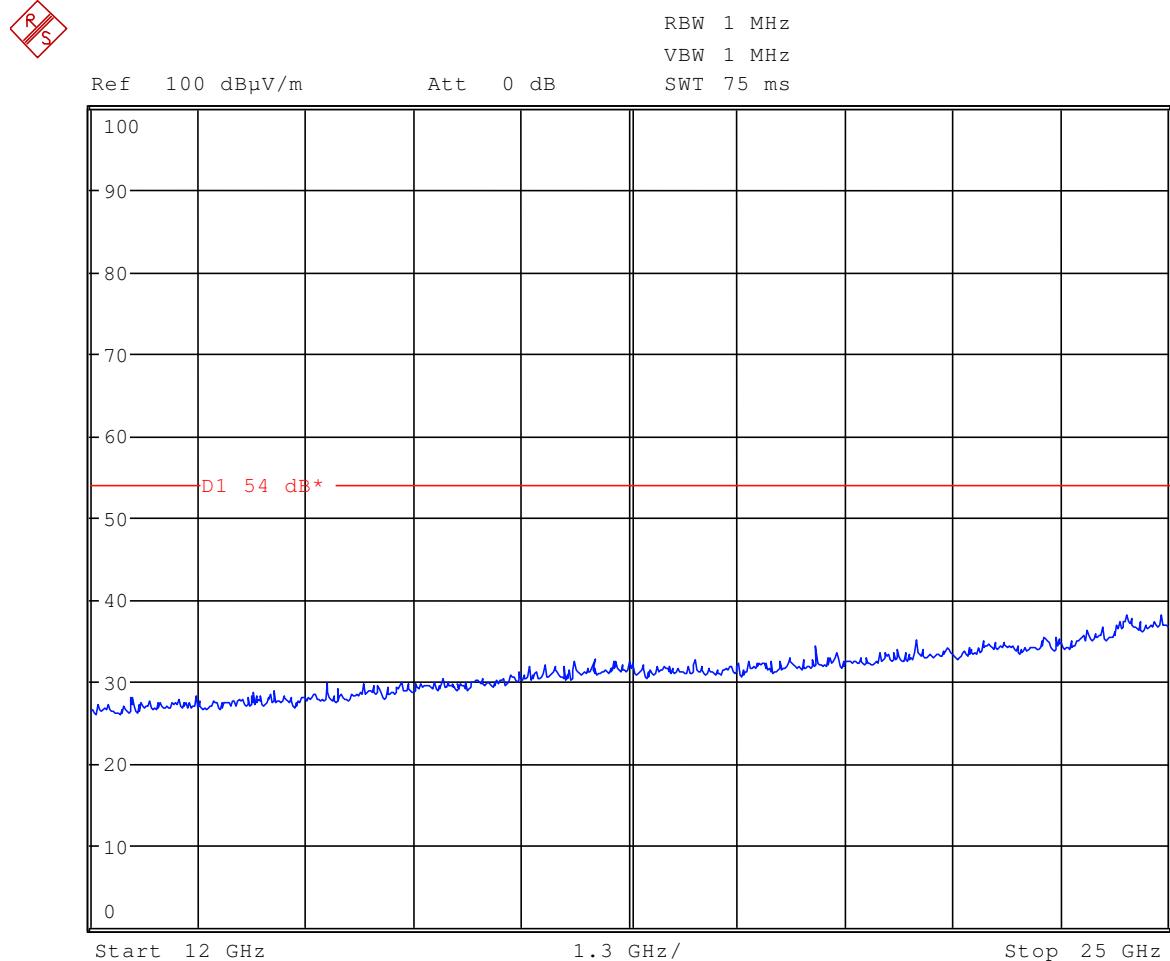

The measurements were performed up to 60 GHz. There were no peaks found.

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1 GHz : RBW/VBW: 1 MHz

Limits: § 15.209

Frequency [MHz]	Field strength [μ V/m]	Measurement distance (m)
30 - 88	100 (40 dB μ V/m)	3
88 - 216	150 (43.5 dB μ V/m)	3
216 - 960	200 (46 dB μ V/m)	3
above 960	500 (54 dB μ V/m)	3

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 42 of 65

Results:

Spurious Emissisons level [μ V/m]								
CH 1 / 2								
f[MHz]	Detector	Level [μ V/m]	f[MHz]	Detector	Level [μ V/m]	f[MHz]	Detector	Level [μ V/m]
no	peaks	found	< 15 dB	below	limit			
Measurement uncertainty		± 3 dB						

$f < 1$ GHz : RBW/VBW: 100 kHz

$f \geq 1$ GHz : RBW/VBW: 1 MHz

see above plots

Measurement distance see table

Limits : § 15.109 / 209

Frequency (MHz)	Field strength (μ V/m)	Measurement distance (m)
30 - 88	100 (40 dB μ V/m)	3
88 - 216	150 (43.5 dB μ V/m)	3
216 - 960	200 (46 dB μ V/m)	3
above 960	500 (54 dB μ V/m)	3

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 43 of 65


3.14 Spurious Emissions - radiated <30 MHz (valid for all antenna types) §15.109

(measured with a 110V AC power supply from our house as the product is delivered without any power supply.)

Measured at 3 m distance.

Values recalculated with 40 dB/decade according to FCC rules.

Plot 1:

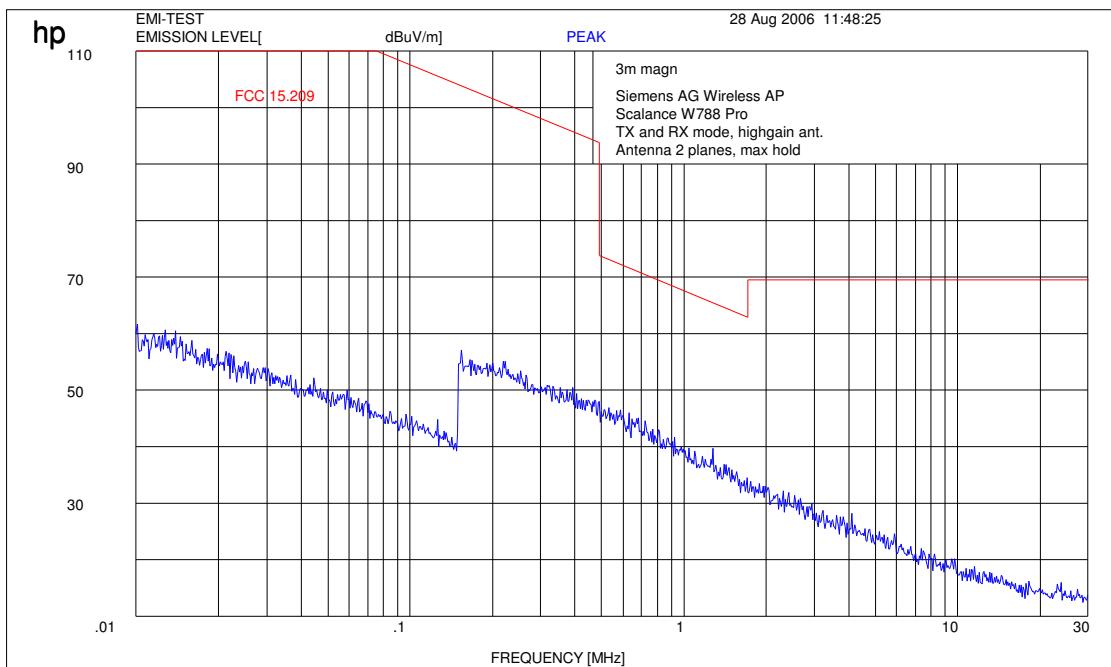

Limits:


Frequency (MHz)	Field strength (μ V/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dB μ V/m	30
30 - 88	100 / 40 dB μ V/m	3
88 - 216	150 / 43.5 dB μ V/m	3
216 - 960	200 / 46 dB μ V/m	3
above 960	54 dB μ V/m	3

3.15 Conducted Emissions <30 MHz

§15.107/207

(measured with a 110V AC power supply from our house as the product is delivered without any power supply.)

Plot 1: CISPR 22

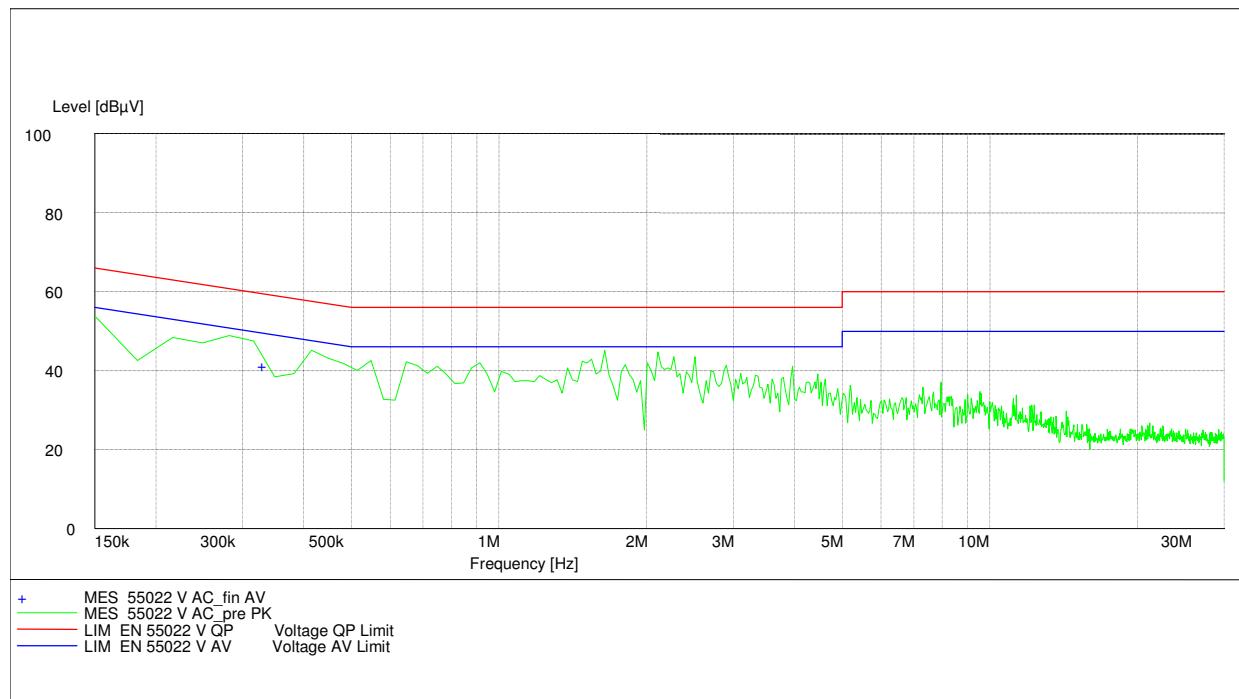

We measured in TX and RX mode, L1 and N floating and grounded, max value was hold.

Limits :

Under normal test conditions only

See plots

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 47 of 65

Powersensor	HP	8484A	2237A10494	300001666
Powersupply	HP	6038A	3122A11097	300001204
Netznachbildung	R&S	ESH3-Z5	828576/020	300001210
Amplituden Controller	R&S	SMDU-Z2	871829/051	300002309
Trenntrafo	Erfi	913501		300001205
Trenntrafo	Grundig	RT5A	9242	300001627
Relais Matrix	HP	3488A	2719A15013	300001156
Multimeter	Siemens	Multizet		300001102
Peak Power Calibrator	HP	8900B		300001084
Schallgeber	Schomandl	SG 1	10159	300001209
Schallgeber	Schomandl	SG 2	10176	300002473
Filter	FSY Microwave			300001206
Attenuatorer	Pro Nova			300002476
Klimaschrank	Heraeus Voetsch	VUK04/500		300001012
Spectrum Analyzer 3	HP	8566A	1925A00257	300001098
Spectrum Analyzer Display 3	HP	85662	1925A00860	300002306
Oszilloscope	Tektronix	2432	110261	300001165
Radiocom. Analyzer	R&S	CMTA 54	894043/010	300001175
Powersupply	HP	6038A	2848A07027	300001174
Signal Generator 0.01-1280 MHz	HP	8662A	2224A01012	300001110
Signal Generator (Funktions)	R&S	AFGU	862490/032	300001201
Trenntrafo	Erfi	MPL	91350	300001155
Relais Matrix	R&S	PSU	893285/020	300001173
Power Meter	HP	436A	2101A12378	300001136
Powersensor	HP	8484A	2237A10156	300001140
Powersensor	HP	8482A	2237A06016	300001139
Relais Matrix	R&S	PSU	282628/004	300001214
Powersupply	Zentro		2007	300001109
Oszilloscope	Tektronix	7633		300001111
Klimaschrank	Heraeus Voetsch	VUK04/500	32926	300001500
Quasi-Peak Adapter	HP	85650A	2811A01204	300002308
Radiocom. Analyzer	R&S	CMTA 84	894199/012	300001176
Oszilloscope	HP	54510A	3022A02062	300001202
Funkmeßplatz	Schomandl	FD1000	34982	300001115
Signal Generator	R&S	SMPC	882416/019	300001162
Frequency counter	HP	5340A	2116A08138	300001104
Power Meter	HP	436A	2031U01461	300001105
Powersensor	HP	8482A		300001106
Powersensor	HP	8484A		300001107
Powersensor	HP	8485A		300001108
Powersupply	HP	6038A	2752A04866	300001161
Reflectionsmeter	R&S	NAP	879191	300001132
Signal Generator NF	R&S	SPN	880139/068	300001142
Trenntrafo	Erfi	MPL	91350	300001151
Attenuator	JFW	30 db	1350h/104	300001703
Attenuator	JFW	10 db	1350h/103	300001704
Attenuator	JFW	20 db	1350h/106	300001705
Attenuator	JFW	20 db	1350h/105	300001766
Filter	Spinner	153755		300001791
Powersensor	HP	8484A	2237A10494	300001666

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-4318-01-01/06


Date:2006-08-30

Page 48 of 65

Powersensor	HP	8485A	2238A00849	300001668
Bandfilter	Telonic	TTF7255EE	20293-11	300001300
Bandfilter	Telonic	TTF12555EE	20292-6	300001302
Bandfilter	Telonic	TTF25055EE	20291-8	300001304
Bandfilter	Telonic	TTF50055EE	20290-7	300001305
Bandfilter	Telonic	TTF100055EE	20289-7	300001307
Bandfilter	Telonic	TTA300055EESN	20370-2	300001312
Bandstop	Telonic	TTR3753EE1	30013-1	300001314
Bandstop	Telonic	TTR723EE	20417-2	300001316
Bandstop	Telonic	TTR95-3EE	20372-4	300001318
Bandstop	Telonic	TTR1903EE	30036-4	300001320
Bandstop	Telonic	TTR3753EE	20369-5	300001321
Bandstop	Telonic	TTR750-3EE1	90177-1	300002387
Highpass	Pro Nova	HDP120-6GG	ohne	300001348
Highpass	Pro Nova	HMC500-6AA	HJ67-01?	300001350
Highpass	Narda	NHP 9000	0004	300001362
Highpass	Narda	HDP16-6GH	JV70-01	300001364
Highpass	RSD	HDP50-6GH, HDP200-6GG		300001371
Highpass	RSD	2099-02-01		300000370
Signal Generator 0.1-2060 MHz	HP	8657A	2838U00736	300001009
Radio Code Analyzer	Schlumberger	SL4922		300001038
Signal Analyzer	B&K	2033		300001047
Frequency counter	HP	5386A	2704A01243	300000998
Laufzeitelement	WR-Elektronik			300001036
Powersupply Stromversorgung	Systron	M5P 40/15A	828233	300001291
Powersupply	Heiden	1108-32	1701	300001392
Powersupply	Heiden	1108-32	1802	300001383
Powersupply	Heiden	1108-32	003202	300001187
Powersupply	Zentro	LA 2x30/5GB1	2011	300001276
Powersupply	Zentro	LA 2x30/5GB2	2012	300001275
Powersupply	Zentro	LA 30/5GA	2041,2042	300001287
Trenntrafo	Grundig	RT5A	8781	300001277
Trenntrafo	Grundig	RT5A	9242	300001263
Multimeter	Goerz Elektro	Unigor 6e P	911 355	300001625
Multimeter	Goerz Elektro	Unigor 6e P	911 391	300001281
Climatic Box	Heraeus Voetsch	VUK04/500	32679	300000299
Powersensor + Att.	HP	8482B	2703A02586	300001492
Attenuator 30 dB	HP	8498A	1801A02445	300001475
Signal Generator NF	HP		2822A01203	300001004
Attenuator	Spinner	BN 534171 D	51881	300001516
Attenuator coaxial	Bird	8325	2429	300001513
Impulsbegrenzer	R&S	ESH 3 Z2		300001460
4Port Box	R&S	4Port Box	860457/005	300001472
Signal Generator 0.1-4200 MHz	HP	8665A	2833A0011	300002299
NF-Spektrumanalyzer	B&K	2033A		300002301
Swissphone Freifeld-Messbox	Swissphone Schweiz			300002302
Trenntrafo Regelbar	Grundig	RT5H	9242	300001628
Signal Generator	HP	8111A	2215G00867	300001117

3 Photographs

Test site: Antenna 1

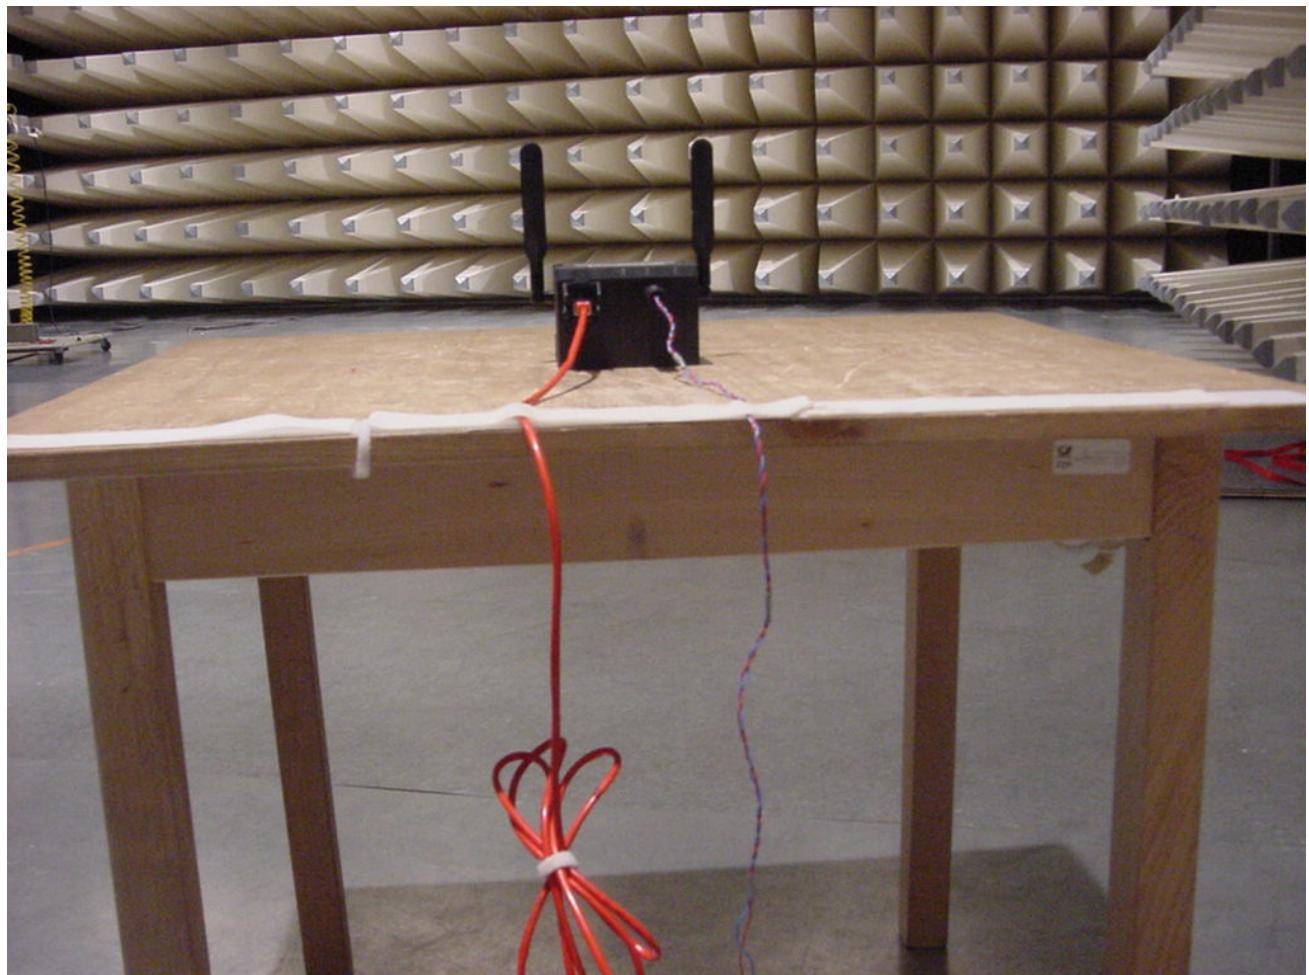

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 50 of 65

Test site: Antenna 1

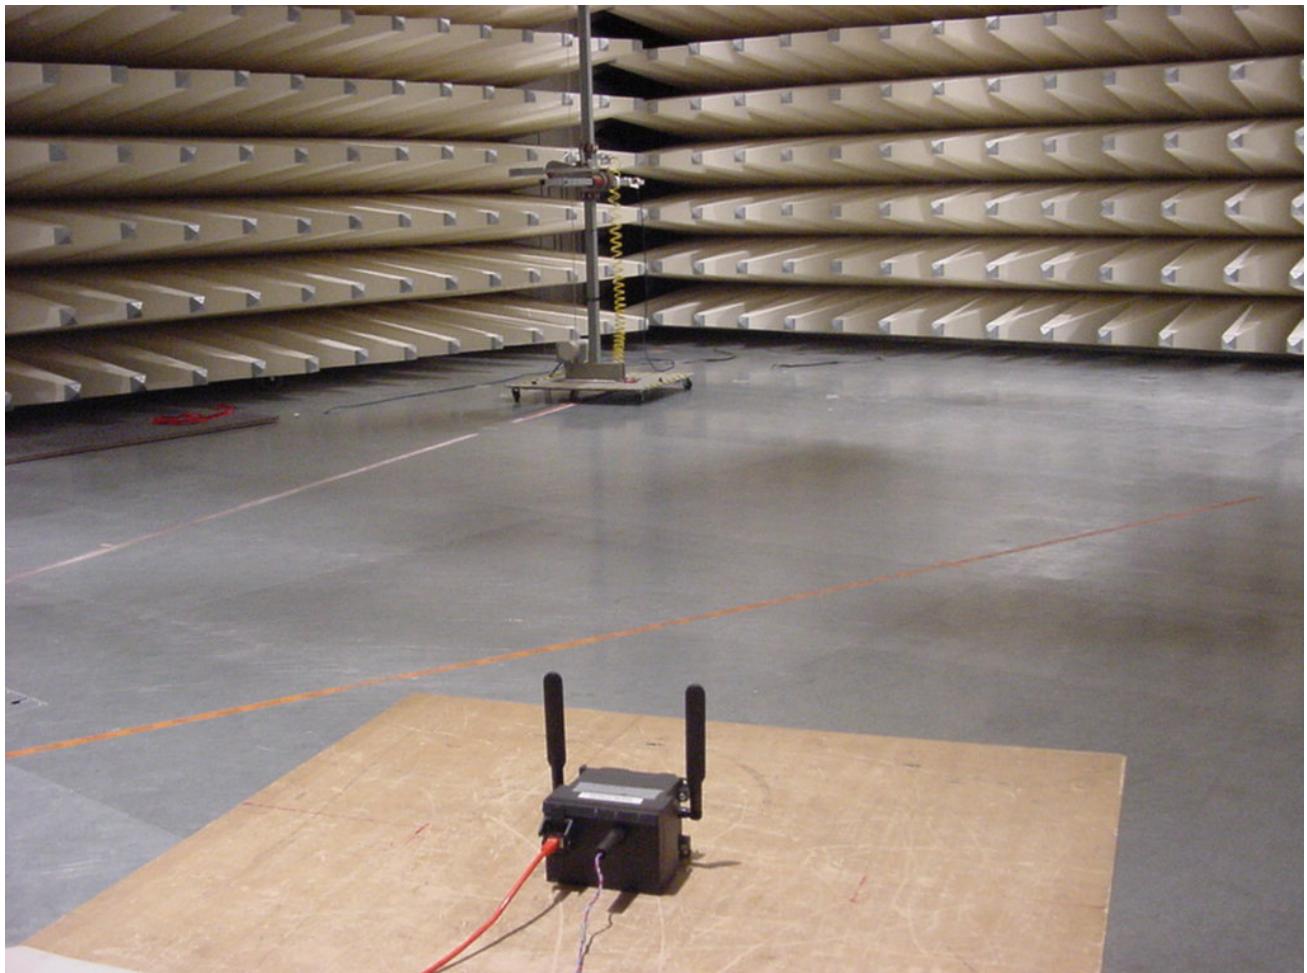

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06


Date: 2006-08-30

Page 51 of 65

Test site: Antenna 2

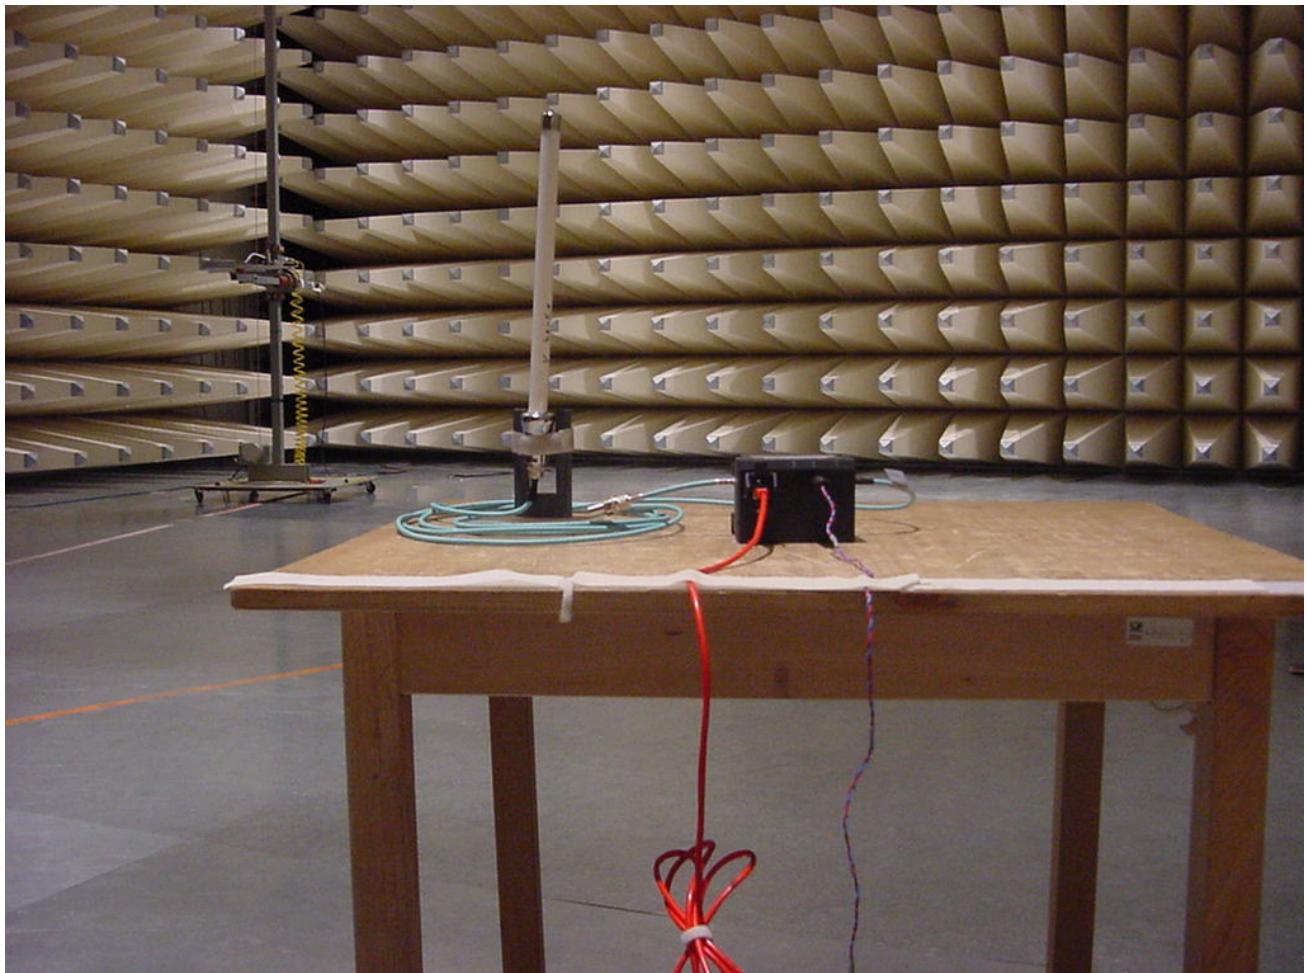

AC-conducted:

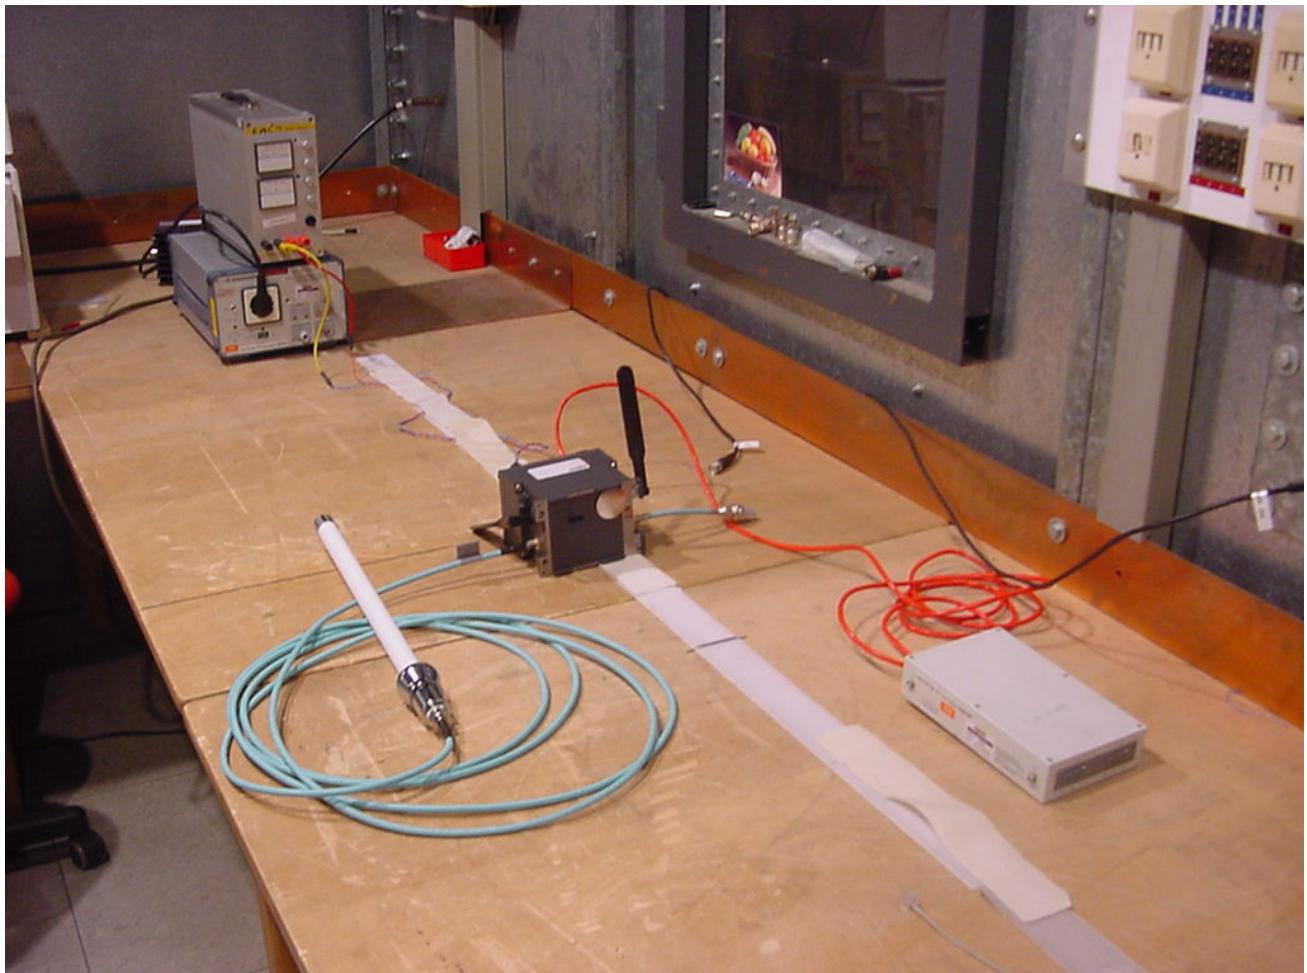

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany


CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 53 of 65

Test sample:

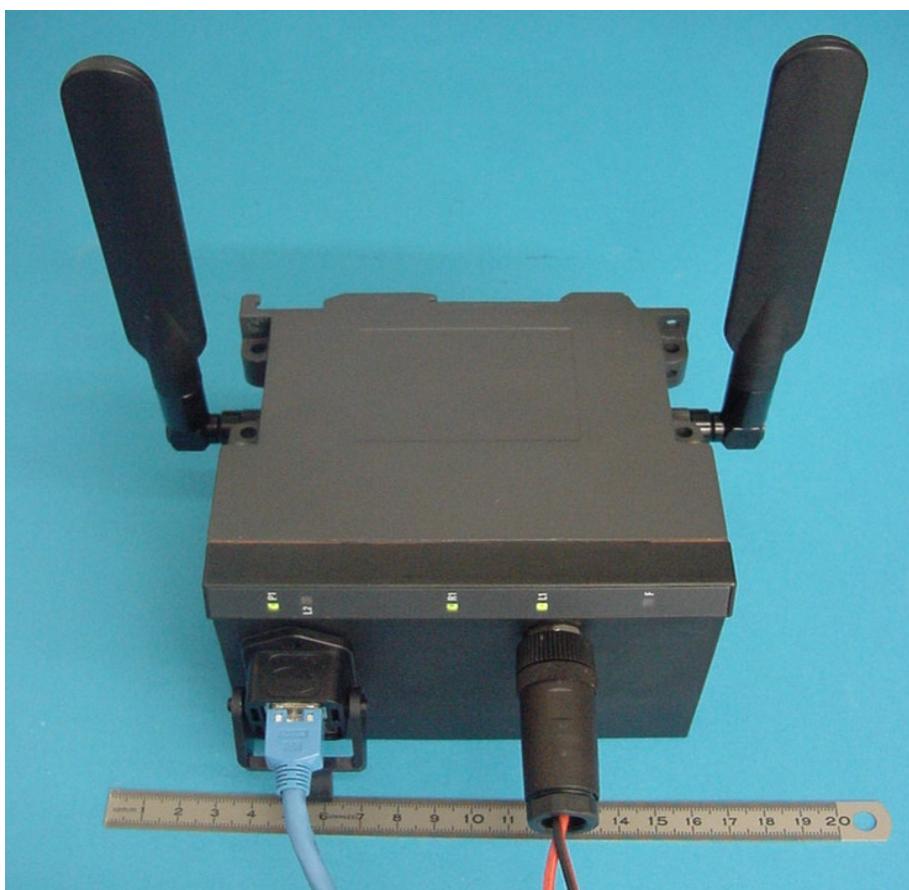

SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany

CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 54 of 65

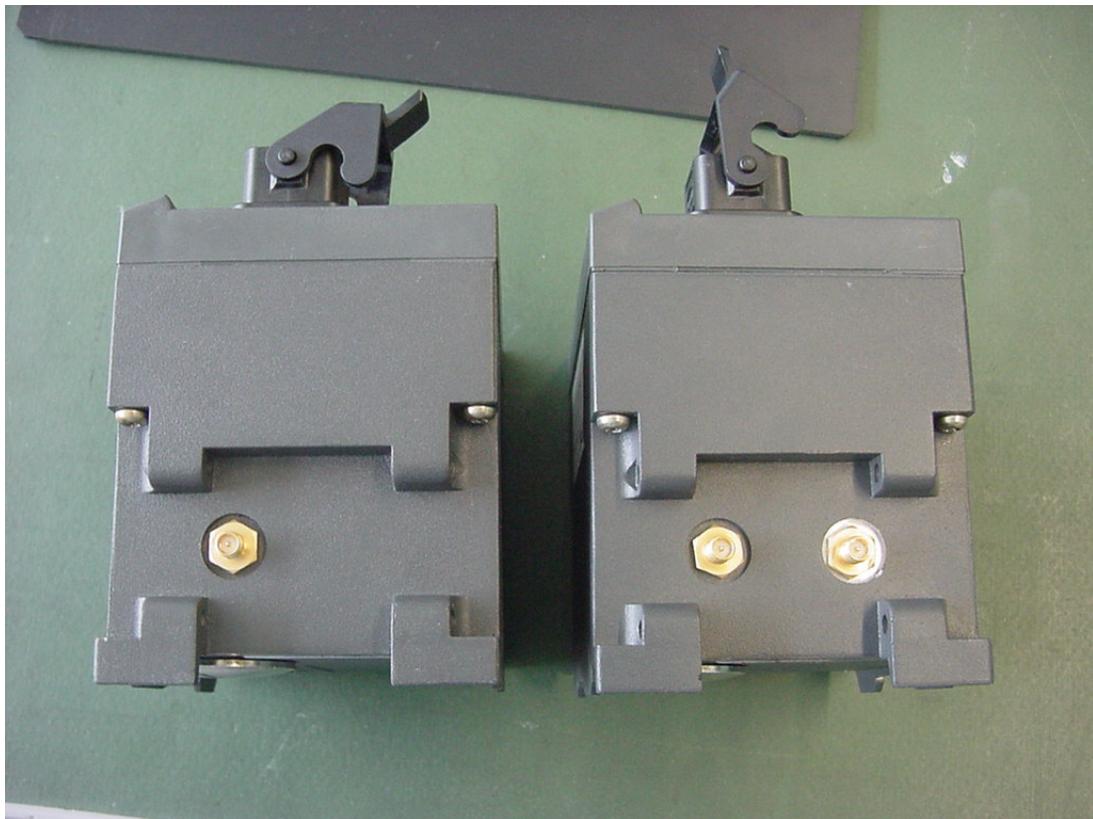

SRD-Testreport



CETECOM ICT Services GmbH Saarbruecken, Germany

CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 55 of 65

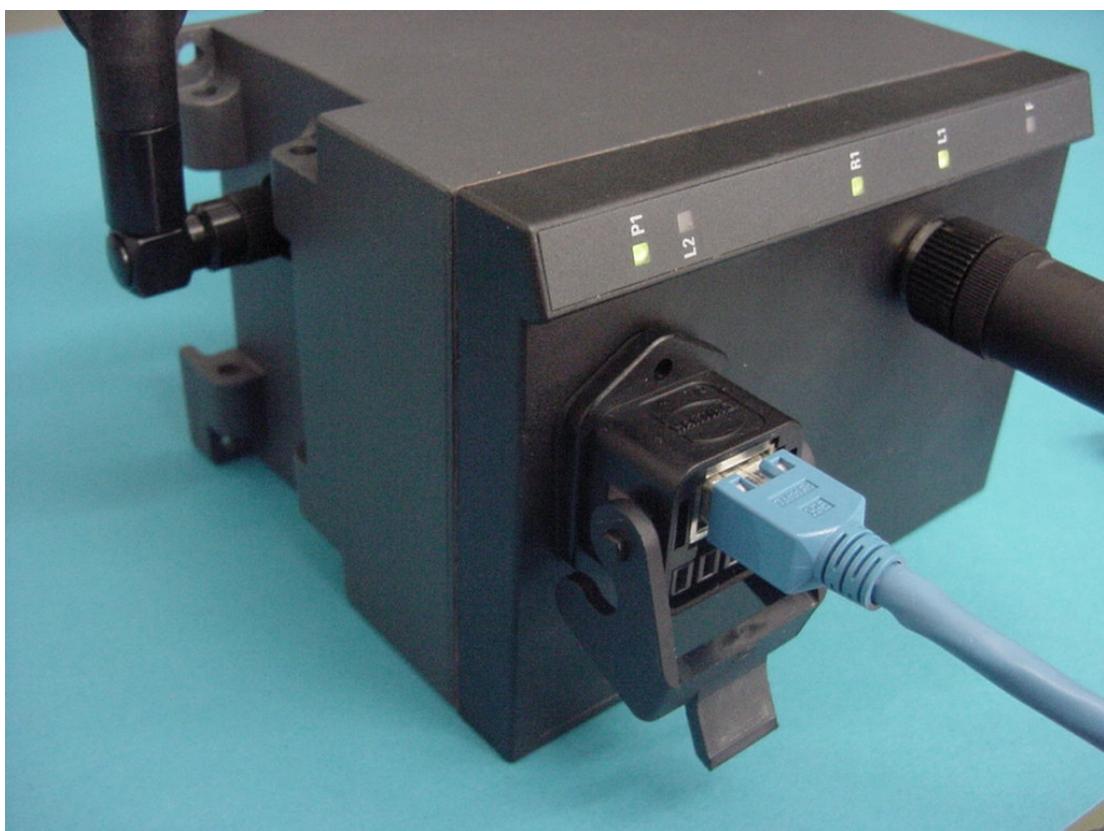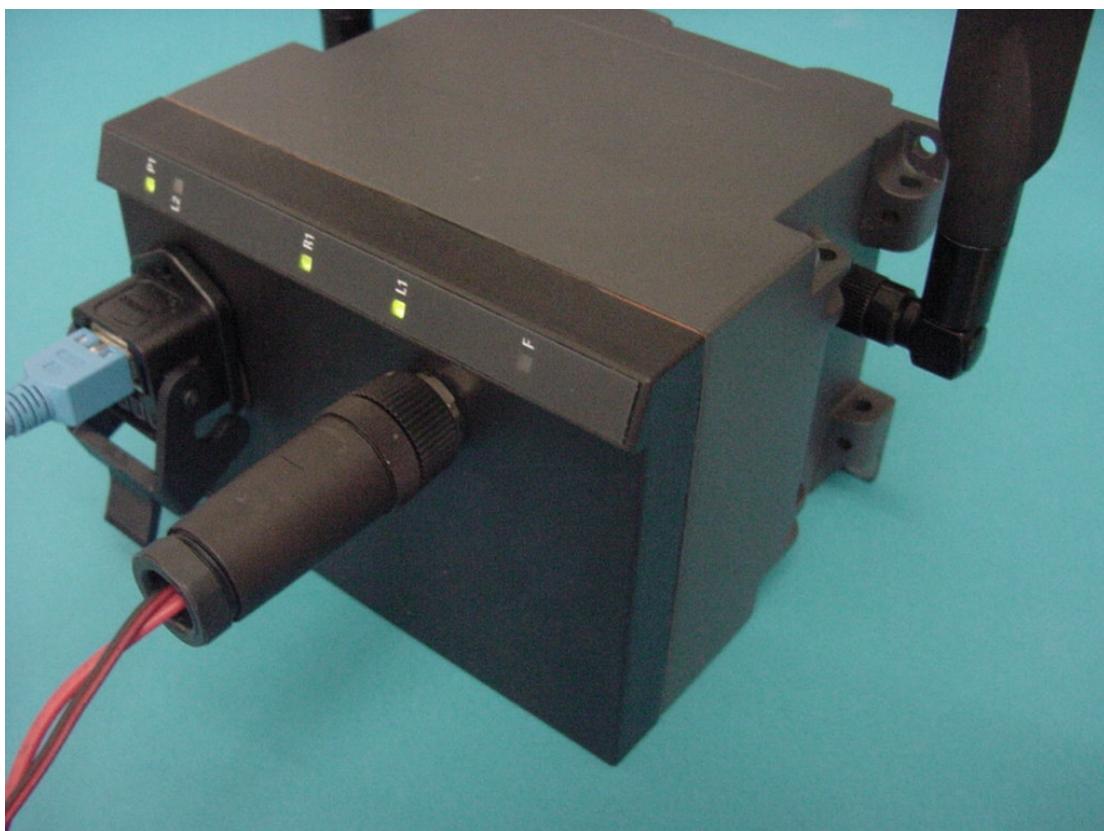

SRD-Testreport



CETECOM ICT Services GmbH Saarbruecken, Germany

CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 56 of 65

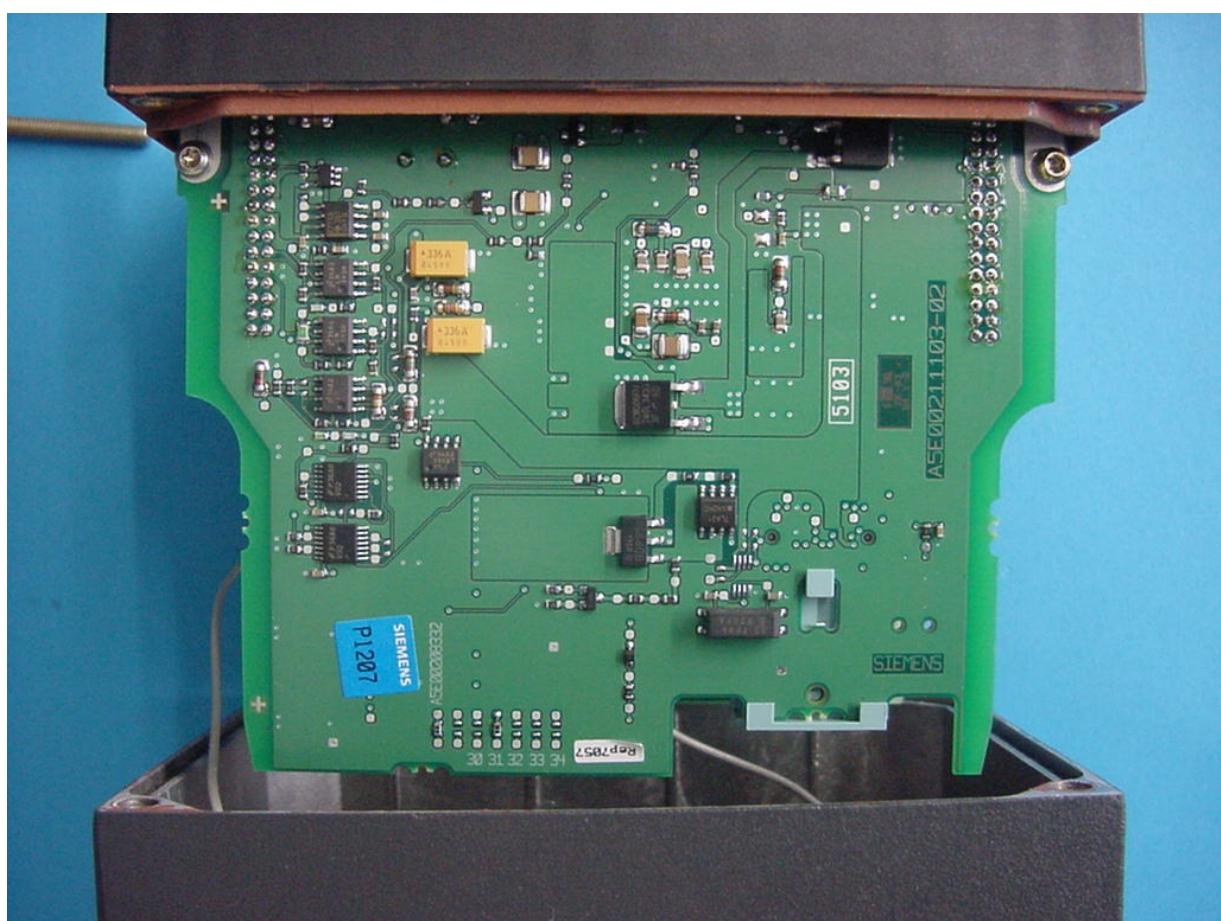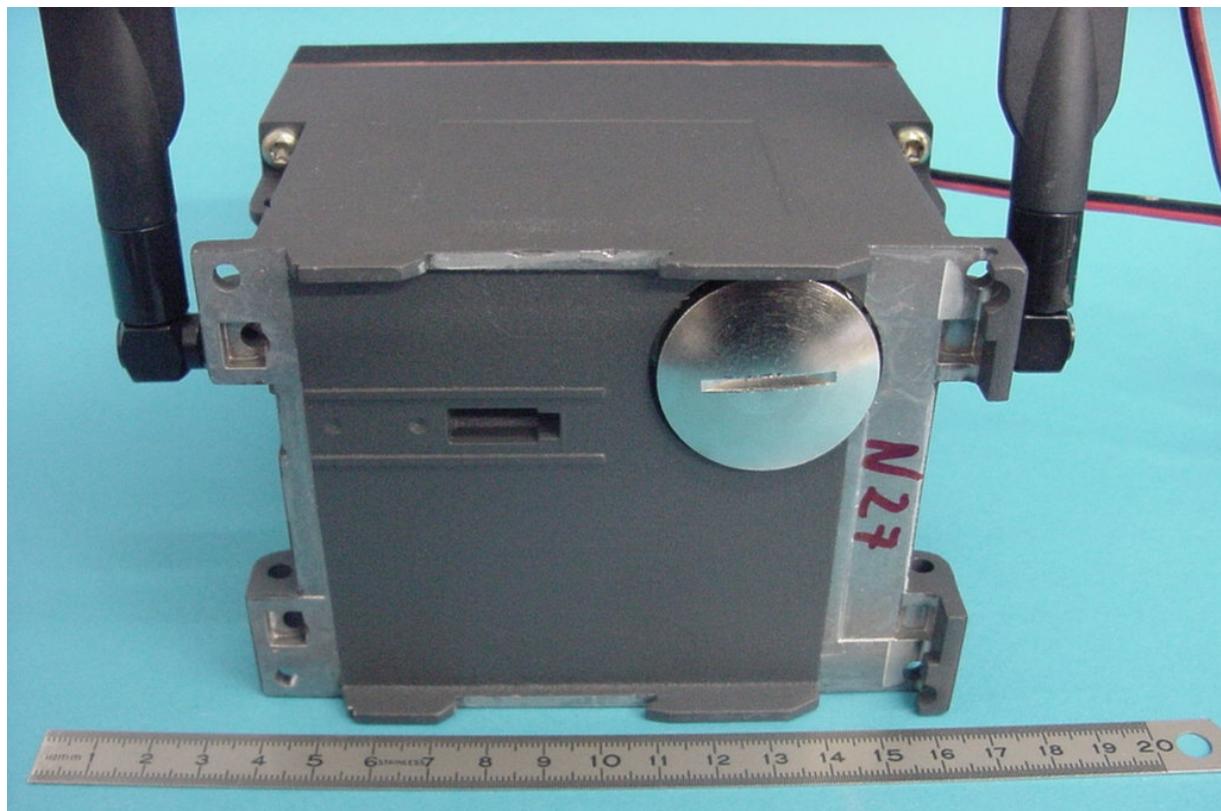

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany

CETECOM™

Test report No.: 2-4318-01-01/06

Date: 2006-08-30

Page 57 of 65

