

EMC Test Report

regarding

USA: CFR Title 47, Part 15.231 (Emissions)
Canada: ISED RSS-210v10/GENv5 (Emissions)

for



A3C108397 Series

Category: Passive and Keyless Entry Transmitter

Judgments:

Compliant 15.231/RSS-210v10 Transmitter

Testing Completed: February 10, 2022



Prepared for:

Continental Automotive

4685 Investment Drive, Troy Michigan 48098 USA

Phone: +1 (248) 764 6758, Fax: +1 (248) 764-7281

Contact: Mark Kenney, Mark.Kenney@continental.com

Data Recorded by: Joseph Brunett
Dr. Joseph Brunett, EMC-002790-NE

Reviewed by: Joseph Brunett
Dr. Joseph Brunett, EMC-002790-NE

Prepared by: John Nantz
John Nantz

Date of Issue: February 10, 2022

Revision History

| Rev. No. | Date | Details | Revised By |
|----------|-------------------|------------------|------------|
| r0 | February 10, 2022 | Initial Release. | J. Brunett |

Contents

| | |
|---|-----------|
| Revision History | 2 |
| Table of Contents | 2 |
| 1 Test Report Scope and Limitations | 4 |
| 1.1 Laboratory Authorization | 4 |
| 1.2 Report Retention | 4 |
| 1.3 Subcontracted Testing | 4 |
| 1.4 Test Data | 4 |
| 1.5 Limitation of Results | 4 |
| 1.6 Copyright | 4 |
| 1.7 Endorsements | 4 |
| 1.8 Test Location | 5 |
| 1.9 Traceability and Equipment Used | 5 |
| 2 Test Specifications and Procedures | 6 |
| 2.1 Test Specification and General Procedures | 6 |
| 3 Configuration and Identification of the Equipment Under Test | 7 |
| 3.1 Description and Declarations | 7 |
| 3.1.1 EUT Configuration | 8 |
| 3.1.2 Modes of Operation | 8 |
| 3.1.3 Variants | 8 |
| 3.1.4 Test Samples | 8 |
| 3.1.5 Functional Exerciser | 8 |
| 3.1.6 Modifications Made | 8 |
| 3.1.7 Production Intent | 8 |
| 3.1.8 Declared Exemptions and Additional Product Notes | 8 |
| 4 Emissions | 9 |
| 4.1 General Test Procedures | 9 |
| 4.1.1 Radiated Test Setup and Procedures | 9 |
| 4.1.2 Conducted Emissions Test Setup and Procedures | 11 |
| 4.1.3 Power Supply Variation | 11 |
| 4.2 Intentional Emissions | 12 |
| 4.2.1 Fundamental Emission Pulsed Operation | 12 |
| 4.2.2 Fundamental Emission Bandwidth | 15 |
| 4.2.3 Fundamental Emission Field Strength | 17 |
| 4.3 Unintentional Emissions | 18 |
| 4.3.1 Transmit Chain Spurious Emissions | 18 |
| 4.3.2 Radiated Digital Spurious | 19 |
| 5 Measurement Uncertainty and Accreditation Documents | 20 |

List of Tables

| | | |
|---|--|----|
| 1 | Test Site List. | 5 |
| 2 | Equipment List. | 5 |
| 3 | EUT Declarations. | 7 |
| 4 | Fundamental Emission Pulsed Operation. | 12 |
| 5 | Fundamental Emission Bandwidth. | 15 |
| 6 | Fundamental Emission Field Strength. | 17 |
| 7 | Transmit Chain Spurious Emissions. | 18 |
| 8 | Measurement Uncertainty. | 20 |

List of Figures

| | | |
|---|--|----|
| 1 | Photos of EUT. | 7 |
| 2 | EUT Test Configuration Diagram. | 8 |
| 3 | Radiated Emissions Diagram of the EUT. | 9 |
| 4 | Radiated Emissions Test Setup Photograph(s). | 10 |
| 5 | Fundamental Emission Pulsed Operation. | 13 |
| 5 | Fundamental Emission Pulsed Operation. | 14 |
| 6 | Fundamental Emission Bandwidth. | 16 |
| 7 | Accreditation Documents | 20 |

1 Test Report Scope and Limitations

1.1 Laboratory Authorization

Test Facility description and attenuation characteristics are on file with the FCC Laboratory, Columbia, Maryland (FCC Reg. No: US5348 and US5356) and with ISED Canada, Ottawa, ON (File Ref. No: 3161A and 24249). Amber Helm Development L.C. holds accreditation under NVLAP Lab Code 200129-0.

1.2 Report Retention

For equipment verified to comply with the regulations herein, the manufacturer is obliged to retain this report with the product records for the life of the product, and no less than ten years. A copy of this Report will remain on file with this laboratory until March 2032.

1.3 Subcontracted Testing

This report does not contain data produced under subcontract.

1.4 Test Data

This test report contains data included within the laboratory's scope of accreditation. Any data in this report that is not covered under the laboratory's scope is clearly identified.

1.5 Limitation of Results

The test results contained in this report relate only to the item(s) tested. Any electrical or mechanical modification made to the test item subsequent to the test date shall invalidate the data presented in this report. Any electrical or mechanical modification made to the test item subsequent to this test date shall require reevaluation.

1.6 Copyright

This report shall not be reproduced, except in full, without the written approval of Amber Helm Development L.C.

1.7 Endorsements

This report shall not be used to claim product endorsement by any accrediting, regulatory, or governmental agency.

1.8 Test Location

The EUT was fully tested by **Amber Helm Development L.C.**, headquartered at 92723 Michigan Hwy-152, Sister Lakes, Michigan 49047 USA. Table 1 lists all sites employed herein. Specific test sites utilized are also listed in the test results sections of this report where needed.

Table 1: Test Site List.

| Description | Location | Quality Num. |
|----------------|---|--------------|
| OATS (3 meter) | 3615 E Grand River Rd., Williamston, Michigan 48895 | OATSC |

1.9 Traceability and Equipment Used

Pertinent test equipment used for measurements at this facility is listed in Table 2. The quality system employed at Amber Helm Development L.C. has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to the SI through NIST, other recognized national laboratories, accepted fundamental or natural physical constants, ratio type of calibration, or by comparison to consensus standards.

Table 2: Equipment List.

| Description | Manufacturer/Model | SN | Quality Num. | Cal/Ver By / Date Due |
|----------------------|-----------------------|-----------|--------------|-----------------------|
| Biconical | EMCO / 93110B | 9802-3039 | BICEMCO01 | Keysight / Aug-2023 |
| Log Periodic Antenna | EMCO / 3146 | 9305-3614 | LOGEMCO01 | Keysight / Aug-2023 |
| BNC-BNC Coax | WRTL / RG58/U | 001 | CAB001-BLACK | AHD / Mar-2022 |
| 3.5-3.5MM Coax | PhaseFlex / PhaseFlex | 001 | CAB015-PURP | AHD / Jul-2022 |
| Spectrum Analyzer | R & S / FSV30 | 101660 | RSFSV30001 | RS / Apr-2023 |
| Quad Ridge Horn | Singer / A6100 | C35200 | HQR1TO18S01 | Keysight / Aug-2022 |

2 Test Specifications and Procedures

2.1 Test Specification and General Procedures

The goal of Continental Automotive is to demonstrate that the Equipment Under Test (EUT) complies with the Rules and/or Directives below. Detailed in this report are the results of testing the Continental Automotive A3C108397 Series for compliance to:

| Country/Region | Rules or Directive | Referenced Section(s) |
|----------------|-----------------------------|---------------------------|
| United States | Code of Federal Regulations | CFR Title 47, Part 15.231 |
| Canada | ISED Canada | ISED RSS-210v10/GENv5 |

It has been determined that the equipment under test is subject to the rules and directives above at the date of this testing. In conjunction with these rules and directives, the following specifications and procedures are followed herein to demonstrate compliance (in whole or in part) with these regulations.

| | |
|--------------------------|--|
| ANSI C63.4:2014 | "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz" |
| ANSI C63.10:2013 | "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices" |
| TP0102RA | "AHD Internal Document TP0102 - Radiated Emissions Test Procedure" |
| ISED Canada | "The Measurement of Occupied Bandwidth" |
| ICES-003; Issue 7 (2020) | "Information Technology Equipment (ITE) - Limits and methods of measurement" |

3 Configuration and Identification of the Equipment Under Test

3.1 Description and Declarations

The equipment under test is a remote and keyless entry UHF transmitter. The EUT is approximately 8 x 4 x 1.5 cm in dimension, and is depicted in Figure 1. It is powered by 3 VDC Lithium cell battery. In use, this device is a hand held UHF transmitter. Table 3 outlines provider declared EUT specifications.



Figure 1: Photos of EUT.

Table 3: EUT Declarations.

| General Declarations | |
|----------------------------|---|
| Equipment Type: | Passive and Keyless Entry Transmitter |
| Country of Origin: | Not Declared |
| Nominal Supply: | 3 VDC |
| Oper. Temp Range: | Not Declared |
| Frequency Range: | 433.589 MHz and 434.251 MHz |
| Antenna Dimension: | Not Declared |
| Antenna Type: | PCB Trace |
| Antenna Gain: | -20 dBi (approx) |
| Number of Channels: | 2 |
| Channel Spacing: | 660kHz |
| Alignment Range: | Not Declared |
| Type of Modulation: | FSK |
| United States | |
| FCC ID Number: | M3N-A3C108397 |
| Classification: | DSC |
| Canada | |
| IC Number: | 7812A-A3C108397 |
| Classification: | Remote Control Device, Vehicular Device |

3.1.1 EUT Configuration

The EUT is configured for testing as depicted in Figure 2.

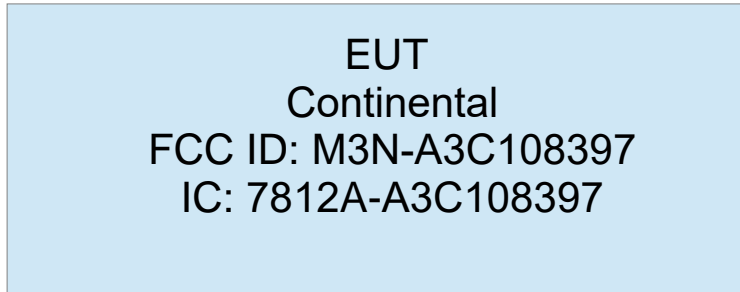


Figure 2: EUT Test Configuration Diagram.

3.1.2 Modes of Operation

This EUT is capable of transmitting in both a manual activated mode (normal button press) or when automatically activated (Passive Entry Passive Start / Comfort) mode wherein it responds to detection of an encoded LF signal. Both modes are evaluated herein, with the worst case (greatest) on-time demonstrated in the manual activated mode. The EUT is also tested with and without its removable key.

3.1.3 Variants

There are eight (13) minor variants of the EUT. All variants employ identical PCBs and circuitry, but their housings vary based on vehicle logo and the number of buttons populated in the housing. Two worst case variants were determined in pretesting, those being the 5-BTN chrome button variant (HVIN: A3C108397) and the 2-BTN plastic button variant (HVIN: A3C108399).

3.1.4 Test Samples

Four samples of the EUT were provided, including one normal operating sample of each button variant (5-BTN and 2-BTN) as well as two samples of the same button variants with CW software.

3.1.5 Functional Exerciser

Normal operating EUT functionality was verified by observation of transmitted signal.

3.1.6 Modifications Made

There were no modifications made to the EUT by this laboratory.

3.1.7 Production Intent

The EUT appears to be a production ready sample.

3.1.8 Declared Exemptions and Additional Product Notes

None.

4 Emissions

4.1 General Test Procedures

4.1.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are first pre-scanned in our screen room. Spectrum and modulation characteristics of all emissions are recorded. Instrumentation, including spectrum analyzers and other test equipment as detailed in Section 1.8 are employed. After pre-scan, emission measurements are made on the test site of record. If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in relevant test standards are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 3. All intentionally radiating elements that are not fixed-mounted in use are placed on the test table lying flat, on their side, and on their end (3-axes) and the resulting worst case emissions are recorded. If the EUT is fixed-mounted in use, measurements are made with the device oriented in the manner consistent with installation and then emissions are recorded. If the EUT exhibits spurious emissions due to internal receiver circuitry, such emissions are measured with an appropriate carrier signal applied.

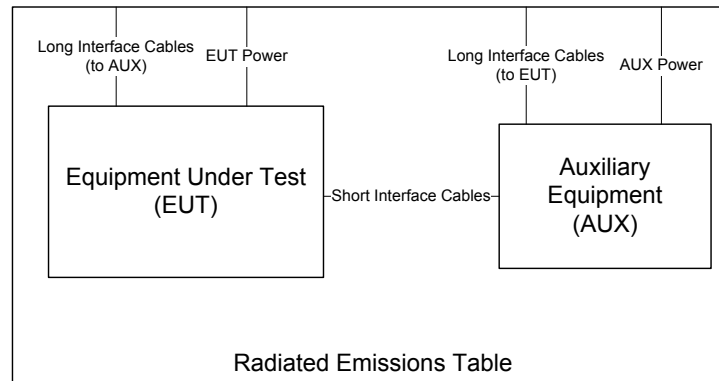


Figure 3: Radiated Emissions Diagram of the EUT.

For devices with intentional emissions below 30 MHz, a shielded loop antenna and/or E-field and H-Field broadband probes are used depending on the regulations. Shielded loops are placed at a 1 meter receive height at the desired measurement distance. For exposure in this band, the broadband probes employed are 10cm diameter single-axis shielded transducers and measurements are repeated and summed over three axes.

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. For both horizontal and vertical polarizations, the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected. The EUT is then rotated through 360° in azimuth until the highest emission is detected. The test antenna is then raised and lowered one last time from 1 to 4 m and the worst case value is recorded. Emissions above 1 GHz are characterized using standard gain or broadband ridge-horn antennas on our OATS with a 4×5 m rectangle of ECCOSORB absorber covering the OATS ground screen and a 1.5m table height. Care is taken to ensure that test receiver resolution and video bandwidths meet the regulatory requirements, and that the emission bandwidth of the EUT is not reduced. Photographs of the test setup employed are depicted in Figure 4.

Where regulations allow for direct measurement of field strength, power values (dBm) measured on the test receiver / analyzer are converted to $\text{dB}\mu\text{V}/\text{m}$ at the regulatory distance, using

$$E_{dist} = 107 + P_R + K_A - K_G + K_E - C_F$$

where P_R is the power recorded on spectrum analyzer, in dBm, K_A is the test antenna factor in dB/m, K_G is the combined pre-amplifier gain and cable loss in dB, K_E is duty correction factor (when applicable) in dB, and C_F is a distance conversion (employed only if limits are specified at alternate distance) in dB. This field strength value is then compared with the regulatory limit. If effective isotropic radiated power (EIRP) is computed, it is computed as

$$EIRP(\text{dBm}) = E_{3m}(\text{dB}\mu\text{V}/\text{m}) - 95.2.$$

When presenting data at each frequency, the highest measured emission under all possible EUT orientations (3-axes) is reported.

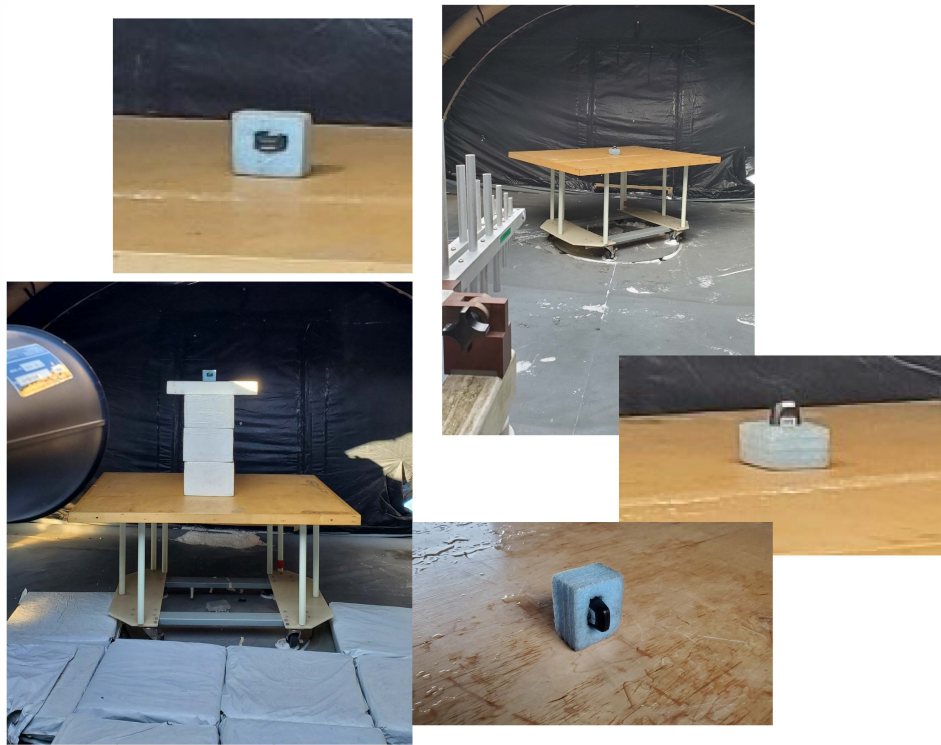


Figure 4: Radiated Emissions Test Setup Photograph(s).

4.1.2 Conducted Emissions Test Setup and Procedures

The EUT is not subject to measurement of power line conducted emissions as it is powered solely by its internal battery.

4.1.3 Power Supply Variation

Tests at extreme supply voltages are made if required by the procedures specified in the test standard, and results of this testing are detailed in this report.

In the case the EUT is designed for operation from a battery power source, the extreme test voltages are evaluated over the range specified in the test standard; no less than $\pm 10\%$ of the nominal battery voltage declared by the manufacturer. For all battery operated equipment, worst case intentional and spurious emissions are re-checked employing a new (fully charged) battery.

4.2 Intentional Emissions

4.2.1 Fundamental Emission Pulsed Operation

Test Setup & Procedure The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. Duty cycle is reported for all relevant modes of operation. The test equipment employed includes RSFSV30001, LOGEMCO01.

Measurement Results The details and results of testing the EUT are summarized in Table 4. Plots showing the measurements made to obtain these values are provided in Figure 5.

Table 4: Fundamental Emission Pulsed Operation.

| | | | | | |
|-----------------|-------------|---------------------|------------------------|------------------------|------------------|
| Detector | Span | IF Bandwidth | Video Bandwidth | Test Date: | 26-Jan-22 |
| Pk | 0 | 1 MHz | 3 MHz | Test Engineer: | J. Brunett |
| | | | | EUT: | Conti TVM |
| | | | | EUT Mode: | Normal Operating |
| | | | | Meas. Distance: | 10 cm |

| FCC/IC | | | | | | | | | | |
|--------|---------------------|---|----------------------------|--------------------|---------------------------------|--------------------------------|------------------------|---|---------------------|-------|
| R0 | Test Freq. (MHz) | EUT Test Mode* | Overall Transmission | | | Internal Frame Characteristics | | | Computed Duty Cycle | |
| | | | Min. Repetition Rate (sec) | Max. No. of Frames | Total Transmission Length (sec) | Max. Frame Length (ms) | Min. Frame Period (ms) | Frame Encoding | (%) | (dB) |
| R1 | 434.251 | Manual Activated, FSK (subfigure 5(a)) | single | 6 | 0.55 | 50.90 | 100.0 | In the worse case, the EUT transmits a 50.9 ms FSK data frame in a 100.08 ms window. Tx consists of frames on alternating channels. | 50.9 | -5.9 |
| R2 | 434.251 | Automatic Activated, FSK (subfigure 5(b)) | single | 2 | 0.19 | 17.20 | 168.6 | In the worse case, the EUT transmits a 50.9 ms FSK data frame in a 100.08 ms window. | 17.2 | -15.3 |
| # | C1 | C2 | C3 | C4 | C5 | C6 | C7 | C8 | C9 | C10 |

Example Calculation: 50.9 ms / 100 ms = 50.9 % on-time.

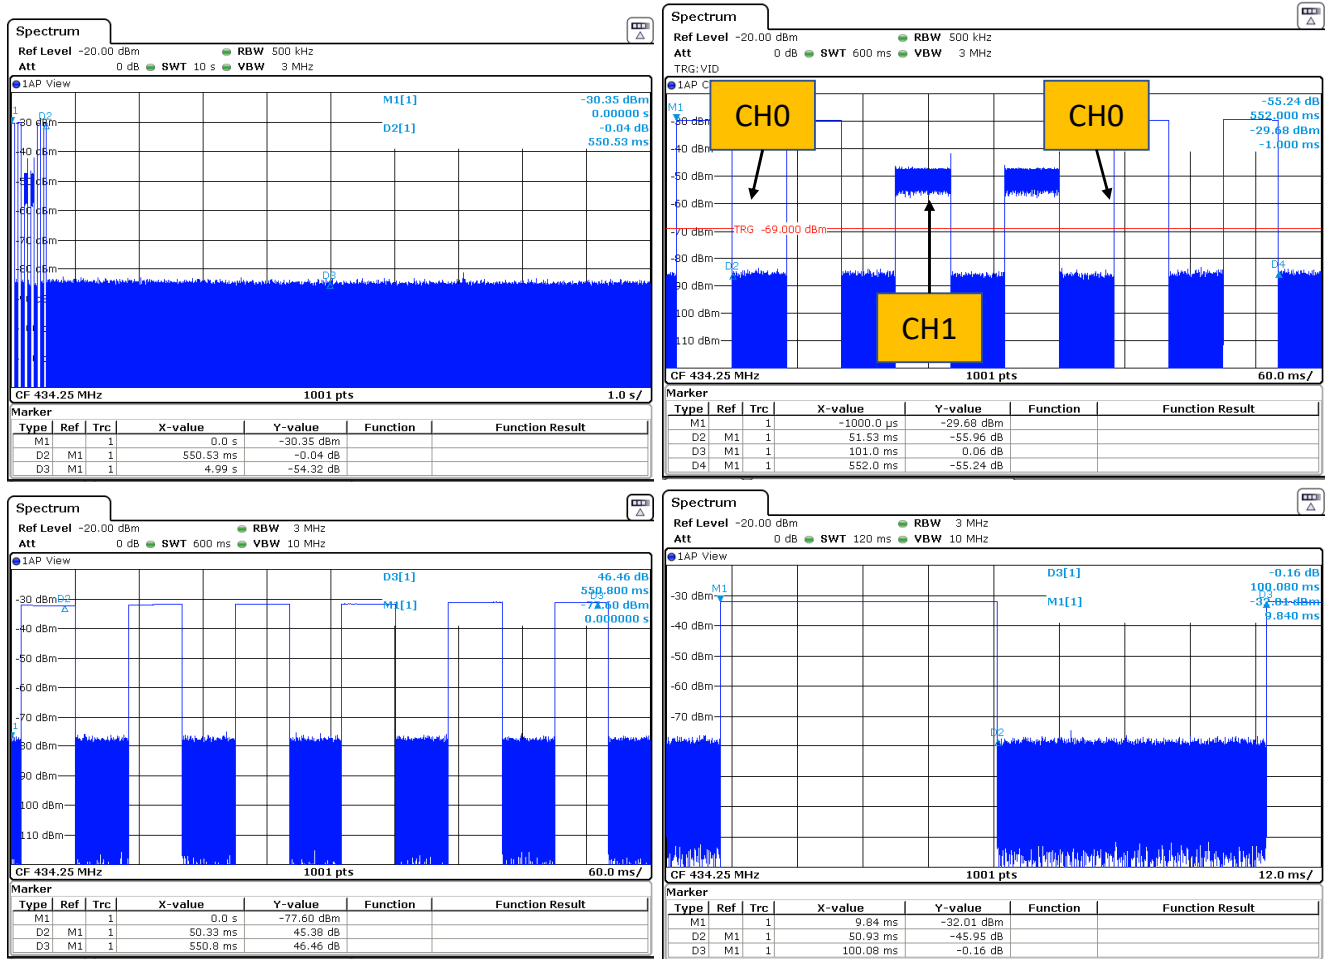


Figure 5(a): Fundamental Emission Pulsed Operation.

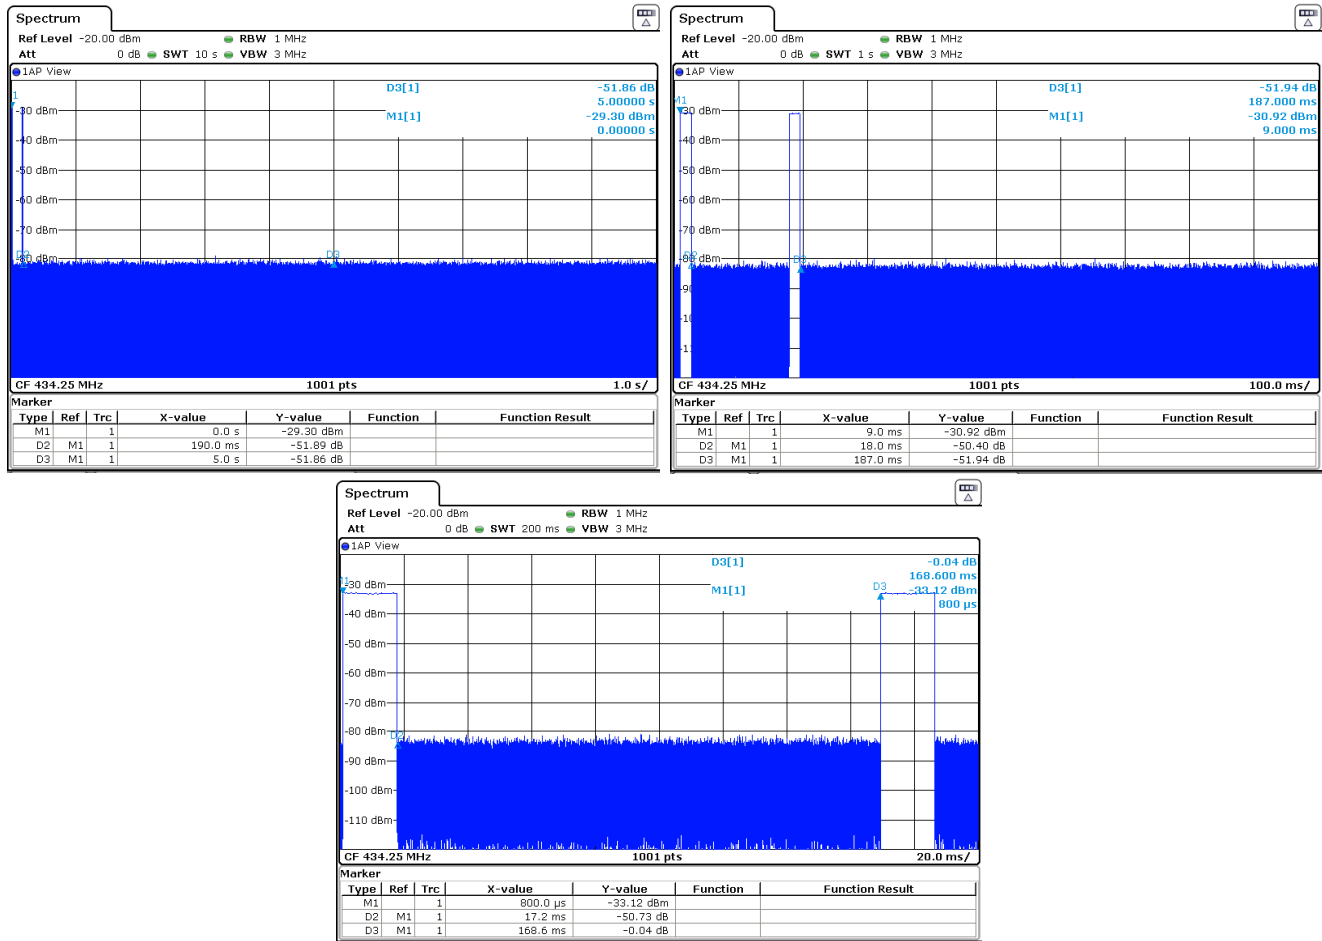


Figure 5(b): Fundamental Emission Pulsed Operation.

4.2.2 Fundamental Emission Bandwidth

Test Setup & Procedure The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. Emission bandwidth (EBW) of the EUT is measured with the device placed in the test mode(s) with the shortest available frame length and minimum frame spacing. The 20 dB EBW is measured as the max-held peak-detected signal when the IF bandwidth is greater than or equal to 1% of the receiver span. For complex modulations other than ASK and FSK, the 99% emission bandwidth per IC test procedures has a different result, and is also reported. The test equipment employed includes RSFSV30001, LOGEMCO01.

Measurement Results The details and results of testing the EUT are summarized in Table 5. Plots showing the measurements made to obtain these values are provided in Figure 6.

Table 5: Fundamental Emission Bandwidth.

| | | | | |
|-----------------|---------------------|------------------------|------------------------|------------------|
| Detector | IF Bandwidth | Video Bandwidth | Test Date: | 26-Jan-22 |
| Pk | 10 kHz | 100 kHz | Test Engineer: | J. Brunett |
| | | | EUT: | Conti TVM |
| | | | EUT Mode: | Normal Operating |
| | | | Meas. Distance: | 10 cm |


| | | | | | | | FCC/IC |
|----|---------|------------------------|-----------------|-----------------|---------------|-----------------------|---------------------|
| R0 | Mode | Center Frequency (MHz) | 20 dB EBW (MHz) | EBW Limit (MHz) | 99% OBW (MHz) | Accum. 20dB OBW (MHz) | Min EBW Limit (MHz) |
| R1 | RKE FSK | 433.59 | 0.069 | 1.084 | 0.334 | 0.164 | 1.084 |
| R2 | RKE FSK | 434.25 | 0.094 | 1.086 | 0.295 | | |
| R3 | PKE FSK | 434.25 | 0.075 | 1.086 | 0.084 | 0.075 | |
| # | C1 | C2 | C3 | C4 | C5 | C7 | C8 |

(ROW) (COLUMN) NOTE:

R0 C7 Per KDB 926416, for FCC 15.231 non-sweeping devices, total bandwidth is sum of the individual occupied 20 dB bandwidths. EUT employs 2 channels in the manual act mode, but only 1 channel in the automatic activated mode. OBW is restricted to 0.0025 (.25%) of the center frequency. 20dB EBWs summation is 0.069 MHz + 0.094 MHz = 0.164 MHz

RKE CH1

RKE CH2

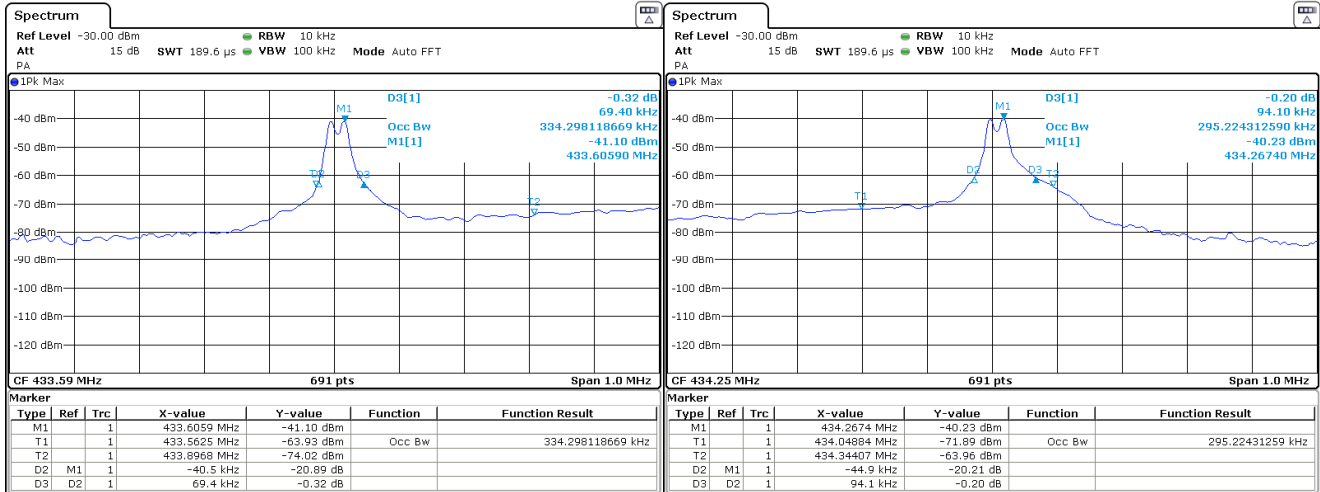

PKE

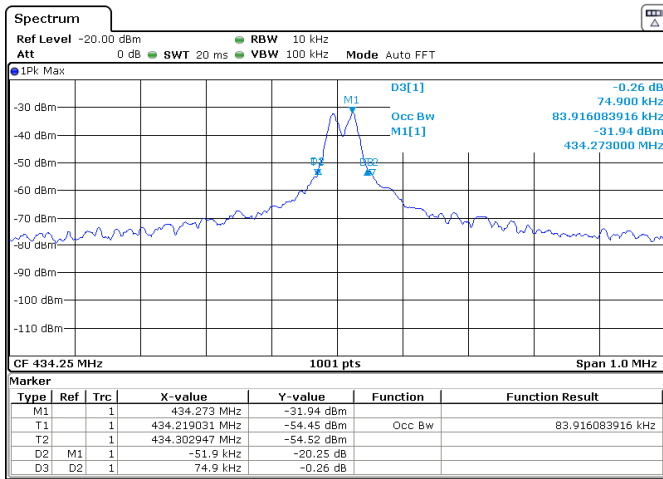


Figure 6: Fundamental Emission Bandwidth.

4.2.3 Fundamental Emission Field Strength

Test Setup & Procedure The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. Fundamental emissions are measured at the regulatory distance on our OATS. The test equipment employed includes RSFSV30001, LOGEMCO01.

Measurement Results The details and results of testing the EUT are summarized in Table 6.

Table 6: Fundamental Emission Field Strength.

EUT Modes: a1 CW - KEY IN - Max Population 5-BTN a5
 a2 CW - KEY OUT - - Max Population 5-BTN a6
Test Date(s): 01/26/22 a3 CW - KEY IN - Min Population 2-BTN a7
Test Engineer: J. Brunett a4 CW - KEY OUT - - Min Population 2-BTN a8

| R0 | Frequency | | Temp. (C) Hum. % | Table Angle deg | Site | | | CF | EUT | | | Test Antenna | | | Cable Kg | Receiver | | | | Field Strength @ DR | | | | | | EIRP | | Details | |
|-----|-----------|----------|------------------|-----------------|-------|-----|-----|-----|-------------|-------|-----|--------------|-------------|-------|----------|------------|-------------|------|---------------|--|-------|-----------|------|-----------------|-----------|-------|----------|---------|-----------|
| | Start MHz | Stop MHz | | | MR | DR | N/F | | Mode | Volt. | Dim | Pol. | Ant. Height | Dim. | | Ka | Rx Power Pk | Avg | Bandwidth RBW | VBW | Meas. | Limit USA | CAN | Opk / Avg Calc. | Limit USA | CAN | Pk Calc. | | Pass Fail |
| R1 | SETUP | | | | OATSC | | | | CONTI TVMPK | | | EMCOLOG | | | CAB001 | RSFSV30001 | | | | NOTES: H-POL - FLAT, V-POL END Worst Case Orient | | | | | | | | | |
| R2 | 433.5 | 434.5 | -8 / 52 | 220.0 | 3.0 | 3.0 | | 0.0 | a1 | 3.0 | 7.5 | H | 1.0 | 100.0 | 16.3 | -0.1 | | 0.12 | 0.30 | 81.0 | 100.8 | 100.8 | 75.1 | 80.8 | 80.8 | -14.1 | | 5.7 | |
| R3 | 433.5 | 434.5 | -8 / 52 | 235.0 | 3.0 | 3.0 | | 0.0 | a1 | 3.0 | 7.5 | V | 1.3 | 100.0 | 16.3 | -0.1 | | 0.12 | 0.30 | 81.7 | 100.8 | 100.8 | 75.8 | 80.8 | 80.8 | -13.4 | | 5.0 | |
| R4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| R5 | 433.5 | 434.5 | -8 / 52 | 220.0 | 3.0 | 3.0 | | 0.0 | a2 | 3.0 | 7.5 | H | 1.0 | 100.0 | 16.3 | -0.1 | | 0.12 | 0.30 | 81.2 | 100.8 | 100.8 | 75.3 | 80.8 | 80.8 | -13.9 | | 5.5 | |
| R6 | 433.5 | 434.5 | -8 / 52 | 235.0 | 3.0 | 3.0 | | 0.0 | a2 | 3.0 | 7.5 | V | 1.3 | 100.0 | 16.3 | -0.1 | | 0.12 | 0.30 | 82.6 | 100.8 | 100.8 | 76.7 | 80.8 | 80.8 | -12.5 | | 4.1 | |
| R7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| R8 | 433.5 | 434.5 | -8 / 52 | 220.0 | 3.0 | 3.0 | | 0.0 | a3 | 3.0 | 7.5 | H | 1.0 | 100.0 | 16.3 | -0.1 | | 0.12 | 0.30 | 81.8 | 100.8 | 100.8 | 75.9 | 80.8 | 80.8 | -13.3 | | 4.9 | |
| R9 | 433.5 | 434.5 | -8 / 52 | 235.0 | 3.0 | 3.0 | | 0.0 | a3 | 3.0 | 7.5 | V | 1.3 | 100.0 | 16.3 | -0.1 | | 0.12 | 0.30 | 82.5 | 100.8 | 100.8 | 76.6 | 80.8 | 80.8 | -12.6 | | 4.2 | |
| R10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| R11 | 433.5 | 434.5 | -8 / 52 | 220.0 | 3.0 | 3.0 | | 0.0 | a4 | 3.0 | 7.5 | H | 1.0 | 100.0 | 16.3 | -0.1 | | 0.12 | 0.30 | 80.9 | 100.8 | 100.8 | 75.0 | 80.8 | 80.8 | -14.2 | | 5.8 | |
| R12 | 433.5 | 434.5 | -8 / 52 | 235.0 | 3.0 | 3.0 | | 0.0 | a4 | 3.0 | 7.5 | V | 1.3 | 100.0 | 16.3 | -0.1 | | 0.12 | 0.30 | 82.3 | 100.8 | 100.8 | 76.4 | 80.8 | 80.8 | -12.8 | | 4.4 | |
| # | C1 | C2 | C3 | C4 | C5 | C6 | C7 | C8 | C9 | C10 | C11 | C12 | C13 | C14 | C15 | C16 | C17 | C18 | C19 | C20 | C21 | C22 | C23 | C24 | C25 | C26 | C27 | C28 | C29 |

(ROW) (COLUMN) NOTE:
 R0 C5 MR is Measurement Range, which is reduced from DR to achieve necessary SNR.
 R0 C6 DR is the regulatory Desired Range measurement distance.
 R0 C7 N/F is Near-Field / Far-Field distance computed for max of EUT Antenna Dimension (C10) computed above 1 GHz.
 R0 C8 CF is computed using a 20 dB/decade Decay Rate.
 R0 C17/18 When E-field or EIRP is reported directly from Spectrum Analyzer, Antenna Factors and Cable losses are included directly in SA settings and Pr is not reported.

4.3 Unintentional Emissions

4.3.1 Transmit Chain Spurious Emissions

The results for the measurement of transmit chain spurious emissions at the nominal voltage and temperature are provided in Table 7.

Table 7: Transmit Chain Spurious Emissions.

EUT Modes: a1 CW - KEY IN - Max Button Pop (worst case) a5
 a2 CW - KEY OUT - Max Button Pop (worst case) a6
 Test Date(s): 01/26/22 a3
 Test Engineer: J. Brunett a4 a7 a8

| R0 | Frequency | | Temp. (C) Hum. % | Table Angle deg | Site | | | CF dB | EUT | | | Test Antenna | | | | Cable Kg | Receiver | | | Field Strength @ DR | | | | | EIRP | | Details | | | |
|-----|-----------|----------|------------------|-----------------|-------|-----|-----|-------|-------------|-----------|----------|--------------|-----------------|-----------|-----------|----------|----------------|-----------------|-------|--|-----------|--------------------|-----------|-----------|-------|-------|---------|-------|------------|--------|
| | Start MHz | Stop MHz | | | MR | DR | N/F | | Mode | Volt. (V) | Dim (cm) | Pol. H/V | Ant. Height (m) | Dim. (cm) | Ka (dB/m) | | Rx Power (dBm) | Bandwidth (MHz) | Meas. | Limit USA | Limit CAN | Qpk / Avg (dBuV/m) | Limit USA | Limit CAN | Calc. | Calc. | | Calc. | Worst Case | Orient |
| | | | | | | | | | see table | | | | | | | | | | Pk | Pk | Avg | RBW | VBW | | | | | | | |
| R1 | SETUP | | | | OATSC | | | | CONTI TVMPK | | | EMCOLOG | | | | CAB001 | RSFSV30001 | | | NOTES: H-POL - FLAT, V-POL END Worst Case Orient | | | | | | | | | | |
| R2 | 867.0 | 869.0 | -8 / 52 | 235.0 | 3.0 | 3.0 | | 0.0 | a1 | 3.0 | 8.0 | H | 1.0 | 100.0 | 15.3 | -0.2 | | | 1.02 | 0.30 | 44.1 | 80.8 | 80.8 | 38.2 | 60.8 | 60.8 | -51.1 | | 22.6 | |
| R3 | 867.0 | 869.0 | -8 / 52 | 0.0 | 3.0 | 3.0 | | 0.0 | a1 | 3.0 | 8.0 | V | 1.0 | 100.0 | 15.3 | -0.2 | | | 1.02 | 0.30 | 49.9 | 80.8 | 80.8 | 44.0 | 60.8 | 60.8 | -45.3 | | 16.8 | |
| R4 | SETUP | | | | OATSC | | | | CONTI TVMPK | | | HRNSINGQR | | | | CAB015 | RSFSV30001 | | | NOTES: max all orientations of EUT | | | | | | | | | | |
| R5 | 1300.5 | 1303.5 | -8 / 52 | all | 3.0 | 3.0 | 0.2 | 0.0 | a1 | 3.0 | 8.0 | H/V | all | 15.0 | 22.1 | -2.9 | | | 1.00 | 3.00 | 41.0 | 74.0 | 74.0 | 35.1 | 54.0 | 54.0 | -54.2 | | 18.9 | |
| R6 | 1734.1 | 1737.8 | -8 / 52 | all | 3.0 | 3.0 | 0.3 | 0.0 | a1 | 3.0 | 8.0 | H/V | all | 15.0 | 26.7 | -3.4 | | | 1.00 | 3.00 | 51.2 | 80.8 | 80.8 | 45.3 | 60.8 | 60.8 | -44.0 | | 15.5 | |
| R7 | 2167.7 | 2172.0 | -8 / 52 | all | 3.0 | 3.0 | 0.3 | 0.0 | a1 | 3.0 | 8.0 | H/V | all | 15.0 | 29.6 | -3.9 | | | 1.00 | 3.00 | 44.9 | 80.8 | 80.8 | 39.0 | 60.8 | 60.8 | -50.3 | | 21.8 | |
| R8 | 2601.3 | 2606.3 | -8 / 52 | all | 3.0 | 3.0 | 0.4 | 0.0 | a1 | 3.0 | 8.0 | H/V | all | 15.0 | 31.1 | -4.4 | | | 1.00 | 3.00 | 49.6 | 80.8 | 80.8 | 43.7 | 60.8 | 60.8 | -45.6 | | 17.1 | |
| R9 | 3034.9 | 3040.5 | -8 / 52 | all | 3.0 | 3.0 | 0.5 | 0.0 | a1 | 3.0 | 8.0 | H/V | all | 15.0 | 31.8 | -4.9 | | | 1.00 | 3.00 | 53.8 | 80.8 | 80.8 | 47.9 | 60.8 | 60.8 | -41.4 | | 12.9 | |
| R10 | 3468.4 | 3474.8 | -8 / 52 | all | 3.0 | 3.0 | 0.5 | 0.0 | a1 | 3.0 | 8.0 | H/V | all | 15.0 | 31.9 | -5.4 | | | 1.00 | 3.00 | 54.6 | 80.8 | 80.8 | 48.7 | 60.8 | 60.8 | -40.6 | | 12.1 | |
| R11 | 3902.0 | 3909.0 | -8 / 52 | all | 3.0 | 3.0 | 0.6 | 0.0 | a1 | 3.0 | 8.0 | H/V | all | 15.0 | 32.0 | -5.9 | | | 1.00 | 3.00 | 54.7 | 74.0 | 74.0 | 48.8 | 54.0 | 54.0 | -40.5 | | 5.2 | |
| R12 | 4335.6 | 4343.3 | -8 / 52 | all | 3.0 | 3.0 | 0.7 | 0.0 | a1 | 4.0 | 8.0 | H/V | all | 15.0 | 32.3 | -6.3 | | | 1.00 | 3.00 | 44.9 | 74.0 | 74.0 | 39.0 | 54.0 | 54.0 | -50.3 | | 15.0 | |
| R13 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| R14 | SETUP | | | | OATSC | | | | CONTI TVMPK | | | EMCOLOG | | | | CAB001 | RSFSV30001 | | | NOTES: H-POL - FLAT, V-POL END Worst Case Orient | | | | | | | | | | |
| R15 | 867.0 | 869.0 | -8 / 52 | 235.0 | 3.0 | 3.0 | | 0.0 | a2 | 3.0 | 8.0 | H | 1.0 | 100.0 | 15.3 | -0.2 | | | 1.02 | 0.30 | 43.5 | 80.8 | 80.8 | 37.6 | 60.8 | 60.8 | -51.7 | | 23.2 | |
| R16 | 867.0 | 869.0 | -8 / 52 | 0.0 | 3.0 | 3.0 | | 0.0 | a2 | 3.0 | 8.0 | V | 1.0 | 100.0 | 15.3 | -0.2 | | | 1.02 | 0.30 | 49.7 | 80.8 | 80.8 | 43.8 | 60.8 | 60.8 | -45.5 | | 17.0 | |
| R17 | SETUP | | | | OATSC | | | | CONTI TVMPK | | | HRNSINGQR | | | | CAB015 | RSFSV30001 | | | NOTES: max all orientations of EUT | | | | | | | | | | |
| R18 | 1300.5 | 1303.5 | -8 / 52 | all | 3.0 | 3.0 | 0.2 | 0.0 | a2 | 3.0 | 8.0 | H/V | all | 15.0 | 22.1 | -2.9 | | | 1.00 | 3.00 | 34.0 | 74.0 | 74.0 | 28.2 | 54.0 | 54.0 | -61.2 | | 25.8 | |
| R19 | 1734.1 | 1737.8 | -8 / 52 | all | 3.0 | 3.0 | 0.3 | 0.0 | a2 | 3.0 | 8.0 | H/V | all | 15.0 | 26.7 | -3.4 | | | 1.00 | 3.00 | 59.3 | 80.8 | 80.8 | 53.4 | 60.8 | 60.8 | -35.9 | | 7.4 | |
| R20 | 2167.7 | 2172.0 | -8 / 52 | all | 3.0 | 3.0 | 0.3 | 0.0 | a2 | 3.0 | 8.0 | H/V | all | 15.0 | 29.6 | -3.9 | | | 1.00 | 3.00 | 44.2 | 80.8 | 80.8 | 38.3 | 60.8 | 60.8 | -51.0 | | 22.5 | |
| R21 | 2601.3 | 2606.3 | -8 / 52 | all | 3.0 | 3.0 | 0.4 | 0.0 | a2 | 3.0 | 8.0 | H/V | all | 15.0 | 31.1 | -4.4 | | | 1.00 | 3.00 | 47.3 | 80.8 | 80.8 | 41.4 | 60.8 | 60.8 | -47.9 | | 19.4 | |
| R22 | 3034.9 | 3040.5 | -8 / 52 | all | 3.0 | 3.0 | 0.5 | 0.0 | a2 | 3.0 | 8.0 | H/V | all | 15.0 | 31.8 | -4.9 | | | 1.00 | 3.00 | 52.5 | 80.8 | 80.8 | 46.6 | 60.8 | 60.8 | -42.7 | | 14.2 | |
| R23 | 3468.4 | 3474.8 | -8 / 52 | all | 3.0 | 3.0 | 0.5 | 0.0 | a2 | 3.0 | 8.0 | H/V | all | 15.0 | 31.9 | -5.4 | | | 1.00 | 3.00 | 55.6 | 80.8 | 80.8 | 49.7 | 60.8 | 60.8 | -39.6 | | 11.1 | |
| R24 | 3902.0 | 3909.0 | -8 / 52 | all | 3.0 | 3.0 | 0.6 | 0.0 | a2 | 3.0 | 8.0 | H/V | all | 15.0 | 32.0 | -5.9 | | | 1.00 | 3.00 | 54.1 | 74.0 | 74.0 | 48.2 | 54.0 | 54.0 | -41.1 | | 5.8 | |
| R25 | 4335.6 | 4343.3 | -8 / 52 | all | 3.0 | 3.0 | 0.7 | 0.0 | a2 | 4.0 | 8.0 | H/V | all | 15.0 | 32.3 | -6.3 | | | 1.00 | 3.00 | 43.2 | 74.0 | 74.0 | 37.3 | 54.0 | 54.0 | -52.0 | | 16.7 | |
| R26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

(ROW) C1 (COLUMN) C2 (COLUMN) C3 (COLUMN) C4 (COLUMN) C5 (COLUMN) C6 (COLUMN) C7 (COLUMN) C8 (COLUMN) C9 (COLUMN) C10 (COLUMN) C11 (COLUMN) C12 (COLUMN) C13 (COLUMN) C14 (COLUMN) C15 (COLUMN) C16 (COLUMN) C17 (COLUMN) C18 (COLUMN) C19 (COLUMN) C20 (COLUMN) C21 (COLUMN) C22 (COLUMN) C23 (COLUMN) C24 (COLUMN) C25 (COLUMN) C26 (COLUMN) C27 (COLUMN) C28 (COLUMN) C29 (COLUMN)

NOTE:
 R0 C5 MR is Measurement Range, which is reduced from DR to achieve necessary SNR.
 R0 C6 DR is the regulatory Desired Range measurement distance.
 R0 C7 NF is Near-Field / Far-Field distance computed for max of EUT Antenna Dimension (C10) computed above 1 GHz.
 R0 C8 CF is computed using a 20 dB/decade Decay Rate.
 R0 C17/18 When E-field or EIRP is reported directly from Spectrum Analyzer, Antenna Factors and Cable losses are included directly in SA settings and Pr is not reported.
 R3/R16 C21 Measured signal was background noise.

4.3.2 Radiated Digital Spurious

The results for the measurement of digital spurious emissions are not reported herein as all digital emissions were greater than 20 dB below the regulatory limit. Radiation from digital components was measured to 1 GHz, or to five times the maximum digital component operating frequency, whichever is greater.

5 Measurement Uncertainty and Accreditation Documents

The maximum values of measurement uncertainty for the laboratory test equipment and facilities associated with each test are given in the table below. This uncertainty is computed for a 95.45% confidence level based on a coverage factor of $k = 2$.

Table 8: Measurement Uncertainty.

| Measured Parameter | Measurement Uncertainty [†] |
|--|---|
| Radio Frequency | $\pm(f_{Mkr}/10^7 + RBW/10 + (SPN/(PTS - 1))/2 + 1 \text{ Hz})$ |
| Conducted Emm. Amplitude | $\pm 1.9 \text{ dB}$ |
| Radiated Emm. Amplitude ($f < 30 \text{ MHz}$) | $\pm 3.1 \text{ dB}$ |
| Radiated Emm. Amplitude (30 – 200 MHz) | $\pm 4.0 \text{ dB}$ |
| Radiated Emm. Amplitude (200 – 1000 MHz) | $\pm 5.2 \text{ dB}$ |
| Radiated Emm. Amplitude ($f > 1000 \text{ MHz}$) | $\pm 3.7 \text{ dB}$ |

[†]Ref: CISPR 16-4-2:2011+A1:2014



Figure 7: Accreditation Documents