



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Z-com,. Inc
Applicant Address	7F-2, No. 9. Prosperity RD.I Science-Based Industrial, Park Hsinchu, 300 Taiwan
FCC ID	M4Y-XG-623
Manufacturer's company	Z-Com, Inc.
Manufacturer Address	7F-2, No. 9. Prosperity RD.I Science-Based Industrial, Park Hsinchu, 300 Taiwan

Product Name	802.11b/g Wireless mini-PCI Module
Brand Name	ZCOM
Model Name	XG-623
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Receive Date	Jun. 13, 2006
Final Test Date	Jul. 8, 2006



Statement

Test result included is only for the 802.11b/g part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



1190
ILAC MRA

Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	3
3.4. Table for Carrier Frequencies	4
3.5. Table for Test Modes	4
3.6. Table for Testing Locations.....	5
3.7. Table for Supporting Units	5
3.8. Table for Parameters of Test Software Setting	5
3.9. Test Configurations	6
4. TEST RESULT	8
4.1. AC Power Line Conducted Emissions Measurement.....	8
4.2. Maximum Peak Output Power Measurement	12
4.3. Power Spectral Density Measurement	14
4.4. 6dB Spectrum Bandwidth Measurement	19
4.5. Radiated Emissions Measurement	24
4.6. Band Edge Emissions Measurement	42
4.7. Antenna Requirements	49
5. LIST OF MEASURING EQUIPMENTS	50
6. SPORTON COMPANY PROFILE	52
6.1. Test Location.....	52
7. CNLA CERTIFICATE OF ACCREDITATION	53
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A4
APPENDIX B. TEST PHOTOS.....	B1 ~ B7
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~C3



History of This Test Report

Original Issue Date: Jul. 8, 2006

Report No.: FR661307

No additional attachment.

Additional attachment were issued as following record:

Attachment No.	Issue Date	Description



1. CERTIFICATE OF COMPLIANCE

Product Name : 802.11b/g Wireless mini-PCI Module
Brand Name : ZCOM
Model Name : XG-623
Applicant : Z-com., Inc
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jun. 13, 2006 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

<u>Mandy Liang 10.7.2006</u>	<u>Steven Lu 10.2.2006</u>	<u>Alex Chen July 10, 2006</u>
Prepared By:	Tested By:	Reviewed By:
Mandy Liang / Specialist	Steven Lu / Engineer	Alex Chen / Manager

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	10.79 dB
4.2	15.247(b)(3)	Maximum Peak Conducted Output Power	Complies	10.23 dB
4.3	15.247(e)	Power Spectral Density	Complies	0.18 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	1.30 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.90 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	$\pm 2.26\text{dB}$	Confidence levels of 95%
Maximum Peak Conducted Output Power	$\pm 0.5\text{dB}$	Confidence levels of 95%
Power Spectral Density	$\pm 0.71\text{dB}$	Confidence levels of 95%
6dB Spectrum Bandwidth	$\pm 6.25 \times 10^{-7}$	Confidence levels of 95%
Radiated Emissions/ Band Edge Emissions	$\pm 3.72\text{dB}$	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Power Type	Host (Notebook)
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 15.56 MHz ; 11g: 16.52 MHz
Conducted Output Power	11b: 16.88 dBm ; 11g: 19.77 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	WANSHIH	SAW-0008A	Dipole Antenna	Reversed-SMA	2.0

With EMI core Brand name : King core

Model name : K5BT (10*4*6)

3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	11 Mbps	6	1
Maximum Peak Conducted Output Power Power Spectral Density 6dB Spectrum Bandwidth	11b/BPSK	1 Mbps	1/6/11	NA
	11g/BPSK	6 Mbps	1/6/11	NA
Radiated Emissions 9kHz~1GHz	11g/BPSK	6 Mbps	6	1
Radiated Emissions 1GHz~10 th Harmonic	11b/BPSK	1 Mbps	1/6/11	1
	11g/BPSK	6 Mbps	1/6/11	1
Band Edge Emissions	11b/BPSK	1 Mbps	1/11	1
	11g/BPSK	6 Mbps	1/11	1

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	PP01L	DoC
Printer	EPSON	LQ-300	DoC
Modem	ACEEX	DM-1414	IFAXDM1414

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11b/g

Test Software Version	DutApiCf8385p		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	17	17	17
IEEE 802.11g	15	15	15

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The NB sends " H " messages to the panel, and the panel displays " H " patterns on the screen.
- c. The NB sends " H " messages to the printer, then the printer prints them on the paper.
- d. The PC sends " H " messages to the modem.


At the same time, the following programs was executed:

At the same time, "DutApiCf8385p" was executed the test program to control the EUT continuously transmitter RF signal.


3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration


Test Configuration: 30MHz~1GHz

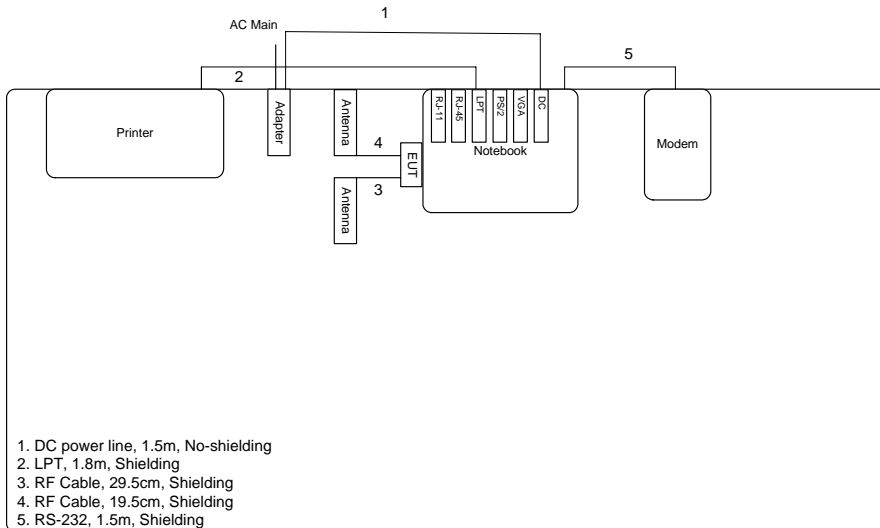

Test Configuration: Above 1GHz

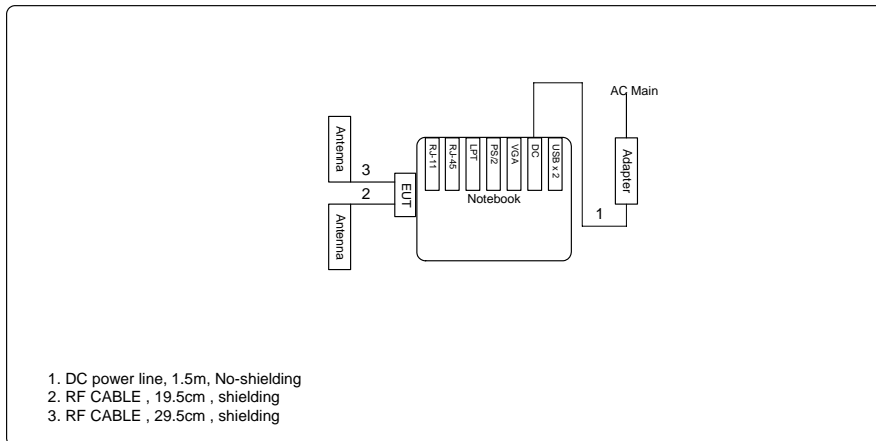

3.9.2. AC Power Line Conduction Emissions Test Configuration

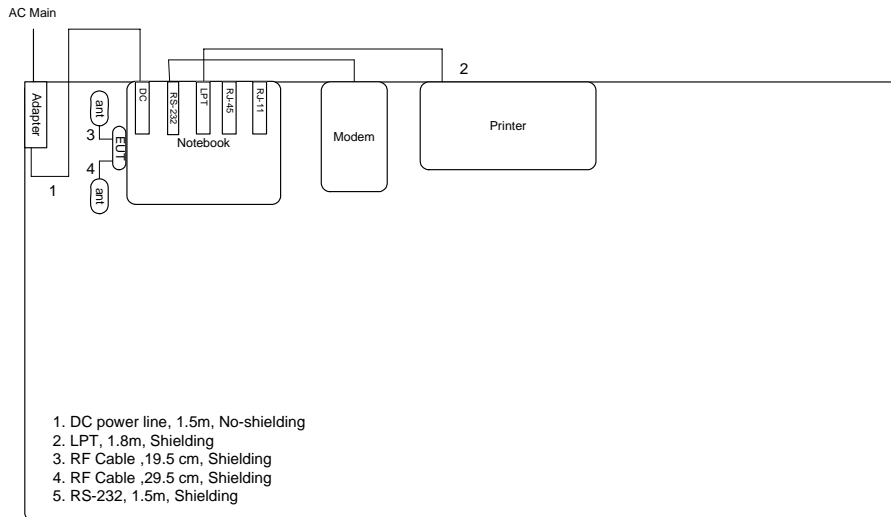

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

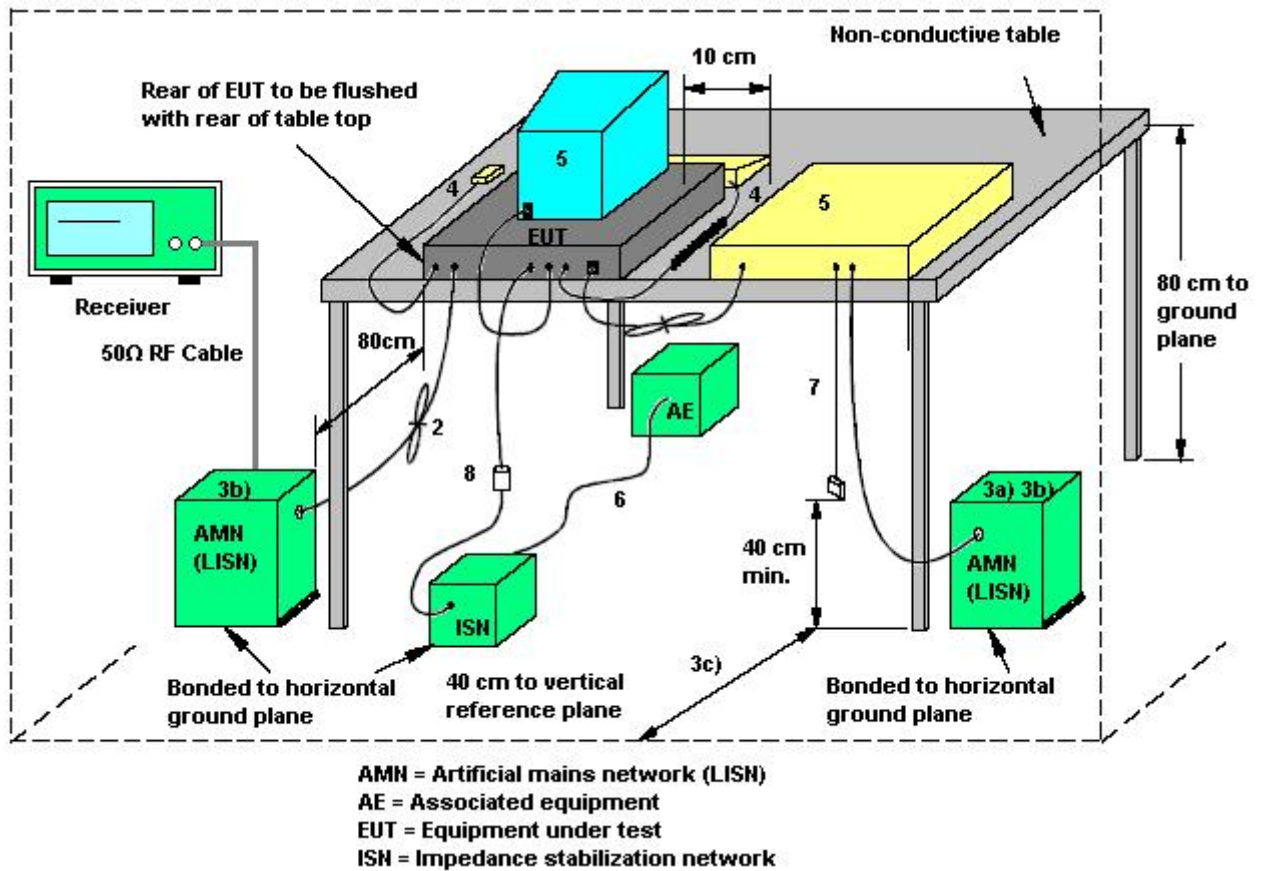

1. If cables, which hang closer than 40 cm to the horizontal metal groundplane, cannot be shortened to appropriate length, the excess shall be folded back and forth forming a bundle 30 cm to 40 cm long.
2. Excess mains cord shall be bundled in the centre or shortened to appropriate length.
3. EUT is connected to one artificial mains network (AMN). All AMNs and ISNs may alternatively be connected to a vertical reference plane or metal wall.
4. All other units of a system are powered from a second AMN. A multiple outlet strip can be used for multiple mains cords.
5. AMN and ISN are 80 cm from the EUT and at least 80 cm from other units and other metal planes.
6. Mains cords and signal cables shall be positioned for their entire lengths, as far as possible, at 40 cm from the vertical reference plane.
7. Cables of hand operated devices, such as keyboards, mice, etc. shall be placed as for normal usage.
8. Peripherals shall be placed at a distance of 10 cm from each other and from the controller, except for the monitor which, if this is an acceptable installation practice, shall be placed directly on the top of the controller.
9. I/O signal cable intended for external connection.
10. The end of the I/O signal cables which are not connected to an AE may be terminated, if required, using correct terminating impedance.
11. If used, the current probe shall be placed at 0,1 m from the ISN.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	26°C	Humidity	65%
Test Engineer	Beck Wu	Phase	Line
Configuration	Normal Link		

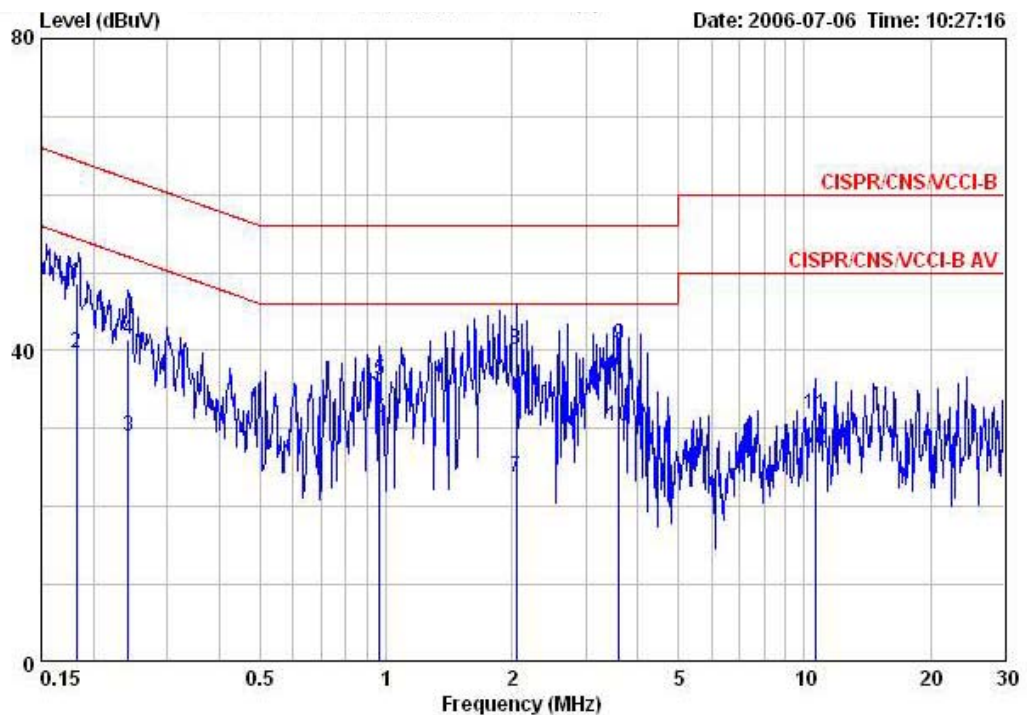

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.18183	48.54	-15.86	64.40	46.75	1.59	0.20	QP
2	0.18183	39.61	-14.79	54.40	37.82	1.59	0.20	AVERAGE
3	0.24165	28.98	-23.06	52.04	27.79	0.99	0.20	AVERAGE
4	0.24165	41.36	-20.68	62.04	40.17	0.99	0.20	QP
5	0.96328	36.26	-19.74	56.00	35.76	0.30	0.20	QP
6	0.96328	31.45	-14.55	46.00	30.95	0.30	0.20	AVERAGE
7	2.049	23.80	-22.20	46.00	23.30	0.30	0.20	AVERAGE
8	2.049	40.16	-15.84	56.00	39.66	0.30	0.20	QP
9	3.613	40.86	-15.14	56.00	40.24	0.32	0.30	QP
10	3.613	30.37	-15.63	46.00	29.75	0.32	0.30	AVERAGE
11	10.658	31.93	-28.07	60.00	31.20	0.33	0.40	QP
12	10.658	27.42	-22.58	50.00	26.69	0.33	0.40	AVERAGE

Temperature	26°C	Humidity	65%
Test Engineer	Beck Wu	Phase	Neutral
Configuration	Normal Link		

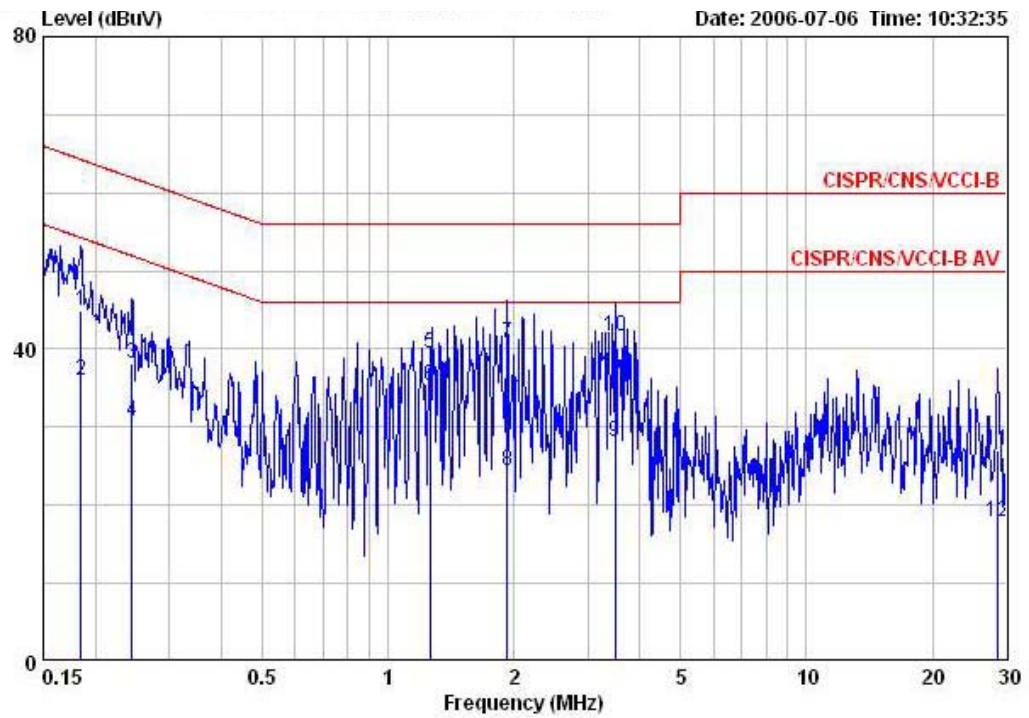

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.18443	44.95	-19.33	64.28	43.48	1.27	0.20	QP
2	0.18443	36.01	-18.27	54.28	34.54	1.27	0.20	AVERAGE
3	0.24422	38.18	-23.77	61.95	37.12	0.86	0.20	QP
4	0.24422	30.65	-21.30	51.95	29.59	0.86	0.20	AVERAGE
5	1.261	39.39	-16.61	56.00	38.95	0.30	0.14	QP
6	1.261	35.21	-10.79	46.00	34.77	0.30	0.14	AVERAGE
7	1.924	40.80	-15.20	56.00	40.40	0.21	0.19	QP
8	1.924	24.43	-21.57	46.00	24.03	0.21	0.19	AVERAGE
9	3.485	28.13	-17.87	46.00	27.53	0.30	0.30	AVERAGE
10	3.485	41.67	-14.33	56.00	41.07	0.30	0.30	QP
11	28.603	26.96	-33.05	60.00	26.03	0.33	0.60	QP
12	28.603	17.80	-32.21	50.00	16.87	0.33	0.60	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Peak Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	NRV-Z32 (model 04)

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

4.2.4. Test Setup Layout

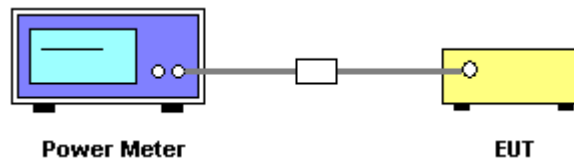

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Peak Output Power

Temperature	24°C	Humidity	64%
Test Engineer	Beck Wu	Configurations	802.11b/g

Configuration IEEE 802.11b

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.79	30.00	Complies
6	2437 MHz	16.88	30.00	Complies
11	2462 MHz	16.71	30.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.63	30.00	Complies
6	2437 MHz	19.72	30.00	Complies
11	2462 MHz	19.77	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.

4.3.4. Test Setup Layout

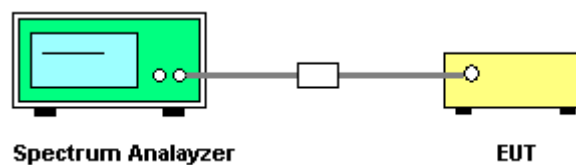

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	24°C	Humidity	64%
Test Engineer	Beck Wu	Configurations	802.11b/g


Configuration IEEE 802.11b

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-7.82	8.00	Complies
6	2437 MHz	-8.94	8.00	Complies
11	2462 MHz	-8.50	8.00	Complies

Configuration IEEE 802.11g


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-12.01	8.00	Complies
6	2437 MHz	-11.31	8.00	Complies
11	2462 MHz	-11.02	8.00	Complies

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz

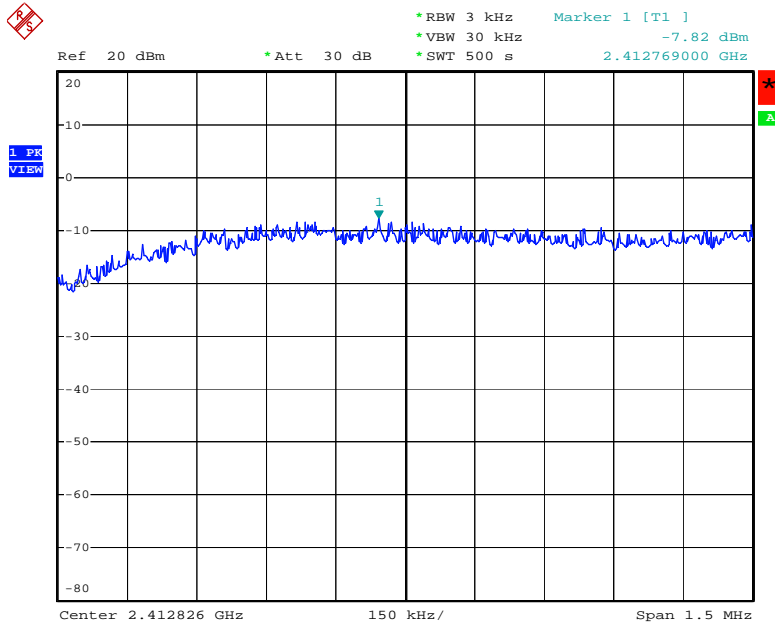


Date: 7.JUL.2006 17:54:27

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz

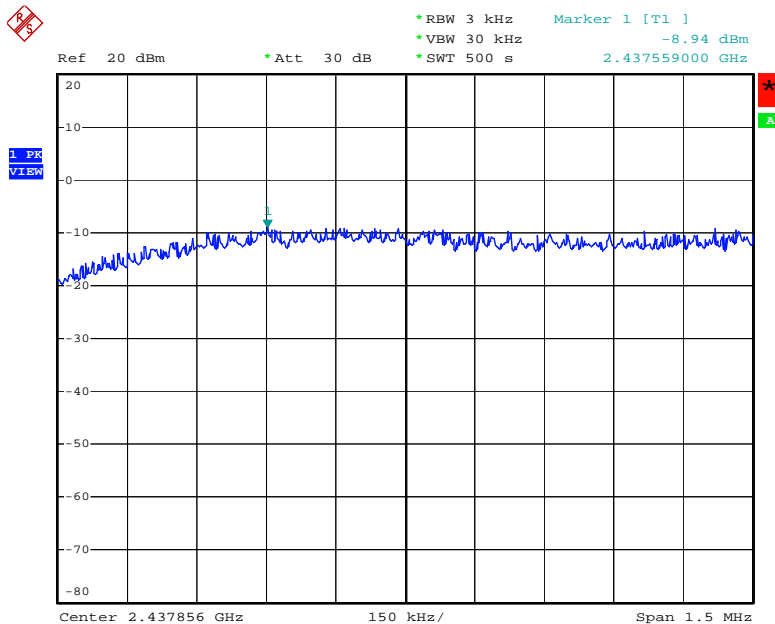


Date: 7.JUL.2006 17:55:16

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz

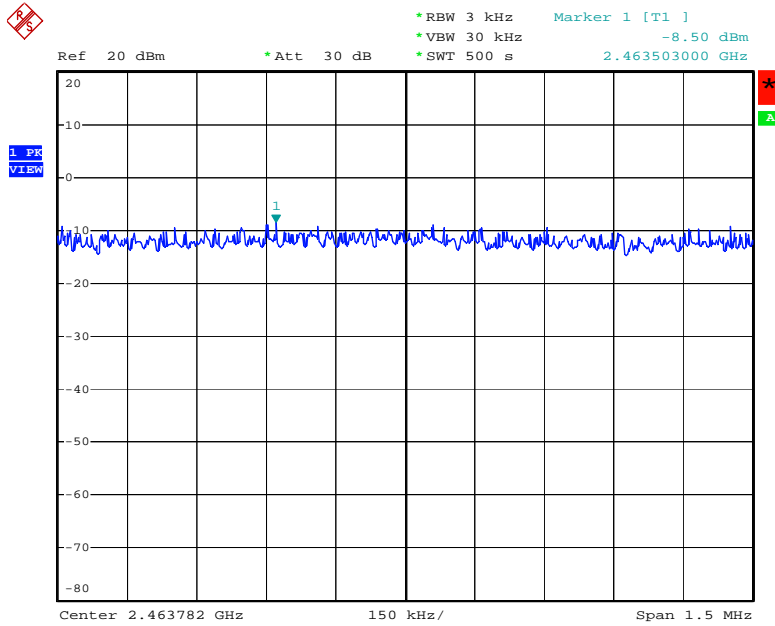


Date: 7.JUL.2006 17:56:07

Power Density Plot on Configuration IEEE 802.11g / 2412 MHz

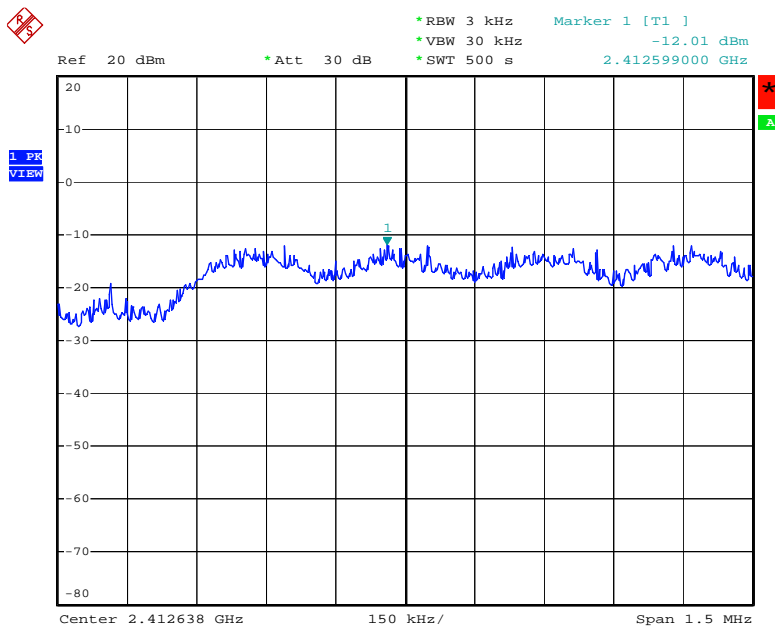


Date: 7.JUL.2006 17:57:47

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz

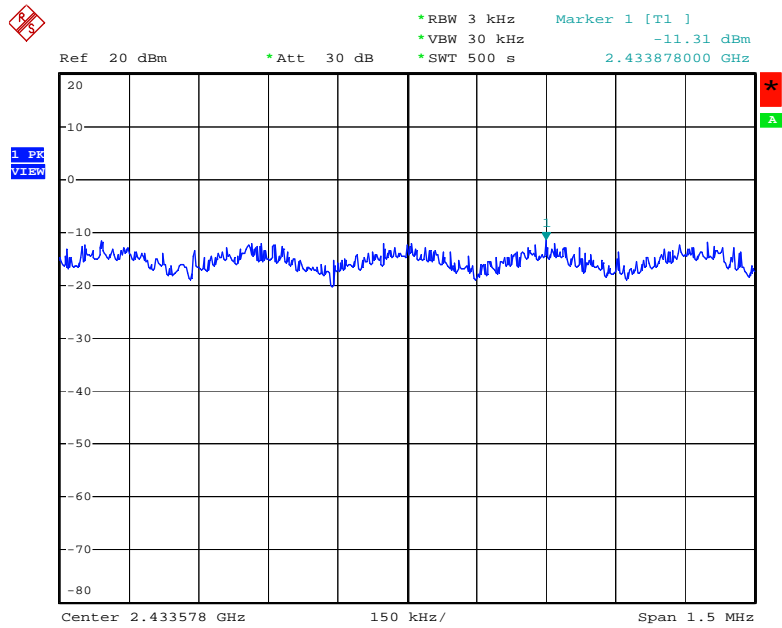

Date: 7.JUL.2006 18:01:58

Power Density Plot on Configuration IEEE 802.11g / 2462 MHz

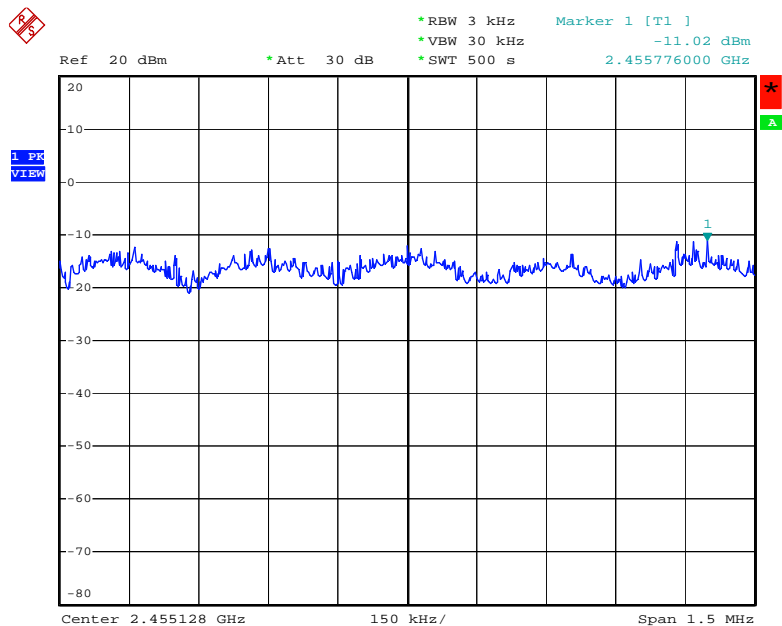

Date: 7.JUL.2006 18:03:55

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

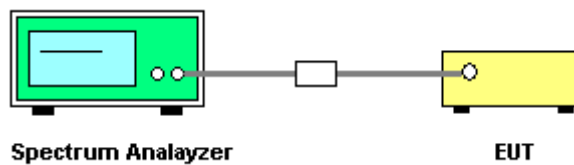

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	24°C	Humidity	64%
Test Engineer	Beck Wu	Configurations	802.11b/g


Configuration IEEE 802.11b

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	10.80	15.48	500	Complies
6	2437 MHz	10.16	15.52	500	Complies
11	2462 MHz	11.12	15.56	500	Complies

Configuration IEEE 802.11g


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.40	16.52	500	Complies
6	2437 MHz	16.40	16.52	500	Complies
11	2462 MHz	16.40	16.48	500	Complies

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz

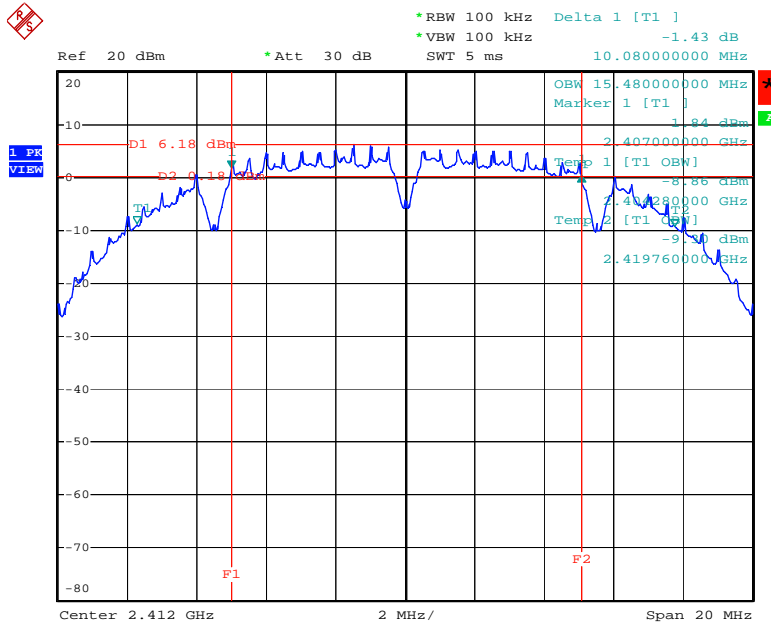


Date: 7.JUL.2006 17:28:55

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz

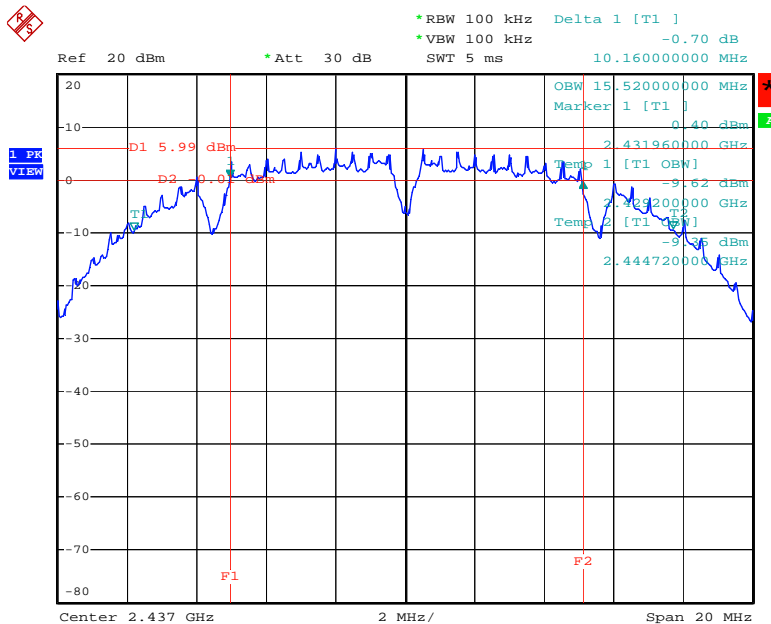


Date: 7.JUL.2006 17:21:57

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz

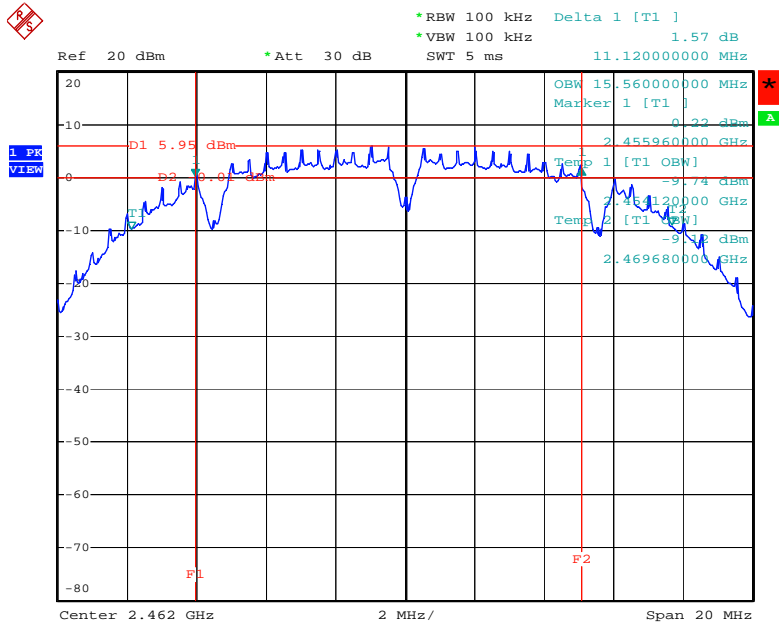


Date: 7.JUL.2006 17:23:24

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz

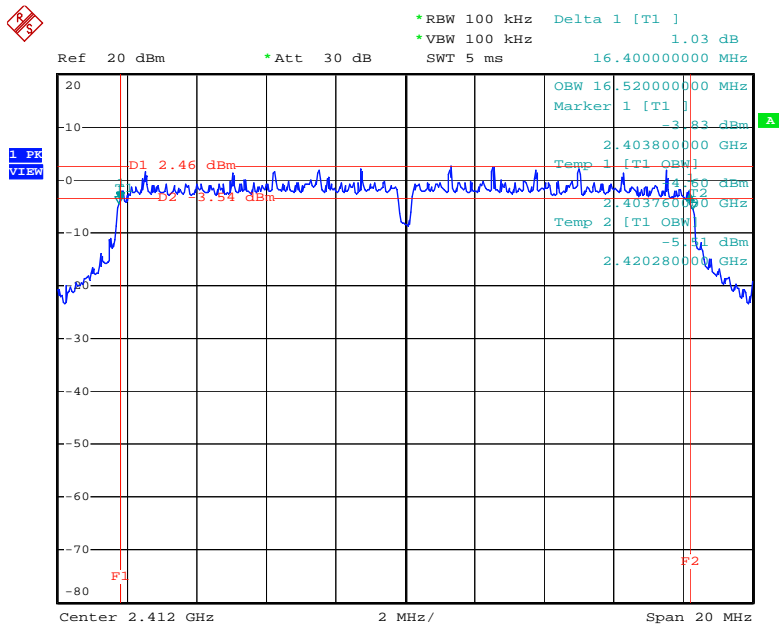


Date: 7.JUL.2006 17:59:06

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz

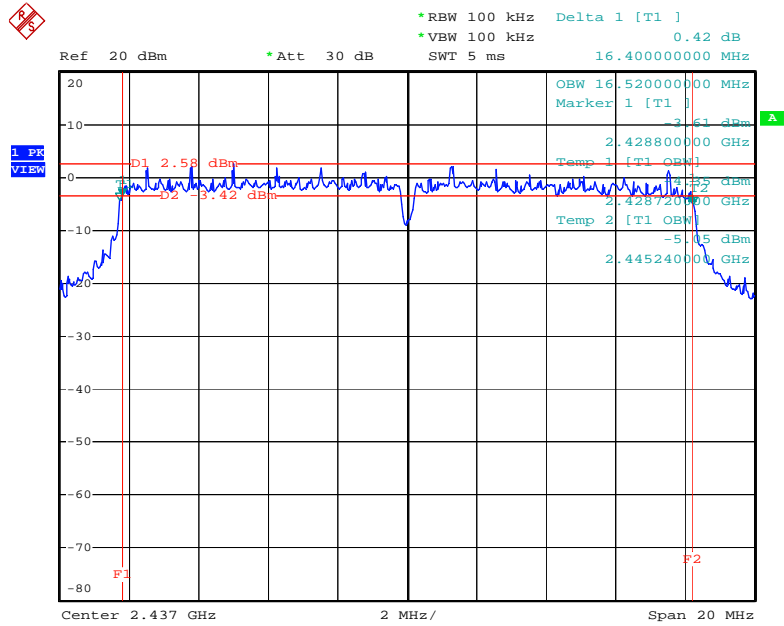

Date: 7.JUL.2006 18:01:10

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz

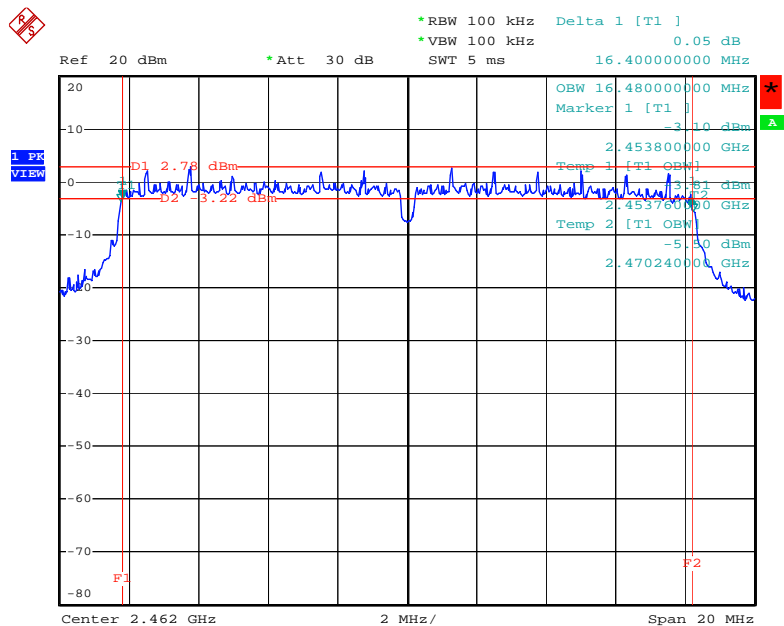

Date: 7.JUL.2006 18:03:06

4.5. Radiated Emissions Measurement

4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	100KHz / 100KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

For radiated emissions below 30MHz

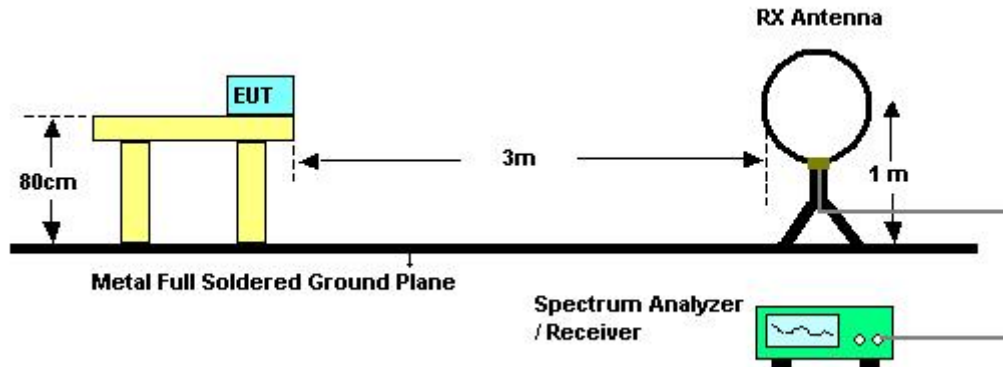

For radiated emissions above 30MHz

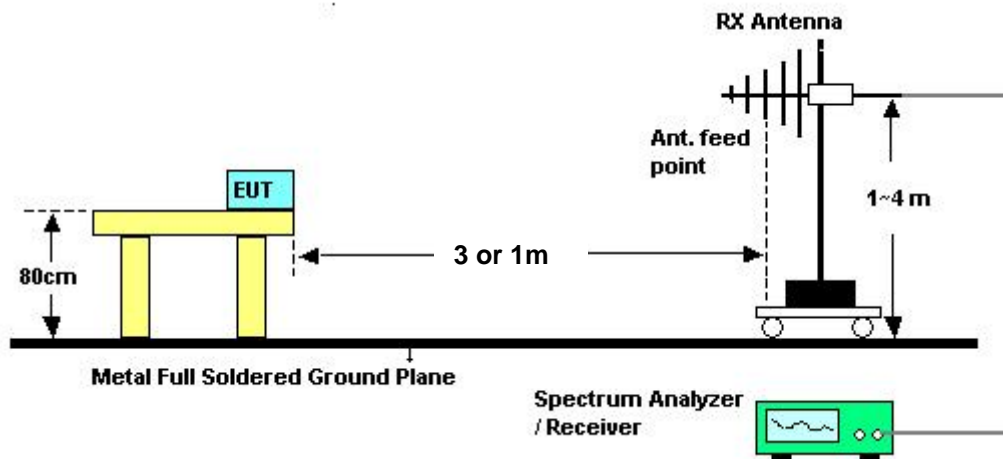

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	65%
Test Engineer	Beck Wu	Configurations	802.11g Channel 6

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26°C	Humidity	65%
Test Engineer	Beck Wu	Configurations	802.11g Channel 6

Vertical

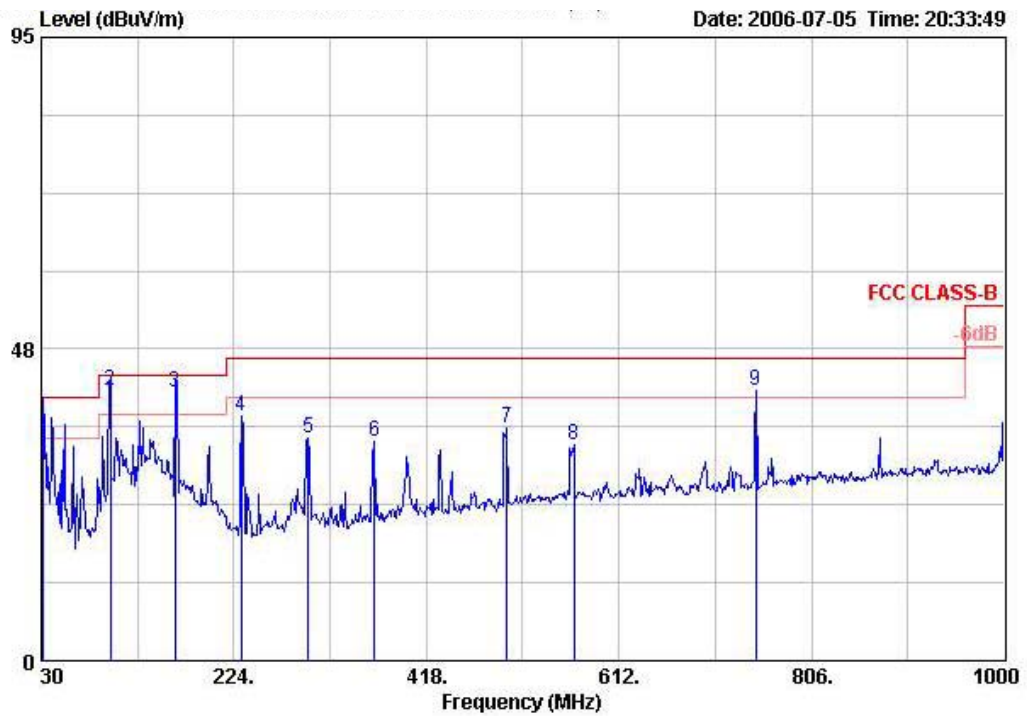

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1 !	31.940	36.92	-3.08	40.00	49.00	18.66	0.93	31.67	QP	VERTICAL	3
2 !	99.840	41.10	-2.40	43.50	60.11	11.20	1.50	31.71	QP	VERTICAL	3
3 !	164.830	40.91	-2.59	43.50	60.00	10.45	2.00	31.54	QP	VERTICAL	3
4	231.760	37.20	-8.80	46.00	55.08	11.30	2.21	31.38	Peak	VERTICAL	3
5	298.690	33.99	-12.01	46.00	49.10	13.98	2.23	31.32	Peak	VERTICAL	3
6	365.620	33.37	-12.63	46.00	46.28	15.78	2.49	31.17	Peak	VERTICAL	3
7	499.480	35.54	-10.46	46.00	45.31	17.89	3.28	30.94	Peak	VERTICAL	3
8	566.410	32.95	-13.05	46.00	41.57	18.97	3.17	30.75	Peak	VERTICAL	3
9 !	749.740	41.26	-4.74	46.00	47.33	20.30	3.90	30.27	Peak	VERTICAL	3

Horizontal

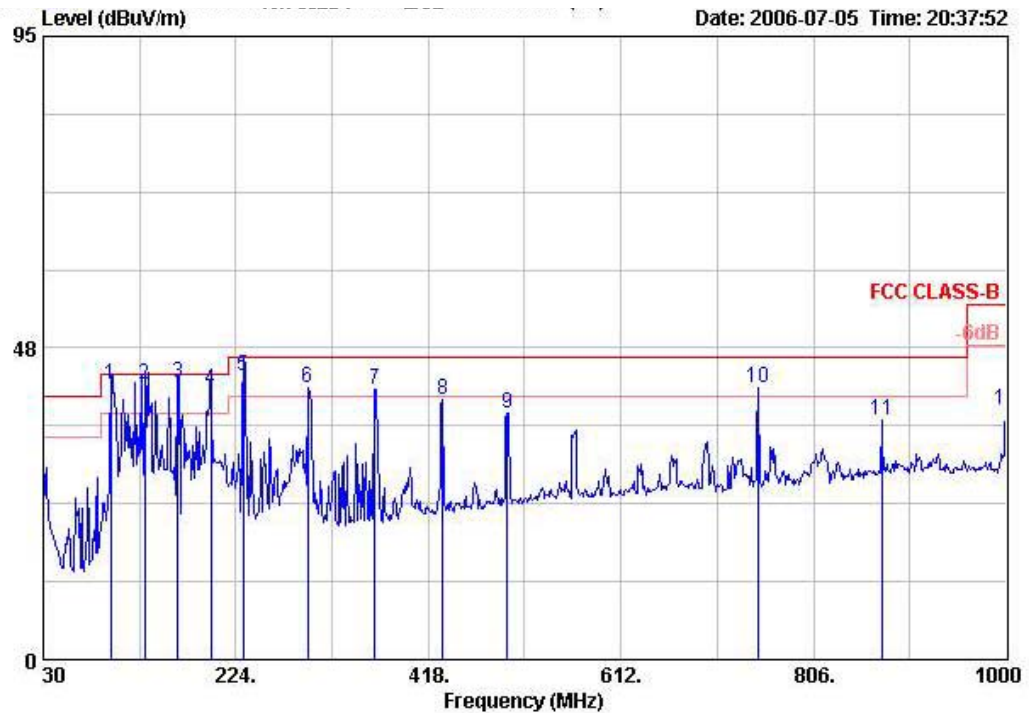

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1 !	97.900	42.02	-1.48	43.50	61.41	10.84	1.50	31.73	QP	HORIZONTAL	3
2 !	131.850	41.89	-1.61	43.50	59.48	12.36	1.70	31.65	QP	HORIZONTAL	3
3 [P]	165.800	42.20	-1.30	43.50	61.33	10.42	2.00	31.55	QP	HORIZONTAL	3
4 !	198.780	41.25	-2.25	43.50	60.56	10.14	2.00	31.45	QP	HORIZONTAL	3
5 !	231.760	43.35	-2.65	46.00	61.22	11.30	2.21	31.38	QP	HORIZONTAL	3
6 !	296.750	41.39	-4.61	46.00	56.51	13.94	2.26	31.32	Peak	HORIZONTAL	3
7 !	363.680	41.12	-4.88	46.00	54.09	15.73	2.48	31.18	Peak	HORIZONTAL	3
8	432.550	39.68	-6.32	46.00	50.82	16.99	2.83	30.96	Peak	HORIZONTAL	3
9	497.540	37.65	-8.35	46.00	47.46	17.86	3.27	30.94	Peak	HORIZONTAL	3
10 !	749.740	41.55	-4.45	46.00	47.62	20.30	3.90	30.27	Peak	HORIZONTAL	3
11	874.870	36.57	-9.43	46.00	40.97	21.45	4.05	29.91	Peak	HORIZONTAL	3
12	1000.000	38.17	-15.83	54.00	41.44	22.10	4.00	29.37	Peak	HORIZONTAL	3

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Pol. : V is Vertical Polarization ; H is Horizontal Polarization.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)


Temperature	26°C	Humidity	65%
Test Engineer	Beck Wu	Configurations	802.11b Channel 1

Vertical

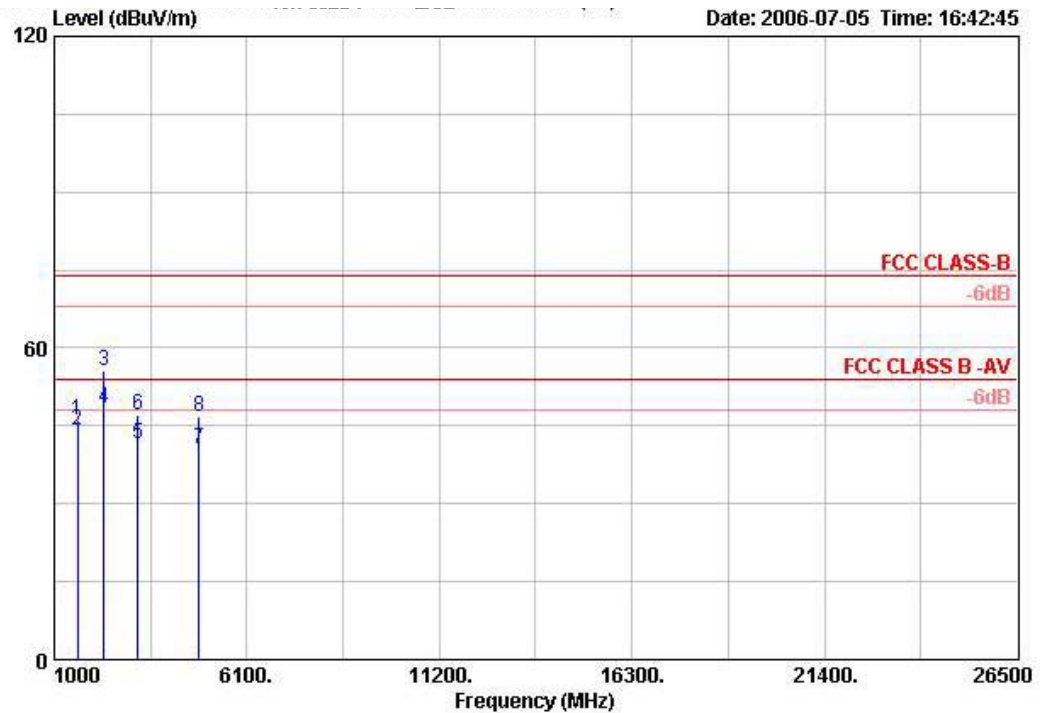

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark	Pol/Phase	Distance
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor			m
			dB	dBuV/m	dBuV	dB	dB			
1	1608.008	45.94	-28.06	74.00	52.36	26.02	2.28	34.72 PEAK	VERTICAL	3
2	1608.008	44.04	-9.96	54.00	50.46	26.02	2.28	34.72 AVERAGE	VERTICAL	3
3	2320.080	55.63	-18.37	74.00	59.19	28.79	2.71	35.07 PEAK	VERTICAL	3
4 !	2320.080	48.35	-5.65	54.00	51.92	28.79	2.71	35.07 AVERAGE	VERTICAL	3
5	3216.008	41.68	-12.32	54.00	42.77	30.87	3.15	35.12 AVERAGE	VERTICAL	3
6	3216.008	46.97	-27.03	74.00	48.06	30.87	3.15	35.12 PEAK	VERTICAL	3
7	4823.990	40.45	-13.55	54.00	38.49	32.83	4.30	35.16 AVERAGE	VERTICAL	3
8	4823.990	46.87	-27.13	74.00	44.90	32.83	4.30	35.16 PEAK	VERTICAL	3

Horizontal

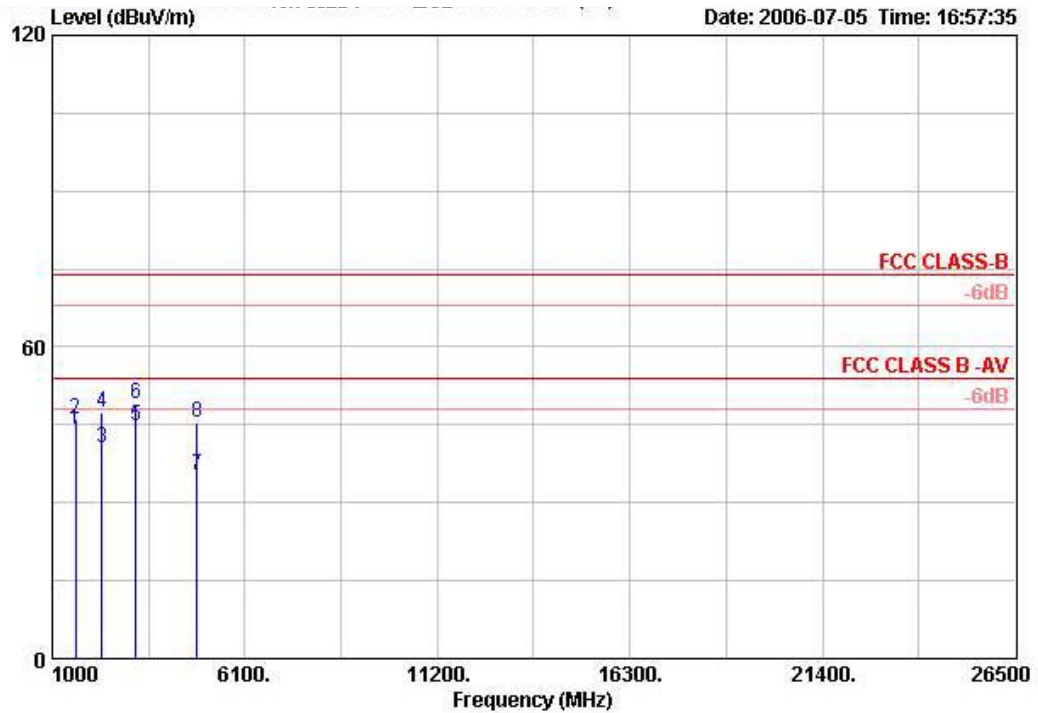


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	1608.072	44.01	-9.99	54.00	50.42	26.02	2.28	34.72	AVERAGE	HORIZONTAL	3
2	1608.072	46.03	-27.97	74.00	52.44	26.02	2.28	34.72	PEAK	HORIZONTAL	3
3	2320.012	40.43	-13.57	54.00	44.00	28.79	2.71	35.07	AVERAGE	HORIZONTAL	3
4	2320.012	47.46	-26.54	74.00	51.03	28.79	2.71	35.07	PEAK	HORIZONTAL	3
5	3216.008	44.82	-9.18	54.00	45.91	30.87	3.15	35.12	AVERAGE	HORIZONTAL	3
6	3216.008	48.92	-25.08	74.00	50.01	30.87	3.15	35.12	PEAK	HORIZONTAL	3
7	4823.958	35.45	-18.55	54.00	33.49	32.83	4.30	35.16	AVERAGE	HORIZONTAL	3
8	4823.958	45.44	-28.56	74.00	43.47	32.83	4.30	35.16	PEAK	HORIZONTAL	3




Temperature	26°C	Humidity	65%
Test Engineer	Beck Wu	Configurations	802.11b Channel 6

Vertical

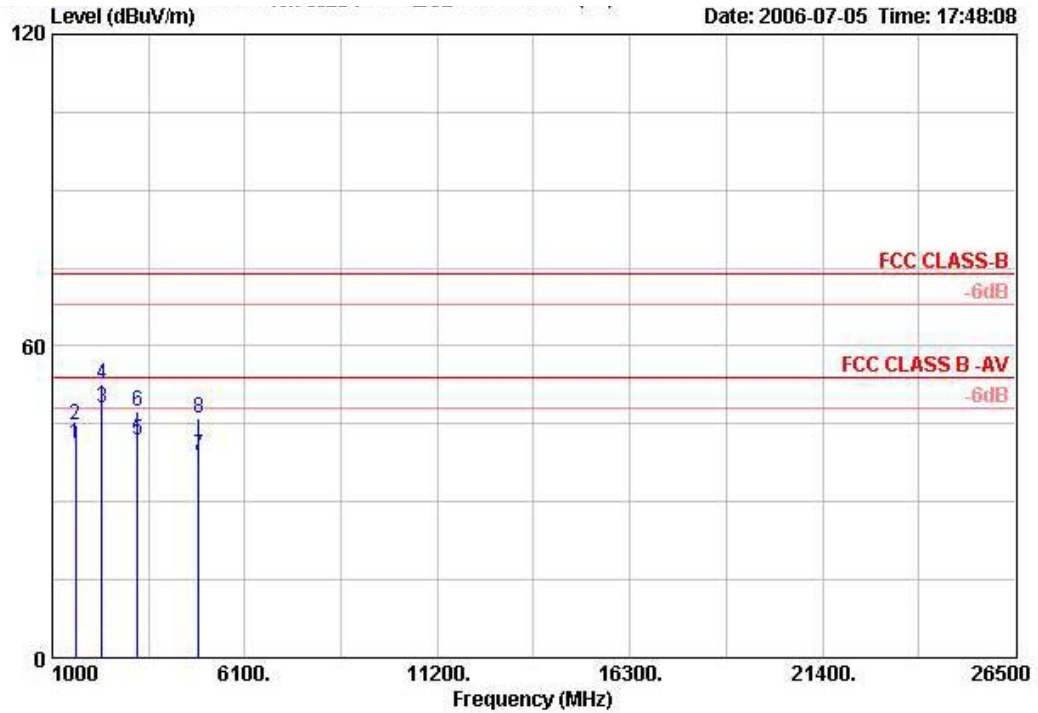

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	1624.672	41.15	-12.85	54.00	47.46	26.13	2.28	34.72	AVERAGE	VERTICAL	3
2	1624.672	44.90	-29.10	74.00	51.22	26.13	2.28	34.72	PEAK	VERTICAL	3
3	2320.020	48.01	-5.99	54.00	51.58	28.79	2.71	35.07	AVERAGE	VERTICAL	3
4	2320.020	52.64	-21.36	74.00	56.20	28.79	2.71	35.07	PEAK	VERTICAL	3
5	3249.344	41.82	-12.18	54.00	42.85	30.93	3.15	35.12	AVERAGE	VERTICAL	3
6	3249.344	47.26	-26.74	74.00	48.29	30.93	3.15	35.12	PEAK	VERTICAL	3
7	4873.968	39.05	-14.95	54.00	37.03	32.88	4.30	35.15	AVERAGE	VERTICAL	3
8	4873.968	46.03	-27.97	74.00	44.01	32.88	4.30	35.15	PEAK	VERTICAL	3


Horizontal

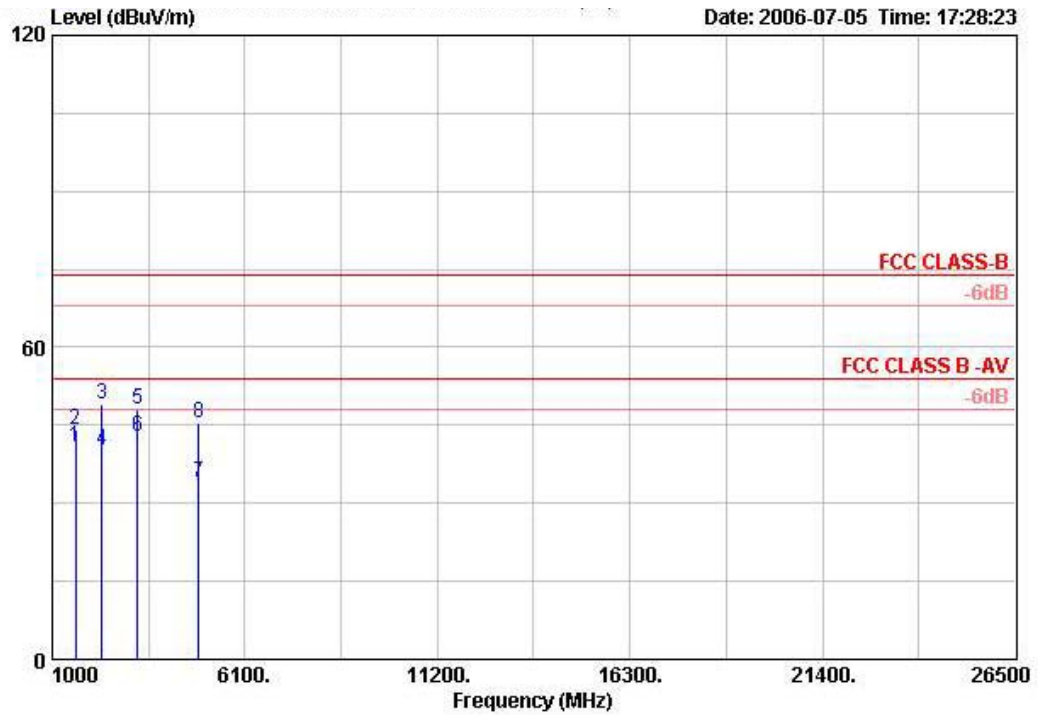

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	1624.688	40.89	-13.11	54.00	47.20	26.13	2.28	34.72	AVERAGE	HORIZONTAL	3
2	1624.688	44.13	-29.87	74.00	50.45	26.13	2.28	34.72	PEAK	HORIZONTAL	3
3	2320.080	49.03	-24.97	74.00	52.59	28.79	2.71	35.07	PEAK	HORIZONTAL	3
4	2320.080	40.21	-13.79	54.00	43.78	28.79	2.71	35.07	AVERAGE	HORIZONTAL	3
5	3249.378	47.93	-26.07	74.00	48.96	30.93	3.15	35.12	PEAK	HORIZONTAL	3
6	3249.378	42.85	-11.15	54.00	43.88	30.93	3.15	35.12	AVERAGE	HORIZONTAL	3
7	4873.988	34.09	-19.91	54.00	32.06	32.88	4.30	35.15	AVERAGE	HORIZONTAL	3
8	4873.988	45.57	-28.43	74.00	43.54	32.88	4.30	35.15	PEAK	HORIZONTAL	3


Temperature	26°C	Humidity	65%
Test Engineer	Beck Wu	Configurations	802.11b Channel 11

Vertical

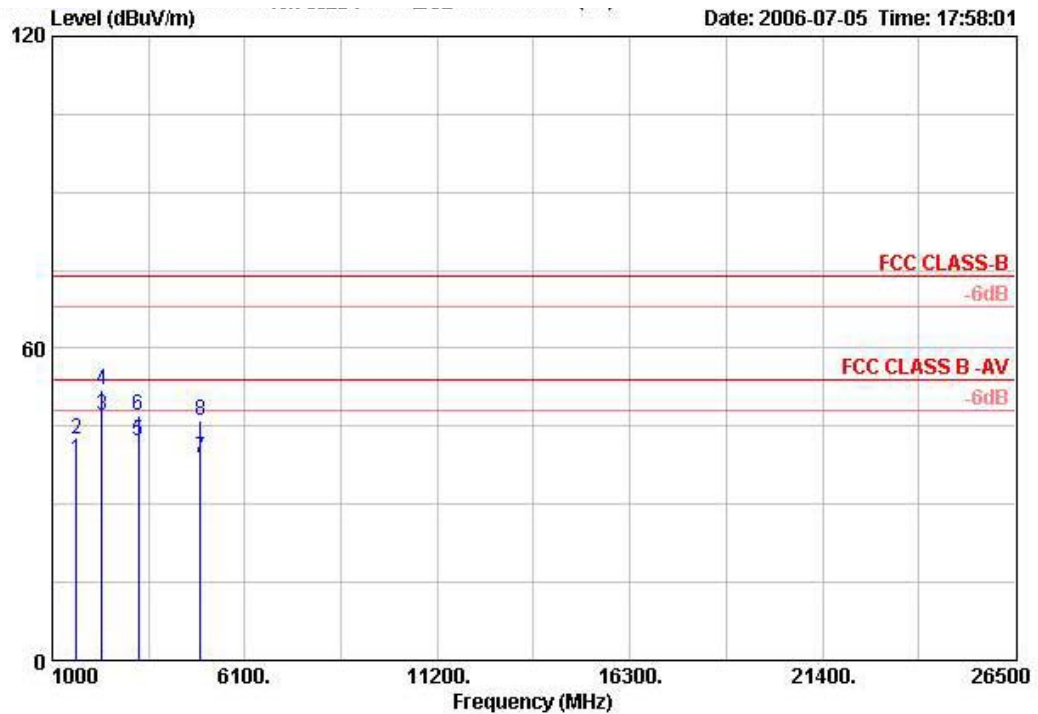

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	1641.375	38.63	-15.37	54.00	44.83	26.23	2.30	34.73	AVERAGE	VERTICAL	3
2	1641.375	42.47	-31.53	74.00	48.66	26.23	2.30	34.73	PEAK	VERTICAL	3
3	2319.949	47.01	-6.99	54.00	50.57	28.79	2.71	35.07	AVERAGE	VERTICAL	3
4	2319.949	51.97	-22.03	74.00	55.53	28.79	2.71	35.07	PEAK	VERTICAL	3
5	3282.704	42.21	-11.79	54.00	43.16	31.00	3.18	35.12	AVERAGE	VERTICAL	3
6	3282.704	47.20	-26.80	74.00	48.15	31.00	3.18	35.12	PEAK	VERTICAL	3
7	4924.000	38.92	-15.08	54.00	36.83	32.93	4.30	35.14	AVERAGE	VERTICAL	3
8	4924.000	46.03	-27.97	74.00	43.94	32.93	4.30	35.14	PEAK	VERTICAL	3


Horizontal

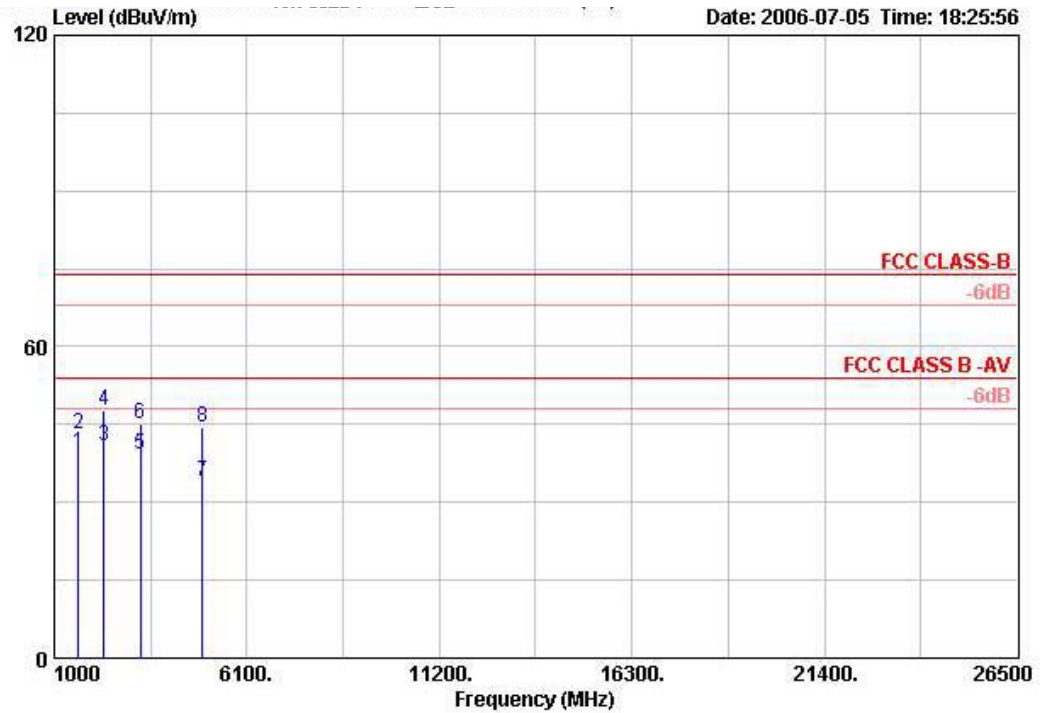

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	1641.353	39.60	-14.40	54.00	45.79	26.23	2.30	34.73	AVERAGE	HORIZONTAL	3
2	1641.353	43.22	-30.78	74.00	49.41	26.23	2.30	34.73	PEAK	HORIZONTAL	3
3	2320.010	40.88	-13.12	54.00	44.45	28.79	2.71	35.07	AVERAGE	HORIZONTAL	3
4	2320.010	47.71	-26.29	74.00	51.27	28.79	2.71	35.07	PEAK	HORIZONTAL	3
5	3282.728	39.26	-14.74	54.00	40.21	31.00	3.18	35.12	AVERAGE	HORIZONTAL	3
6	3282.728	45.02	-28.98	74.00	45.97	31.00	3.18	35.12	PEAK	HORIZONTAL	3
7	4923.984	33.93	-20.07	54.00	31.84	32.93	4.30	35.14	AVERAGE	HORIZONTAL	3
8	4923.984	44.60	-29.40	74.00	42.51	32.93	4.30	35.14	PEAK	HORIZONTAL	3


Temperature	26°C	Humidity	65%
Test Engineer	Beck Wu	Configurations	802.11g Channel 1

Vertical

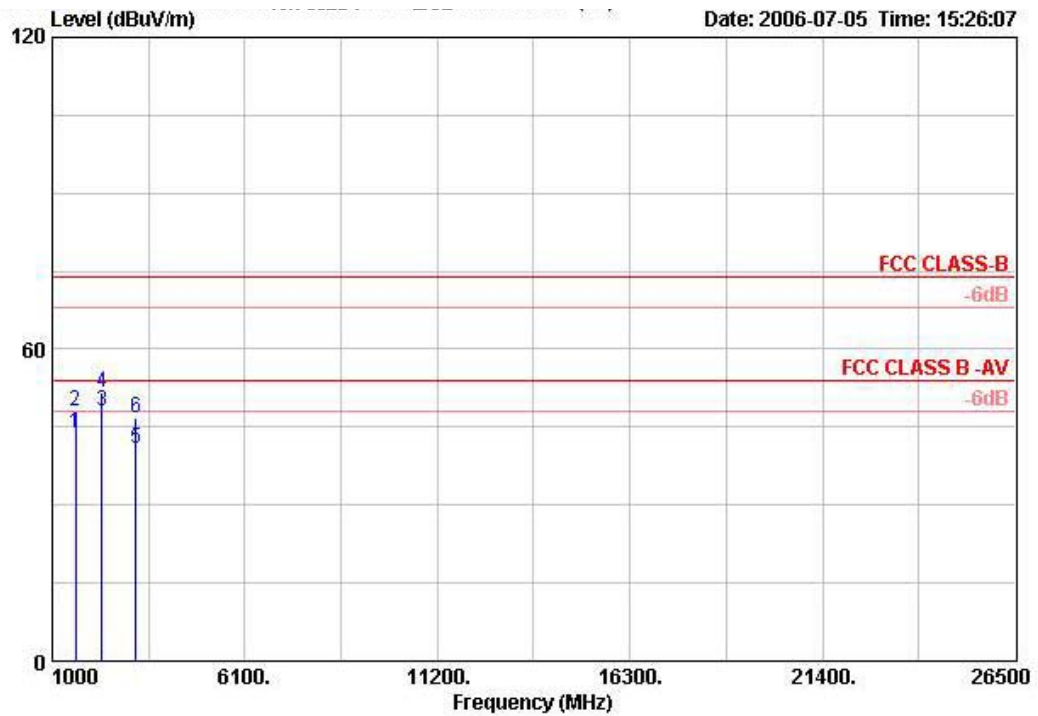

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	1608.000	43.85	-10.15	54.00	50.26	26.02	2.28	34.72	AVERAGE	VERTICAL	3
2	1608.000	48.04	-25.96	74.00	54.46	26.02	2.28	34.72	PEAK	VERTICAL	3
3 !	2320.110	48.20	-5.80	54.00	51.76	28.79	2.71	35.07	AVERAGE	VERTICAL	3
4	2320.110	51.52	-22.48	74.00	55.08	28.79	2.71	35.07	PEAK	VERTICAL	3
5	3215.980	40.81	-13.19	54.00	41.90	30.87	3.15	35.12	AVERAGE	VERTICAL	3
6	3215.980	46.62	-27.38	74.00	47.71	30.87	3.15	35.12	PEAK	VERTICAL	3


Horizontal

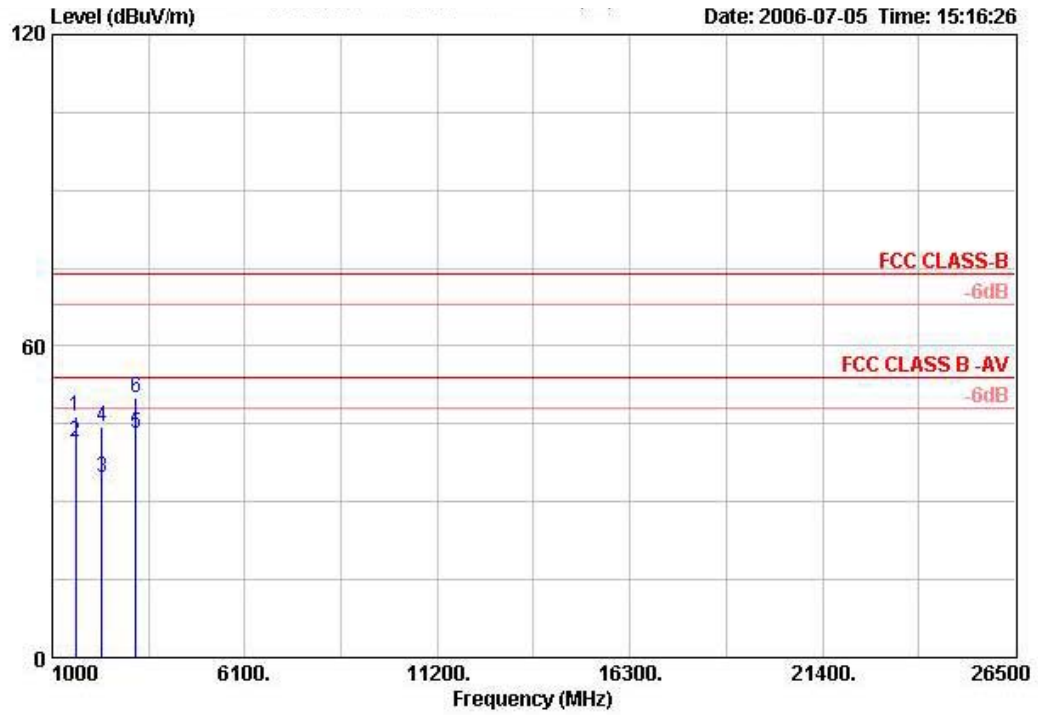

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	1608.000	46.52	-27.48	74.00	52.94	26.02	2.28	34.72	PEAK	HORIZONTAL	3
2	1608.000	41.48	-12.52	54.00	47.90	26.02	2.28	34.72	AVERAGE	HORIZONTAL	3
3	2317.500	34.59	-19.41	54.00	38.16	28.79	2.71	35.07	AVERAGE	HORIZONTAL	3
4	2317.500	44.45	-29.55	74.00	48.01	28.79	2.71	35.07	PEAK	HORIZONTAL	3
5	3215.990	43.31	-10.69	54.00	44.40	30.87	3.15	35.12	AVERAGE	HORIZONTAL	3
6	3215.990	50.01	-23.99	74.00	51.10	30.87	3.15	35.12	PEAK	HORIZONTAL	3


Temperature	26°C	Humidity	65%
Test Engineer	Beck Wu	Configurations	802.11g Channel 6

Vertical

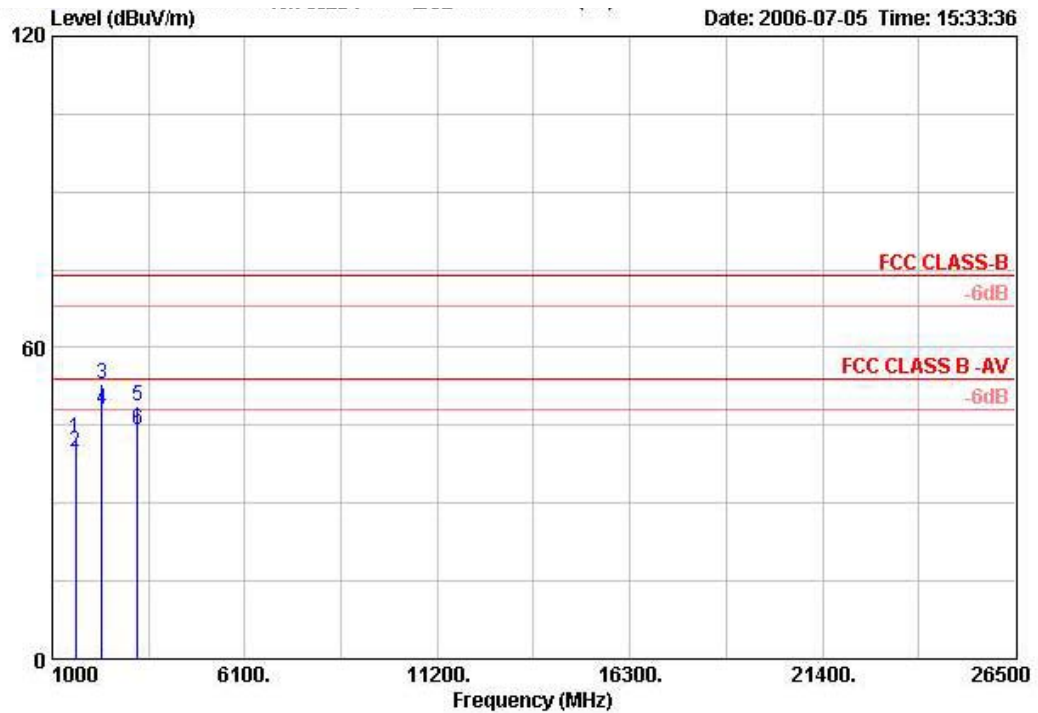

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	1624.730	42.66	-31.34	74.00	48.97	26.13	2.28	34.72	PEAK	VERTICAL	3
2	1624.730	39.97	-14.03	54.00	46.28	26.13	2.28	34.72	AVERAGE	VERTICAL	3
3	2319.990	53.07	-20.93	74.00	56.63	28.79	2.71	35.07	PEAK	VERTICAL	3
4	2319.990	47.97	-6.03	54.00	51.53	28.79	2.71	35.07	AVERAGE	VERTICAL	3
5	3249.340	48.88	-25.12	74.00	49.91	30.93	3.15	35.12	PEAK	VERTICAL	3
6	3249.340	44.27	-9.73	54.00	45.30	30.93	3.15	35.12	AVERAGE	VERTICAL	3


Horizontal

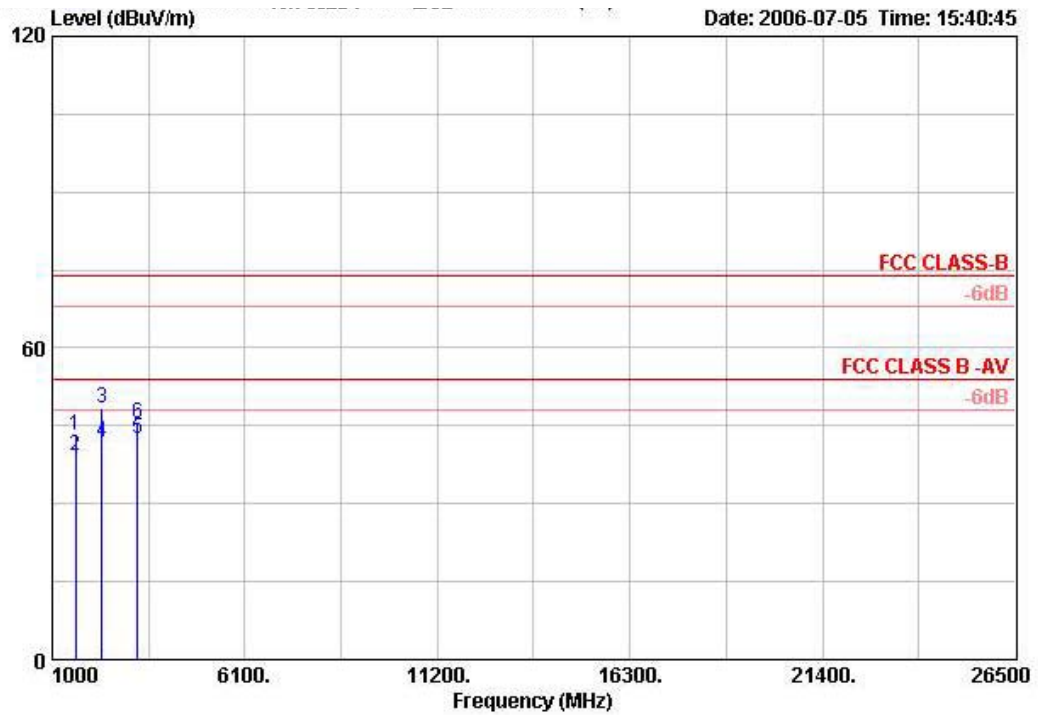

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	1624.640	43.13	-30.87	74.00	49.45	26.13	2.28	34.72	PEAK	HORIZONTAL	3
2	1624.640	39.19	-14.81	54.00	45.50	26.13	2.28	34.72	AVERAGE	HORIZONTAL	3
3	2320.000	48.36	-25.64	74.00	51.93	28.79	2.71	35.07	PEAK	HORIZONTAL	3
4	2320.000	41.94	-12.06	54.00	45.50	28.79	2.71	35.07	AVERAGE	HORIZONTAL	3
5	3249.350	42.61	-11.39	54.00	43.65	30.93	3.15	35.12	AVERAGE	HORIZONTAL	3
6	3249.350	45.55	-28.45	74.00	46.58	30.93	3.15	35.12	PEAK	HORIZONTAL	3


Temperature	26°C	Humidity	65%
Test Engineer	Beck Wu	Configurations	802.11g Channel 11

Vertical

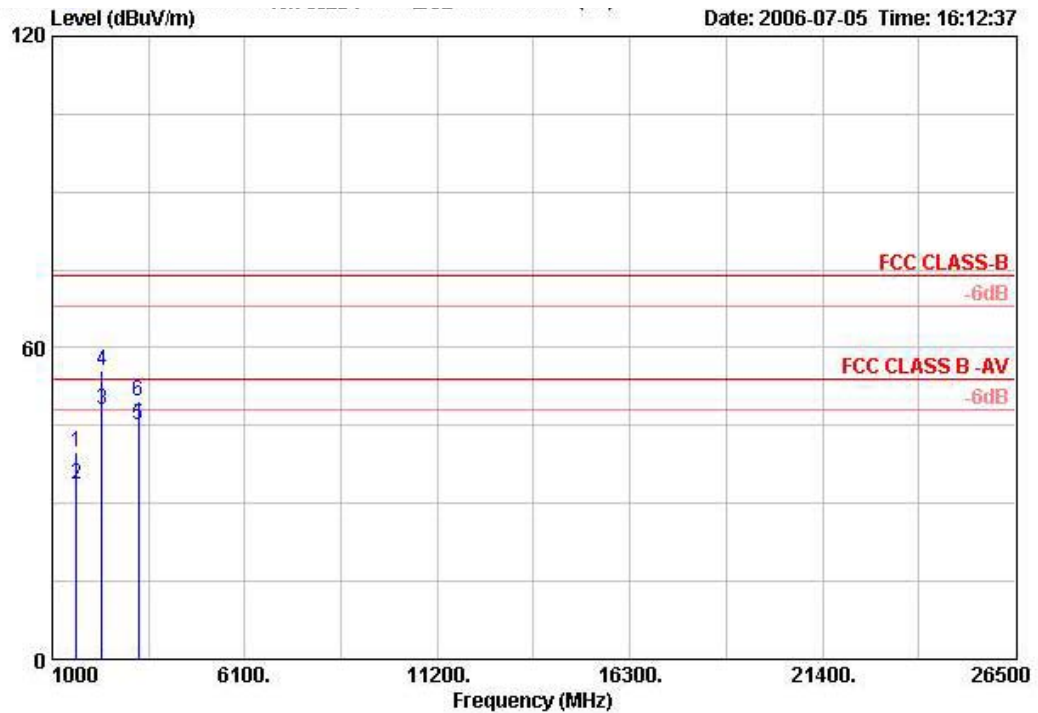

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	1641.380	39.91	-34.09	74.00	46.10	26.23	2.30	34.73	PEAK	VERTICAL	3
2	1641.380	33.64	-20.36	54.00	39.83	26.23	2.30	34.73	AVERAGE	VERTICAL	3
3	2320.068	47.93	-6.07	54.00	51.49	28.79	2.71	35.07	AVERAGE	VERTICAL	3
4	2320.068	55.72	-18.28	74.00	59.28	28.79	2.71	35.07	PEAK	VERTICAL	3
5	3282.690	45.04	-8.96	54.00	45.99	31.00	3.18	35.12	AVERAGE	VERTICAL	3
6	3282.690	49.75	-24.25	74.00	50.70	31.00	3.18	35.12	PEAK	VERTICAL	3

Horizontal

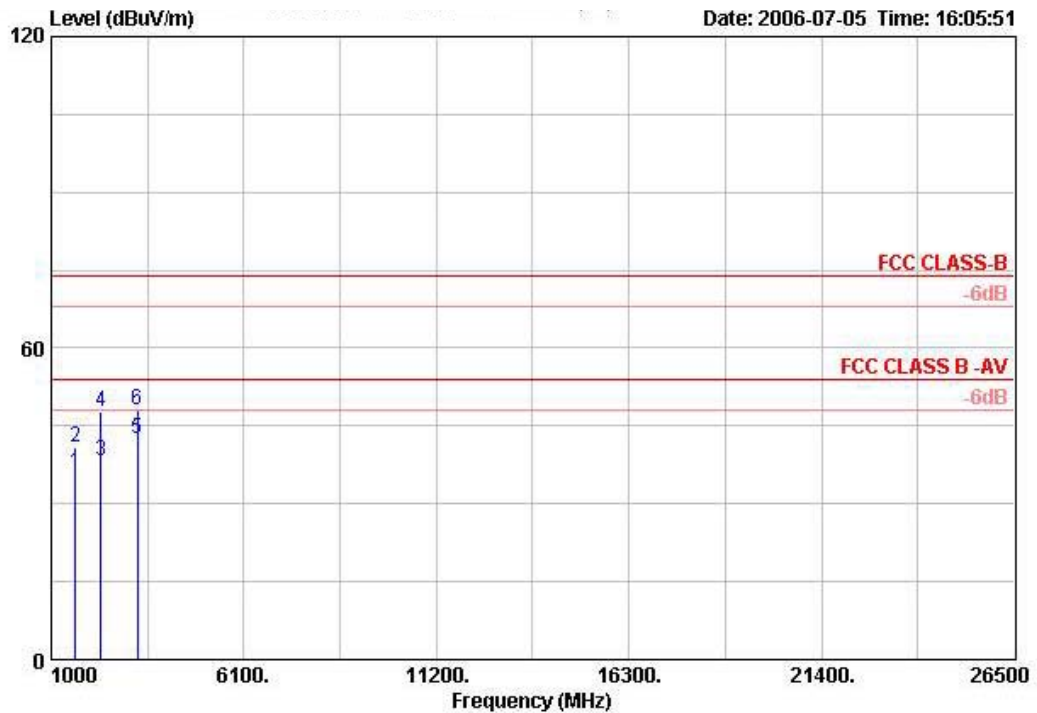

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	1641.400	35.99	-18.01	54.00	42.18	26.23	2.30	34.73	AVERAGE	HORIZONTAL	3
2	1641.400	40.83	-33.17	74.00	47.02	26.23	2.30	34.73	PEAK	HORIZONTAL	3
3	2320.068	38.36	-15.64	54.00	41.92	28.79	2.71	35.07	AVERAGE	HORIZONTAL	3
4	2320.096	47.85	-26.15	74.00	51.41	28.79	2.71	35.07	PEAK	HORIZONTAL	3
5	3282.690	42.43	-11.57	54.00	43.38	31.00	3.18	35.12	AVERAGE	HORIZONTAL	3
6	3282.690	48.23	-25.77	74.00	49.18	31.00	3.18	35.12	PEAK	HORIZONTAL	3

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Pol. : V is Vertical Polarization ; H is Horizontal Polarization.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (emission in restricted band)	1 MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	100 KHz / 100 KHz for Peak

4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.


4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	65%
Test Engineer	Beck Wu	Configurations	802.11b Channel 1, 11


Channel 1

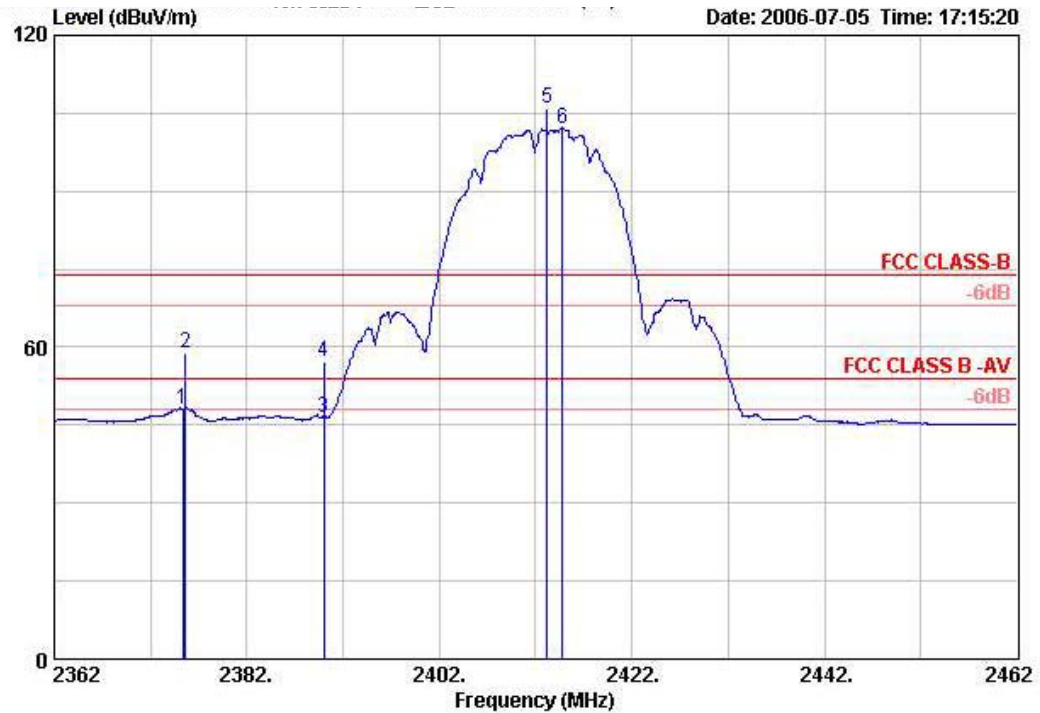

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1 !	2375.400	48.13	-5.87	54.00	16.52	28.86	2.76	0.00	AVERAGE	VERTICAL	3
2	2375.600	58.93	-15.07	74.00	27.31	28.86	2.76	0.00	PEAK	VERTICAL	3
3	2390.000	46.35	-7.65	54.00	14.71	28.88	2.76	0.00	AVERAGE	VERTICAL	3
4	2390.000	57.22	-16.78	74.00	25.58	28.88	2.76	0.00	PEAK	VERTICAL	3
5 over	2413.200	105.90			74.22	28.90	2.79	0.00	PEAK	VERTICAL	3
6 over	2414.800	102.17			70.48	28.90	2.79	0.00	AVERAGE	VERTICAL	3

Item 5, 6 are the fundamental frequency at 2412 MHz.

Channel 11

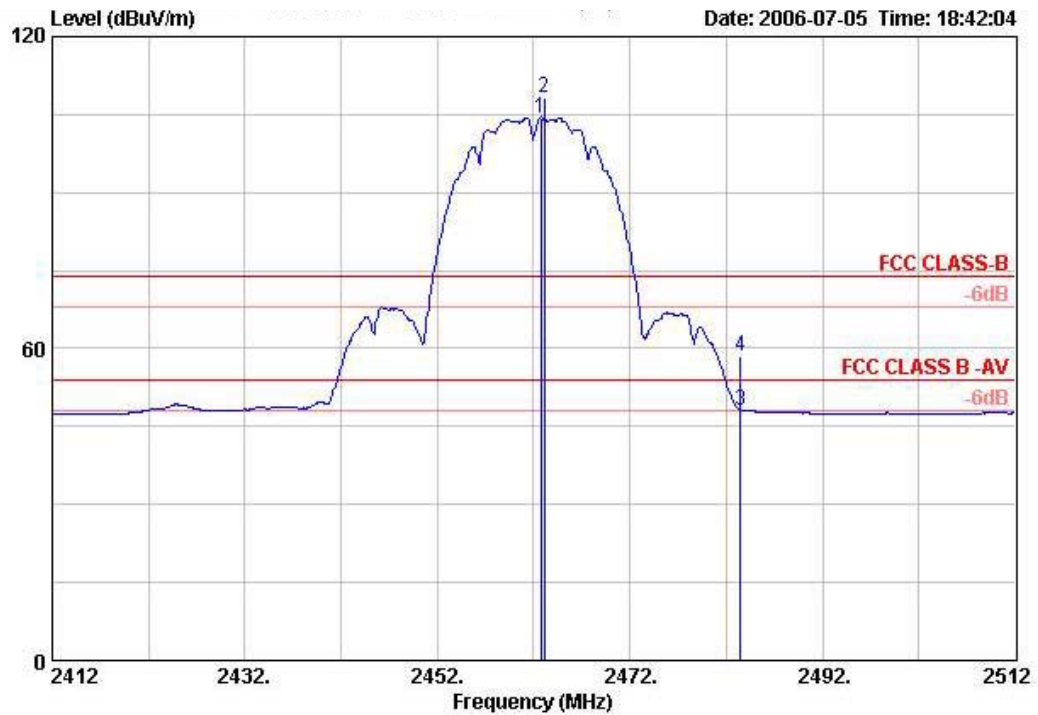


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	2462.785	104.44			72.67	28.96	2.81	0.00	AVERAGE	VERTICAL	3
2	2463.106	108.28			76.50	28.96	2.81	0.00	PEAK	VERTICAL	3
3	2483.500	48.17	-5.83	54.00	16.35	28.98	2.84	0.00	AVERAGE	VERTICAL	3
4	2483.500	58.53	-15.47	74.00	26.71	28.98	2.84	0.00	PEAK	VERTICAL	3

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	26°C	Humidity	65%
Test Engineer	Beck Wu	Configurations	802.11g Channel 1, 11


Channel 1

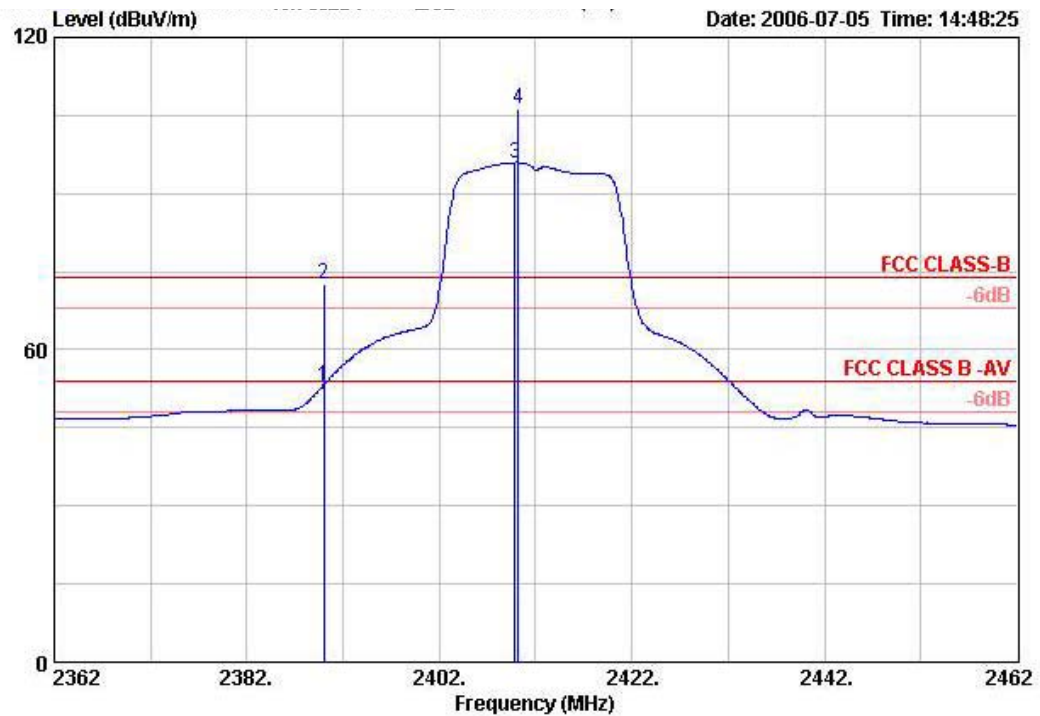

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1 !	2390.000	53.10	-0.90	54.00	21.46	28.88	2.76	0.00	AVERAGE	VERTICAL	3
2 !	2390.000	72.69	-1.31	74.00	41.05	28.88	2.76	0.00	PERK	VERTICAL	3
3 over	2409.800	95.93			64.25	28.90	2.79	0.00	AVERAGE	VERTICAL	3
4 over	2410.200	106.31			74.62	28.90	2.79	0.00	PERK	VERTICAL	3

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 11

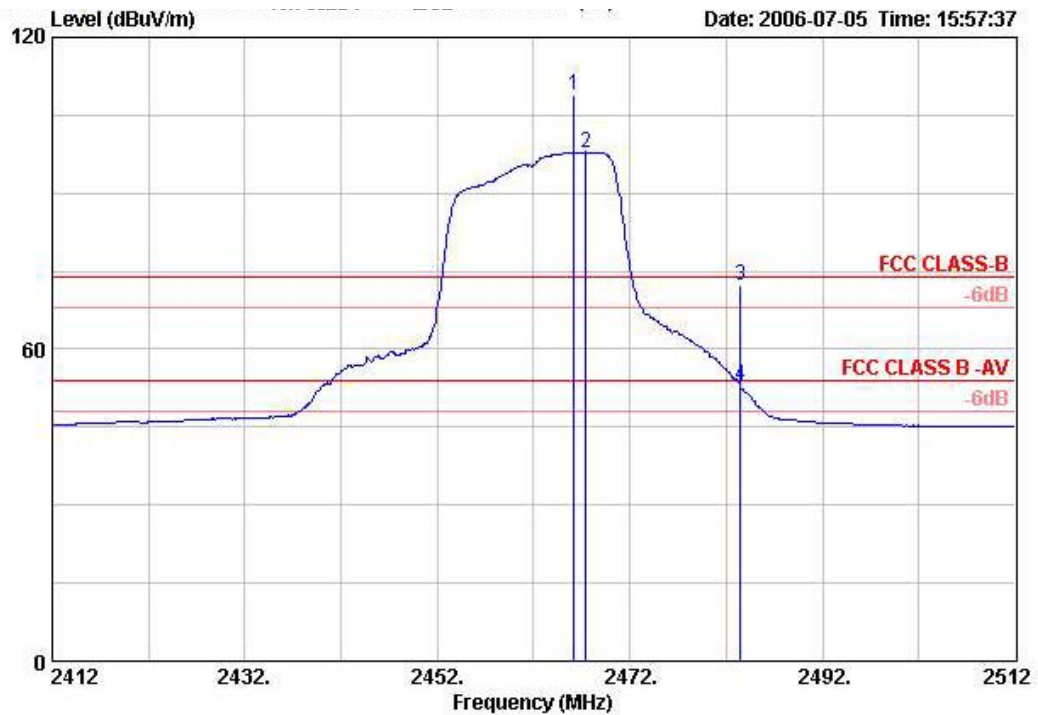

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1 over	2466.200	108.82			77.05	28.96	2.81	0.00	PEAK	VERTICAL	3
2 over	2467.400	97.90			66.13	28.96	2.81	0.00	AVERAGE	VERTICAL	3
3 !	2483.500	72.24	-1.76	74.00	40.42	28.98	2.84	0.00	PEAK	VERTICAL	3
4 !	2483.500	53.01	-0.99	54.00	21.19	28.98	2.84	0.00	AVERAGE	VERTICAL	3

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:


Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Receiving maximum band edge emissions are Vertical Polarization.


For Emission not in Restricted Band

Low Band Edge Plot on Configuration IEEE 802.11b / 2412 MHz

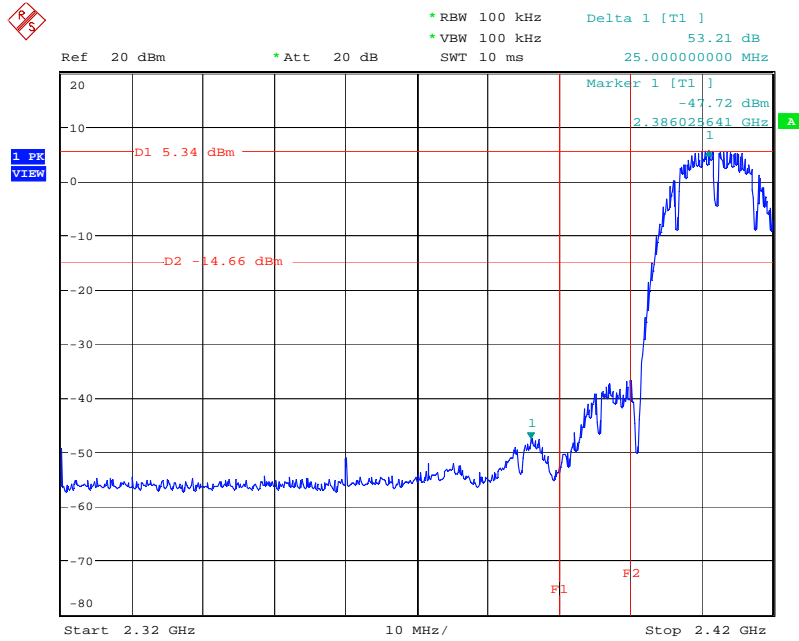


Date: 8.JUL.2006 20:31:05

High Band Edge Plot on Configuration IEEE 802.11b / 2462 MHz

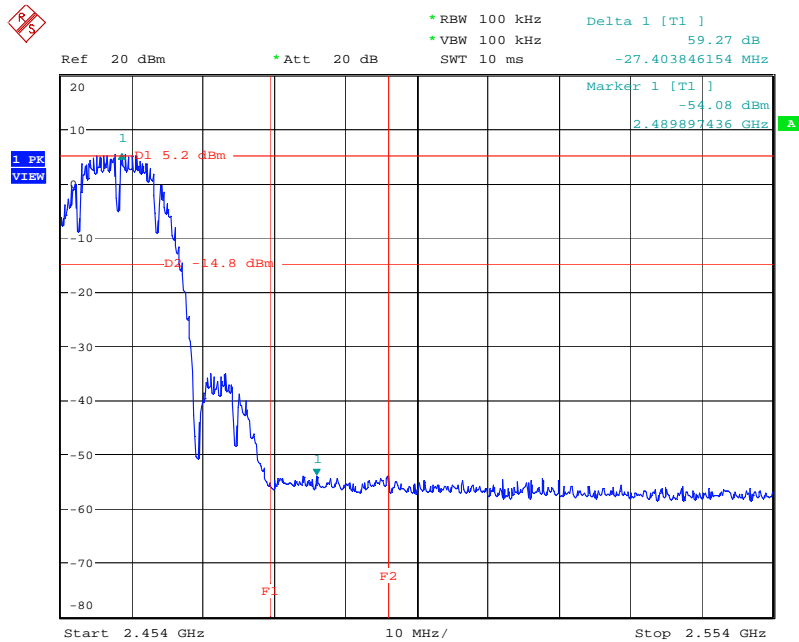


Date: 8.JUL.2006 20:37:32

Low Band Edge Plot on Configuration IEEE 802.11g / 2412 MHz

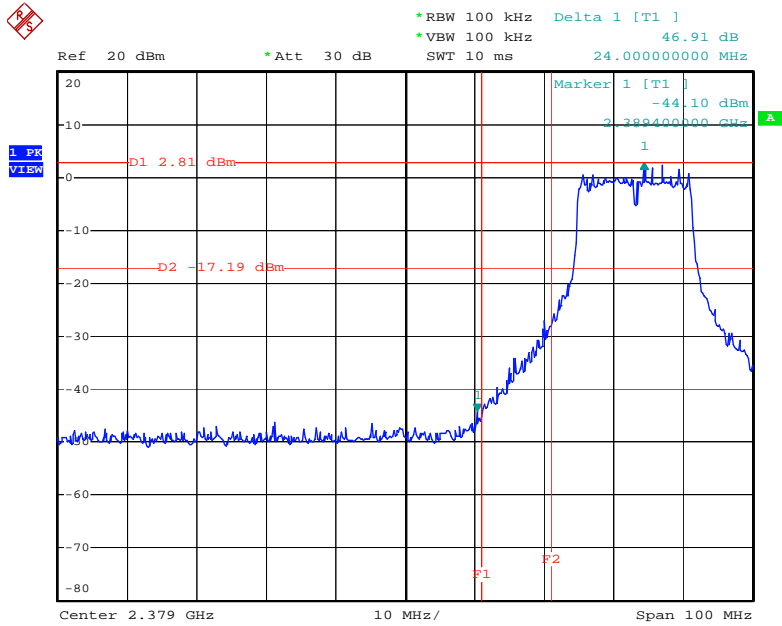

Date: 7.JUL.2006 18:00:00

High Band Edge Plot on Configuration IEEE 802.11g / 2462 MHz

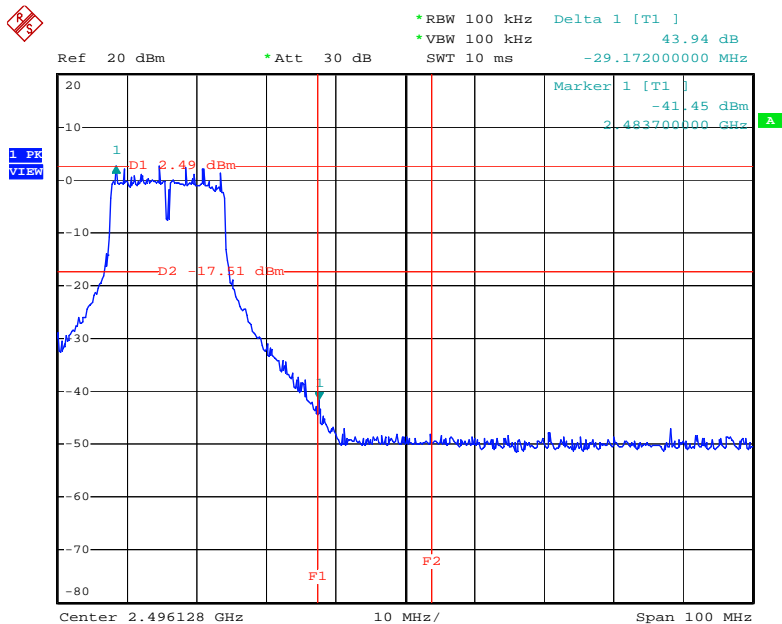

Date: 7.JUL.2006 18:04:53

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, all antenna connectors comply with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 15, 2006	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	3565	9 kHz - 2 GHz	Jan. 18, 2006	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	May 29, 2006	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 24, 2006*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004/040	9 kHz - 40 GHz	Sep. 30, 2005	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30 MHz - 200 MHz	Jul. 22, 2005	Radiation (03CH03-HY)
Log Antenna	SCHWARZBECK	VUSLP 9111	221	200 MHz - 1 GHz	Jul. 22, 2005	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6903	1GHz ~ 18GHz	Mar. 15, 2006	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	NCR	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec.02, 2005	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec.02, 2005	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Feb. 22, 2006	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Dec. 19, 2005	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9708-1839	9kHz – 30MHz	Mar. 18, 2006	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2006	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
Spectrum analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Nov. 26, 2005	Conducted (TH01-HY)
Power meter	R&S	NRVS	100444	DC ~ 40GHz	Jun,10,2006	Conducted (TH01-HY)
Power sensor	R&S	NRV-Z55	100049	DC ~ 40GHz	Jul. 06, 2005	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun,10,2006	Conducted (TH01-HY)
AC power source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Apr. 21, 2005*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Note: *Calibration Interval of instruments listed above is two year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
DC power source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Dec. 28, 2005	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2005	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 30, 2005	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 30, 2005	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Dec. 30, 2005	Conducted (TH01-HY)
Data Generator	Tektronix	DG2030	063-2920-50	0.1Hz~400MHz	Jun. 16, 2006	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Note: *Calibration Interval of instruments listed above is two year.

6. SPORTON COMPANY PROFILE

SPORTON Lab. was established in 1986 with one shielded room: the first private EMI test facility, offering local manufacturers an alternative EMI test facility apart from ERSO. In 1988, one 3M and 10M/3M open area test site were setup and also obtained official accreditation from FCC, VCCI and NEMKO. In 1993, a Safety laboratory was founded and obtained accreditation from UL of USA, CSA of Canada and TUV (Rhineland & PS) of Germany. In 1995, one EMC lab, including EMI and EMS test facilities was setup. In 1997, SPORTON Group has provided financial expense to relocate the headquarter to Orient Scientific Park in Taipei Hsien to offer more comprehensive, more qualified and better service to local suppliers and manufactures. In 1999, Safety Group and Component Group were setup. In 2001, SPORTON has established 3M/10M chamber in Hwa Ya Technology Park.

6.1. Test Location

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 02-2696-2468 FAX : 02-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 03-327-3456 FAX : 03-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 02-2601-1640 FAX : 02-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 02-2631-4739 FAX : 02-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 02-8227-2020 FAX : 02-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 02-2794-8886 FAX : 02-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C. TEL : 03-656-9065 FAX : 03-656-9085


7. CNLA CERTIFICATE OF ACCREDITATION

Test Lab. : Sporton International Inc.
Accreditation Number : 1190
Originally Accredited : 2003/12/15
Effective Period : 2003/12/15~2006/12/14
Accredited Scope : 47 CFR FCC Part 15 Subpart C



Taiwan Accreditation Foundation
Chinese National Laboratory Accreditation
Certificate of Accreditation

Accreditation Criteria: ISO 17025
Accreditation Number: 1190
Organization/Laboratory: EMC & Wireless Communications Laboratory, Sporton International Inc.
Originally Accredited: December 15, 2003
Effective Period: December 15, 2003 To December 14, 2006
Accredited Scope: Electrical Testing Field, 7 items, details shown in the following pages.
Specific Accreditation Program: Recognition and Approval of Designated Laboratory for Commodities Inspection

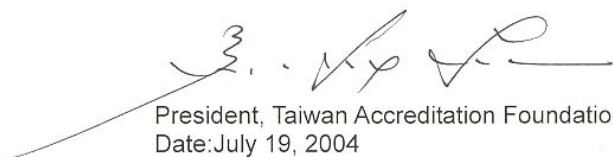
President, Taiwan Accreditation Foundation
Date: July 19, 2004

(This document is invalid unless accompanied by all 4 pages)

CNLA-ZL03191E Page 1 of 4