



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Z-Com, Inc.
Applicant Address	7F-2, No. 9. Prosperity RD.I Science-Based Industrial Park Hsinchu, 300 Taiwan
FCC ID	M4Y-ZCN1523H28V4
Manufacturer's company	Z-Com, Inc.
Manufacturer Address	7F-2, No. 9. Prosperity RD.I Science-Based Industrial Park Hsinchu, 300 Taiwan

Product Name	802.11n 2.4G WLAN CUSTOMER PREMISES EQUIPMENT
Brand Name	ZCOM
Model Name	ZCN-1523H-2-8
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Oct. 12, 2009
Final Test Date	Nov. 27, 2009
Submission Type	Original Equipment



### Statement

**Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g part of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	5
3.5. Table for Test Modes .....	6
3.6. Table for Testing Locations.....	7
3.7. Table for Supporting Units .....	7
3.8. Table for Parameters of Test Software Setting .....	8
3.9. Test Configurations .....	10
<b>4. TEST RESULT .....</b>	<b>13</b>
4.1. AC Power Line Conducted Emissions Measurement.....	13
4.2. Maximum Conducted Output Power Measurement.....	17
4.3. Power Spectral Density Measurement .....	34
4.4. 6dB Spectrum Bandwidth Measurement .....	51
4.5. Radiated Emissions Measurement .....	68
4.6. Band Edge Emissions Measurement .....	122
4.7. Antenna Requirements .....	139
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>140</b>
<b>6. TEST LOCATION.....</b>	<b>141</b>
<b>7. TAF CERTIFICATE OF ACCREDITATION .....</b>	<b>142</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT.....</b>	<b>A1 ~ A19</b>
<b>APPENDIX B. TEST PHOTOS.....</b>	<b>B1 ~ B6</b>
<b>APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....</b>	<b>C1 ~C3</b>



## History of This Test Report

Original Issue Date: Nov. 30, 2009

Report No.: FR9O1410-01

- No additional attachment.
- Additional attachment were issued as following record:

Attachment No.	Issue Date	Description



## 1. CERTIFICATE OF COMPLIANCE

**Product Name** : 802.11n 2.4G WLAN CUSTOMER PREMISES EQUIPMENT  
**Brand Name** : ZCOM  
**Model Name** : ZCN-1523H-2-8  
**Applicant** : Z-Com, Inc.  
**Test Rule Part(s)** : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 12, 2009 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

*Jordan Hsiao 2009.12.1*

Jordan Hsiao

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	7.48 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	0.44 dB
4.3	15.247(e)	Power Spectral Density	Complies	7.19 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	3.45 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.03 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11n

Items	Description
Product Type	IEEE 802.11n: WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From POE
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS0 (20MHz): 17.76 MHz ; MCS0 (40MHz): 36.32 MHz
Conducted Output Power	MCS0 (20MHz): 29.56 dBm ; MCS0 (40MHz): 29.15 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

##### IEEE 802.11b/g

Items	Description
Product Type	IEEE 802.11b/g:WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From POE
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 15.76 MHz ; 11g: 16.56 MHz
Conducted Output Power	11b: 29.21 dBm ; 11g: 29.56 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

##### NOTE:

RJ-45 Cable Requirement: There is a RJ-45 cable with a core in the end side.

The test configuration, test mode and test software used in this test report are designated by the applicant.

**Antenna & Band width**

Antenna	Single (TX)	
	20 MHz	40 MHz
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V

**IEEE 802.11n spec**

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Datarate(Mbps)			
					20MHz	40MHz	20MHz	40MHz	800nsGI		400nsGI	
									20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

### 3.2. Accessories


Power	Brand	Model	Rating
Adapter 1	FAIRWAY	WRG15F-120A	Input: 100-240VAC, 50-60Hz, 1.0A Output: 12VDC, 1.25A
Adapter 2	DVE	DSA-12G-12 FUS 120120	Input: 100-240VAC, 50-60Hz, 0.3A Output: 12VDC, 1.0A
Power	Brand	Model	
POE	TRANSWIDE	AMEBA0000000201	

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
A	ZCOM	WS-120	Dipole Antenna	N Type	2	TX / RX Ant.
B	ZCOM	ZCN-1523H-2-8	PCB Antenna	N/A	8.45	TX / RX Ant.

Note: The EUT has two types of antennas (1TX, 1RX).

Ant. A and Ant. B can be used as transmitting/receiving antenna.

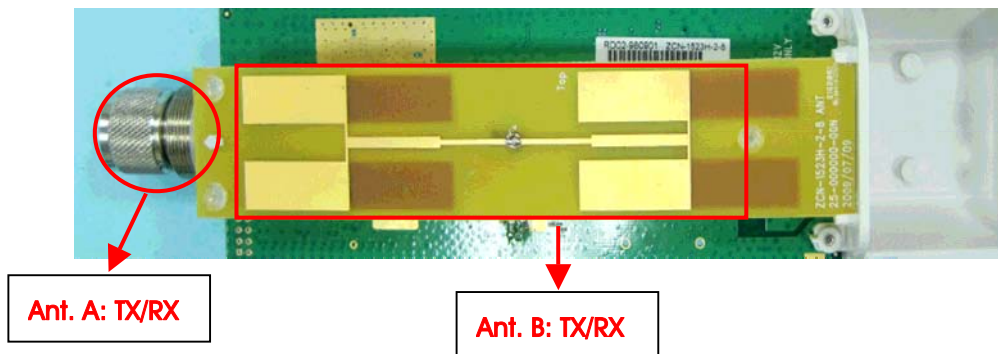

### 3.4. Table for Carrier Frequencies

There are two bandwidth systems for IEEE 802.11n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		



### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Peak Conducted Output Power	MCS0/20MHz	6.5 Mbps	1/6/11	A / B
	MCS0/40MHz	13.5 Mbps	3/6/9	A / B
	11b/BPSK	1 Mbps	1/6/11	A / B
	11g/BPSK	6 Mbps	1/6/11	A / B
Power Spectral Density 6dB Spectrum Bandwidth	MCS0/20MHz	6.5 Mbps	1/6/11	A / B
	MCS0/40MHz	13.5 Mbps	3/6/9	A / B
	11b/BPSK	1 Mbps	1/6/11	A / B
	11g/BPSK	6 Mbps	1/6/11	A / B
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	MCS0/20MHz	6.5 Mbps	1/6/11	A / B
	MCS0/40MHz	13.5 Mbps	3/6/9	A / B
	11b/BPSK	1 Mbps	1/6/11	A / B
	11g/BPSK	6 Mbps	1/6/11	A / B
Band Edge Emissions	MCS0/20MHz	6.5 Mbps	1/11	A / B
	MCS0/40MHz	13.5 Mbps	3/9	A / B
	11b/BPSK	1 Mbps	1/11	A / B
	11g/BPSK	6 Mbps	1/11	A / B

**NOTE:**

All the test modes were illustrated as below.

The EUT has two types of antennas and two adapters.

**<For Conducted Emissions Test>:**

Test Mode 1: EUT put in Horizontal way with Adapter 1

Test Mode 2: EUT put in Vertical way with Adapter 1

Test Mode 3: EUT put in Horizontal way with Adapter 2

Test Mode 4: EUT put in Vertical way with Adapter 2

Due to Mode 1 generated the worst test result, so it was recorded in this report.

**<For Radiated Emissions Test Below 1GHz> :**

Test Mode 1: EUT put in Horizontal way with Adapter 1

Test Mode 2: EUT put in Vertical way with Adapter 1

Test Mode 3: EUT put in Horizontal way with Adapter 2

Test Mode 4: EUT put in Vertical way with Adapter 2

After pretesting, the EUT put in horizontal way was selected as worse case, so the Mode 1 and Mode 3 have been evaluated to test in this report.

Due to Mode 1 generated the worst test result, so it was recorded in this report.

**<For Radiated Emissions Test Above 1GHz > :**

Test Mode 1: EUT put in Horizontal way with Ant. A (Dipole Antenna)

Test Mode 2: EUT put in Vertical way with Ant. A (Dipole Antenna)

Due to Mode 1 generated the worst test result, so it was recorded in this report.

Test Mode 3: EUT put in Horizontal way with Ant. B (PCB Antenna)

Test Mode 4: EUT put in Vertical way with Ant. B (PCB Antenna)

Due to Mode 4 generated the worst test result, so it was recorded in this report.

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	480872	IC 4086	-
CO04-HY	Conduction	Hwa Ya	480872	IC 4086	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2KWM3945ABG
Notebook	ASUS	EEEEPC8G-W001	PPD-AR5BXB63

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For Ant. A – Dipole Antenna>:

#### Power Parameters of IEEE 802.11n MCS0 20MHz Ant. A

Test Software Version	Revision 0.9 BUILD #9 ART_11n		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n 20MHz Ant. A	17.5	20	18.5

#### Power Parameters of IEEE 802.11n MCS0 40MHz Ant. A

Test Software Version	Revision 0.9 BUILD #9 ART_11n		
Frequency	2422 MHz	2437 MHz	2452 MHz
IEEE 802.11n 40MHz Ant. A	15	20	15.5

#### Power Parameters of IEEE 802.11b/g Ant. A

Test Software Version	Revision 0.9 BUILD #9 ART_11n		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b Ant. A	22.5	24.5	24
IEEE 802.11g Ant. A	18	20	19.5

<For Ant. B – PCB Antenna>:

**Power Parameters of IEEE 802.11n MCS0 20MHz Ant. B**

Test Software Version	Revision 0.9 BUILD #9 ART_11n		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n 20MHz Ant. B	16	18	16

**Power Parameters of IEEE 802.11n MCS0 40MHz Ant. B**

Test Software Version	Revision 0.9 BUILD #9 ART_11n		
Frequency	2422 MHz	2437 MHz	2452 MHz
IEEE 802.11n 40MHz Ant. B	13.5	18	13

**Power Parameters of IEEE 802.11b/g Ant. B**

Test Software Version	Revision 0.9 BUILD #9 ART_11n		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b Ant. B	21.5	23	21.5
IEEE 802.11g Ant. B	16.5	18	16.5

During the test, the following programs under WIN XP were executed:


At the same time, "Revision 0.9 BUILD #9 ART\_11n" was executed the test program to control the EUT continuously transmit RF signal.

### 3.9. Test Configurations

#### 3.9.1. Radiation Emissions Test Configuration


Test Configuration: 9KHz~1GHz

Test Mode: Mode 1

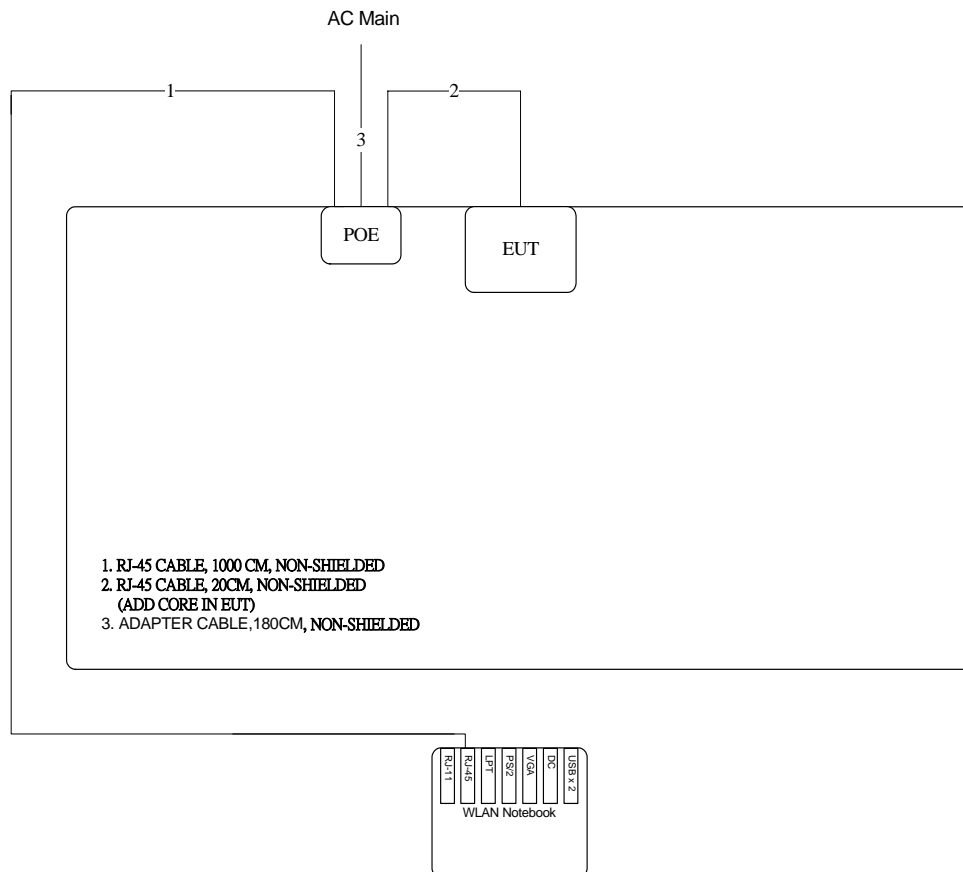


Test Configuration: above 1GHz

Test Mode: Mode 1 ~ Mode 2

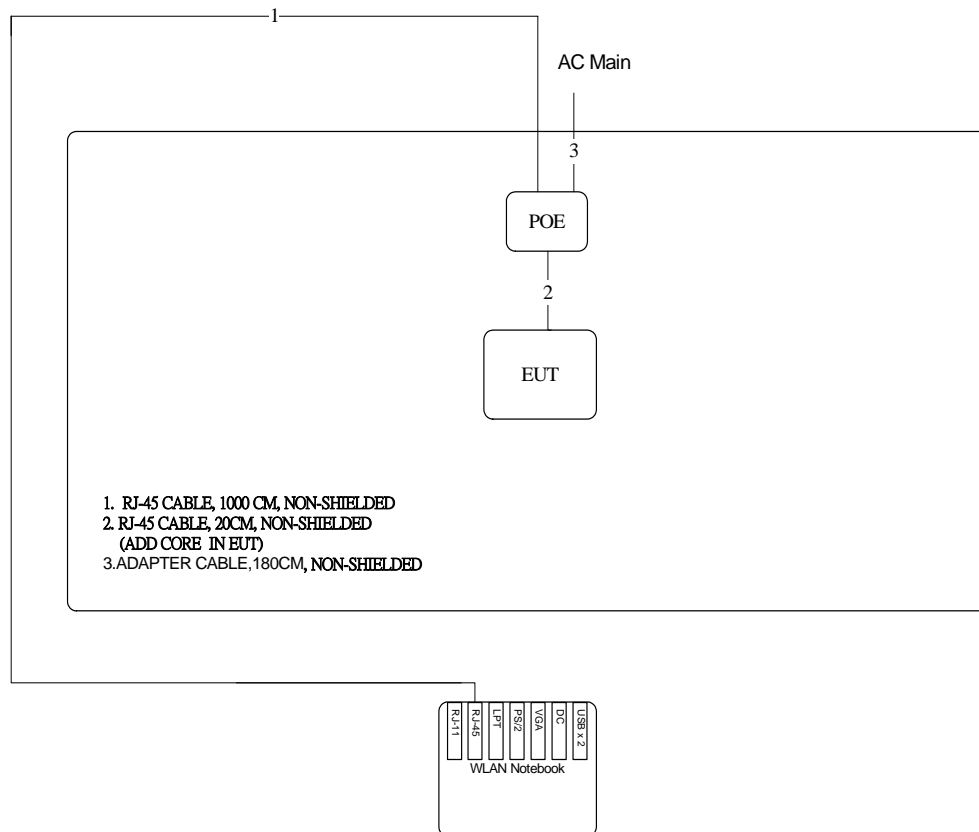

### 3.9.2. AC Power Line Conduction Emissions Test Configuration

Test Mode: Mode 1

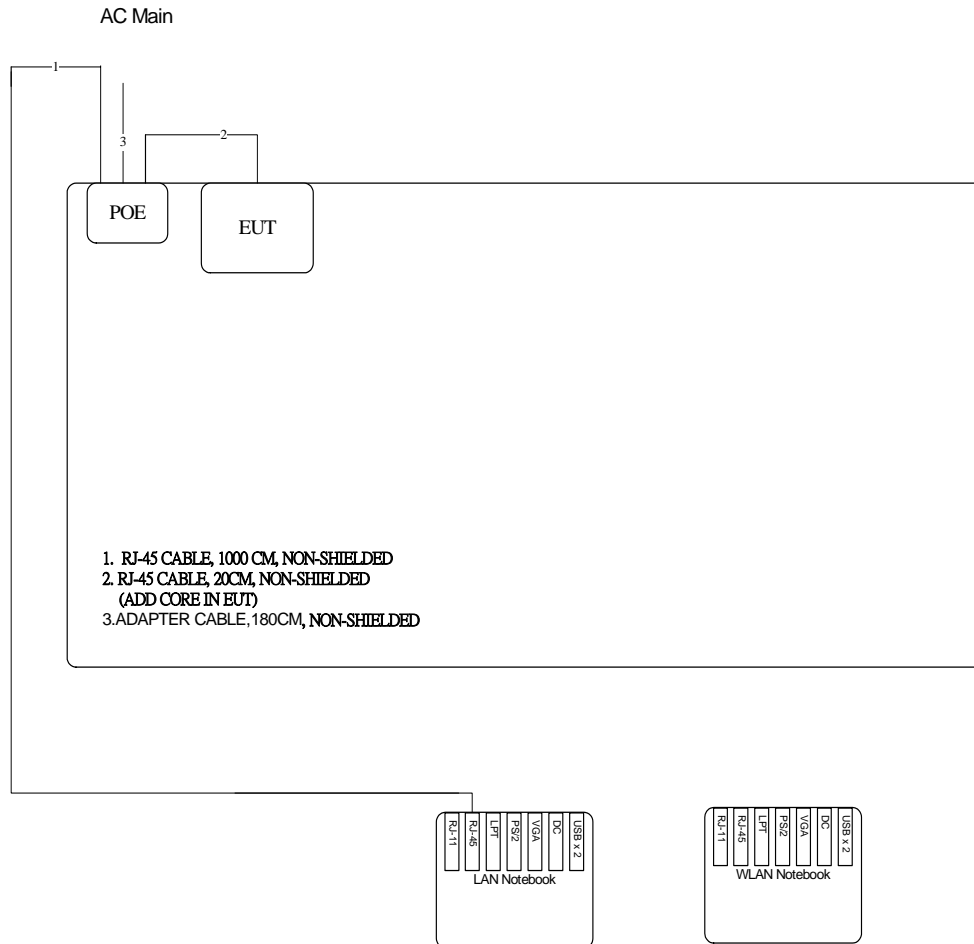

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.



#### 4.1.4. Test Setup Layout

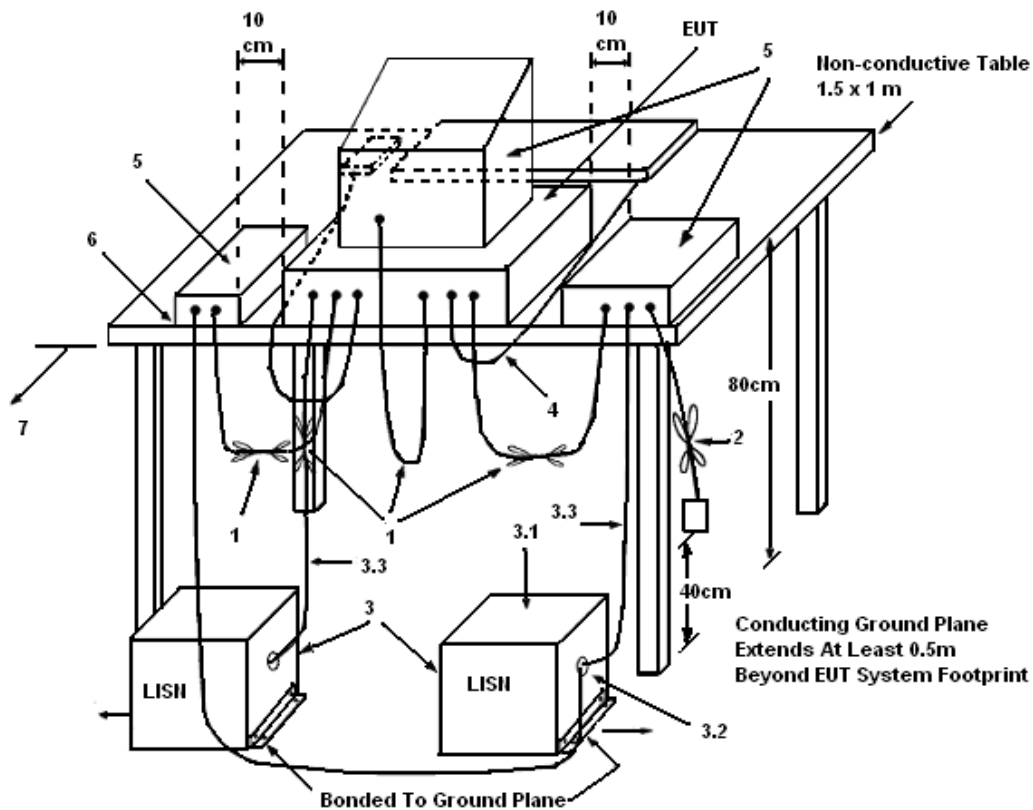

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	55%
Test Engineer	Cloud Peng	Phase	Line
Configuration	Normal Link / Mode 1		

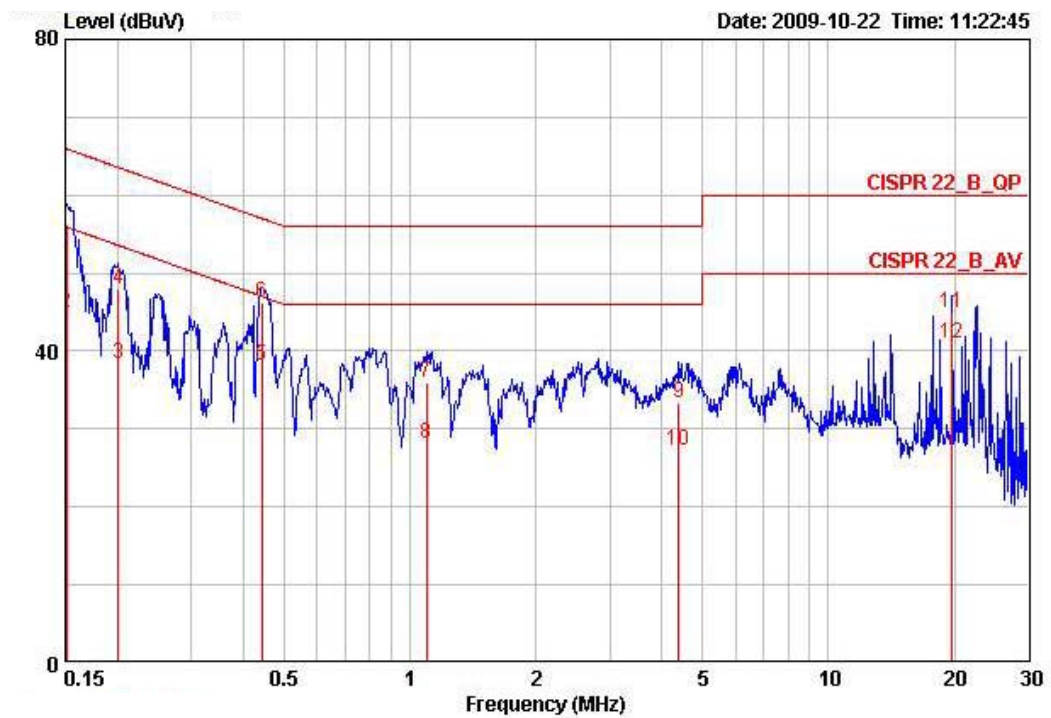

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15080	55.93	-10.02	65.96	55.66	0.07	0.20	QP
2	0.15080	44.87	-11.08	55.96	44.60	0.07	0.20	AVERAGE
3	0.20075	38.37	-15.21	53.58	38.12	0.05	0.20	AVERAGE
4	0.20075	47.95	-15.63	63.58	47.70	0.05	0.20	QP
5	0.44208	38.04	-8.98	47.02	37.81	0.03	0.20	AVERAGE
6	0.44208	46.23	-10.79	57.02	46.00	0.03	0.20	QP
7	1.094	36.03	-19.97	56.00	35.82	0.03	0.18	QP
8	1.094	28.10	-17.90	46.00	27.89	0.03	0.18	AVERAGE
9	4.384	33.41	-22.59	56.00	32.98	0.13	0.30	QP
10	4.384	27.33	-18.67	46.00	26.90	0.13	0.30	AVERAGE
11	19.708	44.98	-15.02	60.00	43.67	0.81	0.50	QP
12	19.708	40.92	-9.08	50.00	39.61	0.81	0.50	AVERAGE

Temperature	25°C	Humidity	55%
Test Engineer	Cloud Peng	Phase	Neutral
Configuration	Normal Link / Mode 1		

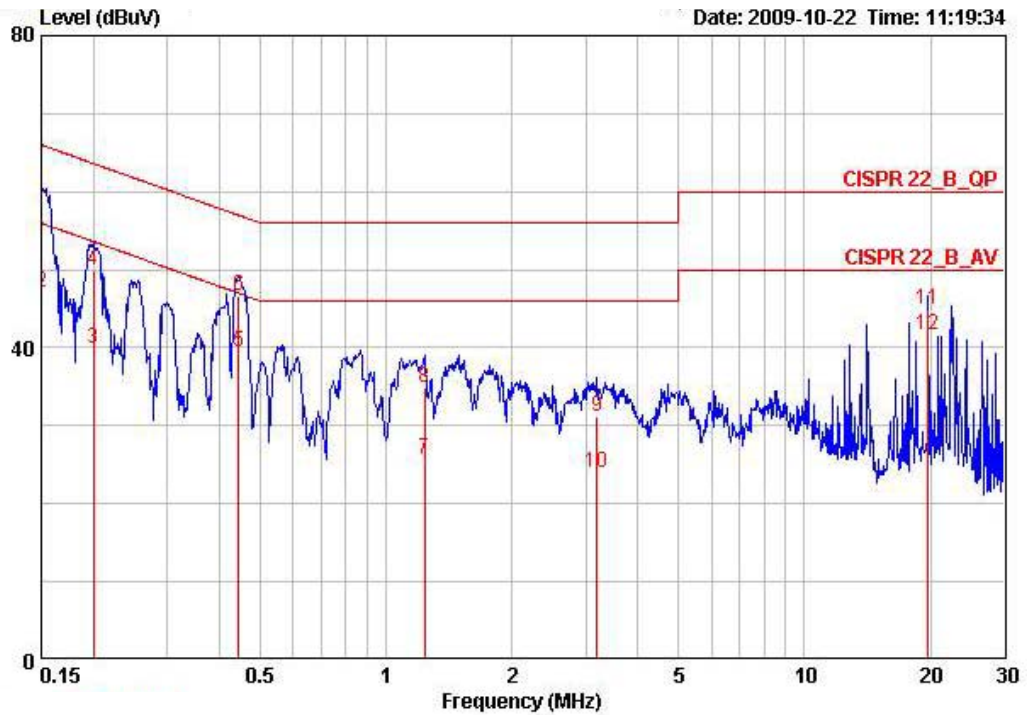

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.15000	57.63	-8.37	66.00	57.32	0.11	0.20	QP
2	0.15000	47.03	-8.97	56.00	46.72	0.11	0.20	AVERAGE
3	0.19969	39.96	-13.66	53.62	39.68	0.08	0.20	AVERAGE
4	0.19969	49.82	-13.80	63.62	49.54	0.08	0.20	QP
5	0.44443	39.50	-7.48	46.98	39.23	0.07	0.20	AVERAGE
6	0.44443	46.67	-10.31	56.98	46.40	0.07	0.20	QP
7	1.236	25.73	-20.27	46.00	25.51	0.08	0.15	AVERAGE
8	1.236	34.86	-21.14	56.00	34.64	0.08	0.15	QP
9	3.190	31.11	-24.89	56.00	30.75	0.12	0.24	QP
10	3.190	23.87	-22.13	46.00	23.51	0.12	0.24	AVERAGE
11	19.708	44.80	-15.20	60.00	43.51	0.79	0.50	QP
12	19.708	41.63	-8.37	50.00	40.34	0.79	0.50	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.2.3. Test Procedures

The transmitter output (antenna port) was connected to the spectrum analyzer.

### 4.2.4. Test Setup Layout

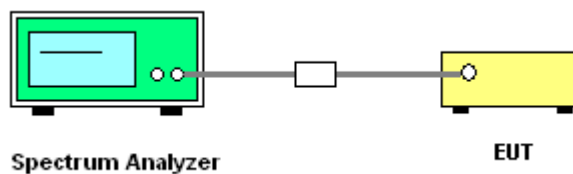

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

<For Ant. A - Dipole Antenna>:

<b>Temperature</b>	23°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Beck Wu	<b>Configurations</b>	IEEE 802.11n, Ant. A

##### Configuration IEEE 802.11n MCS0 20MHz Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	26.68	30.00	Complies
6	2437 MHz	29.56	30.00	Complies
11	2462 MHz	27.77	30.00	Complies

##### Configuration IEEE 802.11n MCS0 40MHz Ant. A

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	24.15	30.00	Complies
6	2437 MHz	29.15	30.00	Complies
9	2452 MHz	24.65	30.00	Complies

<b>Temperature</b>	23°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Beck Wu	<b>Configurations</b>	IEEE 802.11b/g, Ant. A

**Configuration IEEE 802.11b Ant. A**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	26.85	30.00	<b>Complies</b>
6	2437 MHz	29.21	30.00	<b>Complies</b>
11	2462 MHz	28.26	30.00	<b>Complies</b>

**Configuration IEEE 802.11g Ant. A**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	27.32	30.00	<b>Complies</b>
6	2437 MHz	29.56	30.00	<b>Complies</b>
11	2462 MHz	28.92	30.00	<b>Complies</b>

<For Ant. B - PCB Antenna>:

<b>Temperature</b>	23°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Beck Wu	<b>Configurations</b>	IEEE 802.11n, Ant. B

Configuration IEEE 802.11n MCS0 20MHz Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	25.48	27.55	Complies
6	2437 MHz	27.29	27.55	Complies
11	2462 MHz	25.30	27.55	Complies

Configuration IEEE 802.11n MCS0 40MHz Ant. B

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	22.56	27.55	Complies
6	2437 MHz	27.17	27.55	Complies
9	2452 MHz	22.19	27.55	Complies

<b>Temperature</b>	23°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Beck Wu	<b>Configurations</b>	IEEE 802.11b/g, Ant. A

**Configuration IEEE 802.11b Ant. B**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	26.05	27.55	Complies
6	2437 MHz	27.36	27.55	Complies
11	2462 MHz	26.05	27.55	Complies


**Configuration IEEE 802.11g Ant. B**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	25.93	27.55	Complies
6	2437 MHz	27.39	27.55	Complies
11	2462 MHz	25.87	27.55	Complies




<For Ant. A -Dipole Antenna>:

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 2412 MHz

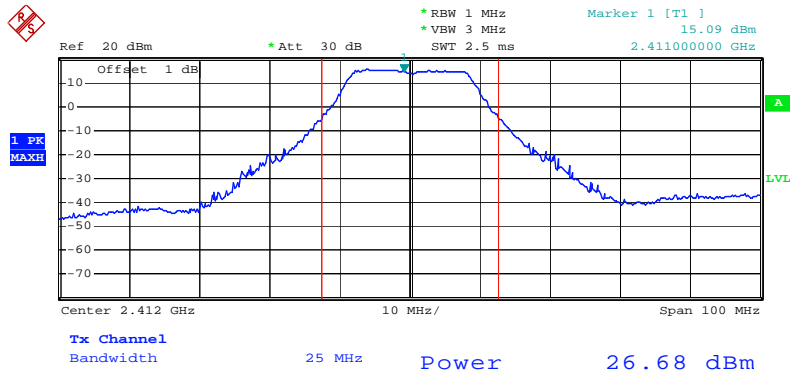


Date: 27.NOV.2009 09:58:27

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 2437 MHz

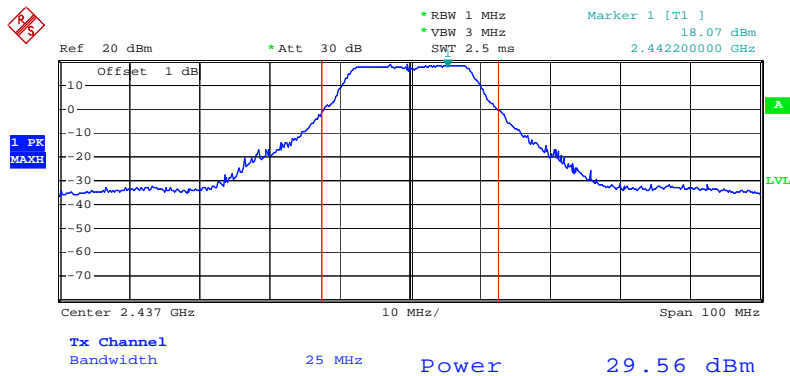


Date: 27.NOV.2009 09:53:55

### Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 2462 MHz

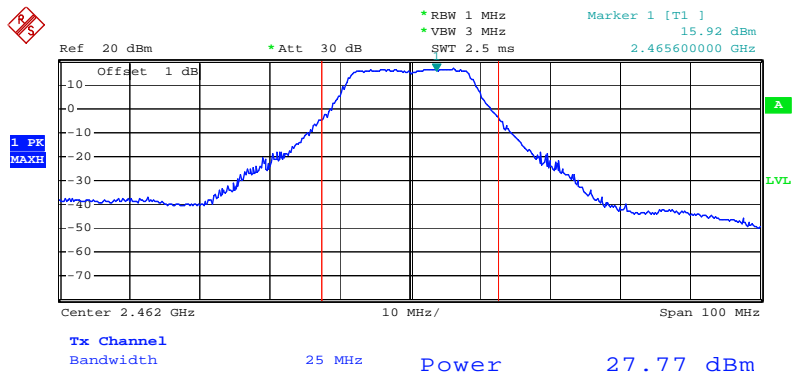


Date: 27.NOV.2009 09:52:03

### Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 2422 MHz

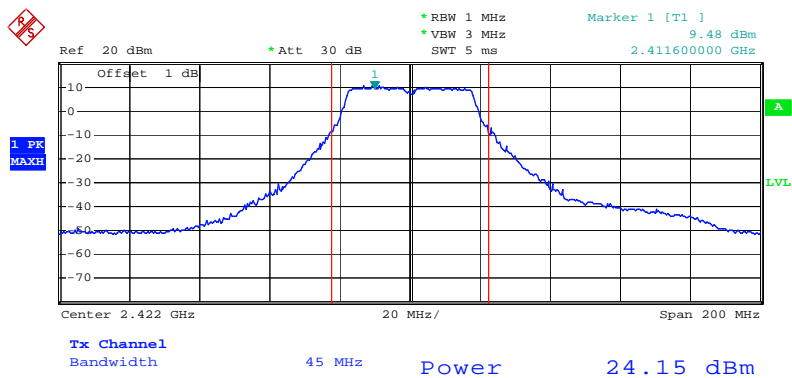


Date: 27.NOV.2009 09:47:50

## Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 2437 MHz

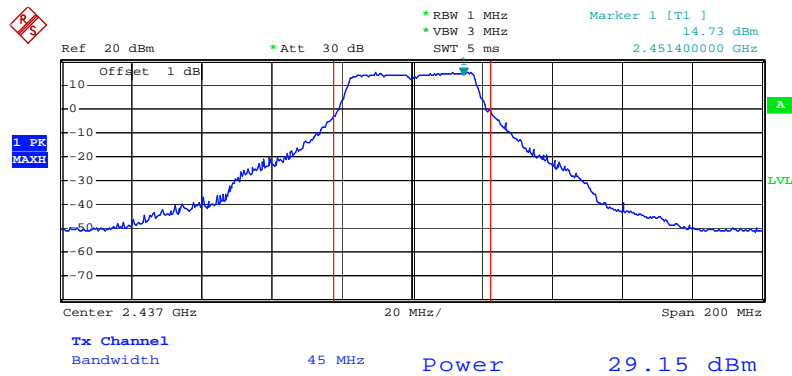


Date: 27.NOV.2009 09:45:58

## Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 2452 MHz

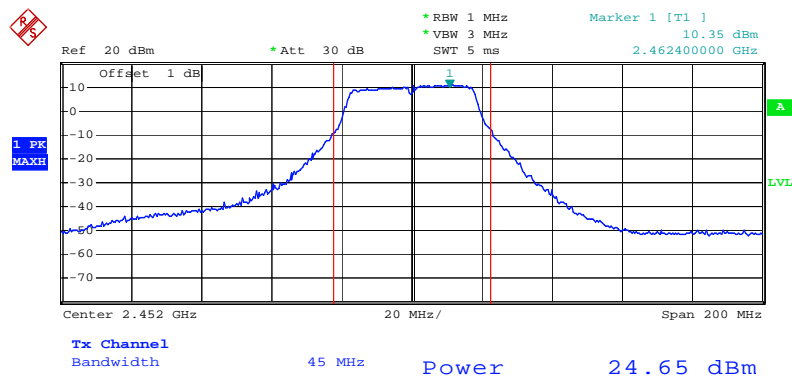


Date: 27.NOV.2009 09:49:05

### Conducted Output Power Plot on Configuration IEEE 802.11b Ant. A / 2412 MHz

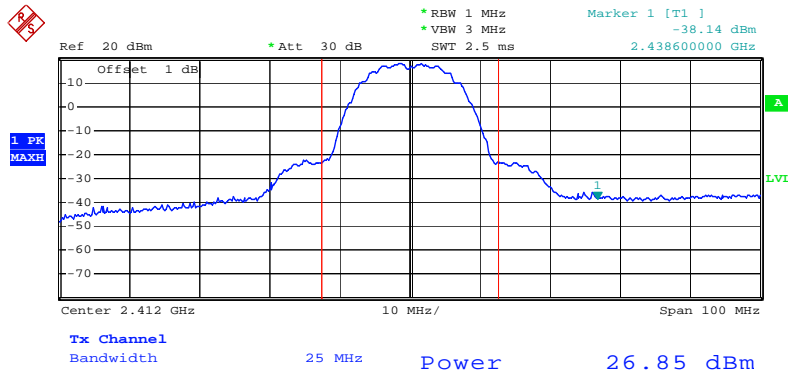


Date: 27.NOV.2009 10:22:19

### Conducted Output Power Plot on Configuration IEEE 802.11b Ant. A / 2437 MHz

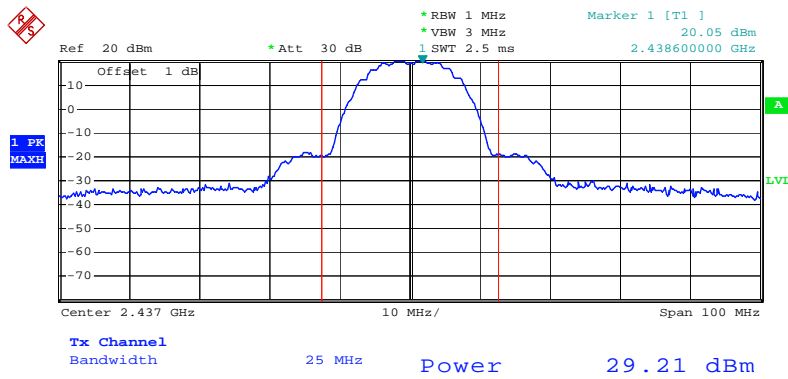


Date: 27.NOV.2009 10:21:12

### Conducted Output Power Plot on Configuration IEEE 802.11b Ant. A / 2462 MHz

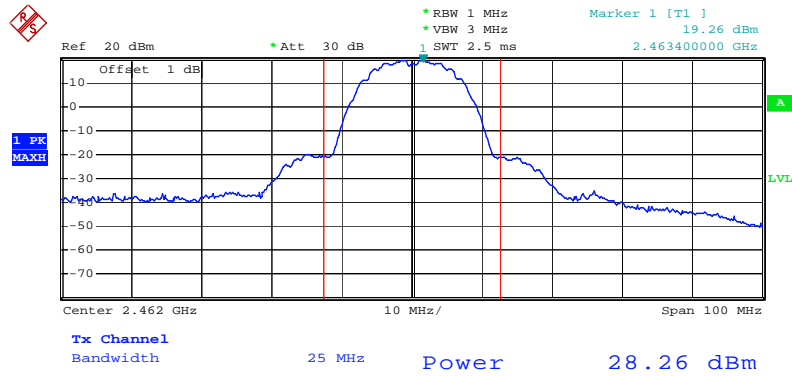


Date: 27.NOV.2009 10:19:17

### Conducted Output Power Plot on Configuration IEEE 802.11g Ant. A / 2412 MHz

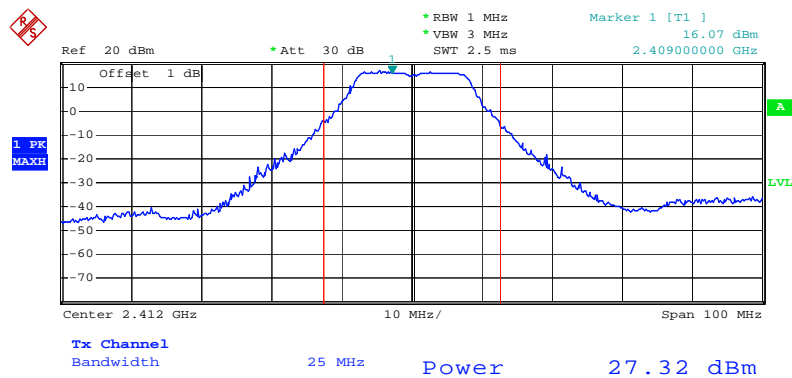


Date: 27.NOV.2009 10:14:50

### Conducted Output Power Plot on Configuration IEEE 802.11g Ant. A / 2437 MHz

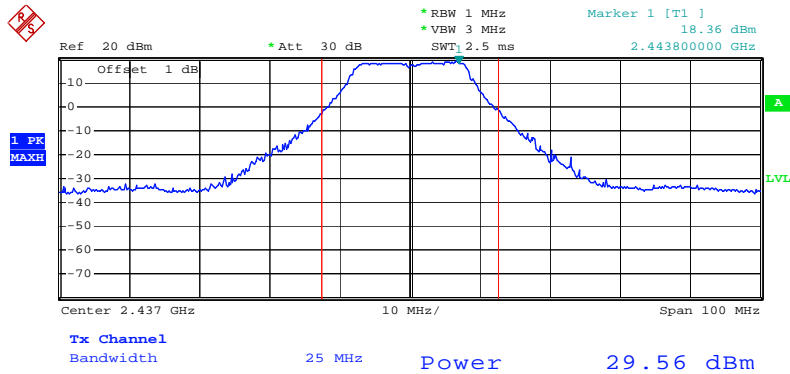

Date: 27.NOV.2009 10:15:52


### Conducted Output Power Plot on Configuration IEEE 802.11g Ant. A / 2462 MHz

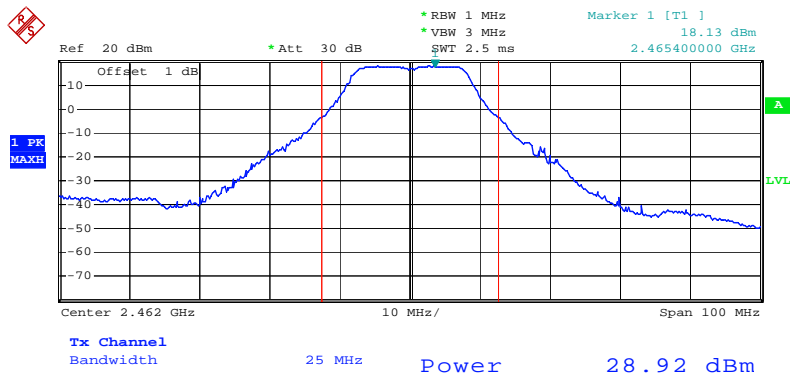

Date: 27.NOV.2009 10:17:31


<For Ant. B - PCB Antenna>:

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 2412 MHz

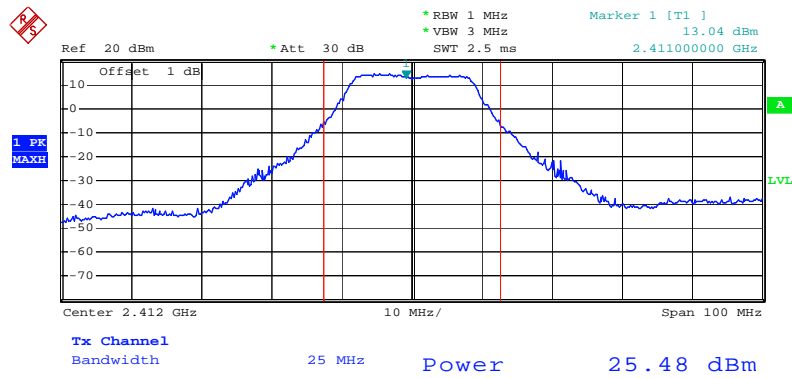


Date: 27.NOV.2009 10:06:03

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 2437 MHz

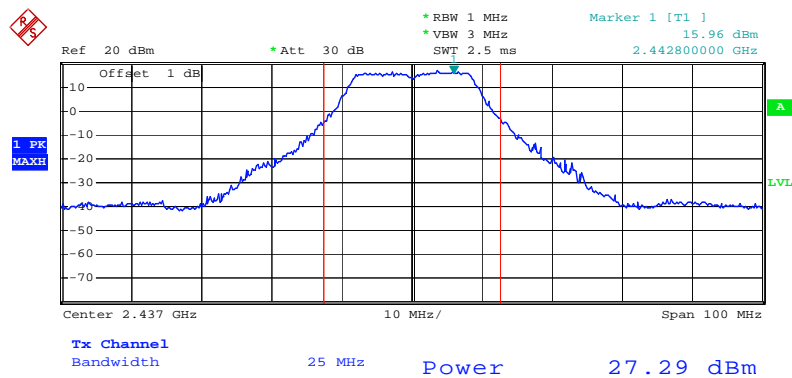


Date: 27.NOV.2009 10:07:43

## Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 2462 MHz

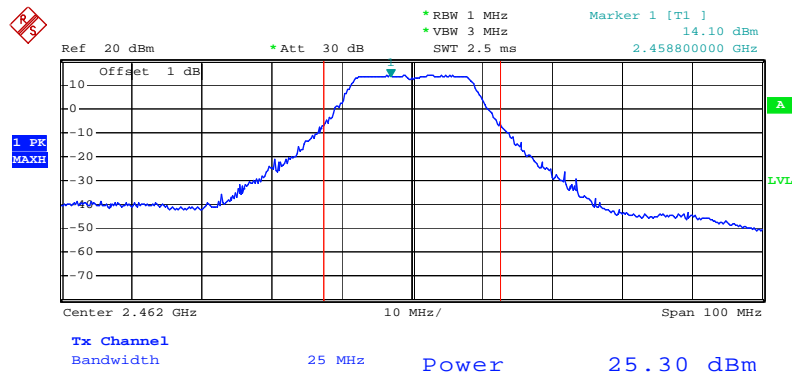

Date: 27.NOV.2009 10:08:52


## Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. B / 2422 MHz

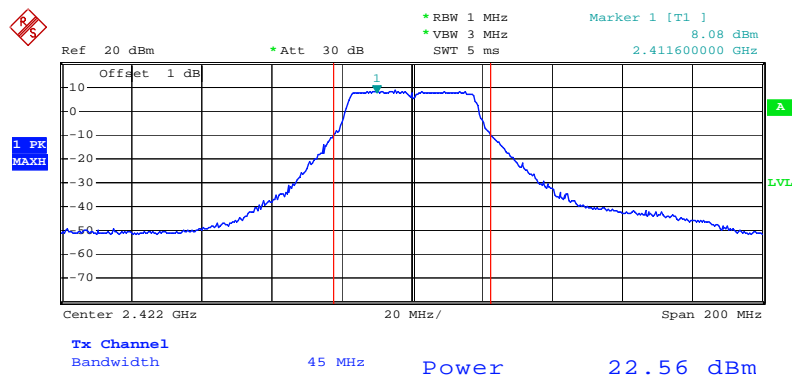

Date: 27.NOV.2009 09:39:59




### Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. B / 2437 MHz

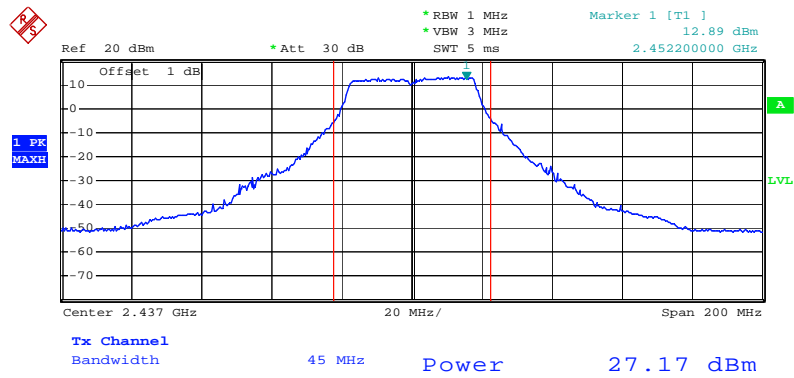


Date: 27.NOV.2009 09:43:55

### Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. B / 2452 MHz

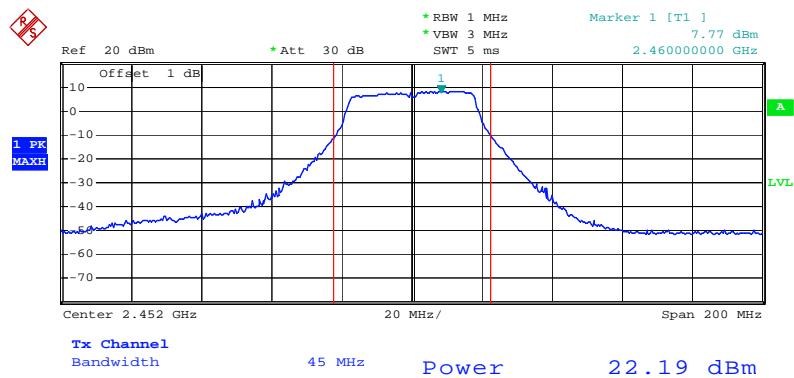


Date: 27.NOV.2009 09:42:20

### Conducted Output Power Plot on Configuration IEEE 802.11b Ant. B / 2412 MHz

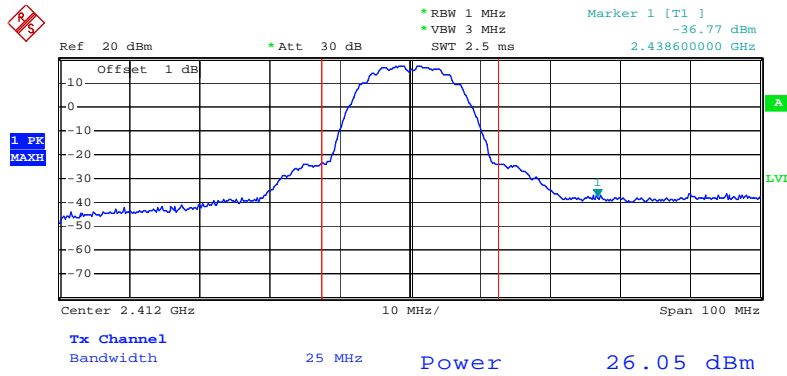


Date: 27.NOV.2009 10:23:53

### Conducted Output Power Plot on Configuration IEEE 802.11b Ant. B / 2437 MHz

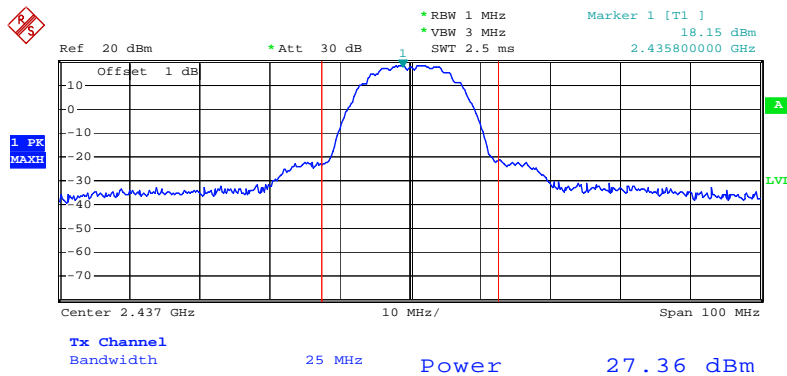


Date: 27.NOV.2009 10:25:05

### Conducted Output Power Plot on Configuration IEEE 802.11b Ant. B / 2462 MHz

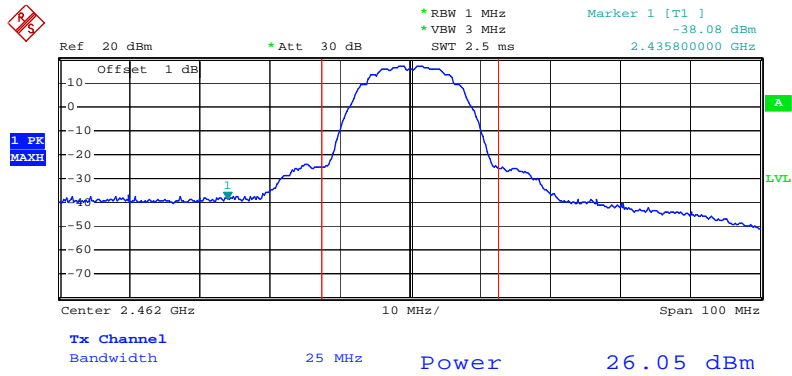


Date: 27.NOV.2009 10:26:27

### Conducted Output Power Plot on Configuration IEEE 802.11g Ant. B / 2412 MHz

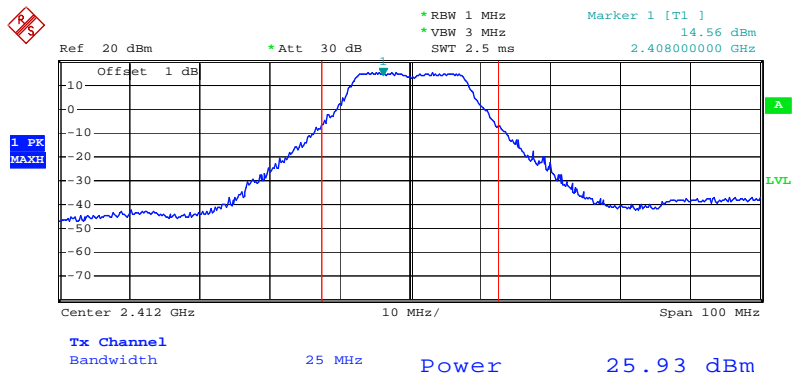


Date: 27.NOV.2009 10:13:14

### Conducted Output Power Plot on Configuration IEEE 802.11g Ant. B / 2437 MHz

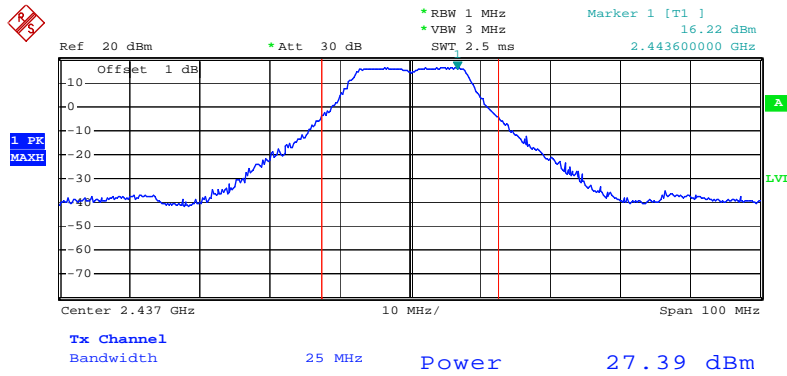

Date: 27.NOV.2009 10:11:58

### Conducted Output Power Plot on Configuration IEEE 802.11g Ant. B / 2462 MHz

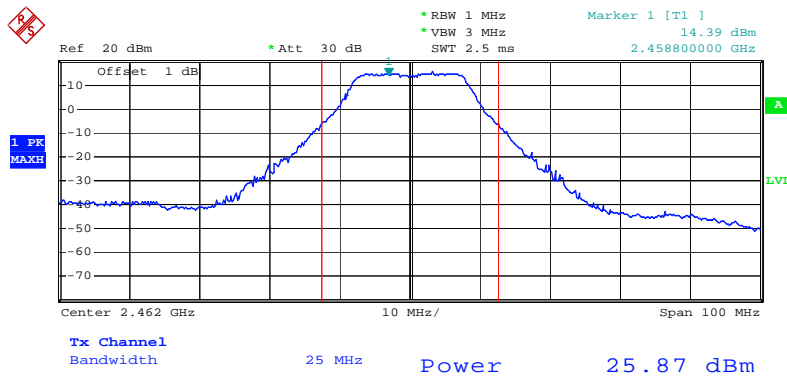

Date: 27.NOV.2009 10:10:44

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	30 kHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	10s

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 30kHz and the sweep time to 10s and record the maximum peak value.

#### 4.3.4. Test Setup Layout

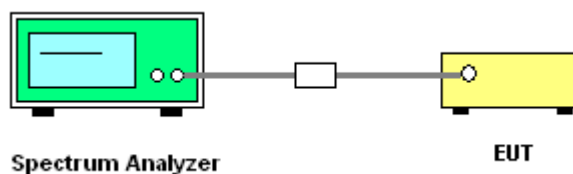

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

<For Ant. A - Dipole Antenna>:

<b>Temperature</b>	23°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Beck Wu	<b>Configurations</b>	IEEE 802.11n, Ant. A

##### Configuration IEEE 802.11n MCS0 20MHz Ant. A

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-7.63	8.00	Complies
6	2437 MHz	-3.54	8.00	Complies
11	2462 MHz	-5.69	8.00	Complies

##### Configuration IEEE 802.11n MCS0 40MHz Ant. A

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
3	2422 MHz	-13.28	8.00	Complies
6	2437 MHz	-6.98	8.00	Complies
9	2452 MHz	-11.55	8.00	Complies

<b>Temperature</b>	23°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Beck Wu	<b>Configurations</b>	IEEE 802.11b/g, Ant. A

**Configuration IEEE 802.11b Ant. A**

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-1.76	8.00	Complies
6	2437 MHz	0.65	8.00	Complies
11	2462 MHz	0.81	8.00	Complies

**Configuration IEEE 802.11g Ant. A**

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-7.51	8.00	Complies
6	2437 MHz	-3.15	8.00	Complies
11	2462 MHz	-5.41	8.00	Complies

<For Ant. B - PCB Antenna>:

<b>Temperature</b>	23°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Beck Wu	<b>Configurations</b>	IEEE 802.11n, Ant. B

Configuration IEEE 802.11n MCS0 20MHz Ant. B

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-7.84	8.00	Complies
6	2437 MHz	-5.85	8.00	Complies
11	2462 MHz	-8.51	8.00	Complies

Configuration IEEE 802.11n MCS0 40MHz Ant. B

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
3	2422 MHz	-14.89	8.00	Complies
6	2437 MHz	-8.62	8.00	Complies
9	2452 MHz	-13.13	8.00	Complies



<b>Temperature</b>	23°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Beck Wu	<b>Configurations</b>	IEEE 802.11b/g, Ant. B

**Configuration IEEE 802.11b Ant. B**


Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-2.20	8.00	Complies
6	2437 MHz	-0.37	8.00	Complies
11	2462 MHz	-0.94	8.00	Complies

**Configuration IEEE 802.11g Ant. B**

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-8.48	8.00	Complies
6	2437 MHz	-5.13	8.00	Complies
11	2462 MHz	-7.62	8.00	Complies


<For Ant. A - Dipole Antenna>:

**Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 2412 MHz**

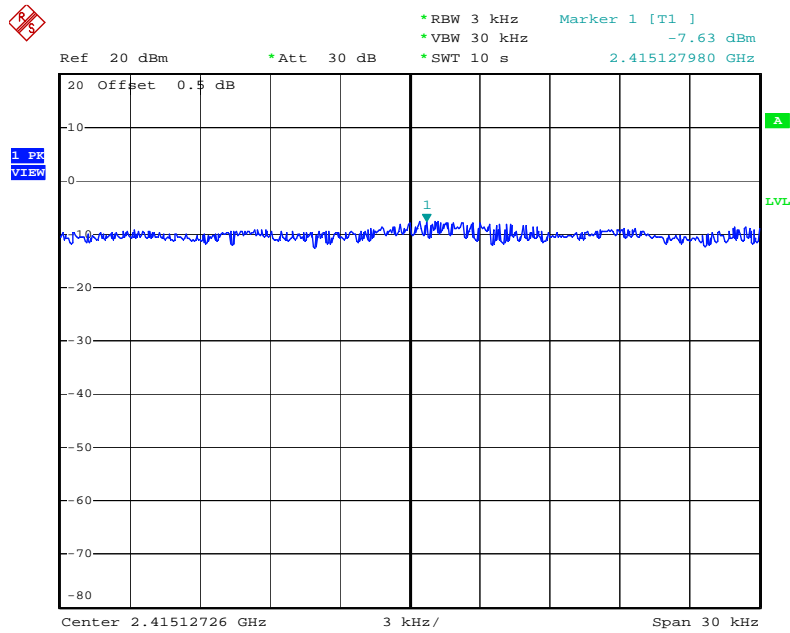


Date: 15.OCT.2009 22:42:17

**Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 2437 MHz**

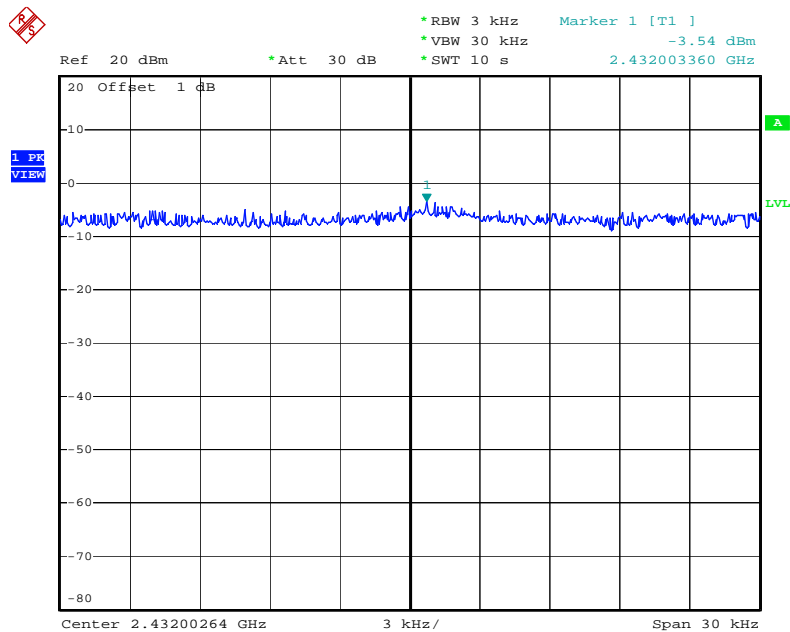


Date: 27.NOV.2009 10:49:57

**Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 2462 MHz**

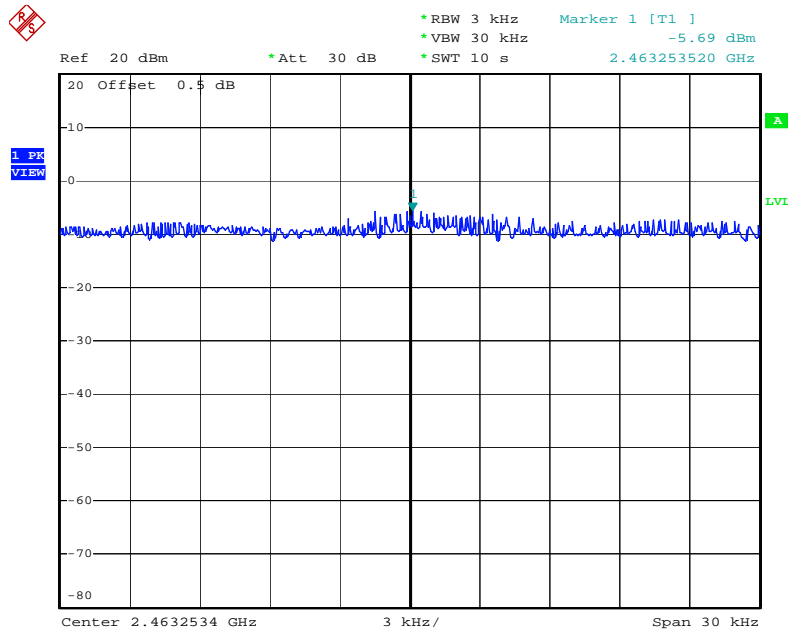


Date: 19.OCT.2009 23:23:12

**Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 2422 MHz**

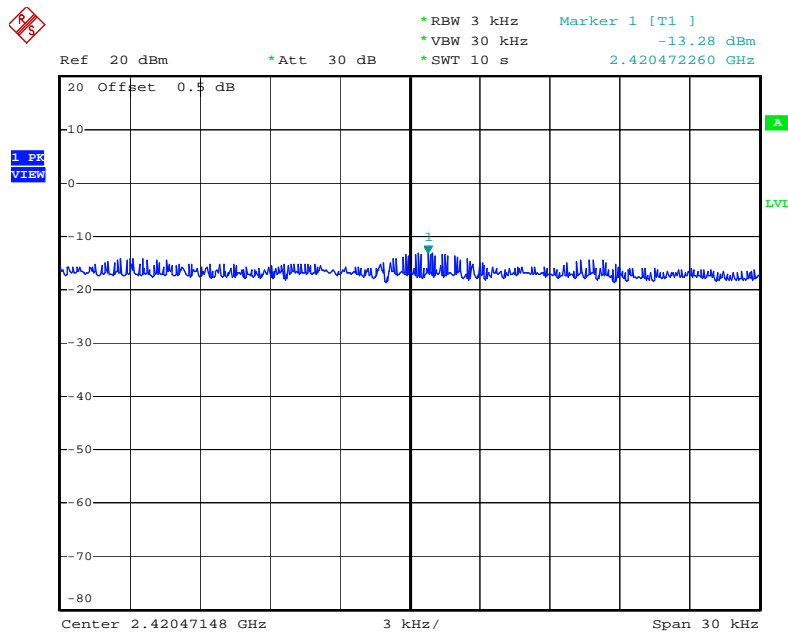


Date: 19.OCT.2009 23:01:26

### Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 2437 MHz

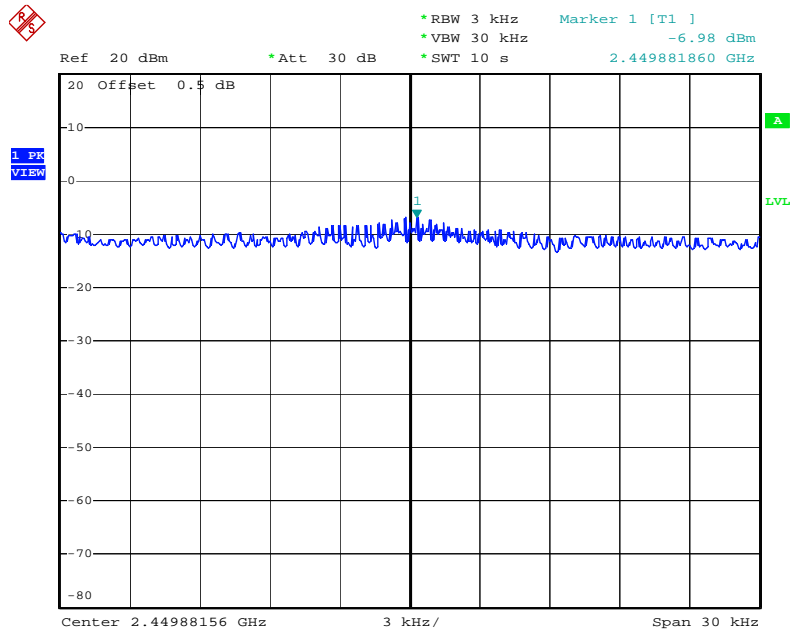


Date: 19.OCT.2009 23:13:41

### Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 2452 MHz

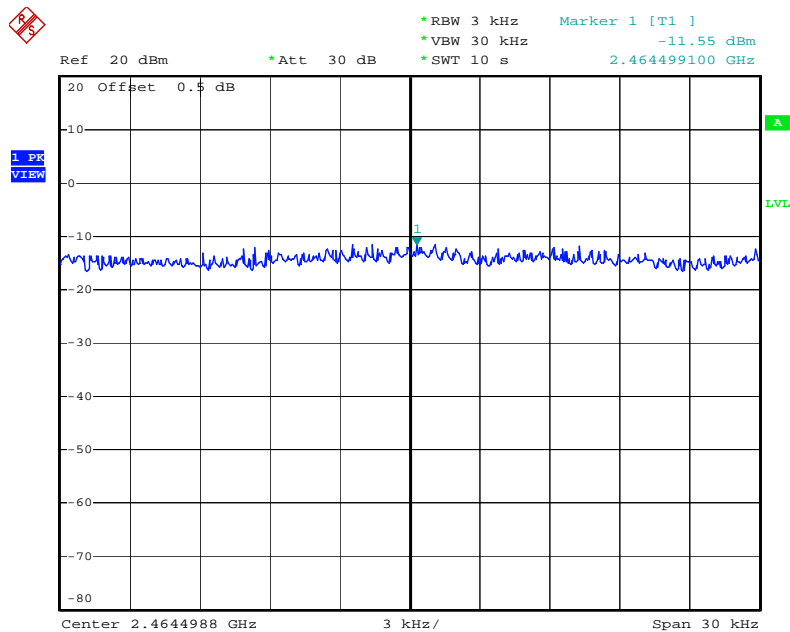


Date: 19.OCT.2009 22:58:17

**Power Density Plot on Configuration IEEE 802.11b Ant. A / 2412 MHz**

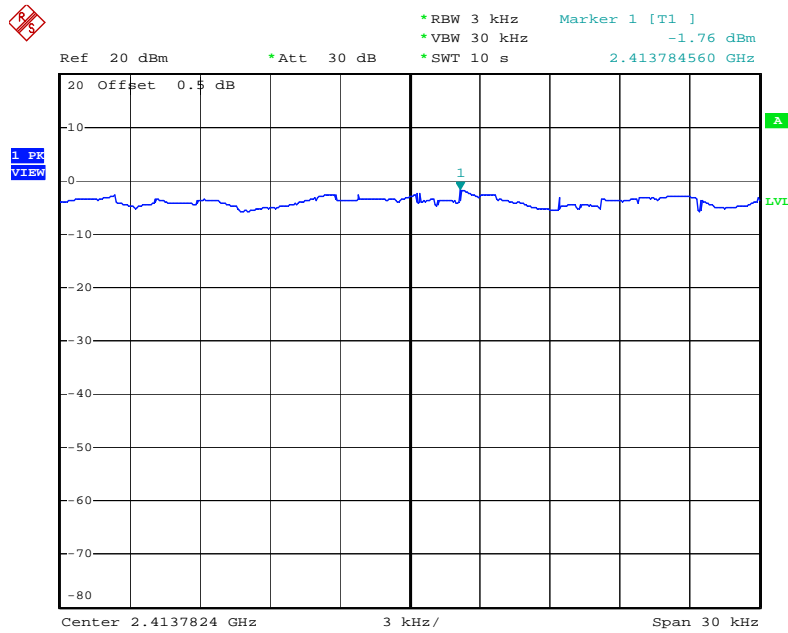


Date: 15.OCT.2009 23:01:43

**Power Density Plot on Configuration IEEE 802.11b Ant. A / 2437 MHz**

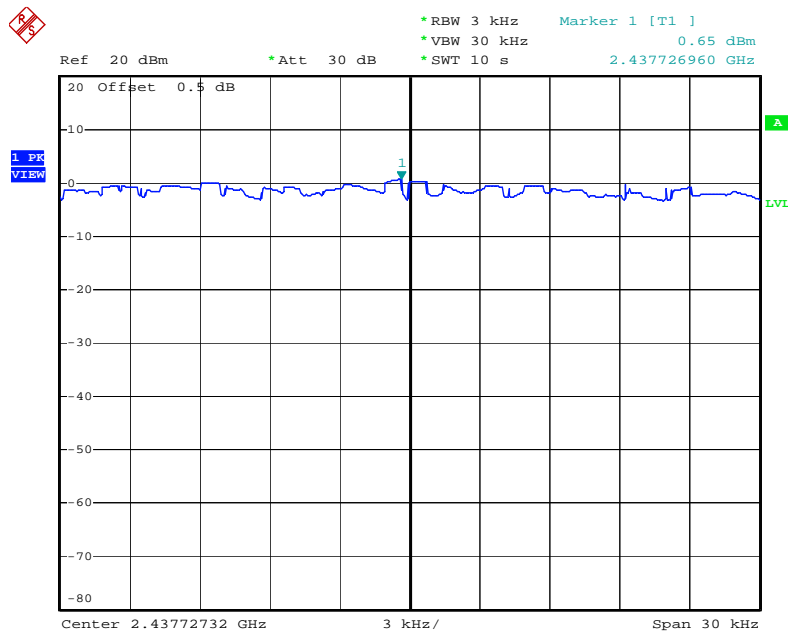


Date: 15.OCT.2009 23:04:31

Power Density Plot on Configuration IEEE 802.11b Ant. A / 2462 MHz

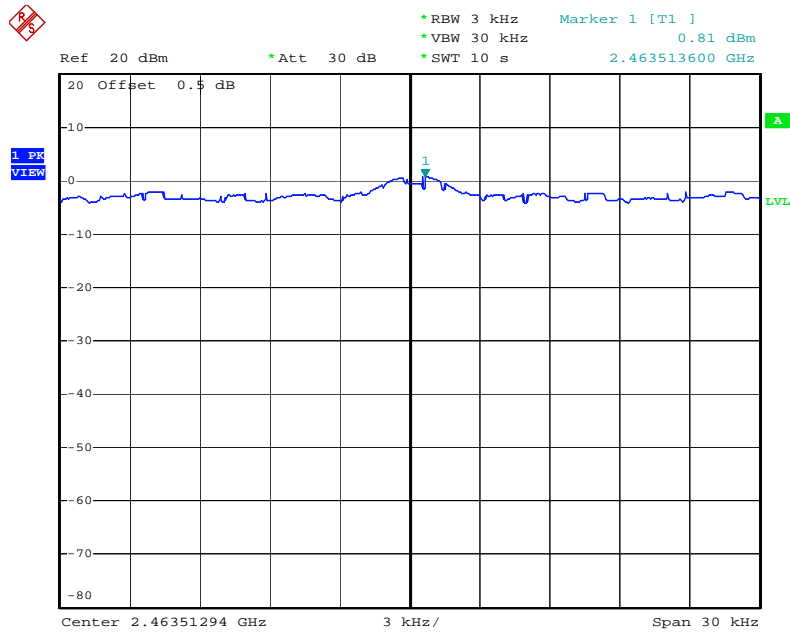


Date: 15.OCT.2009 23:07:41

Power Density Plot on Configuration IEEE 802.11g Ant. A / 2412 MHz

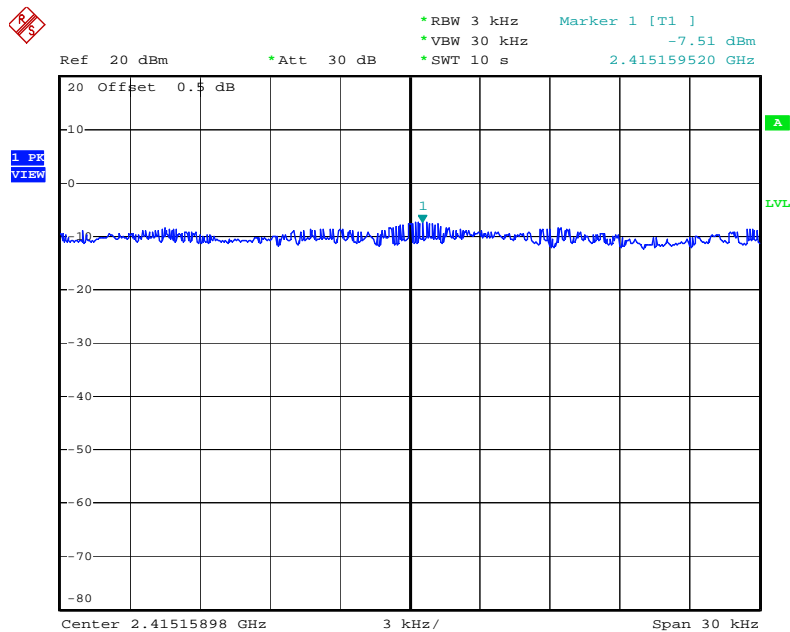


Date: 15.OCT.2009 22:57:18

**Power Density Plot on Configuration IEEE 802.11g Ant. A / 2437 MHz**

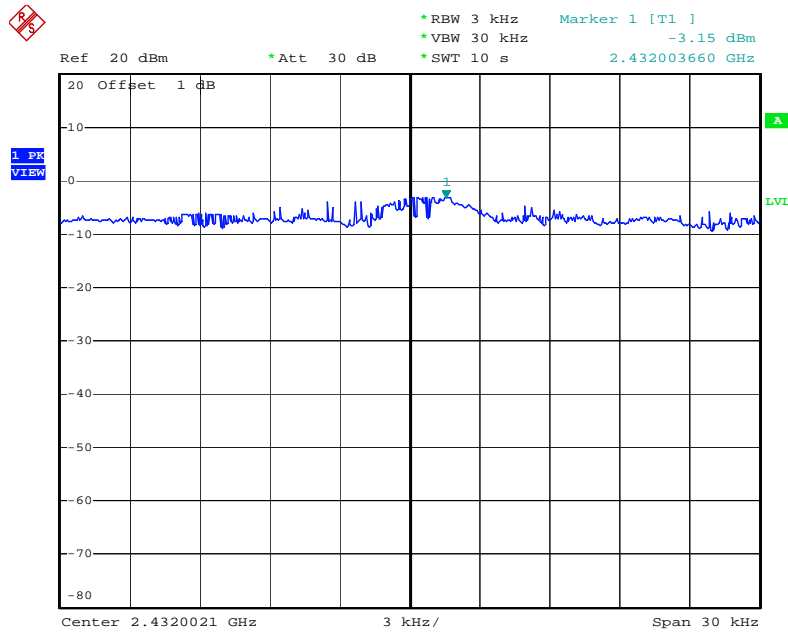

Date: 27.NOV.2009 10:46:54


**Power Density Plot on Configuration IEEE 802.11g Ant. A / 2462 MHz**

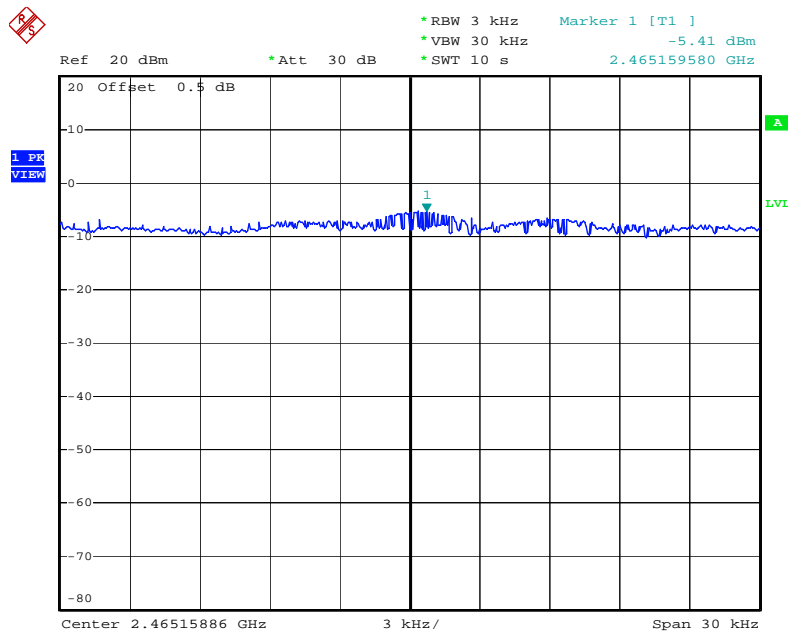

Date: 19.OCT.2009 23:33:48


<For Ant. B - PCB Antenna>:

**Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 2412 MHz**

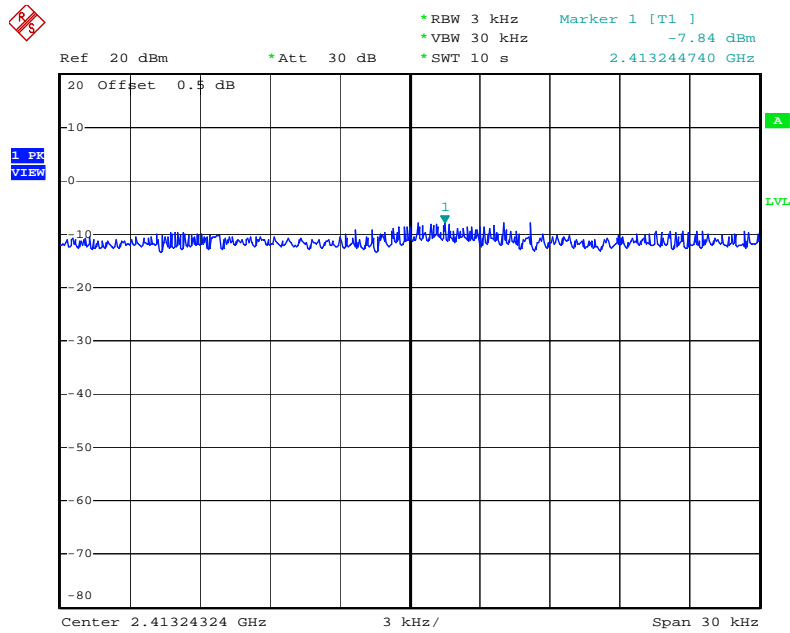

Date: 15.OCT.2009 22:01:36


**Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 2437 MHz**

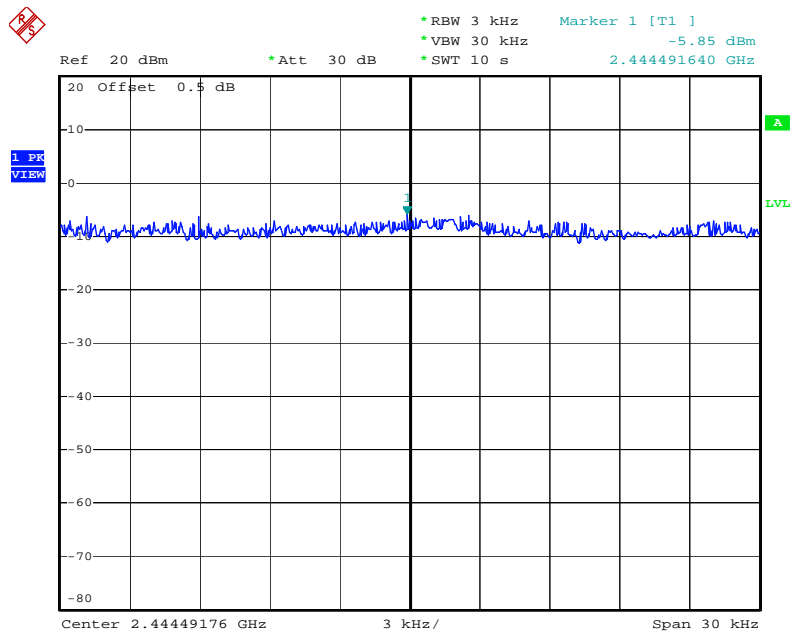

Date: 15.OCT.2009 21:59:30




**Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 2462 MHz**

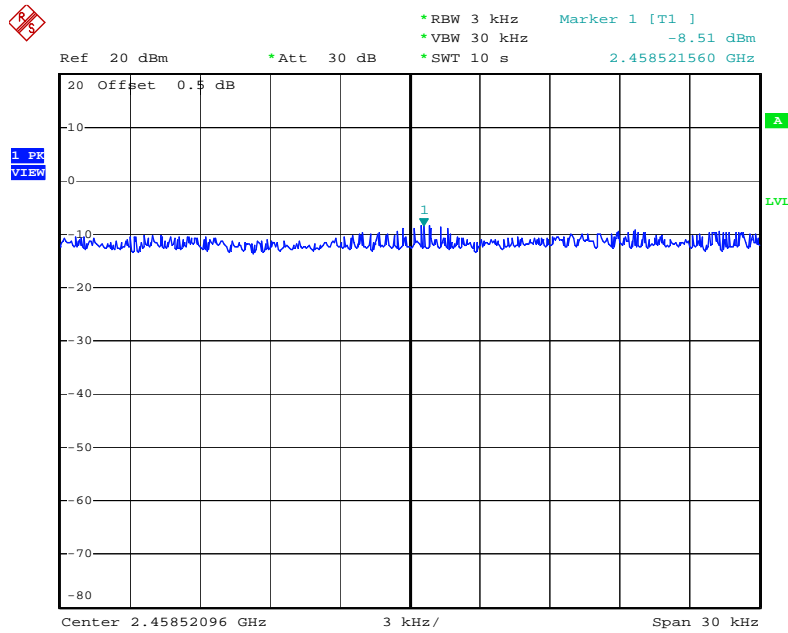


Date: 15.OCT.2009 21:57:11

**Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. B / 2422 MHz**

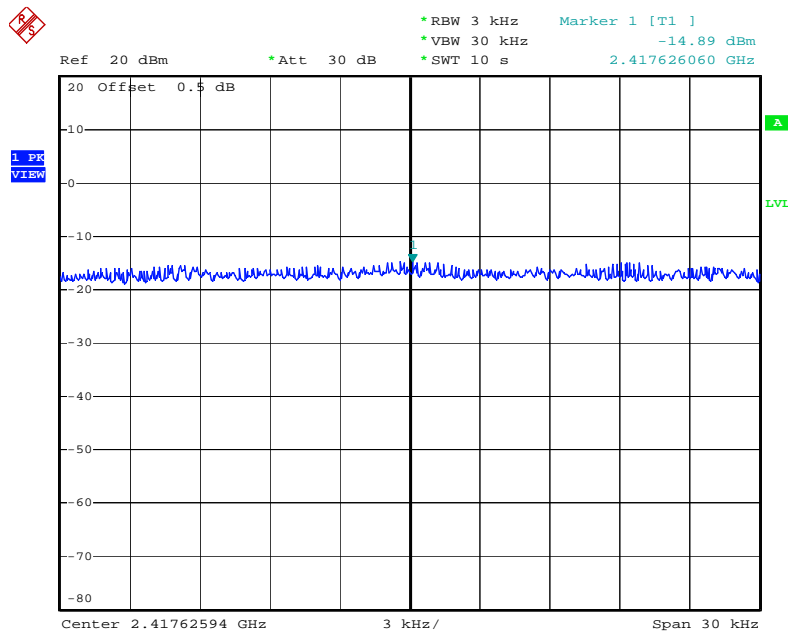


Date: 15.OCT.2009 22:16:20

**Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. B / 2437 MHz**

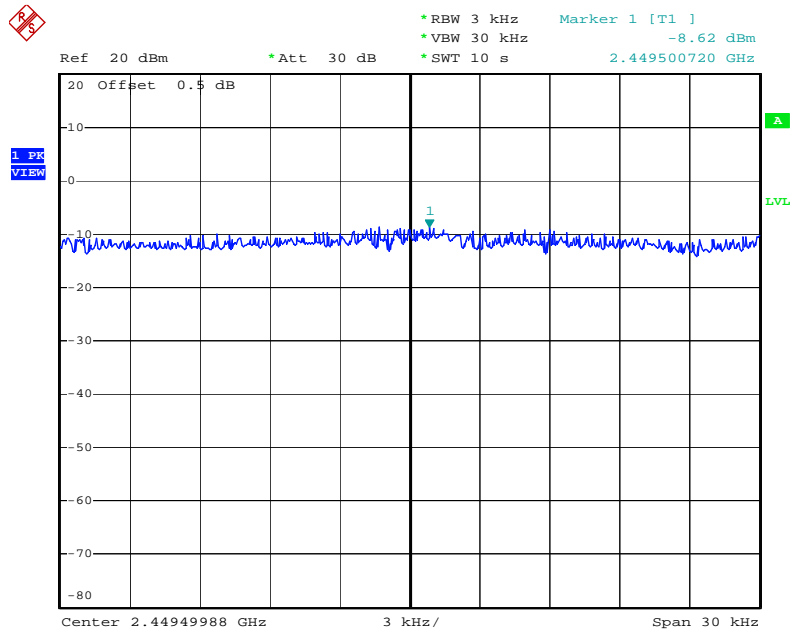


Date: 15.OCT.2009 22:18:31

**Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. B / 2452 MHz**

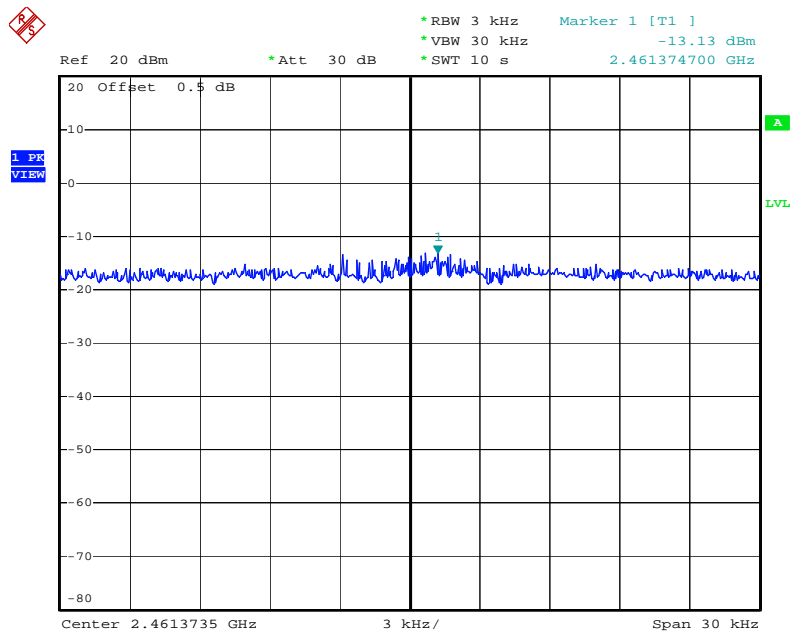


Date: 15.OCT.2009 22:14:07

### Power Density Plot on Configuration IEEE 802.11b Ant. B / 2412 MHz

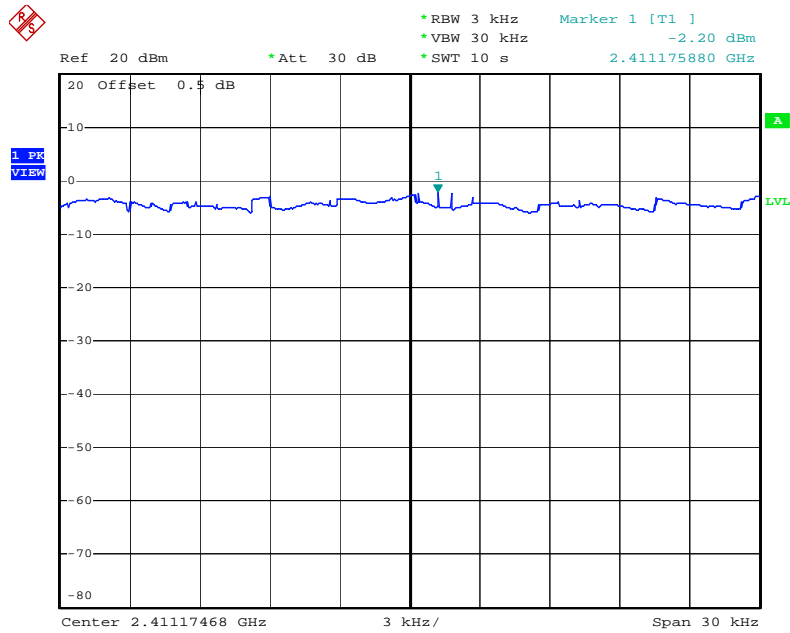


Date: 15.OCT.2009 22:05:22

### Power Density Plot on Configuration IEEE 802.11b Ant. B / 2437 MHz

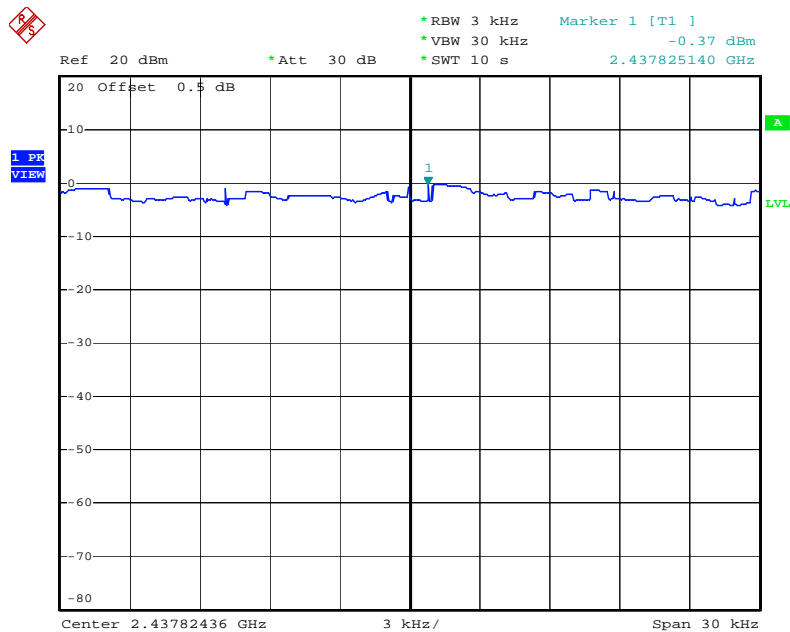


Date: 15.OCT.2009 22:07:36

**Power Density Plot on Configuration IEEE 802.11b Ant. B / 2462 MHz**

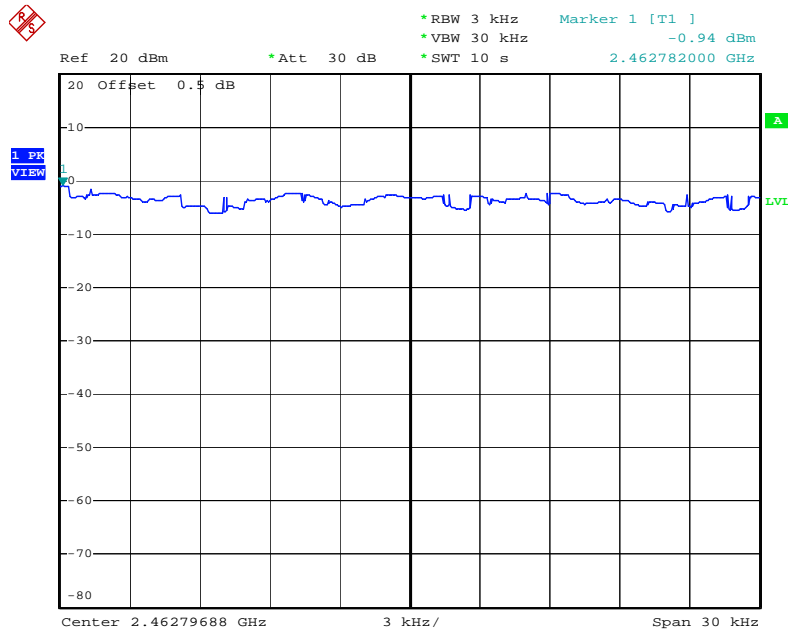


Date: 15.OCT.2009 22:10:14

**Power Density Plot on Configuration IEEE 802.11g Ant. B / 2412 MHz**

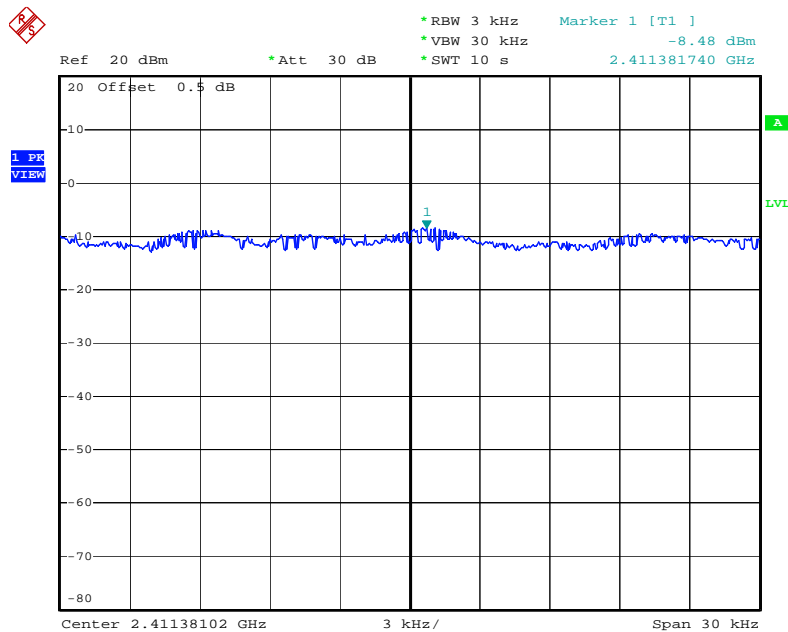


Date: 15.OCT.2009 21:49:30

### Power Density Plot on Configuration IEEE 802.11g Ant. B / 2437 MHz

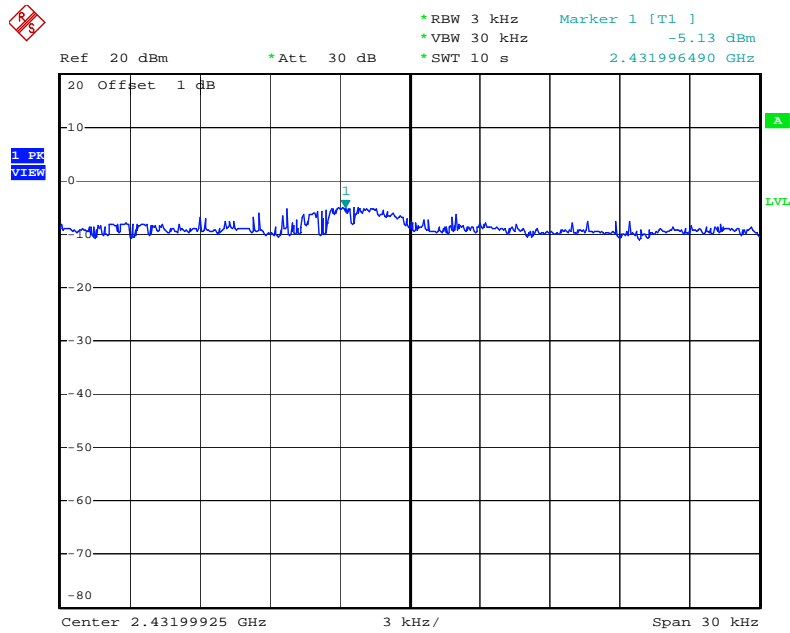

Date: 27.NOV.2009 10:41:46

### Power Density Plot on Configuration IEEE 802.11g Ant. B / 2462 MHz

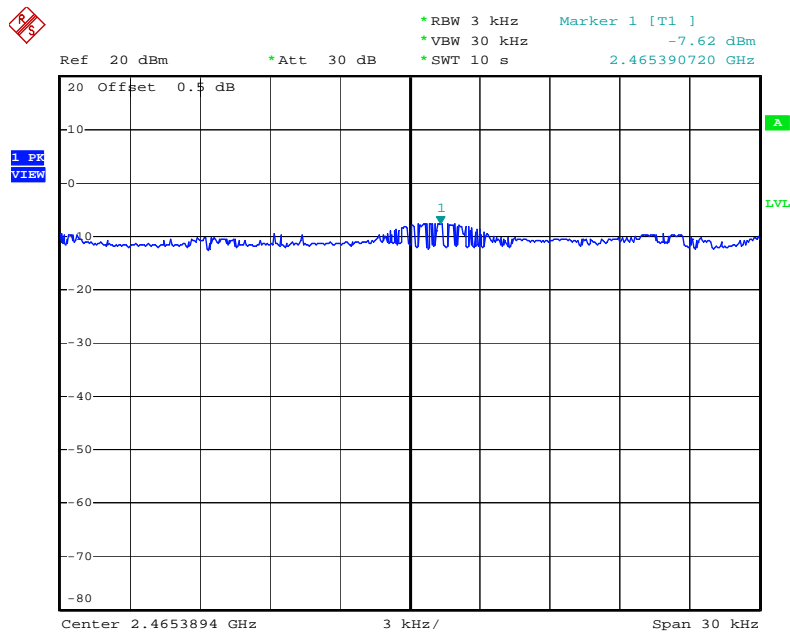

Date: 15.OCT.2009 21:53:54

#### 4.4. 6dB Spectrum Bandwidth Measurement

##### 4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

##### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

##### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

##### 4.4.4. Test Setup Layout

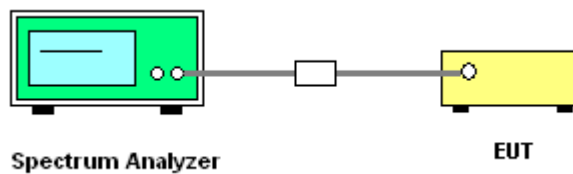

##### 4.4.5. Test Deviation

There is no deviation with the original standard.

##### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

<For Ant. A – Dipole Antenna>:

<b>Temperature</b>	23°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Beck Wu	<b>Configurations</b>	IEEE 802.11n, Ant. A

##### Configuration IEEE 802.11n MCS0 20MHz Ant. A

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.60	17.72	500	Complies
6	2437 MHz	17.56	17.76	500	Complies
11	2462 MHz	17.56	17.72	500	Complies

##### Configuration IEEE 802.11n MCS0 40MHz Ant. A

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.40	36.32	500	Complies
6	2437 MHz	36.08	36.32	500	Complies
9	2452 MHz	36.00	36.24	500	Complies

<b>Temperature</b>	23°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Beck Wu	<b>Configurations</b>	IEEE 802.11b/g, Ant. A

**Configuration IEEE 802.11b Ant. A**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	12.08	15.76	500	Complies
6	2437 MHz	12.52	15.76	500	Complies
11	2462 MHz	12.08	15.60	500	Complies

**Configuration IEEE 802.11g Ant. A**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.36	16.52	500	Complies
6	2437 MHz	16.36	16.52	500	Complies
11	2462 MHz	16.36	16.52	500	Complies



<For Ant. B – PCB Antenna>:

<b>Temperature</b>	23°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Beck Wu	<b>Configurations</b>	IEEE 802.11n, Ant. B

Configuration IEEE 802.11n MCS0 20MHz Ant. B

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.60	17.68	500	Complies
6	2437 MHz	17.60	17.72	500	Complies
11	2462 MHz	17.60	17.68	500	Complies

Configuration IEEE 802.11n MCS0 40MHz Ant. B

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.40	36.32	500	Complies
6	2437 MHz	36.40	36.32	500	Complies
9	2452 MHz	35.76	36.24	500	Complies

<b>Temperature</b>	23°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Beck Wu	<b>Configurations</b>	IEEE 802.11b/g, Ant. B

**Configuration IEEE 802.11b Ant. B**


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	12.04	15.68	500	Complies
6	2437 MHz	12.04	15.76	500	Complies
11	2462 MHz	11.08	15.56	500	Complies

**Configuration IEEE 802.11g Ant. B**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.40	16.56	500	Complies
6	2437 MHz	16.36	16.56	500	Complies
11	2462 MHz	16.40	16.56	500	Complies


<For Ant. A – Dipole Antenna>:

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 2412 MHz

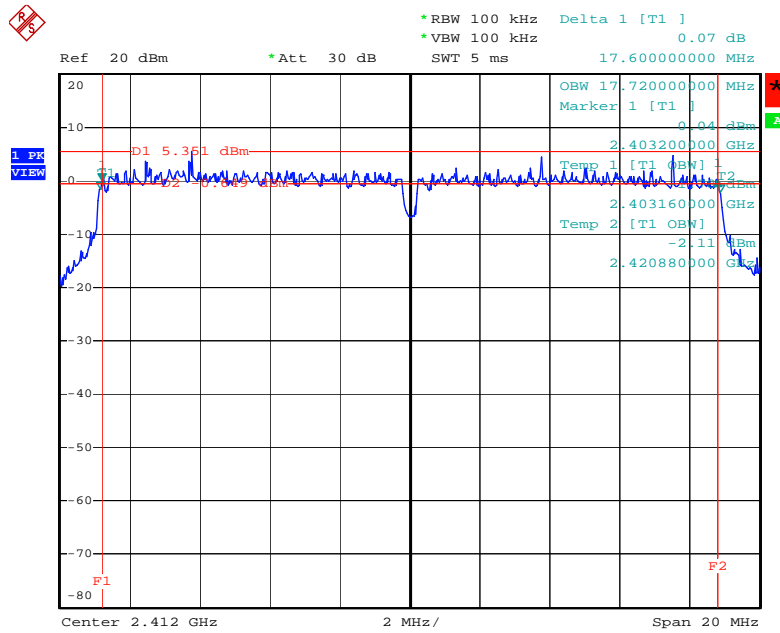


Date: 15.OCT.2009 22:40:50

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 2437 MHz

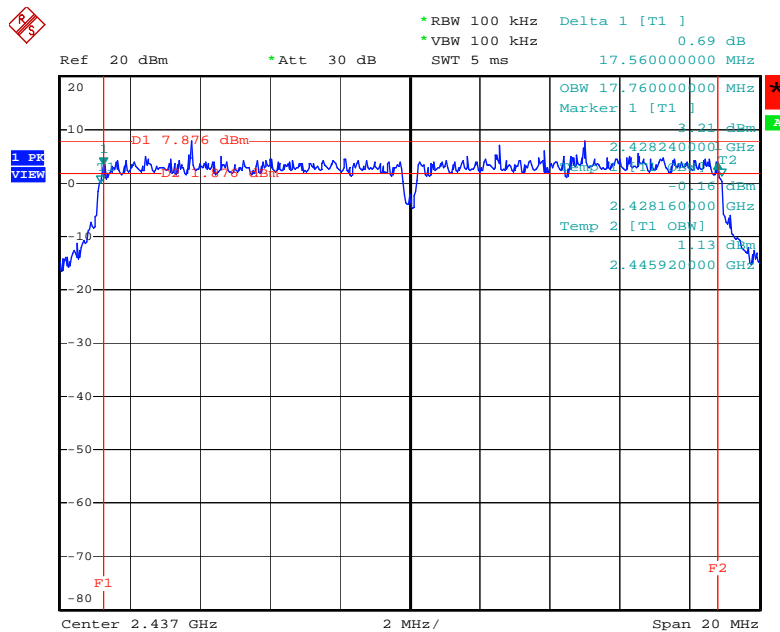


Date: 27.NOV.2009 10:48:29

### 6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 2462 MHz

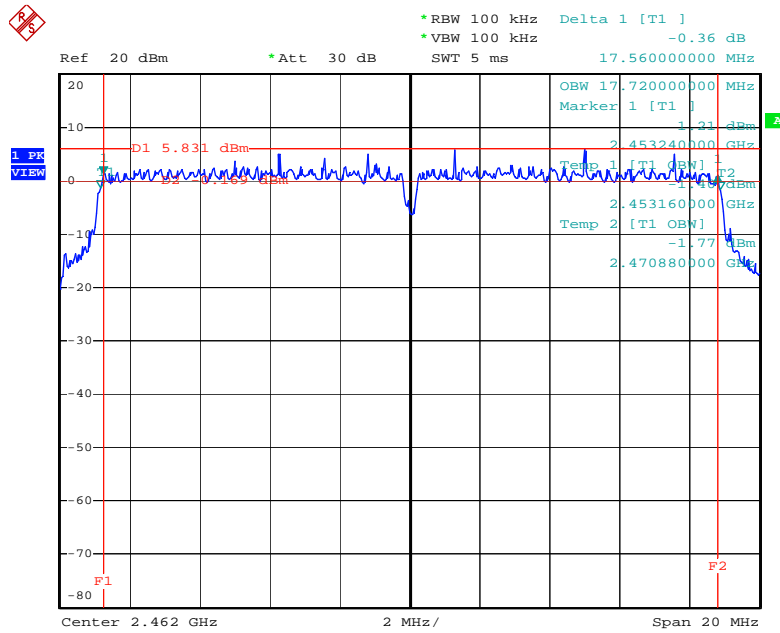


Date: 19.OCT.2009 23:21:45

### 6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 2422 MHz

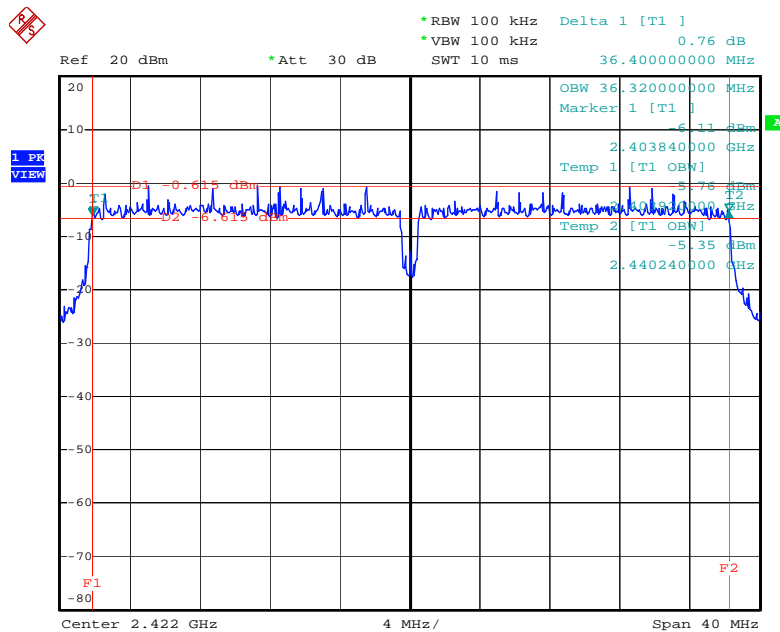


Date: 19.OCT.2009 22:59:59

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 2437 MHz

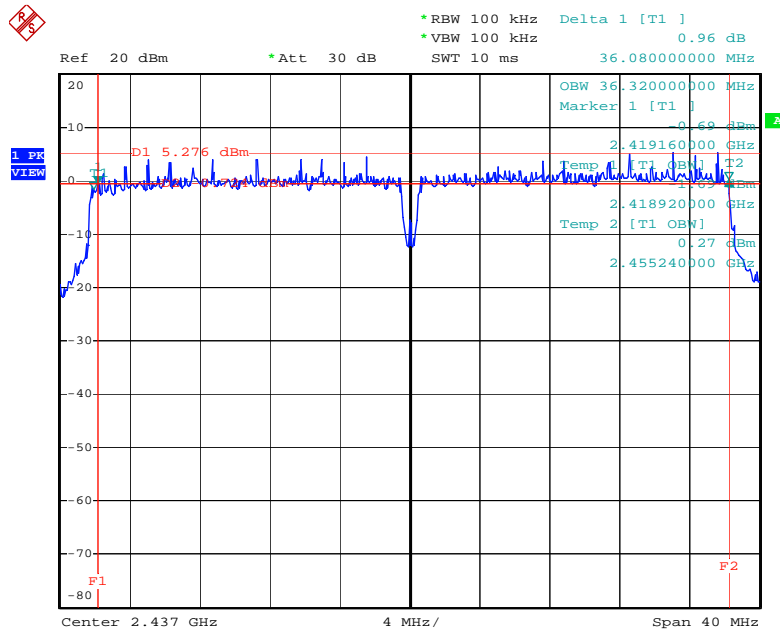


Date: 19.OCT.2009 23:12:14

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 2452 MHz

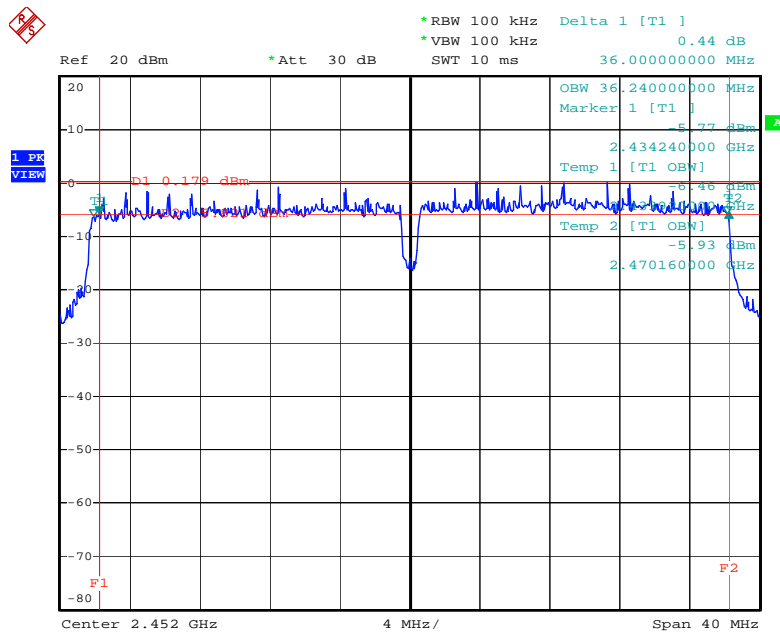


Date: 19.OCT.2009 22:56:50

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. A / 2412 MHz

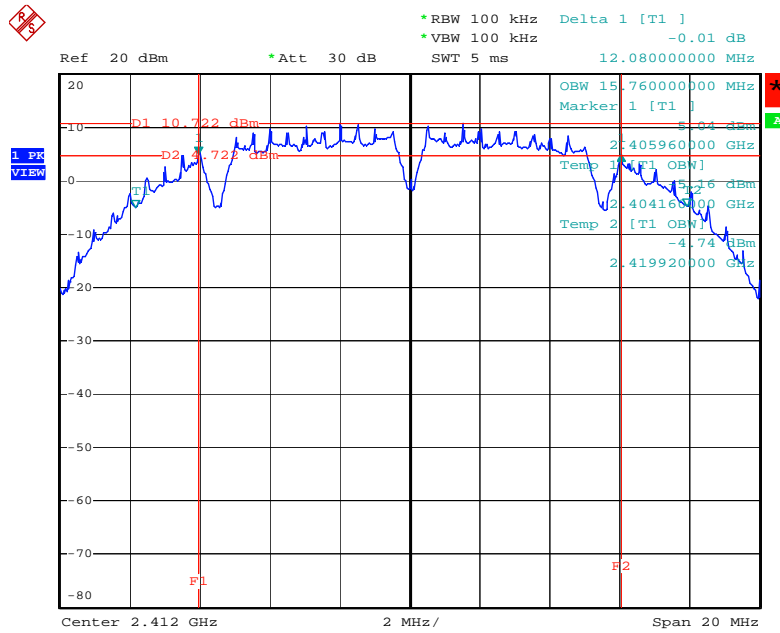


Date: 15.OCT.2009 23:00:16

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. A / 2437 MHz

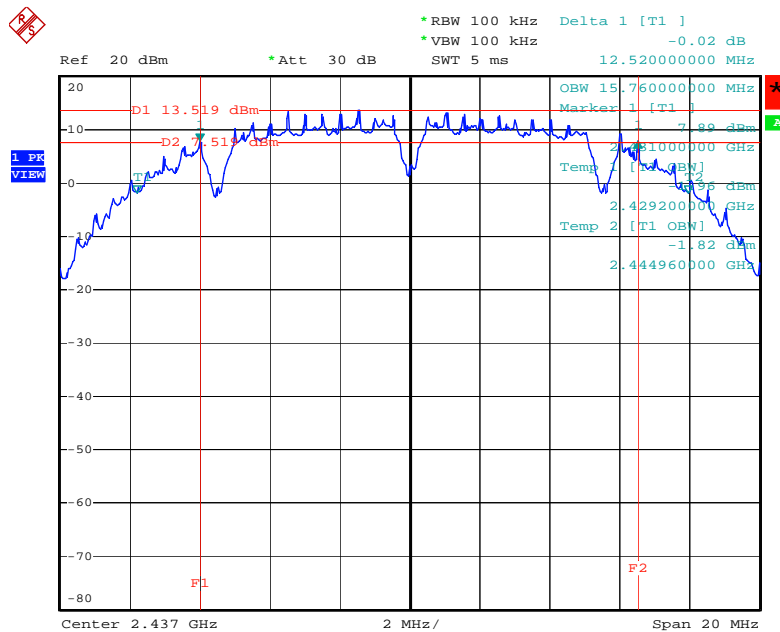


Date: 15.OCT.2009 23:03:03

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. A / 2462 MHz

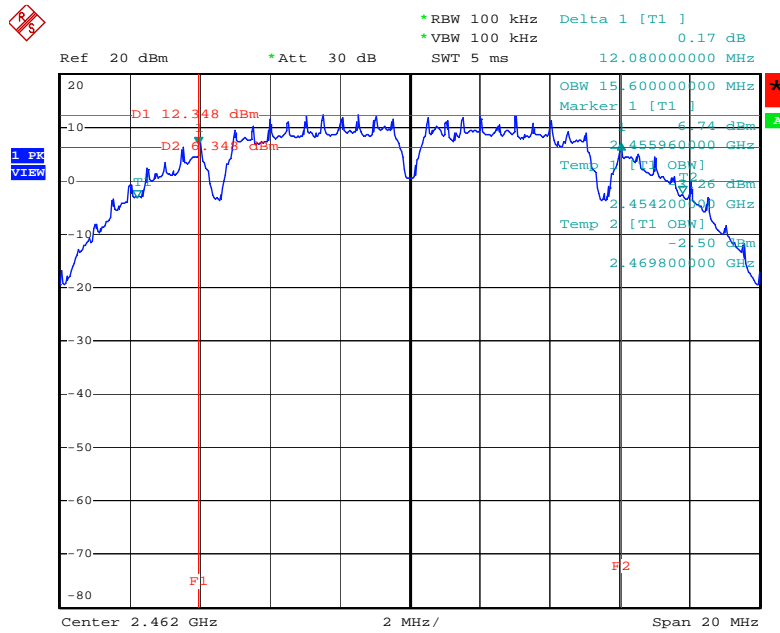


Date: 15.OCT.2009 23:06:14

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. A / 2412 MHz

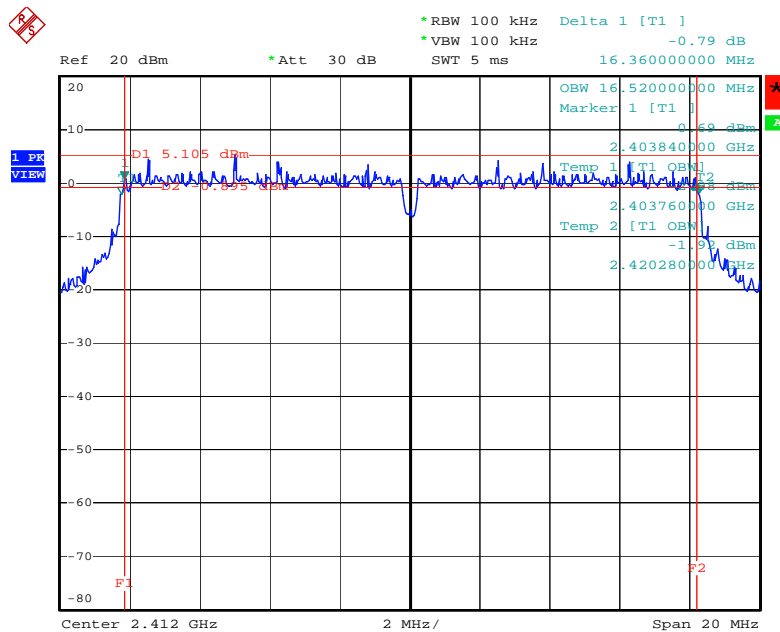


Date: 15.OCT.2009 22:55:51

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. A / 2437 MHz

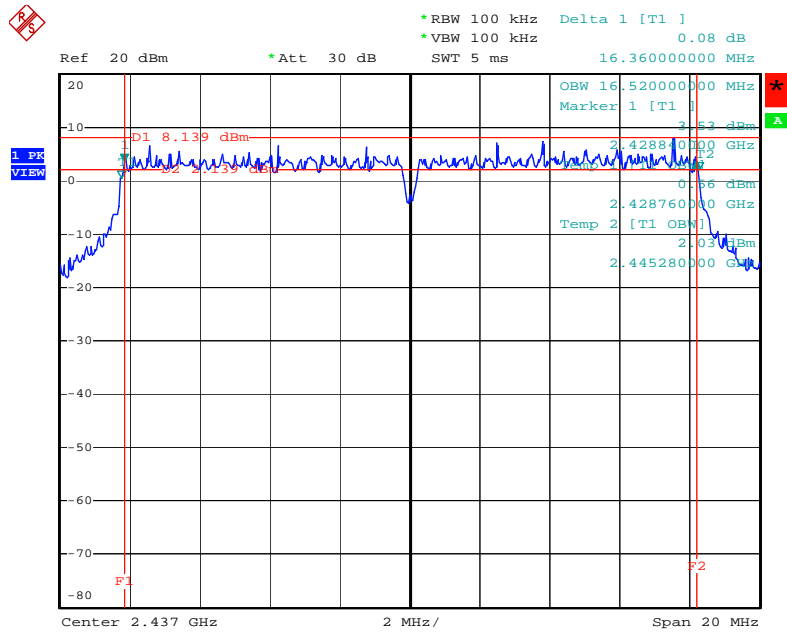

Date: 27.NOV.2009 10:45:26

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. A / 2462 MHz

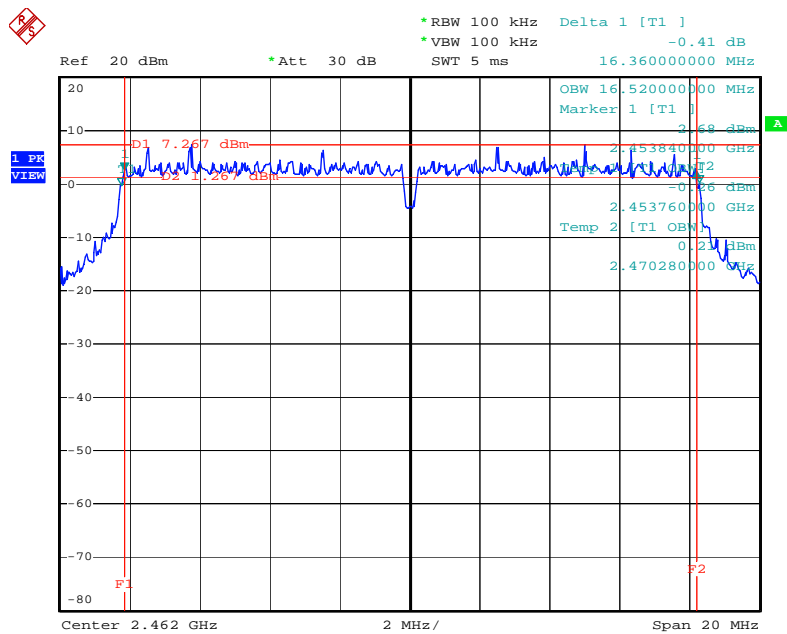


Date: 19.OCT.2009 23:25:34




<For Ant. B – PCB Antenna>:

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 2412 MHz

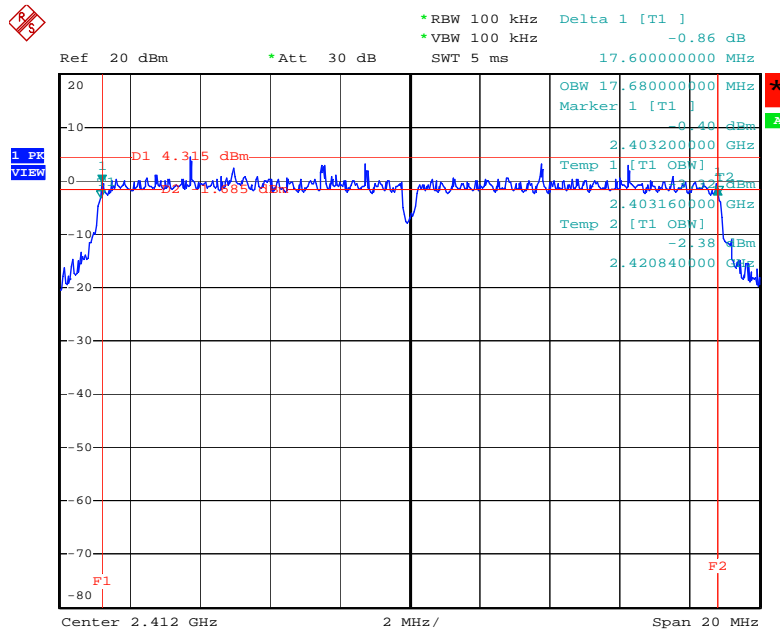


Date: 15.OCT.2009 22:00:08

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 2437 MHz

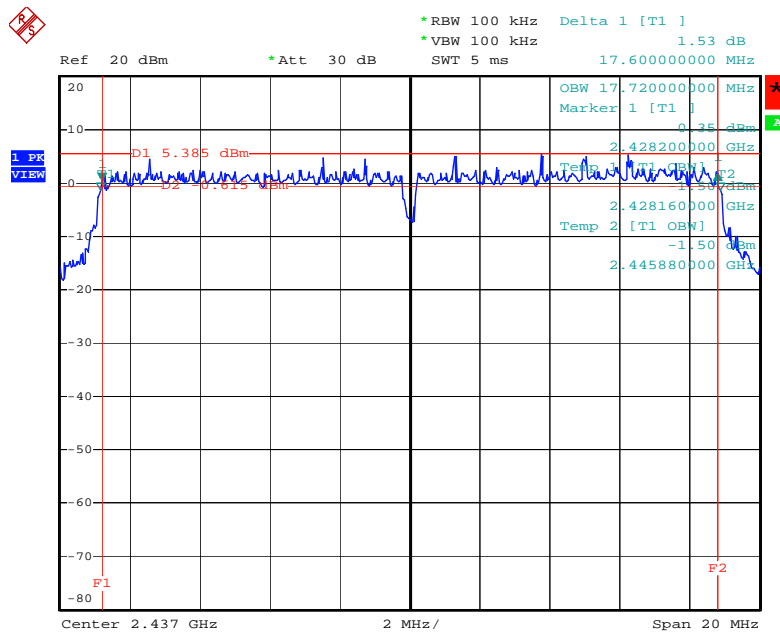


Date: 15.OCT.2009 21:58:02

### 6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 2462 MHz

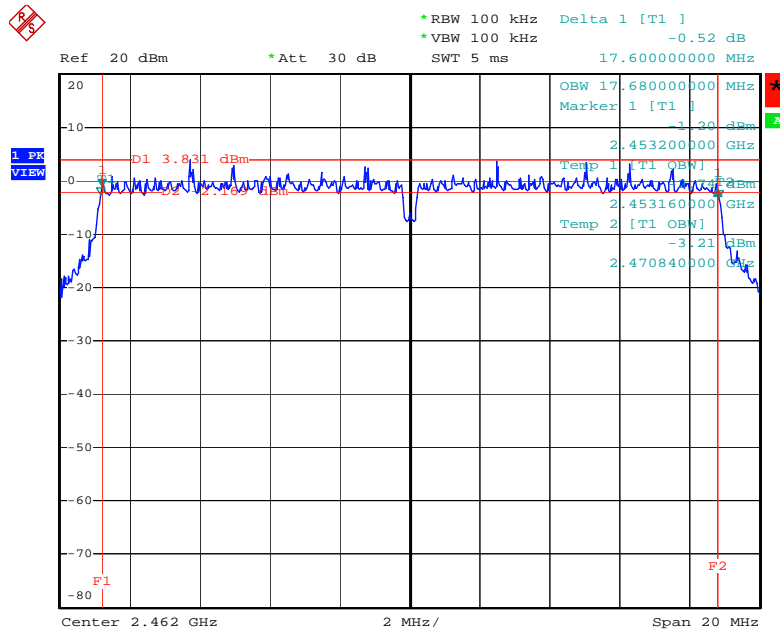


Date: 15.OCT.2009 21:55:43

### 6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. B / 2422 MHz

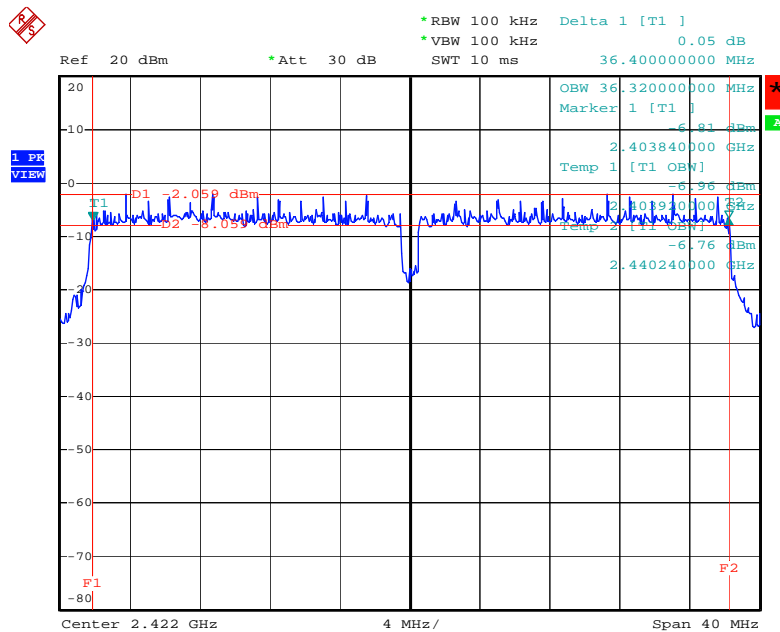


Date: 15.OCT.2009 22:14:53

### 6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. B / 2437 MHz

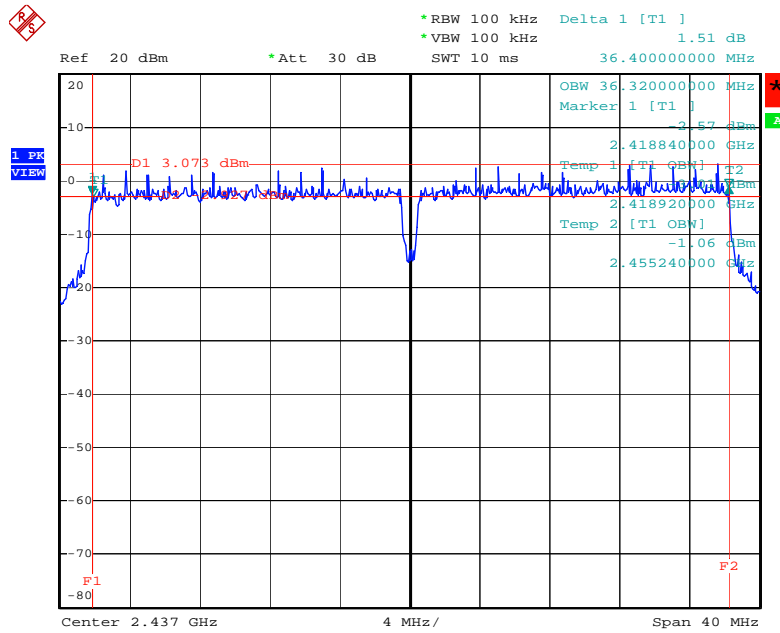


Date: 15.OCT.2009 22:17:04

### 6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. B / 2452 MHz

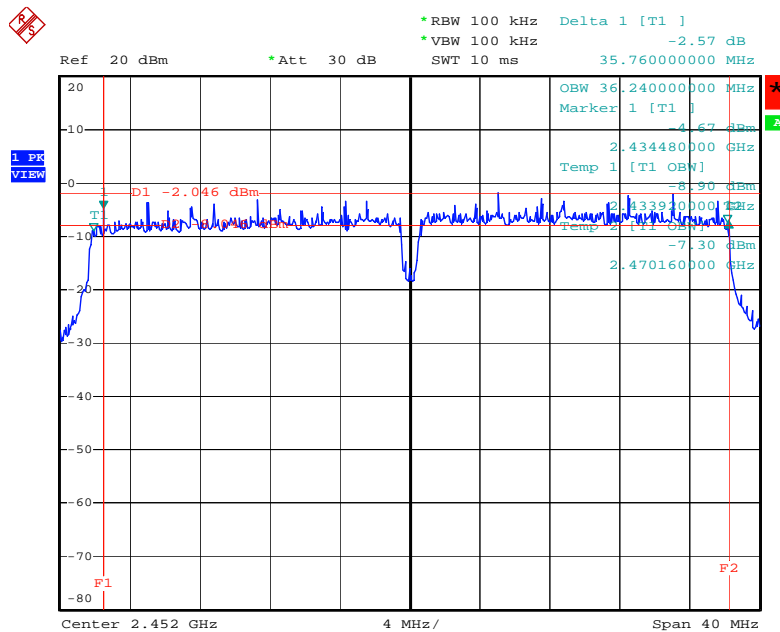


Date: 15.OCT.2009 22:12:40

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. B / 2412 MHz

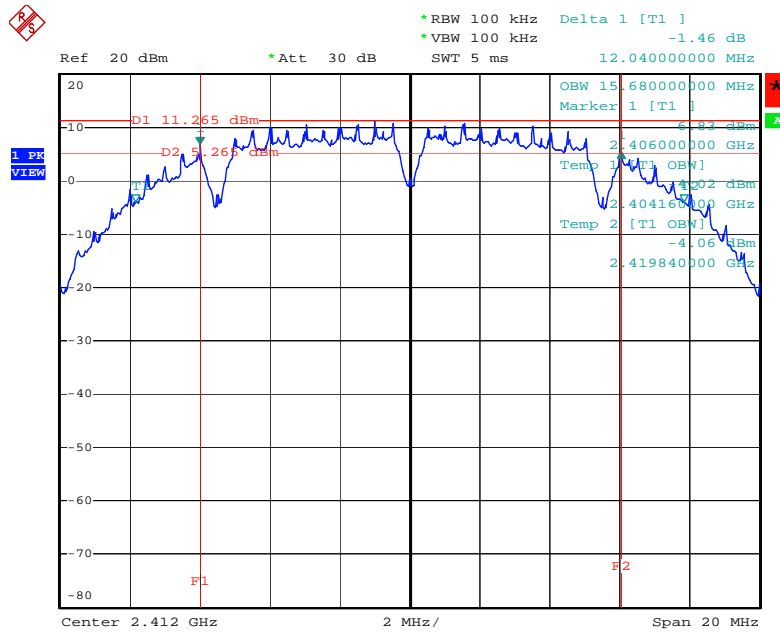


Date: 15.OCT.2009 22:03:55

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. B / 2437 MHz

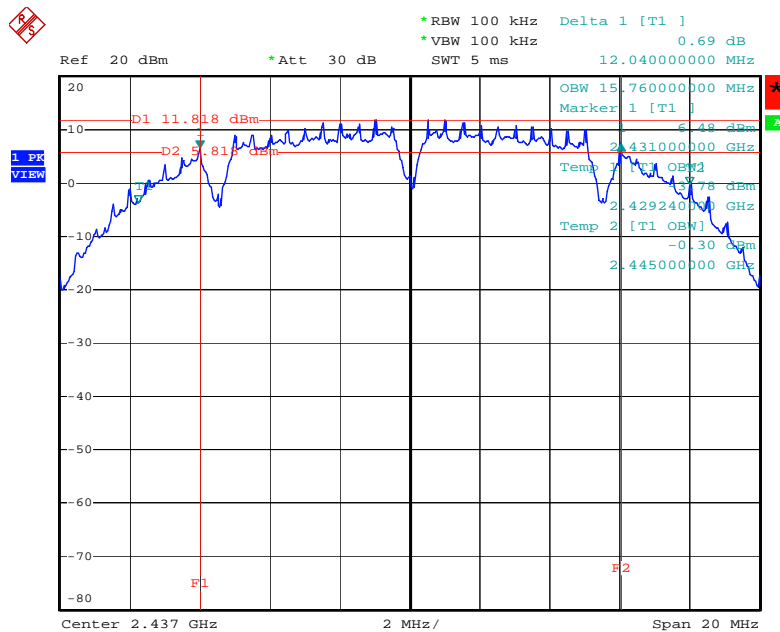


Date: 15.OCT.2009 22:06:08

### 6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. B / 2462 MHz

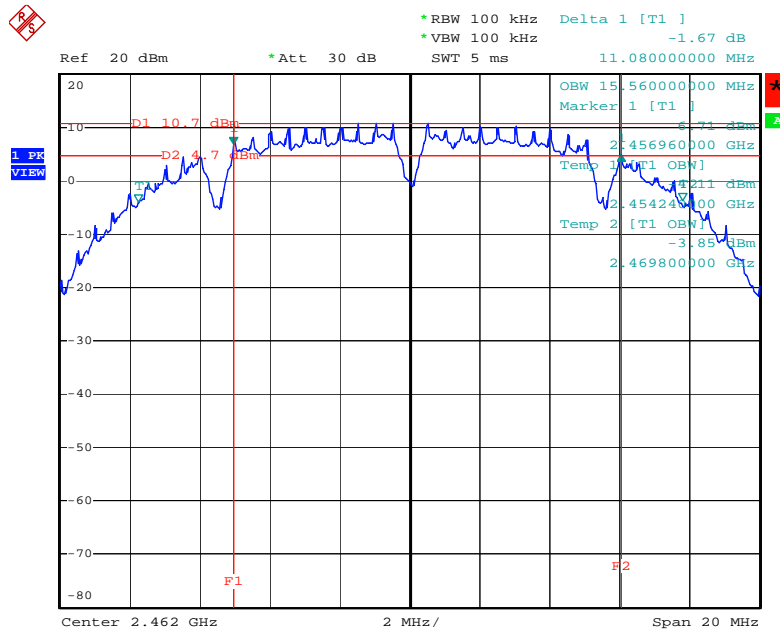


Date: 15.OCT.2009 22:08:47

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. B / 2412 MHz

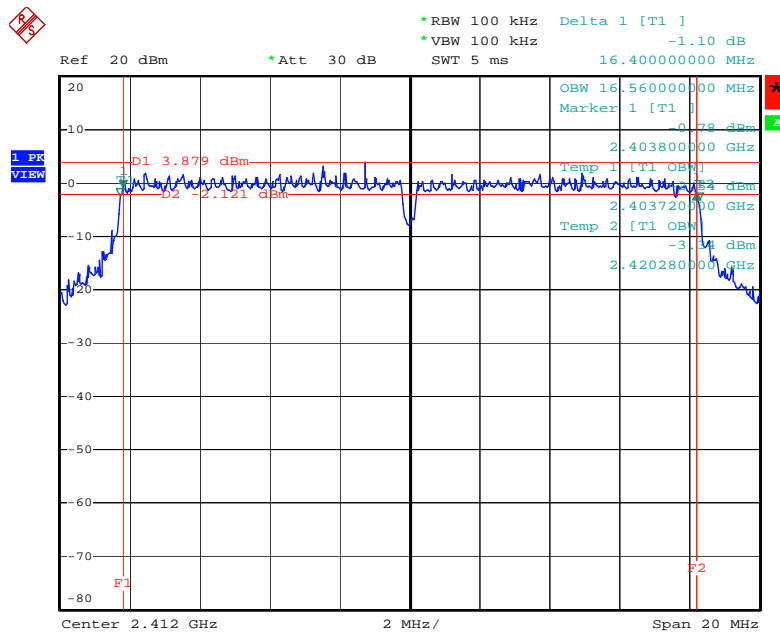


Date: 15.OCT.2009 21:48:03

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. B / 2437 MHz

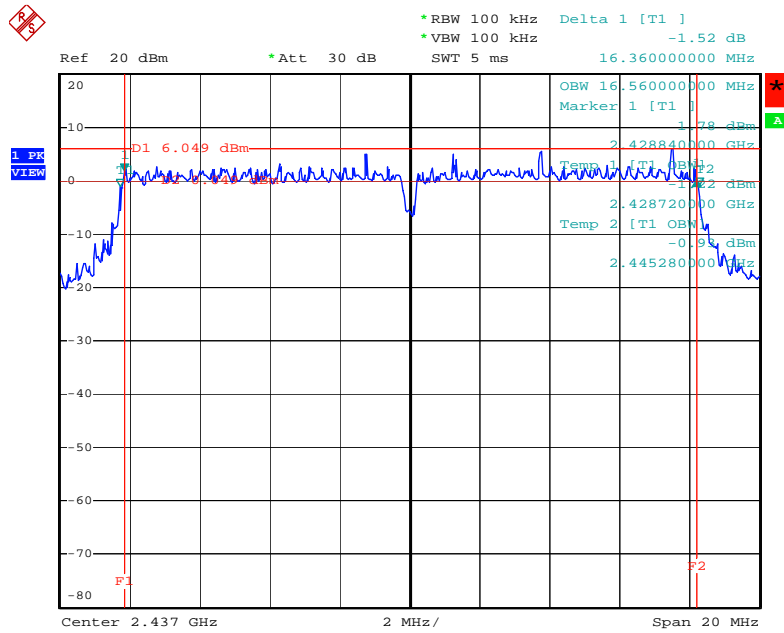

Date: 27.NOV.2009 10:40:17

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. B / 2462 MHz

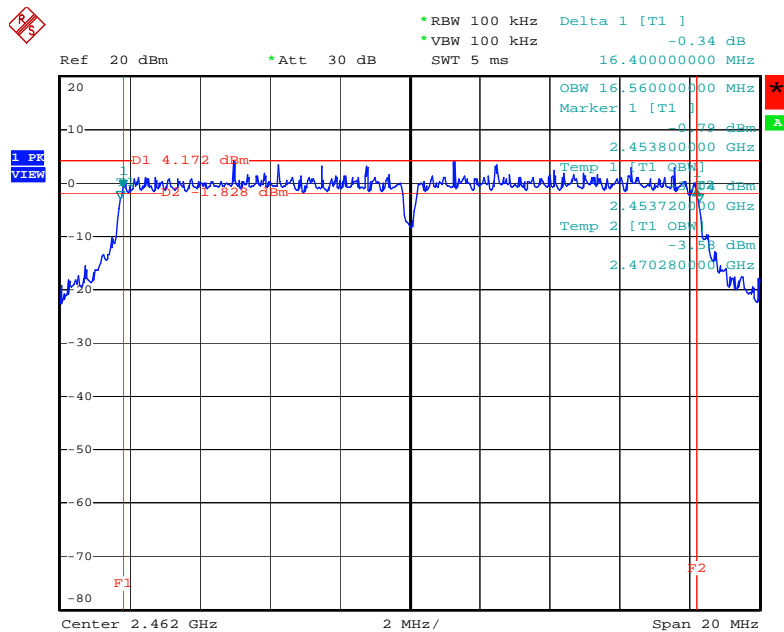

Date: 15.OCT.2009 21:52:27

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP


#### 4.5.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.




#### 4.5.4. Test Setup Layout

For radiated emissions below 30MHz

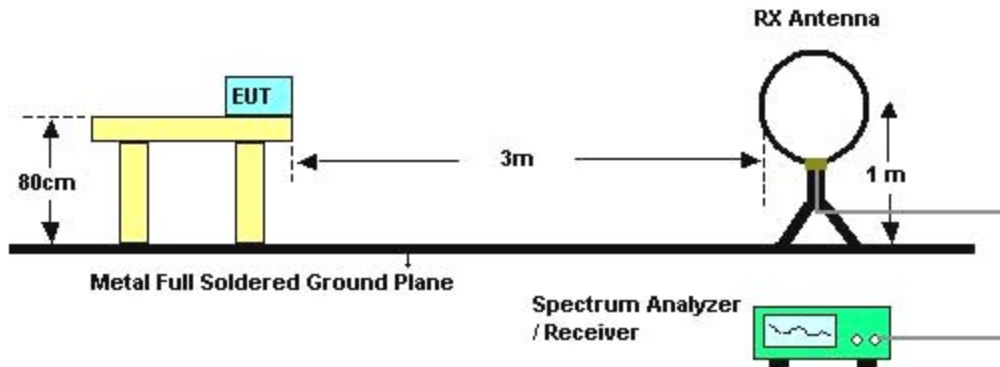

For radiated emissions above 30MHz

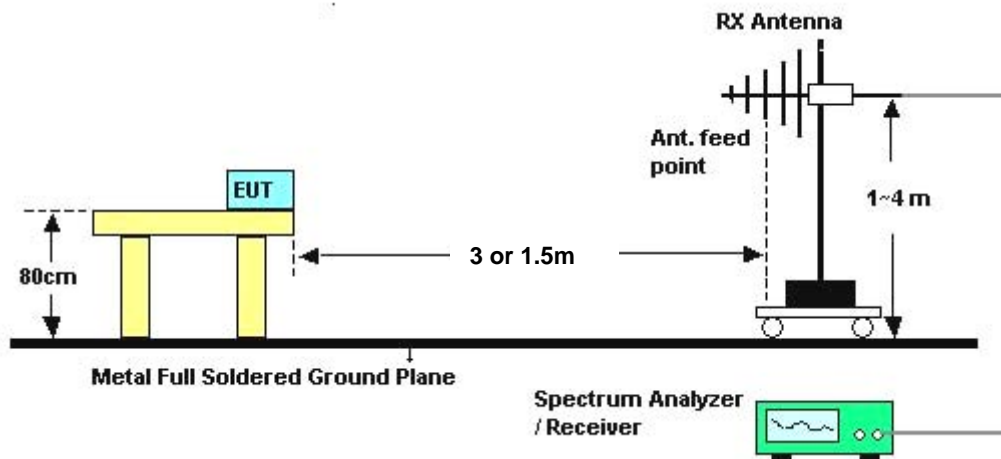

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	Normal Link
<b>Evaluate Date</b>	Oct. 24, 2009		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	23°C	Humidity	54%
Test Engineer	Alan Huang	Configurations	Normal Link / Mode 1

Horizontal

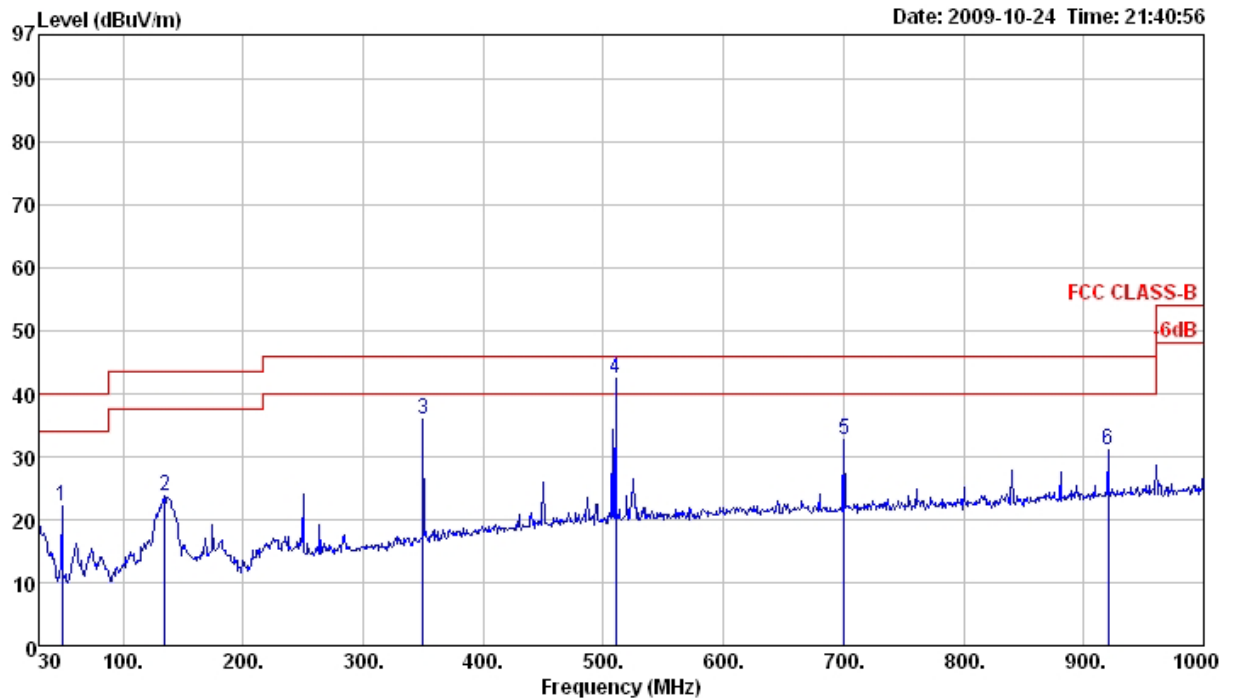

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	49.40	22.28	40.00	-17.72	40.55	0.70	27.80	8.83	0	100	Peak	HORIZONTAL
2	134.76	23.81	43.50	-19.69	37.59	1.35	27.43	12.30	0	100	Peak	HORIZONTAL
3	350.10	35.92	46.00	-10.08	46.25	2.20	27.25	14.72	0	100	Peak	HORIZONTAL
4 p	510.15	42.55	46.00	-3.45	50.19	2.72	28.10	17.74	48	133	Peak	HORIZONTAL
5	700.27	32.74	46.00	-13.26	38.34	3.30	27.99	19.09	0	100	Peak	HORIZONTAL
6	920.46	30.96	46.00	-15.04	34.00	3.60	27.32	20.68	0	100	Peak	HORIZONTAL

**Vertical**

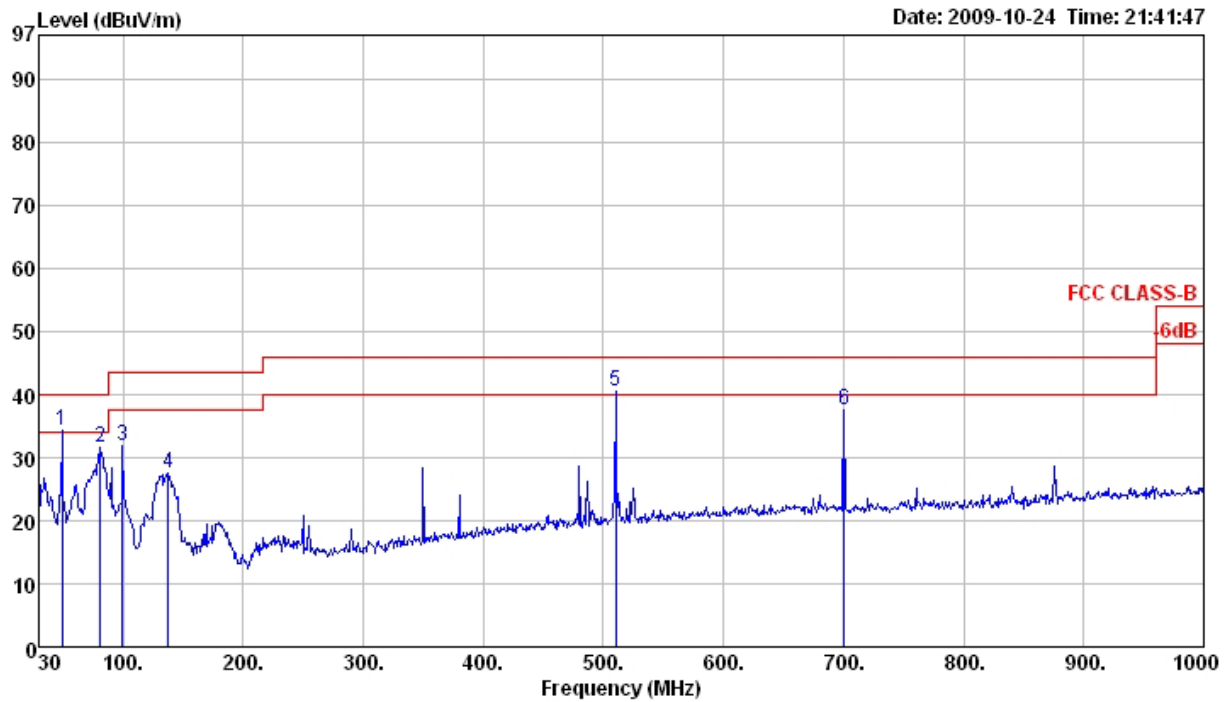

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	49.40	34.20	40.00	-5.80	52.47	0.70	27.80	8.83	0	400	Peak	VERTICAL
2	81.41	31.63	40.00	-8.37	50.86	1.10	27.68	7.35	0	400	Peak	VERTICAL
3	99.84	31.86	43.50	-11.64	47.27	1.20	27.60	10.99	0	400	Peak	VERTICAL
4	137.67	27.67	43.50	-15.83	41.37	1.38	27.41	12.33	0	400	Peak	VERTICAL
5 p	510.15	40.65	46.00	-5.35	48.29	2.72	28.10	17.74	89	100	Peak	VERTICAL
6	700.27	37.50	46.00	-8.50	43.10	3.30	27.99	19.09	0	400	Peak	VERTICAL

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

<For Ant. A – Dipole Antenna>:


Temperature	23°C	Humidity	54%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS0 20MHz Ch 1 / Mode 1 with Ant. A

Horizontal

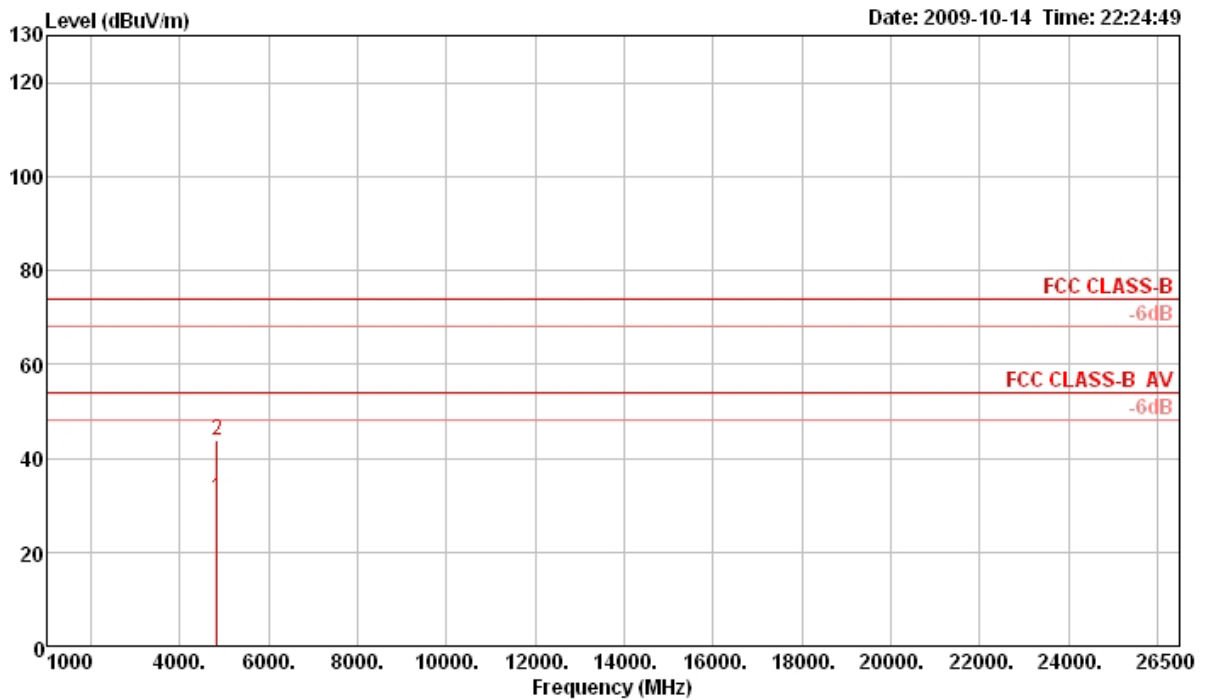

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4824.47	31.47	54.00	-22.53	29.48	3.96	35.03	33.06	187	100	Average	HORIZONTAL
2 p	4824.47	43.75	74.00	-30.25	41.76	3.96	35.03	33.06	187	100	Peak	HORIZONTAL


**Vertical**

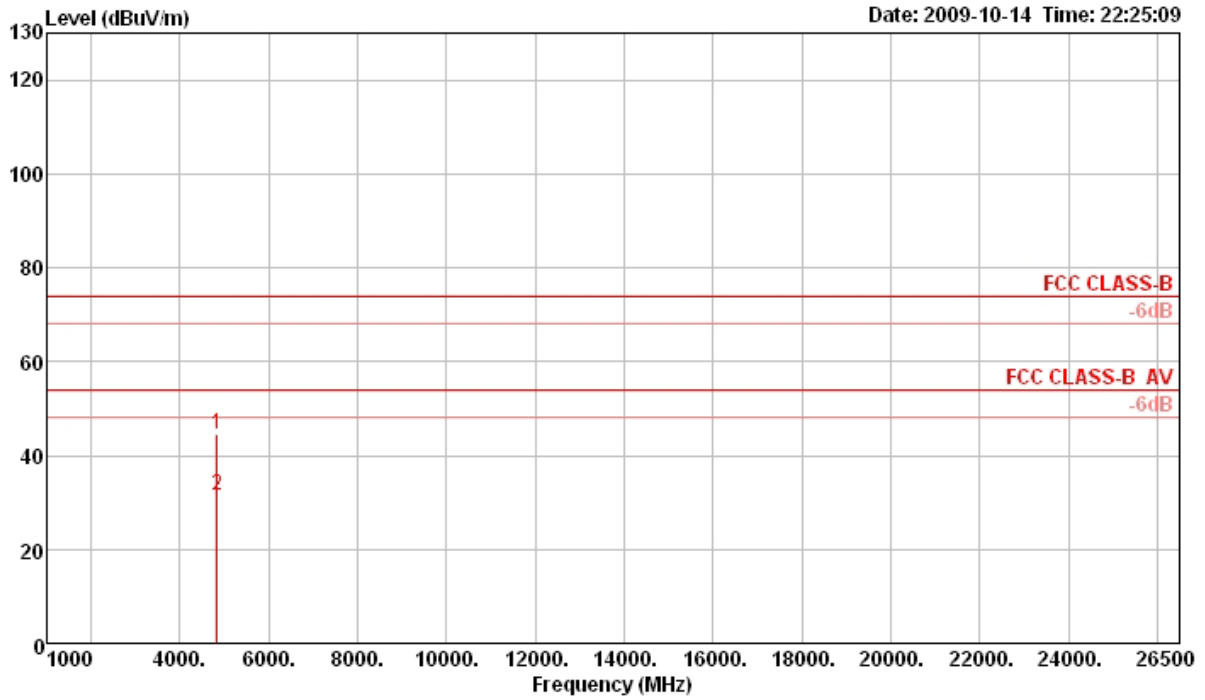

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4824.37	44.45	74.00	-29.55	42.46	3.96	35.03	33.06	296	100	Peak	VERTICAL
2 a	4824.49	31.45	54.00	-22.55	29.46	3.96	35.03	33.06	296	100	Average	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 6 / Mode 1 with Ant. A

**Horizontal**

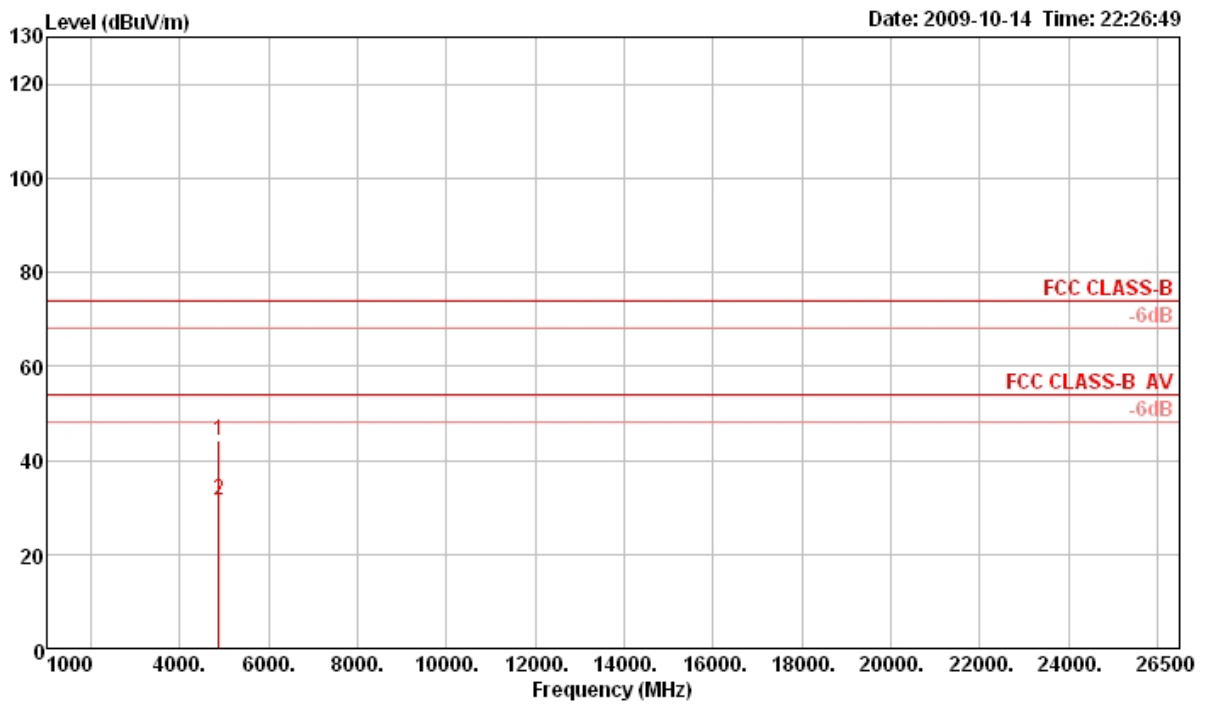

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4873.88	44.13	74.00	-29.87	42.03	3.97	35.03	33.16	314	100	Peak	HORIZONTAL
2 a	4874.11	31.33	54.00	-22.67	29.23	3.97	35.03	33.16	314	100	Average	HORIZONTAL

**Vertical**

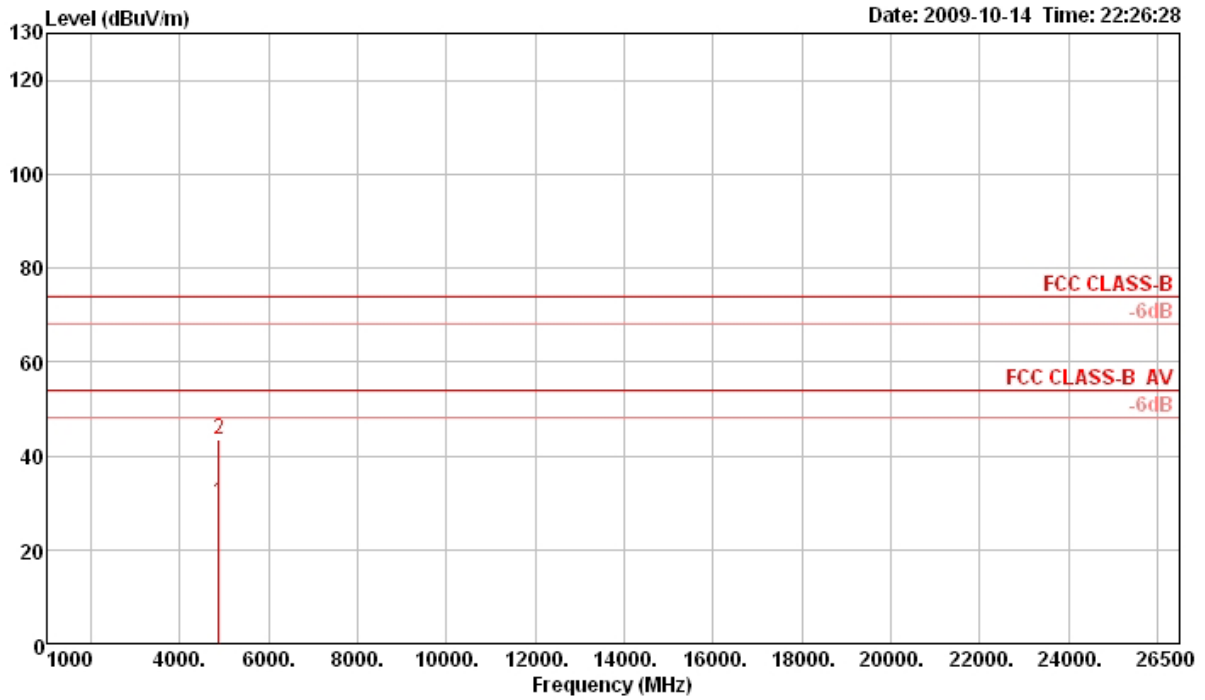


	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4873.73	30.18	54.00	-23.82	28.08	3.97	35.03	33.16	193	100	Average	VERTICAL
2 p	4874.13	43.49	74.00	-30.51	41.39	3.97	35.03	33.16	193	100	Peak	VERTICAL




<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch11 / Mode 1 with Ant. A

**Horizontal**

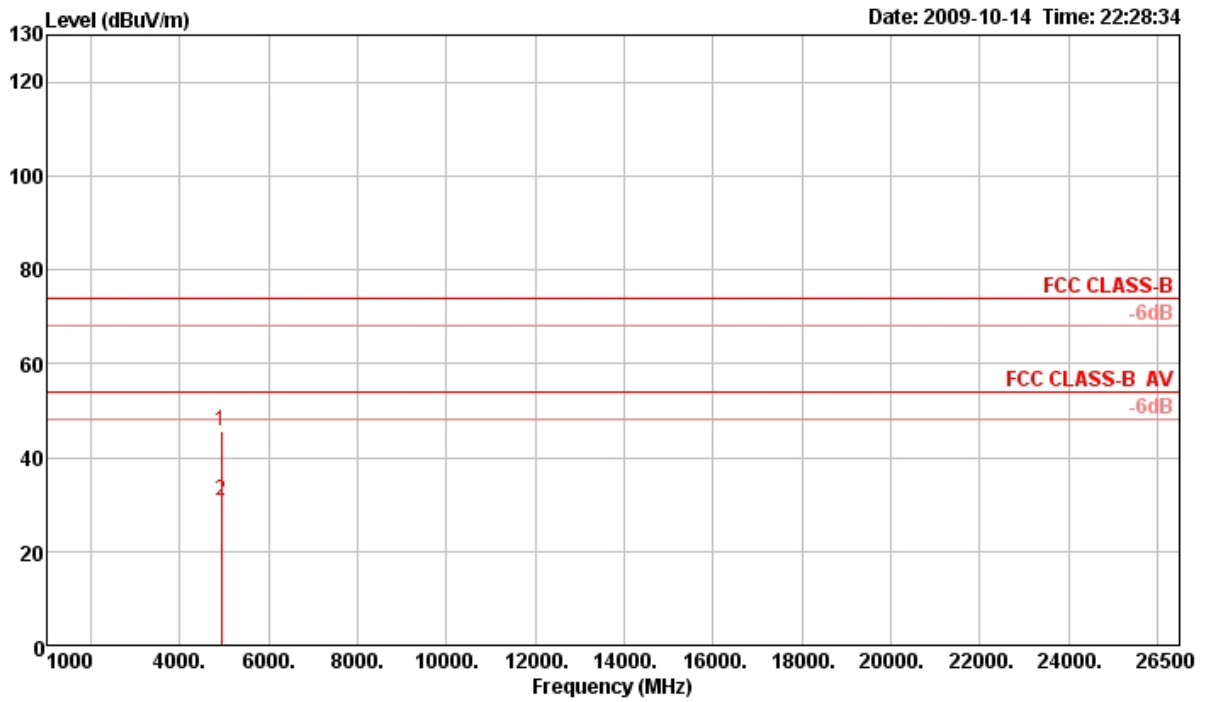

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 p	4924.08	45.55	74.00	-28.45	43.33	3.97	33.26	35.01	253	100 Peak	HORIZONTAL
2 a	4924.49	30.85	54.00	-23.15	28.63	3.97	33.26	35.01	253	100 Average	HORIZONTAL


**Vertical**

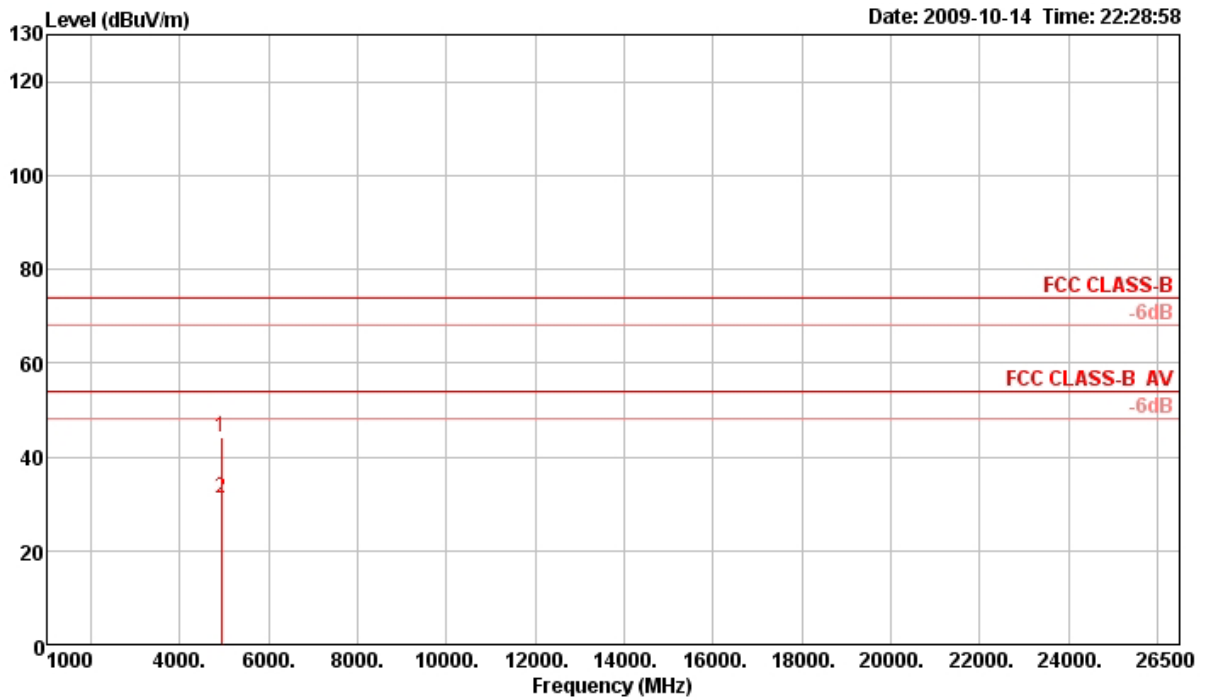

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1 p	4923.52	44.18	74.00	-29.82	41.96	3.97	33.26	35.01	126	100 Peak	VERTICAL
2 a	4924.36	31.31	54.00	-22.69	29.09	3.97	33.26	35.01	126	100 Average	VERTICAL


Temperature	23°C	Humidity	54%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS0 40MHz Ch 3 / Mode 1 with Ant. A

**Horizontal**

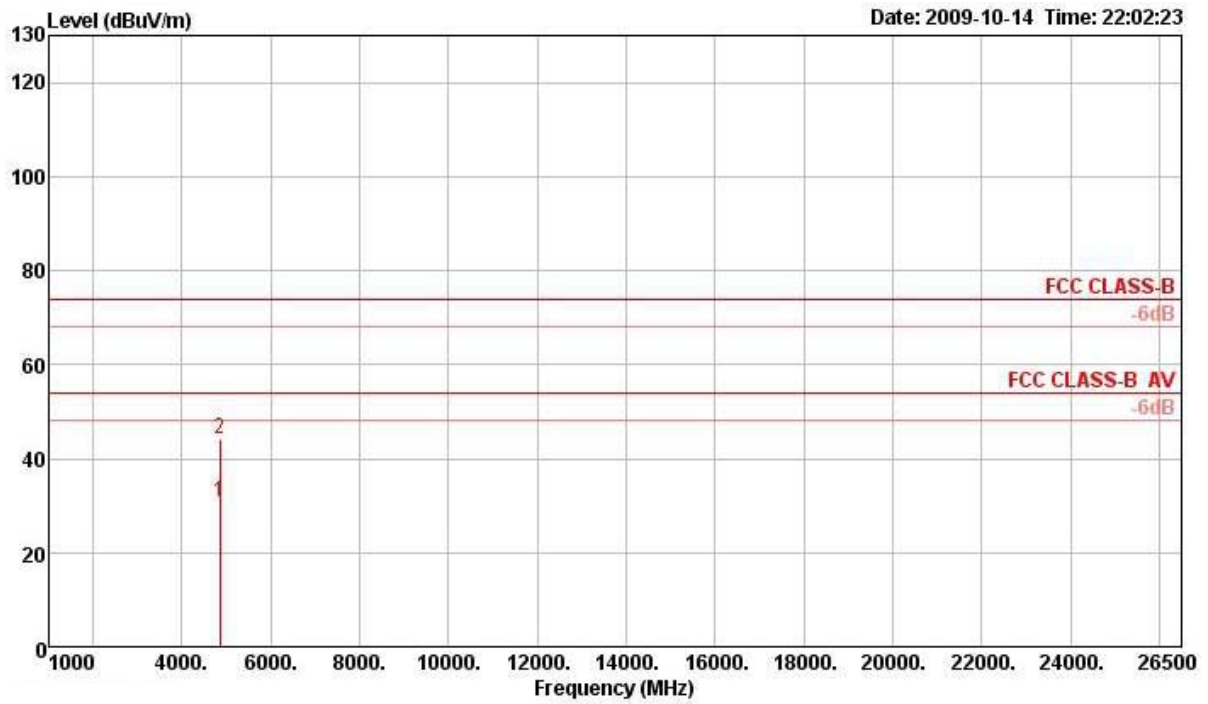

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 a	4843.84	30.84	54.00	-23.16	28.82	3.96	33.09	35.03	89	100	Average	HORIZONTAL
2 p	4843.92	44.00	74.00	-30.00	41.98	3.96	33.09	35.03	89	100	Peak	HORIZONTAL


**Vertical**

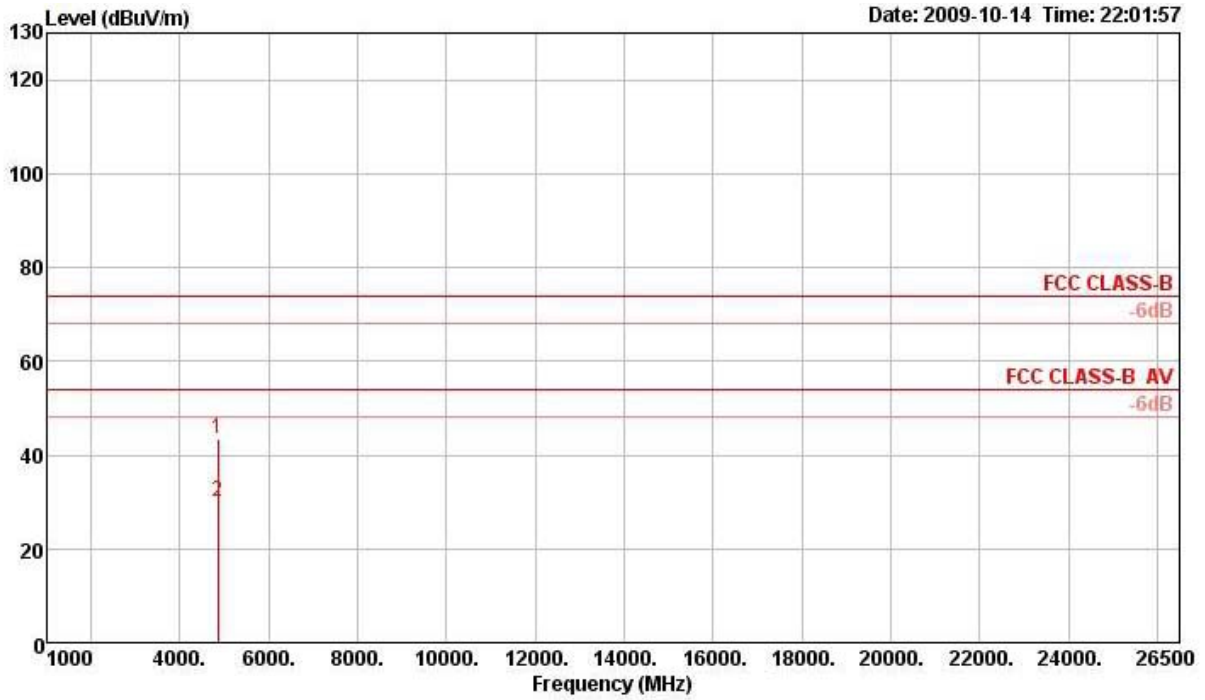

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1 p	4843.68	43.33	74.00	-30.67	41.31	3.96	33.09	35.03	252	100 Peak	VERTICAL
2 a	4844.05	30.01	54.00	-23.99	27.99	3.96	33.09	35.03	252	100 Average	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 6 / Mode 1 with Ant. A

**Horizontal**

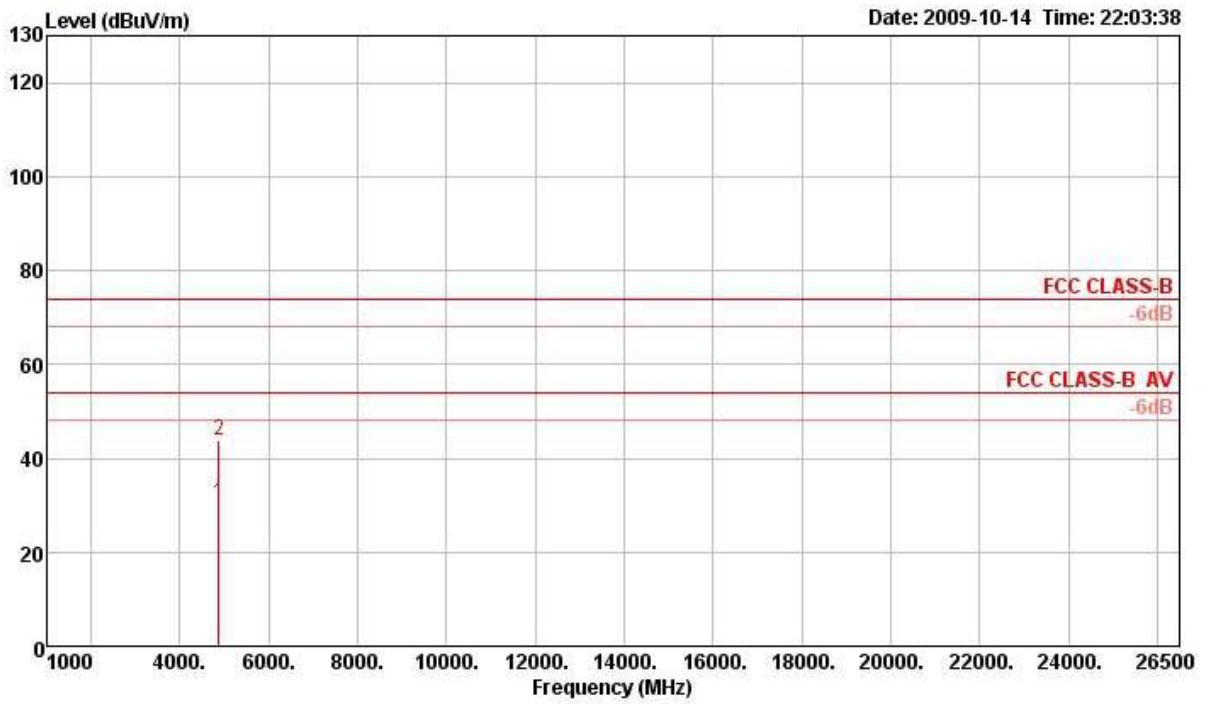

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 a	4873.52	30.47	54.00	-23.53	28.37	3.97	33.16	35.03	252	100	Average	HORIZONTAL
2 p	4874.02	43.69	74.00	-30.31	41.59	3.97	33.16	35.03	252	100	Peak	HORIZONTAL


**Vertical**

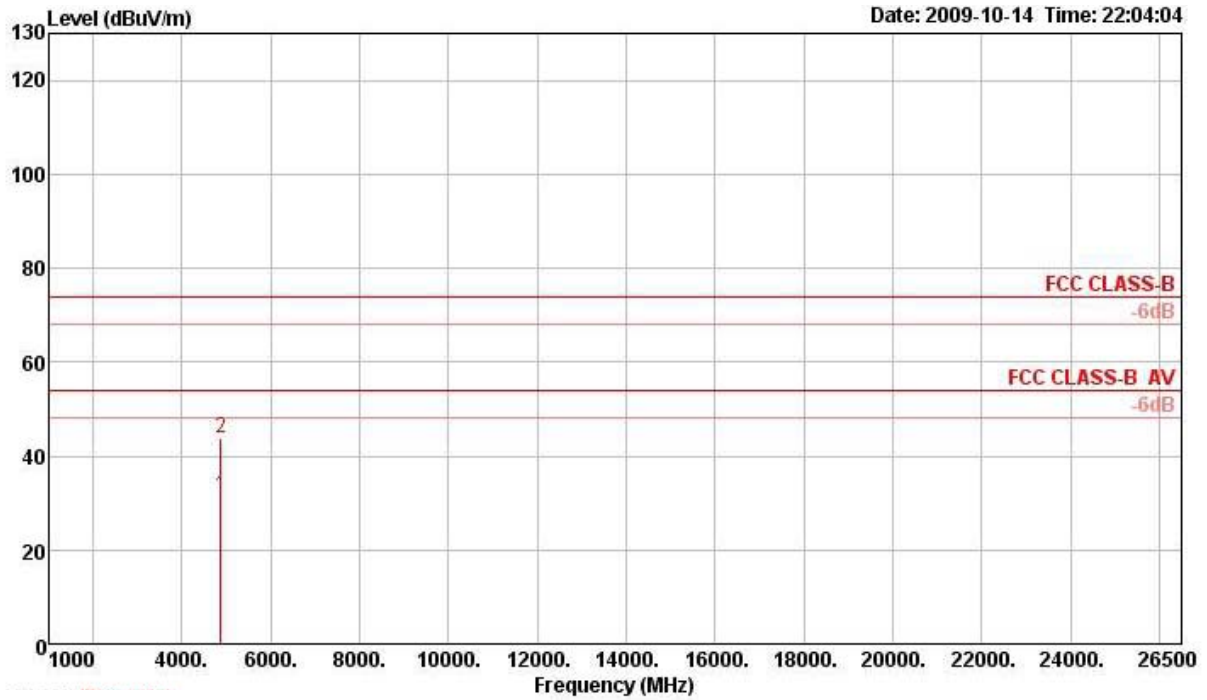

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1 a	4873.76	31.40	54.00	-22.60	29.30	3.97	33.16	35.03	167	100 Average	VERTICAL
2 p	4874.09	43.94	74.00	-30.06	41.84	3.97	33.16	35.03	167	100 Peak	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 9 / Mode 1 with Ant. A

**Horizontal**

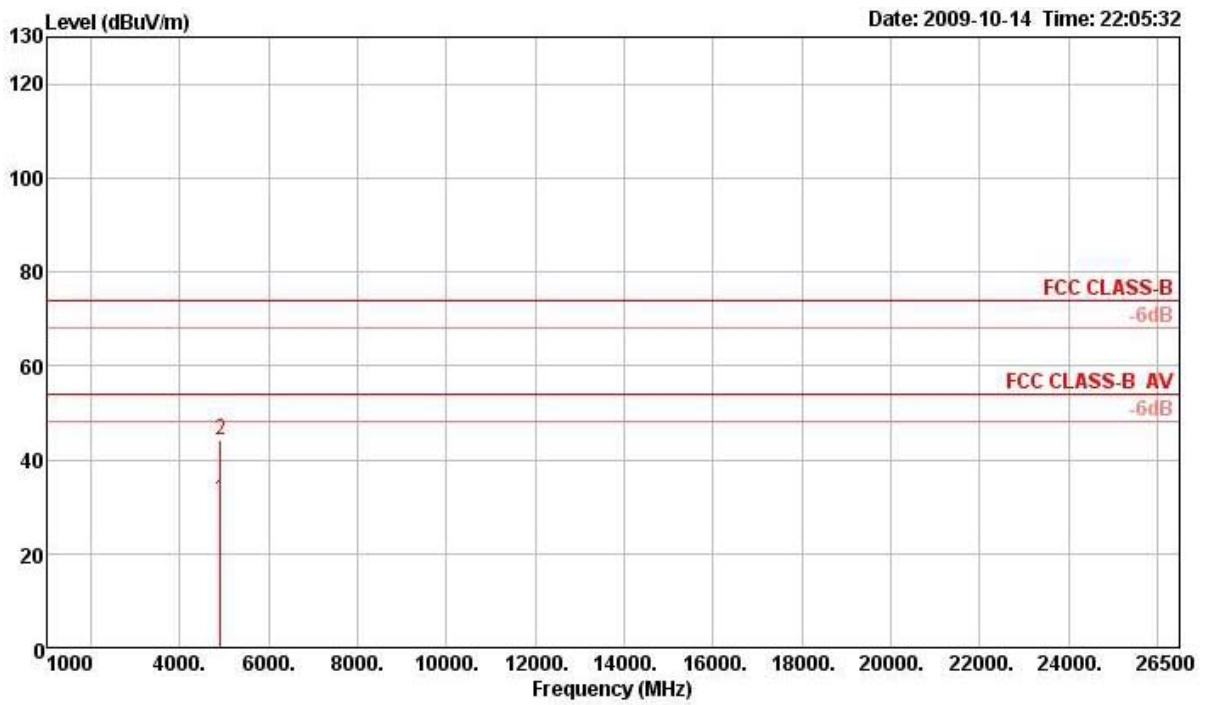

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 a	4903.80	31.68	54.00	-22.32	29.54	3.97	33.19	35.02	107	100	Average	HORIZONTAL
2 p	4904.48	44.03	74.00	-29.97	41.89	3.97	33.19	35.02	107	100	Peak	HORIZONTAL

**Vertical**

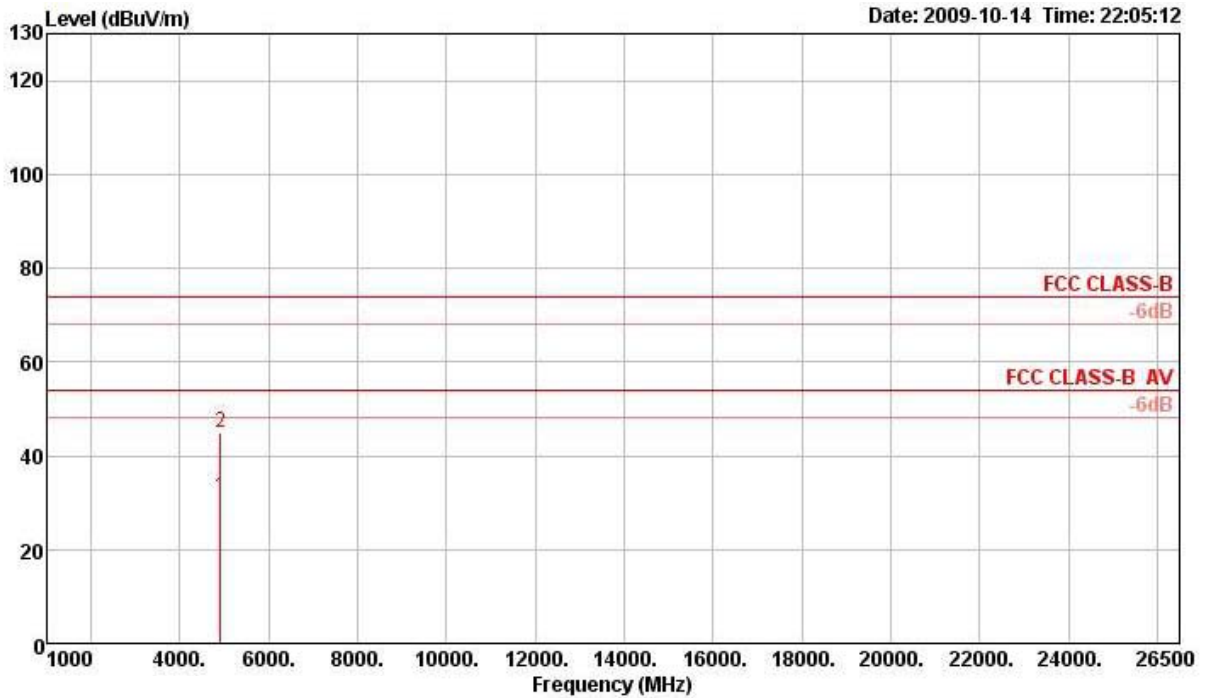

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1 a	4903.80	31.06	54.00	-22.94	28.92	3.97	33.19	35.02	236	100 Average	VERTICAL
2 p	4903.89	44.76	74.00	-29.24	42.62	3.97	33.19	35.02	236	100 Peak	VERTICAL

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.




<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11b CH 1 / Mode 1 with Ant. A

**Horizontal**

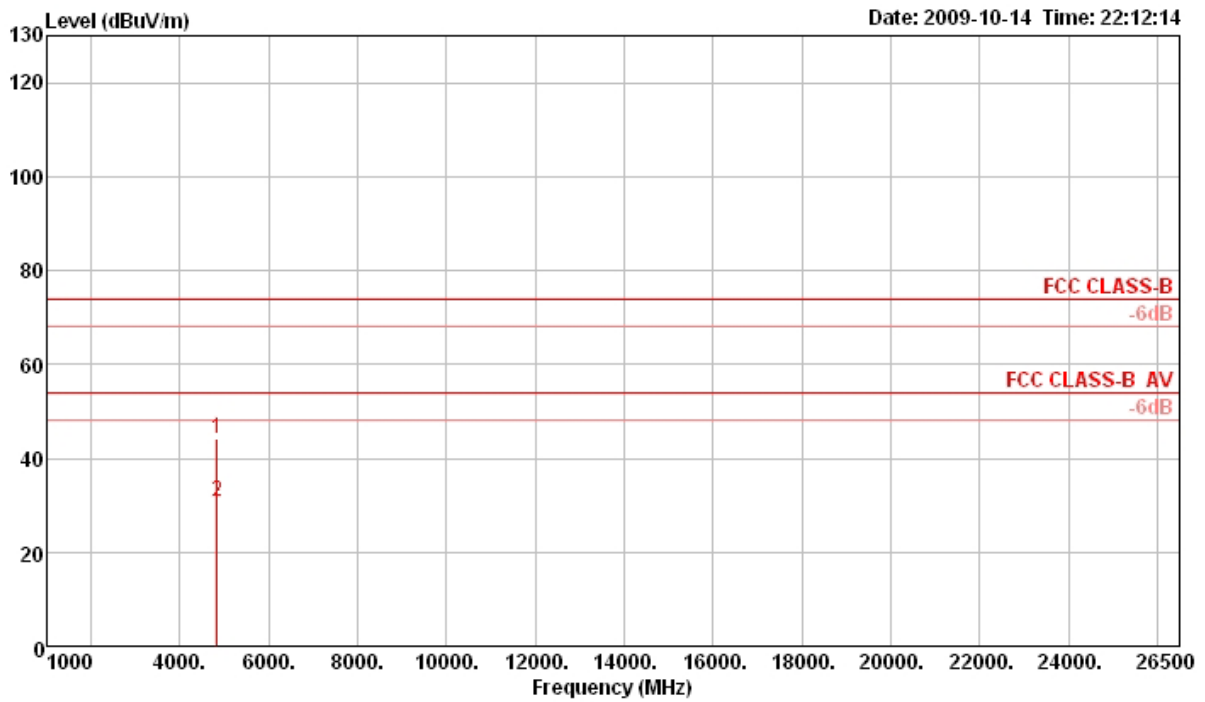

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4824.27	44.06	74.00	-29.94	42.07	3.96	35.03	33.06	120	100	Peak	HORIZONTAL
2 a	4824.44	30.75	54.00	-23.25	28.76	3.96	35.03	33.06	120	100	Average	HORIZONTAL


**Vertical**

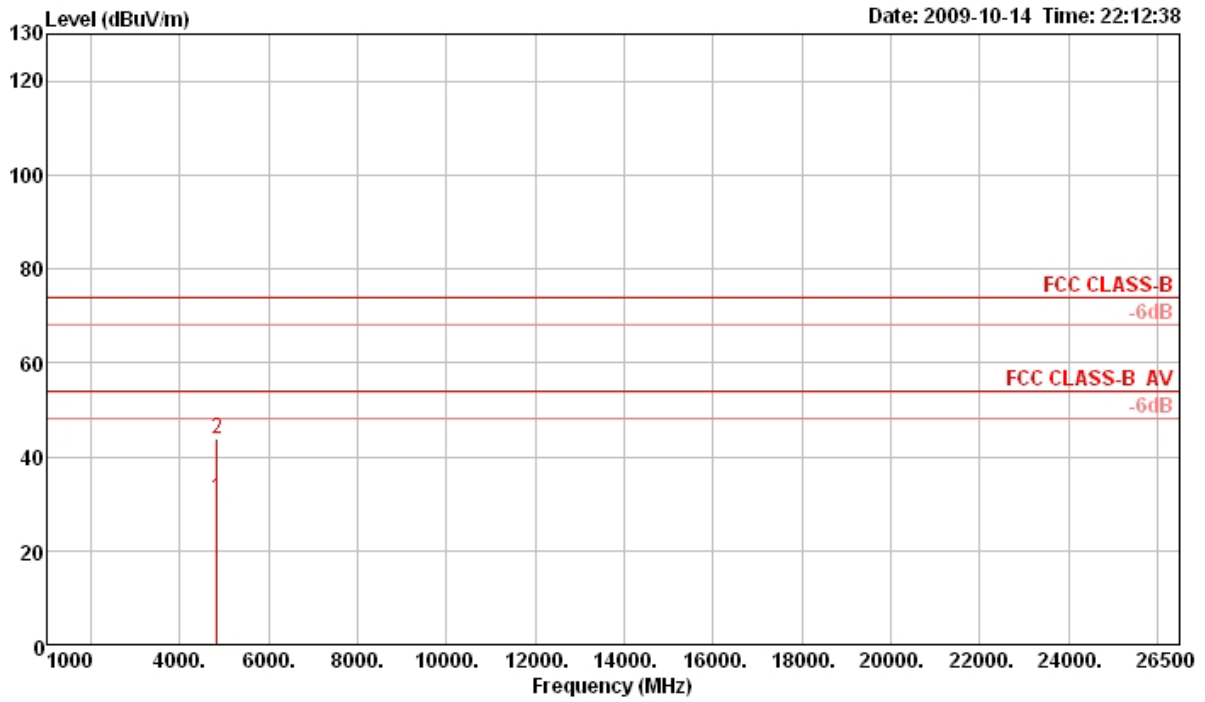

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4824.45	31.31	54.00	-22.69	29.32	3.96	35.03	33.06	237	100	Average	VERTICAL
2 p	4824.49	43.96	74.00	-30.04	41.97	3.96	35.03	33.06	237	100	Peak	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11b CH 6 / Mode 1 with Ant. A

**Horizontal**

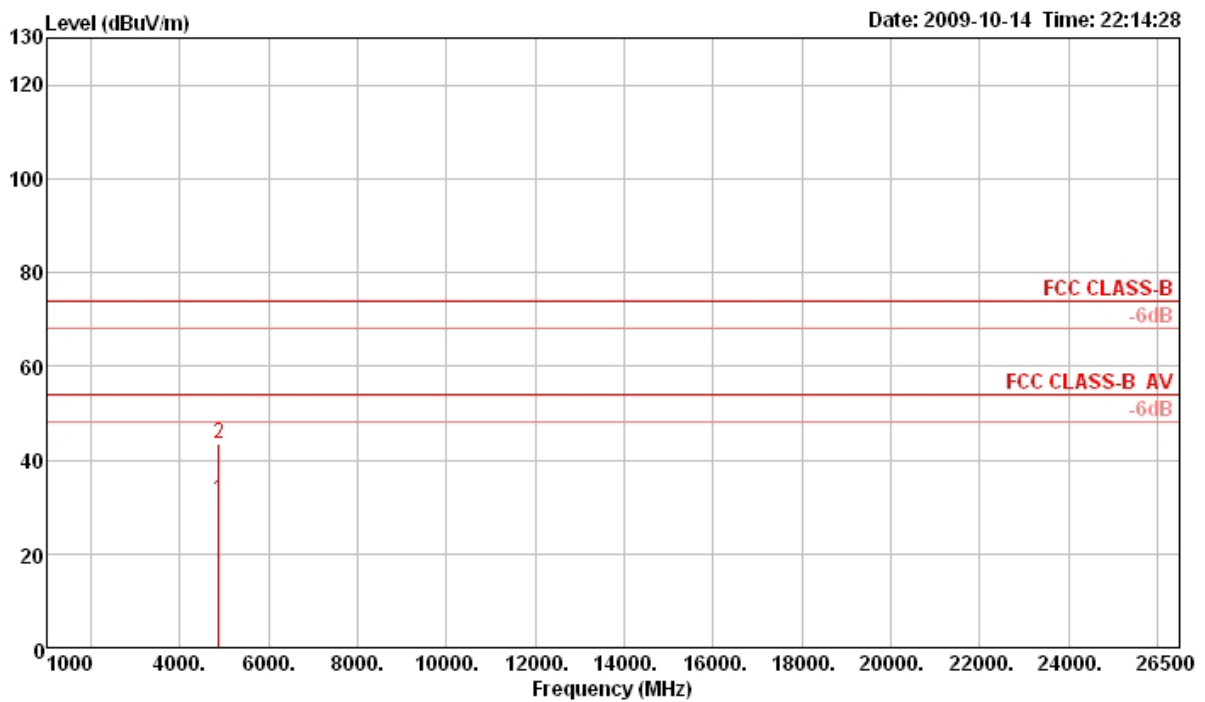

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4873.54	31.49	54.00	-22.51	29.39	3.97	35.03	33.16	259	100	Average	HORIZONTAL
2 p	4874.37	43.52	74.00	-30.48	41.42	3.97	35.03	33.16	259	100	Peak	HORIZONTAL


**Vertical**

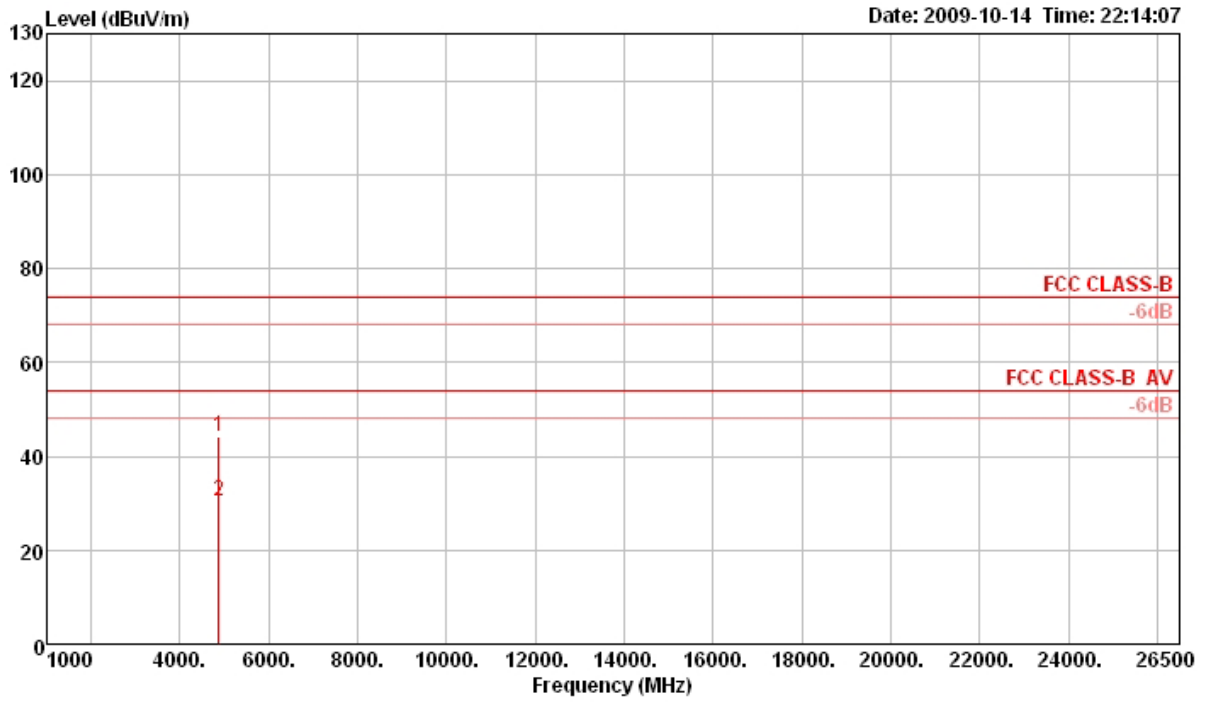

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4873.58	44.30	74.00	-29.70	42.20	3.97	35.03	33.16	111	100	Peak	VERTICAL
2 a	4873.95	30.40	54.00	-23.60	28.30	3.97	35.03	33.16	111	100	Average	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11b CH 11 / Mode 1 with Ant. A

**Horizontal**

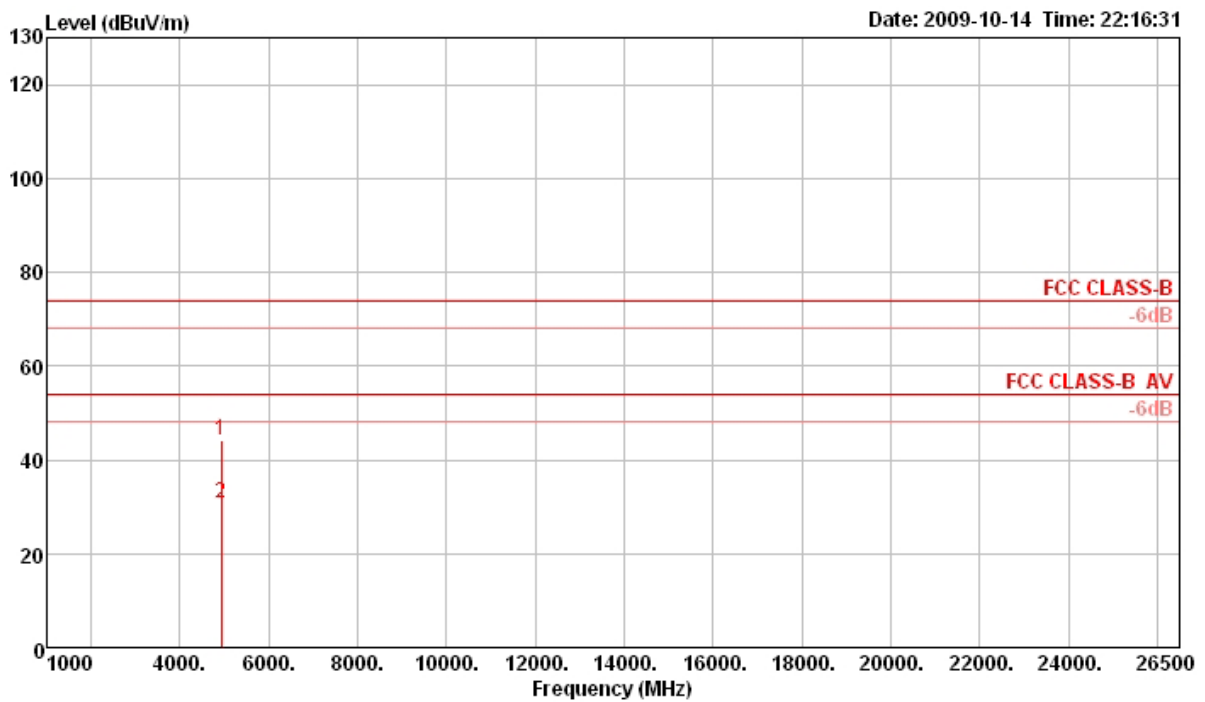

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4924.27	44.33	74.00	-29.67	42.11	3.97	35.01	33.26	173	100	Peak	HORIZONTAL
2 a	4924.40	30.78	54.00	-23.22	28.56	3.97	35.01	33.26	173	100	Average	HORIZONTAL


**Vertical**

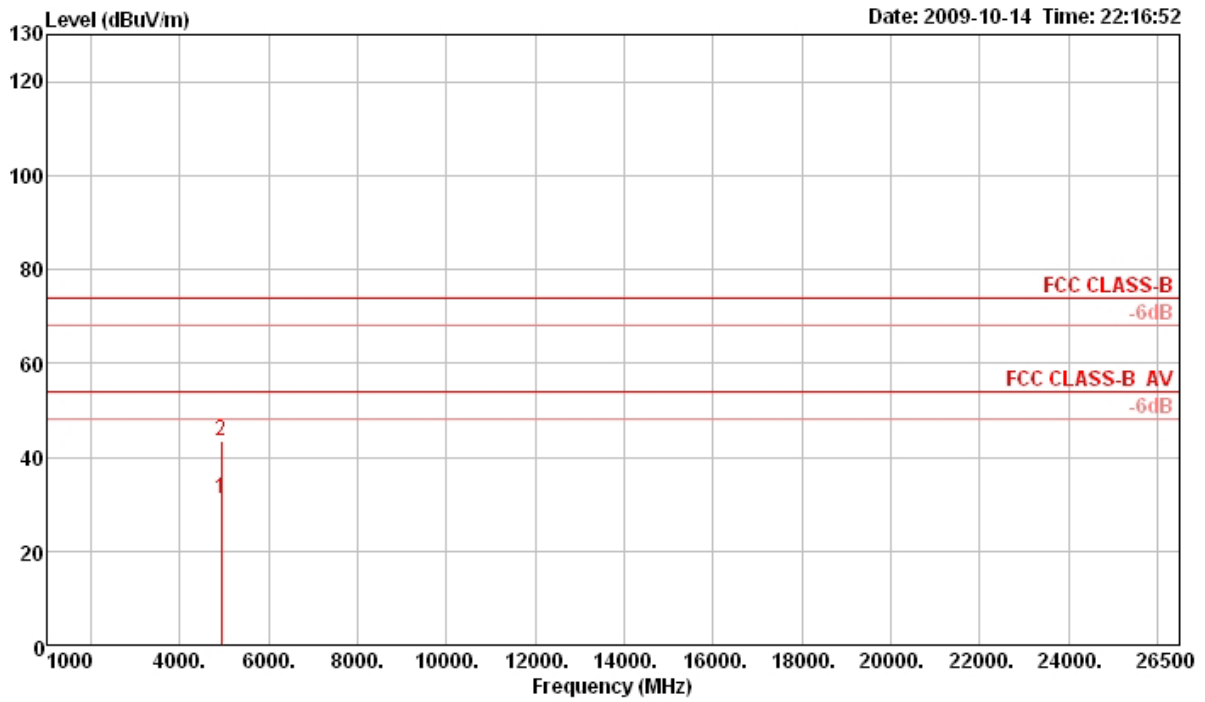

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4924.40	31.23	54.00	-22.77	29.01	3.97	35.01	33.26	31	100	Average	VERTICAL
2 p	4924.50	43.37	74.00	-30.63	41.15	3.97	35.01	33.26	31	100	Peak	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11g CH 1 / Mode 1 with Ant. A

**Horizontal**

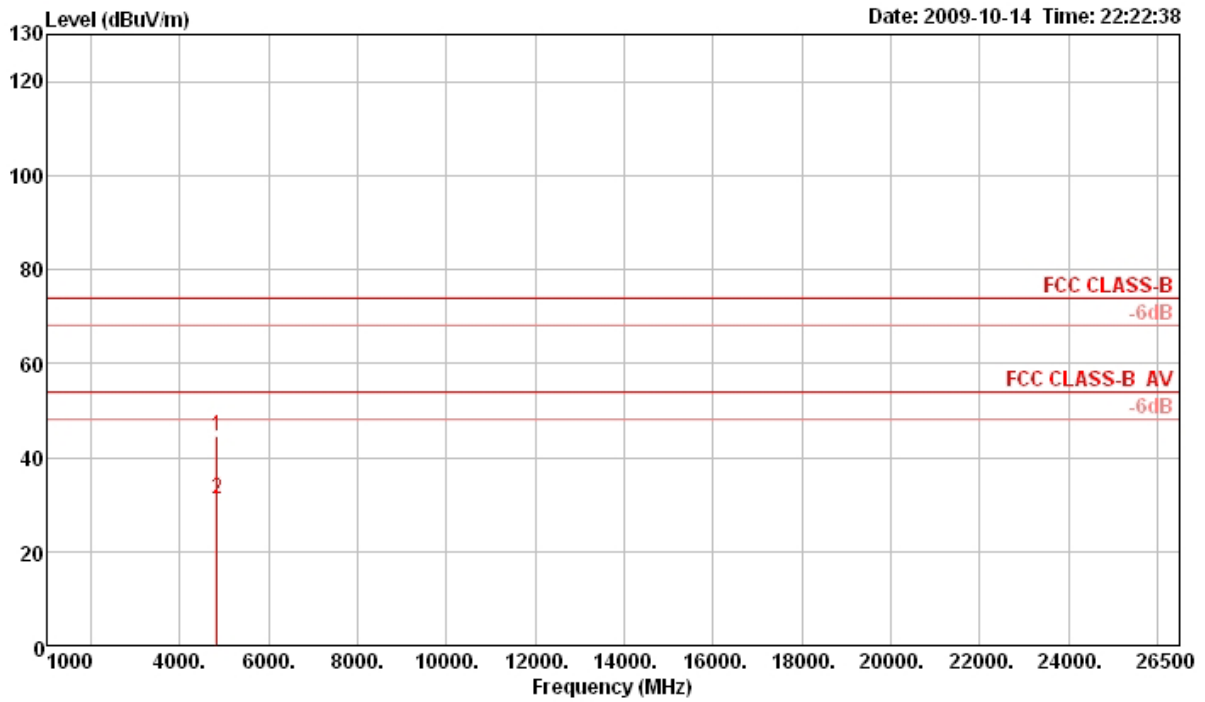

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4824.29	44.45	74.00	-29.55	42.46	3.96	35.03	33.06	139	100	Peak	HORIZONTAL
2 a	4824.38	31.30	54.00	-22.70	29.31	3.96	35.03	33.06	139	100	Average	HORIZONTAL

**Vertical**

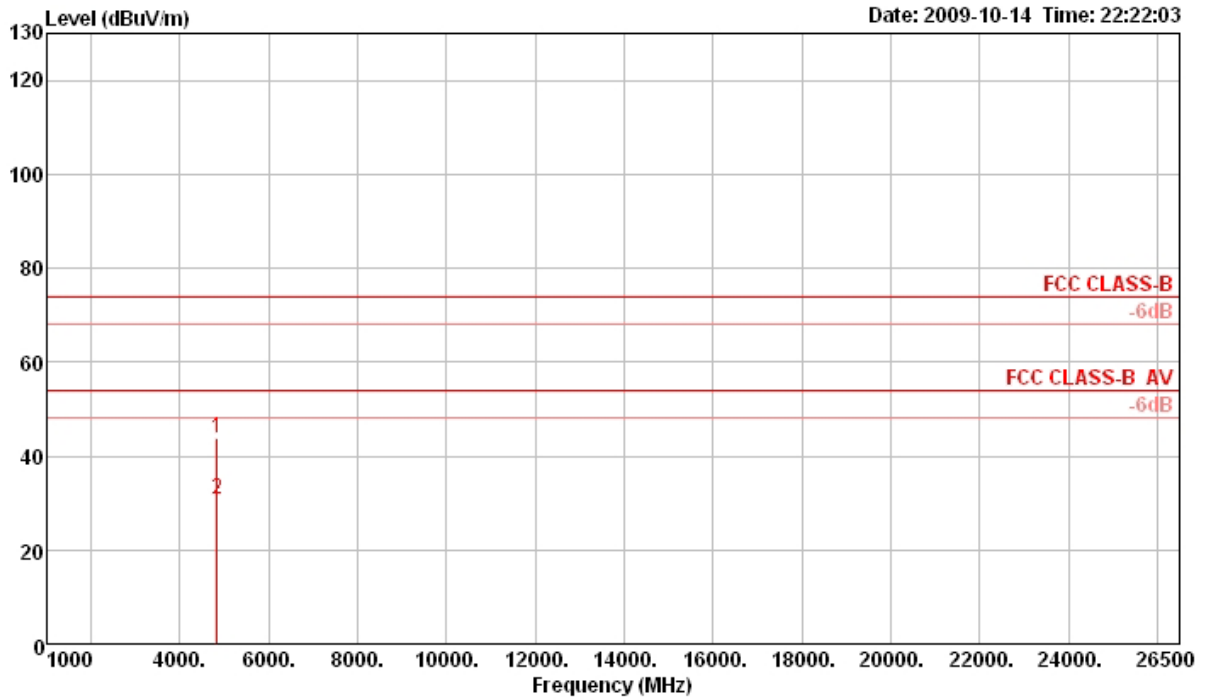


	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.67	43.80	74.00	-30.20	41.81	3.96	35.03	33.06	237	100	Peak	VERTICAL
2 a	4824.47	30.64	54.00	-23.36	28.65	3.96	35.03	33.06	237	100	Average	VERTICAL




<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11g CH 6 / Mode 1 with Ant. A

**Horizontal**

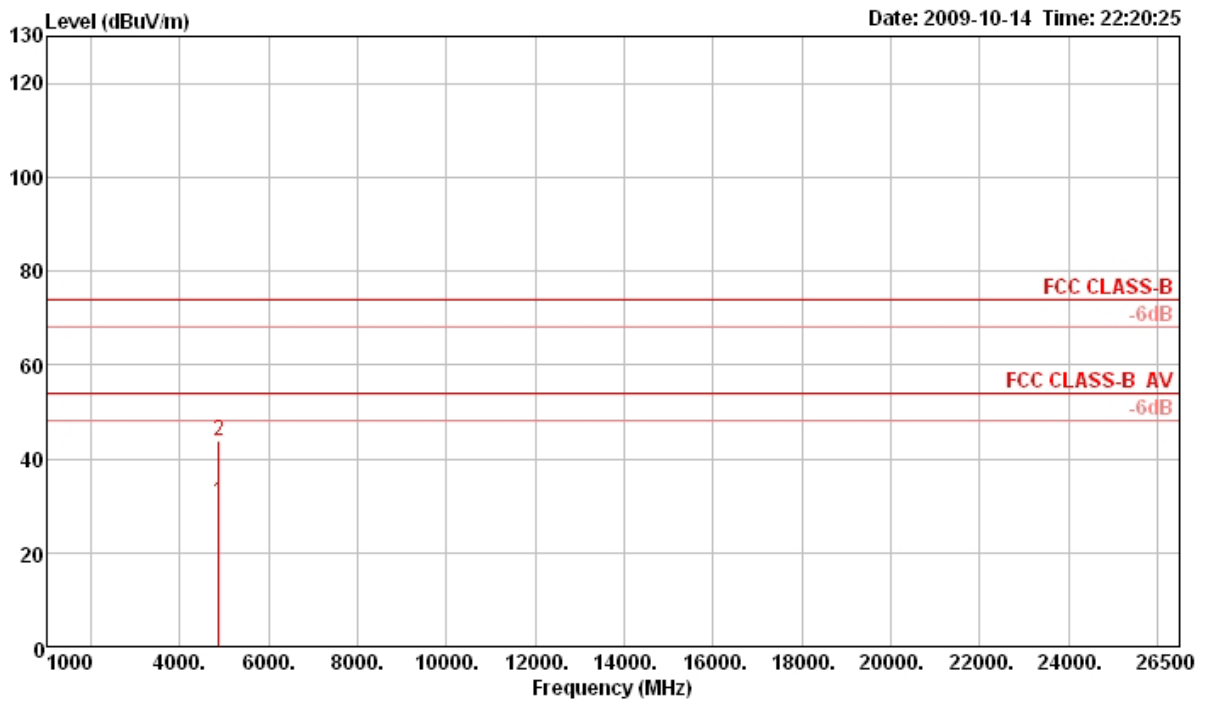

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4873.65	30.85	54.00	-23.15	28.75	3.97	35.03	33.16	122	100	Average	HORIZONTAL
2 p	4873.82	43.72	74.00	-30.28	41.62	3.97	35.03	33.16	122	100	Peak	HORIZONTAL


**Vertical**

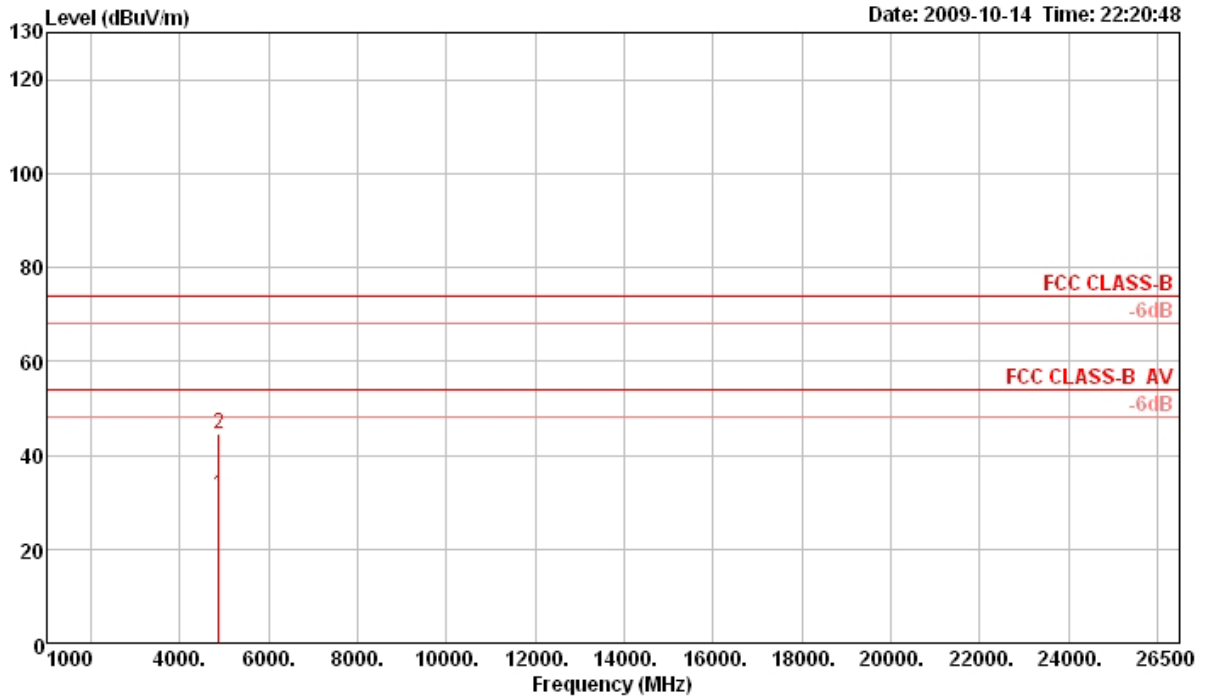

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4873.60	31.52	54.00	-22.48	29.42	3.97	35.03	33.16	266	100	Average	VERTICAL
2 p	4873.70	44.49	74.00	-29.51	42.39	3.97	35.03	33.16	266	100	Peak	VERTICAL


Temperature	23°C	Humidity	54%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 11 / Mode 1 with Ant. A

**Horizontal**

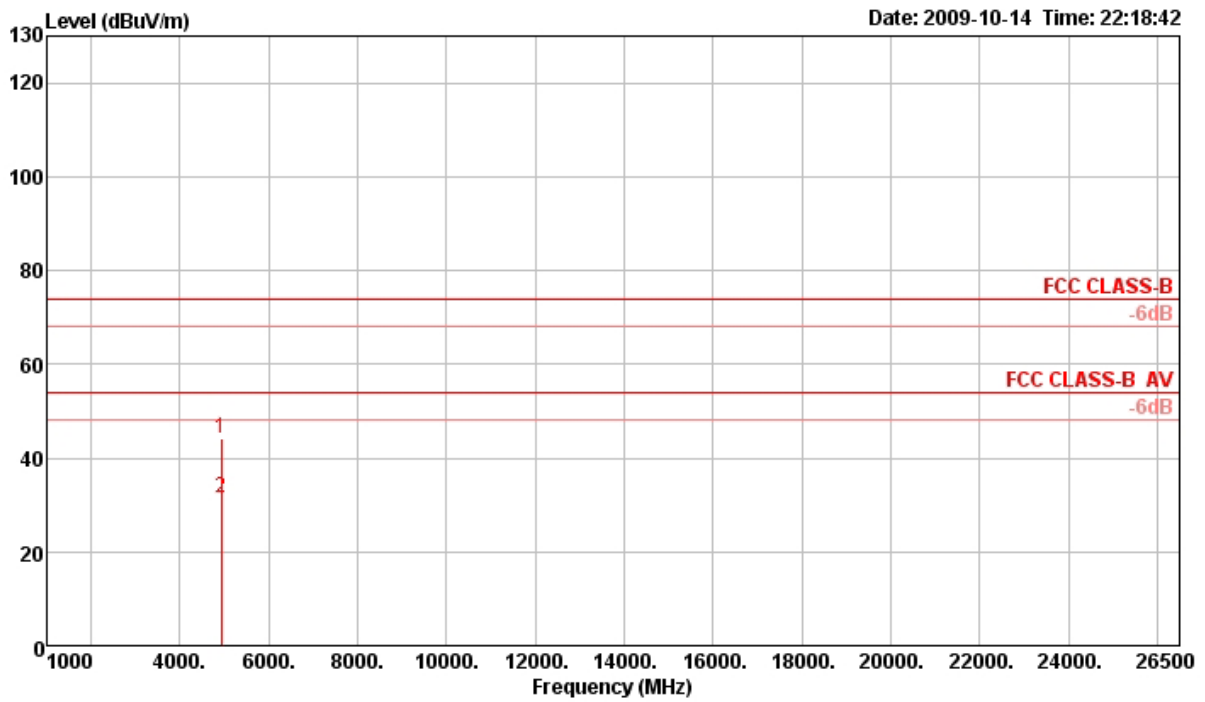

	Freq	Level	LIMIT Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 p	4924.24	44.12	74.00	-29.88	41.90	3.97	33.26	35.01	331	100 Peak	HORIZONTAL
2 a	4924.43	31.33	54.00	-22.67	29.11	3.97	33.26	35.01	331	100 Average	HORIZONTAL

**Vertical**

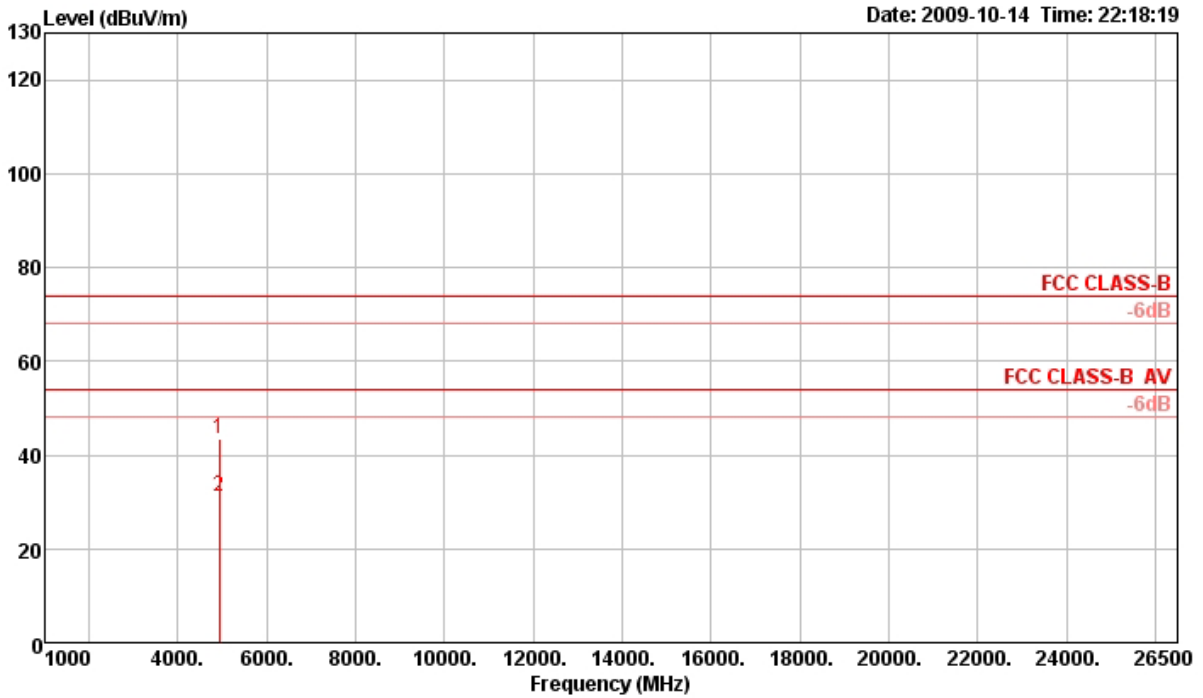

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	4924.15	43.35	74.00	-30.65	41.13	3.97	33.26	35.01	216	100	Peak	VERTICAL
2 a	4924.37	31.28	54.00	-22.72	29.06	3.97	33.26	35.01	216	100	Average	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Ant. B- PCB Antenna>:


Temperature	23°C	Humidity	54%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS0 20MHz Ch 1 / Mode 4 with Ant. B

Horizontal

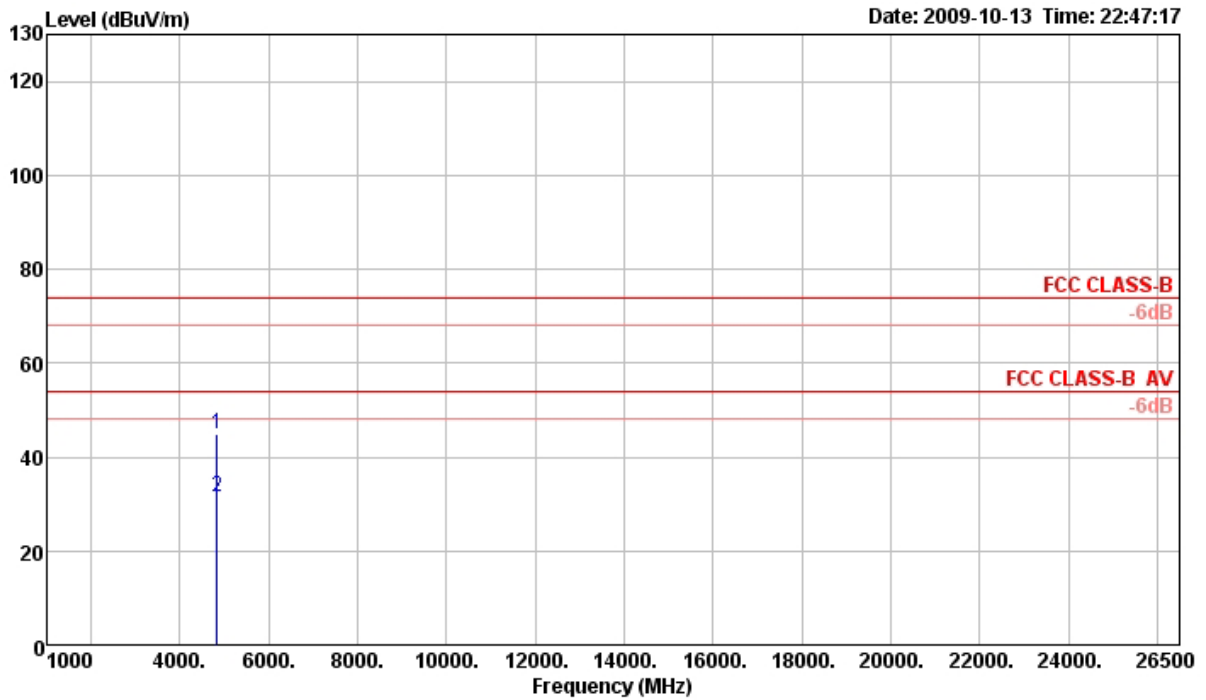

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4824.02	45.08	74.00	-28.92	43.09	3.96	35.03	33.06	16	102	Peak	HORIZONTAL
2 a	4824.73	31.63	54.00	-22.37	29.64	3.96	35.03	33.06	16	102	Average	HORIZONTAL


**Vertical**

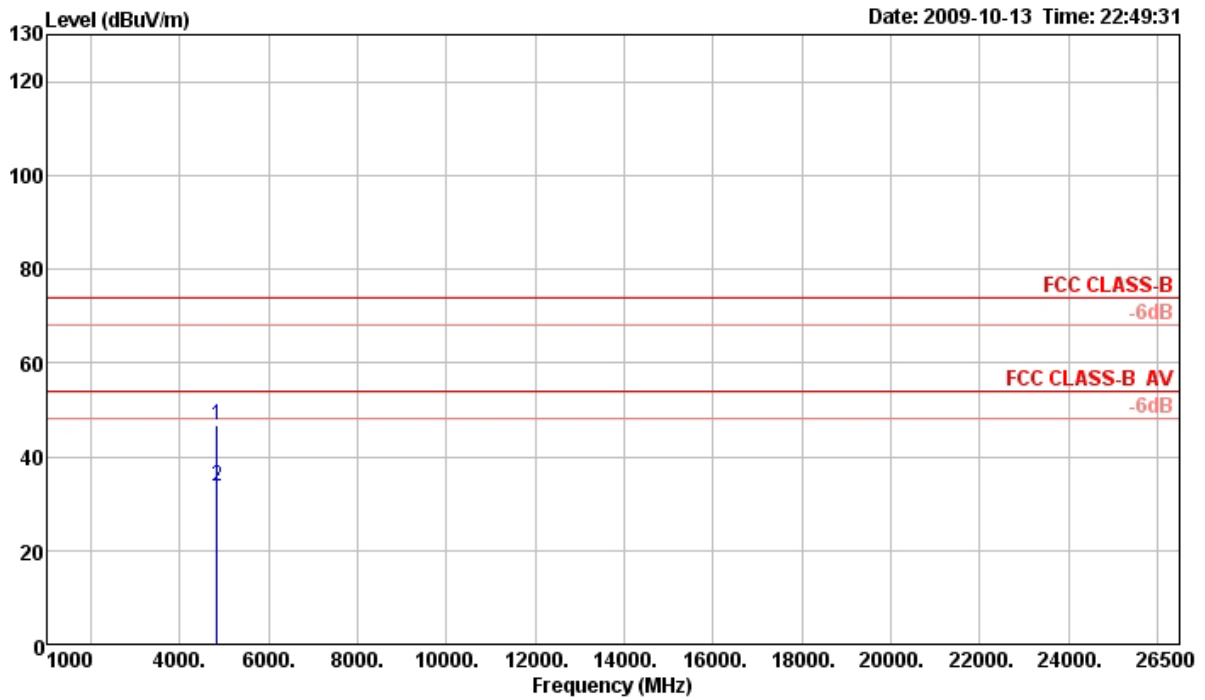

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4824.85	46.76	74.00	-27.24	44.77	3.96	35.03	33.06	194	126	Peak	VERTICAL
2 a	4824.91	33.61	54.00	-20.39	31.62	3.96	35.03	33.06	194	126	Average	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 6 / Mode 4 with Ant. B

**Horizontal**

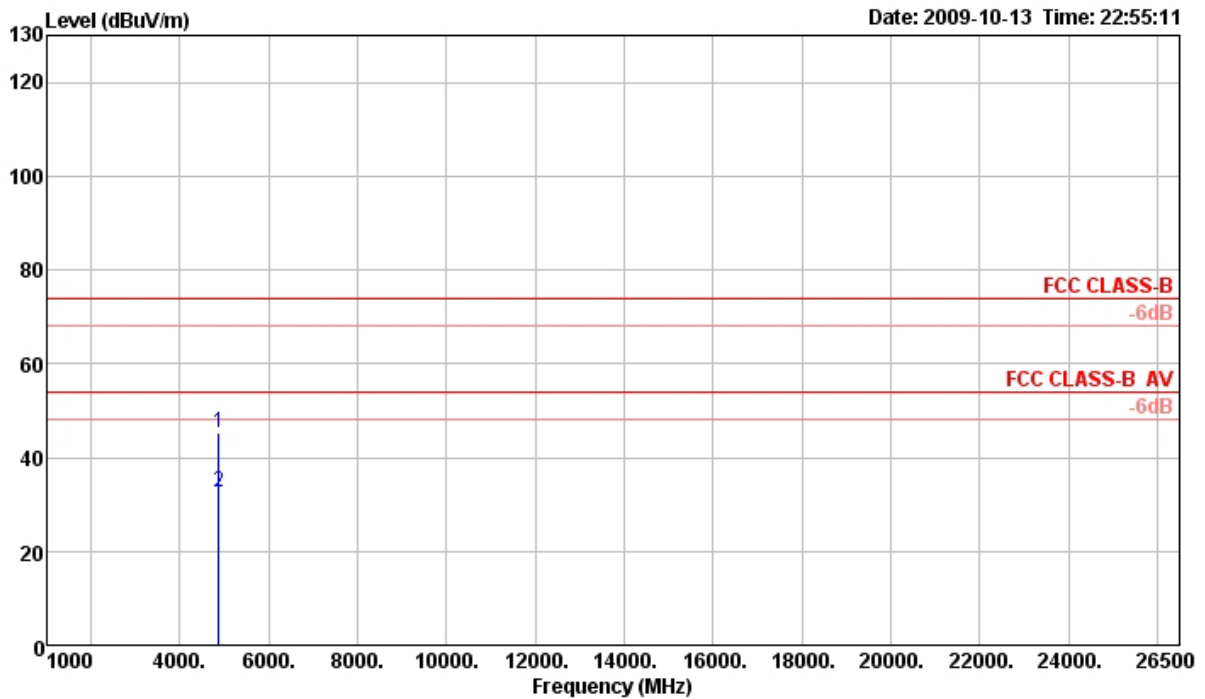

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4873.63	45.26	74.00	-28.74	43.16	3.97	35.03	33.16	11	102	Peak	HORIZONTAL
2 a	4873.76	32.71	54.00	-21.29	30.61	3.97	35.03	33.16	11	102	Average	HORIZONTAL

**Vertical**

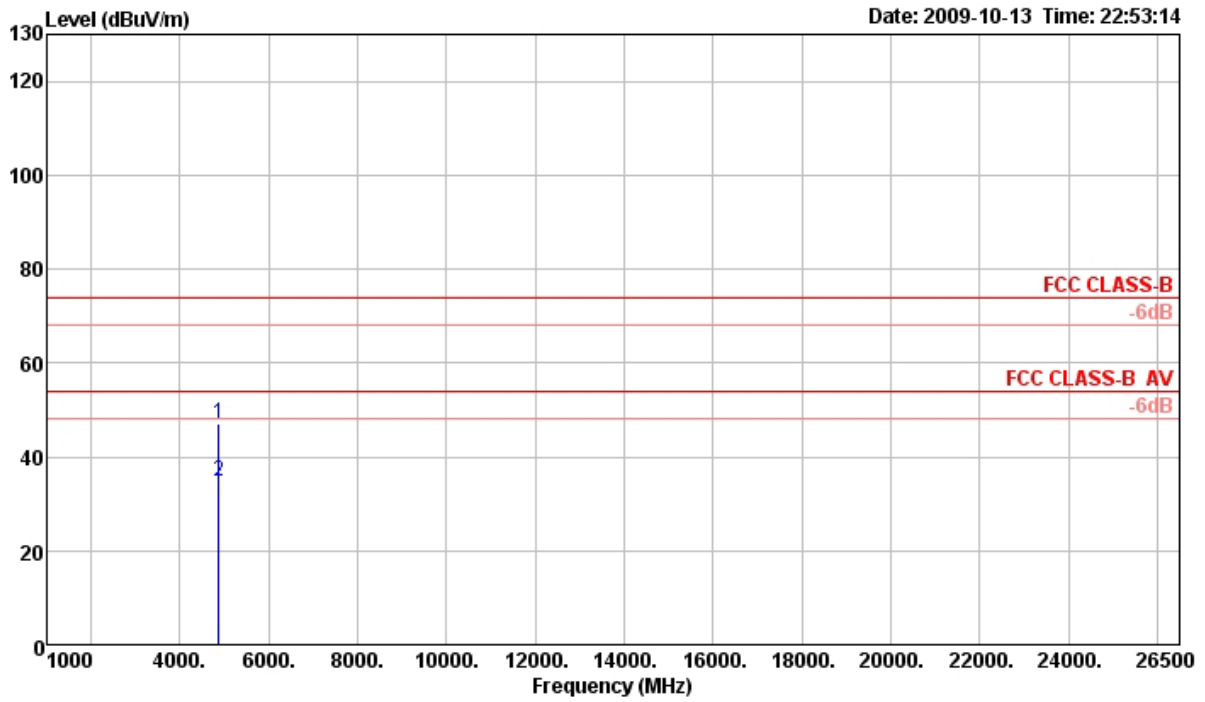


	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4873.76	47.24	74.00	-26.76	45.14	3.97	35.03	33.16	202	122	Peak	VERTICAL
2 a	4873.89	34.67	54.00	-19.33	32.57	3.97	35.03	33.16	202	122	Average	VERTICAL




<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch11 / Mode 4 with Ant. B

**Horizontal**

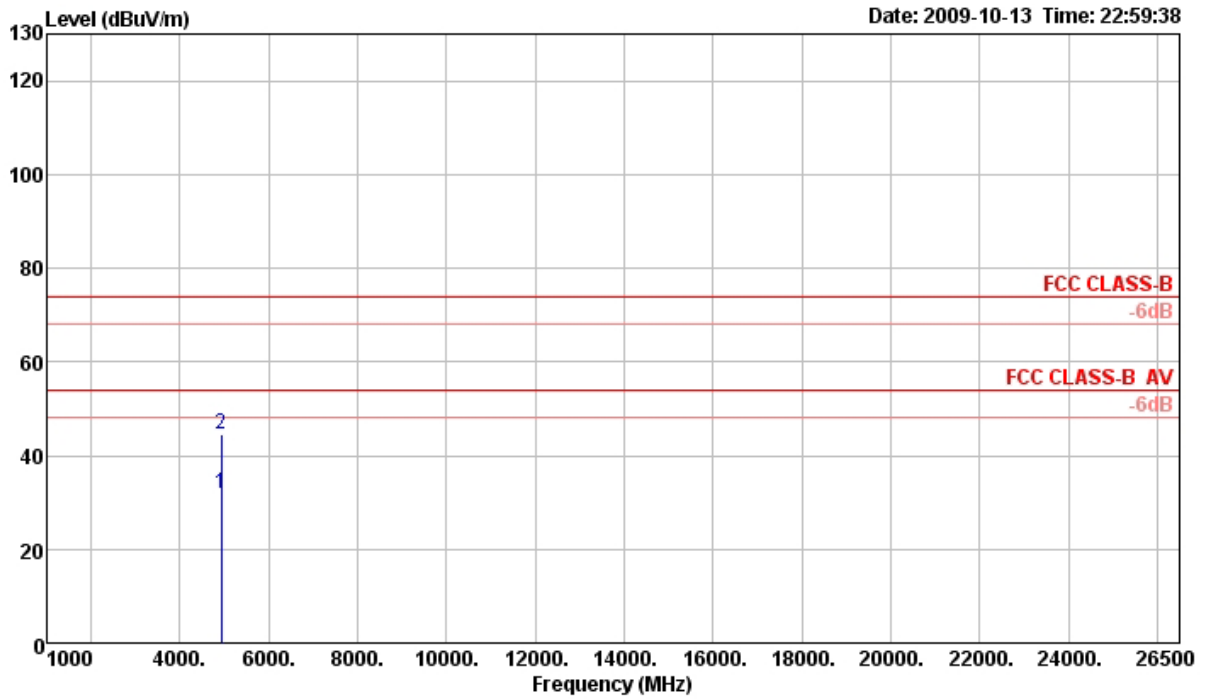

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4923.31	31.79	54.00	-22.21	29.57	3.97	35.01	33.26	22	108	Average	HORIZONTAL
2 p	4924.53	44.67	74.00	-29.33	42.45	3.97	35.01	33.26	22	108	Peak	HORIZONTAL


**Vertical**

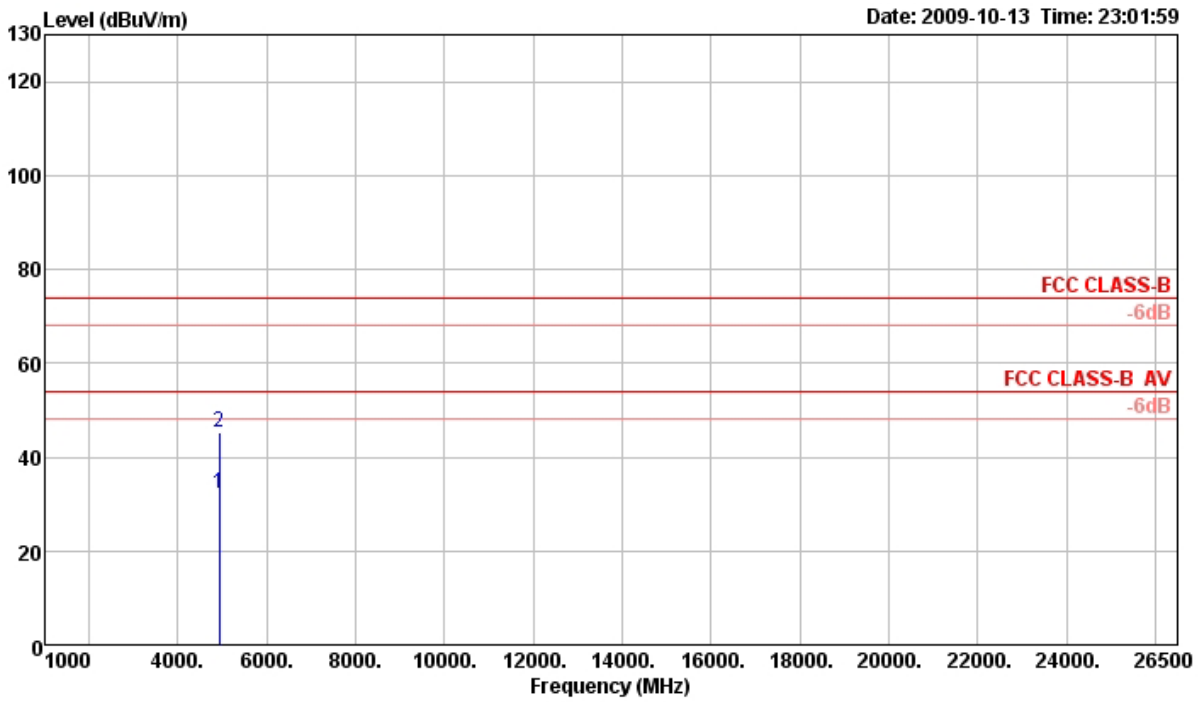

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4923.91	32.27	54.00	-21.73	30.05	3.97	35.01	33.26	196	120	Average	VERTICAL
2 p	4924.41	45.21	74.00	-28.79	42.99	3.97	35.01	33.26	196	120	Peak	VERTICAL


Temperature	23°C	Humidity	54%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS0 40MHz Ch 3 / Mode 4 with Ant. B

**Horizontal**

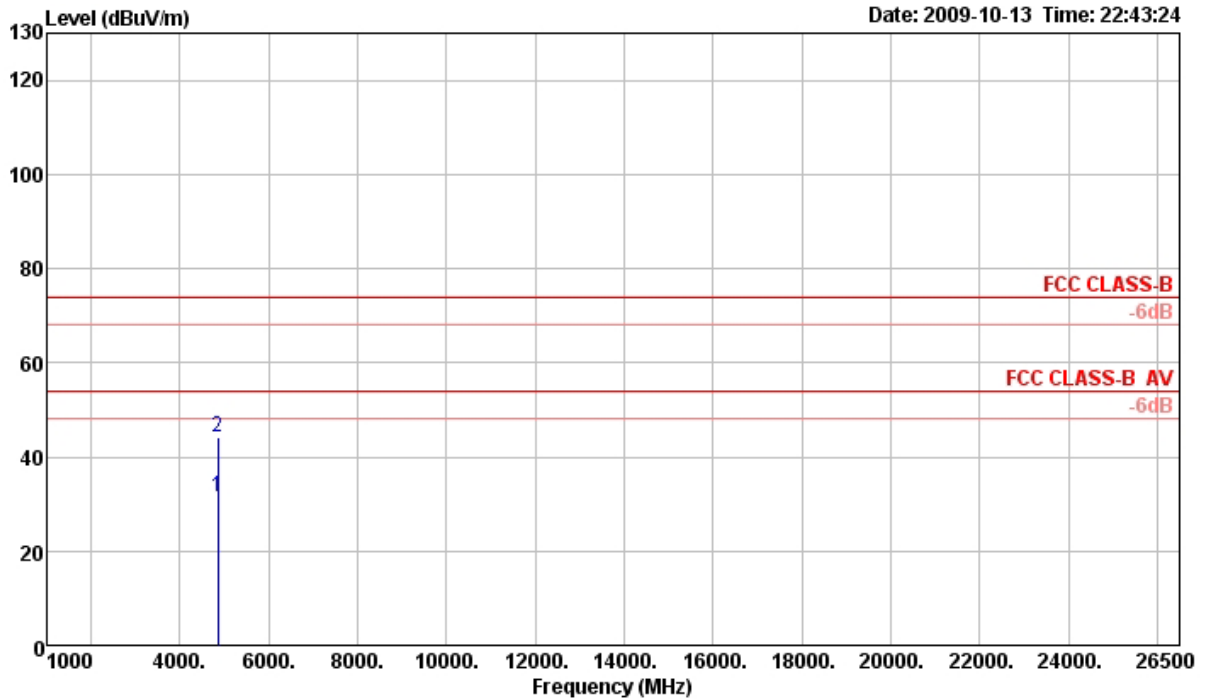

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4844.43	31.67	54.00	-22.33	29.65	3.96	35.03	33.09	360	100	Average	HORIZONTAL
2 p	4844.55	44.06	74.00	-29.94	42.04	3.96	35.03	33.09	360	100	Peak	HORIZONTAL


**Vertical**

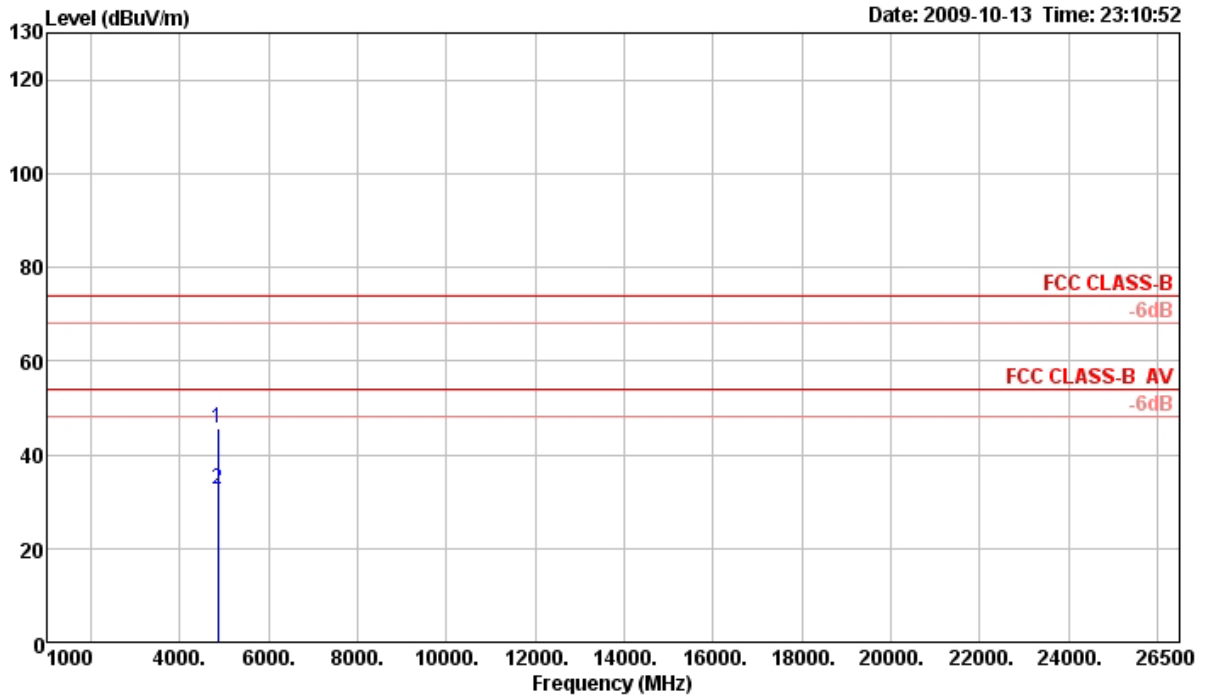

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4843.18	45.75	74.00	-28.25	43.73	3.96	35.03	33.09	186	124	Peak	VERTICAL
2 a	4843.93	32.61	54.00	-21.39	30.59	3.96	35.03	33.09	186	124	Average	VERTICAL


Temperature	23°C	Humidity	54%
Test Engineer	Alan Huang	Configurations	IEEE 802.11n MCS0 40MHz Ch 6 / Mode 4 with Ant. B

**Horizontal**

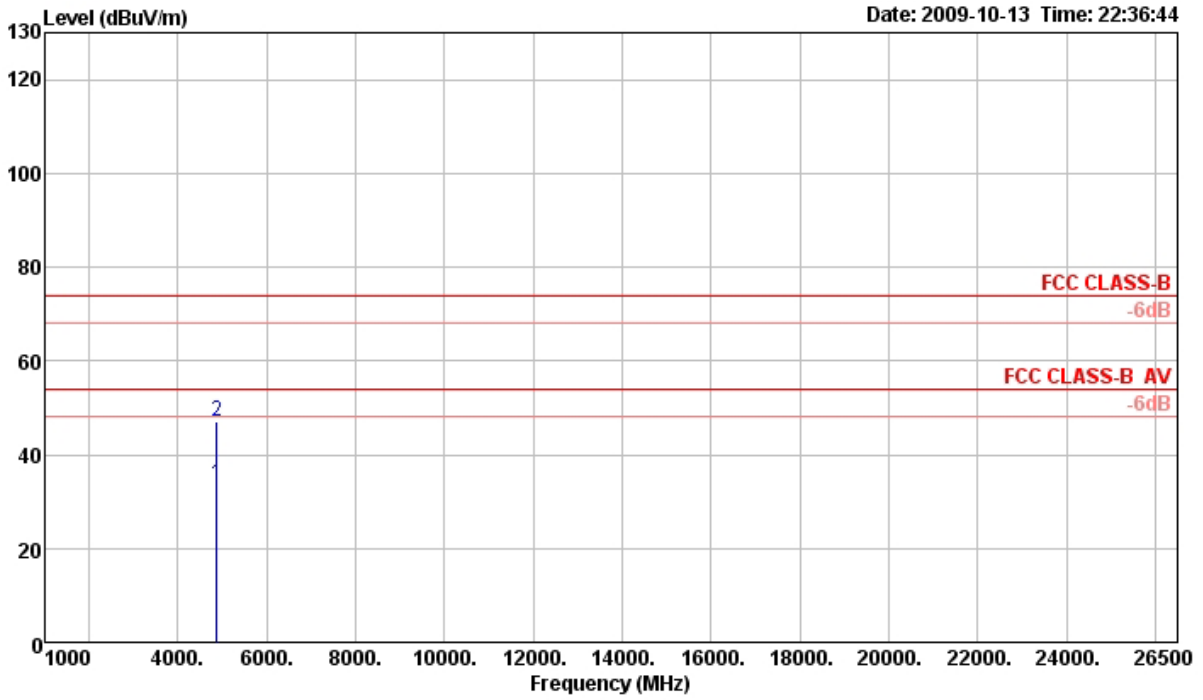

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4874.09	33.80	54.00	-20.20	31.70	3.97	35.03	33.16	0	100	Average	HORIZONTAL
2 p	4874.72	47.04	74.00	-26.96	44.94	3.97	35.03	33.16	0	100	Peak	HORIZONTAL


**Vertical**

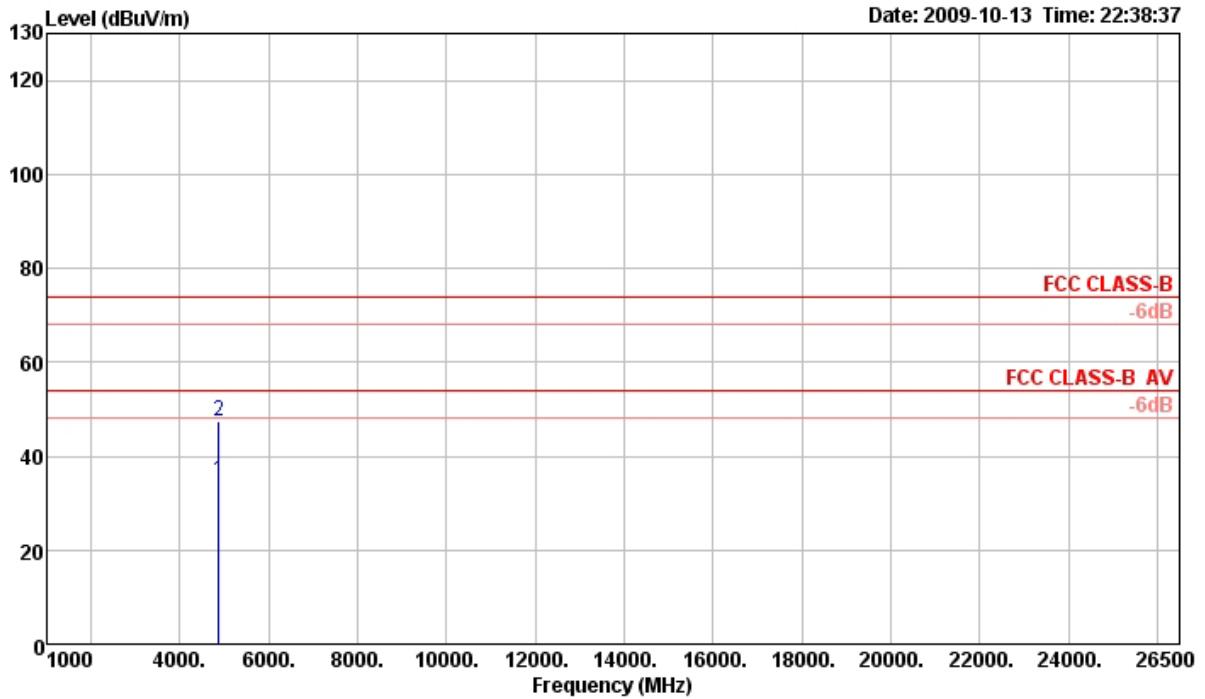

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4873.92	34.79	54.00	-19.21	32.69	3.97	35.03	33.16	179	121	Average	VERTICAL
2 p	4873.94	47.50	74.00	-26.50	45.40	3.97	35.03	33.16	179	121	Peak	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 9 / Mode 4 with Ant. B

**Horizontal**

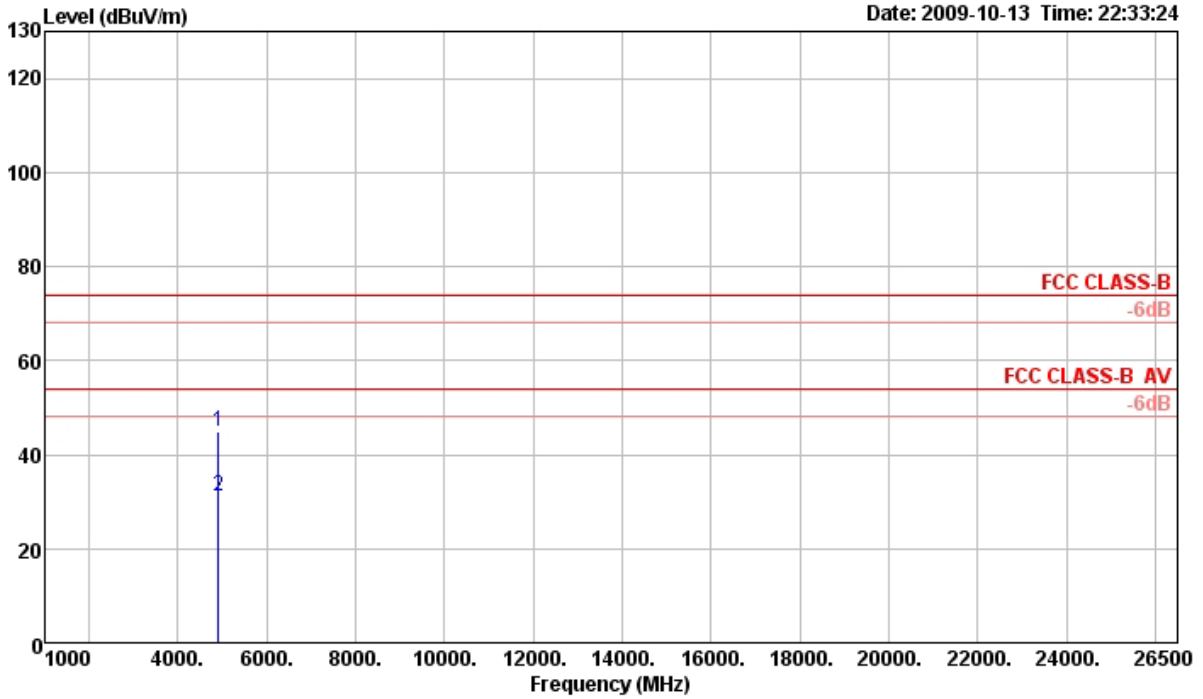

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4903.18	44.94	74.00	-29.06	42.80	3.97	35.02	33.19	360	100	Peak	HORIZONTAL
2 a	4903.22	31.28	54.00	-22.72	29.14	3.97	35.02	33.19	360	100	Average	HORIZONTAL

**Vertical**

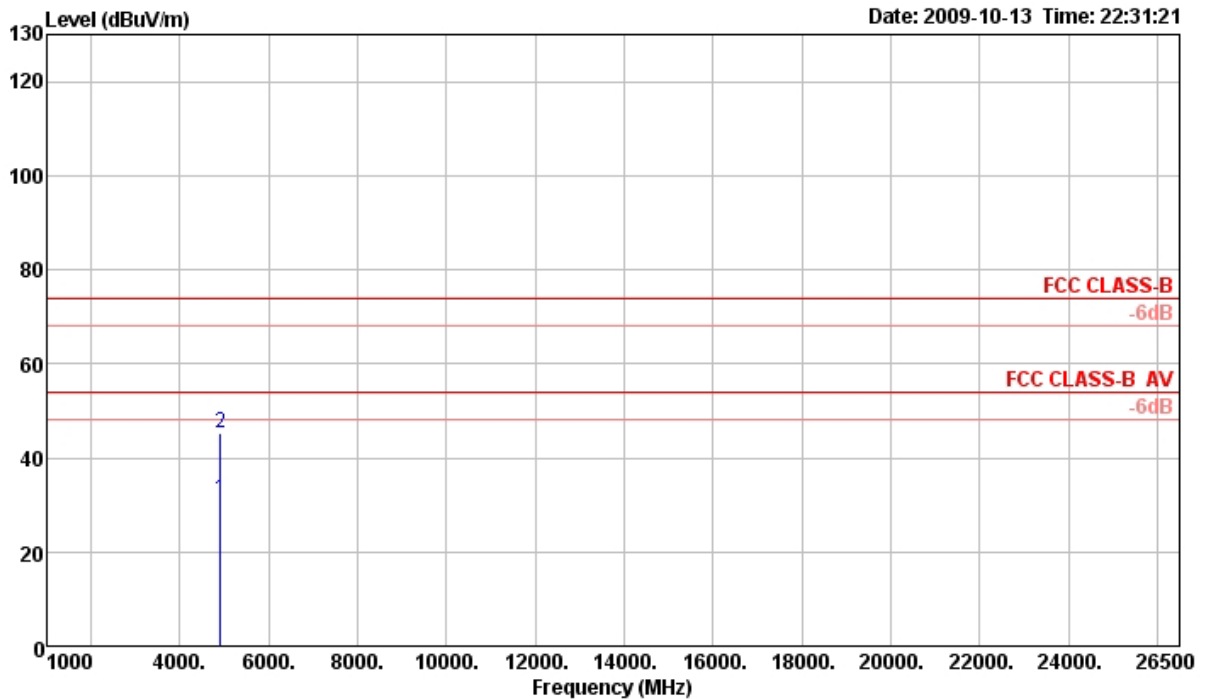

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4904.82	31.27	54.00	-22.73	29.09	3.97	35.02	33.23	196	126	Average	VERTICAL
2 p	4904.82	45.23	74.00	-28.77	43.05	3.97	35.02	33.23	196	126	Peak	VERTICAL

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.




Temperature	23°C	Humidity	54%
Test Engineer	Alan Huang	Configurations	IEEE 802.11b CH 1 / Mode 4 with Ant. B

**Horizontal**

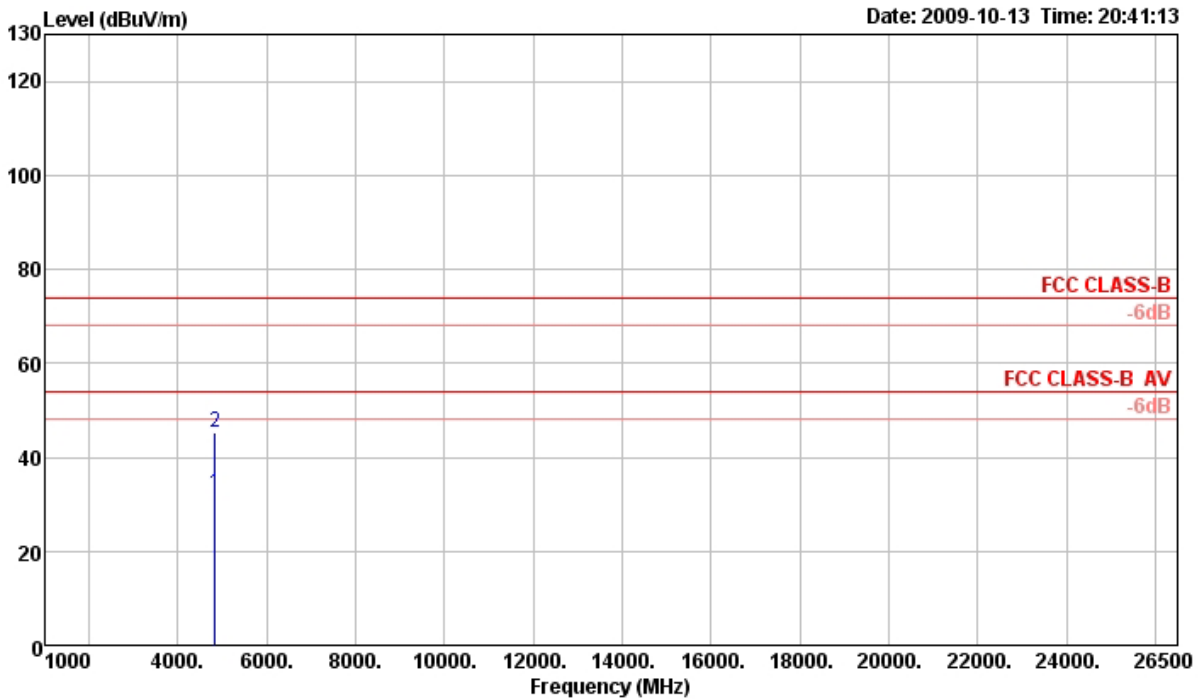

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4824.06	32.21	54.00	-21.79	30.22	3.96	35.03	33.06	360	100	Average	HORIZONTAL
2 p	4824.56	45.44	74.00	-28.56	43.45	3.96	35.03	33.06	360	100	Peak	HORIZONTAL


**Vertical**

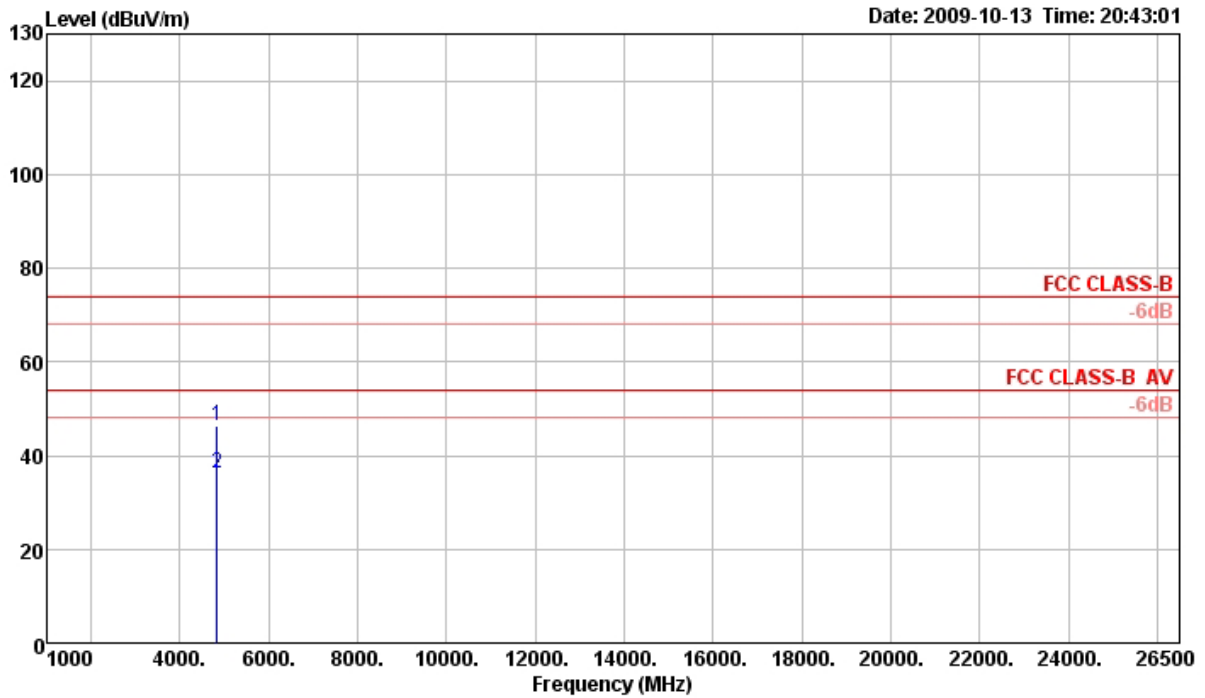

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.88	46.34	74.00	-27.66	44.35	3.96	35.03	33.06	152	101	Peak	VERTICAL
2 a	4824.08	36.31	54.00	-17.69	34.32	3.96	35.03	33.06	152	101	Average	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11b CH 6 / Mode 4 with Ant. B

**Horizontal**

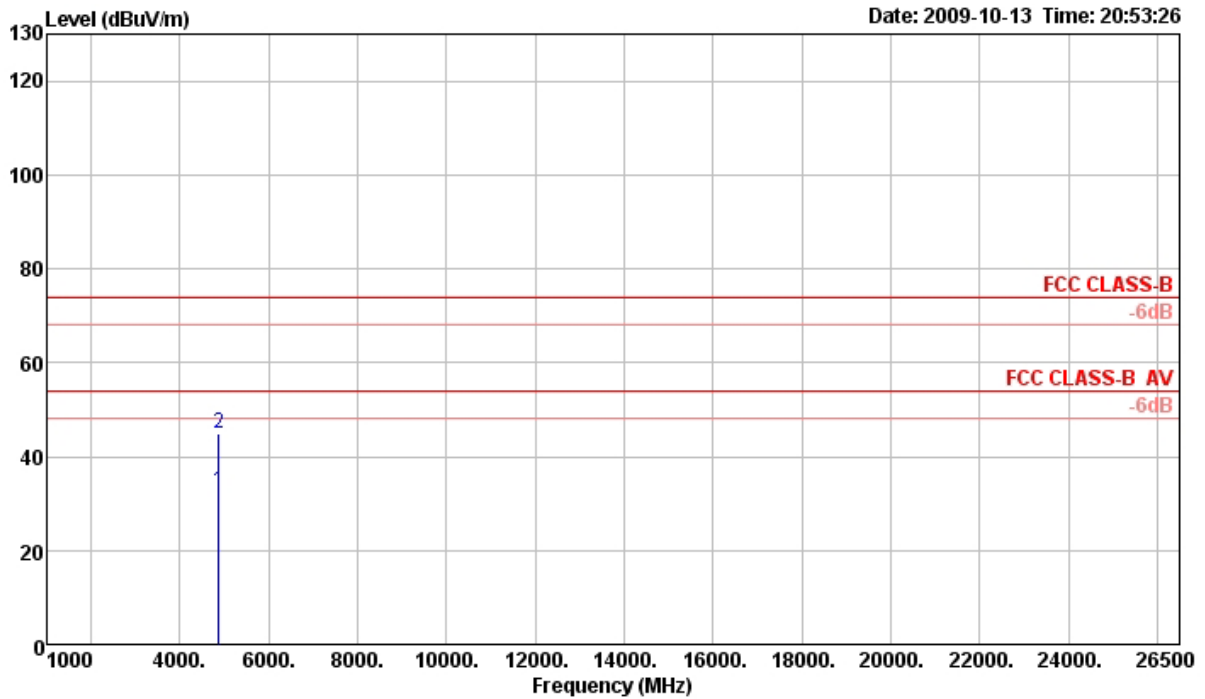

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4873.99	32.59	54.00	-21.41	30.49	3.97	35.03	33.16	360	115	Average	HORIZONTAL
2 p	4874.61	44.79	74.00	-29.21	42.69	3.97	35.03	33.16	360	115	Peak	HORIZONTAL


**Vertical**

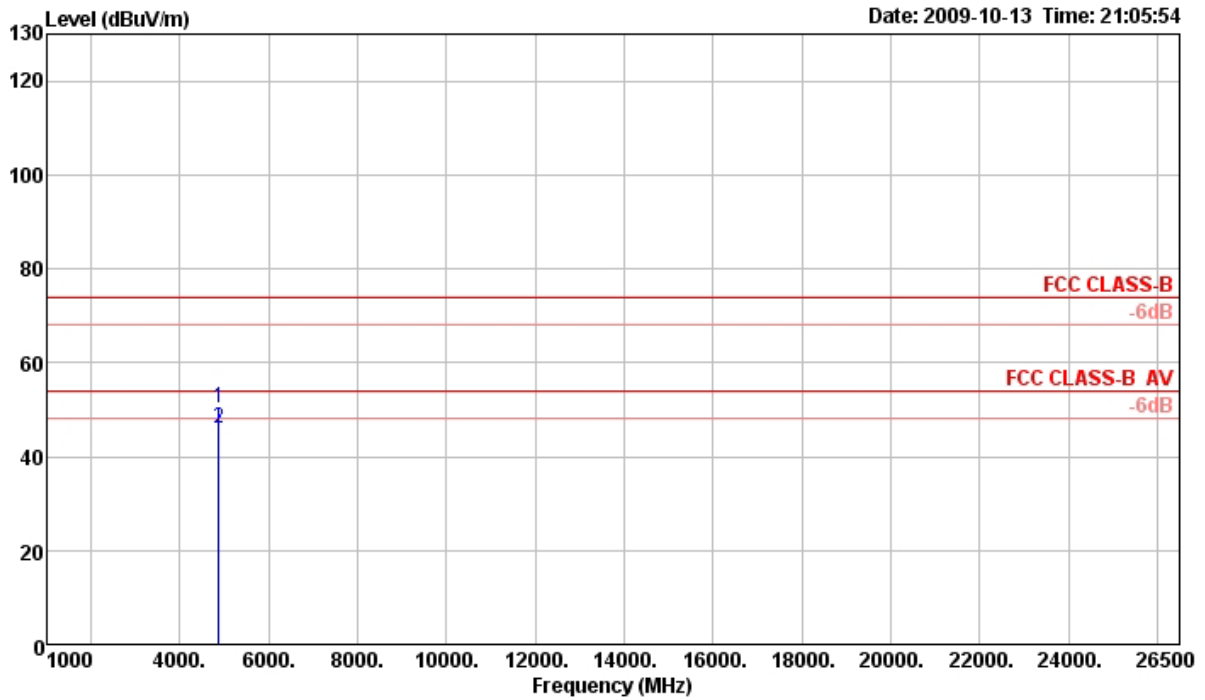

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4874.10	50.25	74.00	-23.75	48.15	3.97	35.03	33.16	168	102	Peak	VERTICAL
2 a	4874.13	45.87	54.00	-8.13	43.77	3.97	35.03	33.16	168	102	Average	VERTICAL


<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11b CH 11 / Mode 4 with Ant. B

**Horizontal**

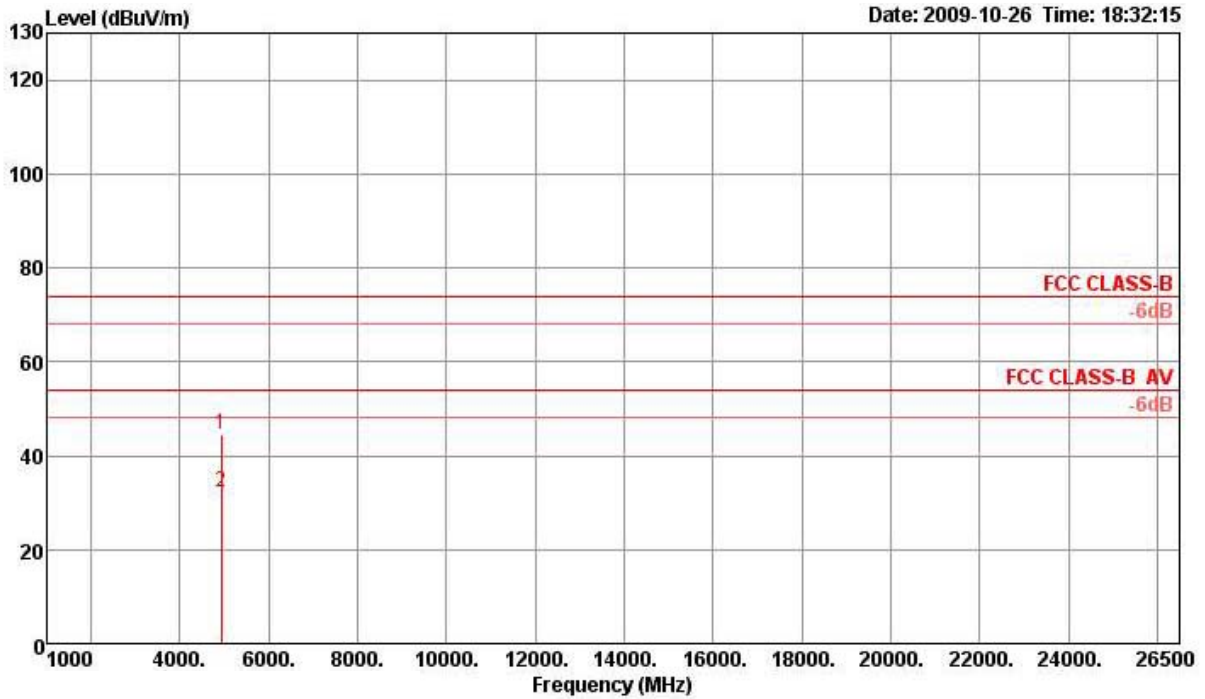

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 p	4923.24	44.66	74.00	-29.34	42.44	3.97	33.26	35.01	360	100 Peak	HORIZONTAL
2 a	4923.36	32.13	54.00	-21.87	29.91	3.97	33.26	35.01	360	100 Average	HORIZONTAL


**Vertical**

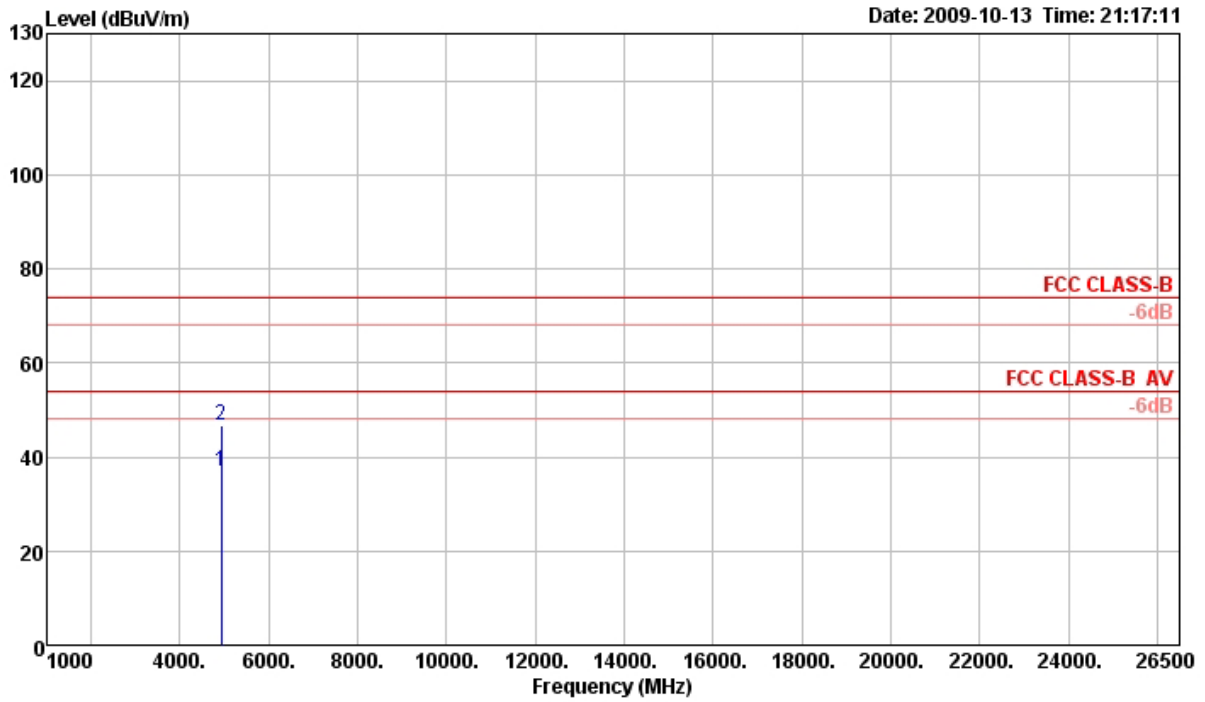

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4924.04	36.80	54.00	-17.20	34.58	3.97	35.01	33.26	171	100	Average	VERTICAL
2 p	4924.22	46.88	74.00	-27.12	44.66	3.97	35.01	33.26	171	100	Peak	VERTICAL


Temperature	23°C	Humidity	54%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 1 / Mode 4 with Ant. B

**Horizontal**

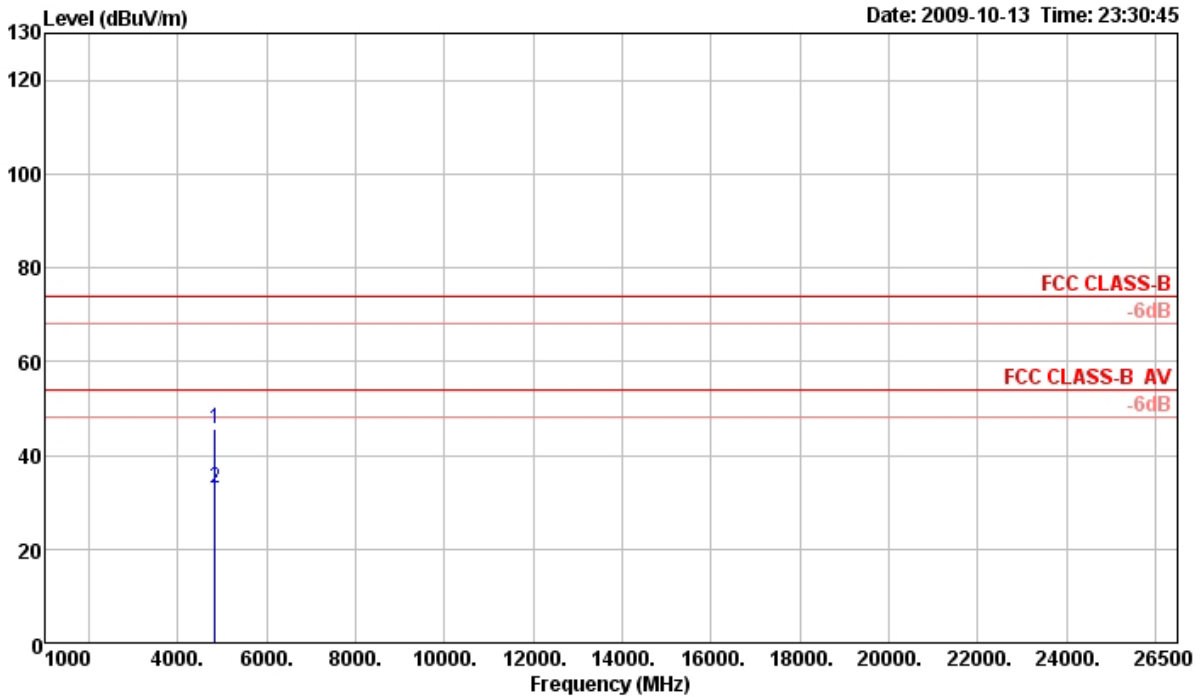

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4824.07	45.79	74.00	-28.21	43.80	3.96	35.03	33.06	12	100	Peak	HORIZONTAL
2 a	4824.31	32.82	54.00	-21.18	30.83	3.96	35.03	33.06	12	100	Average	HORIZONTAL

**Vertical**

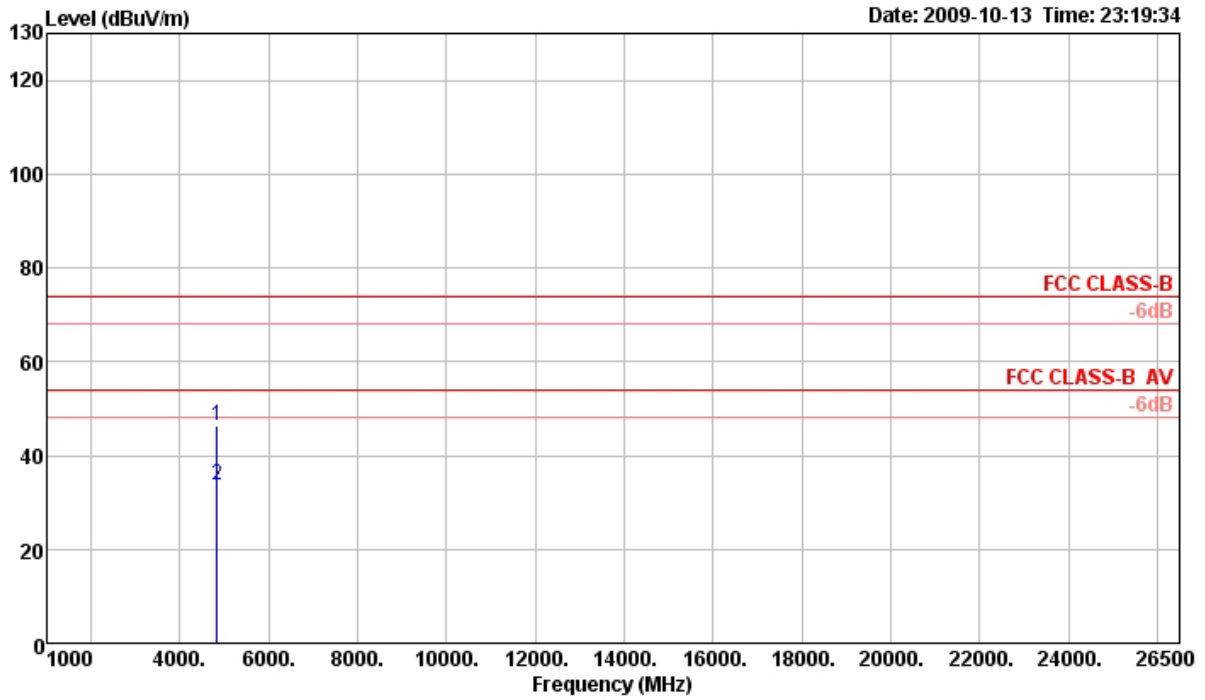


	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.66	46.36	74.00	-27.64	44.37	3.96	35.03	33.06	185	123	Peak	VERTICAL
2 a	4824.83	33.64	54.00	-20.36	31.65	3.96	35.03	33.06	185	123	Average	VERTICAL




<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11g CH 6 / Mode 4 with Ant. B

**Horizontal**

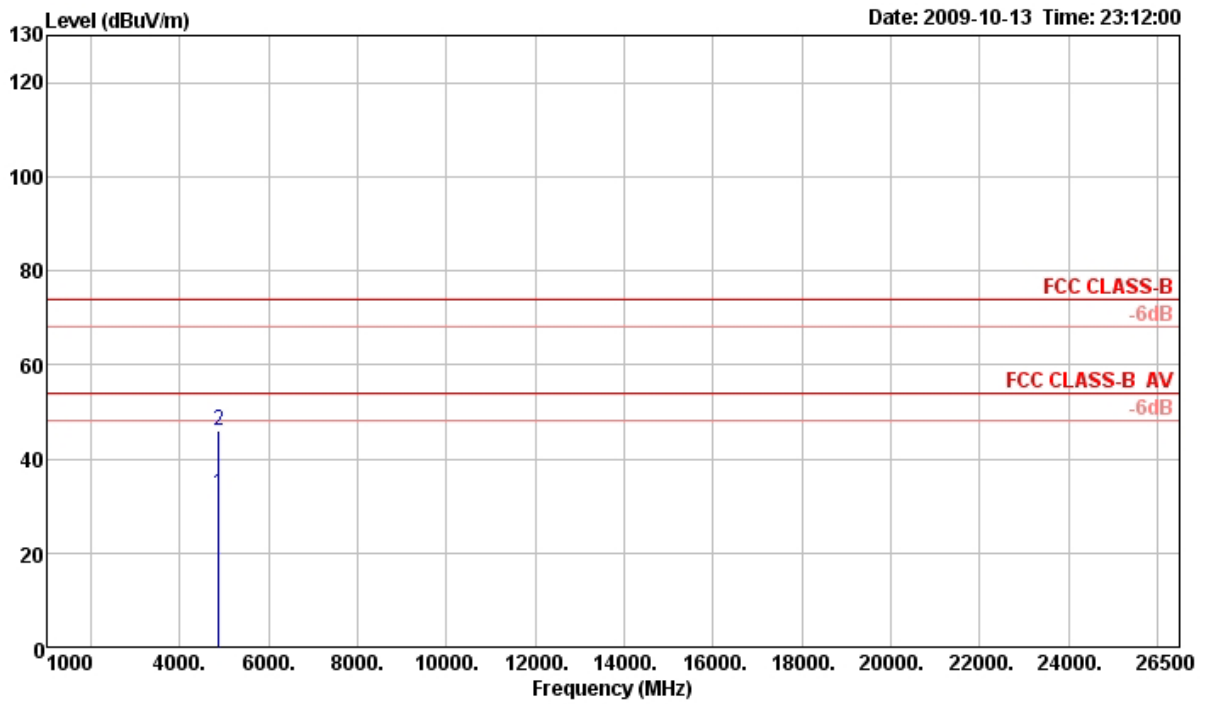

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4873.23	32.69	54.00	-21.31	30.59	3.97	35.03	33.16	10	100	Average	HORIZONTAL
2 p	4873.75	46.00	74.00	-28.00	43.90	3.97	35.03	33.16	10	100	Peak	HORIZONTAL


**Vertical**

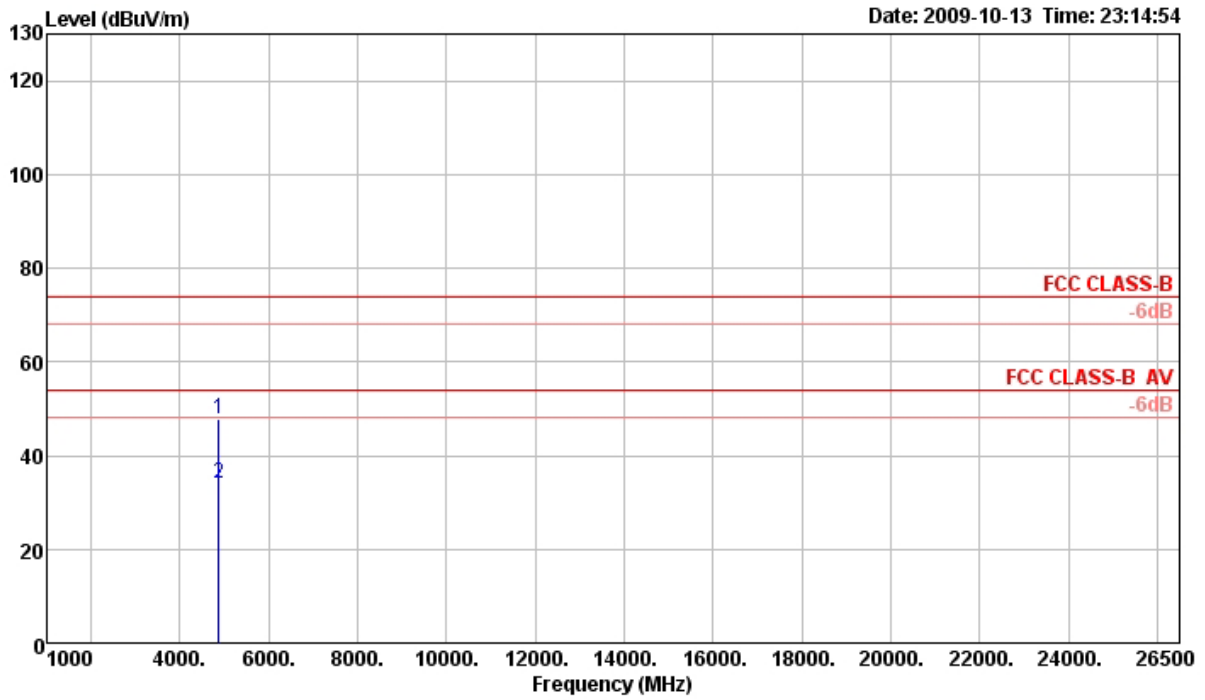

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4874.25	47.68	74.00	-26.32	45.58	3.97	35.03	33.16	187	121	Peak	VERTICAL
2 a	4874.43	34.21	54.00	-19.79	32.11	3.97	35.03	33.16	187	121	Average	VERTICAL


Temperature	23°C	Humidity	54%
Test Engineer	Alan Huang	Configurations	IEEE 802.11g CH 11 / Mode 4 with Ant. B

**Horizontal**

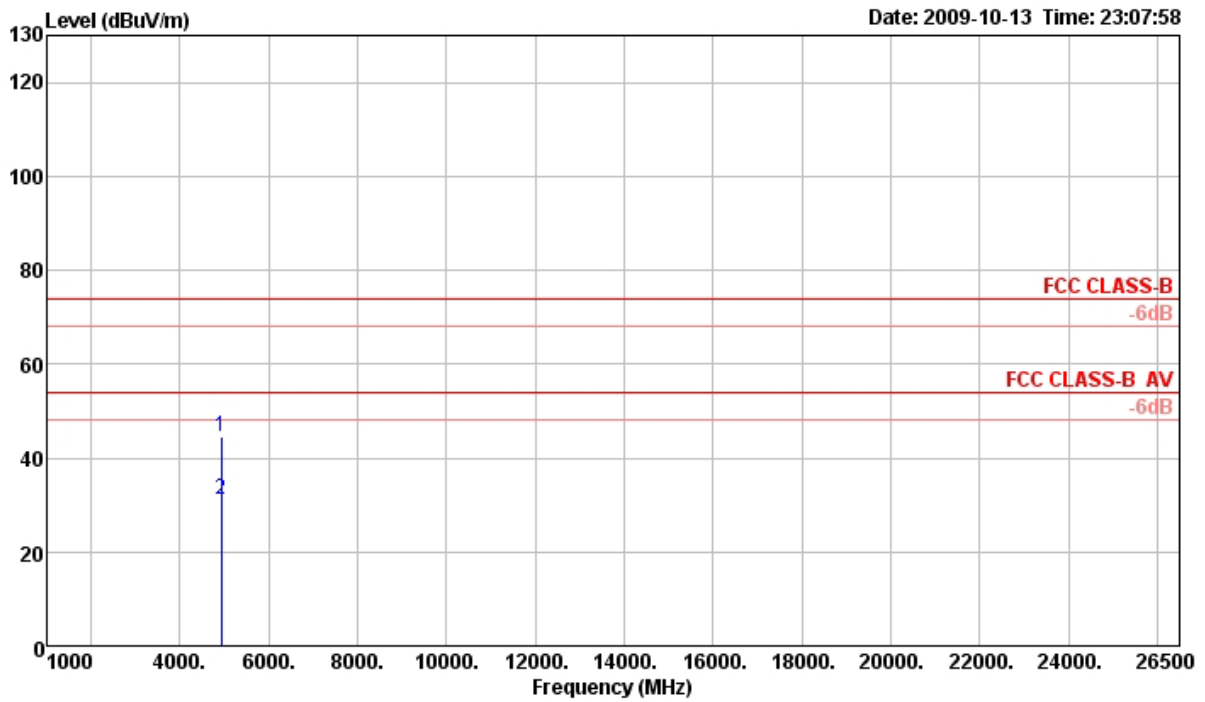

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4923.42	44.46	74.00	-29.54	42.24	3.97	35.01	33.26	353	107	Peak	HORIZONTAL
2 a	4923.74	31.31	54.00	-22.69	29.09	3.97	35.01	33.26	353	107	Average	HORIZONTAL

**Vertical**

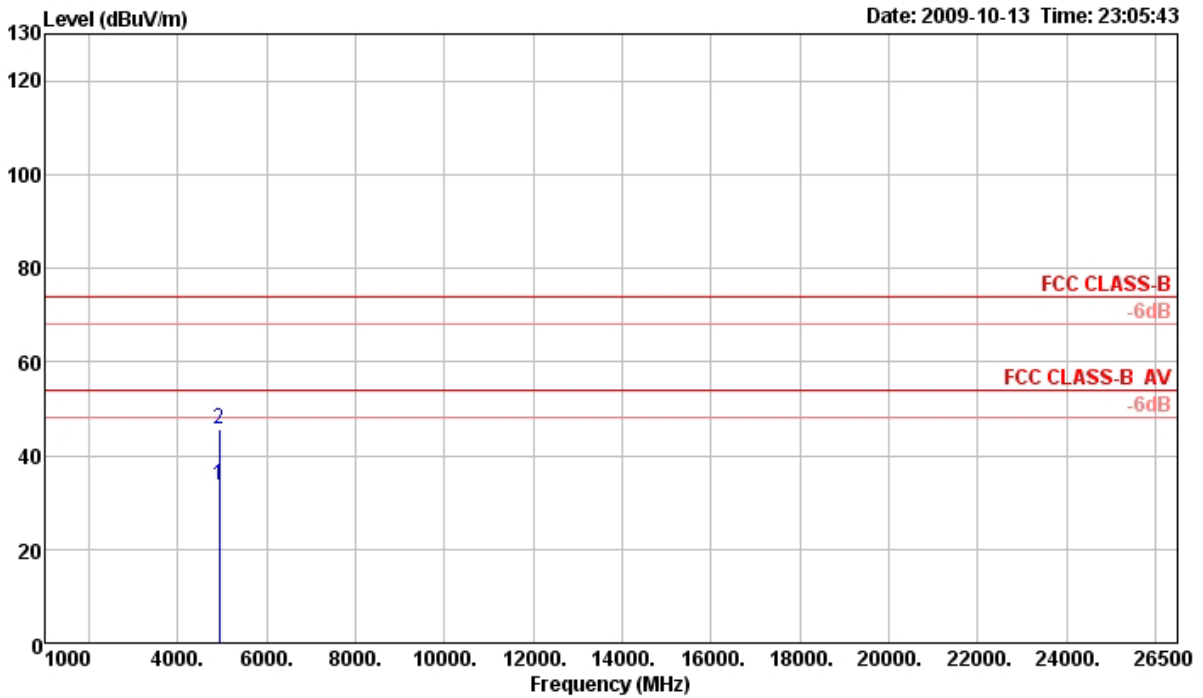

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4923.47	33.65	54.00	-20.35	31.43	3.97	35.01	33.26	198	119	Average	VERTICAL
2 p	4924.57	45.62	74.00	-28.38	43.40	3.97	35.01	33.26	198	119	Peak	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Band Edge Emissions Measurement

### 4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1 MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

### 4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

### 4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

### 4.6.5. Test Deviation

There is no deviation with the original standard.

### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

<For Ant. A – Dipole Antenna>:

<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 1, 6, 11 / Mode 1 with Ant. A
<b>Test Date</b>	Oct. 14, 2009		

##### Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2390.00	53.86	54.00	-0.14	22.93	2.76	0.00	28.17	339	100	Average	HORIZONTAL
2 !	2390.00	71.24	74.00	-2.76	40.31	2.76	0.00	28.17	339	100	Peak	HORIZONTAL
3 p	2410.20	114.15			83.17	2.77	0.00	28.21	339	100	Peak	HORIZONTAL
4 a	2413.20	103.84			72.86	2.77	0.00	28.21	339	100	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz

##### Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2389.60	53.80	54.00	-0.20	22.87	2.76	0.00	28.17	339	100	Average	HORIZONTAL
2	2389.80	66.66	74.00	-7.34	35.73	2.76	0.00	28.17	339	100	Peak	HORIZONTAL
3 p	2443.00	116.99			85.92	2.78	0.00	28.29	339	100	Peak	HORIZONTAL
4 a	2444.40	105.97			74.90	2.78	0.00	28.29	339	100	Average	HORIZONTAL
5 !	2483.50	51.12	54.00	-2.88	19.93	2.81	0.00	28.38	339	100	Average	HORIZONTAL
6	2484.10	63.34	74.00	-10.66	32.15	2.81	0.00	28.38	339	100	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

##### Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	2466.20	113.10			81.97	2.80	28.33	0.00	191	122	Peak	HORIZONTAL
2 a	2468.60	103.52			72.34	2.80	28.38	0.00	191	122	Average	HORIZONTAL
3 !	2483.50	53.37	54.00	-0.63	22.18	2.81	28.38	0.00	191	122	Average	HORIZONTAL
4 !	2484.50	73.26	74.00	-0.74	42.07	2.81	28.38	0.00	191	122	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 3, 6, 9 / Mode 1 with Ant. A
<b>Test Date</b>	Oct. 19, 2009		

### Channel 3

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 !	2390.00	53.16	54.00	-0.84	22.23	2.76	28.17	0.00	0	100 Average	HORIZONTAL
2 !	2390.00	71.53	74.00	-2.47	40.60	2.76	28.17	0.00	0	100 Peak	HORIZONTAL
3 a	2406.80	96.48			65.50	2.77	28.21	0.00	0	100 Average	HORIZONTAL
4 p	2410.00	107.14			76.16	2.77	28.21	0.00	0	100 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

### Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 !	2387.60	70.76	74.00	-3.24	39.83	2.76	28.17	0.00	0	100 Peak	HORIZONTAL
2 !	2390.00	53.64	54.00	-0.36	22.71	2.76	28.17	0.00	0	100 Average	HORIZONTAL
3 a	2434.60	100.63			69.56	2.78	28.29	0.00	0	100 Average	HORIZONTAL
4 p	2434.60	111.61			80.54	2.78	28.29	0.00	0	100 Peak	HORIZONTAL
5	2483.50	46.87	54.00	-7.13	15.68	2.81	28.38	0.00	0	100 Average	HORIZONTAL
6	2483.50	59.45	74.00	-14.55	28.26	2.81	28.38	0.00	0	100 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

### Channel 9

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 a	2454.40	97.04			65.91	2.80	28.33	0.00	193	126 Average	HORIZONTAL
2 p	2458.00	107.31			76.18	2.80	28.33	0.00	193	126 Peak	HORIZONTAL
3 !	2483.50	53.19	54.00	-0.81	22.00	2.81	28.38	0.00	193	126 Average	HORIZONTAL
4 !	2483.50	72.87	74.00	-1.13	41.68	2.81	28.38	0.00	193	126 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

#### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11b CH 1, 6, 11 / Mode 1 with Ant. A
<b>Test Date</b>	Oct. 14, 2009		

**Channel 1**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2390.00	53.64	54.00	-0.36	22.71	2.76	0.00	28.17	176	100	Average	HORIZONTAL
2	2390.00	64.86	74.00	-9.14	33.93	2.76	0.00	28.17	176	100	Peak	HORIZONTAL
3 a	2409.40	111.25			80.27	2.77	0.00	28.21	176	100	Average	HORIZONTAL
4 p	2411.20	114.90			83.92	2.77	0.00	28.21	176	100	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2389.80	64.04	74.00	-9.96	33.11	2.76	0.00	28.17	338	100	Peak	HORIZONTAL
2 !	2390.00	53.05	54.00	-0.95	22.12	2.76	0.00	28.17	338	100	Average	HORIZONTAL
3 p	2438.60	115.38			84.31	2.78	0.00	28.29	338	100	Peak	HORIZONTAL
4 a	2439.80	111.98			80.91	2.78	0.00	28.29	338	100	Average	HORIZONTAL
5 !	2483.50	49.90	54.00	-4.10	18.71	2.81	0.00	28.38	338	100	Average	HORIZONTAL
6	2483.70	60.33	74.00	-13.67	29.14	2.81	0.00	28.38	338	100	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 11**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	2463.60	115.81			84.68	2.80	0.00	28.33	341	191	Peak	HORIZONTAL
2 a	2464.80	112.25			81.12	2.80	0.00	28.33	341	191	Average	HORIZONTAL
3	2487.10	63.94	74.00	-10.06	32.71	2.81	0.00	28.42	341	191	Peak	HORIZONTAL
4 !	2488.00	53.29	54.00	-0.71	22.06	2.81	0.00	28.42	341	191	Average	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.



<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11g CH 1, 6, 11 / Mode 1 with Ant. A
<b>Test Date</b>	Oct. 19, 2009		

**Channel 1**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2389.80	68.38	74.00	-5.62	37.45	2.76	0.00	28.17	338	100	Peak	HORIZONTAL
2 !	2390.00	53.77	54.00	-0.23	22.84	2.76	0.00	28.17	338	100	Average	HORIZONTAL
3 a	2413.60	104.67			73.69	2.77	0.00	28.21	338	100	Average	HORIZONTAL
4 p	2414.60	115.01			84.03	2.77	0.00	28.21	338	100	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2388.60	67.10	74.00	-6.90	36.17	2.76	0.00	28.17	337	100	Peak	HORIZONTAL
2 !	2390.00	53.65	54.00	-0.35	22.72	2.76	0.00	28.17	337	100	Average	HORIZONTAL
3 p	2442.80	118.60			87.53	2.78	0.00	28.29	337	100	Peak	HORIZONTAL
4 a	2443.40	106.90			75.83	2.78	0.00	28.29	337	100	Average	HORIZONTAL
5 !	2483.50	49.79	54.00	-4.21	18.60	2.81	0.00	28.38	337	100	Average	HORIZONTAL
6	2485.70	62.12	74.00	-11.88	30.89	2.81	0.00	28.42	337	100	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	2469.00	114.76			83.58	2.80	28.38	0.00	193	125	Peak	HORIZONTAL
2 a	2469.20	104.74			73.56	2.80	28.38	0.00	193	125	Average	HORIZONTAL
3 !	2483.50	53.66	54.00	-0.34	22.47	2.81	28.38	0.00	193	125	Average	HORIZONTAL
4 !	2484.70	69.45	74.00	-4.55	38.26	2.81	28.38	0.00	193	125	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## &lt;For Ant. B – PCB Antenna&gt;:

<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11n MCS0 20MHz Ch 1, 6, 11 / Mode 4 with Ant. B
<b>Test Date</b>	Oct. 13, 2009		

## Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2389.20	71.10	74.00	-2.90	40.17	2.76	0.00	28.17	164	130	Peak	VERTICAL
2 !	2390.00	53.71	54.00	-0.29	22.78	2.76	0.00	28.17	164	130	Average	VERTICAL
3 a	2409.60	104.44			73.46	2.77	0.00	28.21	164	130	Average	VERTICAL
4 p	2414.40	114.99			84.01	2.77	0.00	28.21	164	130	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz

## Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2390.00	51.71	54.00	-2.29	20.78	2.76	0.00	28.17	196	125	Average	VERTICAL
2	2390.00	62.78	74.00	-11.22	31.85	2.76	0.00	28.17	196	125	Peak	VERTICAL
3 a	2431.90	105.96			74.93	2.78	0.00	28.25	196	125	Average	VERTICAL
4 p	2440.50	117.00			85.93	2.78	0.00	28.29	196	125	Peak	VERTICAL
5 !	2483.50	53.60	54.00	-0.40	22.42	2.81	0.00	28.37	196	125	Average	VERTICAL
6	2484.50	66.33	74.00	-7.67	35.15	2.81	0.00	28.37	196	125	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

## Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	2466.00	114.85			83.72	2.80	0.00	28.33	197	128	Peak	VERTICAL
2 a	2466.60	103.96			72.83	2.80	0.00	28.33	197	128	Average	VERTICAL
3 !	2483.50	53.54	54.00	-0.46	22.36	2.81	0.00	28.37	197	128	Average	VERTICAL
4 !	2483.90	71.45	74.00	-2.55	40.27	2.81	0.00	28.37	197	128	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11n MCS0 40MHz Ch 3, 6, 9 / Mode 4 with Ant. B
<b>Test Date</b>	Oct. 13, 2009		

**Channel 3**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2390.00	53.69	54.00	-0.31	22.76	2.76	0.00	28.17	195	130	Average	VERTICAL
2 !	2390.00	71.11	74.00	-2.89	40.18	2.76	0.00	28.17	195	130	Peak	VERTICAL
3 p	2431.40	109.03			78.00	2.78	0.00	28.25	195	130	Peak	VERTICAL
4 a	2433.20	98.43			67.40	2.78	0.00	28.25	195	130	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

**Channel 6**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2389.60	69.23	74.00	-4.77	38.30	2.76	0.00	28.17	184	132	Peak	VERTICAL
2 !	2390.00	53.97	54.00	-0.03	23.04	2.76	0.00	28.17	184	132	Average	VERTICAL
3 p	2446.40	114.04			82.97	2.78	0.00	28.29	184	132	Peak	VERTICAL
4 a	2452.20	103.30			72.19	2.78	0.00	28.33	184	132	Average	VERTICAL
5 !	2483.50	53.40	54.00	-0.60	22.22	2.81	0.00	28.37	184	132	Average	VERTICAL
6	2485.10	66.31	74.00	-7.69	35.09	2.81	0.00	28.41	184	132	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 9**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	2447.80	108.54			77.47	2.78	0.00	28.29	196	126	Peak	VERTICAL
2 a	2465.60	97.42			66.29	2.80	0.00	28.33	196	126	Average	VERTICAL
3 !	2483.50	53.54	54.00	-0.46	22.36	2.81	0.00	28.37	196	126	Average	VERTICAL
4 !	2483.50	72.90	74.00	-1.10	41.72	2.81	0.00	28.37	196	126	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

**Note:**

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11b CH 1, 6, 11 / Mode 4 with Ant. B
<b>Test Date</b>	Oct. 13, 2009		

**Channel 1**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2390.00	51.96	54.00	-2.04	21.03	2.76	0.00	28.17	164	129	Average	VERTICAL
2 !	2390.00	68.06	74.00	-5.94	37.13	2.76	0.00	28.17	164	129	Peak	VERTICAL
3 p	2411.20	118.78			87.80	2.77	0.00	28.21	164	129	Peak	VERTICAL
4 a	2411.40	114.59			83.61	2.77	0.00	28.21	164	129	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2389.80	65.79	74.00	-8.21	34.86	2.76	0.00	28.17	163	125	Peak	VERTICAL
2 !	2390.00	53.96	54.00	-0.04	23.03	2.76	0.00	28.17	163	125	Average	VERTICAL
3 a	2434.40	114.98			83.91	2.78	0.00	28.29	163	125	Average	VERTICAL
4 p	2436.20	118.70			87.63	2.78	0.00	28.29	163	125	Peak	VERTICAL
5 !	2483.50	53.90	54.00	-0.10	22.72	2.81	0.00	28.37	163	125	Average	VERTICAL
6	2483.50	64.64	74.00	-9.36	33.46	2.81	0.00	28.37	163	125	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

**Channel 11**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	2463.60	118.92			87.79	2.80	0.00	28.33	170	125	Peak	VERTICAL
2 a	2464.80	115.45			84.32	2.80	0.00	28.33	170	125	Average	VERTICAL
3 !	2483.48	51.79	54.00	-2.21	20.61	2.81	0.00	28.37	170	125	Average	VERTICAL
4	2485.70	62.25	74.00	-11.75	31.03	2.81	0.00	28.41	170	125	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	23°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Alan Huang	<b>Configurations</b>	IEEE 802.11g CH 1, 6, 11 / Mode 4 with Ant. B
<b>Test Date</b>	Oct. 13, 2009		

**Channel 1**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2390.00	53.26	54.00	-0.74	22.33	2.76	0.00	28.17	170	128	Average	VERTICAL
2 !	2390.00	71.09	74.00	-2.91	40.16	2.76	0.00	28.17	170	128	Peak	VERTICAL
3 p	2407.00	116.83			85.85	2.77	0.00	28.21	170	128	Peak	VERTICAL
4 a	2410.80	106.19			75.21	2.77	0.00	28.21	170	128	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2389.80	64.31	74.00	-9.69	33.38	2.76	0.00	28.17	198	127	Peak	VERTICAL
2 !	2390.00	51.72	54.00	-2.28	20.79	2.76	0.00	28.17	198	127	Average	VERTICAL
3 p	2442.40	117.46			86.39	2.78	0.00	28.29	198	127	Peak	VERTICAL
4 a	2443.90	106.73			75.66	2.78	0.00	28.29	198	127	Average	VERTICAL
5 !	2483.50	53.76	54.00	-0.24	22.58	2.81	0.00	28.37	198	127	Average	VERTICAL
6	2483.70	66.18	74.00	-7.82	35.00	2.81	0.00	28.37	198	127	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2467.60	104.86			73.73	2.80	0.00	28.33	196	127	Average	VERTICAL
2 p	2468.70	115.93			84.76	2.80	0.00	28.37	196	127	Peak	VERTICAL
3 !	2483.50	53.24	54.00	-0.76	22.06	2.81	0.00	28.37	196	127	Average	VERTICAL
4 !	2483.50	71.37	74.00	-2.63	40.19	2.81	0.00	28.37	196	127	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

**Note:**


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band


<For Ant. A – Dipole Antenna>:

Low Band Edge Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 2412 MHz

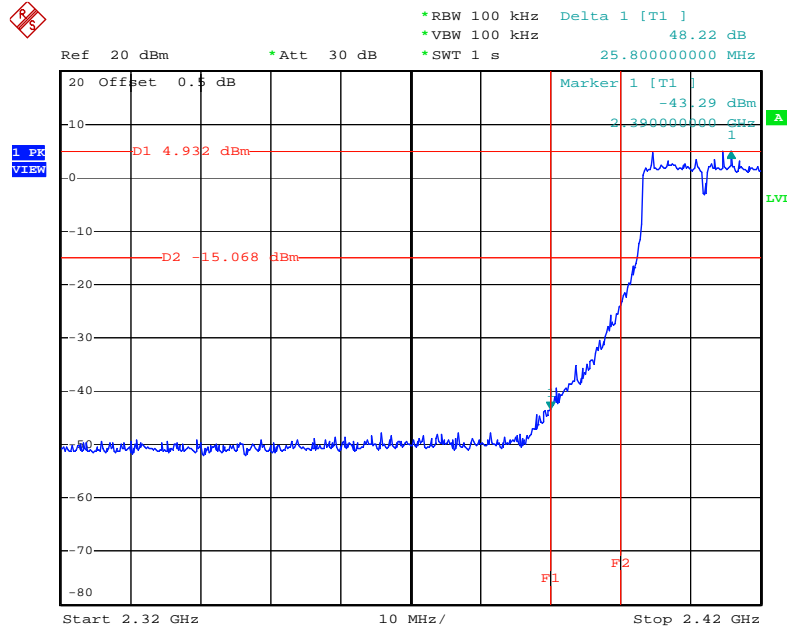


Date: 15.OCT.2009 22:42:25

High Band Edge Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. A / 2462 MHz

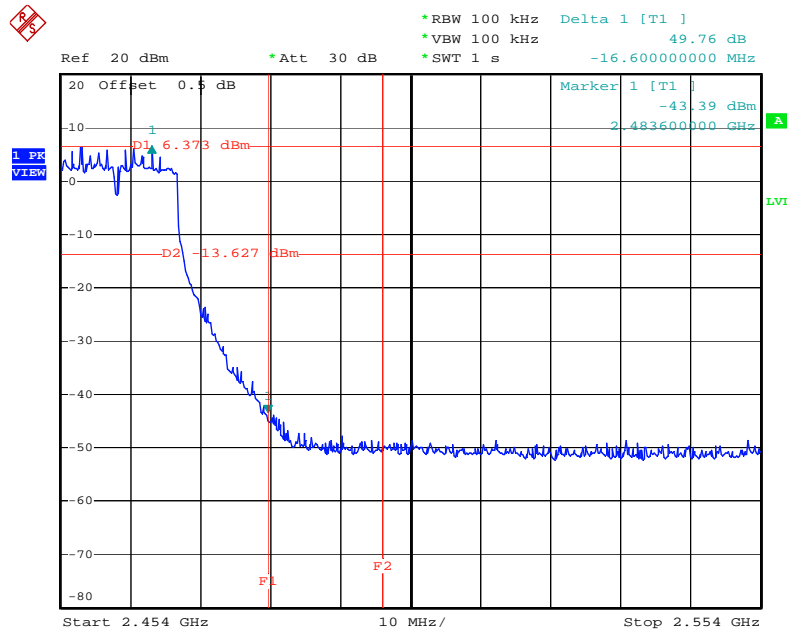


Date: 19.OCT.2009 23:23:20

Low Band Edge Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 2422 MHz

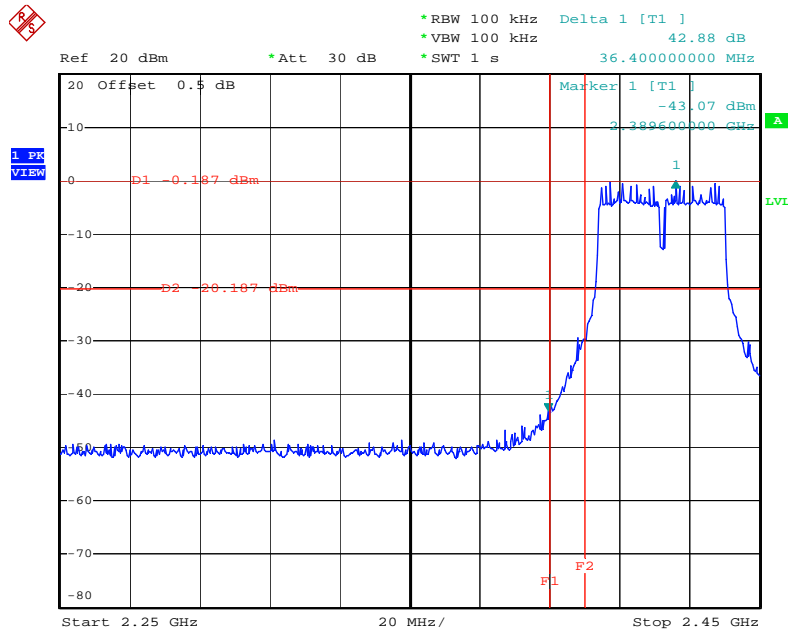


Date: 19.OCT.2009 23:01:34

High Band Edge Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. A / 2452 MHz

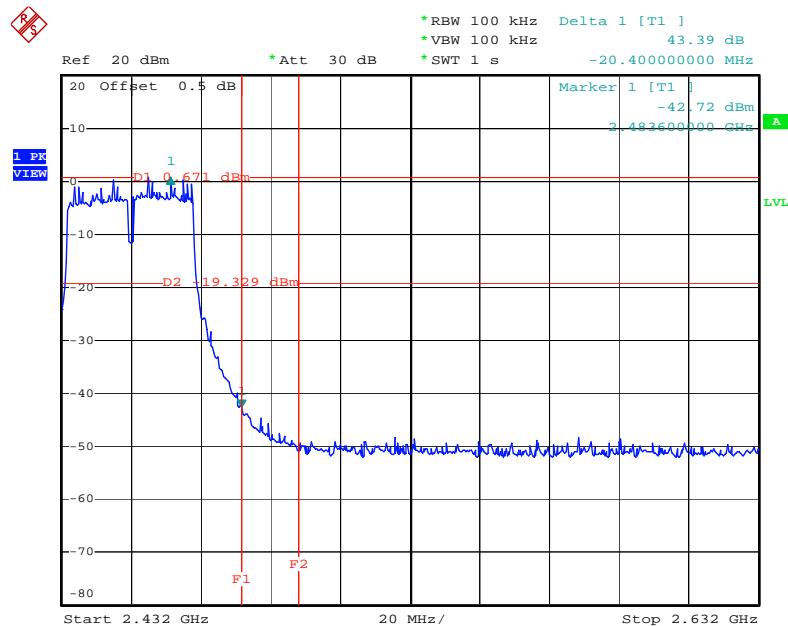


Date: 19.OCT.2009 22:58:26

### Low Band Edge Plot on Configuration IEEE 802.11b Ant. A / 2412 MHz

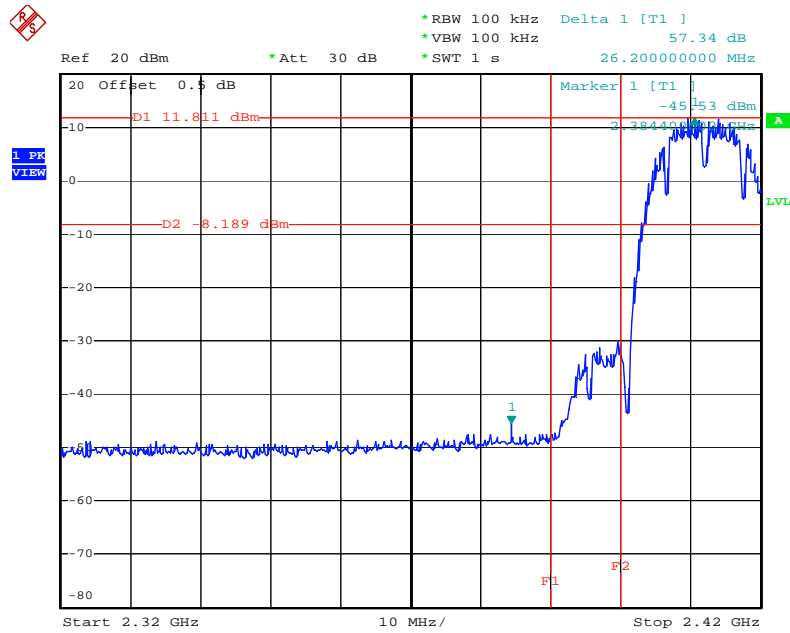

Date: 15.OCT.2009 23:01:51


### High Band Edge Plot on Configuration IEEE 802.11b Ant. A / 2462 MHz

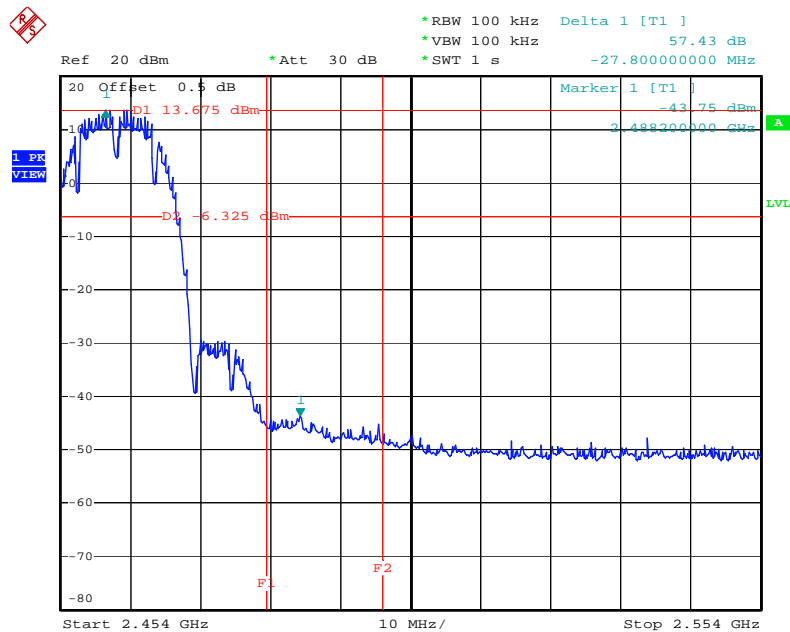

Date: 15.OCT.2009 23:07:49




### Low Band Edge Plot on Configuration IEEE 802.11g Ant. A / 2412 MHz

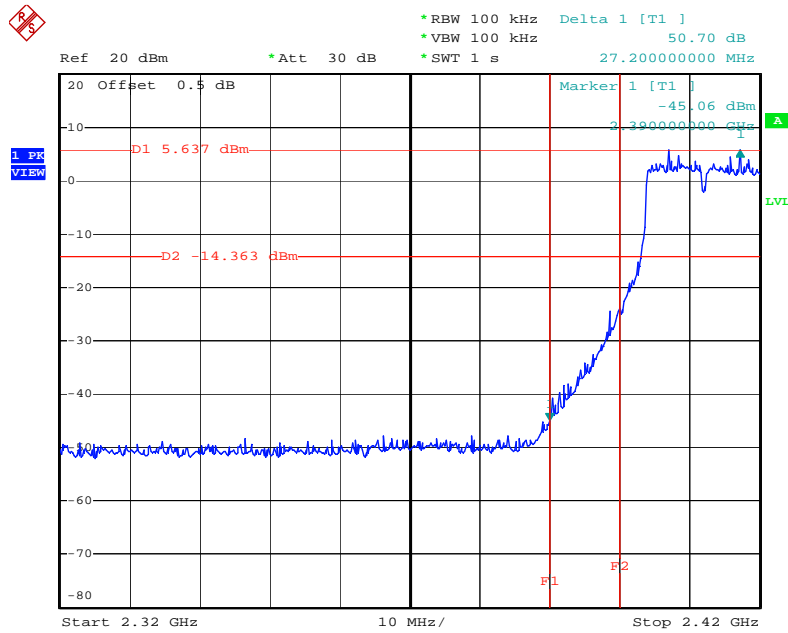

Date: 15.OCT.2009 22:57:26

### High Band Edge Plot on Configuration IEEE 802.11g Ant. A / 2462 MHz

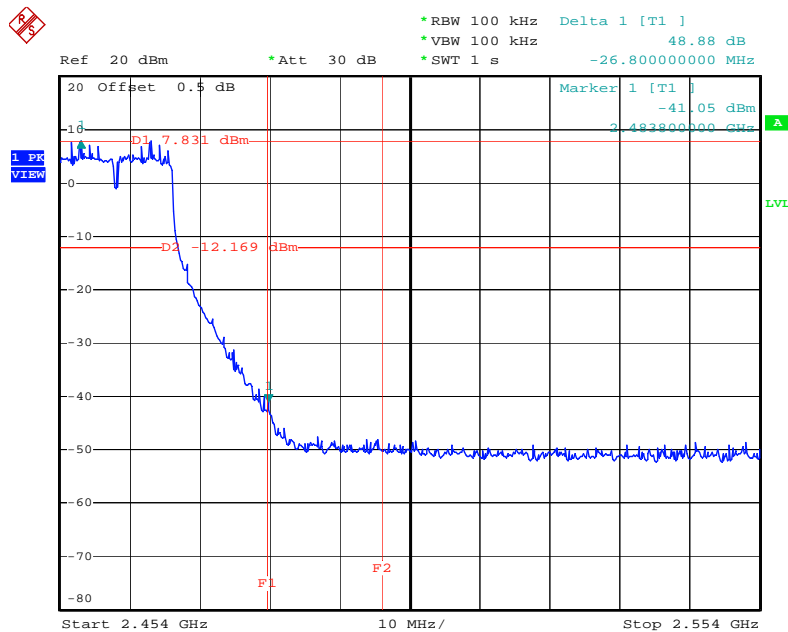


Date: 19.OCT.2009 23:27:10

For Emission not in Restricted Band


<For Ant. B – PCB Antenna>:

Low Band Edge Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 2412 MHz

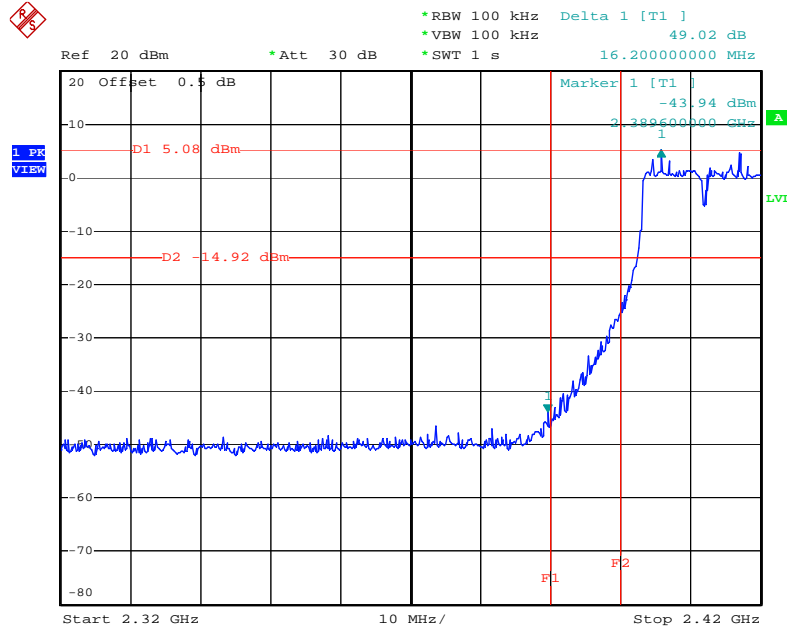


Date: 15.OCT.2009 22:01:44

High Band Edge Plot on Configuration IEEE 802.11n MCS0 20MHz Ant. B / 2462 MHz

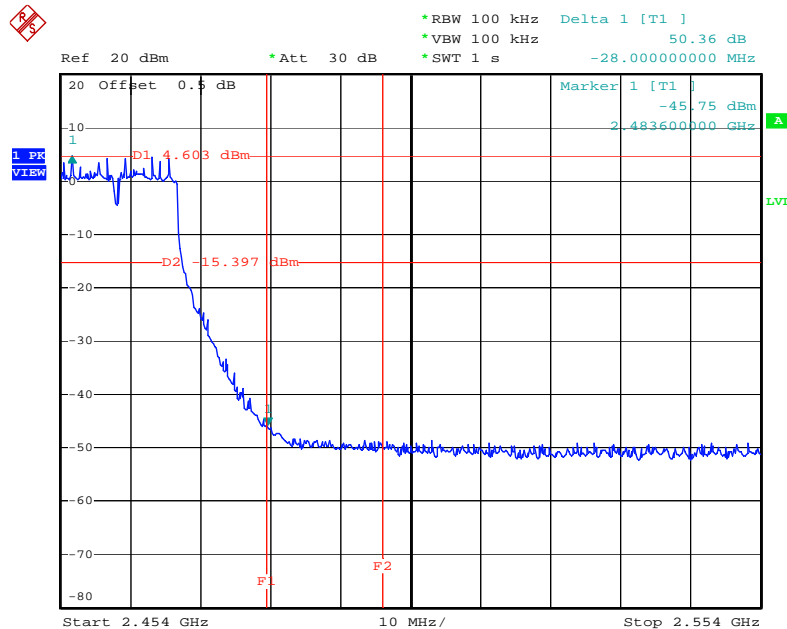


Date: 15.OCT.2009 21:57:18

### Low Band Edge Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. B / 2422 MHz

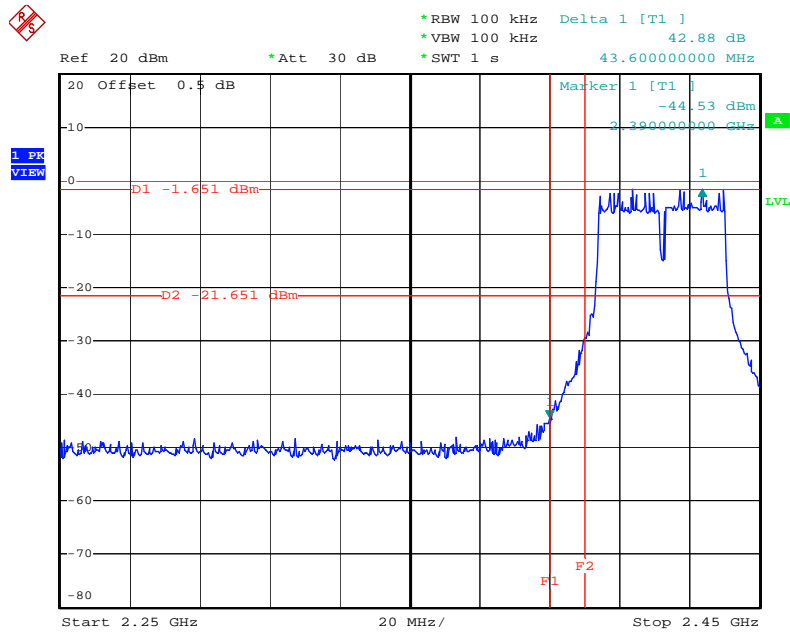


Date: 15.OCT.2009 22:16:28

### High Band Edge Plot on Configuration IEEE 802.11n MCS0 40MHz Ant. B / 2452 MHz

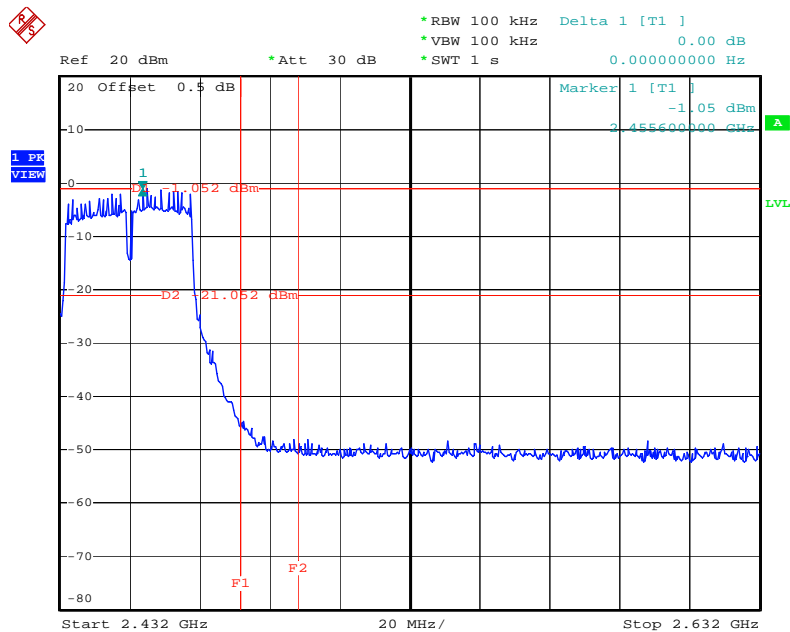


Date: 15.OCT.2009 22:14:15

### Low Band Edge Plot on Configuration IEEE 802.11b Ant. B / 2412 MHz

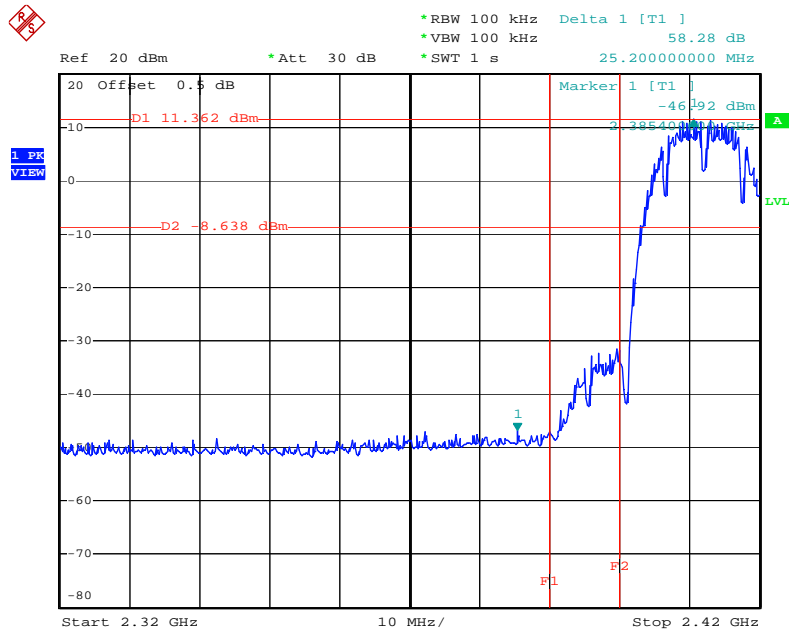


Date: 15.OCT.2009 22:05:30

### High Band Edge Plot on Configuration IEEE 802.11b Ant. B / 2462 MHz

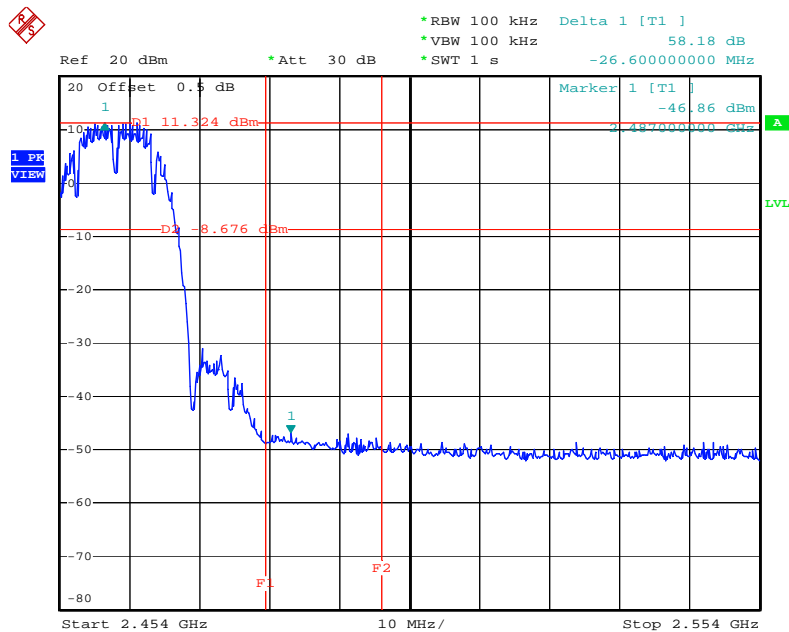


Date: 15.OCT.2009 22:10:22

### Low Band Edge Plot on Configuration IEEE 802.11g Ant. B / 2412 MHz

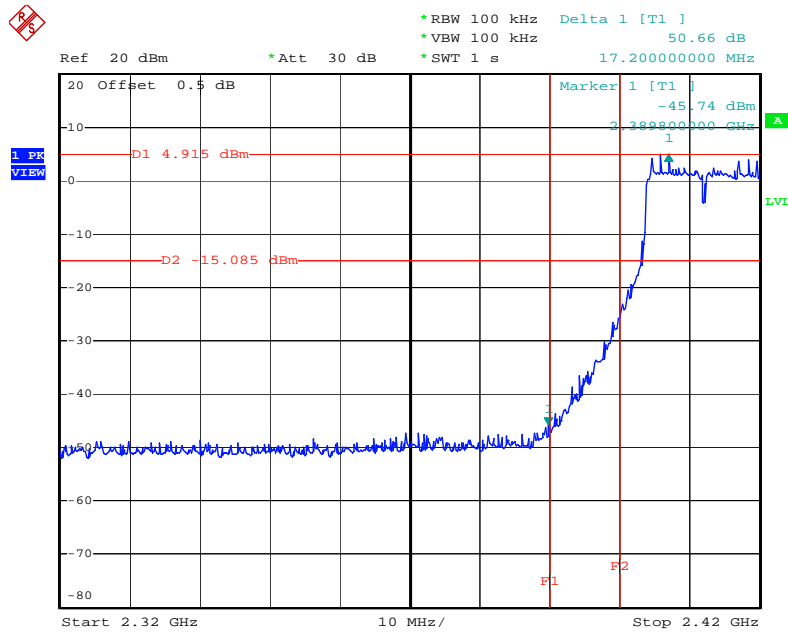

Date: 15.OCT.2009 21:49:38

### High Band Edge Plot on Configuration IEEE 802.11g Ant. B / 2462 MHz

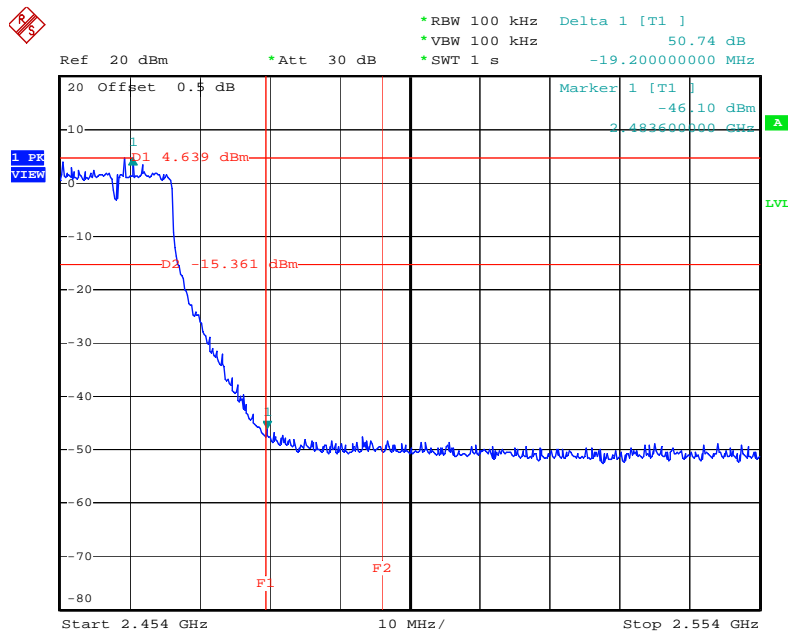

Date: 15.OCT.2009 21:54:02

## 4.7. Antenna Requirements

### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 15, 2009	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 23, 2009	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2009	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2009	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Jun. 11, 2009	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 07, 2009	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 23, 2009	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jul. 21, 2009	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Apr. 06, 2009*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100305	9 kHz - 40 GHz	Feb. 03, 2009	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2008*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Sep. 26, 2009	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 28, 2009	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan.16, 2009	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 05, 2009	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Jan. 05, 2009	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 28, 2008	Conducted (TH01-HY)
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2009	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 31, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 30GHz	Aug. 05, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 31, 2009	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 12, 2009*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2009	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 06, 2009	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2008	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2008	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Feb. 13, 2009	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 25, 2009	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

\* Calibration Interval of instruments listed above is two year.

NCR means Non-Calibration required.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085



## 7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-070110

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sporton International Inc.**

**EMC & Wireless Communications Laboratory**

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory



Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : January 10, 2007

P1, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.