

MIPRO®

MTS-100T Digital Wireless Transmitter

MTS-100 Digital Wireless Transmitter Module

User Guide



MIPRO MIPRO Electronics Co., Ltd.

Headquarters: 814 Pei-Kang Road, Chiayi, 60096, Taiwan.

Web: www.mipro.com.tw

E-mail: mipro@mipro.com.tw


FC CE



AS110426


Design and specifications are subject to change without prior notice

! IMPORTANT SAFETY INSTRUCTIONS !

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with a dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarised or ground plug: A polarised plug has two blades with one wider than the other. The wide blade is provided for your safety. When the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plug, convenience receptacles, and the point where they exit from the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12. Use only with a cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over. 
13. Unplug this apparatus during lightning storms or when unused for long periods of time.
14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
15. To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.
16. Apparatus should not be exposed to dripping or splashing and no objects filled with liquids, should be placed on the apparatus.
17. Use only with the battery which specified by manufacturer.
18. The power supply cord set is to be the main disconnected device.

WARNING

1. **FOR OUTDOOR USE:**
To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.
2. **UNDER WET LOCATION:**
Apparatus should not be exposed to dripping or splashing and no objects filled with liquids, such as vases should be placed on the apparatus.
3. **SERVICE INSTRUCTIONS:**
CAUTION - These servicing instructions are for use by qualified service personnel only. To reduce the risk of electric shock, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so.

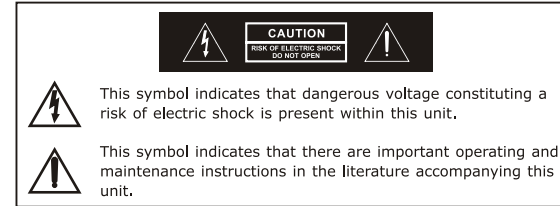

Disposal Dispose of any unusable devices or batteries responsibly and in accordance with any applicable regulations.



Disposing of used batteries with domestic waste is to be avoided!

Batteries / NiCad cells often contain heavy metals such as cadmium(Cd), mercury(Hg) and lead(Pb) that makes them unsuitable for disposal with domestic waste. You may return spent batteries/ accumulators free of charge to recycling centres or anywhere else batteries/accumulators are sold.

By doing so, you contribute to the conservation of our environment!

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. (Example - use only shielded interface cables when connecting to computer or peripheral devices).

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions

- (1) This device may not cause harmful interference and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

IC

This device complies with Industry Canada licence-exempt RSS-210 standard.

Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Contents



- 1 Key Features & Benefits
- 2 Controls and Indicators - Front Panel
- 3 Controls and Indicators - Rear Panel
- 4 Controls and Indicators
- 5 Transmitter Frequency Set-Up
- 6 Operating Tips
- 7 Insert and Remove the Module
- 8 Proper RF Output Level and Output Connector Settings
- 9 Proper AF (audio) Input and Connection
- 10 Optimal AF Input Volume Setting

Digital Wireless Transmitter

Key Features & Benefits

1. Modularized design for easy set-up, operation and maintenance.
2. Preset with 16 selectable channels.
3. Bright LED channel display.
4. Direct output for low level or switch to wideband amplifier for high level output.
5. Selectable input audio signal level for optimal modulation index.
6. Audio input and RF output LED indicators.


System Accessories Included:



Digital Wireless Transmitter

Controls and Indicators

Front Panel:

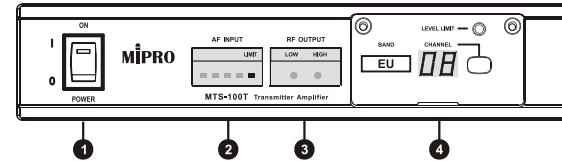


- ❶ **Power Switch & Indicator:** Red indicator is illuminated after power is turned on.
- ❷ **AF Signal Indicators:** Indicate the input audio signal level.
- ❸ **RF Signal Indicators:** Indicate the output RF signal level.
- ❹ **Transmitter Module (MTS-100):** Plug-in module preset with 16 selectable channels.

Digital Wireless Transmitter

Controls and Indicators


Rear Panel:

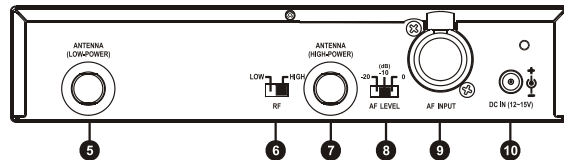

- ⑤ **Low Power RF Output Connector:** Connect directly to a transmitting antenna or extend to external antenna by RF cable.
- ⑥ **RF Output Switch:** High or Low RF level switch.
- ⑦ **High Power RF Output Connector:** Connect directly to a transmitting antenna or extend to external antenna by RF cable.
- ⑧ **AF Level Switch:** 0 dB, -10 dB, -20 dB audio output for optimal modulation index.
- ⑨ **Combo Jack Connector:** Balanced (XLR) or unbalanced (1/4-inch) audio input signals.
- ⑩ **DC Voltage Input Connector:** 12~15V DC voltage, the center pole of the DC connector is positive voltage.

Digital Wireless Transmitter

Controls and Indicators




- ⑪ **LED screen:** Displays current numeric channel.
- ⑫ **Channel button.**
- ⑬ **Volume Limiter Indicator.**
- ⑭ **Frequency Code Sticker:** EU = Europe / US = America.

Transmitter Frequency Set-Up

- Press the Channel button **11** for a clear channel. 16 preset selectable channels.
- Volume Limit Indicator **13** will not be illuminated under normal input signals.
- Volume Limiter Indicator **13** will be illuminated if over normal input signals. Reduce volume to desired level.


Operating Tips

- The transmitter functions when the module and antenna are inserted properly and powered on. Ascertain the frequency code sticker is the same between the transmitter and receiver.
- Select another frequency if the existing operating frequency experiences interference.
- MTS-100T wireless transmitter can be installed as a stationary transmitter to be used concurrently with multiple MTG-100R portable receivers as a wireless tour guide/simultaneous language interpretation system.

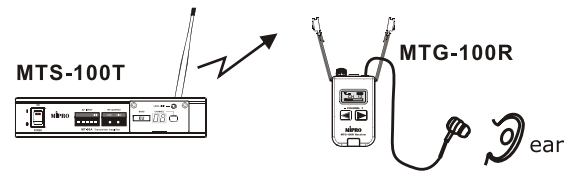



Insert and Remove the Module

- Remove the front cover plate.
- Insert MTS-100 module gently into slot horizontally.
- Fasten the panel with the attached two screws.
- To remove, reverse the above steps.

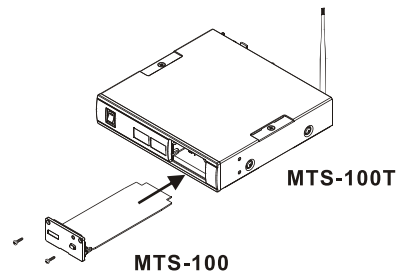


Proper RF Output Level and Output Connector Settings

- High or Low RF level switch is located at the rear panel. Front panel will display current High or Low RF output power setting.
- RF power will output from LOW-POWER ⑤ TNC connector when "LOW" setting is selected. RF power will output from HIGH-POWER ⑦ TNC connector when "HIGH" setting is selected.
- Therefore, it is important to observe the correct antenna connection or extension RF cable with the RF Output Switch selection.

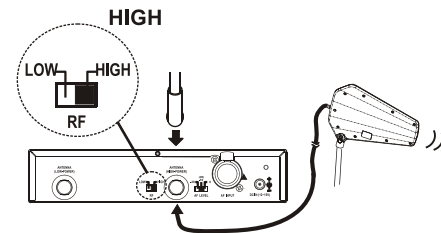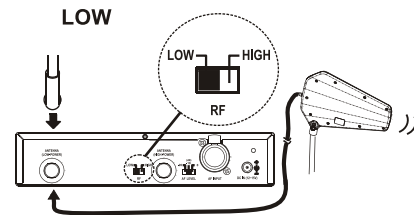


Proper AF (audio) Input and Connection

- Combo jack connector accepts balanced (XLR) or 1/4-inch/6.3mm unbalanced cable.
- Proper input volume adjustment is needed after AF signal is connected.
- Three selectable AF levels can be selected from AF Level Switch ⑧ for optimal audio sensitivity. Exceeding input volume will result in distortion for receiver AF output, and insufficient input volume will degrade the S/N ratio that increases higher background noise. RF, proper setting ensures optimal output audio quality.

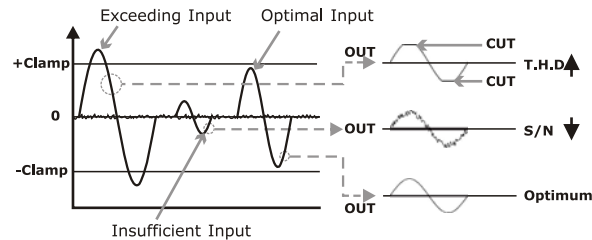


Optimal AF Input Volume Setting

- The AF Signal Indicators ② indicates the input audio signal level.
- Normal volume: 2~3 LEDs are illuminated.
- High volume: 4 LEDs are illuminated.
- Peak volume: Red Limit indicator will be illuminated to denote warning.



- When 4~5 LEDs are illuminated constantly it denotes exceeding input volume and input attenuation is required. Switch the input volume switch ⑧ to -10dB or -20dB for modification.

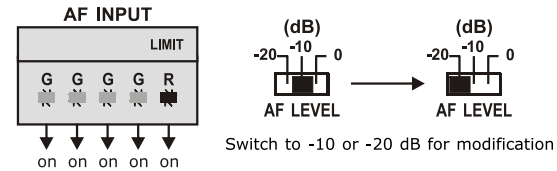

- When 1~2 LEDs are illuminated constantly it denotes insufficient input volume and less input attenuation is required. Switch the input volume switch ⑧ to -10dB or 0dB for modification.

