

FCC Test Report (Bluetooth)

Report No.: RFBGQZ-WTW-P21031057

FCC ID: M72-EDGE450

Test Model: POLY EDGE E450

Received Date: Mar. 30, 2021

Test Date: Apr. 08 ~ Apr. 15, 2022

Issued Date: May 17, 2022

Applicant: Polycom Inc.

Address: 6001 America Center Drive, San Jose, California 95002, United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty.....	7
2.2 Modification Record.....	7
3 General Information	8
3.1 General Description of EUT.....	8
3.2 Description of Test Modes.....	10
3.2.1 Test Mode Applicability and Tested Channel Detail.....	11
3.3 Duty Cycle of Test Signal.....	12
3.4 Description of Support Units.....	13
3.4.1 Configuration of System under Test.....	13
3.5 General Description of Applied Standards and References.....	13
4 Test Types and Results	15
4.1 Radiated Emission and Bandedge Measurement.....	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	15
4.1.2 Test Instruments.....	16
4.1.3 Test Procedures.....	17
4.1.4 Deviation from Test Standard.....	17
4.1.5 Test Set Up.....	18
4.1.6 EUT Operating Conditions.....	19
4.1.7 Test Results.....	20
4.2 Conducted Emission Measurement.....	30
4.2.1 Limits of Conducted Emission Measurement.....	30
4.2.2 Test Instruments.....	30
4.2.3 Test Procedures.....	31
4.2.4 Deviation from Test Standard.....	31
4.2.5 Test Setup.....	31
4.2.6 EUT Operating Condition.....	31
4.2.7 Test Results.....	32
4.3 Number of Hopping Frequency Used.....	36
4.3.1 Limits of Hopping Frequency Used Measurement.....	36
4.3.2 Test Setup.....	36
4.3.3 Test Instruments.....	36
4.3.4 Test Procedure.....	36
4.3.5 Deviation from Test Standard.....	36
4.3.6 Test Results.....	37
4.4 Dwell Time on Each Channel.....	38
4.4.1 Limits of Dwell Time on Each Channel Measurement.....	38
4.4.2 Test Setup.....	38
4.4.3 Test Instruments.....	38
4.4.4 Test Procedures.....	38
4.4.5 Deviation from Test Standard.....	38
4.4.6 Test Results.....	39
4.5 Channel Bandwidth.....	41
4.5.1 Limits of Channel Bandwidth Measurement.....	41
4.5.2 Test Setup.....	41
4.5.3 Test Instruments.....	41
4.5.4 Test Procedure.....	41
4.5.5 Deviation from Test Standard.....	41
4.5.6 EUT Operating Condition.....	41
4.5.7 Test Results.....	42
4.6 Occupied Bandwidth Measurement.....	43

4.6.1	Test Setup.....	43
4.6.2	Test Instruments	43
4.6.3	Test Procedure	43
4.6.4	Deviation from Test Standard	43
4.6.5	EUT Operating Conditions.....	43
4.6.6	Test Results	44
4.7	Hopping Channel Separation.....	45
4.7.1	Limits of Hopping Channel Separation Measurement.....	45
4.7.2	Test Setup.....	45
4.7.3	Test Instruments	45
4.7.4	Test Procedure	45
4.7.5	Deviation from Test Standard	45
4.7.6	Test Results	46
4.8	Maximum Output Power	47
4.8.1	Limits of Maximum Output Power Measurement	47
4.8.2	Test Setup.....	47
4.8.3	Test Instruments	47
4.8.4	Test Procedure	47
4.8.5	Deviation from Test Standard	47
4.8.6	EUT Operating Condition	47
4.8.7	Test Results	48
4.9	Conducted Out of Band Emission Measurement	49
4.9.1	Limits Of Conducted Out of Band Emission Measurement.....	49
4.9.2	Test Instruments	49
4.9.3	Test Procedure	49
4.9.4	Deviation from Test Standard	49
4.9.5	EUT Operating Condition	49
4.9.6	Test Results	49
5	Pictures of Test Arrangements	52
	Annex A- Band Edge Measurement.....	53
	Appendix – Information of the Testing Laboratories	54

Release Control Record

Issue No.	Description	Date Issued
RFBGQZ-WTW-P21031057	Original Release	May 17, 2022

1 Certificate of Conformity

Product: IP Phone

Brand: POLY

Test Model: POLY EDGE E450

Sample Status: Engineering Sample

Applicant: Polycom Inc.

Test Date: Apr. 08 ~ Apr. 15, 2022

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Gina Liu, **Date:** May 17, 2022
Gina Liu / Specialist

Approved by : Jeremy Lin, **Date:** May 17, 2022
Jeremy Lin / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -13.33 dB at 0.15400 MHz.
15.247(a)(1)(iii)	Number of Hopping Frequency Used	Pass	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel	Pass	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	Pass	Meet the requirement of limit.
15.247(a)(1)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.205 & 209	Radiated Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -5.2 dB at 448.07 MHz.
15.247(d)	Band Edge Measurement	Pass	Meet the requirement of limit.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note:

1. If the Frequency Hopping System operating in 2400-2483.5 MHz band and the output power less than 125 mW. The hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of hopping channel whichever is greater.
2. For 2.4G band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
3. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.79 dB
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.00 dB
	30 MHz ~ 200 MHz	3.59 dB
	200 MHz ~ 1000 MHz	3.60 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.29 dB
	18 GHz ~ 40 GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	IP Phone
Brand	POLY
Test Model	POLY EDGE E450
FW Version (FVIN)	MFG 1.0.16
Status of EUT	Engineering Sample
Power Supply Rating	5Vdc from adapter 48Vdc for PoE
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technology	FHSS
Transfer Rate	1/2/3 Mbps
Operating Frequency	2402 ~ 2480 MHz
Number of Channel	79
Output Power	5.117 mW
Antenna Type	Refer to Note
Antenna Connector	NA
Accessory Device	Refer to Note
Data Cable Supplied	Refer to Note

Note:

- The EUT contains following accessory devices.

Adapter	
Brand	Mass Power
Model	S018-1A050300VU
Input Power	100-240Vac 50/60Hz, 0.6A
Output Power	5Vdc, 3A
DC Output Cable	1.5m non-shielded cable without core

PoE (Support unit)	
Brand	CERIO
Model	POE-S48G2

Adapter for PoE (Support unit)	
Brand	L.T.E
Model	LTE36ES-S5-1
Input Power	100-240Vac, 50/60Hz, 0.75A
Output Power	48Vdc, 0.75A
DC Output Cable	1.8m non-shielded cable without core

Coil Cable	
Brand	EXCELTEK
Model	PE00003
Signal Line	570mm

LAN Cable	
Brand	EXCELTEK
Model	PO02008
Signal Line	1.524m

2. Power Setting as below.

	GFSK	8DPSK
CH 0	Default	Default
CH 39	Default	Default
CH 78	Default	Default

* This FW version is used for testing purpose

3. The antenna information is listed as below.

Antenna Type	PCB		
Antenna Connector	NA		
Frequency (MHz)	2400	2450	2480
Gain (dBi)	2.66	2.73	2.60

4. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
5. The EUT is not capable of simultaneous transmission.

3.2 Description of Test Modes

79 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE \geq 1G	RE<1G	PLC	APCM	
A	√	√	√	√	Powered by adapter
B	-	√	√	-	Powered by POE

Where **RE \geq 1G**: Radiated Emission above 1 GHz **RE<1G**: Radiated Emission below 1 GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

Note:

1. For Radiated emission test, pre-tested GFSK, $\pi/4$ -DQPSK, 8DPSK modulation type and found GFSK was the worse, therefore chosen for the final test and presented in the test report.
2. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
3. Radiated emission test (below 1GHz) and power line conducted emission test items chosen the worst maximum power.

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
A	0 to 78	0, 39, 78	FHSS	GFSK	DH5
	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
A, B	0 to 78	39	FHSS	GFSK	DH5

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
A, B	0 to 78	39	FHSS	GFSK	DH5

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.


EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
A	0 to 78	0, 39, 78	FHSS	GFSK	DH5
	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested by
RE≥1G	21 deg. C, 70 % RH	120Vac, 60Hz	Greg Lin
RE<1G	20 deg. C, 66 % RH	120Vac, 60Hz 48Vdc	Rex Wang
PLC	22 deg. C, 73 % RH	120Vac, 60Hz 48Vdc	Greg Lin
APCM	25 deg. C, 65 % RH	120Vac, 60Hz	Chun Wu

3.3 Duty Cycle of Test Signal

Duty cycle = 2.89/100 = 0.0289, duty cycle correction factor = 20 * log(0.0289) = -30.8

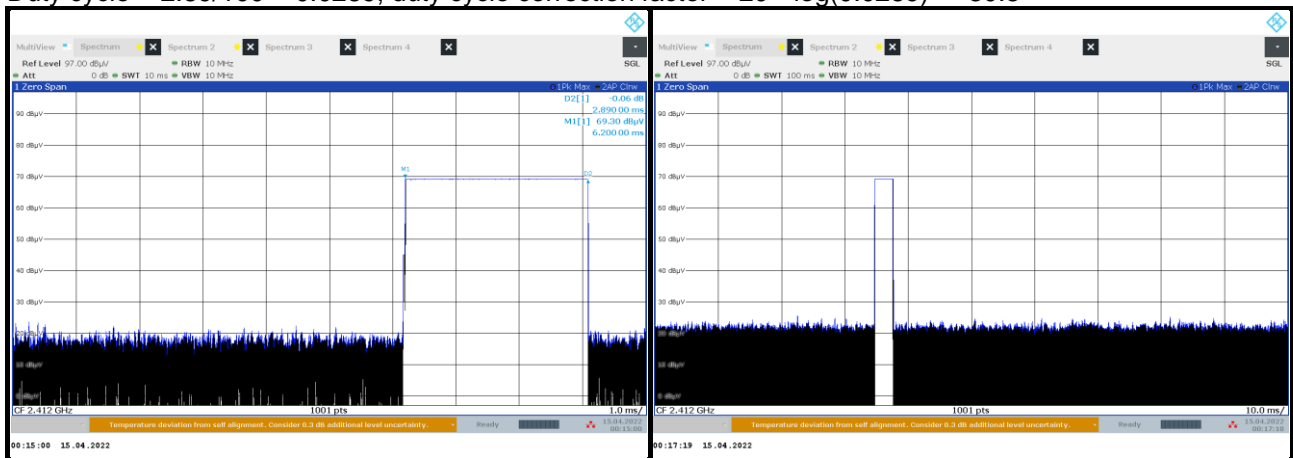

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Load	NA	NA	NA	NA	-
B.	USB Flash	SanDisk	SDDDC3-032G	NA	NA	-
C.	POE	CERIO	POE-S48G2	NA	NA	Provided by client
D.	Adapter	L.T.E	LTE36ES-S5-1	NA	NA	Provided by client
E.	Notebook	HP	11-u018TU	8CG70505V9	NA	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item E acted as communication partner to transfer data.


ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	LAN	1	1.524	N	0	RJ45, Cat5e Accessory of EUT
2.	LAN	1	1.5	N	0	RJ45, Cat5e
3.	RJ9	1	1	N	0	-
4.	LAN	1	1.5	N	0	RJ45, Cat5e
5.	LAN	1	10	N	0	RJ45, Cat5e

3.4.1 Configuration of System under Test

Test Mode A



Test Mode B

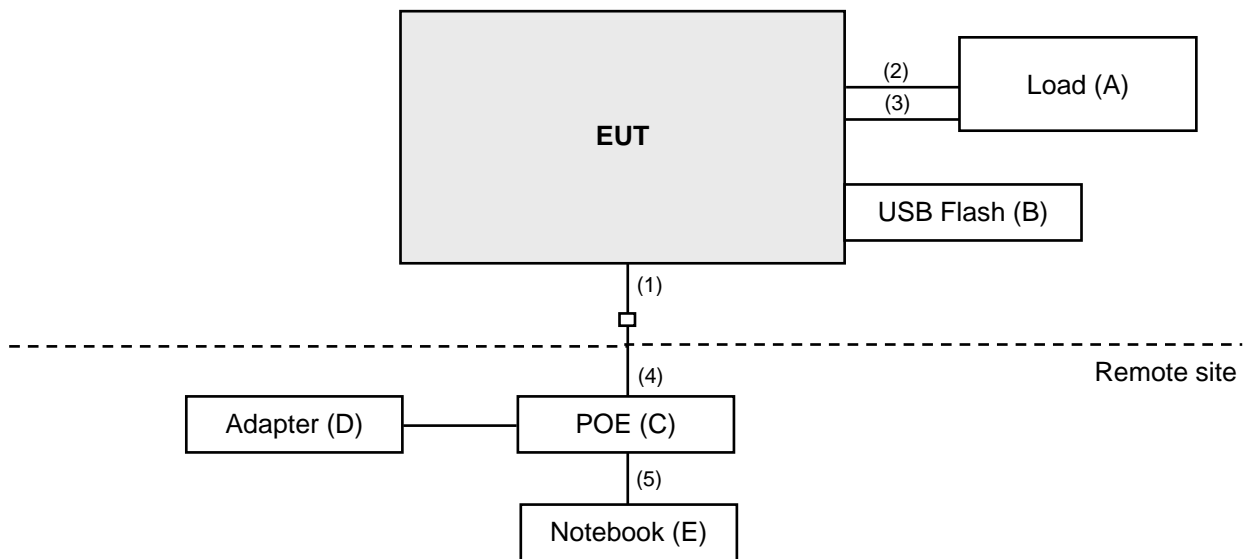

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

- a. The lower limit shall apply at the transition frequencies.
- b. Emission level (dBuV/m) = 20 log Emission level (uV/m).
- c. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Preamplifier Agilent	8447D	2944A10638	2021/6/5	2022/6/4
Bi_Log Antenna Schwarzbeck	VULB9168	9168-160	2021/10/28	2022/10/27
RF Coaxial Cable WOKEN	8D-FB	Cable-CH9-01	2021/6/5	2022/6/4
Horn Antenna Schwarzbeck	9120D	9120D-1169	2021/11/14	2022/11/13
Preamplifier Agilent	8449B	3008A02367	2022/2/16	2023/2/15
RF Coaxial Cable HUBER+SUHNER&EMCI	SUCOFLEX 104& EMC104-SM-SM80 00	CABLE-CH9-02 (248780+171006)	2022/1/15	2023/1/14
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(2507 95/4)	2022/1/15	2023/1/14
RF FLITER MICRO-TRONICS	BRM50716	060	2022/1/10	2023/1/9
RF FLITER MICRO-TRONICS	BRM17690	004	2022/1/10	2023/1/9
Boresight antenna tower fixture BV	BAF-02	5	NA	NA
Pre-Amplifier EMCI	EMC 184045	980116	2021/10/5	2022/10/4
Horn Antenna Schwarzbeck	BBHA 9170	BBHA9170241	2021/10/26	2022/10/25
RF Coaxial Cable HUBER+SUHNER&EMCI	SUCOFLEX 104& EMC104-SM-SM80 00	CABLE-CH9-02 (248780+171006)	2022/1/15	2023/1/14
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(2507 95/4)	2022/1/15	2023/1/14
Boresight antenna tower fixture BV	BAF-02	5	NA	NA
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Test Receiver Agilent	N9038A	MY51210203	2021/9/22	2022/9/21
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	2021/6/10	2022/6/9

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 9.

4.1.3 Test Procedures

For Radiated Emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

For Radiated Emission above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. For Fundamental frequency and bandedge & harmonic:
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle) where the duty factor is calculated from following formula:
$$20\text{Log}(\text{Duty cycle}) = 20 \log (2.89\text{ms}/100) = -30.8\text{dB}$$
, please refer to the plotted duty (see section 3.3)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up


<Radiated Emission below 30 MHz>

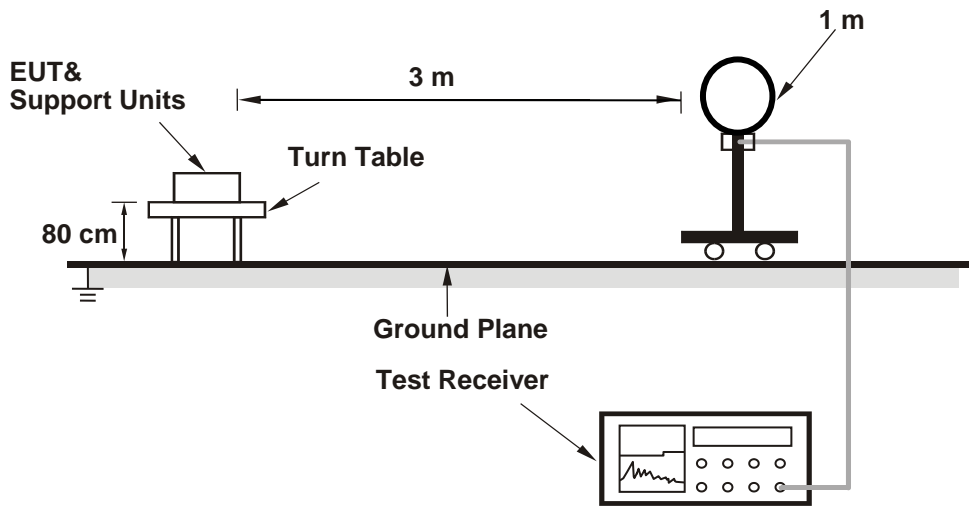

<Radiated Emission 30 MHz to 1 GHz>

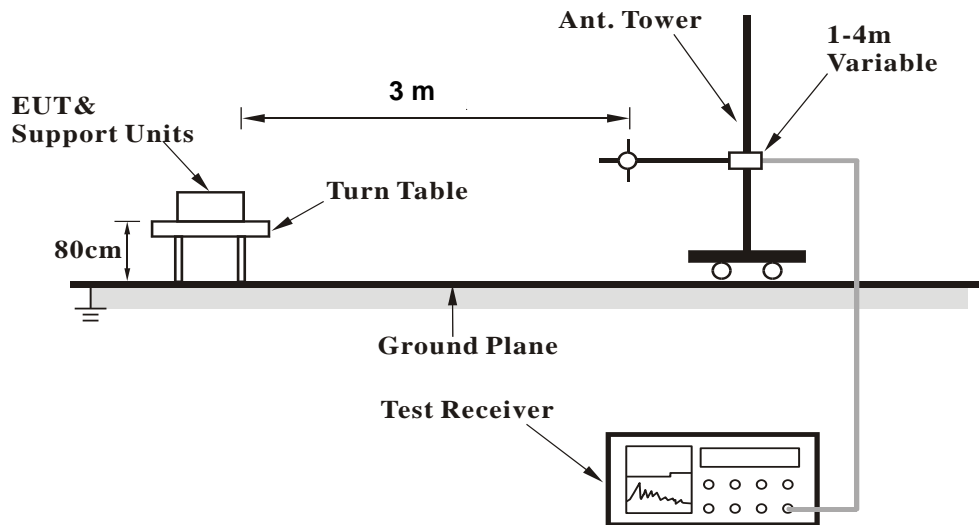

<Radiated Emission above 1 GHz>

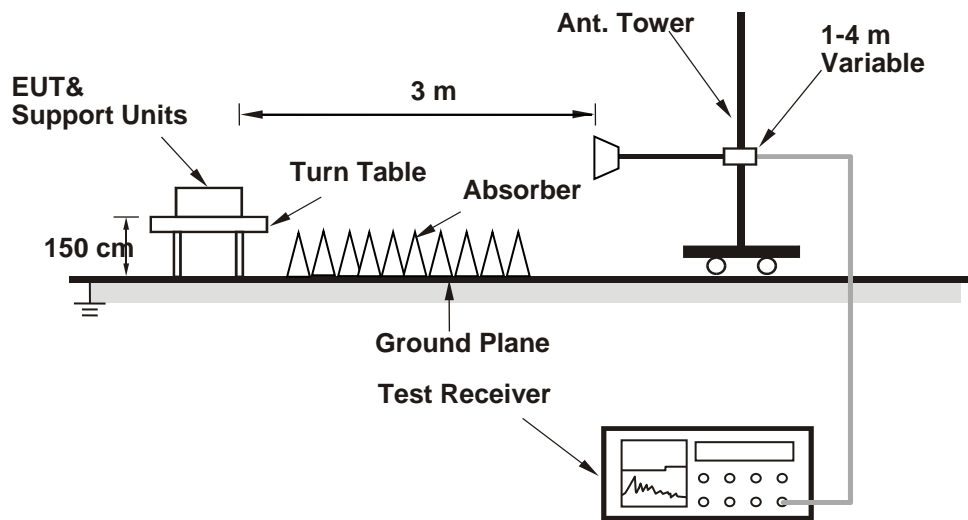

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1 GHz Data:

RF Mode	TX BT_GFSK	Channel	CH 0 : 2402 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	21°C, 70% RH
Tested By	Greg Lin	Test Date	2022/4/15

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.55 H	174	24.1	32.8
2	2390.00	44.7 AV	54.0	-9.3	1.55 H	174	11.9	32.8
3	*2402.00	98.1 PK			1.55 H	174	65.3	32.8
4	*2402.00	67.3 AV			1.55 H	174	34.5	32.8
5	4804.00	50.5 PK	74.0	-23.5	1.79 H	216	44.7	5.8
6	4804.00	19.7 AV	54.0	-34.3	1.79 H	216	13.9	5.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.1 PK	74.0	-16.9	2.17 V	141	24.3	32.8
2	2390.00	45.1 AV	54.0	-8.9	2.17 V	141	12.3	32.8
3	*2402.00	102.1 PK			2.17 V	141	69.3	32.8
4	*2402.00	71.3 AV			2.17 V	141	38.5	32.8
5	4804.00	50.7 PK	74.0	-23.3	2.47 V	169	44.9	5.8
6	4804.00	19.9 AV	54.0	-34.1	2.47 V	169	14.1	5.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. for Fundamental frequency and bandedge & harmonic:
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle) where the duty correction is calculated from following formula:
20Log(Duty cycle) = 20 log (2.89ms*1/100) = -30.8dB please refer to the plotted duty (see section 3.3)

RF Mode	TX BT_GFSK	Channel	CH 39 : 2441 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	21°C, 70% RH
Tested By	Greg Lin	Test Date	2022/4/15

Antenna Polarity & Test Distance : Horizontal at 3 m


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	98.9 PK			1.53 H	173	66.1	32.8
2	*2441.00	68.1 AV			1.53 H	173	35.3	32.8
3	4882.00	50.3 PK	74.0	-23.7	1.74 H	205	44.8	5.5
4	4882.00	19.5 AV	54.0	-34.5	1.74 H	205	14.0	5.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	103.0 PK			2.16 V	137	70.2	32.8
2	*2441.00	72.2 AV			2.16 V	137	39.4	32.8
3	4882.00	50.9 PK	74.0	-23.1	2.38 V	154	45.4	5.5
4	4882.00	20.1 AV	54.0	-33.9	2.38 V	154	14.6	5.5

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * " : Fundamental frequency.
- for Fundamental frequency and bandedge & harmonic:
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle) where the duty correction is calculated from following formula:
 $20\text{Log}(\text{Duty cycle}) = 20 \log (2.89\text{ms} \times 1/100) = -30.8\text{dB}$ please refer to the plotted duty (see section 3.3)

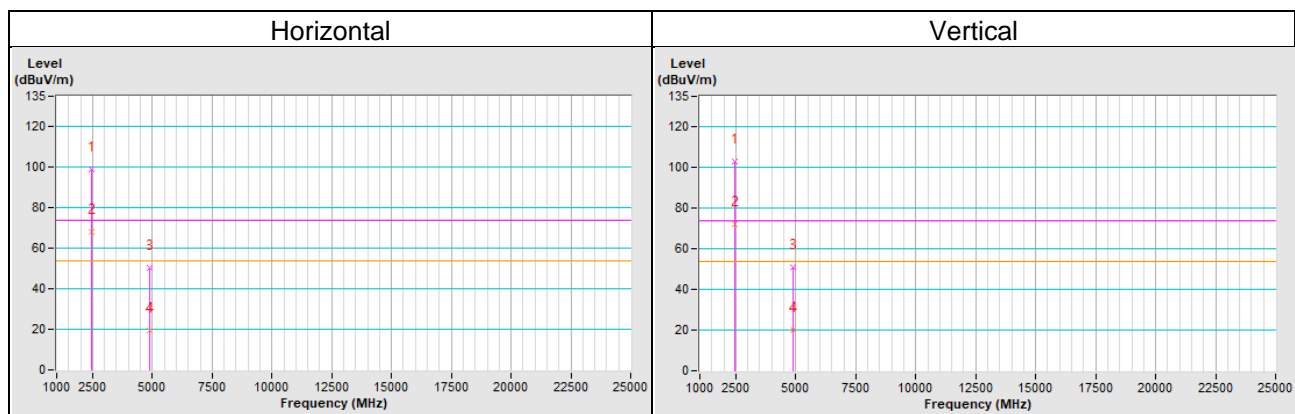

RF Mode	TX BT_GFSK	Channel	CH 78 : 2480 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	21°C, 70% RH
Tested By	Greg Lin	Test Date	2022/4/15

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	98.7 PK			1.59 H	178	65.8	32.9
2	*2480.00	67.9 AV			1.59 H	178	35.0	32.9
3	2483.50	54.4 PK	74.0	-19.6	1.59 H	178	55.9	-1.5
4	2483.50	23.6 AV	54.0	-30.4	1.59 H	178	25.1	-1.5
5	4960.00	50.3 PK	74.0	-23.7	1.64 H	196	44.6	5.7
6	4960.00	19.5 AV	54.0	-34.5	1.64 H	196	13.8	5.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	102.6 PK			1.85 V	132	69.7	32.9
2	*2480.00	71.8 AV			1.85 V	132	38.9	32.9
3	2483.50	57.1 PK	74.0	-16.9	1.85 V	132	58.6	-1.5
4	2483.50	26.3 AV	54.0	-27.7	1.85 V	132	27.8	-1.5
5	4960.00	50.9 PK	74.0	-23.1	2.53 V	158	45.2	5.7
6	4960.00	20.1 AV	54.0	-33.9	2.53 V	158	14.4	5.7

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * " : Fundamental frequency.
6. for Fundamental frequency and bandedge & harmonic:
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle) where the duty correction is calculated from following formula:
 $20\text{Log}(\text{Duty cycle}) = 20 \log (2.89\text{ms} \cdot 1/100) = -30.8\text{dB}$ please refer to the plotted duty (see section 3.3)

RF Mode	TX BT_8DPSK	Channel	CH 0 : 2402 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	21°C, 70% RH
Tested By	Greg Lin	Test Date	2022/4/15

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.50 H	176	24.1	32.8
2	2390.00	44.6 AV	54.0	-9.4	1.50 H	176	11.8	32.8
3	*2402.00	97.1 PK			1.50 H	176	64.3	32.8
4	*2402.00	66.3 AV			1.50 H	176	33.5	32.8
5	4804.00	50.1 PK	74.0	-23.9	1.83 H	214	44.3	5.8
6	4804.00	19.3 AV	54.0	-34.7	1.83 H	214	13.5	5.8

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.2 PK	74.0	-16.8	2.19 V	139	24.4	32.8
2	2390.00	45.1 AV	54.0	-8.9	2.19 V	139	12.3	32.8
3	*2402.00	101.0 PK			2.19 V	139	68.2	32.8
4	*2402.00	70.2 AV			2.19 V	139	37.4	32.8
5	4804.00	50.6 PK	74.0	-23.4	2.42 V	165	44.8	5.8
6	4804.00	19.8 AV	54.0	-34.2	2.42 V	165	14.0	5.8

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency.
- for Fundamental frequency and bandedge & harmonic:
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle) where the duty correction is calculated from following formula:
 $20\text{Log}(\text{Duty cycle}) = 20 \log (2.89\text{ms} \cdot 1/100) = -30.8\text{dB}$ please refer to the plotted duty (see section 3.3)

RF Mode	TX BT_8DPSK	Channel	CH 39 : 2441 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	21°C, 70% RH
Tested By	Greg Lin	Test Date	2022/4/15

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	98.9 PK			1.56 H	176	66.1	32.8
2	*2441.00	68.1 AV			1.56 H	176	35.3	32.8
3	4882.00	50.1 PK	74.0	-23.9	1.77 H	212	44.6	5.5
4	4882.00	19.3 AV	54.0	-34.7	1.77 H	212	13.8	5.5

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2441.00	103.0 PK			1.96 V	146	70.2	32.8
2	*2441.00	72.2 AV			1.96 V	146	39.4	32.8
3	4882.00	50.8 PK	74.0	-23.2	2.52 V	155	45.3	5.5
4	4882.00	20.0 AV	54.0	-34.0	2.52 V	155	14.5	5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. for Fundamental frequency and bandedge & harmonic:
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle) where the duty correction is calculated from following formula:
 $20\text{Log}(\text{Duty cycle}) = 20 \log (2.89\text{ms} \cdot 1/100) = -30.8\text{dB}$ please refer to the plotted duty (see section 3.3)

RF Mode	TX BT_8DPSK	Channel	CH 78 : 2480 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	21°C, 70% RH
Tested By	Greg Lin	Test Date	2022/4/15

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	98.3 PK			1.56 H	171	65.4	32.9
2	*2480.00	67.5 AV			1.56 H	171	34.6	32.9
3	2483.50	54.1 PK	74.0	-19.9	1.56 H	171	55.6	-1.5
4	2483.50	23.3 AV	54.0	-30.7	1.56 H	171	24.8	-1.5
5	4960.00	50.1 PK	74.0	-23.9	1.68 H	206	44.4	5.7
6	4960.00	19.3 AV	54.0	-34.7	1.68 H	206	13.6	5.7

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	102.5 PK			1.87 V	144	69.6	32.9
2	*2480.00	71.7 AV			1.87 V	144	38.8	32.9
3	2483.50	57.4 PK	74.0	-16.6	1.87 V	144	58.9	-1.5
4	2483.50	26.6 AV	54.0	-27.4	1.87 V	144	28.1	-1.5
5	4960.00	50.6 PK	74.0	-23.4	2.46 V	153	44.9	5.7
6	4960.00	19.8 AV	54.0	-34.2	2.46 V	153	14.1	5.7

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency.
- for Fundamental frequency and bandedge & harmonic:
The average value of fundamental frequency is :average = peak value + 20log(Duty cycle) where the duty correction is calculated from following formula:
 $20\text{Log}(\text{Duty cycle}) = 20 \log (2.89\text{ms} \cdot 1/100) = -30.8\text{dB}$ please refer to the plotted duty (see section 3.3)

9 kHz ~ 1 GHz Worst-Case Data:

Mode A


RF Mode	TX BT_GFSK	Channel	CH 39 : 2441 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 66% RH
Tested By	Rex Wang	Test Date	2022/4/8

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	88.20	31.3 QP	43.5	-12.2	1.25 H	48	46.0	-14.7
2	227.88	26.2 QP	46.0	-19.8	1.00 H	246	37.2	-11.0
3	299.66	28.5 QP	46.0	-17.5	1.00 H	299	35.4	-6.9
4	470.38	26.7 QP	46.0	-19.3	1.25 H	168	29.8	-3.1
5	549.92	29.7 QP	46.0	-16.3	1.00 H	16	31.3	-1.6
6	652.74	31.8 QP	46.0	-14.2	1.00 H	90	31.6	0.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

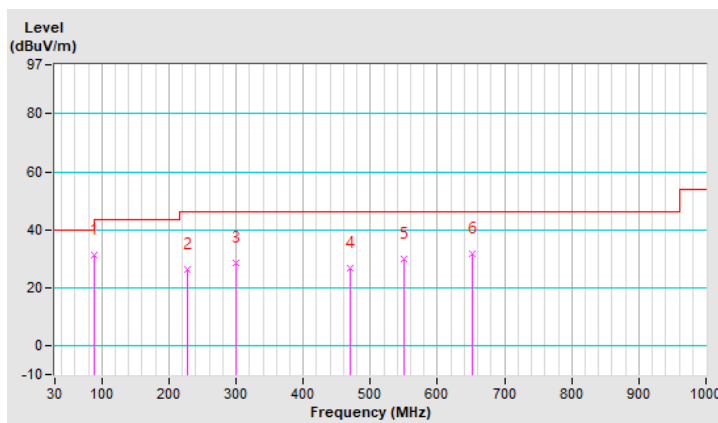


RF Mode	TX BT_GFSK	Channel	CH 39 : 2441 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 66% RH
Tested By	Rex Wang	Test Date	2022/4/8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	70.74	26.6 QP	40.0	-13.4	1.25 V	198	37.8	-11.2
2	150.28	33.4 QP	43.5	-10.1	1.50 V	297	42.2	-8.8
3	267.65	36.0 QP	46.0	-10.0	1.00 V	86	44.1	-8.1
4	341.37	31.8 QP	46.0	-14.2	1.25 V	85	37.9	-6.1
5	378.23	30.3 QP	46.0	-15.7	1.00 V	85	35.7	-5.4
6	549.92	32.8 QP	46.0	-13.2	2.00 V	294	34.4	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

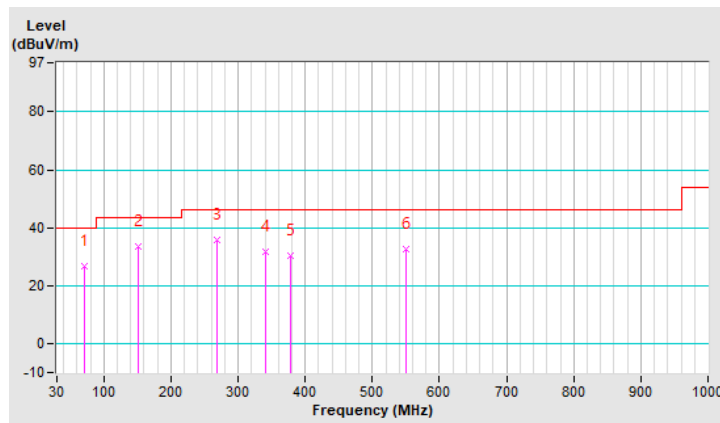

Mode B


RF Mode	TX BT_GFSK	Channel	CH 39 : 2441 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 66% RH
Tested By	Rex Wang	Test Date	2022/4/8

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	88.20	29.8 QP	43.5	-13.7	1.50 H	19	44.5	-14.7
2	150.28	35.9 QP	43.5	-7.6	1.00 H	316	44.7	-8.8
3	216.24	30.7 QP	46.0	-15.3	1.25 H	77	41.9	-11.2
4	309.36	30.8 QP	46.0	-15.2	1.00 H	92	37.3	-6.5
5	448.07	40.8 QP	46.0	-5.2	2.00 H	5	44.3	-3.5
6	514.03	32.0 QP	46.0	-14.0	1.00 H	49	34.2	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

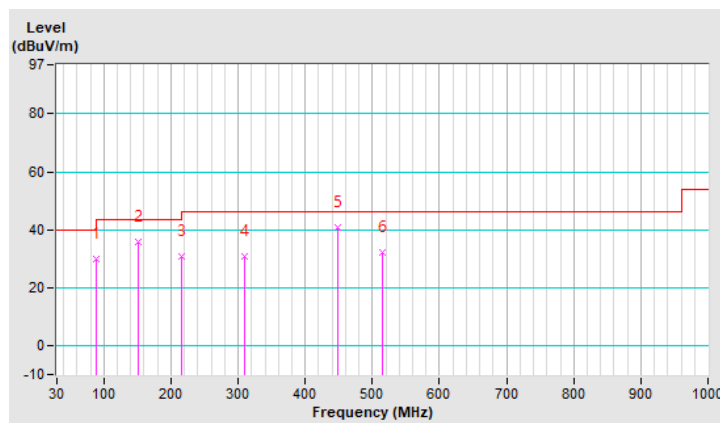


RF Mode	TX BT_GFSK	Channel	CH 39 : 2441 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	20°C, 66% RH
Tested By	Rex Wang	Test Date	2022/4/8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	99.84	37.1 QP	43.5	-6.4	1.00 V	224	50.8	-13.7
2	133.79	34.5 QP	43.5	-9.0	1.50 V	110	44.3	-9.8
3	249.22	26.6 QP	46.0	-19.4	1.50 V	224	35.6	-9.0
4	438.37	31.2 QP	46.0	-14.8	1.00 V	34	34.8	-3.6
5	549.92	32.7 QP	46.0	-13.3	1.00 V	309	34.3	-1.6
6	637.22	32.5 QP	46.0	-13.5	1.00 V	335	32.4	0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

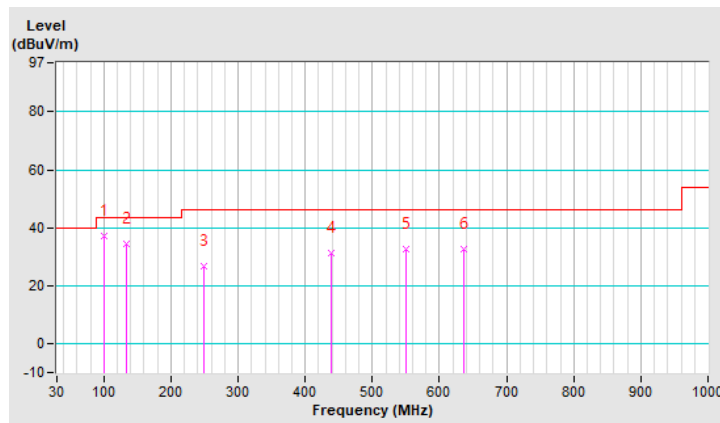

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESR3	102783	Dec. 20, 2021	Dec. 19, 2022
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Sep. 04, 2021	Sep. 03, 2022
LISN/AMN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Feb. 17, 2022	Feb. 16, 2023
LISN/AMN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Sep. 17, 2021	Sep. 16, 2022
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-12047.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz - 30 MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

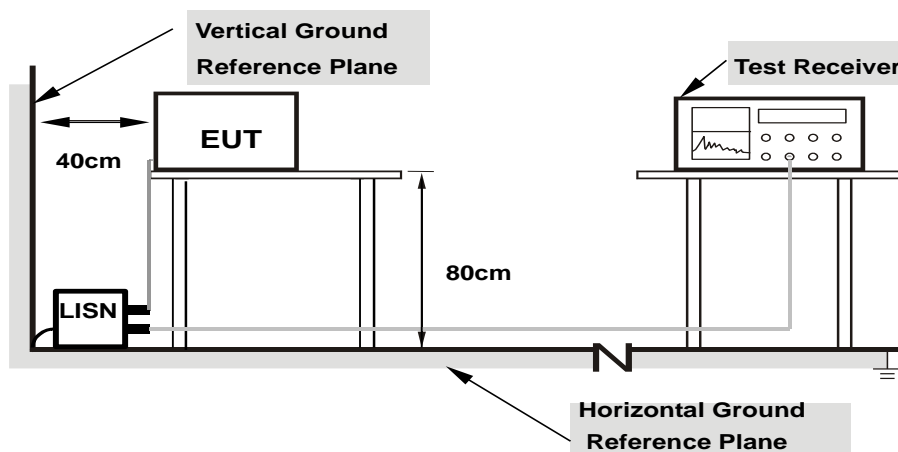

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

Set the EUT under transmission condition continuously at specific channel frequency.

4.2.7 Test Results

CONDUCTED WORST-CASE DATA : GFSK


Mode A

Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 73% RH
Tested by	Greg Lin	Test Date	2022/4/8

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	10.13	39.99	25.10	50.12	35.23	65.78	55.78	-15.66	-20.55
2	0.20200	10.16	33.79	15.52	43.95	25.68	63.53	53.53	-19.58	-27.85
3	0.35800	10.22	24.12	15.03	34.34	25.25	58.77	48.77	-24.43	-23.52
4	1.29800	10.32	16.81	15.10	27.13	25.42	56.00	46.00	-28.87	-20.58
5	3.89400	10.40	18.42	16.72	28.82	27.12	56.00	46.00	-27.18	-18.88
6	7.78600	10.44	14.59	10.15	25.03	20.59	60.00	50.00	-34.97	-29.41

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

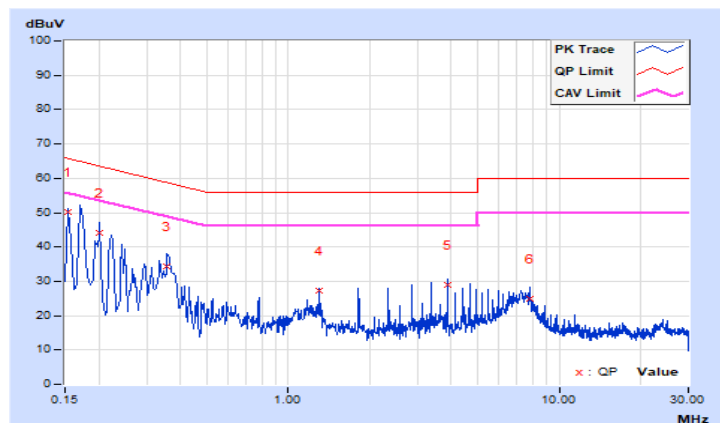


Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 73% RH
Tested by	Greg Lin	Test Date	2022/4/8

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	10.14	42.31	24.67	52.45	34.81	65.78	55.78	-13.33	-20.97
2	0.17800	10.17	37.85	19.17	48.02	29.34	64.58	54.58	-16.56	-25.24
3	0.21000	10.19	32.40	14.91	42.59	25.10	63.21	53.21	-20.62	-28.11
4	0.36600	10.25	23.11	15.02	33.36	25.27	58.59	48.59	-25.23	-23.32
5	3.36600	10.39	19.00	17.02	29.39	27.41	56.00	46.00	-26.61	-18.59
6	7.13800	10.46	12.21	6.80	22.67	17.26	60.00	50.00	-37.33	-32.74

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

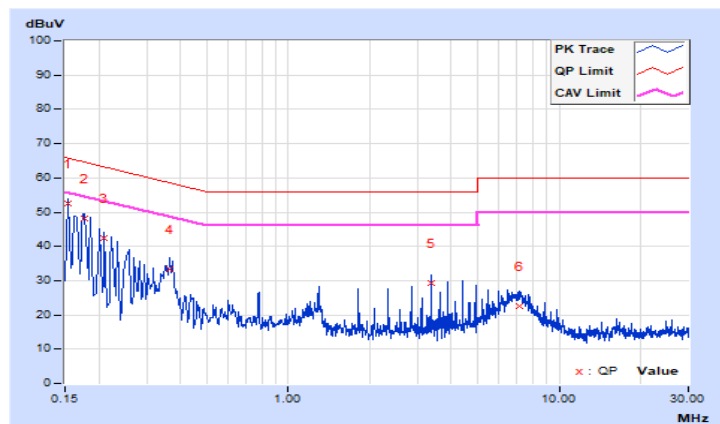


Mode B

Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 73% RH
Tested by	Greg Lin	Test Date	2022/4/8

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16600	10.13	31.37	15.74	41.50	25.87	65.16	55.16	-23.66	-29.29
2	0.19000	10.14	22.62	12.94	32.76	23.08	64.04	54.04	-31.28	-30.96
3	0.21400	10.14	24.28	11.29	34.42	21.43	63.05	53.05	-28.63	-31.62
4	0.48600	10.16	27.13	19.66	37.29	29.82	56.24	46.24	-18.95	-16.42
5	0.73800	10.18	15.23	8.91	25.41	19.09	56.00	46.00	-30.59	-26.91
6	2.94200	10.23	16.81	7.21	27.04	17.44	56.00	46.00	-28.96	-28.56

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

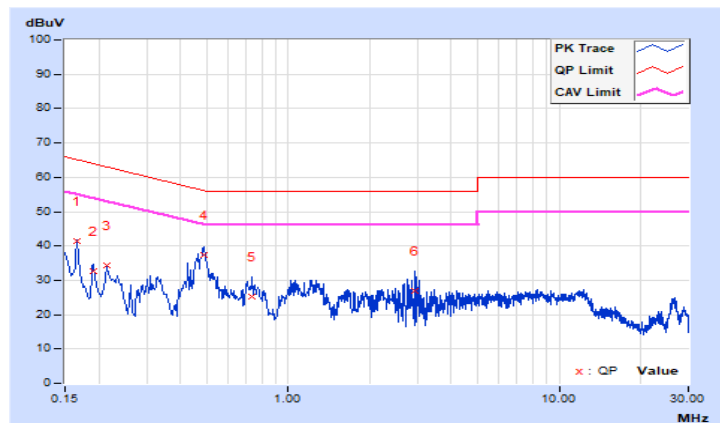


Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 73% RH
Tested by	Greg Lin	Test Date	2022/4/8

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.14	34.99	22.22	45.13	32.36	66.00	56.00	-20.87	-23.64
2	0.16190	10.14	32.45	16.28	42.59	26.42	65.37	55.37	-22.78	-28.95
3	0.17800	10.15	29.57	13.73	39.72	23.88	64.58	54.58	-24.86	-30.70
4	0.22600	10.15	23.89	10.83	34.04	20.98	62.60	52.60	-28.56	-31.62
5	0.48600	10.17	26.26	18.79	36.43	28.96	56.24	46.24	-19.81	-17.28
6	2.88200	10.25	17.37	4.32	27.62	14.57	56.00	46.00	-28.38	-31.43

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

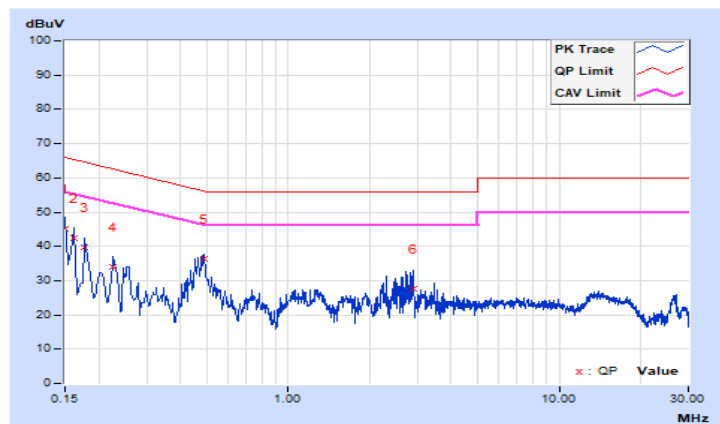


4.3 Number of Hopping Frequency Used

4.3.1 Limits of Hopping Frequency Used Measurement

At least 15 channels frequencies, and should be equally spaced.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.


4.3.5 Deviation from Test Standard

No deviation.


4.3.6 Test Results

There are 79 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

<GFSK>

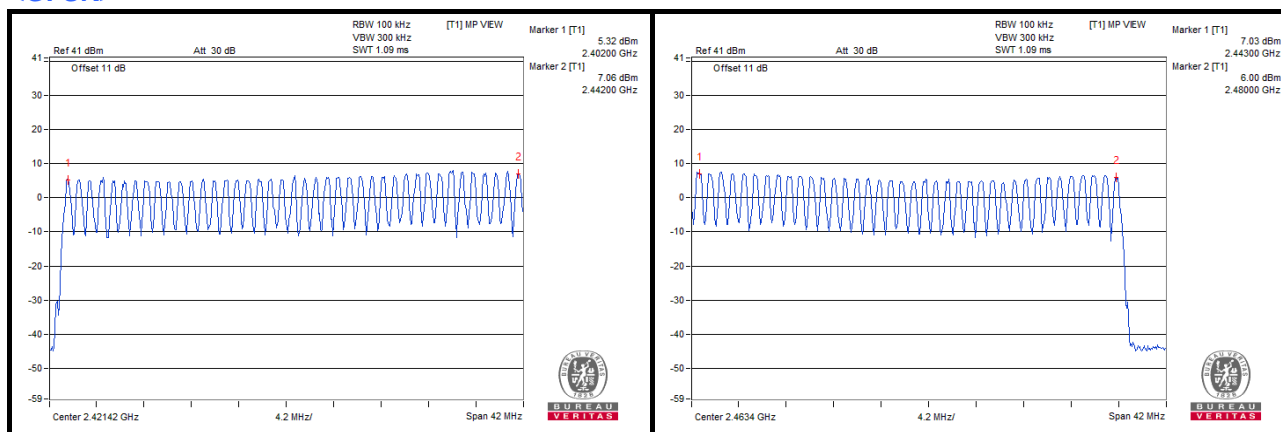

<8DPSK>

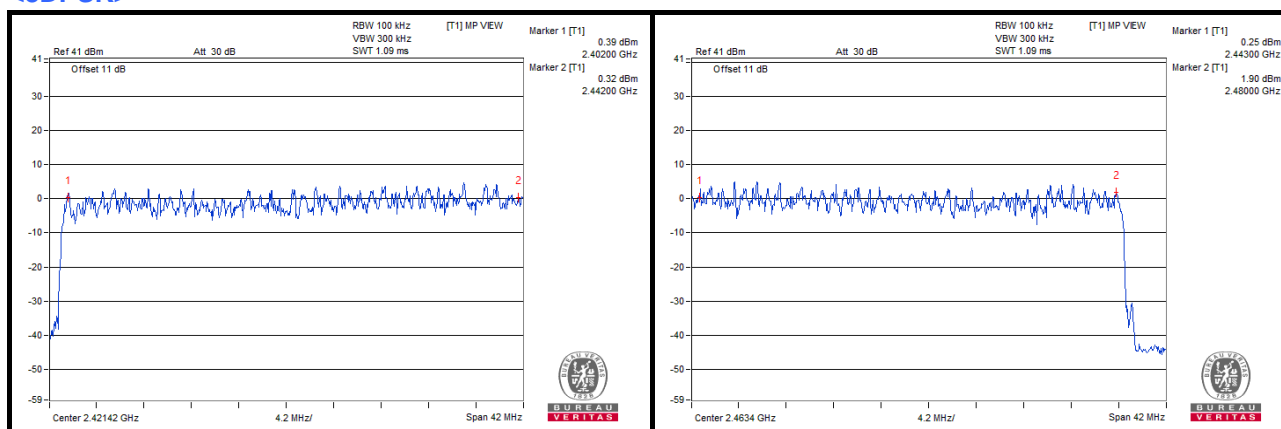


4.4 Dwell Time on Each Channel

4.4.1 Limits of Dwell Time on Each Channel Measurement

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

4.4.5 Deviation from Test Standard


No deviation.

4.4.6 Test Results

GFSK

Mode	Number of Transmission in a 31.6 (79 Hopping*0.4)	Length of Transmission Time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) * 6.32 = 316 times	0.48	151.68	400
DH3	26 (times / 5 sec) * 6.32 = 165 times	1.7	280.5	400
DH5	16 (times / 5 sec) * 6.32 = 102 times	3.01	307.02	400

Note: Test plots of the transmitting time slot are shown as below.

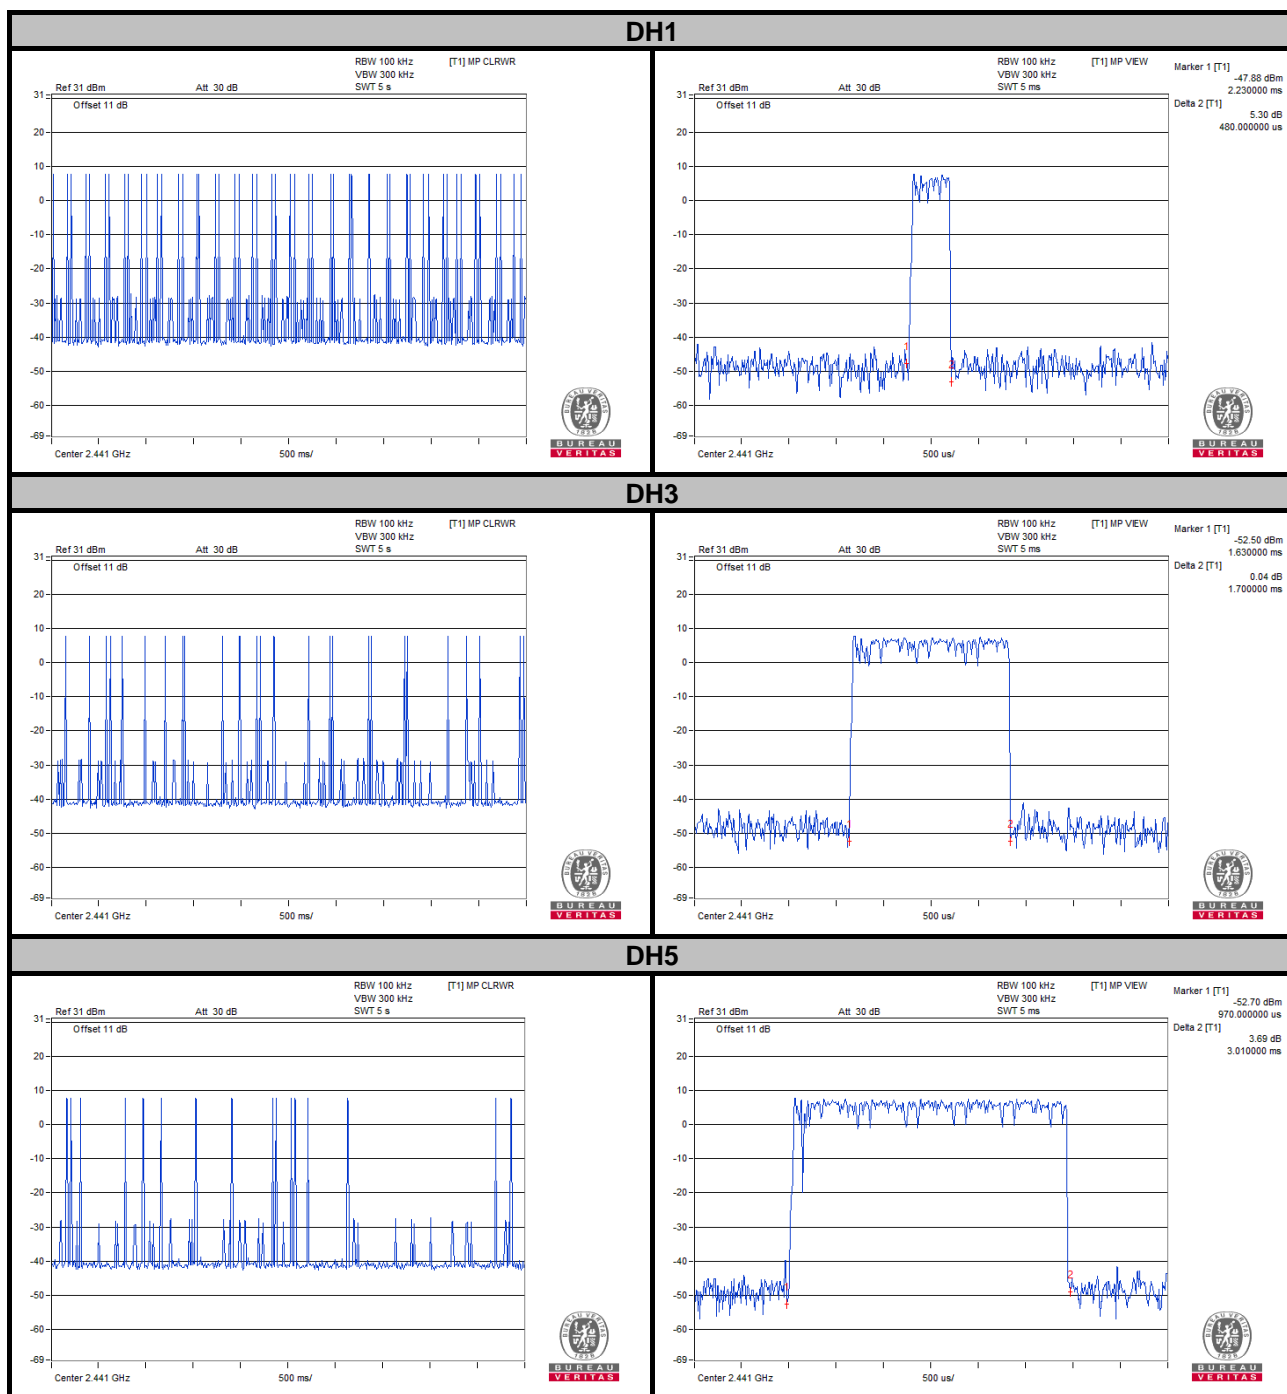

8DPSK

Mode	Number of Transmission in a 31.6 (79 Hopping*0.4)	Length of Transmission Time (msec)	Result (msec)	Limit (msec)
3DH1	50 (times / 5 sec) * 6.32 = 316 times	0.45	142.2	400
3DH3	25 (times / 5 sec) * 6.32 = 158 times	1.739	274.76	400
3DH5	17 (times / 5 sec) * 6.32 = 108 times	2.963	320	400

Note: Test plots of the transmitting time slot are shown as below.




4.5 Channel Bandwidth

4.5.1 Limits of Channel Bandwidth Measurement

For frequency hopping system operating in the 2400-2483.5 MHz, if the 20 dB bandwidth of hopping channel is greater than 25 kHz, two-thirds 20 dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

4.5.5 Deviation from Test Standard


No deviation.

4.5.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


4.5.7 Test Results

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	
		GFSK	8DPSK
0	2402	0.97	1.32
39	2441	0.98	1.33
78	2480	0.97	1.33

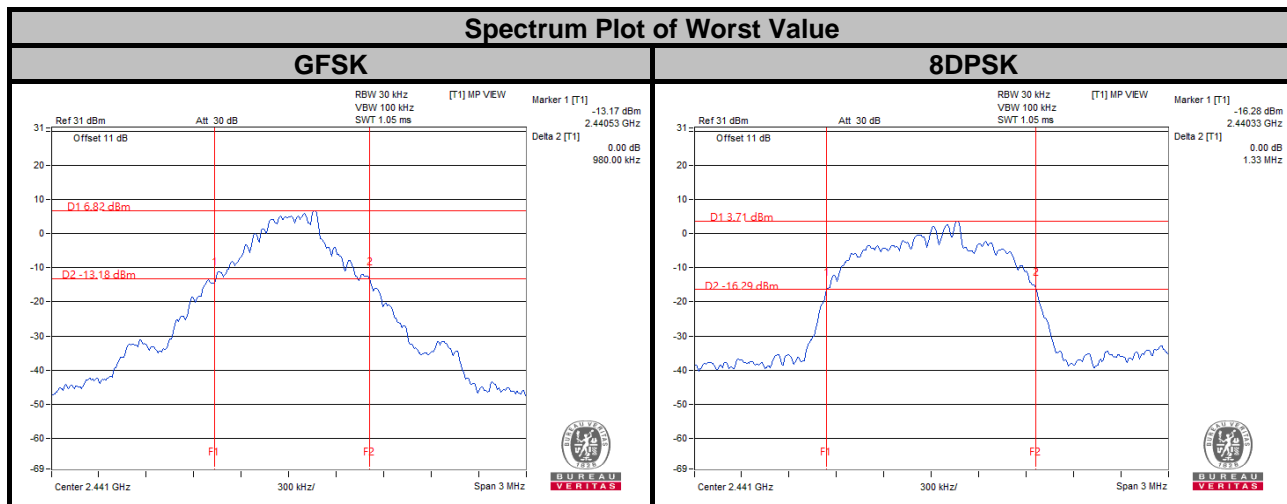

4.6 Occupied Bandwidth Measurement

4.6.1 Test Setup



4.6.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument

4.6.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.6.4 Deviation from Test Standard


No deviation.

4.6.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.6.6 Test Results

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		GFSK	8DPSK
0	2402	0.90	1.21
39	2441	0.91	1.21
78	2480	0.91	1.22

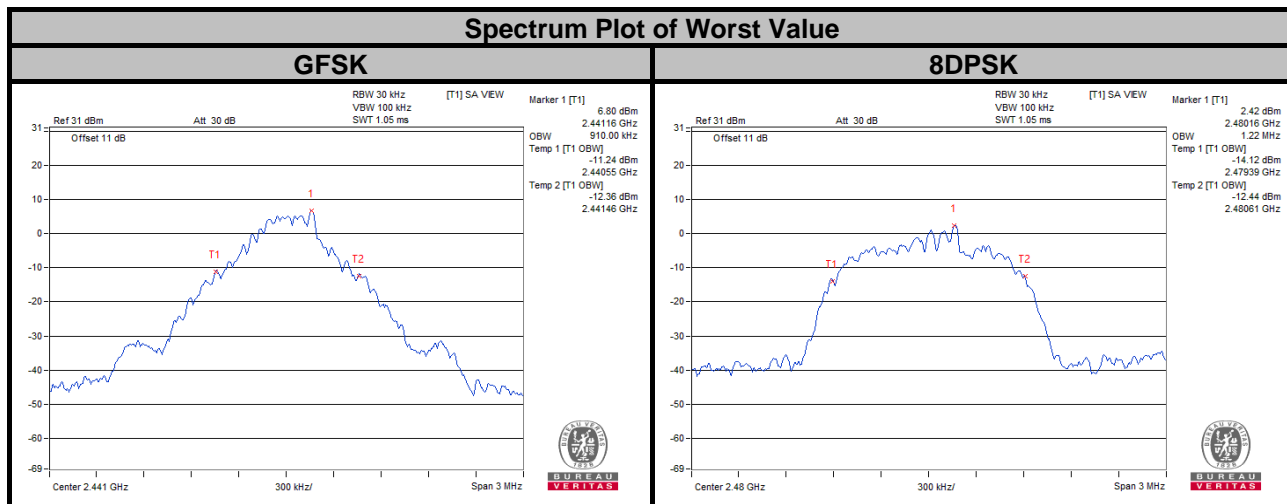


4.7 Hopping Channel Separation

4.7.1 Limits of Hopping Channel Separation Measurement

At least 25 kHz or two-third of 20 dB hopping channel bandwidth (whichever is greater).

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

Measurement Procedure REF

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.


4.7.5 Deviation from Test Standard

No deviation.

4.7.6 Test Results

Channel	Freq. (MHz)	Adjacent Channel Separation (MHz)		20 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK	GFSK	8DPSK	
0	2402	1.00	1.00	0.97	1.32	0.65	0.88	Pass
39	2441	1.00	1.00	0.98	1.33	0.66	0.89	Pass
78	2480	1.00	1.00	0.97	1.33	0.65	0.89	Pass

Note: The minimum limit is two-third 20 dB bandwidth.

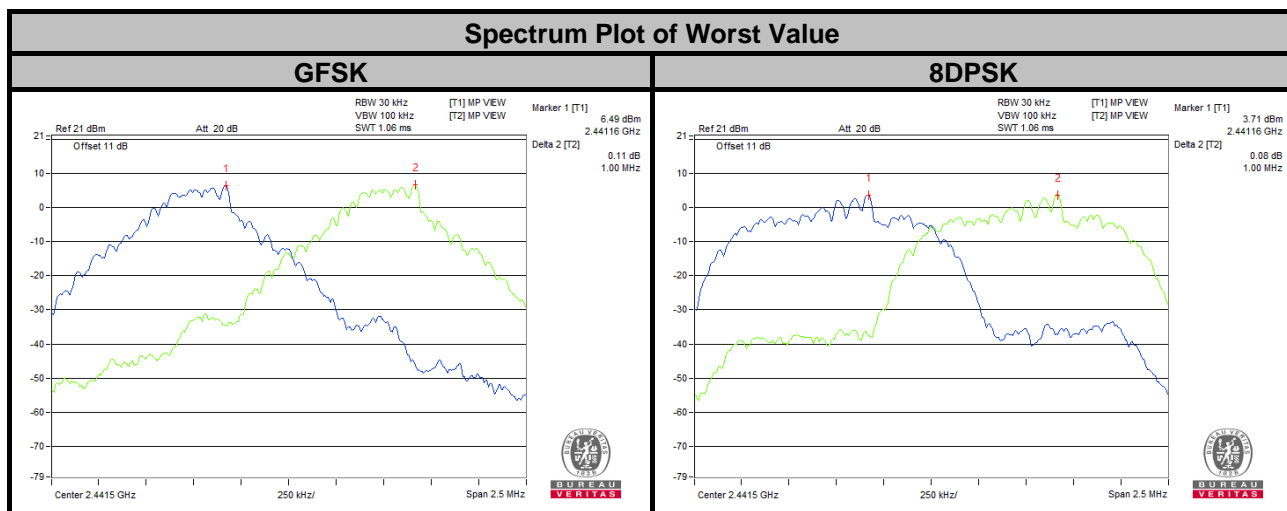


4.8 Maximum Output Power

4.8.1 Limits of Maximum Output Power Measurement

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

4.8.2 Test Setup



4.8.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.8.4 Test Procedure

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.8.5 Deviation from Test Standard

No deviation.

4.8.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.7 Test Results

<GFSK>

Channel	Freq. (MHz)	Peak Power		Average Power		Power Limit (mW)	Pass / Fail
		(mW)	(dBm)	(mW)	(dBm)		
0	2402	3.483	5.42	3.327	5.22	125 / 1000 ^{Note}	Pass
39	2441	5.117	7.09	4.92	6.92	125 / 1000 ^{Note}	Pass
78	2480	3.89	5.90	3.724	5.71	125 / 1000 ^{Note}	Pass

Note: RF Output Power limit depends on the operating channel numbers, please refer to section 4.3 of the results.

<8DPSK>

Channel	Freq. (MHz)	Peak Power		Average Power		Power Limit (mW)	Pass / Fail
		(mW)	(dBm)	(mW)	(dBm)		
0	2402	2.618	4.18	1.57	1.96	125 / 1000 ^{Note}	Pass
39	2441	4.305	6.34	2.415	3.83	125 / 1000 ^{Note}	Pass
78	2480	2.871	4.58	1.766	2.47	125 / 1000 ^{Note}	Pass

Note: RF Output Power limit depends on the operating channel numbers, please refer to section 4.3 of the results.

4.9 Conducted Out of Band Emission Measurement

4.9.1 Limits Of Conducted Out of Band Emission Measurement

Below 20 dB of the highest emission level of operating band (in 100 kHz RBW).

4.9.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.9.3 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.9.4 Deviation from Test Standard

No deviation.

4.9.5 EUT Operating Condition



The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.9.6 Test Results



The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20 dB offset below D1. It shows compliance with the requirement.

GFSK



Hopping Disabled_Low Channel

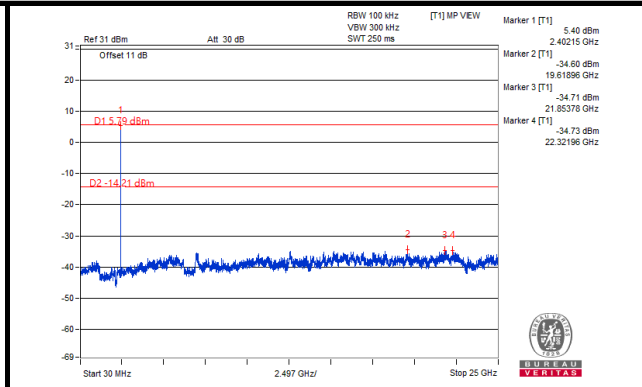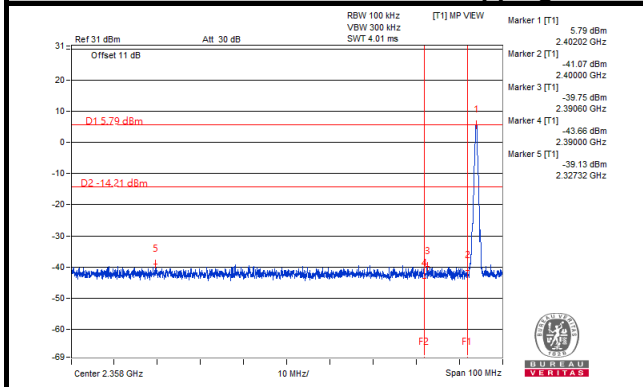



Hopping Disabled_High Channel

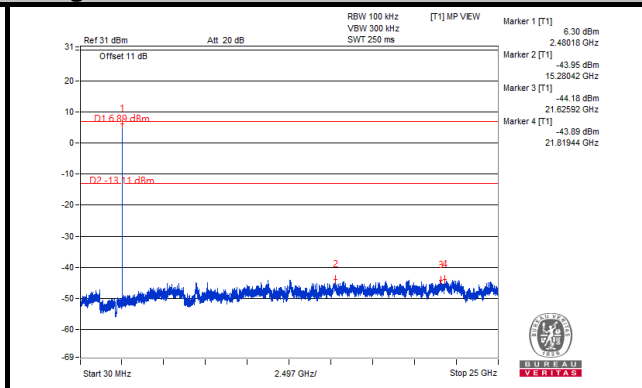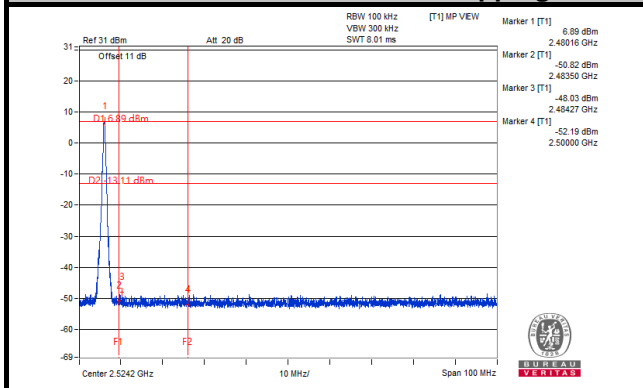

Hopping Enabled_Low Channel

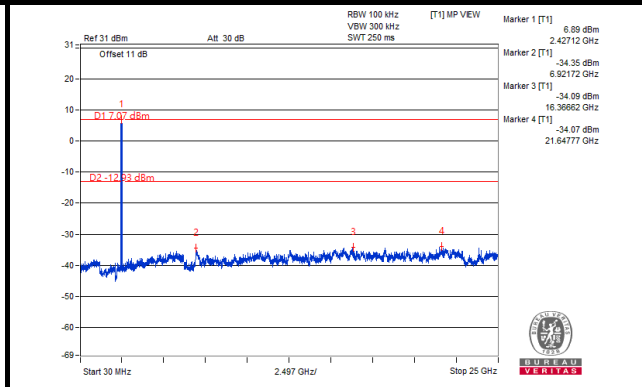
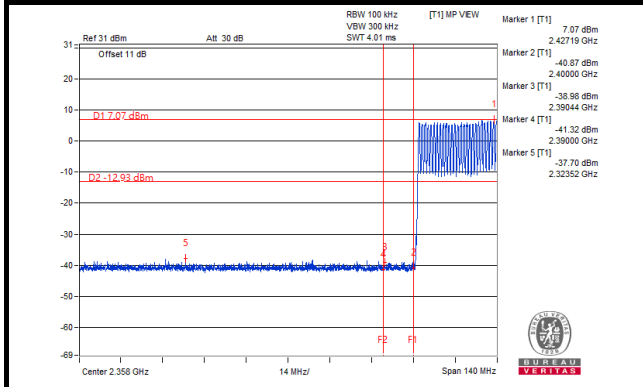


Hopping Enabled_High Channel

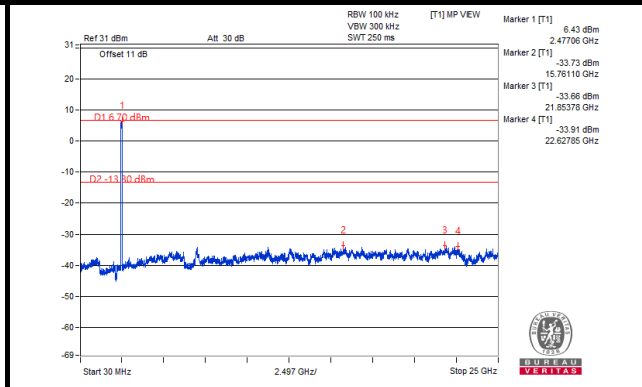
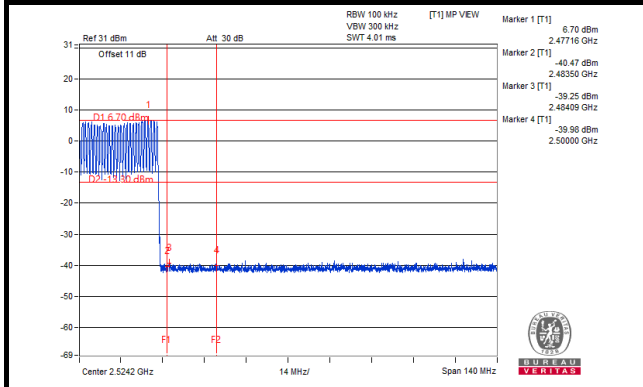


8DPSK



Hopping Disabled_Low Channel

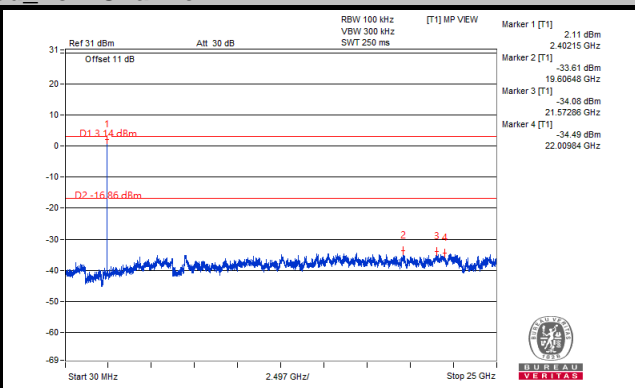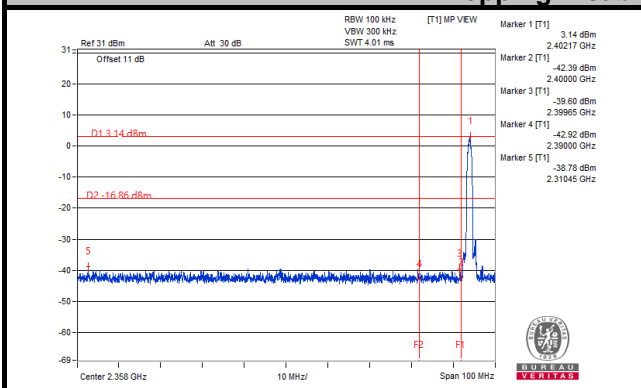



Hopping Disabled_High Channel

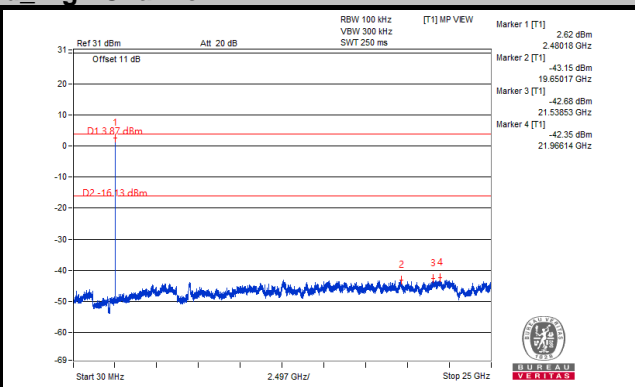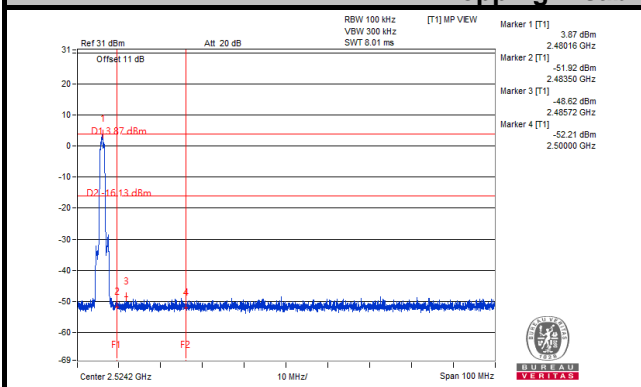

Hopping Enabled_Low Channel

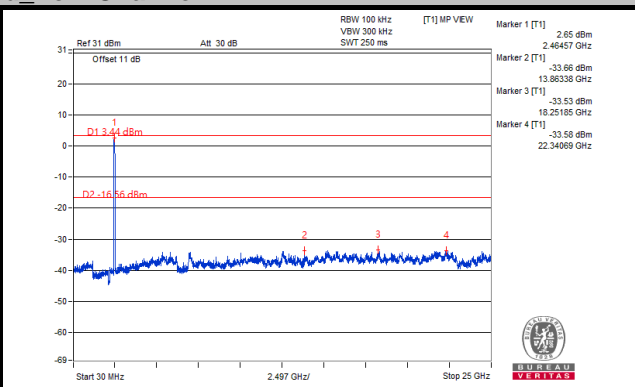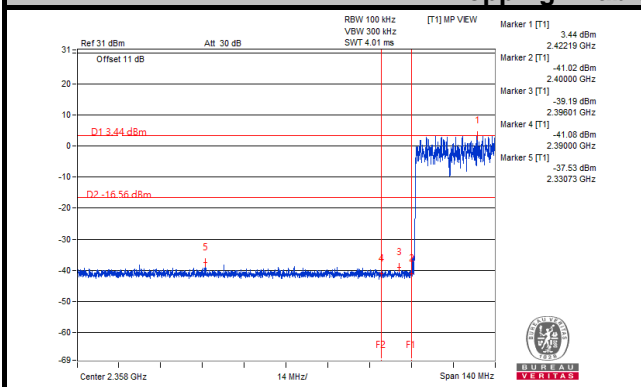


Hopping Enabled_High Channel

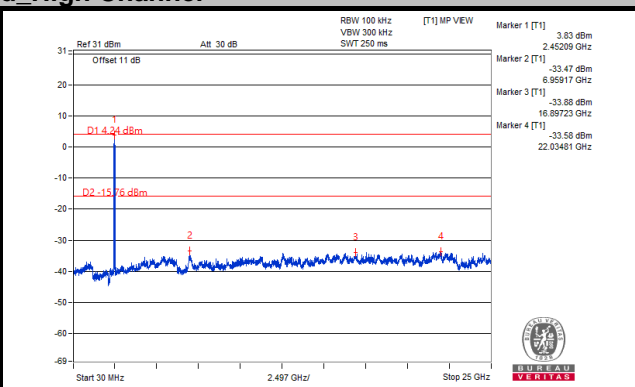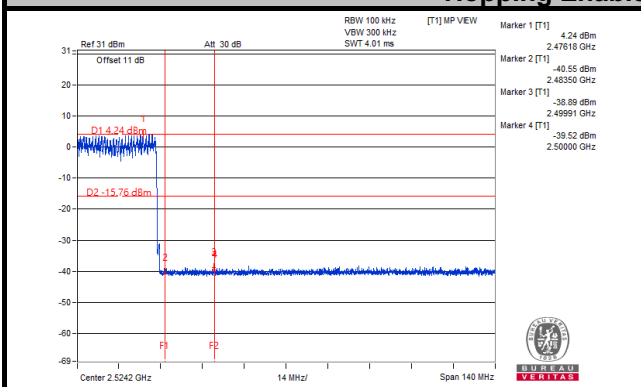

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Annex A- Band Edge Measurement

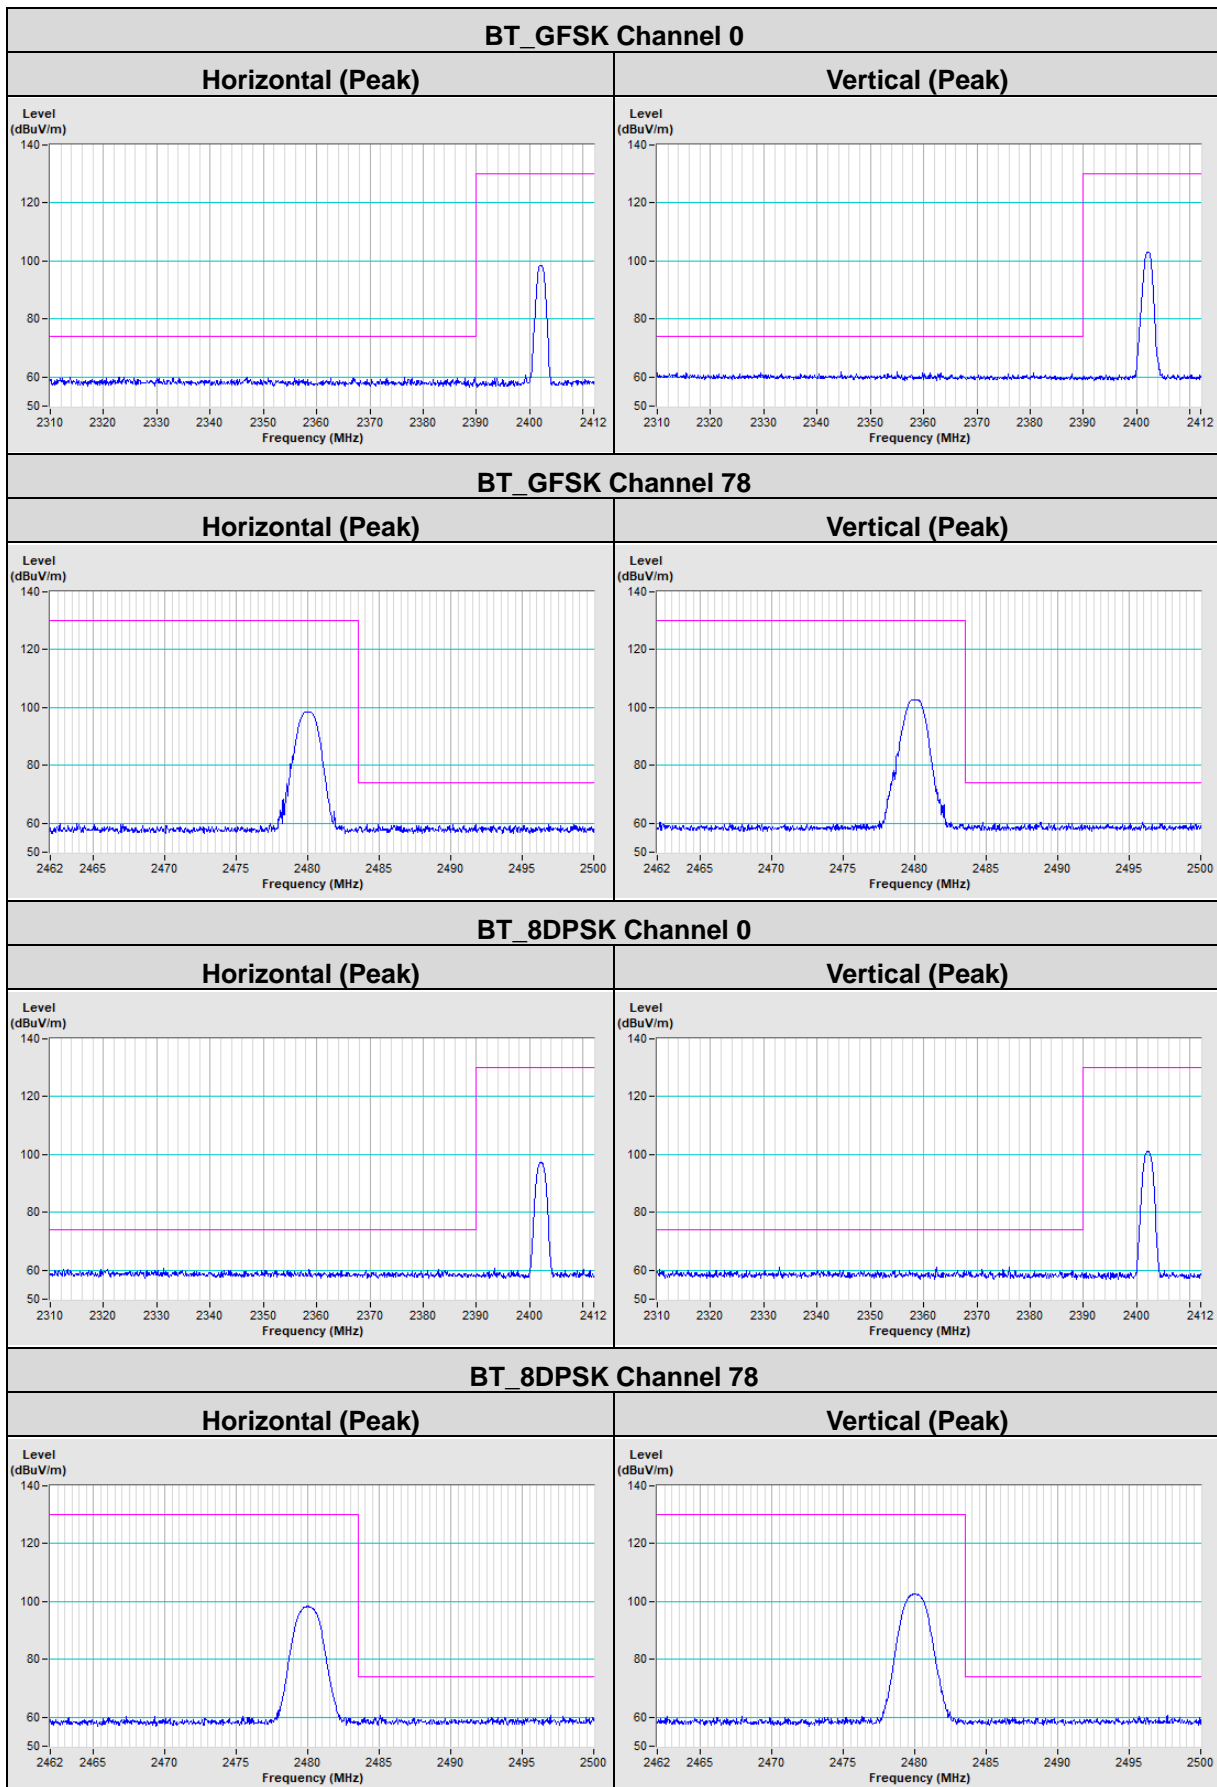

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---