



Shenzhen Certification Technology Service Co., Ltd
2F, Building B, East Area of Nanchang Second Industrial
Zone, Gushu 2nd Road, Bao'an District, Shenzhen
518126, P.R. China.

TEST REPORT

FCC ID: M7U-DW702M

Applicant : BRK Brands Inc
Address : 3901 Liberty street, Aurora, IL 60504, USA

Equipment under Test (EUT):

Name : digital wireless 7" Quad monitor kit
Model : DW702M

Standards : FCC PART 15, SUBPART C : 2011 (Section 15.249)

Report No. : STE120507491

Date of Test : May 10-25, 2012

Date of Issue : May 26, 2012

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above

Authorized Signature

A handwritten signature in black ink, appearing to read "Mark Zhu".

(Mark Zhu)
General Manager

The manufacturer should ensure that all the products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of Shenzhen Certification Technology Service Co., Ltd. Or test done by Shenzhen Certification Technology Service Co., Ltd. Approvals in connection with, distribution or use of the product described in this report must be approved by Shenzhen Certification Technology Service Co., Ltd. Approvals in writing.

TABLE OF CONTENT

Description	Page
1 General Information-----	3
1.1 Description of Device (EUT)-----	3
1.2 Description of Test Facility-----	4
2 EMC Equipment List -----	4
3 Test Procedure -----	5
4 Summary of Measurement-----	6
Occupied bandwidth -----	6
5 POWER LINE CONDUCTED EMISSION -----	7
5.1 Conducted Emission Limits(15.209&249) -----	7
5.2 Test Setup -----	7
5.3 Test Procedure -----	8
5.4 Test Results -----	8
6 Radiation Emission-----	11
6.1 Radiation Emission Limits(15.209&249 (a))-----	11
6.2 Test Setup -----	12
6.3 Test Procedure -----	13
6.4 Test Equipment Setting For emission test.-----	14
6.5 Test Condition -----	14
6.6 Test Result -----	14
7 Occupied bandwidth-----	21
7.1 Test limit-----	21
7.2 Method of measurement-----	21
7.3 Test Setup -----	21
7.4 Test Results -----	21
8 Band Edge Check-----	24
8.1 Test limit-----	24
8.2 Test Procedure -----	24
8.3 Test Setup -----	24
8.4 Test Result -----	24
9 Antenna Requirement -----	29
9.1 Standard Requirement -----	29
9.2 Antenna Connected Construction-----	29
9.3 Result -----	29
10 Photographs of Test Setup -----	30
11 Photographs of EUT-----	33

1 General Information

1.1 Description of Device (EUT)

Trade Name : N/A

EUT : digital wireless 7" Quad monitor kit

Model No. : DW702M

Type of Antenna : Integral Antenna

Antenna Specification : 2 dBi

Operation Frequency : 2408.975MHz to 2474.225MHz

Channel number : 24

Modulation type : GFSK

Power Supply : DC 5V form Adapter

Adapter : Manufacturer: BRK Brands Inc
: Model: NLA100050W1A

Applicant : BRK Brands Inc

Address : 3901 Liberty street, Aurora, IL 60504, USA

Manufacturer : BRK Brands Inc

Address : 3901 Liberty street, Aurora, IL 60504, USA

1.2 Description of Test Facility

Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
FCC Registered No.:197647
IC Registered No.: 8258B

2 EMC Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
3m Semi-Anechoic	ETS-LINDGREN	N/A	SEL0017	06/06/2011	1Year
Spectrum analyzer	Agilent	E4443A	MY46185649	06/06/2011	1Year
Receiver	R&S	ESCI	100492	04/06/2011	1Year
Receiver	R&S	ESCI	101202	07/01/2012	1Year
Bilog Antenna	SCHWARZBECK	VULB 9168	VULB9168-4 38	04/06/2011	1Year
L.I.S.N.	SCHWARZBECK	NSLK8126	8126466	16/06/2011	1Year
Loop Antenna	R&S	FMZB1516	1516131	04/06/2011	1Year
ETS Horn Antenna	ETS	3160	SEL0076	12/08/2011	1Year
Cable	Resenberger	N/A	No.1	04/06/2011	1Year
Cable	SCHWARZBECK	N/A	No.2	04/06/2011	1Year
Cable	SCHWARZBECK	N/A	No.3	04/06/2011	1Year
Pre-amplifier	SCHWARZBECK	BBV9743	9743-019	06/06/2011	1Year
Pre-amplifier	R&S	AFS33-18002650 -30-8P-44	SEL0080	06/06/2011	1Year

3 Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a 50 μ H LISN. Both Lines were observed. The bandwidth of the receiver was 10kHz with an appropriate sweep speed. The ambient temperature of the EUT was 25°C with a humidity of 58%.

RADIATION INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a ANRITSU spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a micro volt at the output of the antenna. The resolution bandwidth was 100kHz and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3MHz above 1 GHz. The ambient temperature of the EUT was 25°C with a humidity of 58%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer and cable loss. The antenna correction factors and cable loss are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF + CABLE = FS
33.20 dBuV + 10.36 dB + 0.9 dB = 44.46 dBuV/m @ 3m

ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI Standard C63.4-2003 10.1.7 with the EUT 40 cm from the vertical ground wall.

4 Summary of Measurement

4.1 Summary of test result

Test Item	Test Requirement	Standard Paragraph	Result
Spurious Emission	FCC PART 15: 2011	Section 15.249&15.209	Compliance
Conduction Emission	FCC PART 15: 2011	Section 15.207	Compliance
Occupied bandwidth	FCC PART 15: 2011	Section 15.249	Compliance
Band edge Requirement	FCC PART 15: 2011	Section 15.249	Compliance
Antenna Requirement	FCC PART 15: 2011	Section 15.203	Compliance

Note: EUT can be powered with inside adapter from AC mains, according to exploratory test, when powered by adapter from AC mains have worse emissions, and also can make sure EUT have enough power for wireless work, so all the final test were performed with adapter.

4.2 Test mode

Tested mode, channel information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2408.975
	Middle: CH12	2439.350
	High: CH24	2474.225


5 POWER LINE CONDUCTED EMISSION

5.1 Conducted Emission Limits(15.209&249)

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.
3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.2 Test Setup

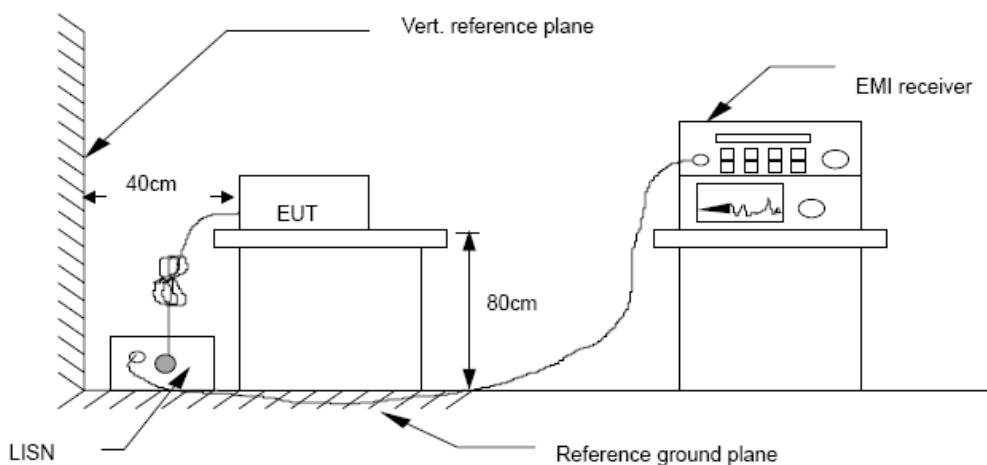

5.3 Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4-2003 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9 kHz.


5.4 Test Results

PASS

Detailed information please see the following page.



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 Fax: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

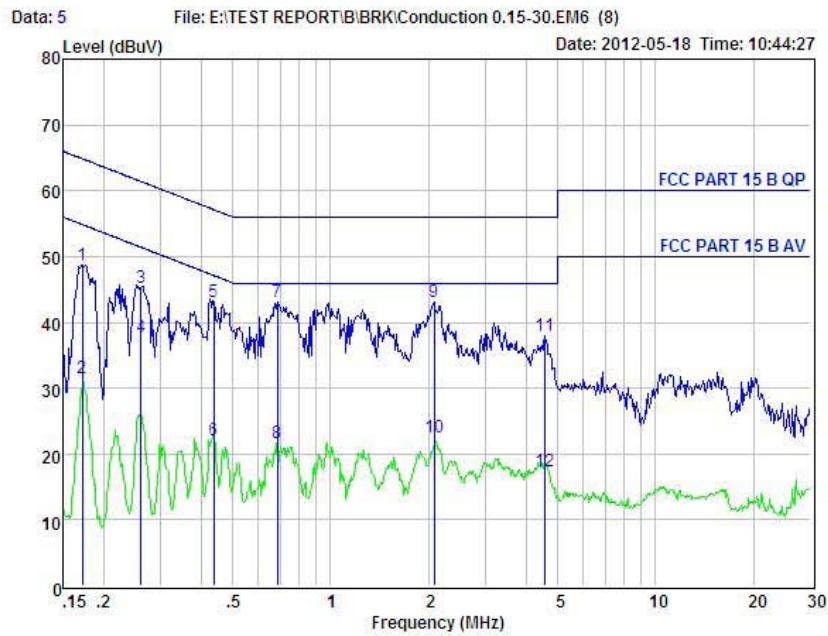


Condition : FCC PART 15 B QP POL: LINE
 EUT : digital wireless 7" Quand monitor kit
 Model No. : DW702M
 Test Mode : Normal
 Power : AC 120V/50Hz
 Test Engineer: Simple
 Remark :

Item	Freq	Read	LISN	Preamp	Cable	Level	Limit	Margin	Remark
			Factor	Factor	Lose	dBuV	dBuV	dBuV	
	MHz	dBuV	dB	dB	dB				
1	0.172	38.80	0.03	-9.72	0.10	48.65	64.86	-16.21	QP
2	0.172	21.62	0.03	-9.72	0.10	31.47	54.86	-23.39	Average
3	0.260	35.48	0.03	-9.72	0.10	45.33	61.42	-16.09	QP
4	0.260	27.93	0.03	-9.72	0.10	37.78	51.42	-13.64	Average
5	0.437	33.35	0.03	-9.72	0.10	43.20	57.11	-13.91	QP
6	0.437	12.34	0.03	-9.72	0.10	22.19	47.11	-24.92	Average
7	0.686	33.24	0.03	-9.72	0.10	43.09	56.00	-12.91	QP
8	0.686	11.89	0.03	-9.72	0.10	21.74	46.00	-24.26	Average
9	2.088	33.19	0.06	-9.70	0.10	43.05	56.00	-12.95	QP
10	2.088	12.68	0.06	-9.70	0.10	22.54	46.00	-23.46	Average
11	4.549	28.15	0.09	-9.68	0.12	38.04	56.00	-17.96	QP
12	4.549	7.43	0.09	-9.68	0.12	17.32	46.00	-28.68	Average



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 Fax: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

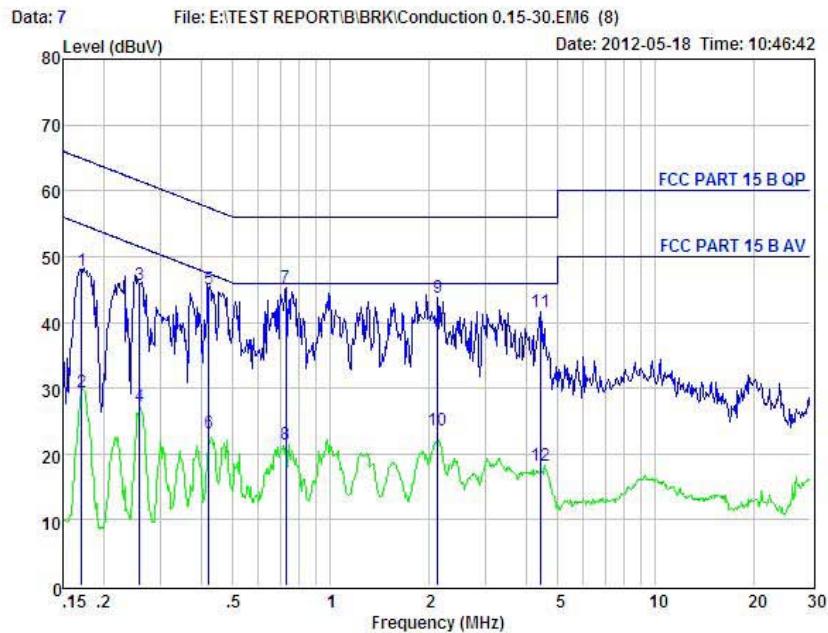

Condition : FCC PART 15 B QP POL: NEUTRAL
 EUT : digital wireless 7" Quand monitor kit
 Model No. : DW702M
 Test Mode : Normal
 Power : AC 120V/50Hz
 Test Engineer: Simple
 Remark :

Item	Freq	Read	LISN	Preamp	Cable	Level	Limit	Margin	Remark
			Factor	Factor	dB	dB	dBuV	dBuV	dBuV
1	0.171	37.96	0.03	-9.72	0.10	47.81	64.90	-17.09	QP
2	0.171	19.64	0.03	-9.72	0.10	29.49	54.90	-25.41	Average
3	0.259	35.79	0.03	-9.72	0.10	45.64	61.47	-15.83	QP
4	0.259	17.46	0.03	-9.72	0.10	27.31	51.47	-24.16	Average
5	0.421	35.11	0.03	-9.72	0.10	44.96	57.42	-12.46	QP
6	0.421	13.32	0.03	-9.72	0.10	23.17	47.42	-24.25	Average
7	0.727	35.45	0.04	-9.72	0.10	45.31	56.00	-10.69	QP
8	0.727	11.50	0.04	-9.72	0.10	21.36	46.00	-24.64	Average
9	2.133	33.86	0.06	-9.70	0.10	43.72	56.00	-12.28	QP
10	2.133	13.68	0.06	-9.70	0.10	23.54	46.00	-22.46	Average
11	4.407	31.70	0.09	-9.68	0.12	41.59	56.00	-14.41	QP
12	4.407	8.37	0.09	-9.68	0.12	18.26	46.00	-27.74	Average

6 Radiation Emission

6.1 Radiation Emission Limits(15.209&249 (a))


Frequency (MHZ)	Field Strength Limits at 3 metres (watts,e.i.r.p.)		
	uV/m	dB uV/m	Measurement distance(m)
0.009-0.490	2400/F(kHz)	XX	300
0.490-1.705	24000/F(kHz)	XX	30
1.705-30	30	29.5	30
30~88	100(3nW)	40	3
88~216	150(6.8nW)	43.5	3
216~960	200(12nW)	46	3
Above960	500(75nW)	54	3
Carrier frequency		93.97(AV)	3
Carrier frequency		113.97(PK)	3

NOTE:


- The tighter limit applies at the band edges.
- Emission Level(dB uV/m)=20log Emission Level(Uv/m)

6.2 Test Setup


See the next page

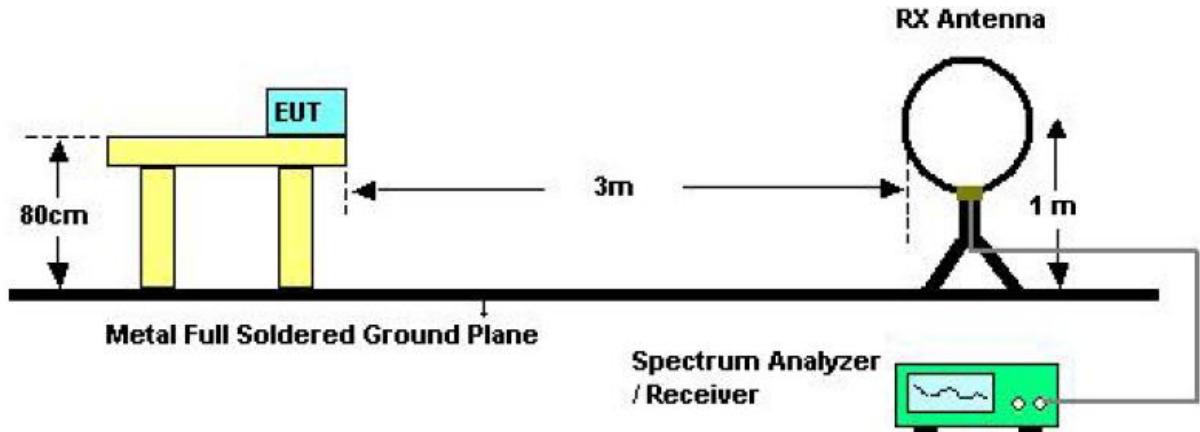

Below 30MHz Test Setup

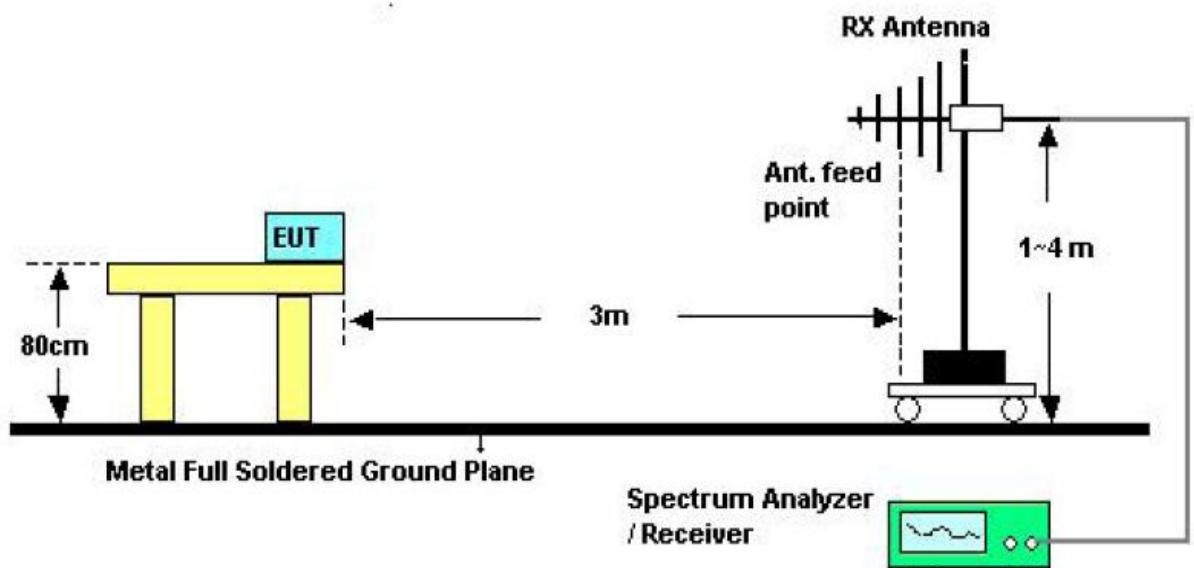

Above 30MHz Test Setup

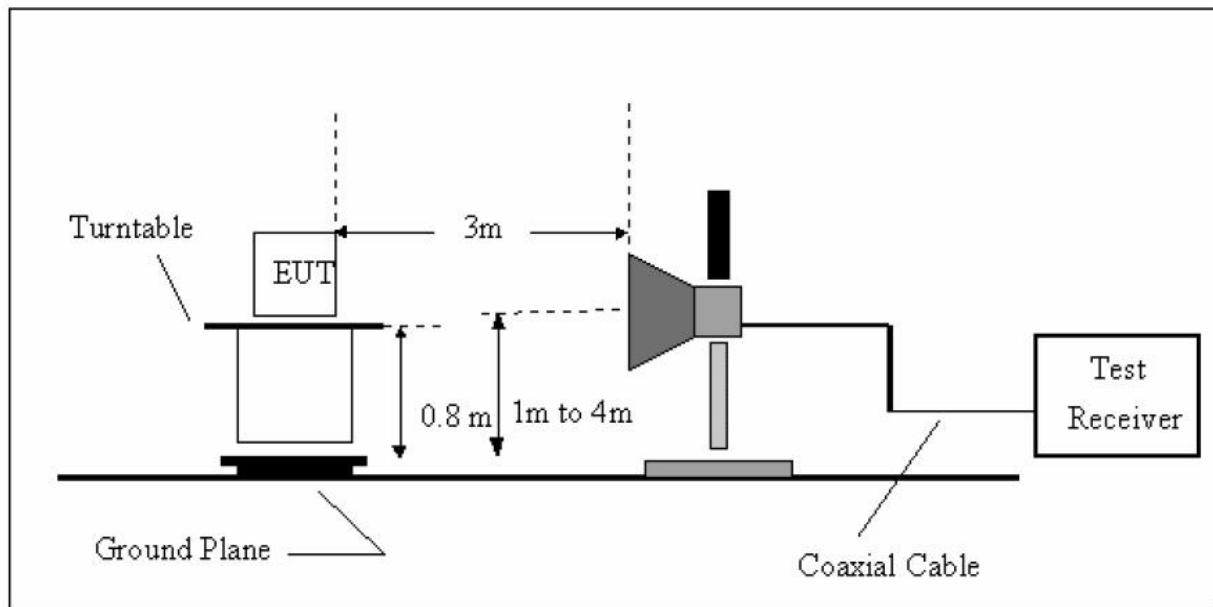

Above 1GHZ Test Setup

6.3 Test Procedure

- a) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz, The EUT was placed on a rotating 0.8 m high above ground,The table was rotated 360 degrees to determine the position of the highest radiation
- b) The Test antenna shall vary between 1m and 4m,Both Horizontal and Vertical antenna are set to make measurement.
- c) The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range.Significant Peaks are then marked.and then Quasi Peak Detector mode remeasured
- d) If Peak value comply with QP limit Below 1GHz.The EUT deemed to comply with QP limit.But the Peak value and average value both need to comply with applicable limit above 1GHz.
- e) For the actual test configuration,please see the test setup photo.

6.4 Test Equipment Setting For emission test.

9KHZ~150KHZ	RBW 200HZ	VBW1KHZ
150KHZ~30MHZ	RBW 9KHZ	VBW 30KHZ
30MHZ~1GHZ	RBW 120KHZ	VBW 300KHZ
Above 1GHZ	RBW 1MHZ	VBW 3MHZ

6.5 Test Condition

Continual Transmitting in maximum power.

6.6 Test Result


PASS.

We have scanned the 10th harmonic from 9KHz to the EUT.

Detailed information please see the following page.



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

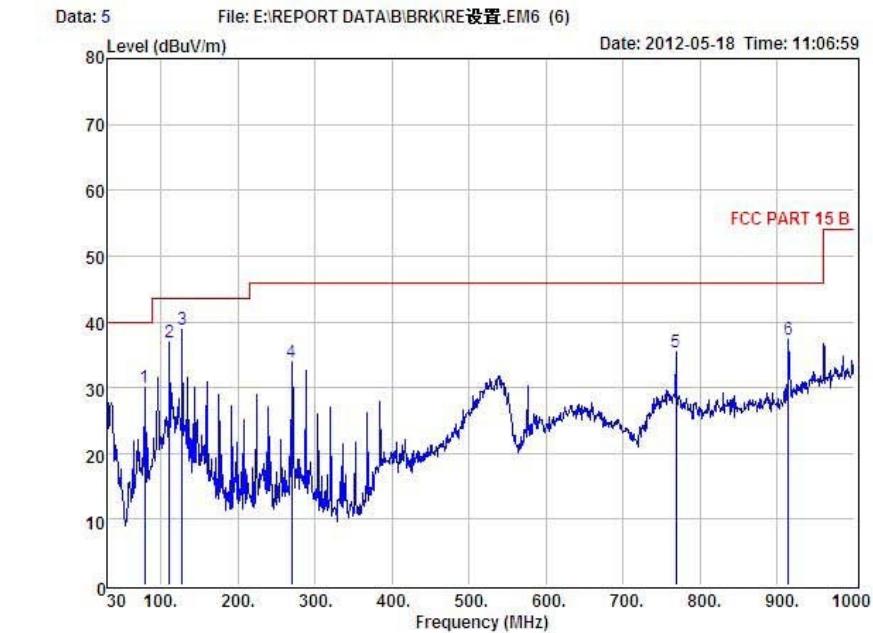


Condition : FCC PART 15 B 3m POL: HORIZONTAL
EUT : digital wireless 7" Quad monitor kit
Model No. : DW702M
Test Mode : Normal
Power : AC 120V/50Hz
Test Engineer : Simple
Remark :

Item	Freq	Read	Antenna	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	Level	Factor	Factor	Loss	dBuV	dBuV	dBuV	
1	79.47	50.71	9.29	30.79	0.76	29.97	40.00	-10.03	QP
2	111.48	55.44	11.32	30.86	0.93	36.83	43.50	-6.67	QP
3	127.97	56.03	12.58	30.89	1.01	38.83	43.50	-4.67	QP
4	269.59	51.20	12.09	31.14	1.77	33.92	46.00	-12.08	QP
5	760.17	43.11	20.47	31.67	3.54	35.45	46.00	-10.55	QP
6	914.64	43.23	21.84	31.63	3.83	37.27	46.00	-8.73	QP



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

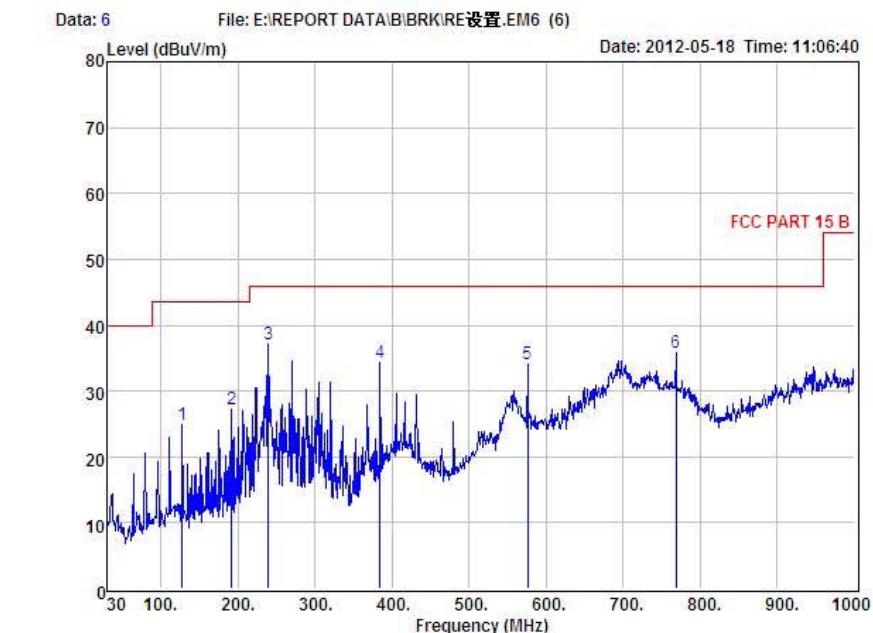

Condition : FCC PART 15 B 3m POL: VERTICAL
EUT : digital wireless 7" Quad monitor kit
Model No. : DW702M
Test Mode : Normal
Power : AC 120V/50Hz
Test Engineer : Simple
Remark :

Item	Freq	Read Level	Antenna Factor	Preamp Factor	Cable Lose	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	127.97	42.04	12.68	30.89	1.01	24.84	43.50	-18.66	QP
2	191.99	46.52	10.36	30.95	1.36	27.29	43.50	-16.21	QP
3	239.52	55.16	11.45	31.09	1.61	37.13	46.00	-8.87	QP
4	384.05	48.93	14.48	31.38	2.38	34.41	46.00	-11.59	QP
5	576.11	44.96	17.85	31.77	3.15	34.19	46.00	-11.81	QP
6	768.17	43.48	20.47	31.67	3.54	35.82	46.00	-10.18	QP

Radiated Emissions Result

EUT	Digital wireless 7" Quad monitor kit	Model Name	DW702M
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX		

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/OP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limits 3m (dBuV/m)	Margin (dBuV/m)
127.97	V	Peak	42.04	-17.2	24.84	43.50	-18.66
191.99	V	Peak	46.52	-19.23	27.29	43.50	-16.21
239.52	V	Peak	55.16	-18.03	37.13	46.00	-8.87
384.05	V	Peak	48.93	-14.52	34.41	46.00	-11.59
576.11	V	Peak	44.96	-10.77	34.19	46.00	-11.81
768.17	V	Peak	43.48	-7.66	35.82	46.00	-10.18

EUT	Digital wireless 7" Quad monitor kit	Model Name	DW702M
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX		

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/OP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limits 3m (dBuV/m)	Margin (dBuV/m)
79.47	H	Peak	50.71	-20.74	29.97	40.00	-10.03
111.48	H	Peak	55.44	-18.61	36.83	43.50	-6.67
127.97	H	Peak	56.03	-17.20	38.83	43.50	-4.67
269.59	H	Peak	51.20	-17.28	33.92	46.00	-12.08
768.17	H	Peak	43.11	-7.66	35.45	46.00	-10.55
914.64	H	Peak	43.23	-5.96	37.27	46.00	-8.73

Notes: --Means other frequency and mode comply with standard requirements and at least have 20dB margin.

--Above is Below 1GHZ test data
Peak value > QP value

Radiated Emissions Result of Inside band (2408.975MHz)

EUT	Digital wireless 7" Quad monitor kit	Model Name	DW702M
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX Low	Antenna polarization	Horizontal/Vertical

Channel Low(2408.975MHz)

Fre. MHz	Plority H/V	Reading dBuV	Antenna Factor dB	Cable Loss dB	Amplifier Gain dB	Correct Factor dB	Measure Result dBuV/m	Limit dBuV/m	Margin dB
2409	H	101.58 (PK)	12.3	1.98	19.36	-5.08	96.50	113.97	-17.47
2409	H	90.64 (AV)	12.3	1.98	19.36	-5.08	85.56	93.97	-8.41
--	H	--	--	--	--	--	--	--	--
2409	V	103.72 (PK)	12.3	1.98	19.36	-5.08	98.64	113.97	-15.33
2409	V	95.24 (AV)	12.3	1.98	19.36	-5.08	90.16	93.97	-3.81
--	V	--	--	--	--	--	--	--	--

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1318.44	H	50.31	---	-10.84	39.47	---	74.00	54.00	-14.53	Peak
1657.22	H	49.86	---	-9.65	40.21	---	74.00	54.00	-13.79	Peak
2139.66	H	49.10	---	-8.36	40.74	---	74.00	54.00	-13.26	Peak
4817.99	H	42.82	---	0.64	43.46	---	74.00	54.00	-10.54	Peak
N/A										
1486.55	V	50.75	---	-10.27	40.48	---	74.00	54.00	-13.52	Peak
2073.22	V	47.02	---	-8.49	38.53	---	74.00	54.00	-15.47	Peak
3462.55	V	45.09	---	-4.95	40.14	---	74.00	54.00	-13.86	Peak
4817.99	V	42.01		0.64	42.65	---	74.00	54.00	-11.35	Peak
N/A										

Notes: 1 --Means other frequency and mode comply with standard requirements and at least have 20dB margin.

Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain

Measurement Result=Reading + Correct Factor

Margin=Measurement Result-Limit

2 -Spectrum setting:

- Peak setting 30MHz-1GHz, RBW=120KHz, VBW=300KHz.
- AV setting 30MHz-1GHz, RBW=1MHz, VBW=10Hz.

Radiated Emissions Result of Inside band (2439.350MHz)

EUT	Digital wireless 7" Quad monitor kit	Model Name	DW702M
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX Mid	Antenna polarization	Horizontal/Vertical

Channel Low(2439.350MHz)

Fre. MHz	Plority H/V	Reading dBuV	Antenna Factor dB	Cable Loss dB	Amplifier Gain dB	Correct Factor dB	Measure Result dBuV/m	Limit dBuV/m	Margin dB
2439	H	99.48 (PK)	12.5	2.01	19.37	-4.86	94.62	113.97	-19.35
2439	H	91.35 (AV)	12.5	2.01	19.37	-4.86	86.49	93.97	-7.48
--	H	--	--	--	--	--	--	--	--
<hr/>									
2439	V	101.82(PK)	12.5	2.01	19.37	-4.86	96.96	113.97	-17.01
2439	V	92.79 (AV)	12.5	2.01	19.37	-4.86	87.93	93.97	-6.04
--	V	--	--	--	--	--	--	--	--

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1416.44	H	48.66	---	-10.29	38.37	---	74.00	54.00	-15.63	Peak
1832.54	H	50.27	---	-9.16	41.11	---	74.00	54.00	-12.89	Peak
2753.33	H	46.76	---	-6.38	40.38	---	74.00	54.00	-13.62	Peak
4878.55	H	42.66	---	0.76	43.42	---	74.00	54.00	-10.58	Peak
N/A										
1273.55	V	49.82	---	-10.96	38.86	---	74.00	54.00	-15.14	Peak
1678.44	V	48.72	---	-9.65	39.07	---	74.00	54.00	-14.93	Peak
2136.55	V	49.08	---	-8.36	40.72	---	74.00	54.00	-13.28	Peak
4878.55	V	41.75		0.76	42.51	---	74.00	54.00	-11.49	Peak
N/A										

Notes: 1 --Means other frequency and mode comply with standard requirements and at least have 20dB margin.

Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain

Measurement Result=Reading + Correct Factor

Margin=Measurement Result-Limit

2 -Spectrum setting:

- Peak setting 30MHz-1GHz, RBW=120KHz, VBW=300KHz.
- AV setting 30MHz-1GHz, RBW=1MHz, VBW=10Hz.

Radiated Emissions Result of Inside band (2474.225MHz)

EUT	Digital wireless 7" Quad monitor kit	Model Name	DW702M
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 5V supply by adapter
Test Mode	TX High	Antenna polarization	Horizontal/Vertical

Channel Low(2474.225MHz)

Fre. MHz	Plority H/V	Reading dBuV	Antenna Factor dB	Cable Loss dB	Amplifier Gain dB	Correct Factor dB	Measure Result dBuV/m	Limit dBuV/m	Margin dB
2474	H	96.53 (PK)	12.6	2.03	19.41	-4.78	91.75	113.97	-22.22
2474	H	88.21 (AV)	12.6	2.03	19.41	-4.78	83.43	93.97	-10.54
--	H	--	--	--	--	--	--	--	--
<hr/>									
2474	V	99.14 (PK)	12.6	2.03	19.41	-4.78	94.36	113.97	-19.61
2474	V	91.96 (AV)	12.6	2.03	19.41	-4.78	87.18	93.97	-6.79
--	V	--	--	--	--	--	--	--	--

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1566.77	H	49.31	---	-10.07	39.24	---	74.00	54.00	-14.76	Peak
2354.33	H	46.77	---	-7.59	39.18	---	74.00	54.00	-14.82	Peak
3658.22	H	45.14	---	-4.38	40.76	---	74.00	54.00	-13.24	Peak
4948.44	H	42.49	---	0.98	43.47	---	74.00	54.00	-10.53	Peak
N/A										
1289.22	V	49.79	---	-10.96	38.83	---	74.00	54.00	-15.17	Peak
1963.55	V	46.36	---	-8.64	37.72	---	74.00	54.00	-16.28	Peak
2675.33	V	46.06	---	-6.94	39.12	---	74.00	54.00	-14.88	Peak
4949.44	V	41.89		0.98	42.87	---	74.00	54.00	-11.13	Peak
N/A										

Notes: 1 --Means other frequency and mode comply with standard requirements and at least have 20dB margin.

Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain

Measurement Result=Reading + Correct Factor

Margin=Measurement Result-Limit

2 -Spectrum setting:

- Peak setting 30MHz-1GHz, RBW=120KHz, VBW=300KHz.
- AV setting 30MHz-1GHz, RBW=1MHz, VBW=10Hz.

7 Occupied bandwidth

7.1 Test limit

Please refer section 15.249

7.2 Method of measurement

- a) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- b) The test receiver RBW set 30KHZ, VBW set 30KHZ, Sweep time set auto.


7.3 Test Setup




7.4 Test Results

Detailed information please see the following page.


CH Low:

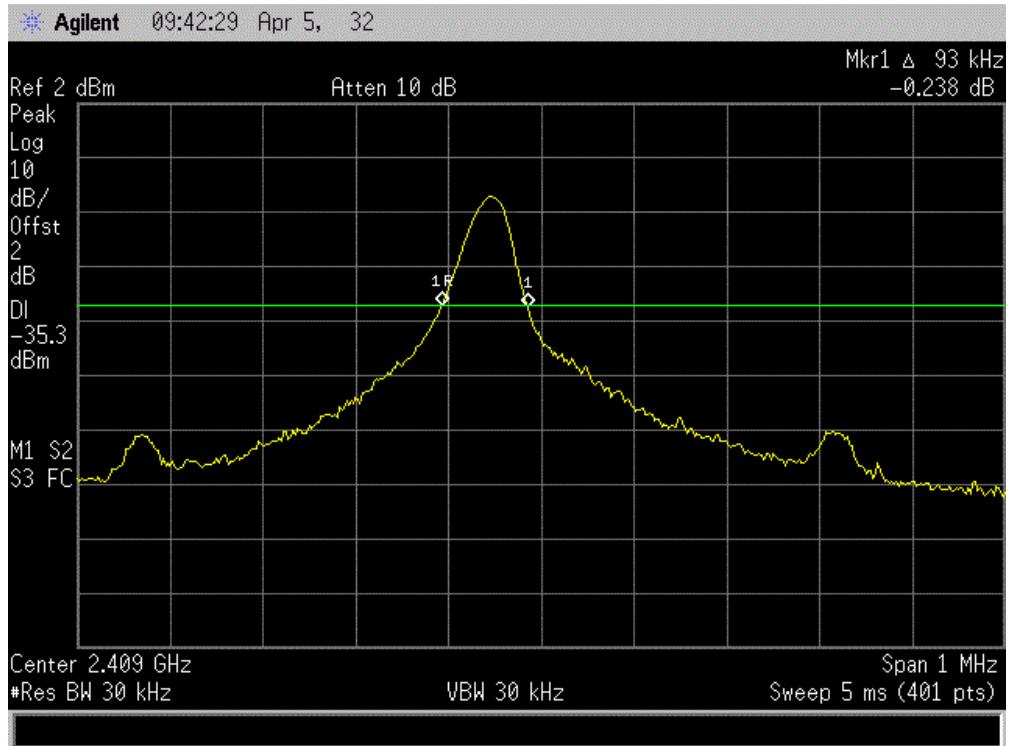

CH Mid:

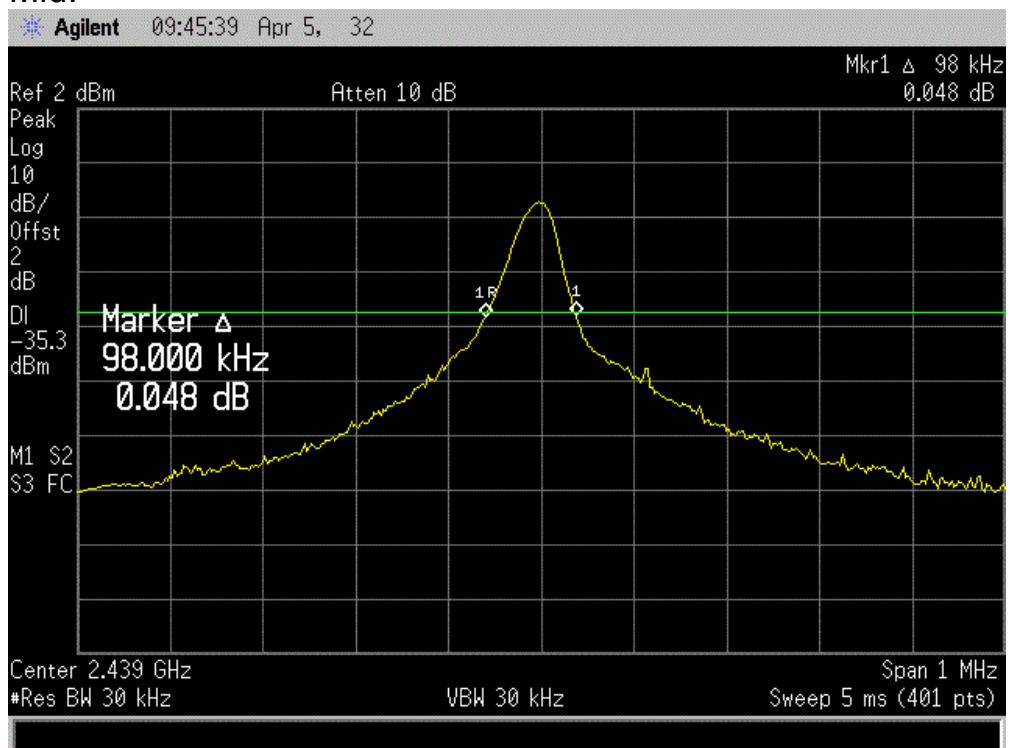

CH High:

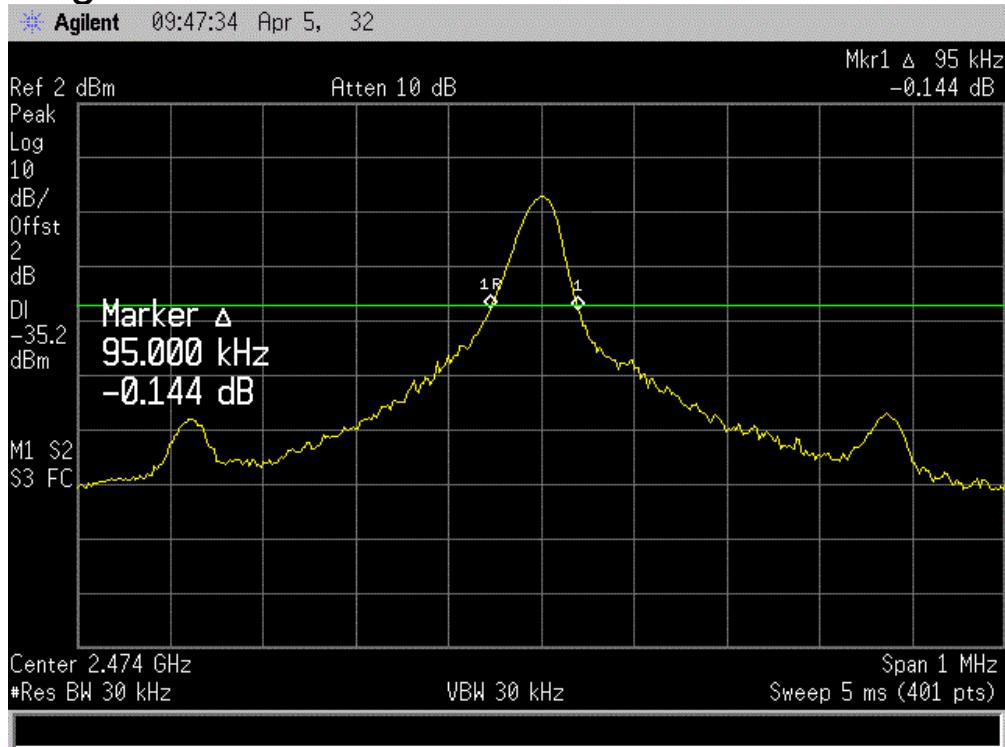

8 Band Edge Check

8.1 Test limit

Please refer section 15.249 and section 15.205.

249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in section 15.209, whichever is the lesser attenuation.

249(e) As shown in section 15.35(b), for frequencies above 1000MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3meters along the antenna azimuth.

8.2 Test Procedure

8.2.1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

8.2.2. Set spectrum analyzer please see the following test plot.

8.2.3. Set the spectrum analyzer as RBW, VBW=1000 KHz,

8.2.4. Max hold, view and count how many channel in the band.

8.3 Test Setup

Please see the section 6.2, Above 1GHZ Test Setup.

8.4 Test Result


PASS.

Detailed information please see the following page.

CH Low :


Detector mode: Peak

Polarity: Horizontal

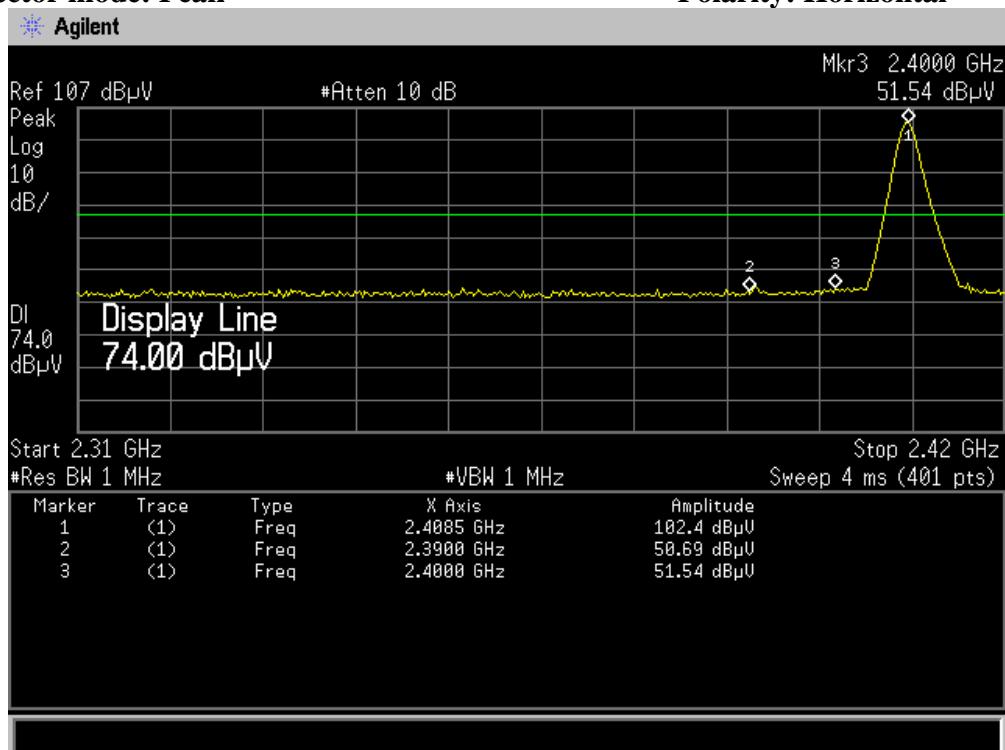

Detector mode: Average


Polarity: Horizontal

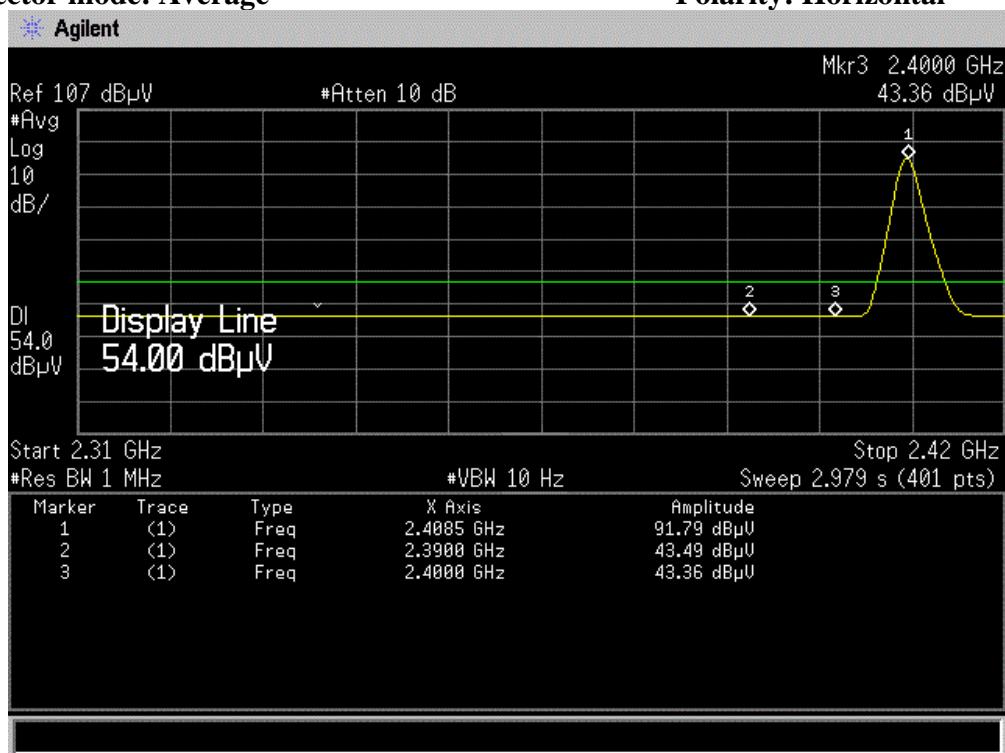

CH High :


Detector mode: Peak

Polarity: Horizontal

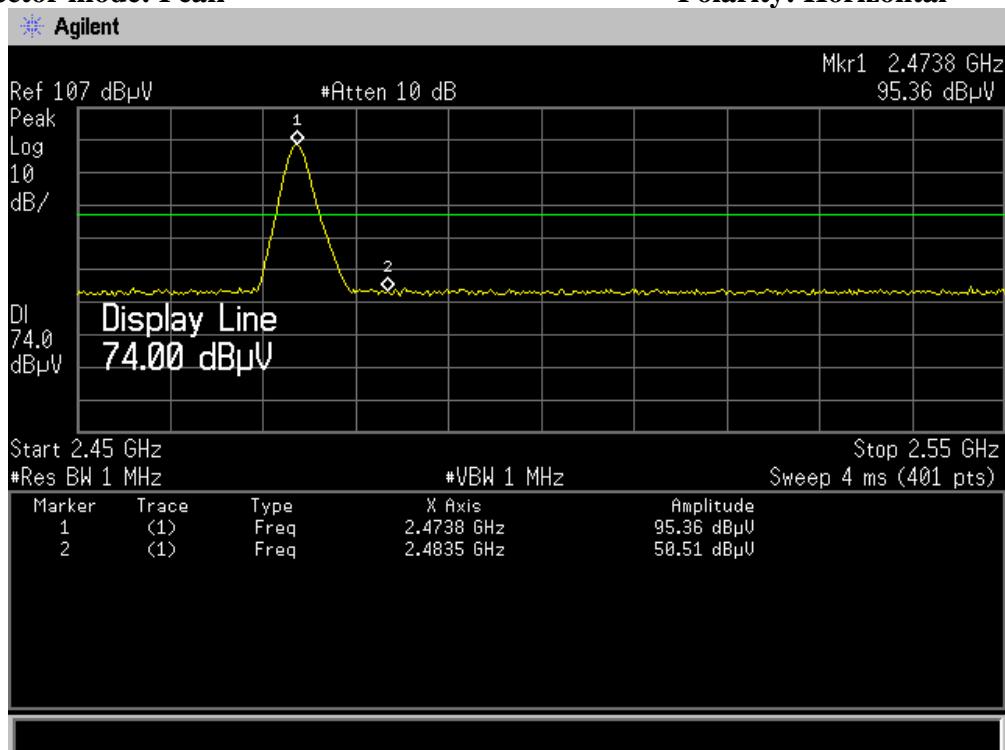

Detector mode: Average


Polarity: Horizontal

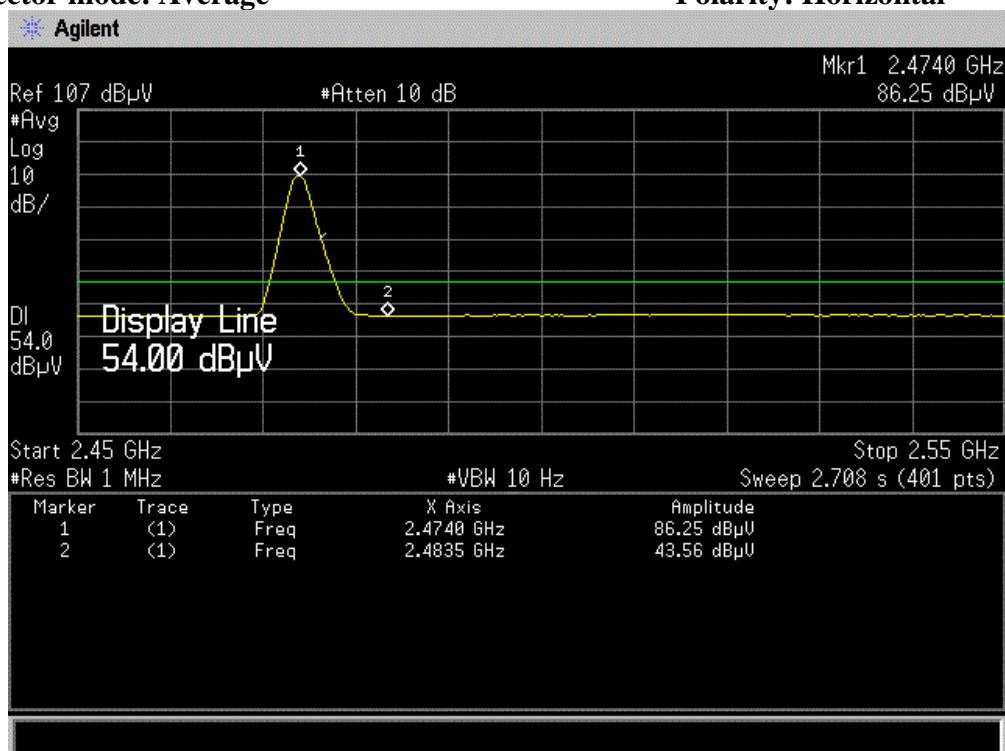

CH Low :

Detector mode: Peak

Polarity: Vertical

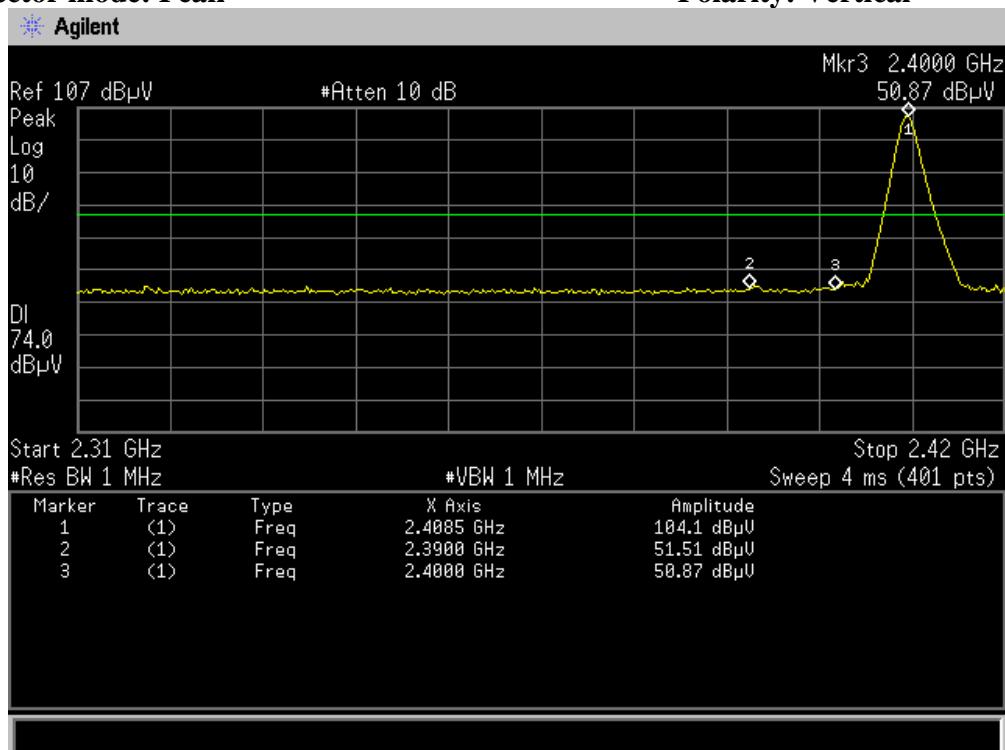

Detector mode: Average


Polarity: Vertical



CH High :


Detector mode: Peak

Polarity: Vertical

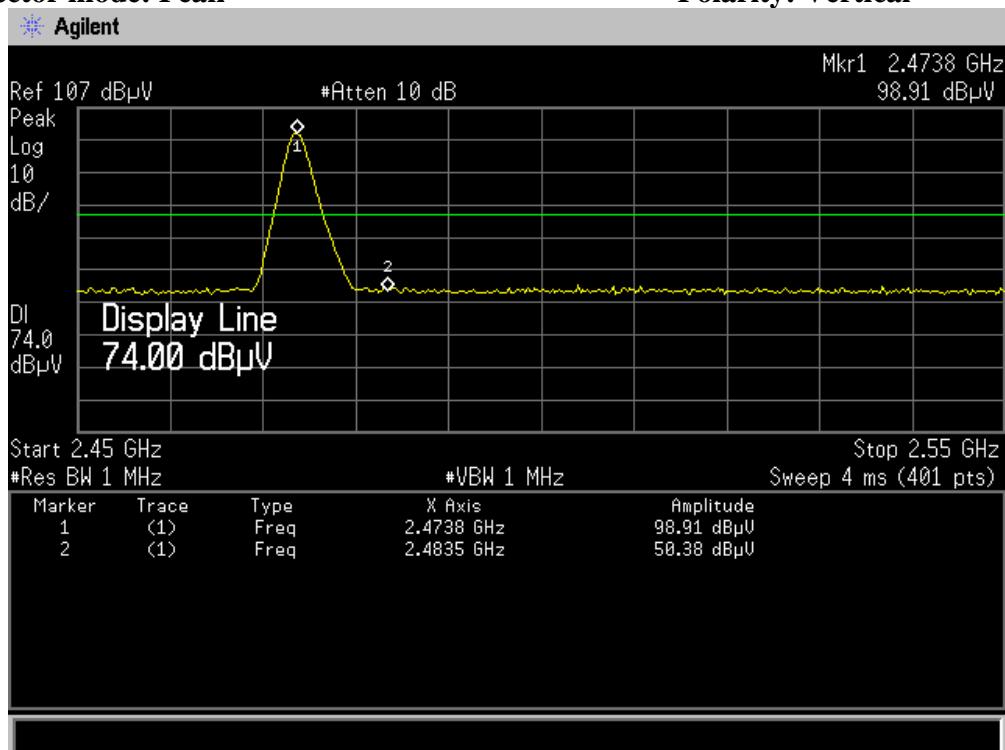

Detector mode: Average

Polarity: Vertical

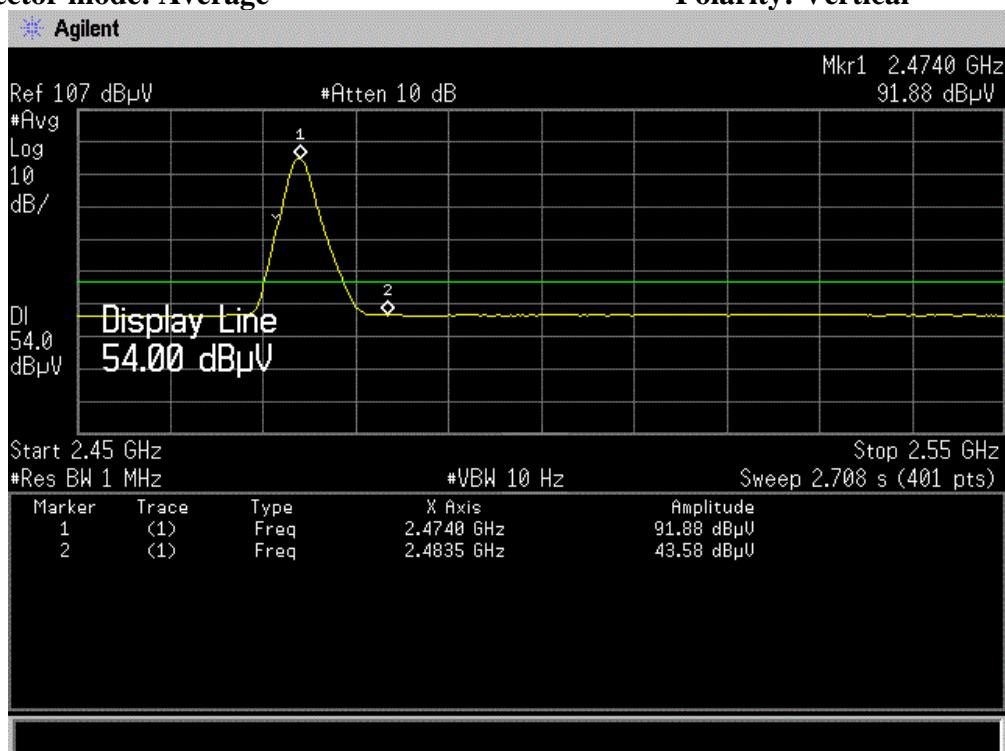

9 Antenna Requirement

9.1 Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2 Antenna Connected Construction

The directional gains of antenna used for transmitting is 2 dBi, and the antenna connector is de- signed with permanent attachment and no consideration of replacement. Please see EUT photo for details.


9.3 Result

The EUT antenna is integral Antenna. It comply with the standard requirement.


10 Photographs of Test Setup

Photographs-Radiated Emission Test Setup in Chamber

Below 1G

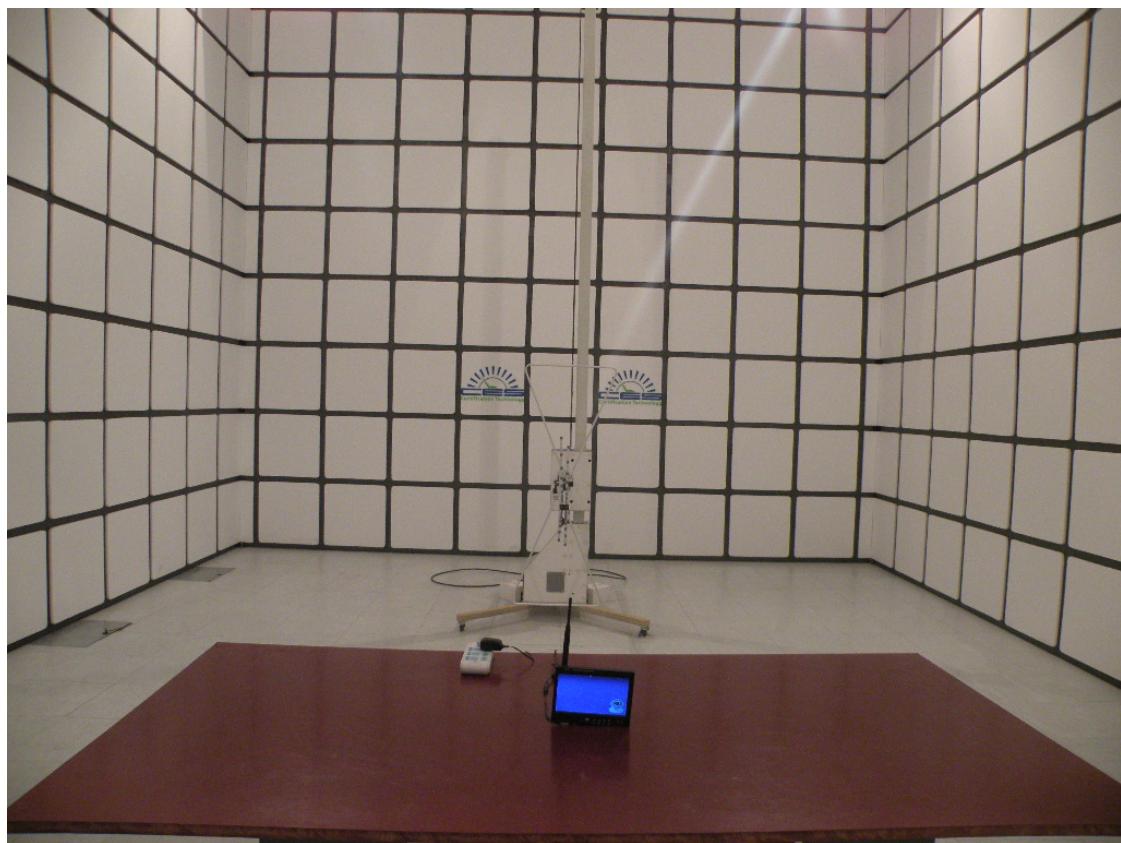

Above 1G

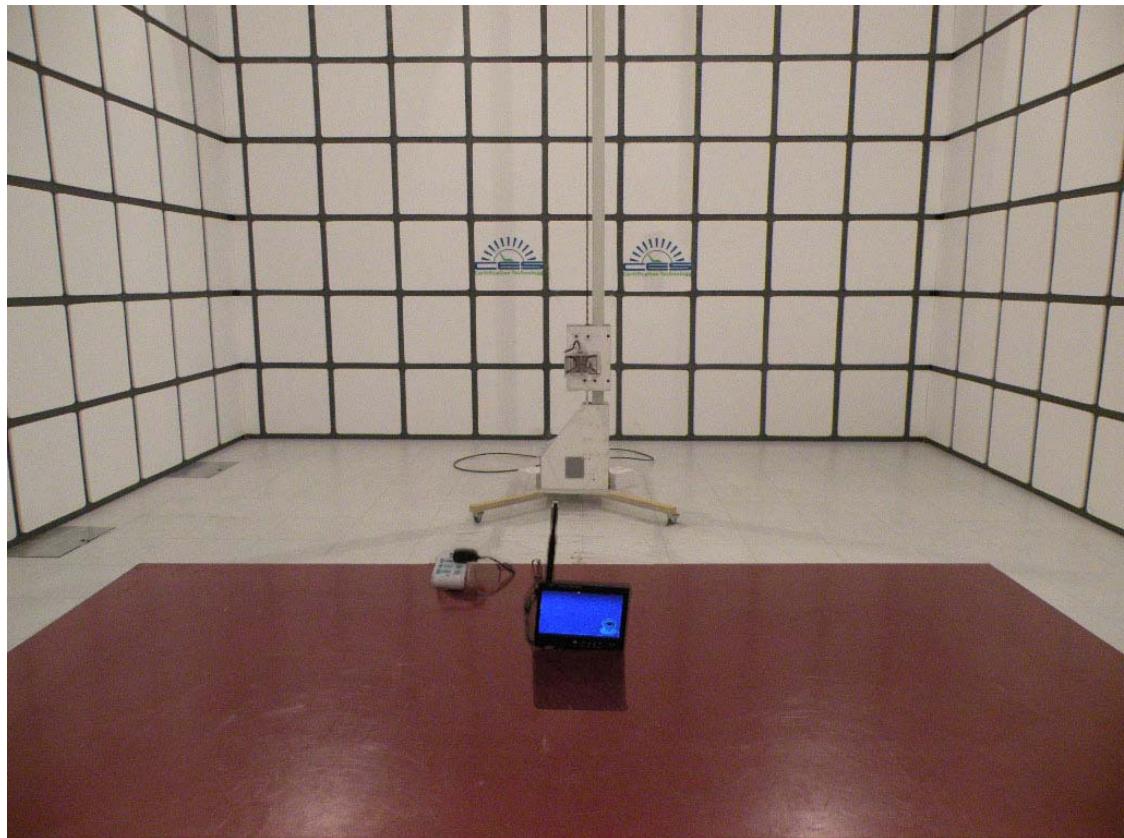

Photographs-Conducted Emission Test Setup



11 Photographs of EUT

Figure 1

Photo of EUT

Front View

Rear View

Full View

Bottom View

Left View

Right View

Full View



Figure 2

Photo of EUT

Front View

Rear View

Top View

Bottom View

Left View

Right View

Full View



Figure 3

Photo of EUT

Front View []

Rear View []

Top View []

Bottom View [✓]

Left View []

Right View []

Full View []



Figure 4

Photo of EUT

Front View [✓]

Rear View []

Top View []

Bottom View []

Left View []

Right View []

Internal View []



Figure 5

Photo of EUT

Front View []

Rear View []

Top View []

Bottom View []

Left View [✓]

Right View []

Internal View []



Figure 6

Photo of EUT

Front View []

Rear View [✓]

Top View []

Bottom View []

Left View []

Right View []

Internal View []



Figure 7

Photo of EUT

Front View []

Rear View []

Top View []

Bottom View []

Left View []

Right View [✓]

Internal View []



Figure 8

Photo of EUT

Front View []

Rear View []

Top View []

Bottom View []

Left View []

Right View []

Internal View [✓]



Figure 9

Photo of EUT

Front View []

Rear View []

Top View []

Bottom View []

Left View []

Right View []

Internal View []

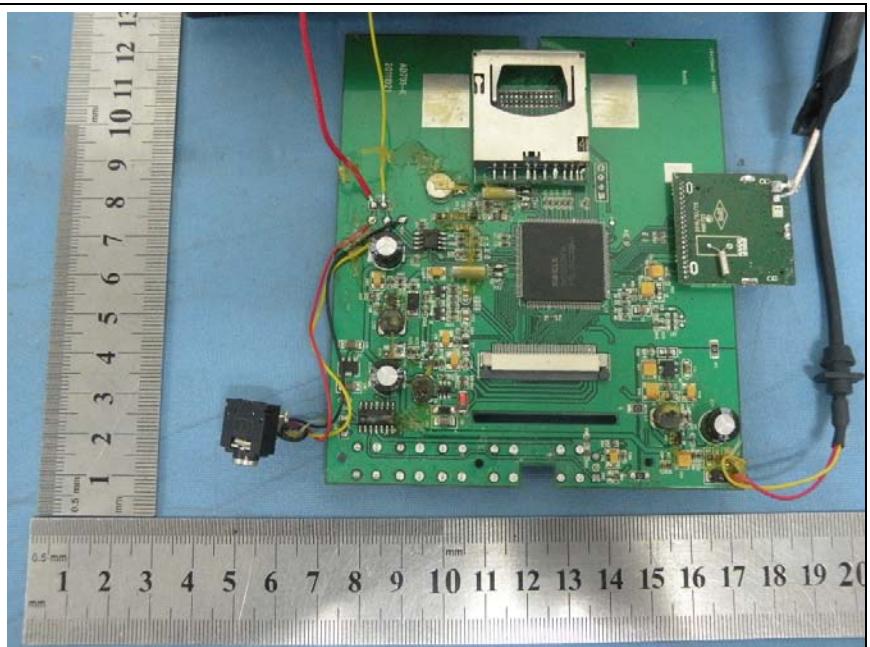


Figure 10

Photo of EUT

Front View []

Rear View []

Top View []

Bottom View []

Left View []

Right View []

Internal View []

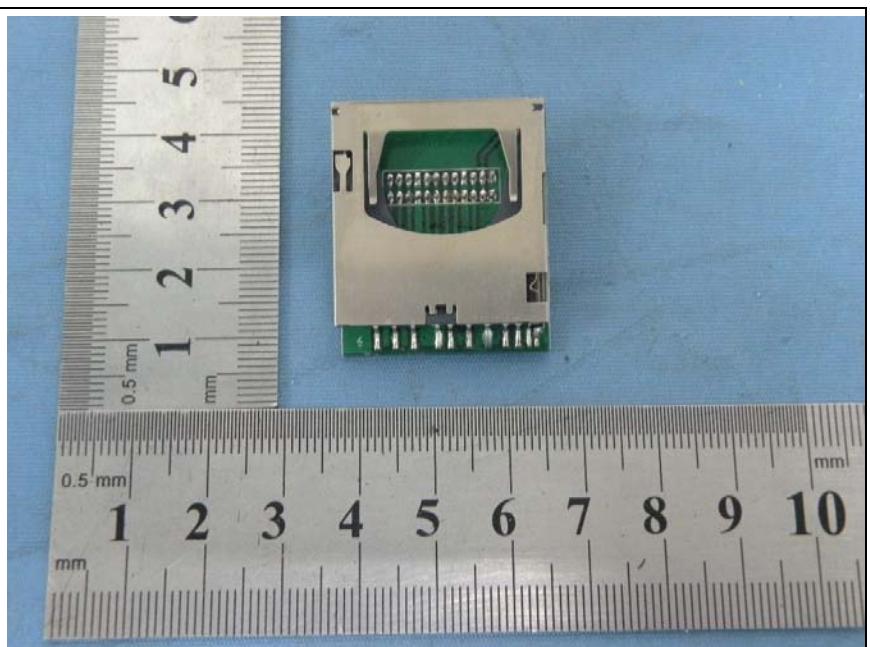


Figure 11

Photo of EUT

Front View []

Rear View []

Top View []

Bottom View []

Left View []

Right View []

Internal View []

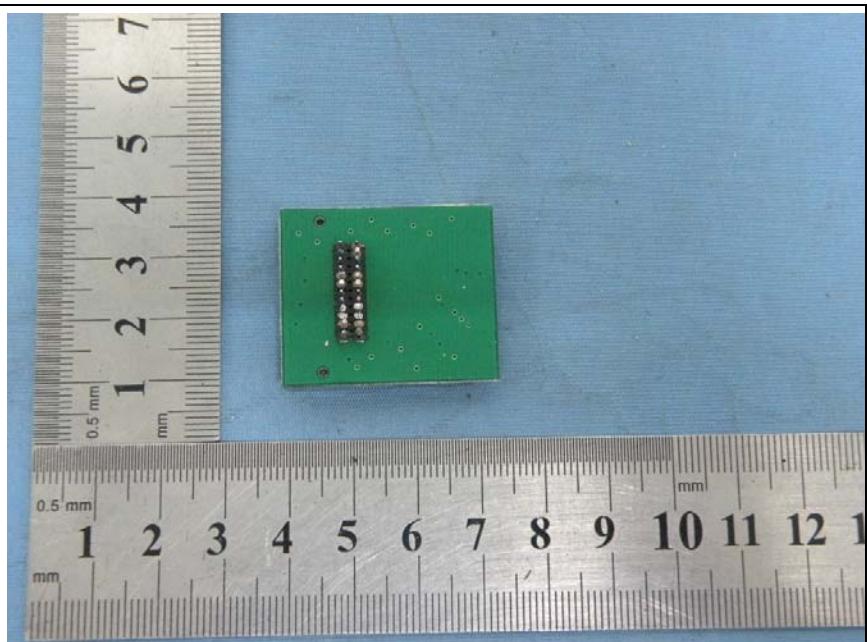


Figure 12

Photo of EUT

Front View []

Rear View []

Top View []

Bottom View []

Left View []

Right View []

Internal View []

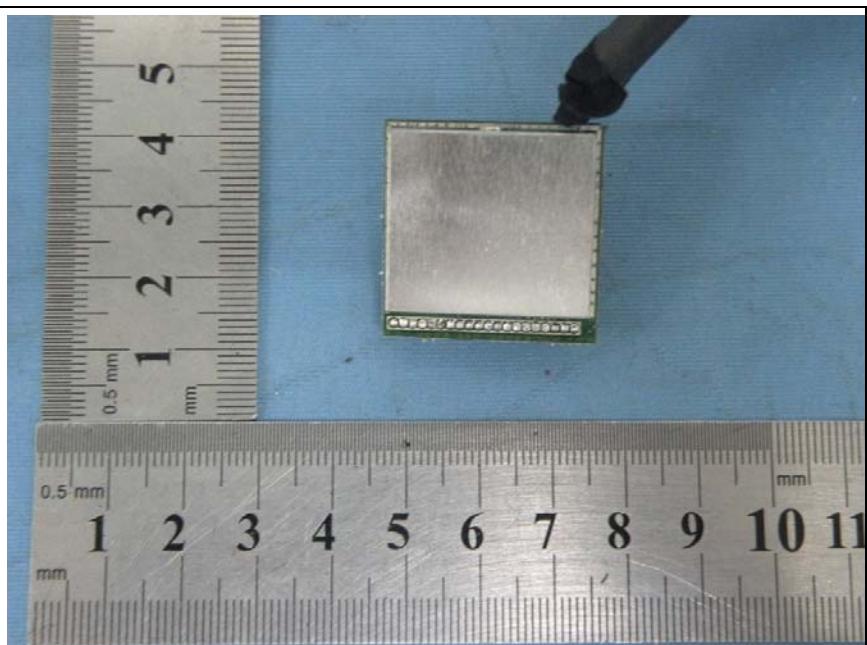


Figure 13

Photo of EUT

Front View []

Rear View []

Top View []

Bottom View []

Left View []

Right View []

Internal View []

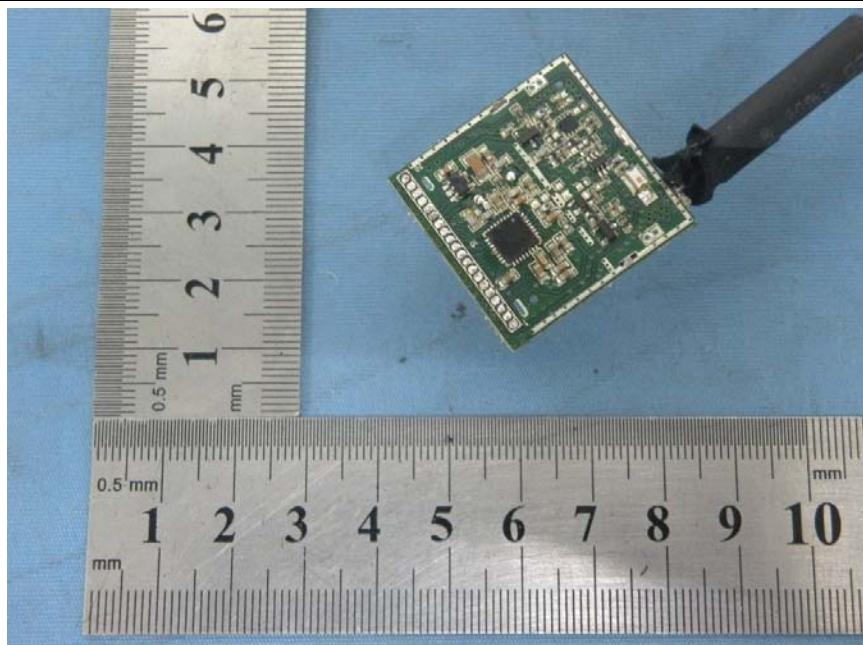


Figure 14

Photo of EUT

Front View []

Rear View []

Top View []

Bottom View []

Left View []

Right View []

Internal View []

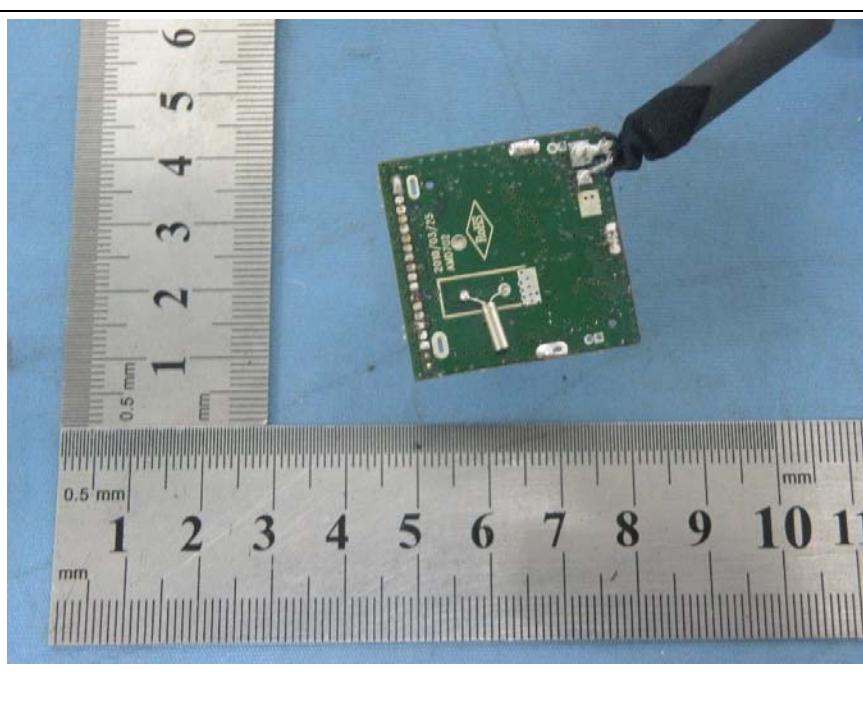


Figure 15

Photo of EUT

Front View []

Rear View []

Top View []

Bottom View []

Left View []

Right View []

Internal View [✓]

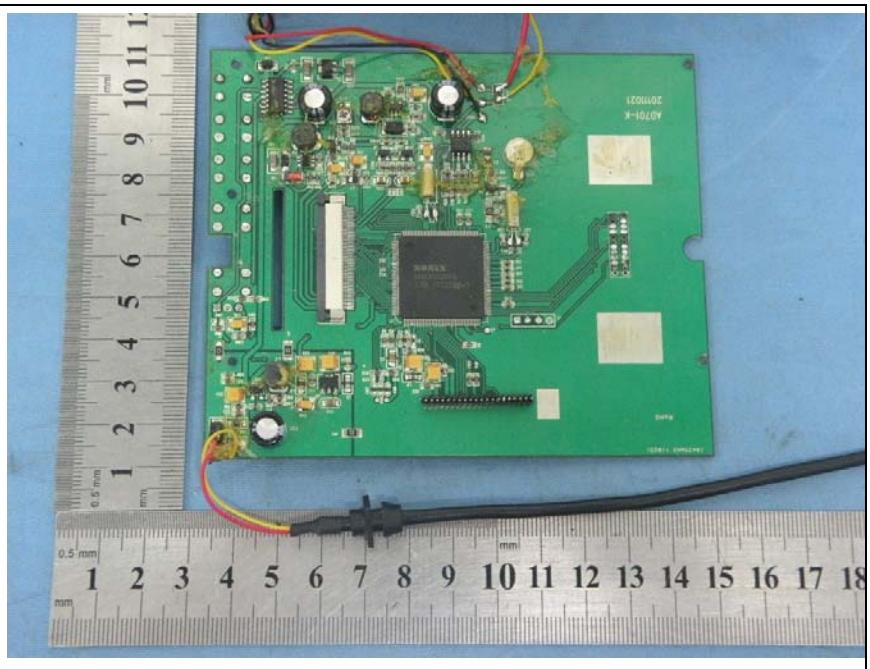


Figure 16

Photo of EUT

Front View []

Rear View []

Top View []

Bottom View []

Left View []

Right View []

Internal View [✓]

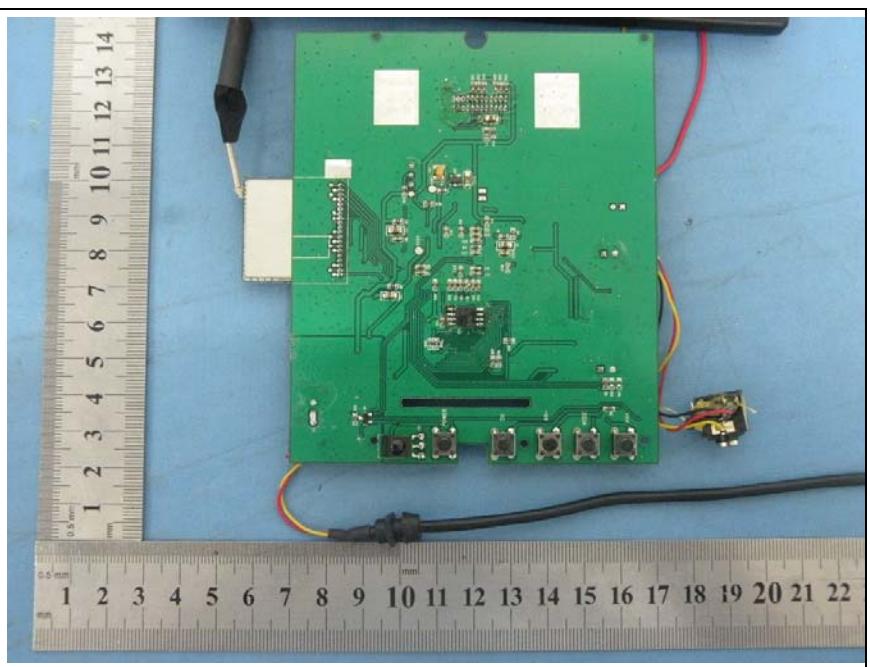


Figure 17

Photo of EUT

Front View []

Rear View []

Top View []

Bottom View []

Left View []

Right View []

Internal View []

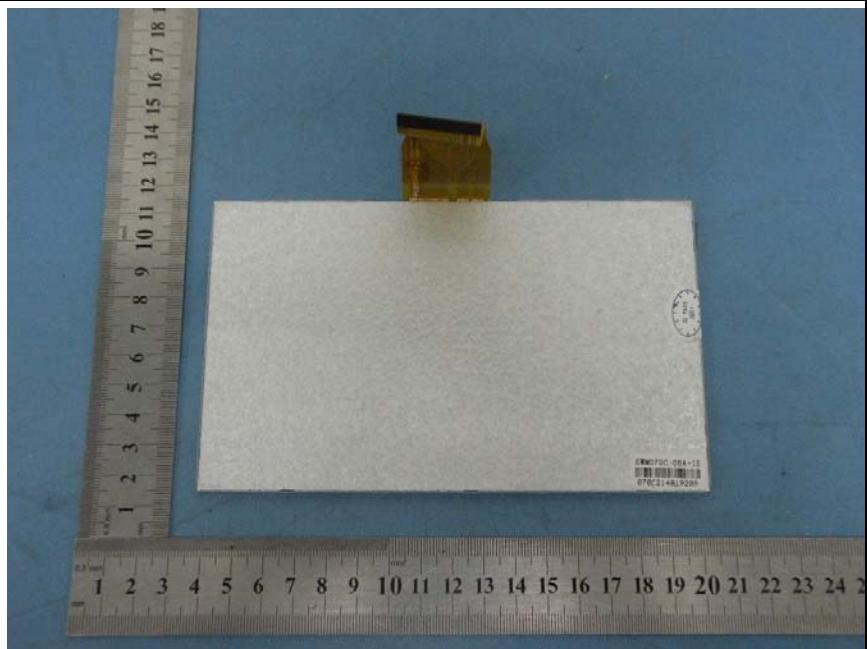


Figure 18

Photo of EUT

Front View []

Rear View []


Top View []

Bottom View []

Left View []

Right View []

Internal View []

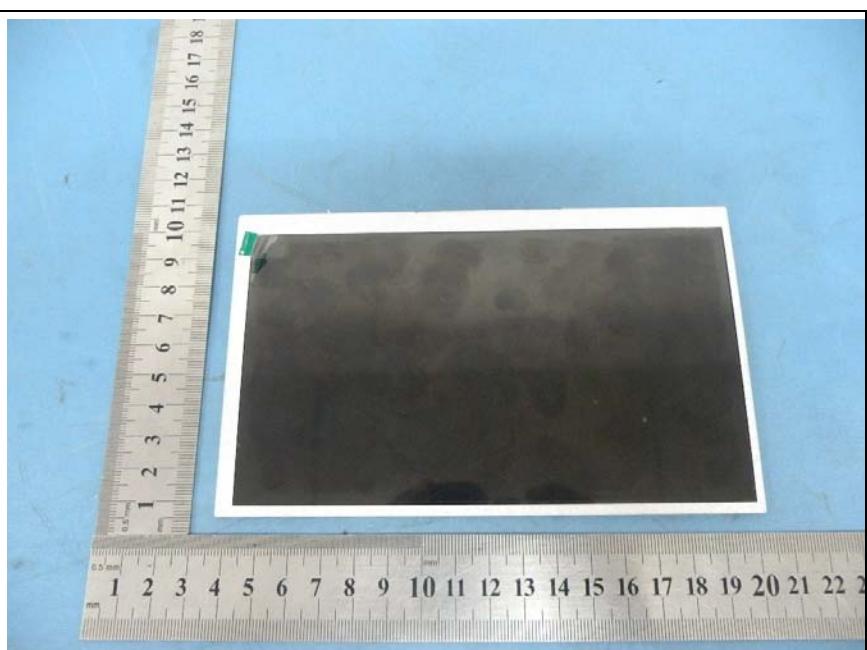

-----END OF THE REPORT-----