

## FCC Test Report

**Report No.:** RFBEAD-WTW-P21031019 R1

**FCC ID:** M82-AIM78S2

**Test Model:** AIM-78S-2

**Series Model:** AIM-78H-2, AIM-78H-2XXXXXXXXXXXXXXXXXX,  
AIM-78S-2XXXXXXXXXXXXXXXXXX (X: maybe 0-9, A-Z or blank) (refer to  
item 3.1 for more details)

**Received Date:** Apr. 01, 2021

**Test Date:** May 20 ~ Sep. 24, 2021

**Issued Date:** Jan. 10, 2022

**Applicant:** ADVANTECH CO., LTD

**Address:** No.1, Alley 20, Lane 26, Rueiguang Rd, Neihu District, Taipei, Taiwan 114

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Modification Record.....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT.....	7
3.2 Description of Test Modes.....	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Duty Cycle of Test Signal.....	12
3.4 Description of Support Units.....	13
3.4.1 Configuration of System under Test.....	13
3.5 General Description of Applied Standards and References.....	15
<b>4 Test Types and Results</b> .....	<b>16</b>
4.1 Radiated Emission and Bandedge Measurement.....	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	16
4.1.2 Test Instruments.....	17
4.1.3 Test Procedures.....	18
4.1.4 Deviation from Test Standard.....	18
4.1.5 Test Setup.....	19
4.1.6 EUT Operating Conditions.....	20
4.1.7 Test Results.....	21
4.2 Conducted Emission Measurement.....	41
4.2.1 Limits of Conducted Emission Measurement.....	41
4.2.2 Test Instruments.....	41
4.2.3 Test Procedures.....	42
4.2.4 Deviation from Test Standard.....	42
4.2.5 Test Setup.....	42
4.2.6 EUT Operating Conditions.....	42
4.2.7 Test Results.....	43
4.3 6dB Bandwidth Measurement.....	51
4.3.1 Limits of 6dB Bandwidth Measurement.....	51
4.3.2 Test Setup.....	51
4.3.3 Test Instruments.....	51
4.3.4 Test Procedure.....	51
4.3.5 Deviation from Test Standard.....	51
4.3.6 EUT Operating Conditions.....	51
4.3.7 Test Result.....	52
4.4 Conducted Output Power Measurement.....	54
4.4.1 Limits of Conducted Output Power Measurement.....	54
4.4.2 Test Setup.....	54
4.4.3 Test Instruments.....	54
4.4.4 Test Procedures.....	54
4.4.5 Deviation from Test Standard.....	54
4.4.6 EUT Operating Conditions.....	54
4.4.7 Test Results.....	55
4.5 Power Spectral Density Measurement.....	56
4.5.1 Limits of Power Spectral Density Measurement.....	56
4.5.2 Test Setup.....	56
4.5.3 Test Instruments.....	56
4.5.4 Test Procedure.....	56
4.5.5 Deviation from Test Standard.....	56
4.5.6 EUT Operating Condition.....	56

4.5.7 Test Results .....	57
4.6 Conducted Out of Band Emission Measurement.....	59
4.6.1 Limits of Conducted Out of Band Emission Measurement .....	59
4.6.2 Test Setup.....	59
4.6.3 Test Instruments .....	59
4.6.4 Test Procedure .....	59
4.6.5 Deviation from Test Standard .....	59
4.6.6 EUT Operating Condition .....	59
4.6.7 Test Results .....	59
<b>Annex A- Band Edge Measurement.....</b>	<b>68</b>
<b>5 Pictures of Test Arrangements.....</b>	<b>72</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>73</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBEAD-WTW-P21031019	Original release.	Dec. 17, 2021
RFBEAD-WTW-P21031019 R1	Revised accessory devices of EUT.	Jan. 10, 2022

## 1 Certificate of Conformity

**Product:** 10.1" Tablet PC

**Brand:** ADVANTECH

**Test Model:** AIM-78S-2

**Series Model:** AIM-78H-2, AIM-78H-2XXXXXXXXXXXXXXXXXX, AIM-78S-2XXXXXXXXXXXXXXXXXX  
(X: maybe 0-9, A-Z or blank) (refer to item 3.1 for more details)

**Sample Status:** Engineering sample


**Applicant:** ADVANTECH CO., LTD

**Test Date:** May 20 ~ Sep. 24, 2021

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.


**Prepared by :**

  
Polly Chien / Specialist

**Date:**

Jan. 10, 2022

**Approved by :**

  
Jeremy Lin / Project Engineer

**Date:**

Jan. 10, 2022

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -1.15dB at 0.57342MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.8dB at 2390.000MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is I-PEX_IV not a standard connector.

Note:

- For 2.4G band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.79 dB
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	10.1" Tablet PC
Brand	ADVANTECH
Test Model	AIM-78S-2
Series Model	AIM-78H-2, AIM-78H-2XXXXXXXXXXXXXXXXXX, AIM-78S-2XXXXXXXXXXXXXXXXXX (X: maybe 0-9, A-Z or blank)
Model Difference	For marketing purpose
Sample Status	Engineering sample
Power Supply Rating	10.8Vdc (Battery) 19Vdc (from adapter)
Modulation Type	802.11b: BPSK, QPSK, CCK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300Mbps
Operating Frequency	2412~2462MHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7
Output Power	144.43mW
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	Refer to note
Cable Supplied	Refer to note

Note:

- The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	TX Function
802.11b	2TX
802.11g	2TX
802.11n (HT20)	2TX
802.11n (HT40)	2TX

2. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter 1	Tamura	XEW1934N	Input: 100-240Vac~1.5A , 50/60Hz Output: 19Vdc / 3.42A Power Line: AC: 1.5m cable without core DC: 1.2m cable without core
Adapter 2 (option)	FSP	FSP065-DBCM1	Input: 100-240Vac~ 2.0-1.0A, 50-60Hz Output: 19Vdc / 3.43A Power Line: AC: 1.5m cable without core DC: 1.5m cable with 1 core
Battery	ADVANTECH	AIM-BAT-10	Rating: 10.8Vdc, 24.84Wh, 2300mAh
Docking Station (option)	ADVANTECH	AIM-DOC-0001	Rating: 19Vdc, 3.42A (VESA Dock)
Docking Station (option)	ADVANTECH	AIM-VED0	Rating: 9 ~ 32Vdc (Vehicle Dock)
Docking Station (option)	ADVANTECH	AIM-OFD-0000	Rating: 19Vdc (Office Dock)
Extension Modules-Barcode scanner (20° ) (option)	ADVANTECH	AIM-EXT0-0040 (20 degree)	Sensor: 640 x 480 CMOS sensor
Extension Modules-Barcode scanner (70° ) (option)	ADVANTECH	AIM-EXT0-0041 (70 degree)	Sensor: 640 x 480 CMOS sensor
WLAN module	USI	MS-01	-

3. The EUT uses the following antennas.

Ant. Type	PIFA										
Ant. Connector	I-PEX_IV										
WiFi/BT_Main											
Frequency (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Peak Gain (dBi)	3.36	3.36	3.15	3.16	3.06	3.25	3.22	3.23	3.32	3.01	3.12
Frequency (MHz)	5150	5250	5350	5450	5550	5650	5750	5850			
Peak Gain (dBi)	4.31	3.23	2.63	1.97	2.33	2.76	2.61	2.71			
WiFi_Aux											
Frequency (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Peak Gain (dBi)	4.19	4.09	4.25	4.12	4.07	3.95	3.86	3.86	3.71	3.46	3.43
Frequency (MHz)	5150	5250	5350	5450	5550	5650	5750	5850			
Peak Gain (dBi)	0.97	1.81	2.02	1.08	1.63	1.95	0.30	0.41			

\* The max. gain was chosen for final tests.

\* The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

4. The device WLAN 2.4GHz, BT and NFC can transmit simultaneously.

The device WLAN 5GHz, BT and NFC can transmit simultaneously.



### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	EUT + Adapter
B	-	√	√	-	EUT + VESA Dock
C	-	√	√	-	EUT + Vehicle Dock
D	-	√	√	-	EUT + Office Dock

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement  
 RE<1G: Radiated Emission below 1GHz  
 PLC: Power Line Conducted Emission  
 APCM: Antenna Port Conducted Measurement

Note:

- The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y plane**.
- For radiated emission (below 1GHz) and power line conducted emission test items chosen the worst maximum fundamental emission level channel.
- "-": Means no effect.

#### Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

#### Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B, C, D	802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5

#### Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B, C, D	802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	23 deg. C, 67% RH	120Vac, 60Hz	Adair Peng
RE<1G	23 deg. C, 67% RH 23 deg. C, 66% RH	120Vac, 60Hz	Adair Peng, Titan Hsu
PLC	23 deg. C, 67% RH 25 deg. C, 75% RH	120Vac, 60Hz	Adair Peng, Edison Lee
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Ivan Tseng

### 3.3 Duty Cycle of Test Signal

Duty cycle of test signal is > 98 %, duty factor is not required.


Duty cycle of test signal is < 98 %, duty factor is required.

802.11b: Duty cycle =  $12.237/12.339 = 0.992$

802.11g: Duty cycle =  $2.026/2.066 = 0.981$

802.11n (HT20): Duty cycle =  $1.886/1.928 = 0.978$ , Duty factor =  $10 * \log(1/0.978) = 0.10$

802.11n (HT40): Duty cycle =  $0.927/0.981 = 0.945$ , Duty factor =  $10 * \log(1/0.945) = 0.25$

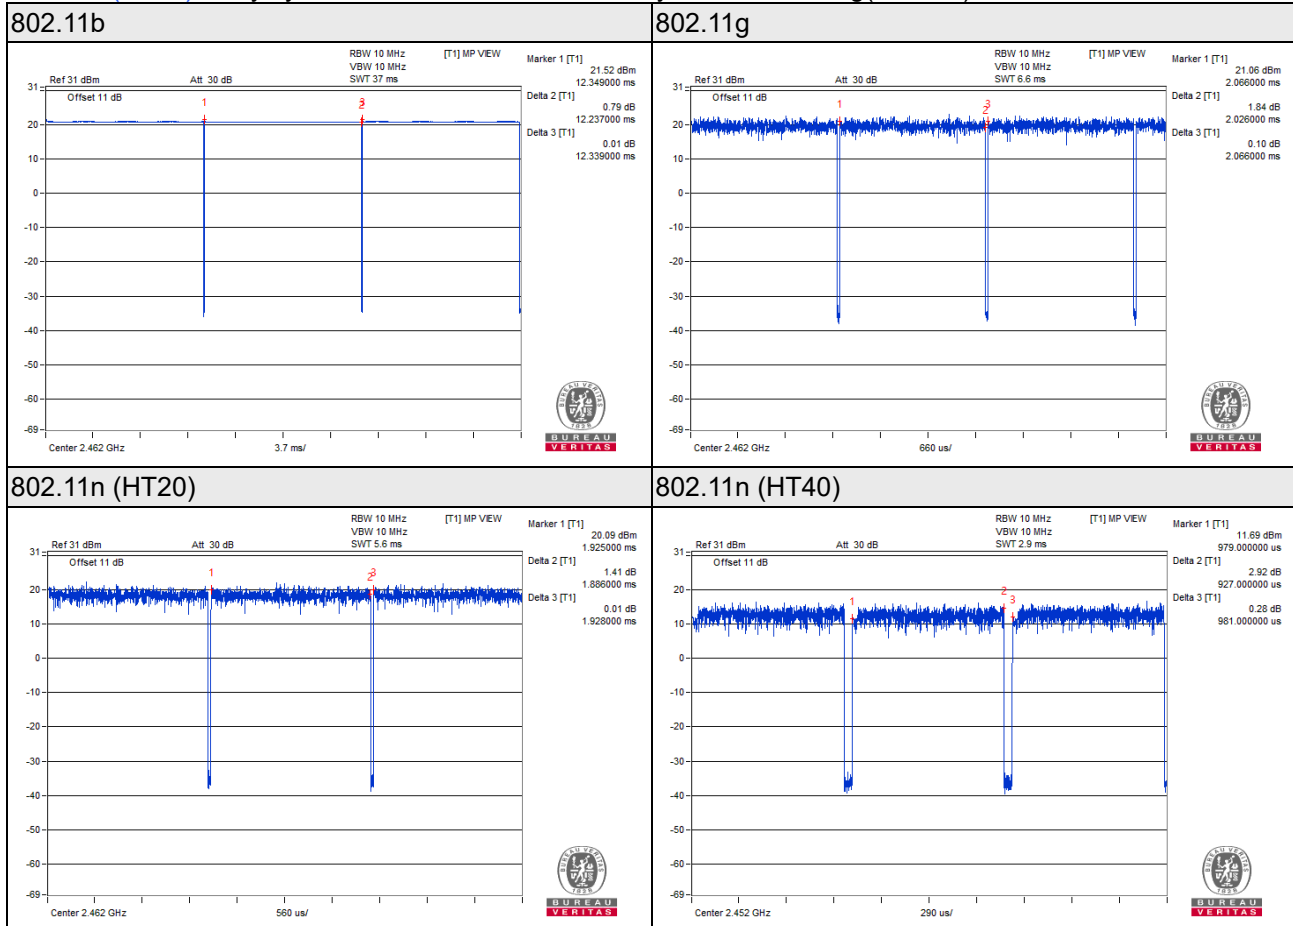

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	Lenovo	20J4 MD A003TW	PF-11H9AK	FCC DoC Approved	-
B.	Flash	HP	v250W	05	NA	Type-A
C.	Flash	HP	v250W	03	NA	Type-A
D.	Earphone	APPLE	NA	NA	NA	-
E.	Load	NA	NA	NA	NA	-
F.	Power Supply	TOPWARD	6306D	809760	NA	-
G.	GPS Antenna	Connectec	SP070809-001	3-6004-031R0 00	NA	Provided by client
H.	Monitor	DELL	SE2416Hc	CN-OWJKMC- 64180-66D-01 3B-A00	NA	-
I.	Docking Station	ADVANTECH	AIM-DOC-0001	NA	NA	Provided by client
J.	Docking Station	ADVANTECH	AIM-VED0	NA	NA	Provided by client
K.	Docking Station	ADVANTECH	AIM-OFD-0000	NA	NA	Provided by client
L.	Adapter	FSP	FSP065-DBCM1	NA	NA	Provided by client

Note:


1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Type C cable	1	1	Y	0	-
2.	Audio cable	1	1.2	N	0	-
3.	RS232 cable	1	1.5	N	0	-
4.	LAN cable	1	7	N	0	RJ45, Cat.5e
5.	Antenna cable	1	5	N	0	Provided by client
6.	Power cable	1	1	N	0	Provided by client
7.	HDMI cable	1	2.0	Y	0	Provided by Lab. (Brand: Amber, Model: HDMI-AA120)
8.	DC Power cable	1	1.5	N	1	Provided by client
9.	AC Power cable	1	1.5	N	0	Provided by client


Note: The core(s) is(are) originally attached to the cable(s).

#### 3.4.1 Configuration of System under Test


Mode A

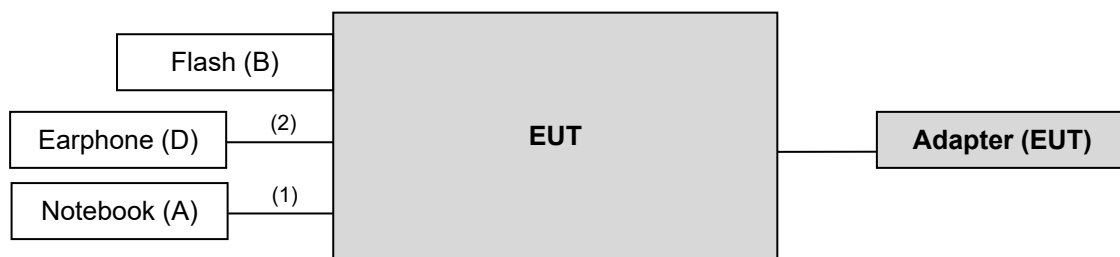


Mode B

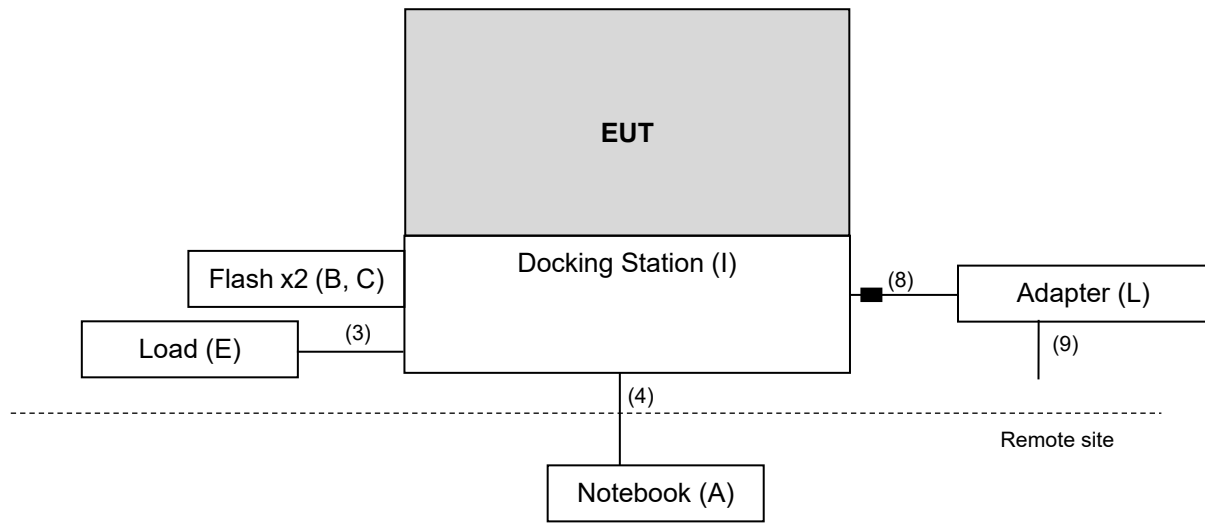

Mode C

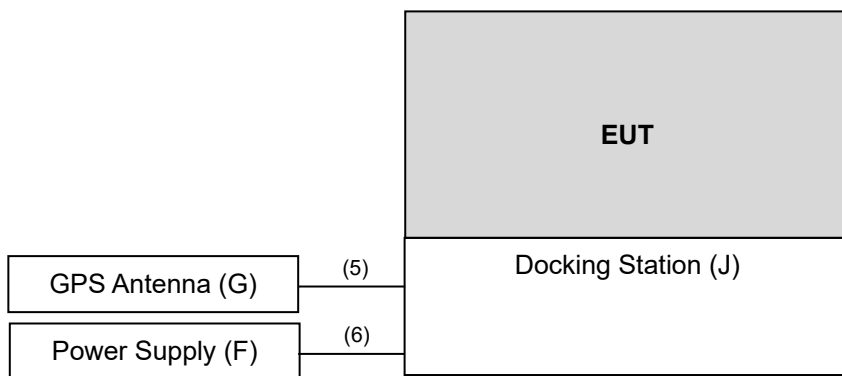

Mode D

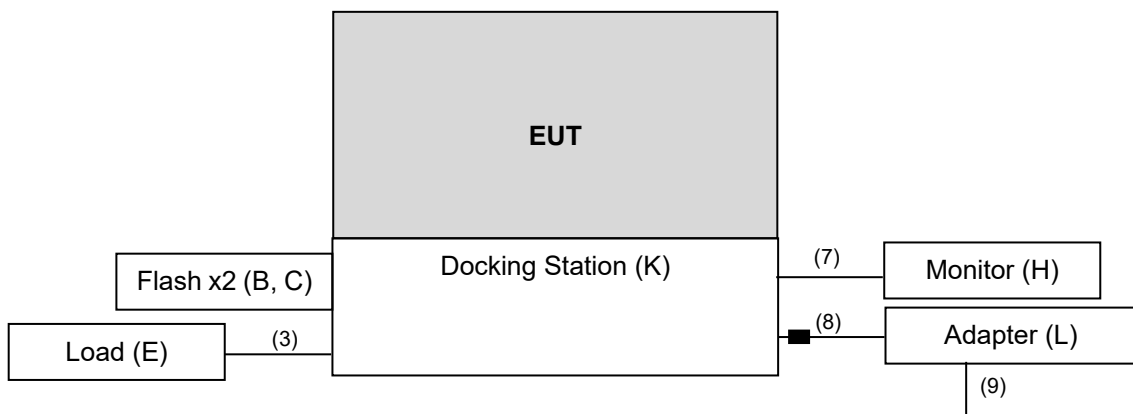

### 3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test standard:**

**FCC Part 15, Subpart C (15.247)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

**KDB 662911 D01 Multiple Transmitter Output v02r01**

All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Note:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Dec. 31, 2020	Dec. 30, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Jun. 09, 2020	Jun. 08, 2021
			Jun. 07, 2021	Jun. 06, 2022
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Nov. 04, 2020	Nov. 03, 2021
HORN Antenna SCHWARZBECK	9120D	209	Nov. 22, 2020	Nov. 21, 2021
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 22, 2020	Nov. 21, 2021
Preamplifier Agilent (Below 1GHz)	8447D	2944A10738	Aug. 16, 2020	Aug. 15, 2021
			Jul. 24, 2021	Jul. 23, 2022
Preamplifier Agilent (Above 1GHz)	8449B	3008A02465	Mar. 22, 2021	Mar. 21, 2022
RF Coaxial Cable WOKEN With 5dB PAD	8D-FB	Cable-CH3-01	Aug. 16, 2020	Aug. 15, 2021
			Jul. 24, 2021	Jul. 23, 2022
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Aug. 16, 2020	Aug. 15, 2021
			Jul. 24, 2021	Jul. 23, 2022
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 104&EMC104-SM -SM-8000	Cable-CH3-03 (309224+170907)	Aug. 16, 2020	Aug. 15, 2021
			Jul. 24, 2021	Jul. 23, 2022
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Peak Power Analyzer KEYSIGHT	8990B	MY51000485	Jan. 19, 2021	Jan. 18, 2022
Wideband Power Sensor KEYSIGHT	N1923A	MY58020002	Jan. 11, 2021	Jan. 10, 2022

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The test was performed in HwaYa Chamber 3.

### 4.1.3 Test Procedures

#### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

#### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.  
(802.11b: RBW = 1MHz, VBW = 10Hz; 802.11g: RBW = 1MHz, VBW = 10Hz;  
802.11n (HT20): RBW = 1MHz, VBW = 1kHz; 802.11n (HT40): RBW = 1MHz, VBW = 3kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

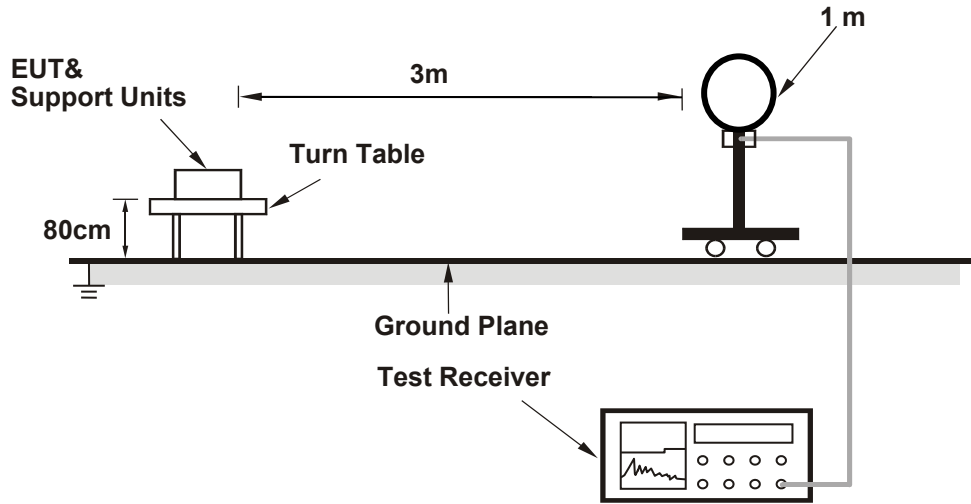

##### For Radiated emission 30MHz to 1GHz

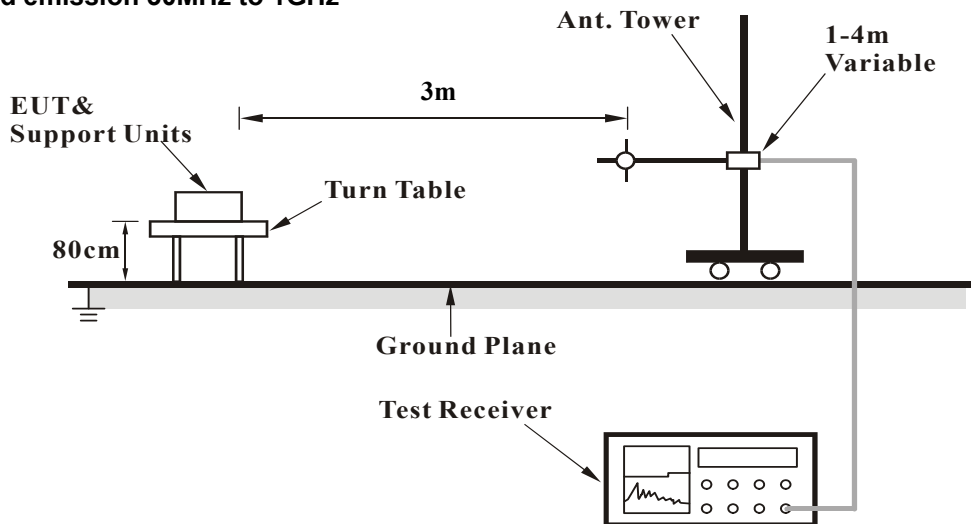

### For Radiated emission above 1GHz

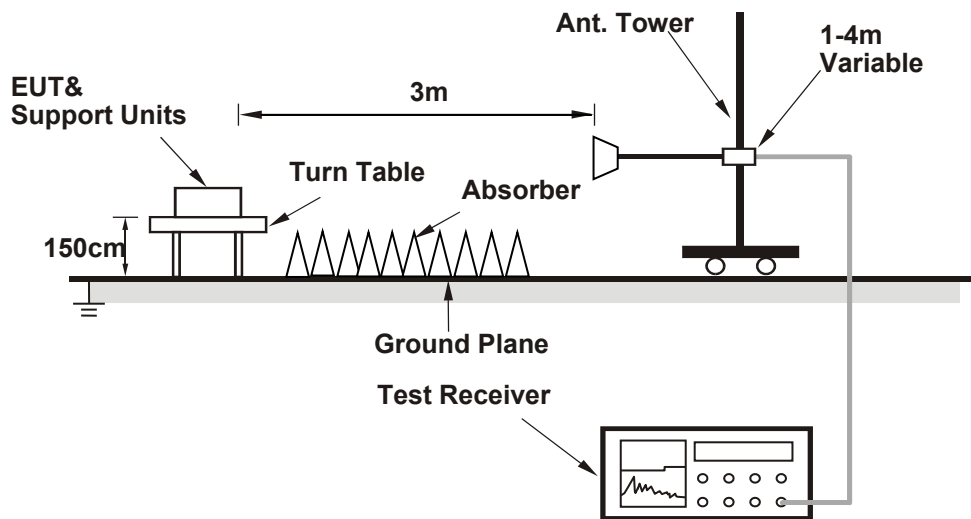

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

##### Mode A

- The EUT powered by adapter.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via USB cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.

##### Mode B

- The EUT powered by cradle.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via LAN cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.

##### Mode C

- The EUT powered by cradle.
- The EUT under transmission condition continuously at specific channel frequency.

##### Mode D

- The EUT powered by cradle.
- The EUT communicated with monitor via HDMI cables and transmission condition continuously at specific channel frequency.

#### 4.1.7 Test Results

Above 1GHz worst-Case data:

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.3 PK	74.0	-11.7	1.01 H	47	27.9	34.4
2	2390.00	45.8 AV	54.0	-8.2	1.01 H	47	11.4	34.4
3	*2412.00	108.7 PK			1.01 H	47	74.4	34.3
4	*2412.00	105.9 AV			1.01 H	47	71.6	34.3
5	4824.00	54.9 PK	74.0	-19.1	2.38 H	220	48.5	6.4
6	4824.00	49.3 AV	54.0	-4.7	2.38 H	220	42.9	6.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.1 PK	74.0	-12.9	1.49 V	67	26.7	34.4
2	2390.00	45.6 AV	54.0	-8.4	1.49 V	67	11.2	34.4
3	*2412.00	108.3 PK			1.49 V	67	74.0	34.3
4	*2412.00	105.5 AV			1.49 V	67	71.2	34.3
5	4824.00	52.0 PK	74.0	-22.0	3.03 V	149	45.6	6.4
6	4824.00	44.8 AV	54.0	-9.2	3.03 V	149	38.4	6.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.0 PK			1.69 H	44	75.7	34.3
2	*2437.00	107.3 AV			1.69 H	44	73.0	34.3
3	4874.00	52.7 PK	74.0	-21.3	3.18 H	201	46.9	5.8
4	4874.00	47.8 AV	54.0	-6.2	3.18 H	201	42.0	5.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.5 PK			1.58 V	63	75.2	34.3
2	*2437.00	106.8 AV			1.58 V	63	72.5	34.3
3	4874.00	49.7 PK	74.0	-24.3	2.96 V	153	43.9	5.8
4	4874.00	43.3 AV	54.0	-10.7	2.96 V	153	37.5	5.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.2 PK			1.90 H	44	76.8	34.4
2	*2462.00	108.5 AV			1.90 H	44	74.1	34.4
3	2483.50	60.6 PK	74.0	-13.4	1.90 H	44	26.2	34.4
4	2483.50	47.5 AV	54.0	-6.5	1.90 H	44	13.1	34.4
5	4924.00	53.1 PK	74.0	-20.9	2.42 H	216	47.4	5.7
6	4924.00	48.7 AV	54.0	-5.3	2.42 H	216	43.0	5.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.7 PK			1.62 V	72	76.3	34.4
2	*2462.00	108.0 AV			1.62 V	72	73.6	34.4
3	2483.50	60.1 PK	74.0	-13.9	1.62 V	72	25.7	34.4
4	2483.50	47.1 AV	54.0	-6.9	1.62 V	72	12.7	34.4
5	4924.00	50.2 PK	74.0	-23.8	3.17 V	142	44.5	5.7
6	4924.00	44.3 AV	54.0	-9.7	3.17 V	142	38.6	5.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.3 PK	74.0	-5.7	1.70 H	52	33.9	34.4
2	<b>2390.00</b>	<b>53.2 AV</b>	<b>54.0</b>	<b>-0.8</b>	<b>1.70 H</b>	<b>52</b>	<b>18.8</b>	<b>34.4</b>
3	*2412.00	112.1 PK			1.70 H	52	77.8	34.3
4	*2412.00	101.5 AV			1.70 H	52	67.2	34.3
5	4824.00	51.1 PK	74.0	-22.9	2.43 H	220	44.7	6.4
6	4824.00	36.9 AV	54.0	-17.1	2.43 H	220	30.5	6.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.9 PK	74.0	-7.1	2.38 V	77	32.5	34.4
2	2390.00	52.4 AV	54.0	-1.6	2.38 V	77	18.0	34.4
3	*2412.00	112.9 PK			2.38 V	77	78.6	34.3
4	*2412.00	102.1 AV			2.38 V	77	67.8	34.3
5	4824.00	50.6 PK	74.0	-23.4	2.70 V	143	44.2	6.4
6	4824.00	35.5 AV	54.0	-18.5	2.70 V	143	29.1	6.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.



RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	115.5 PK			2.09 H	44	81.2	34.3
2	*2437.00	105.8 AV			2.09 H	44	71.5	34.3
3	4874.00	57.1 PK	74.0	-16.9	2.04 H	146	51.3	5.8
4	4874.00	44.2 AV	54.0	-9.8	2.04 H	146	38.4	5.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	115.7 PK			1.73 V	70	81.4	34.3
2	*2437.00	106.3 AV			1.73 V	70	72.0	34.3
3	4874.00	51.4 PK	74.0	-22.6	2.57 V	139	45.6	5.8
4	4874.00	38.6 AV	54.0	-15.4	2.57 V	139	32.8	5.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.6 PK			2.30 H	44	78.2	34.4
2	*2462.00	103.1 AV			2.30 H	44	68.7	34.4
3	2483.50	65.1 PK	74.0	-8.9	2.30 H	44	30.7	34.4
4	2483.50	53.0 AV	54.0	-1.0	2.30 H	44	18.6	34.4
5	4924.00	49.3 PK	74.0	-24.7	2.04 H	154	43.6	5.7
6	4924.00	37.9 AV	54.0	-16.1	2.04 H	154	32.2	5.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.9 PK			1.54 V	69	79.5	34.4
2	*2462.00	104.0 AV			1.54 V	69	69.6	34.4
3	2483.50	65.0 PK	74.0	-9.0	1.54 V	69	30.6	34.4
4	2483.50	51.8 AV	54.0	-2.2	1.54 V	69	17.4	34.4
5	4874.00	47.2 PK	74.0	-26.8	2.77 V	144	41.4	5.8
6	4874.00	34.8 AV	54.0	-19.2	2.77 V	144	29.0	5.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.9 PK	74.0	-6.1	2.35 H	49	33.5	34.4
2	2390.00	52.7 AV	54.0	-1.3	2.35 H	49	18.3	34.4
3	*2412.00	108.8 PK			2.35 H	49	74.5	34.3
4	*2412.00	97.5 AV			2.35 H	49	63.2	34.3
5	4824.00	49.7 PK	74.0	-24.3	2.08 H	144	43.3	6.4
6	4824.00	38.3 AV	54.0	-15.7	2.08 H	144	31.9	6.4

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.2 PK	74.0	-7.8	1.02 V	69	31.8	34.4
2	2390.00	52.8 AV	54.0	-1.2	1.02 V	69	18.4	34.4
3	*2412.00	108.7 PK			1.02 V	69	74.4	34.3
4	*2412.00	98.0 AV			1.02 V	69	63.7	34.3
5	4824.00	47.4 PK	74.0	-26.6	2.41 V	162	41.0	6.4
6	4824.00	35.2 AV	54.0	-18.8	2.41 V	162	28.8	6.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	115.5 PK			1.87 H	45	81.2	34.3
2	*2437.00	104.9 AV			1.87 H	45	70.6	34.3
3	4874.00	54.1 PK	74.0	-19.9	2.09 H	150	48.3	5.8
4	4874.00	41.7 AV	54.0	-12.3	2.09 H	150	35.9	5.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	117.0 PK			1.12 V	73	82.7	34.3
2	*2437.00	106.0 AV			1.12 V	73	71.7	34.3
3	4874.00	47.9 PK	74.0	-26.1	2.48 V	162	42.1	5.8
4	4874.00	35.7 AV	54.0	-18.3	2.48 V	162	29.9	5.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.0 PK			2.44 H	48	75.6	34.4
2	*2462.00	99.4 AV			2.44 H	48	65.0	34.4
3	2483.50	63.6 PK	74.0	-10.4	2.44 H	48	29.2	34.4
4	2483.50	52.6 AV	54.0	-1.4	2.44 H	48	18.2	34.4
5	4924.00	48.6 PK	74.0	-25.4	2.08 H	144	42.9	5.7
6	4924.00	37.5 AV	54.0	-16.5	2.08 H	144	31.8	5.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.2 PK			1.30 V	68	77.8	34.4
2	*2462.00	101.7 AV			1.30 V	68	67.3	34.4
3	2483.50	65.2 PK	74.0	-8.8	1.30 V	68	30.8	34.4
4	2483.50	52.8 AV	54.0	-1.2	1.30 V	68	18.4	34.4
5	4924.00	46.6 PK	74.0	-27.4	2.43 V	158	40.9	5.7
6	4924.00	34.2 AV	54.0	-19.8	2.43 V	158	28.5	5.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

RF Mode	TX 802.11n (HT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.6 PK	74.0	-9.4	2.12 H	46	30.2	34.4
2	2390.00	52.5 AV	54.0	-1.5	2.12 H	46	18.1	34.4
3	*2422.00	104.9 PK			2.12 H	46	70.6	34.3
4	*2422.00	94.1 AV			2.12 H	46	59.8	34.3
5	4844.00	48.3 PK	74.0	-25.7	2.00 H	153	42.2	6.1
6	4844.00	37.2 AV	54.0	-16.8	2.00 H	153	31.1	6.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.8 PK	74.0	-9.2	1.00 V	68	30.4	34.4
2	2390.00	52.7 AV	54.0	-1.3	1.00 V	68	18.3	34.4
3	*2422.00	106.0 PK			1.00 V	68	71.7	34.3
4	*2422.00	94.9 AV			1.00 V	68	60.6	34.3
5	4844.00	47.0 PK	74.0	-27.0	2.55 V	168	40.9	6.1
6	4844.00	35.2 AV	54.0	-18.8	2.55 V	168	29.1	6.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

RF Mode	TX 802.11n (HT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.4 PK	74.0	-8.6	2.11 H	43	31.0	34.4
2	2390.00	52.7 AV	54.0	-1.3	2.11 H	43	18.3	34.4
3	*2437.00	106.6 PK			2.11 H	43	72.3	34.3
4	*2437.00	96.4 AV			2.11 H	43	62.1	34.3
5	4874.00	48.2 PK	74.0	-25.8	2.05 H	139	42.4	5.8
6	4874.00	39.3 AV	54.0	-14.7	2.05 H	139	33.5	5.8

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	1.03 V	62	30.9	34.4
2	2390.00	52.6 AV	54.0	-1.4	1.03 V	62	18.2	34.4
3	*2437.00	107.3 PK			1.03 V	62	73.0	34.3
4	*2437.00	96.8 AV			1.03 V	62	62.5	34.3
5	4874.00	47.6 PK	74.0	-26.4	2.59 V	159	41.8	5.8
6	4874.00	35.4 AV	54.0	-18.6	2.59 V	159	29.6	5.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

RF Mode	TX 802.11n (HT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	103.5 PK			2.08 H	42	69.2	34.3
2	*2452.00	93.2 AV			2.08 H	42	58.9	34.3
3	2483.50	64.3 PK	74.0	-9.7	2.08 H	42	29.9	34.4
4	2483.50	53.0 AV	54.0	-1.0	2.08 H	42	18.6	34.4
5	4904.00	47.2 PK	74.0	-26.8	2.17 H	163	41.6	5.6
6	4904.00	36.5 AV	54.0	-17.5	2.17 H	163	30.9	5.6

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	104.7 PK			1.41 V	66	70.4	34.3
2	*2452.00	94.3 AV			1.41 V	66	60.0	34.3
3	2483.50	65.6 PK	74.0	-8.4	1.41 V	66	31.2	34.4
4	2483.50	52.9 AV	54.0	-1.1	1.41 V	66	18.5	34.4
5	4904.00	46.5 PK	74.0	-27.5	2.80 V	158	40.9	5.6
6	4904.00	33.8 AV	54.0	-20.2	2.80 V	158	28.2	5.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.



Below 1GHz worst-case data:


802.11n (HT20)

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.01	22.2 QP	40.0	-17.8	1.49 H	265	32.2	-10.0
2	65.14	33.8 QP	40.0	-6.2	1.00 H	5	44.0	-10.2
3	132.62	33.8 QP	43.5	-9.7	2.00 H	329	43.5	-9.7
4	268.99	30.3 QP	46.0	-15.7	1.49 H	197	37.8	-7.5
5	297.10	29.3 QP	46.0	-16.7	1.00 H	173	35.9	-6.6
6	446.12	29.5 QP	46.0	-16.5	2.00 H	12	32.9	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

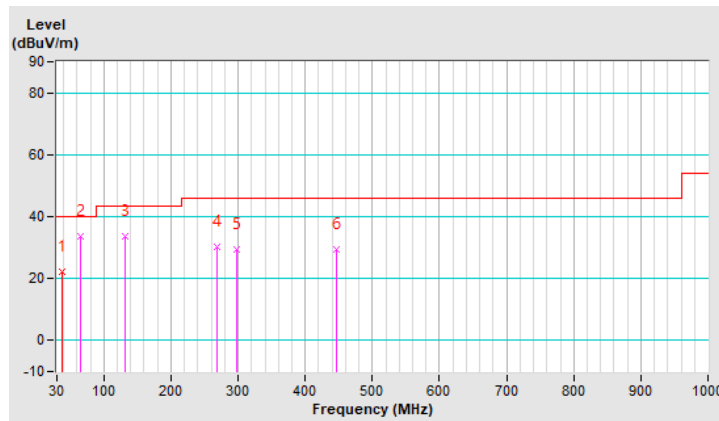


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.11	30.2 QP	40.0	-9.8	1.00 V	72	40.7	-10.5
2	49.68	37.9 QP	40.0	-2.1	1.51 V	33	47.0	-9.1
3	65.14	36.1 QP	40.0	-3.9	1.51 V	39	46.3	-10.2
4	132.62	31.2 QP	43.5	-12.3	1.01 V	247	40.9	-9.7
5	297.10	30.7 QP	46.0	-15.3	1.99 V	92	37.3	-6.6
6	399.72	29.7 QP	46.0	-16.3	1.99 V	88	34.5	-4.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

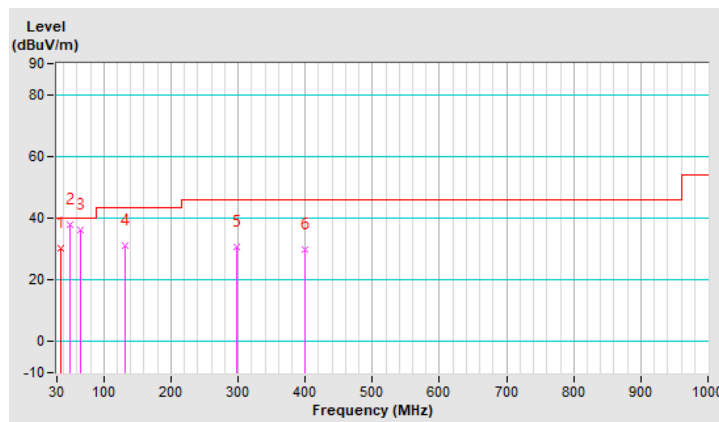


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.94	24.2 QP	40.0	-15.8	1.00 H	113	35.1	-10.9
2	80.44	27.3 QP	40.0	-12.7	1.50 H	222	40.8	-13.5
3	113.42	25.6 QP	43.5	-17.9	2.00 H	200	37.3	-11.7
4	171.62	22.9 QP	43.5	-20.6	1.00 H	246	31.8	-8.9
5	187.14	23.5 QP	43.5	-20.0	1.50 H	253	34.2	-10.7
6	289.96	25.3 QP	46.0	-20.7	1.00 H	130	32.0	-6.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

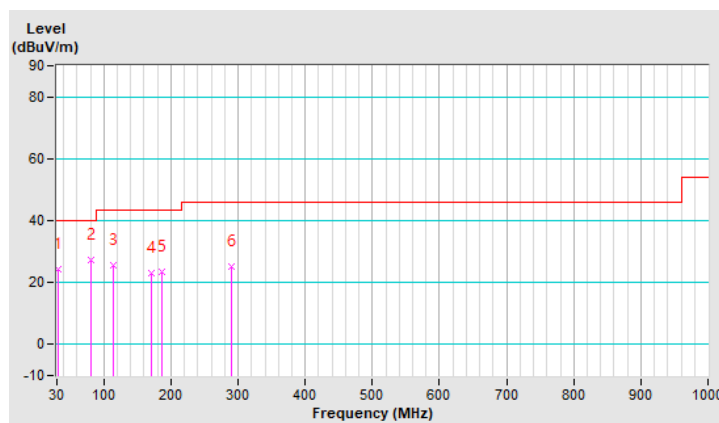


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.88	25.3 QP	40.0	-14.7	1.00 V	304	35.9	-10.6
2	57.16	24.0 QP	40.0	-16.0	1.50 V	349	33.4	-9.4
3	82.38	32.9 QP	40.0	-7.1	1.00 V	184	46.7	-13.8
4	109.54	22.4 QP	43.5	-21.1	1.50 V	61	34.4	-12.0
5	132.82	21.5 QP	43.5	-22.0	2.00 V	342	31.1	-9.6
6	165.80	25.4 QP	43.5	-18.1	1.00 V	188	34.0	-8.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

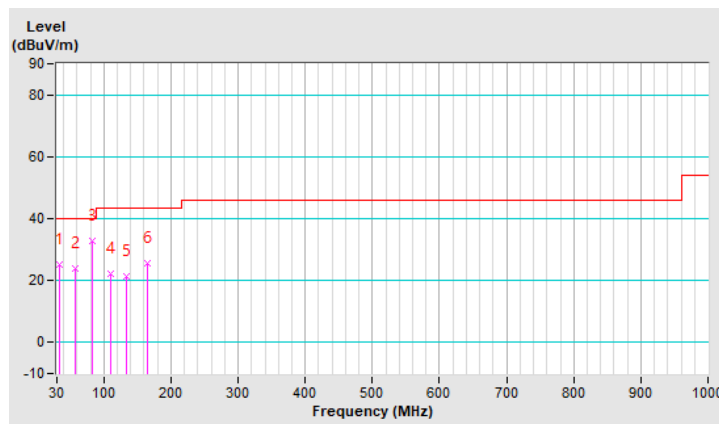


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	68.80	32.1 QP	40.0	-7.9	1.00 H	78	43.0	-10.9
2	125.06	28.9 QP	43.5	-14.6	1.00 H	87	39.4	-10.5
3	156.10	29.4 QP	43.5	-14.1	1.50 H	26	37.9	-8.5
4	187.14	31.3 QP	43.5	-12.2	2.00 H	84	42.0	-10.7
5	227.88	33.5 QP	46.0	-12.5	1.50 H	85	43.9	-10.4
6	313.24	30.2 QP	46.0	-15.8	1.00 H	210	36.4	-6.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

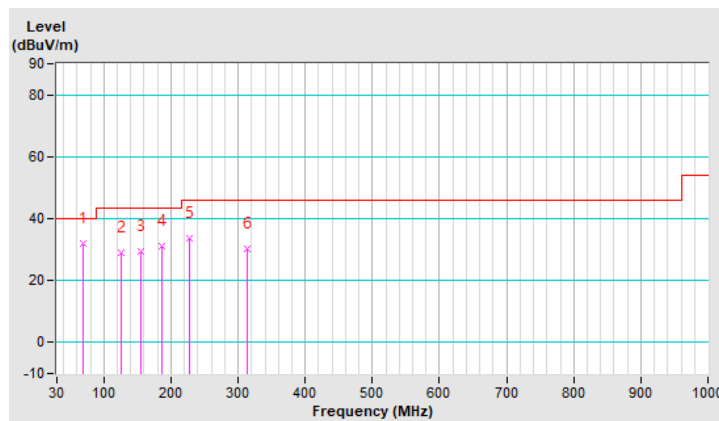


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	C

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.70	27.9 QP	40.0	-12.1	1.00 V	159	37.6	-9.7
2	70.74	34.6 QP	40.0	-5.4	1.50 V	28	45.7	-11.1
3	132.82	28.1 QP	43.5	-15.4	1.00 V	53	37.7	-9.6
4	154.16	24.1 QP	43.5	-19.4	1.50 V	119	32.4	-8.3
5	185.20	25.5 QP	43.5	-18.0	2.00 V	110	35.9	-10.4
6	227.88	29.6 QP	46.0	-16.4	1.00 V	283	40.0	-10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

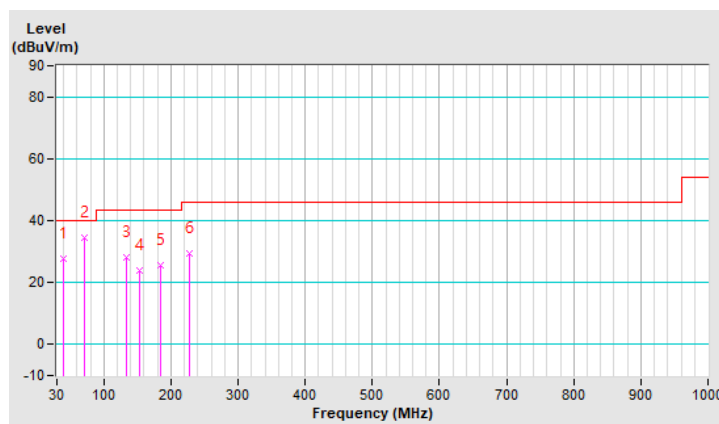


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	D

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.94	24.5 QP	40.0	-15.5	1.00 H	254	35.4	-10.9
2	82.38	31.2 QP	40.0	-8.8	1.99 H	231	45.0	-13.8
3	111.48	36.7 QP	43.5	-6.8	1.49 H	71	48.5	-11.8
4	136.70	32.8 QP	43.5	-10.7	1.99 H	87	42.1	-9.3
5	171.62	27.5 QP	43.5	-16.0	1.49 H	257	36.4	-8.9
6	183.26	27.2 QP	43.5	-16.3	1.99 H	277	37.4	-10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

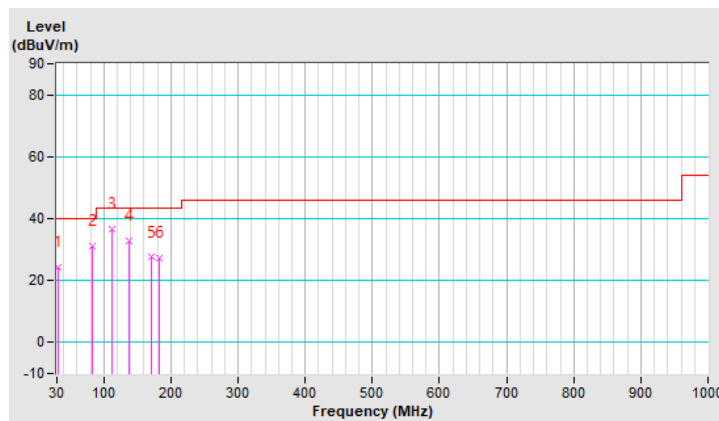


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	D

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.88	31.0 QP	40.0	-9.0	1.51 V	73	41.6	-10.6
2	55.22	30.8 QP	40.0	-9.2	1.51 V	272	39.9	-9.1
3	111.48	39.1 QP	43.5	-4.4	1.01 V	103	50.9	-11.8
4	140.58	32.9 QP	43.5	-10.6	1.01 V	174	41.9	-9.0
5	167.74	28.1 QP	43.5	-15.4	1.01 V	139	36.8	-8.7
6	291.90	28.2 QP	46.0	-17.8	1.99 V	305	34.9	-6.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

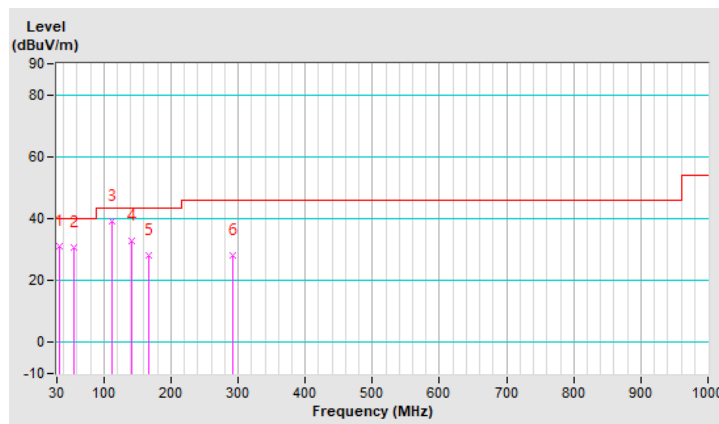



## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note:** 1. The lower limit shall apply at the transition frequencies.  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 04, 2020	Dec. 03, 2021
RF signal cable Woken	5D-FB	Cable-cond1-01	Jan. 16, 2021	Jan. 15, 2022
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 25, 2021	Feb. 24, 2022
V-LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 28, 2020	Aug. 27, 2021
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

- Note:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Shielded Room 1 (Conduction 1).  
 3. The VCCI Site Registration No. is C-12040.  
 4. Tested date: May 24 ~ Jul. 15, 2021

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

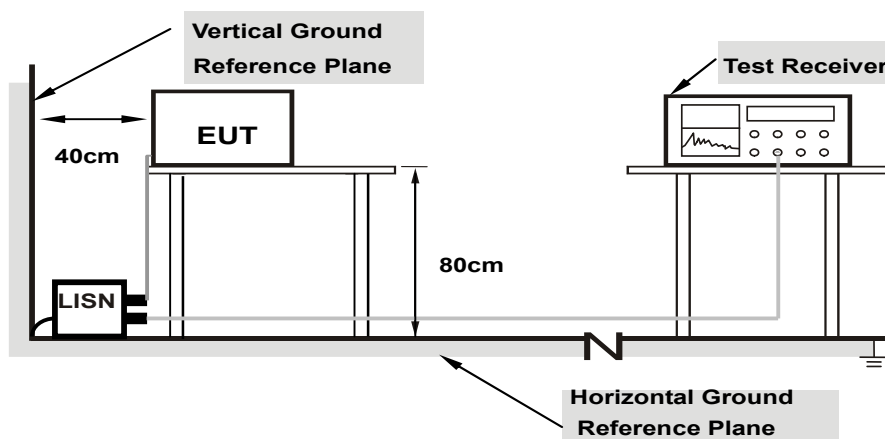

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.

#### 4.2.7 Test Results


Worst-case data: 802.11n (HT20)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	9.71	35.64	20.84	45.35	30.55	65.78	55.78	-20.43	-25.23
2	0.20148	9.71	39.75	32.27	49.46	41.98	63.55	53.55	-14.09	-11.57
3	0.40600	9.73	30.27	25.52	40.00	35.25	57.73	47.73	-17.73	-12.48
4	0.60600	9.74	32.26	30.73	42.00	40.47	56.00	46.00	-14.00	-5.53
5	0.88200	9.75	11.19	3.63	20.94	13.38	56.00	46.00	-35.06	-32.62
6	2.42600	9.77	20.17	11.97	29.94	21.74	56.00	46.00	-26.06	-24.26

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

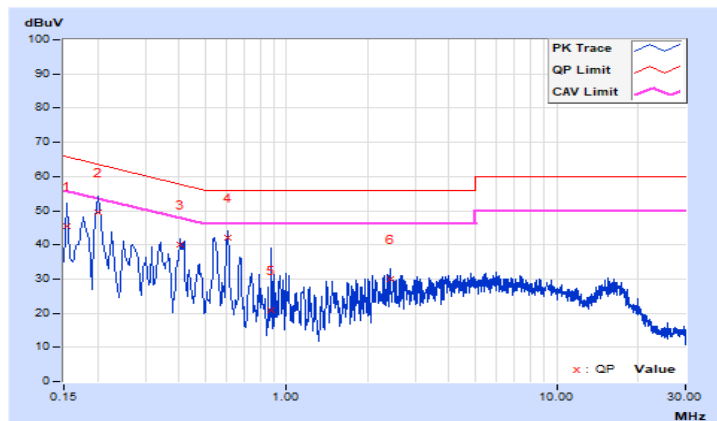


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16977	9.77	41.57	34.41	51.34	44.18	64.97
2	0.21000	9.77	35.29	30.31	45.06	40.08	63.21	53.21	-18.15	-13.13
3	0.22600	9.77	34.36	27.79	44.13	37.56	62.60	52.60	-18.47	-15.04
4	0.47400	9.79	28.78	22.82	38.57	32.61	56.44	46.44	-17.87	-13.83
<b>5</b>	<b>0.57342</b>	<b>9.80</b>	<b>35.24</b>	<b>35.05</b>	<b>45.04</b>	<b>44.85</b>	<b>56.00</b>	<b>46.00</b>	<b>-10.96</b>	<b>-1.15</b>
6	0.62600	9.80	30.91	29.59	40.71	39.39	56.00	46.00	-15.29	-6.61

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

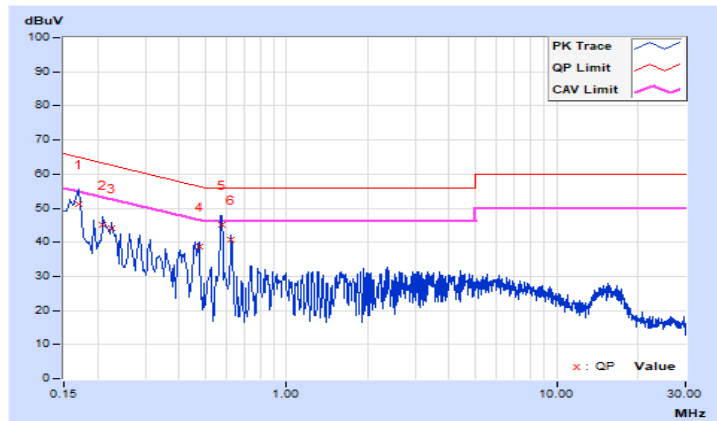


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15800	9.71	30.27	17.80	39.98	27.51	65.57
2	0.18180	9.71	28.21	12.73	37.92	22.44	64.40	54.40	-26.48	-31.96
3	0.40179	9.73	29.60	21.73	39.33	31.46	57.82	47.82	-18.49	-16.36
4	0.51400	9.74	19.00	9.87	28.74	19.61	56.00	46.00	-27.26	-26.39
5	9.04200	9.85	18.73	13.30	28.58	23.15	60.00	50.00	-31.42	-26.85
6	19.34600	9.82	11.89	7.27	21.71	17.09	60.00	50.00	-38.29	-32.91

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

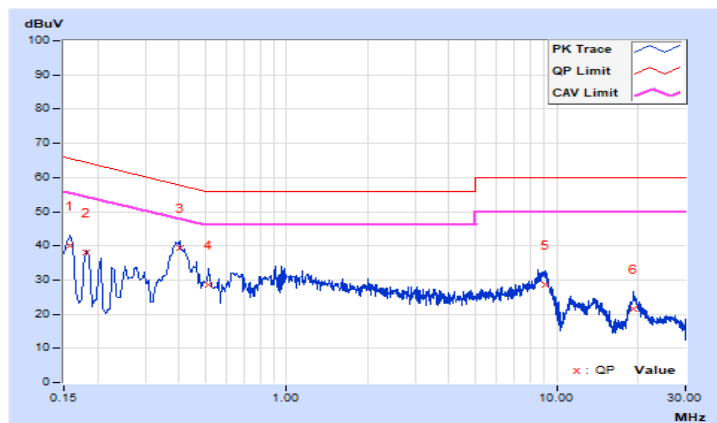


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15000	9.76	30.18	14.38	39.94	24.14	66.00
2	0.17384	9.77	24.90	10.04	34.67	19.81	64.77	54.77	-30.10	-34.96
3	0.21400	9.77	24.50	7.25	34.27	17.02	63.05	53.05	-28.78	-36.03
4	0.41000	9.79	29.56	21.65	39.35	31.44	57.65	47.65	-18.30	-16.21
5	9.14600	9.92	17.26	12.22	27.18	22.14	60.00	50.00	-32.82	-27.86
6	19.35400	9.98	13.33	8.33	23.31	18.31	60.00	50.00	-36.69	-31.69

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

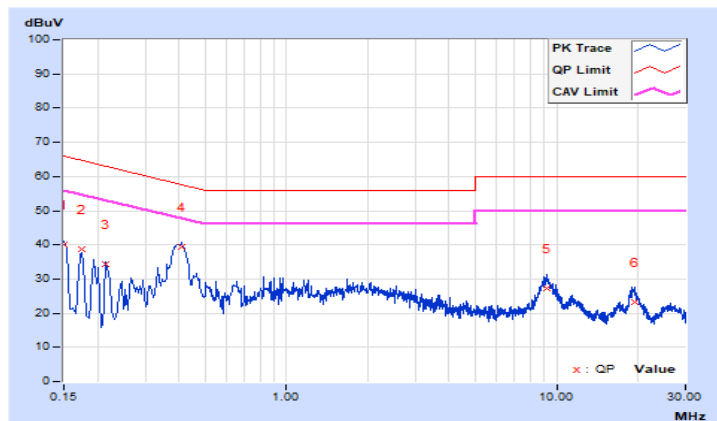


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.15400	9.71	35.24	20.75	44.95	30.46	65.78
2	0.18200	9.71	32.81	17.36	42.52	27.07	64.39	54.39	-21.87	-27.32
3	0.41000	9.73	29.26	21.22	38.99	30.95	57.65	47.65	-18.66	-16.70
4	1.21800	9.76	14.65	8.34	24.41	18.10	56.00	46.00	-31.59	-27.90
5	8.79800	9.85	18.12	12.92	27.97	22.77	60.00	50.00	-32.03	-27.23
6	18.31000	9.82	15.98	11.15	25.80	20.97	60.00	50.00	-34.20	-29.03

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

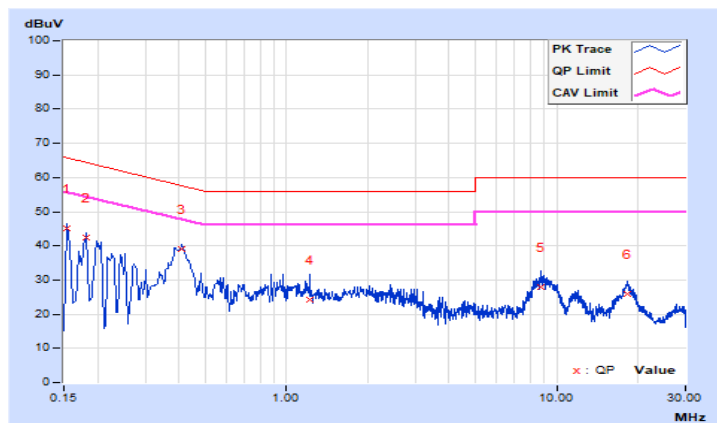


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16200	9.77	34.45	20.05	44.22	29.82	65.36
2	0.19000	9.77	34.50	18.55	44.27	28.32	64.04	54.04	-19.77	-25.72
3	0.33400	9.78	24.99	16.04	34.77	25.82	59.35	49.35	-24.58	-23.53
4	0.39654	9.79	30.44	22.16	40.23	31.95	57.93	47.93	-17.70	-15.98
5	1.53400	9.83	17.66	11.07	27.49	20.90	56.00	46.00	-28.51	-25.10
6	8.62200	9.91	21.52	16.37	31.43	26.28	60.00	50.00	-28.57	-23.72

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

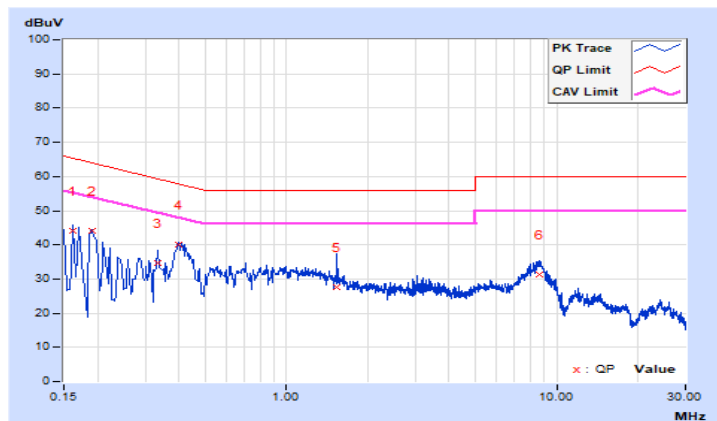




Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	D		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16200	9.71	31.48	16.79	41.19	26.50	65.36
2	0.19000	9.71	27.71	11.51	37.42	21.22	64.04	54.04	-26.62	-32.82
3	0.39654	9.73	38.73	30.78	48.46	40.51	57.93	47.93	-9.47	-7.42
4	0.49800	9.73	26.23	16.67	35.96	26.40	56.03	46.03	-20.07	-19.63
5	9.00200	9.85	18.29	12.76	28.14	22.61	60.00	50.00	-31.86	-27.39
6	19.27400	9.82	13.36	8.47	23.18	18.29	60.00	50.00	-36.82	-31.71

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

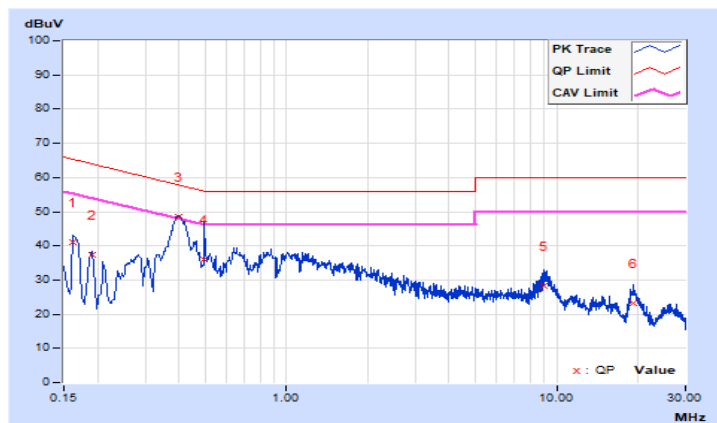


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	D		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17000	9.77	30.32	14.06	40.09	23.83	64.96
2	0.27712	9.78	28.17	21.20	37.95	30.98	60.90	50.90	-22.95	-19.92
3	0.40927	9.79	37.97	29.90	47.76	39.69	57.66	47.66	-9.90	-7.97
4	1.25800	9.82	26.28	18.61	36.10	28.43	56.00	46.00	-19.90	-17.57
5	9.01400	9.92	21.79	16.31	31.71	26.23	60.00	50.00	-28.29	-23.77
6	18.99400	9.98	10.33	5.55	20.31	15.53	60.00	50.00	-39.69	-34.47

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

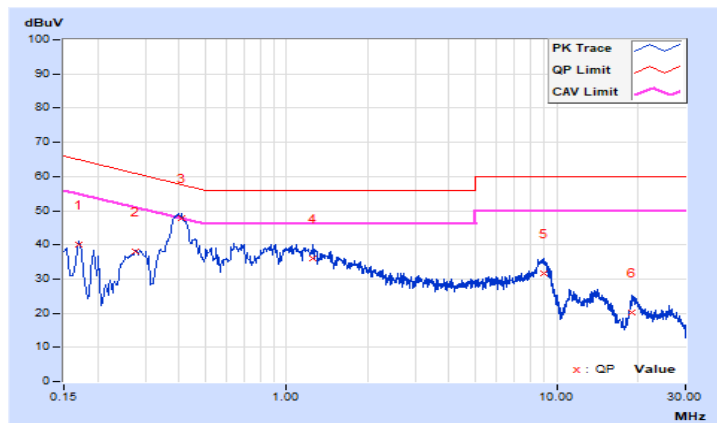


### 4.3 6dB Bandwidth Measurement

#### 4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz.
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Result

##### 802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	9.06	9.09	0.5	Pass
6	2437	9.08	8.57	0.5	Pass
11	2462	8.59	9.06	0.5	Pass

##### 802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.38	16.31	0.5	Pass
6	2437	15.51	16.27	0.5	Pass
11	2462	15.76	15.76	0.5	Pass

##### 802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.98	16.96	0.5	Pass
6	2437	16.16	16.78	0.5	Pass
11	2462	16.38	15.75	0.5	Pass

##### 802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	35.17	35.22	0.5	Pass
6	2437	35.80	35.23	0.5	Pass
9	2452	35.20	35.80	0.5	Pass

### Spectrum Plot of Worst Value


#### 802.11b

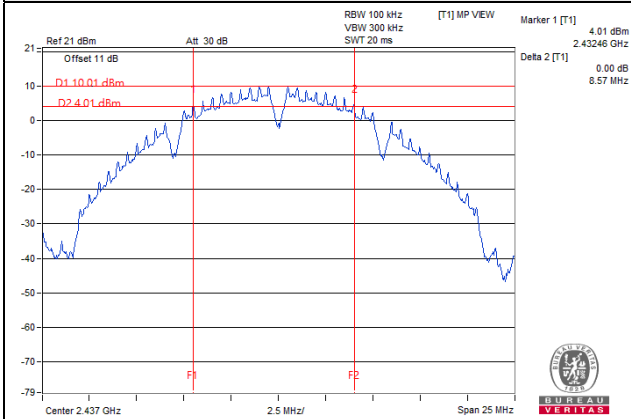


#### 802.11g

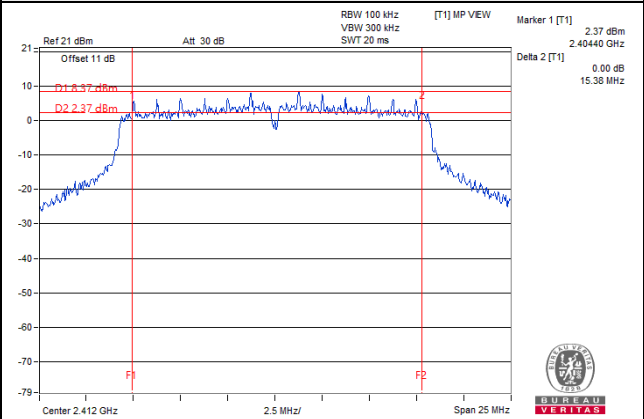

#### 802.11n (HT20)

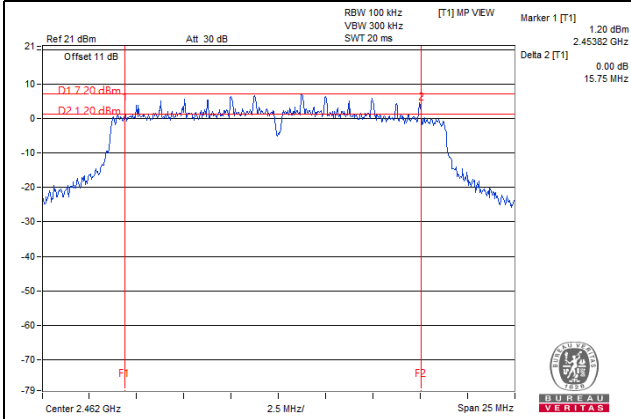

#### 802.11n (HT40)

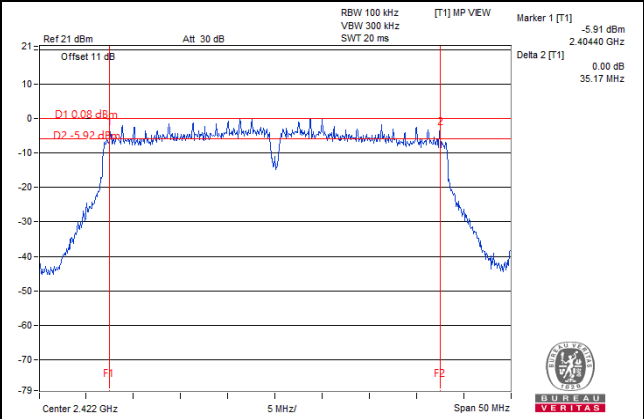

## 4.4 Conducted Output Power Measurement

### 4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(N_{ANT}/N_{SS})$  dB.

### 4.4.2 Test Setup



### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 EUT Operating Conditions

Same as item 4.3.6.

#### 4.4.7 Test Results

##### 802.11b

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	18.42	18.63	142.448	21.54	30	Pass
6	2437	18.13	18.57	136.958	21.37	30	Pass
11	2462	18.34	18.53	139.519	21.45	30	Pass

##### 802.11g

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	18.33	18.63	141.023	21.49	30	Pass
6	2437	18.55	18.41	140.957	21.49	30	Pass
11	2462	18.42	18.61	142.113	21.53	30	Pass

##### 802.11n (HT20)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	14.57	14.37	55.994	17.48	30	Pass
6	2437	18.48	18.69	<b>144.430</b>	21.60	30	Pass
11	2462	16.77	16.66	93.878	19.73	30	Pass

##### 802.11n (HT40)


Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	13.37	13.57	44.478	16.48	30	Pass
6	2437	16.38	16.41	87.203	19.41	30	Pass
9	2452	13.99	14.07	50.588	17.04	30	Pass

## 4.5 Power Spectral Density Measurement

### 4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz band during any time interval of continuous transmission.

### 4.5.2 Test Setup



### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

For Average Power (Duty cycle  $\geq 98\%$ )

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

For Average Power (Duty cycle  $< 98\%$ )

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set VBW  $\geq 3 \times \text{RBW}$ .
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add  $10 \log(1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Condition

Same as item 4.3.6.



#### 4.5.7 Test Results

##### 802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-15.96	3.01	-12.95	7.17	Pass
	6	2437	-15.60	3.01	-12.59	7.17	Pass
	11	2462	-15.42	3.01	-12.41	7.17	Pass
1	1	2412	-14.82	3.01	-11.81	7.17	Pass
	6	2437	-15.18	3.01	-12.17	7.17	Pass
	11	2462	-15.41	3.01	-12.40	7.17	Pass

Note:

- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
- Directional Gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2]$  = 6.83dBi > 6dBi, so the power density limit shall be reduced to 8 - (6.83 - 6) = 7.17dBm.

##### 802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-17.18	3.01	-14.17	7.17	Pass
	6	2437	-13.62	3.01	-10.61	7.17	Pass
	11	2462	-18.18	3.01	-15.17	7.17	Pass
1	1	2412	-17.12	3.01	-14.11	7.17	Pass
	6	2437	-13.70	3.01	-10.69	7.17	Pass
	11	2462	-17.57	3.01	-14.56	7.17	Pass

Note:

- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
- Directional Gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2]$  = 6.83dBi > 6dBi, so the power density limit shall be reduced to 8 - (6.83 - 6) = 7.17dBm.

##### 802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-22.52	3.01	0.10	-19.41	7.17	Pass
	6	2437	-14.36	3.01	0.10	-11.25	7.17	Pass
	11	2462	-19.86	3.01	0.10	-16.75	7.17	Pass
1	1	2412	-21.62	3.01	0.10	-18.51	7.17	Pass
	6	2437	-13.70	3.01	0.10	-10.59	7.17	Pass
	11	2462	-19.65	3.01	0.10	-16.54	7.17	Pass

Note:


- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
- Directional Gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2]$  = 6.83dBi > 6dBi, so the power density limit shall be reduced to 8 - (6.83 - 6) = 7.17dBm.
- Refer to section 3.3 for duty cycle spectrum plot.

### 802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	3	2422	-26.45	3.01	0.25	-23.19	7.17	Pass
	6	2437	-24.52	3.01	0.25	-21.26	7.17	Pass
	9	2452	-25.59	3.01	0.25	-22.33	7.17	Pass
1	3	2422	-26.66	3.01	0.25	-23.40	7.17	Pass
	6	2437	-23.98	3.01	0.25	-20.72	7.17	Pass
	9	2452	-25.86	3.01	0.25	-22.60	7.17	Pass

**Note:**

- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.
- Directional Gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 6.83\text{dBi} > 6\text{dBi}$ , so the power density limit shall be reduced to  $8 - (6.83 - 6) = 7.17\text{dBm}$ .
- Refer to section 3.3 for duty cycle spectrum plot.

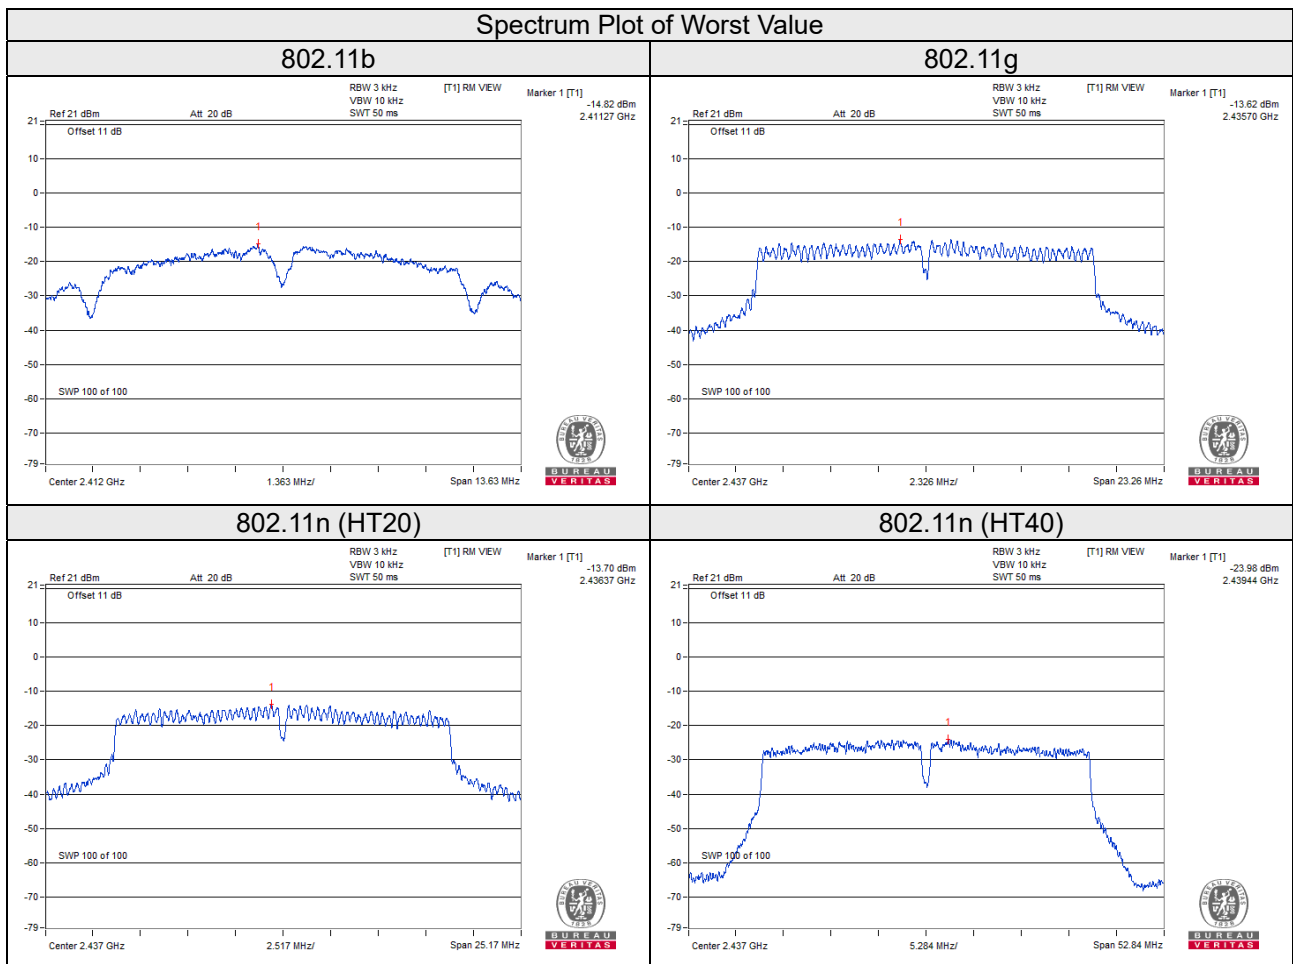


## 4.6 Conducted Out of Band Emission Measurement

### 4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.6.5 Deviation from Test Standard

No deviation.

### 4.6.6 EUT Operating Condition

Same as item 4.3.6.



### 4.6.7 Test Results

The conducted emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b\_Chain 0



CH 1

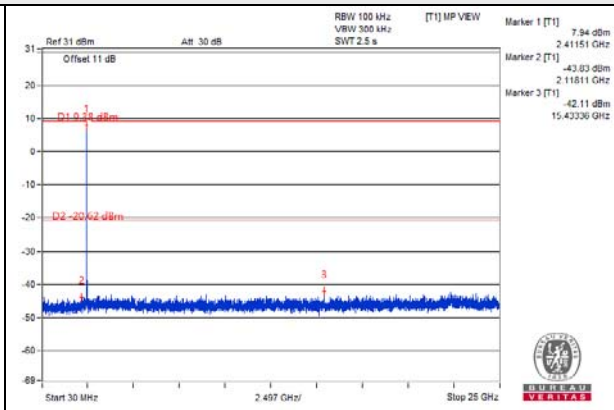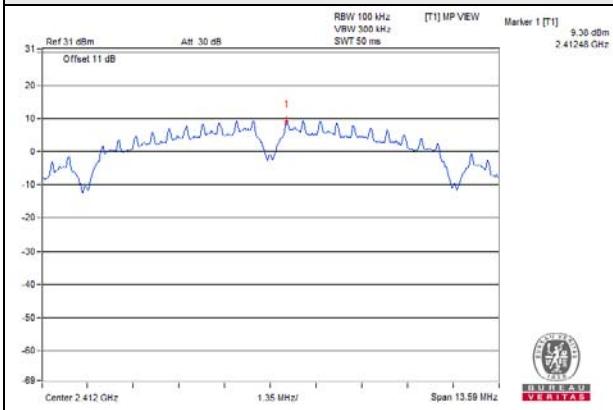


CH 6

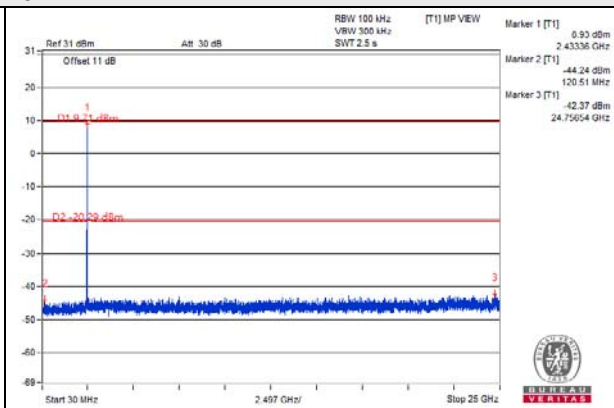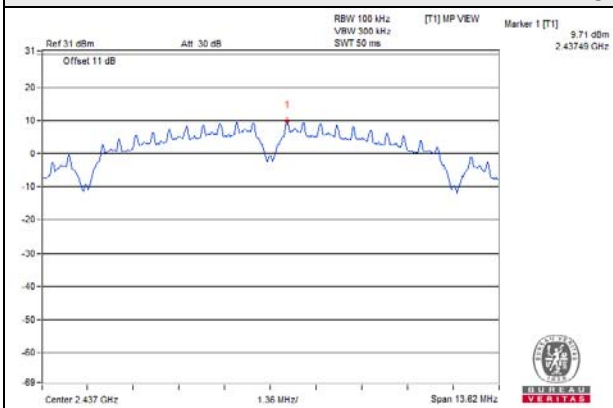


CH 11

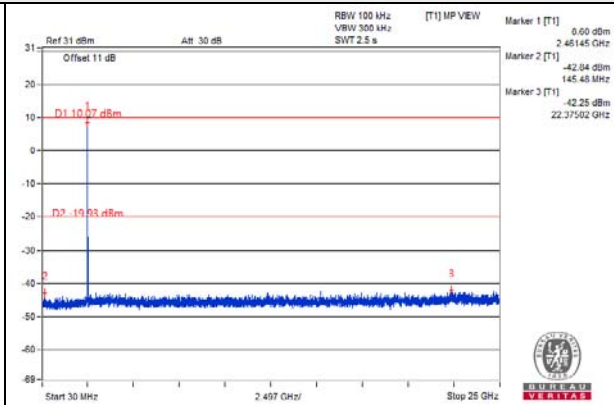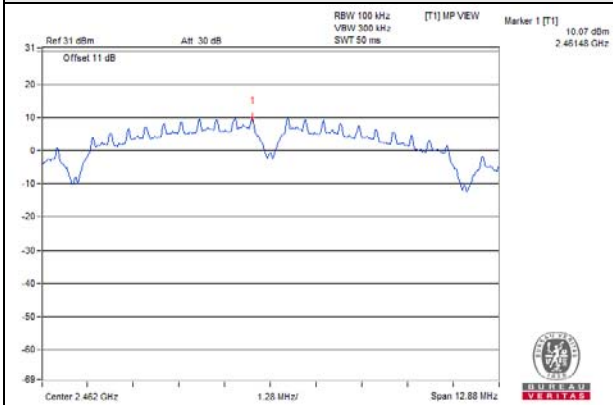

CH 1 Band edge


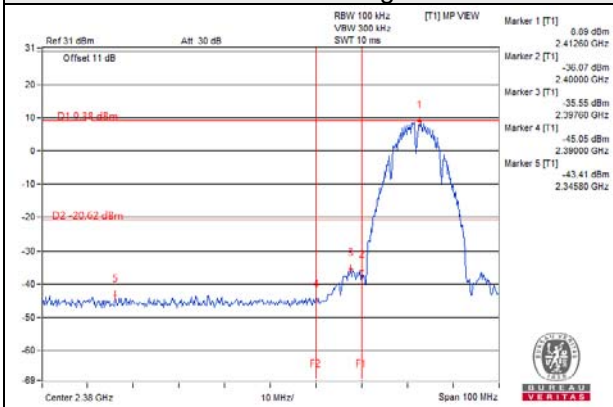


CH 11 Band edge


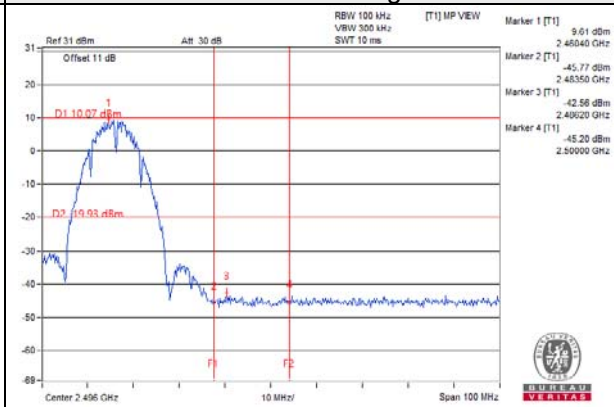


802.11b\_Chain 1



CH 1

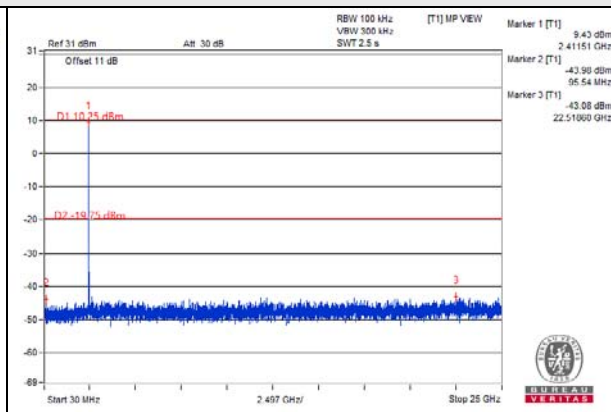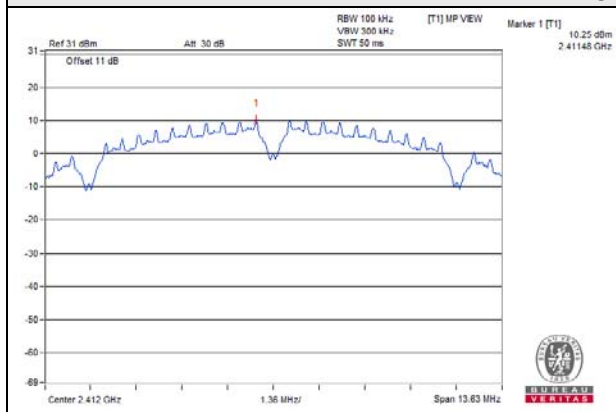



CH 6

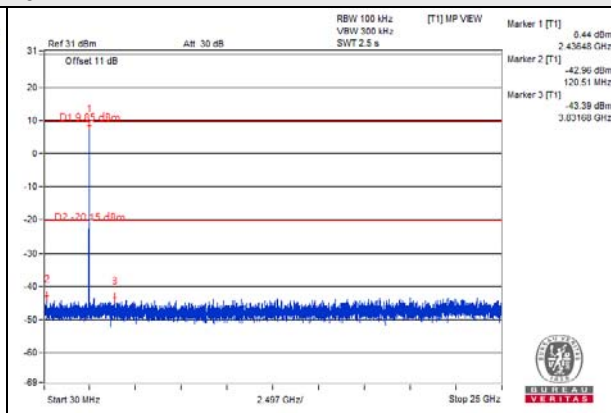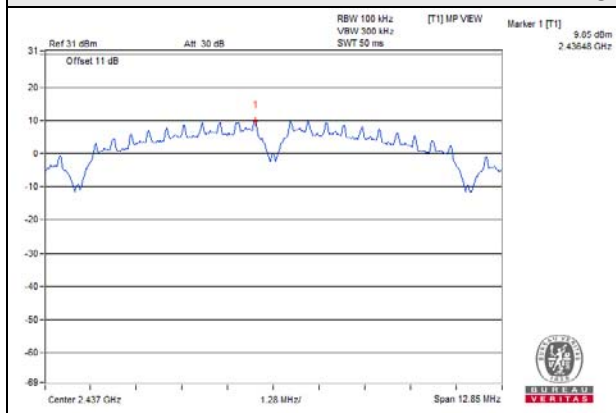

CH 11

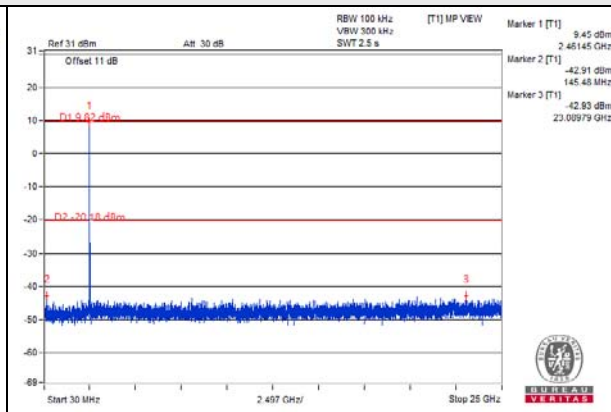
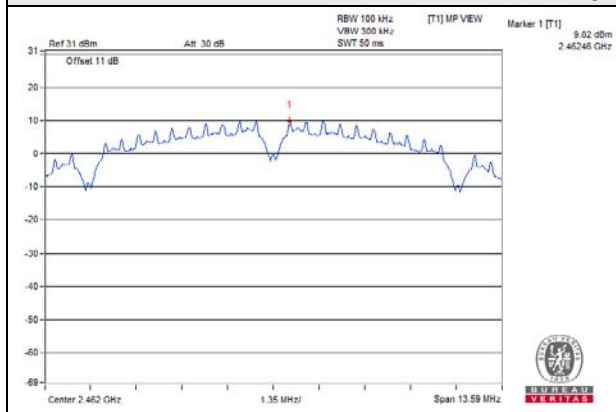


CH 1 Band edge

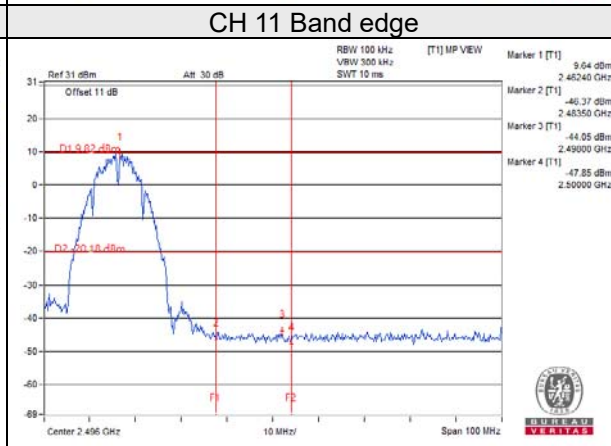
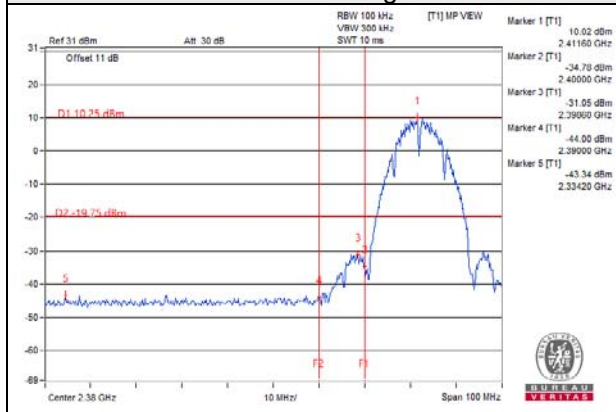


802.11g\_Chain 0



CH 1

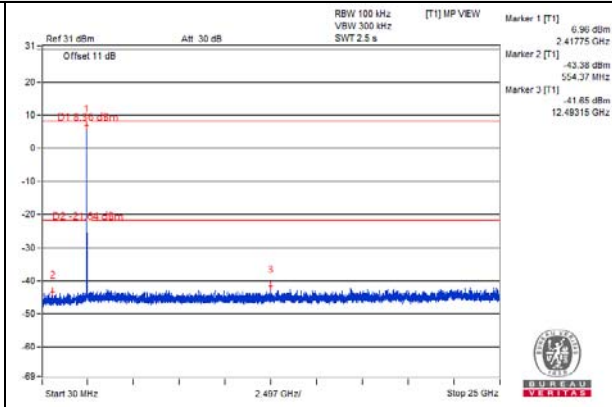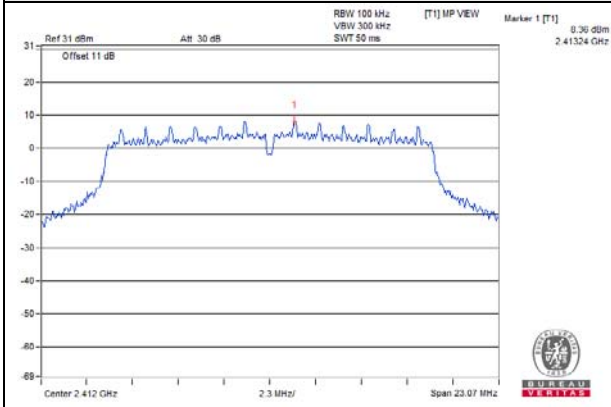


CH 6

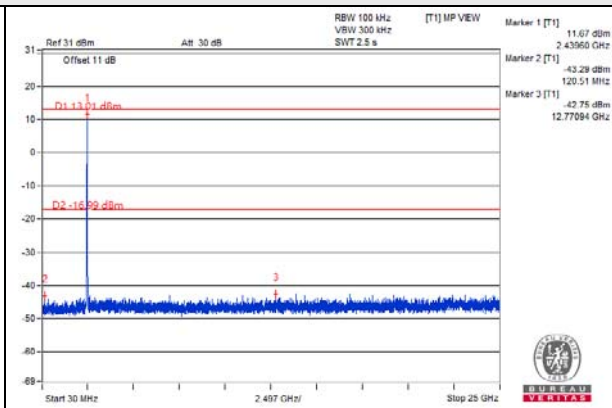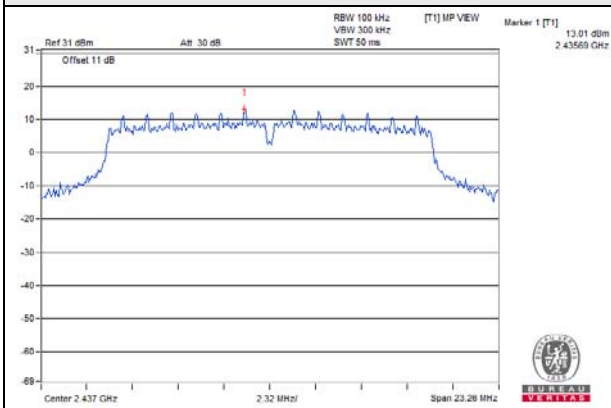


CH 11

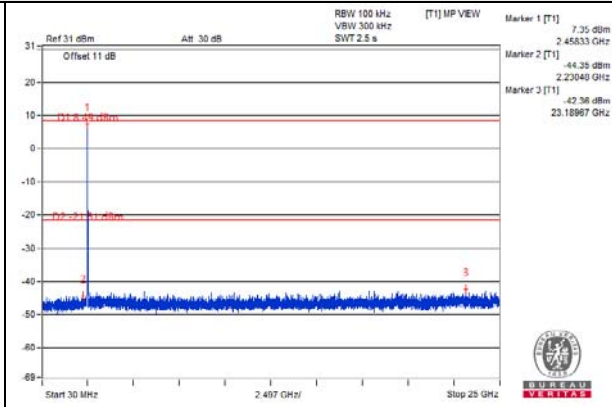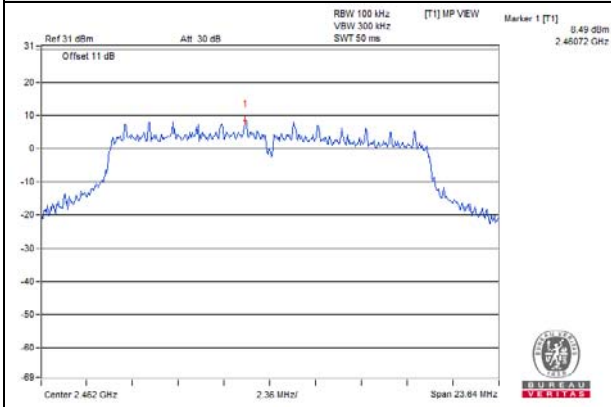

CH 1 Band edge


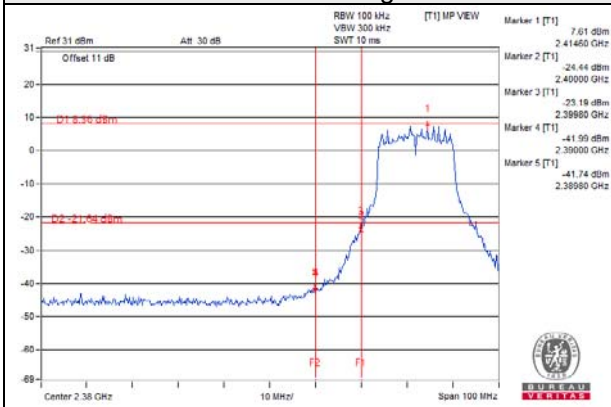


CH 11 Band edge


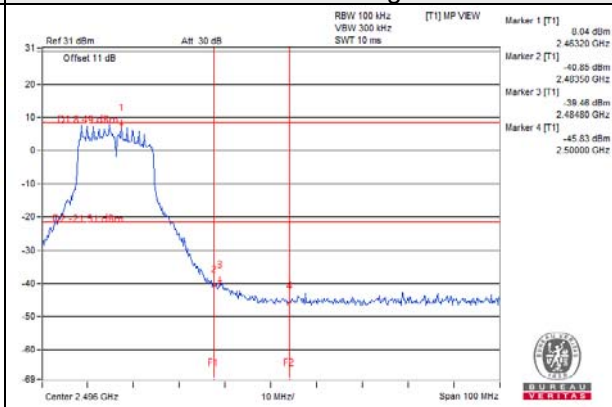


802.11g\_Chain 1



CH 1

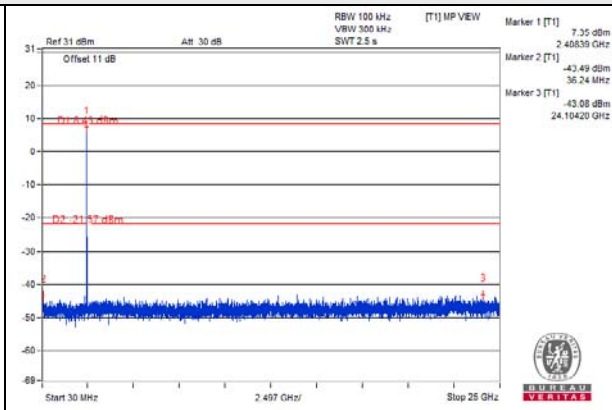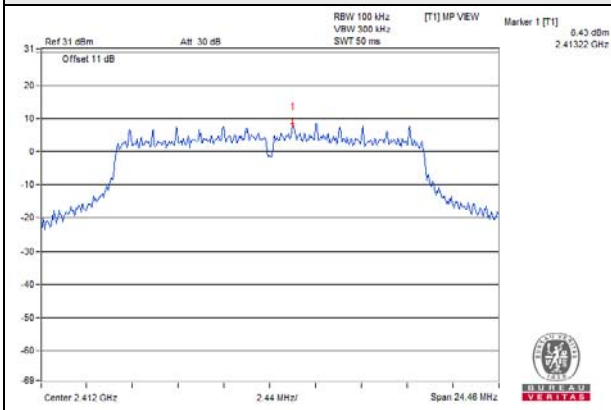


CH 6

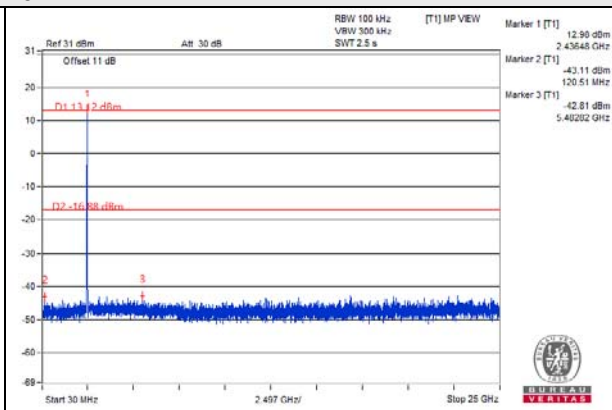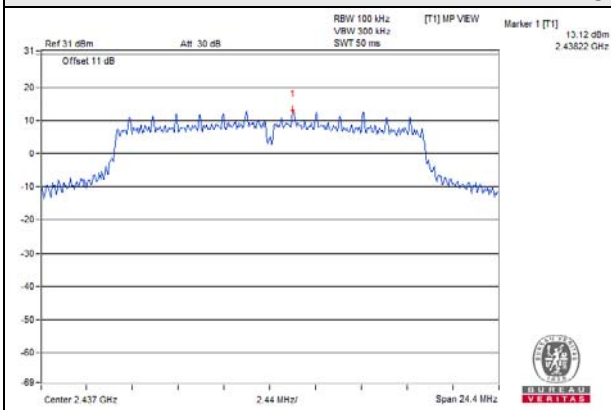


CH 11

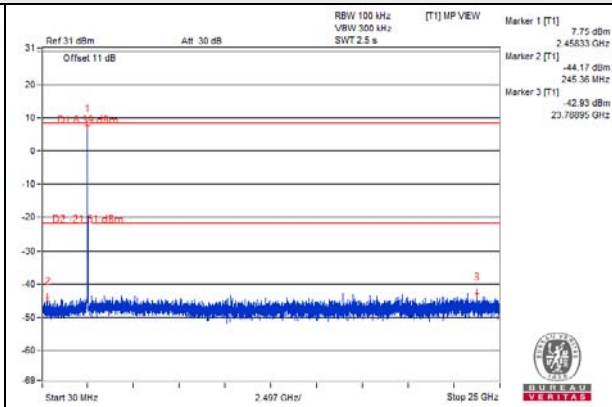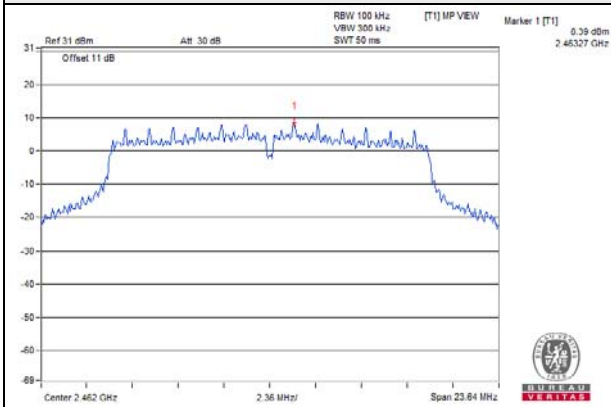

CH 1 Band edge


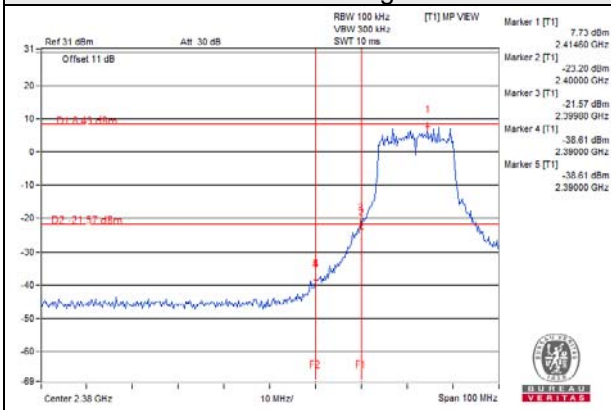


CH 11 Band edge


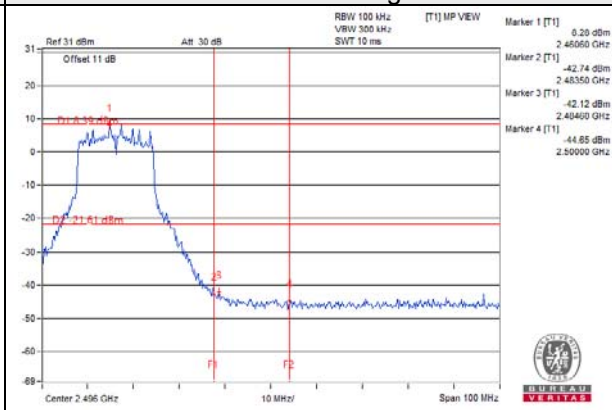


802.11n (HT20)\_Chain 0



CH 1

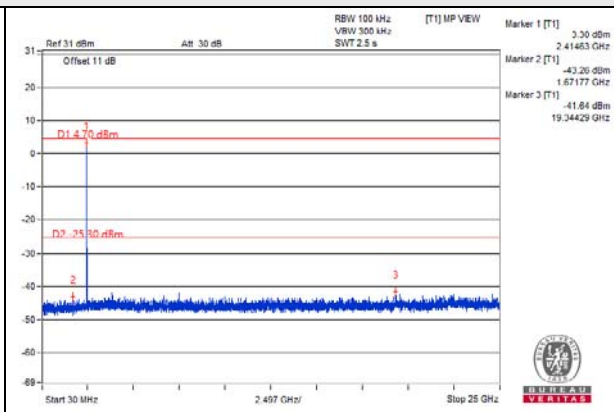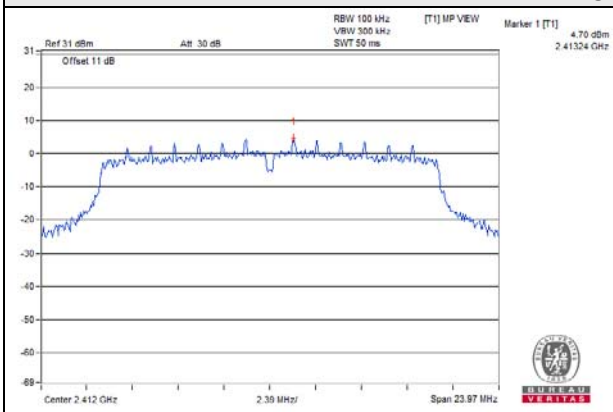



CH 6

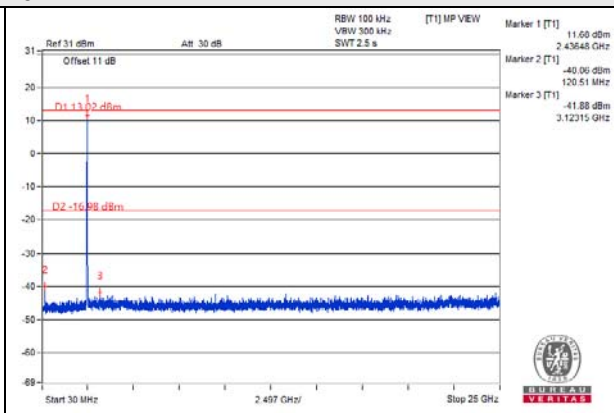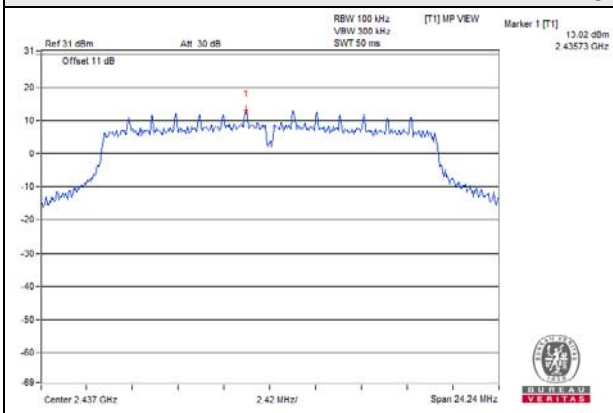

CH 11

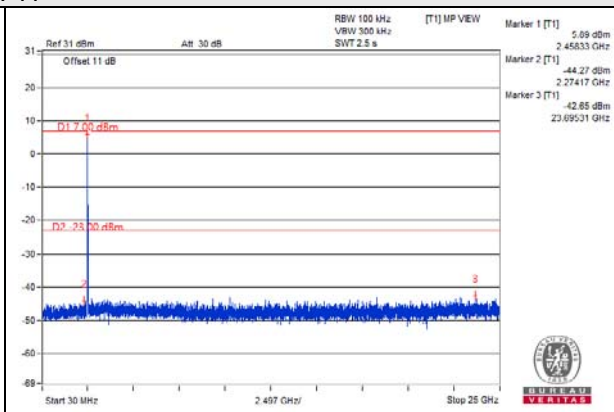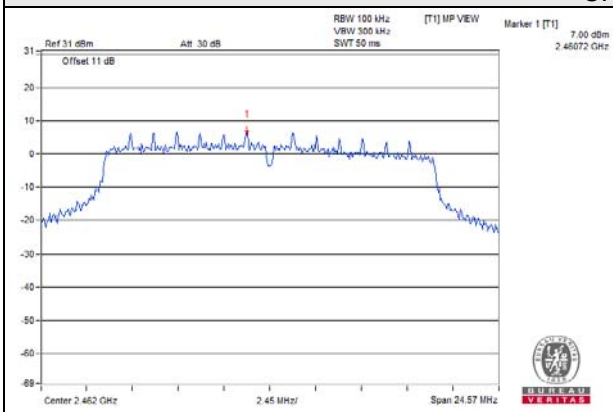



CH 1 Band edge

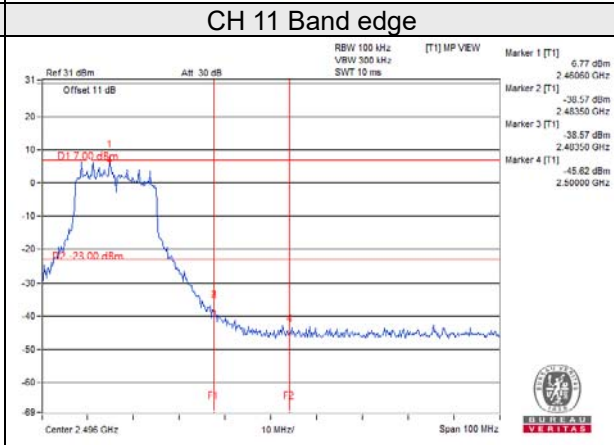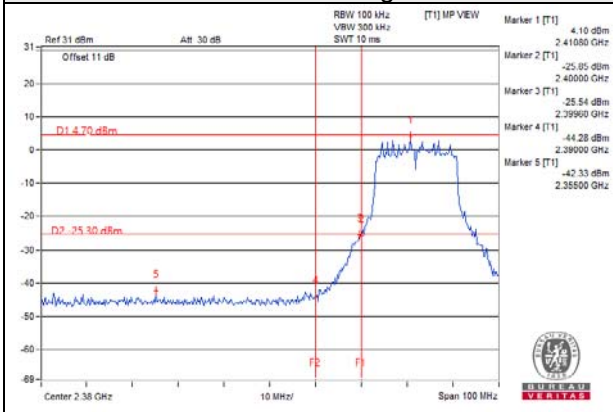





802.11n (HT20)\_Chain 1



CH 1

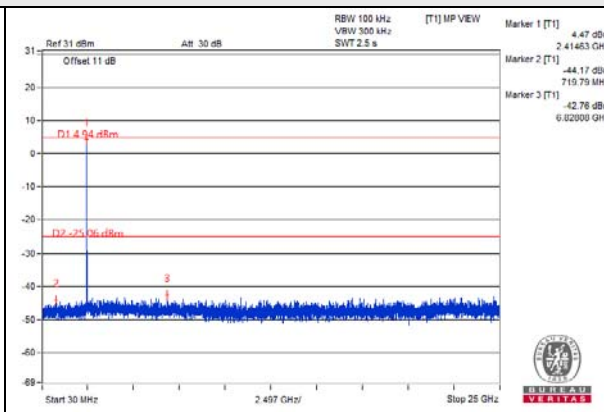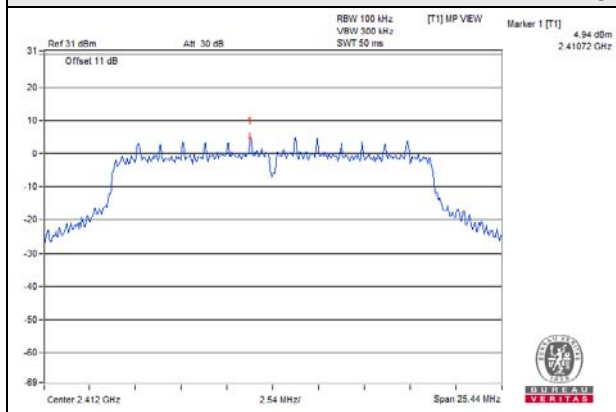


CH 6

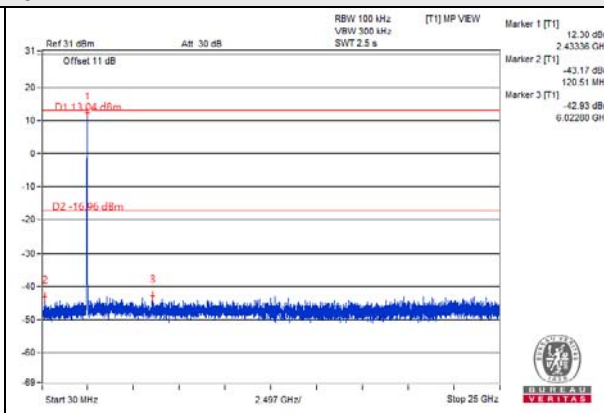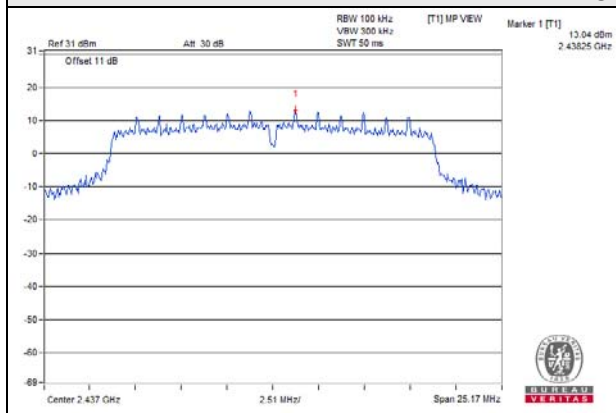


CH 11

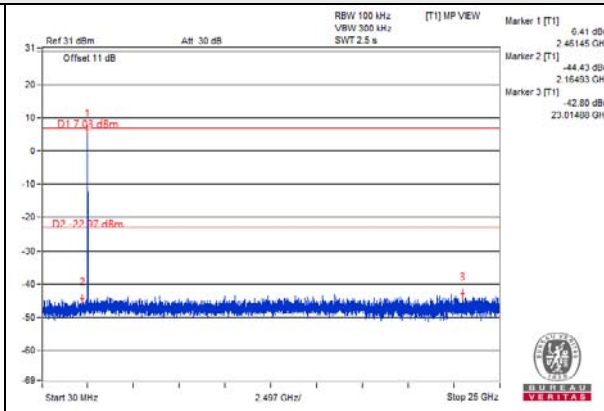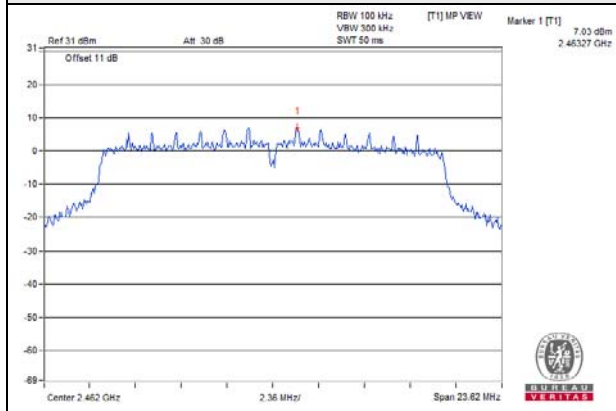

CH 1 Band edge


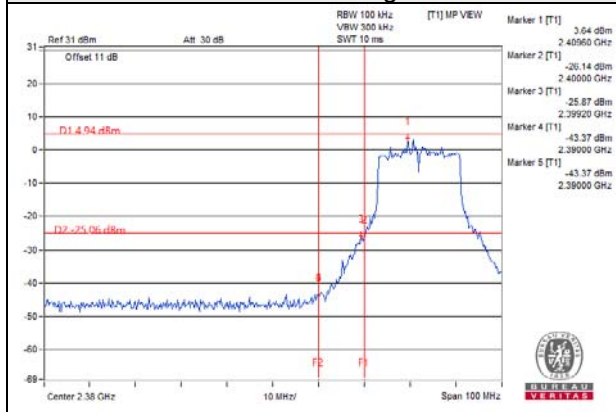


CH 11 Band edge


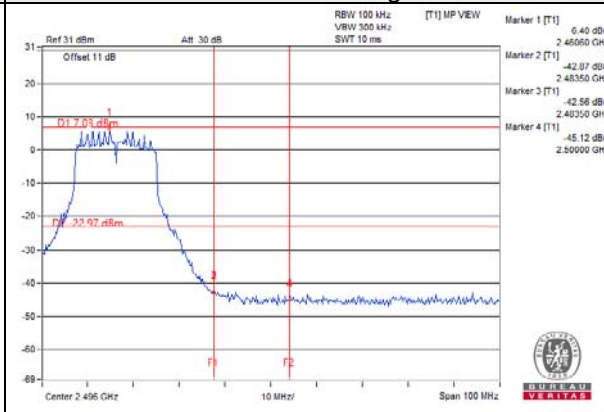


802.11n (HT40)\_Chain 0



CH 3

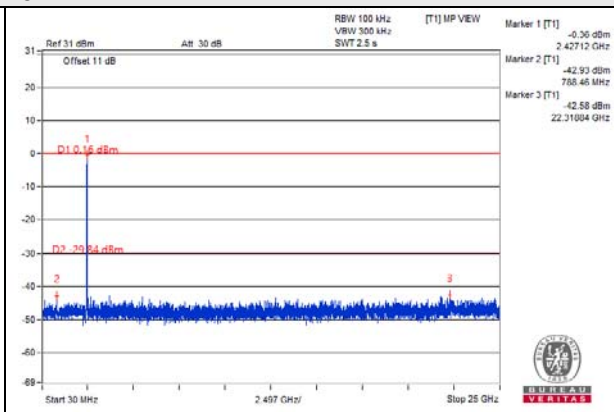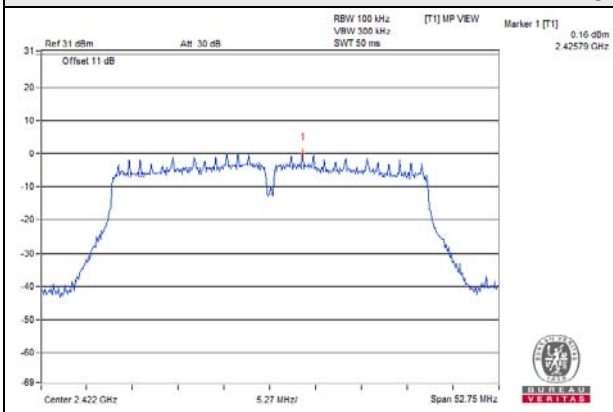


CH 6

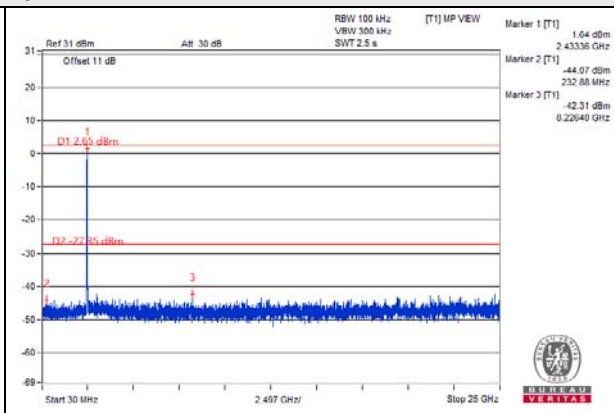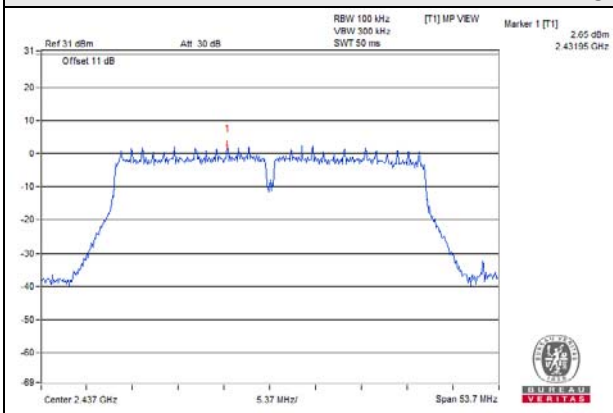


CH 9

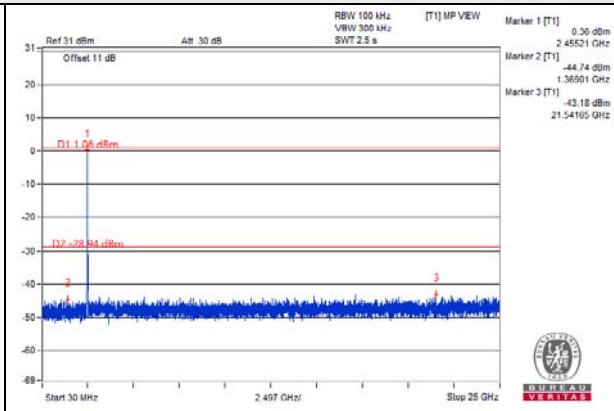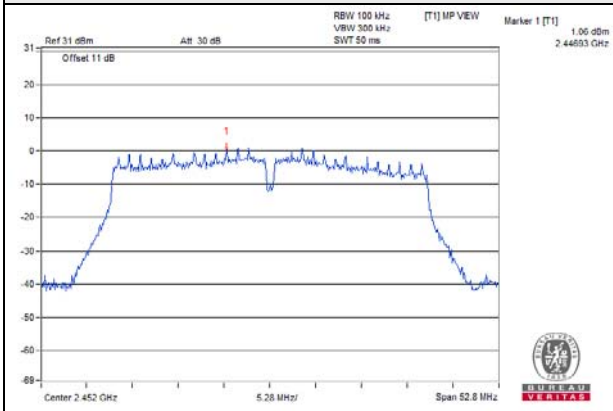

CH 3 Band edge


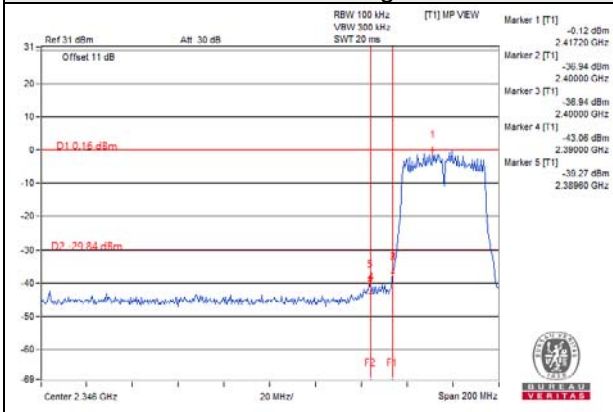


CH 9 Band edge


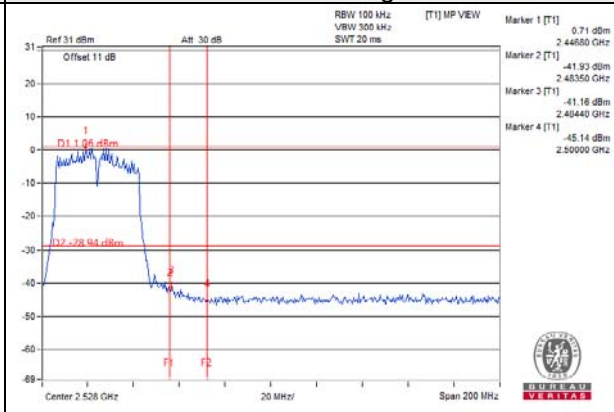


802.11n (HT40)\_Chain 1



CH 3

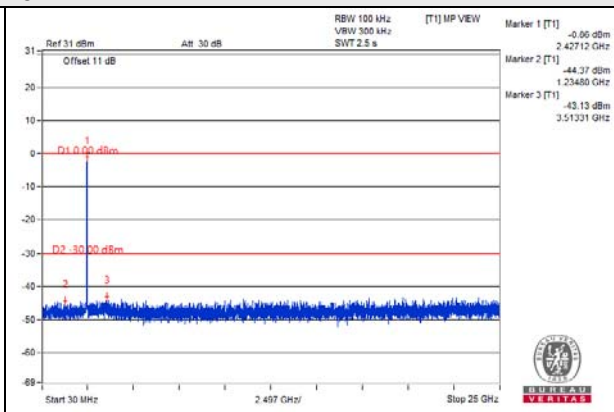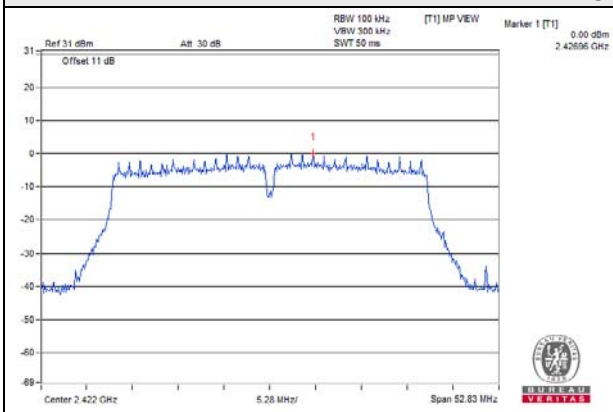


CH 6

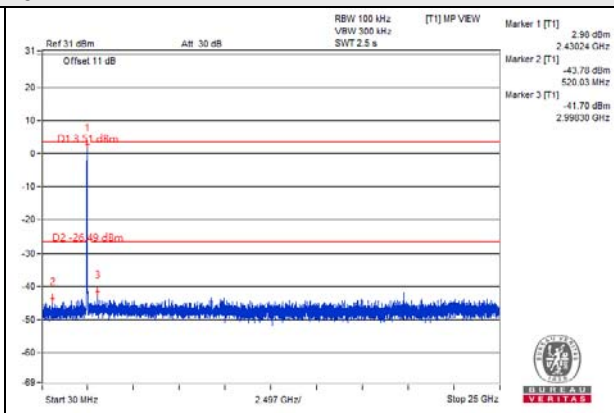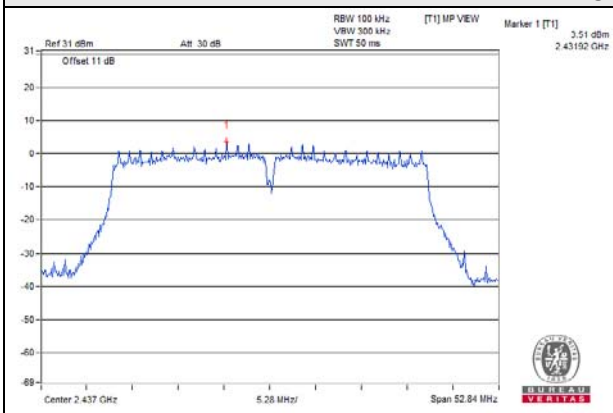


CH 9

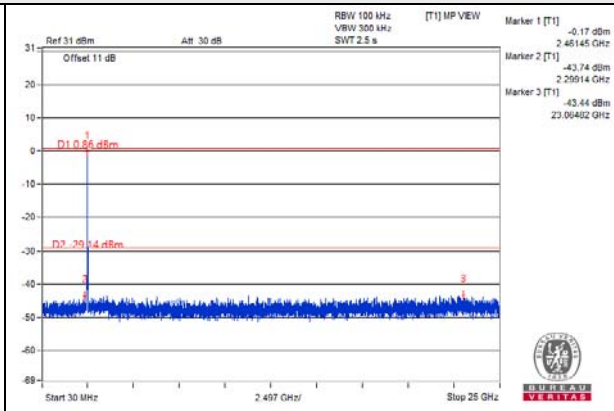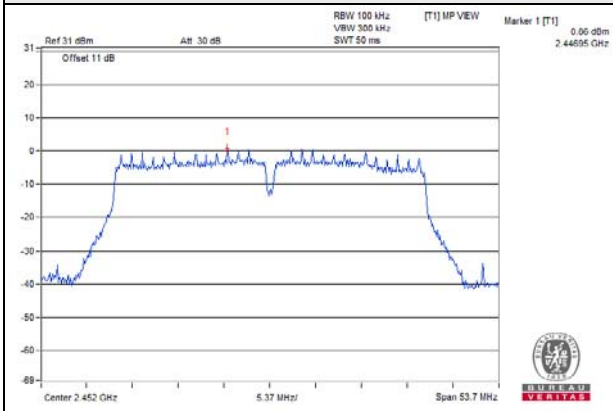


CH 3 Band edge


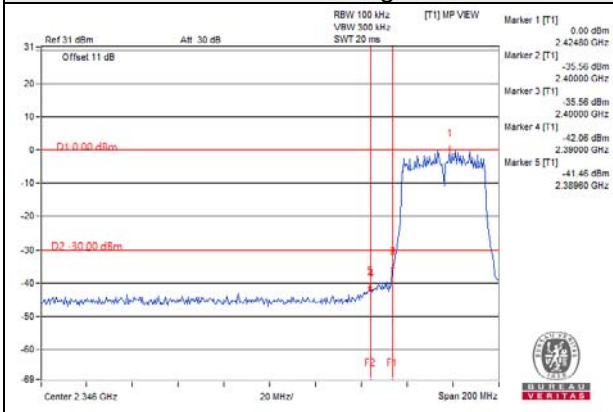


CH 9 Band edge

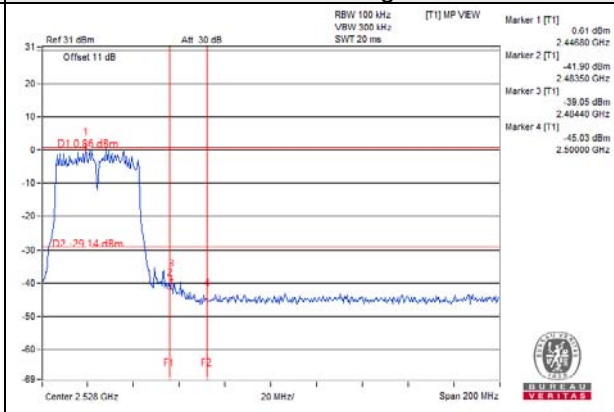


## Annex A- Band Edge Measurement

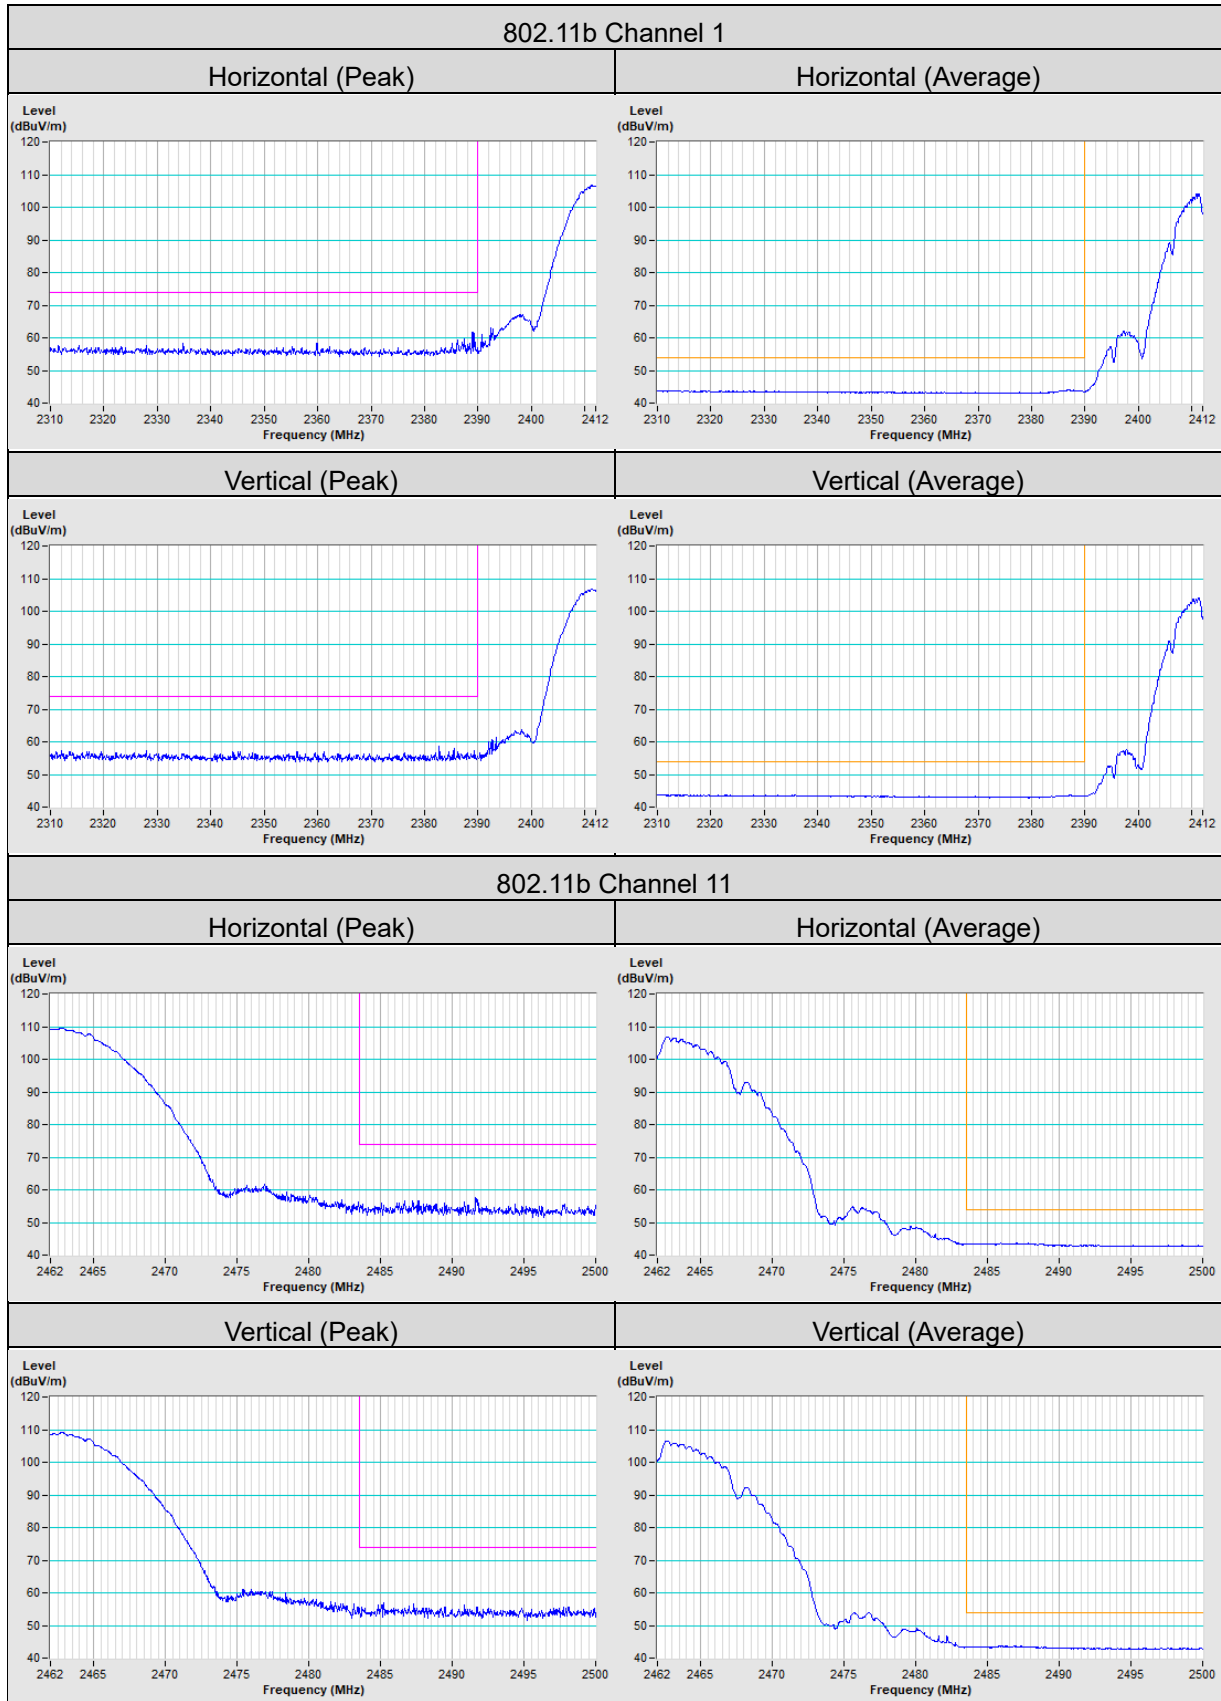

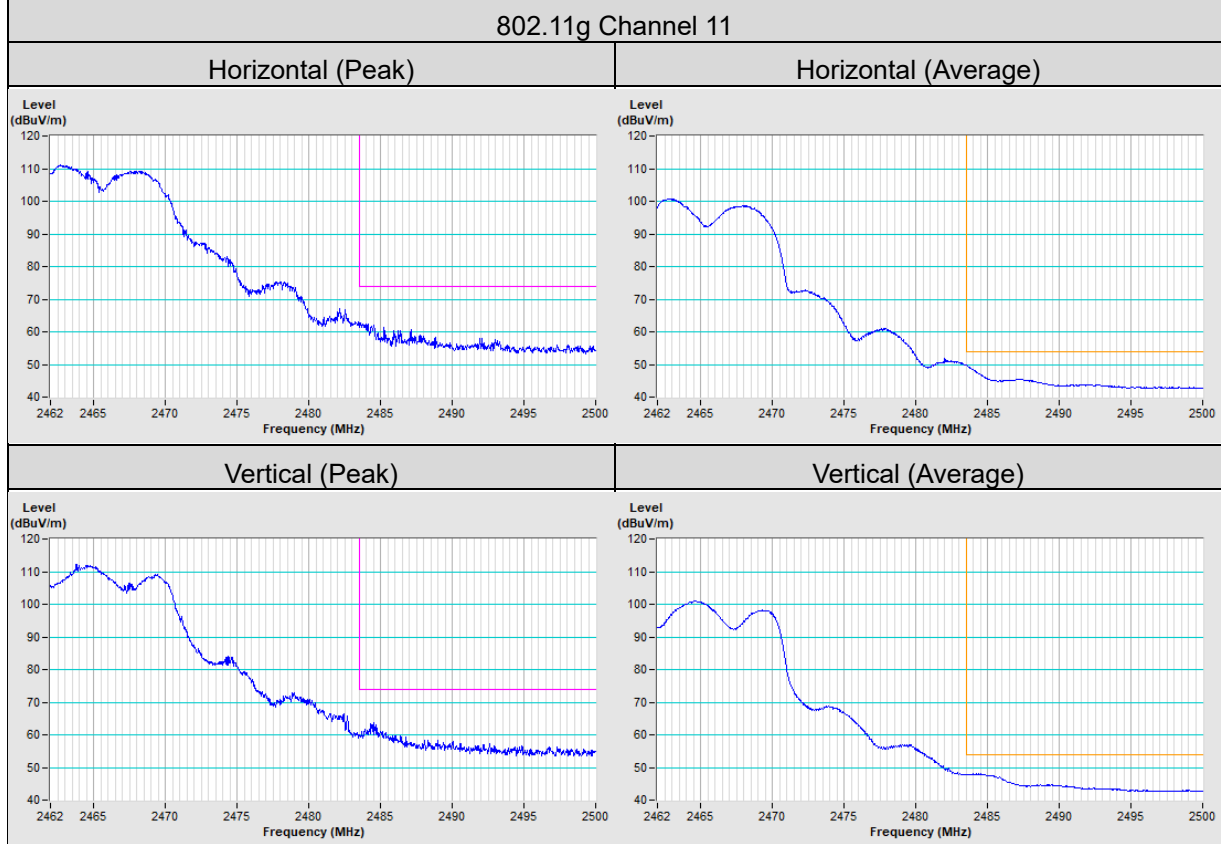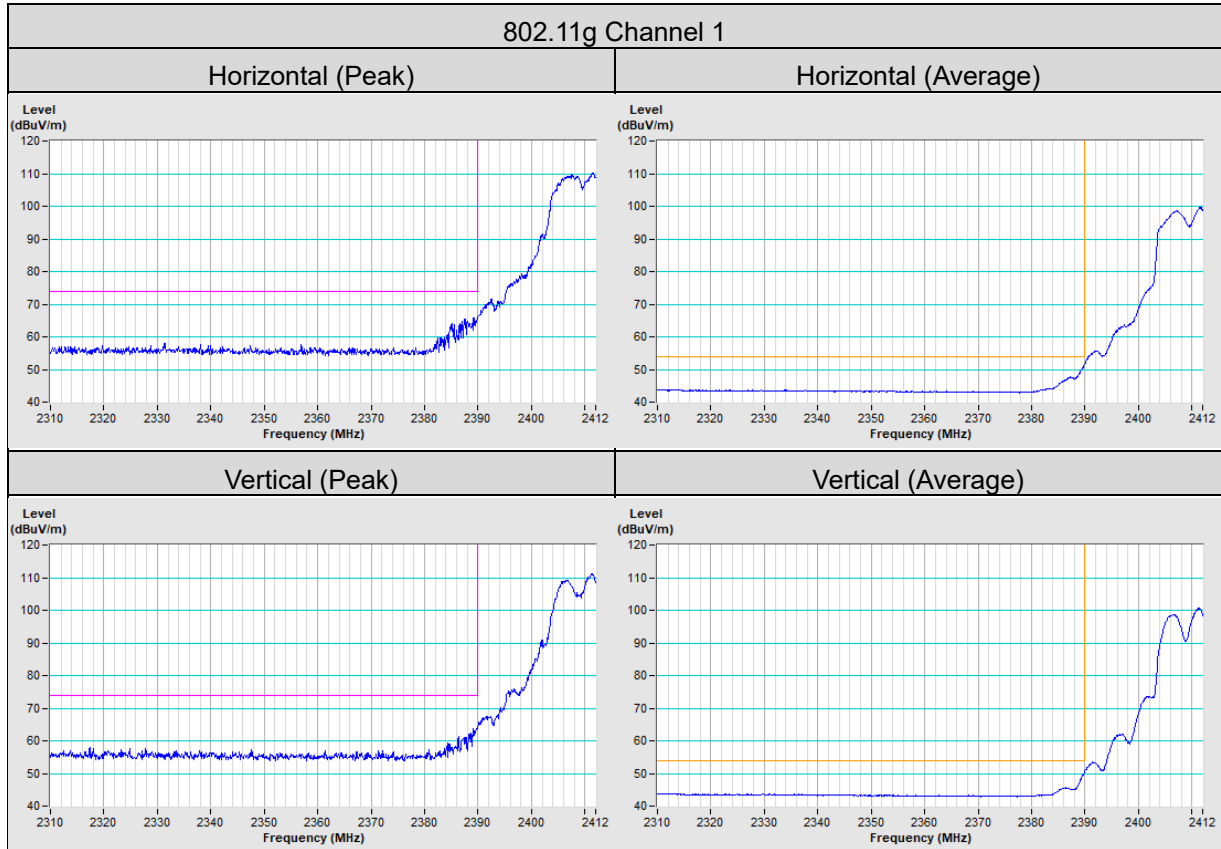


### 802.11n (HT20) Channel 1

Horizontal (Peak)	Horizontal (Average)
-------------------	----------------------

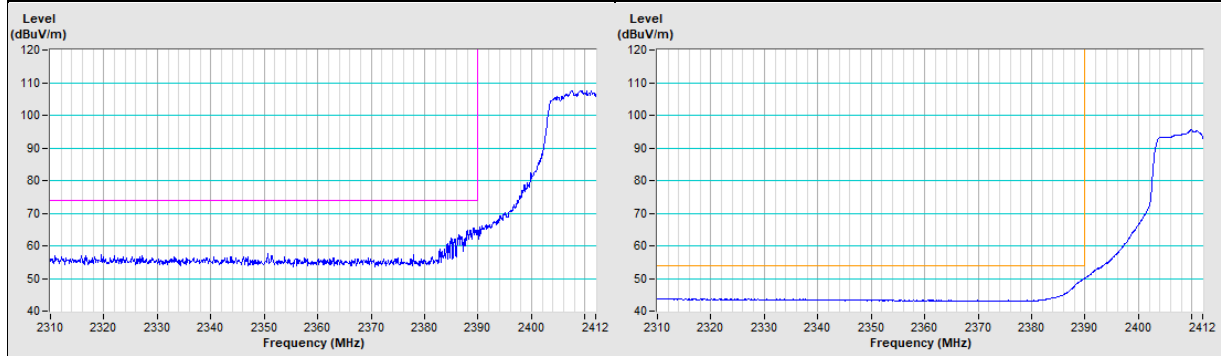


Vertical (Peak)	Vertical (Average)
-----------------	--------------------

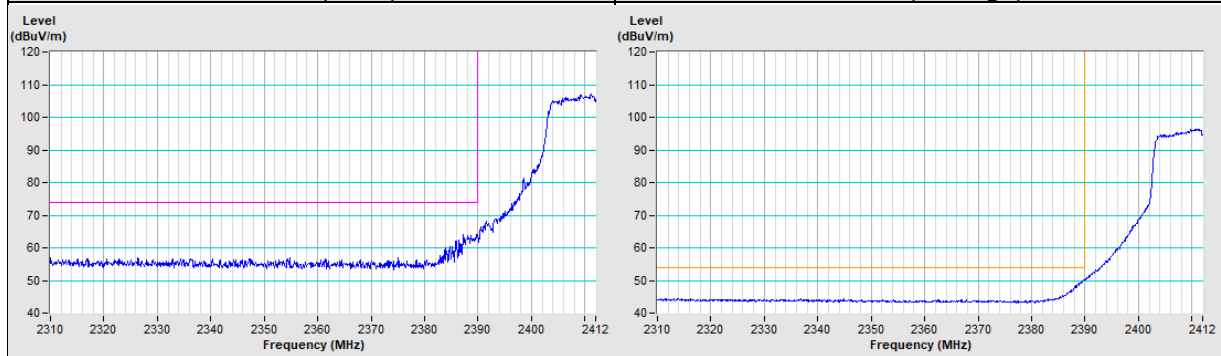



### 802.11n (HT20) Channel 11

Horizontal (Peak)	Horizontal (Average)
-------------------	----------------------

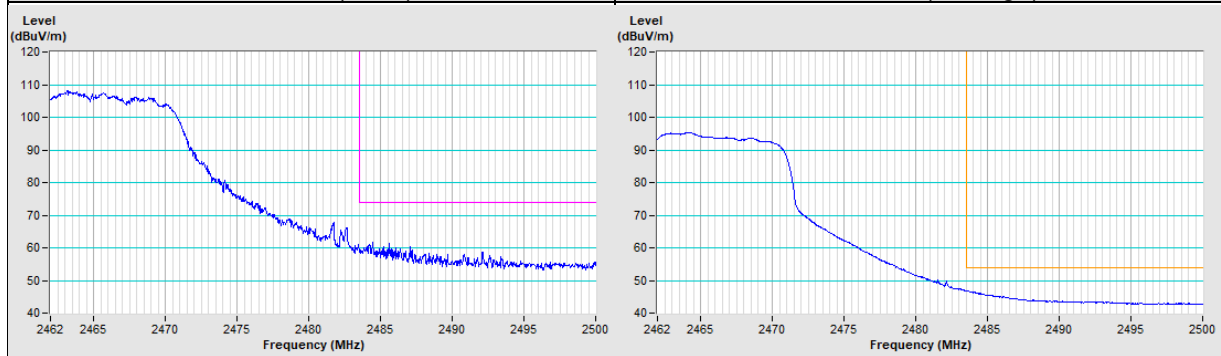

Vertical (Peak)	Vertical (Average)
-----------------	--------------------

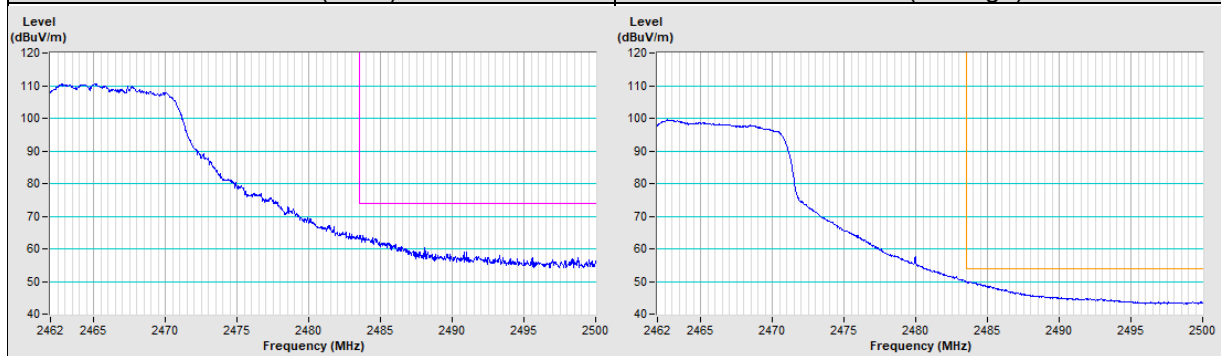

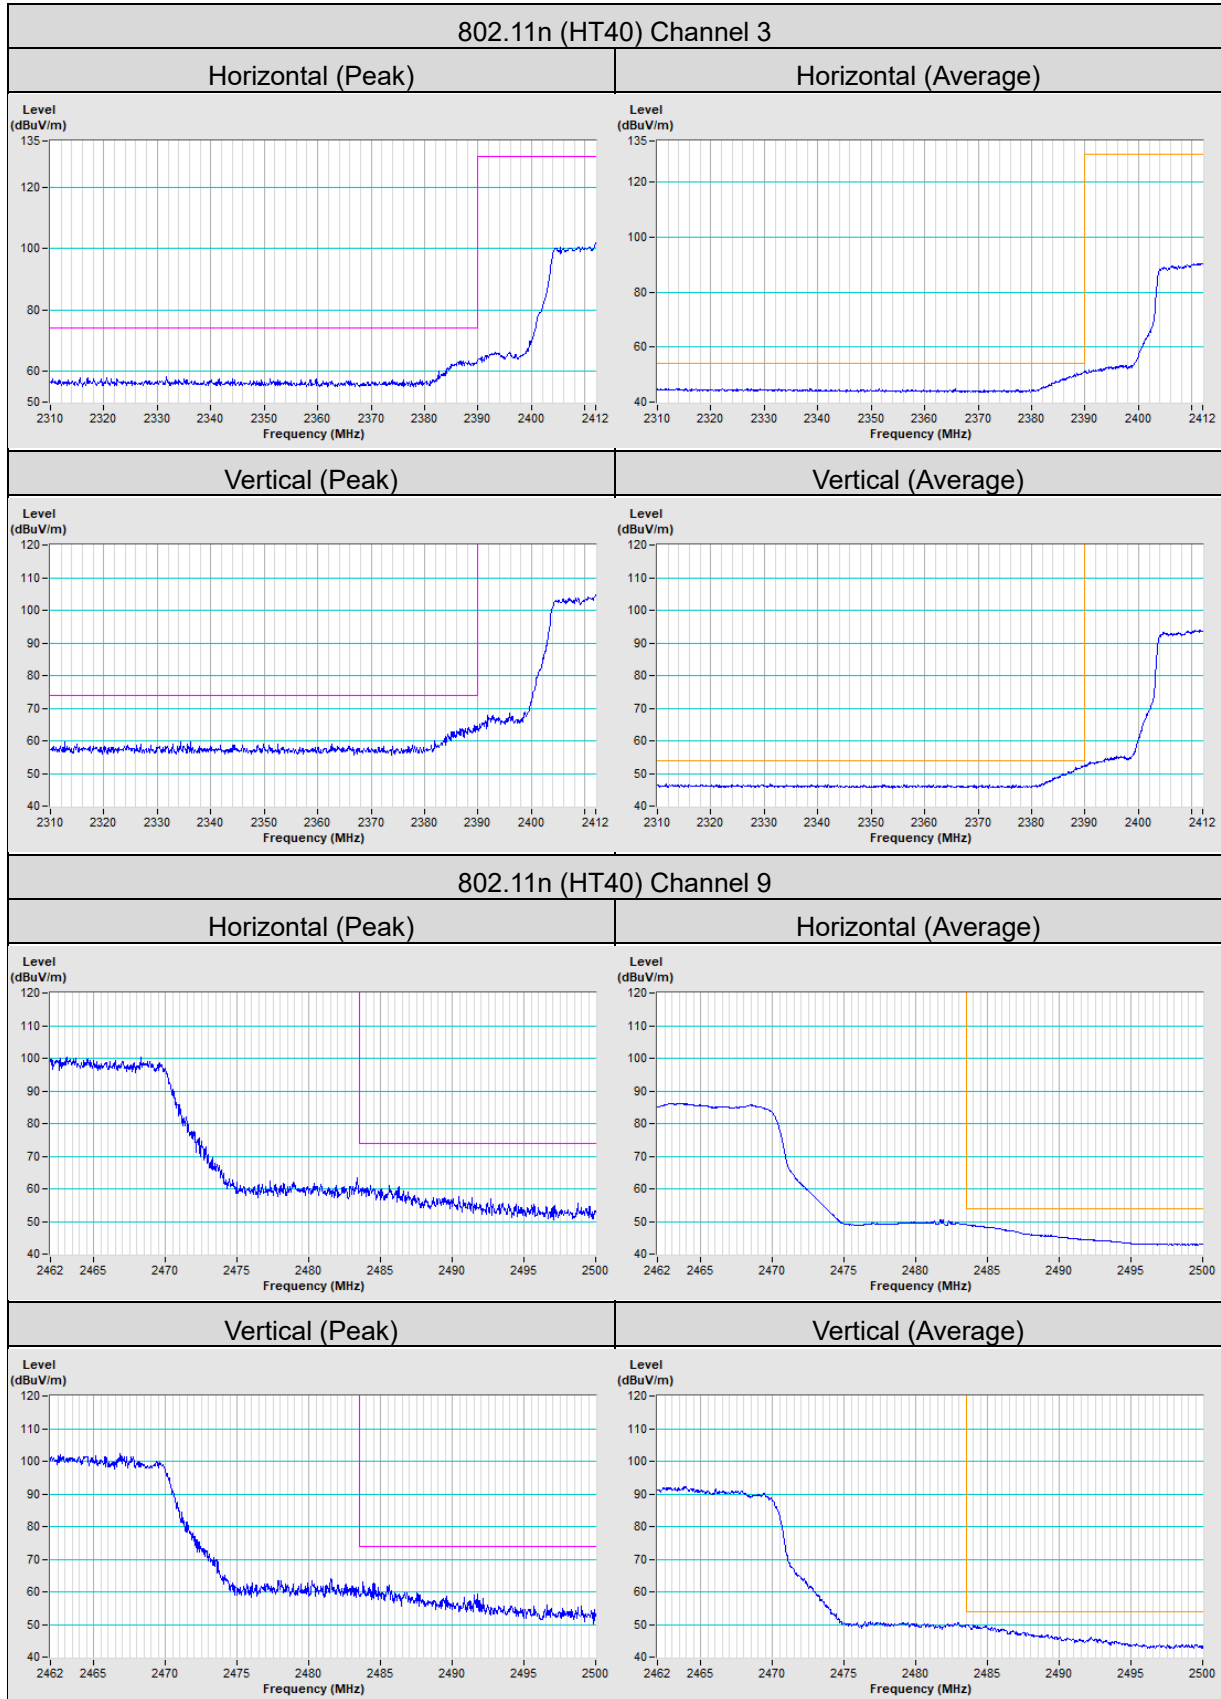

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).



## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### **Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

### **Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

### **Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---