



**FCC 47 CFR PART 15 SUBPART C AND ANSI C63.4:2009
TEST REPORT**

For

Computer

Model : DS-561SQ-S7A1E

**Data Applies To : DS-562SQ-S6A1E ; DS-56XXXXXXXXXXXXXXXXXX ;
PN-ZP35 ; PN-ZP30 ; PN-ZPXXXXXXXXXXXXXXXXXX
(where "X" may be any alphanumeric character, "-" or blank)**

Trade Name : ADVANTECH

Issued for

Advantech Co. Ltd.

**No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District,
Taipei 114, Taiwan, R.O.C.**

Issued by

**Compliance Certification Services Inc.
Hsinchu Lab.**

**NO. 989-1 Wen Shan Rd., Shang Shan Village,
Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C**

TEL: +886-3-5921698

FAX: +886-3-5921108

<http://www.ccsrf.com>

E-Mail : service@ccsrf.com

Issued Date: July 18, 2013



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF or any government agencies. The test results of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	05/29/2013	Initial Issue	ALL	Gloria Chang
01	07/18/2013	Add Series Model	P.1, P.4, P.5	Gloria Chang



TABLE OF CONTENTS

TITLE	PAGE NO.
1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST MODES	6-7
4. TEST METHODOLOGY	8
5. FACILITIES AND ACCREDITATION	8
5.1 FACILITIES	8
5.2 ACCREDITATIONS.....	8
5.3 MEASUREMENT UNCERTAINTY	9
6. SETUP OF EQUIPMENT UNDER TEST.....	10-11
7. FCC PART 15.247 REQUIREMENTS	12
7.1 6dB BANDWIDTH	12-21
7.2 MAXIMUM PEAK OUTPUT POWER	22-24
7.3 POWER SPECTRAL DENSITY	25-35
7.4 CONDUCTED SPURIOUS EMISSION	36-48
7.5 RADIATED EMISSION.....	49-82
7.6 CONDUCTED EMISSION.....	83-93



1. TEST REPORT CERTIFICATION

Applicant : Advantech Co. Ltd..
Address : No.1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 114, Taiwan, R.O.C.
Equipment Under Test : Computer
Model : DS-561SQ-S7A1E
Data Applies To : DS-562SQ-S6A1E ; DS-56XXXXXXXXXXXXXXXXXXXX ; PN-ZP35 ; PN-ZP30 ; PN-ZPXXXXXXXXXXXXXXXXXXXX (where "X" may be any alphanumeric character, "-" or blank)
Trade Name : ADVANTECH
Tested Date : March 06 ~ May 28, 2013

APPLICABLE STANDARD	
Standard	Test Result
FCC Part 15 Subpart C AND ANSI C63.4:2009	PASS

WE HEREBY CERTIFY THAT: The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Sb. Lu
Sr. Engineer

Reviewed by:

Gundam Lin
Sr. Engineer



2. EUT DESCRIPTION

Product Name	Computer
Model Number	DS-561SQ-S7A1E
Data Applies To	DS-562SQ-S6A1E ; DS-56XXXXXXXXXXXXXXXXXX ; PN-ZP35 ; PN-ZP30 ; PN-ZPXXXXXXXXXXXXXXXXXX (where "X" may be any alphanumeric character, "-" or blank)
Identify Number	T130412L04
Received Date	March 06, 2013
Frequency Range	IEEE 802.11b/g, 802.11n HT20 : 2412MHz ~ 2462MHz IEEE 802.11n HT40 : 2422MHz ~ 2452MHz
Transmit Power	IEEE 802.11b : 19.94dBm (0.0986W) IEEE 802.11g : 24.49dBm (0.2812W) IEEE 802.11n HT20 : 23.70dBm (0.2344W) IEEE 802.11n HT40 : 23.84dBm (0.2421W)
Channel Spacing	IEEE 802.11b/g, 802.11n HT20/HT40 : 5MHz
Channel Number	IEEE 802.11b/g, 802.11n HT20: 11 Channels IEEE 802.11n HT40 : 7 Channels
Transmit Data Rate	IEEE 802.11b : 11, 5.5, 2, 1 Mbps IEEE 802.11g : 54, 48, 36, 24, 18, 12, 9, 6 Mbps IEEE 802.11n HT20 : 72.2, 65, 58.5, 57.78, 52, 43.33, 39, 28.89, 26, 21.7, 19.5, 14.44, 13, 7.2, 6.5 Mbps IEEE 802.11n HT40 : 150, 135, 121.5, 120, 108, 90, 81, 60, 54, 45, 40.5, 30, 27, 15, 13.5Mbps
Type of Modulation	IEEE 802.11b : DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g : OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20/40 : OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Type	Dipole Antenna, Antenna Gain : 2.0dBi
Power Rating	19Vdc
Test Voltage	120Vac, 60Hz
AC Power Cord Type	Non-shielded cable 1.72 m (Detachable) (For Power Adapter 2)
DC Power Cable Type	Non-shielded cable 1.8 m (Non-detachable) (For Power Adapter 1) Non-shielded cable 1.55 m(Non-detachable), with a ferrite core (For Power Adapter 2)
I/O Port	RS232 Port × 1, RJ-11 Port × 1, Audio In Port × 1, Audio Out Port × 1, USB 2.0 Port × 2, USB 3.0 Port × 2, RJ-45 Port × 1 , Display Port × 1, VGA Port × 1, Power Port × 1
Signal Cable	Shielded VGA cable, 1.82 m × 1, with two ferrite core Shielded USB cable, 1.8 m × 1



Power Adapter :

No.	Manufacturer	Model No.	Power Input	Power Output
1	DELTA	ADP-65JH AB	100-240Vac, 1.5A, 50-60Hz	19Vdc, 3.42A
2	FSP	FSP065-RAB	100-240Vac, 1.5A, 50-60Hz	19Vdc, 3.42A

Remark :

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. For more details, please refer to the User's manual of the EUT.
3. The only difference between all models is the market segmentation.
4. The model DS-561SQ-S7A1E, DS-562SQ-S6A1E was considered the main model for testing.
5. This submittal(s) (test report) is intended for FCC ID: M82-DS561DS562 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

3. DESCRIPTION OF TEST MODES

The EUT is an 802.11 transceiver in Computer form factor.

IEEE 802.11b/g, 802.11n HT20/HT40 : 1TX / 1RX.

Conducted Emission / Radiated Emission Test (Below 1 GHz)

1. The following test modes were scanned during the preliminary test:

No.	Pre-Test Mode
1	TX Mode / Power Adapter 1 / DS-561SQ-S7A1E
2	TX Mode / Power Adapter 2 / DS-561SQ-S7A1E
3	TX Mode / Power Adapter 1 / DS-562SQ-S6A1E
4	TX Mode / Power Adapter 2 / DS-562SQ-S6A1E

2. After the preliminary scan, the following test mode was found to produce the highest emission level.

Final Test Mode		
Emission	Radiated Emission	TX Mode / Power Adapter 2 / DS-561SQ-S7A1E
		TX Mode / Power Adapter 2 / DS-562SQ-S6A1E
	Conducted Emission	TX Mode / Power Adapter 1 / DS-561SQ-S7A1E
		TX Mode / Power Adapter 2 / DS-561SQ-S7A1E
		TX Mode / Power Adapter 1 / DS-562SQ-S6A1E
		TX Mode / Power Adapter 2 / DS-562SQ-S6A1E

Remark : Then, the above highest emission mode of the configuration of the EUT and cable was chosen for all final test items.



**Conducted / Radiated Emission Test (Above 1 GHz)
IEEE 802.11b, 802.11g, 802.11n HT20 mode**

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode : 1Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11g mode : 6Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT20 mode : 6.5Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT40 mode

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n HT40 mode : 13.5Mbps data rate (worst case) were chosen for full testing.



4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2009 and FCC CFR 47, 15.207, 15.209 and 15.247.

5. FACILITIES AND ACCREDITATION

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

NO. 989-1 Wen Shan Rd., Shang Shan Village,
Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C

The sites are constructed in conformance with the requirements of ANSI C63.4:2009 and CISPR 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-4, CISPR 16-1-5.

5.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

Taiwan	TAF
---------------	-----

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	INDUSTRY CANADA
Japan	VCCI
Taiwan	BSMI
USA	FCC MRA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>



5.3 MEASUREMENT UNCERTAINTY

The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2.

PARAMETER	UNCERTAINTY
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 30 to 1000 MHz	+/- 3.97
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 1 to 18GHz	+/- 3.58
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 18 to 26 GHz	+/- 3.59
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 26 to 40 GHz	+/- 3.81
Conducted Emission (Mains Terminals), 9kHz to 30MHz	+/- 2.48

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Consistent with industry standard (e.g. CISPR 22, clause 11, Measurement Uncertainty) determining compliance with the limits shall be base on the results of the compliance measurement. Consequently the measure emissions being less than the maximum allowed emission result in this be a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is base on conducted and radiated emissions being less than U_{CISPR} which is 3.6dB and 5.2dB respectively. CCS values (called U_{Lab} in CISPR 16-4-2) is less than U_{CISPR} as shown in the table above. Therefore, MU need not be considered for compliance.



6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

No.	Product	Manufacturer	Model No.	Serial No.	FCC ID
1	Keyboard	DELL	SK-8115	CN-0J4635-716 16-61L-09ZJ	DoC
2	Mouse	HP	M-UAE96	265986-011	DoC
3	Modem	ZyXEL	Omni 56K	S1Z4107727	1880MNI56K
4	LCD Monitor	SONY	KDL-22EX420	---	---
5	Headphones	SCE	MIC-16	---	---
6	Notebook	HP	ProBook 4421s	CNF03242PM	DoC

No.	Signal cable description
1	Non-shielded RJ-45 cable, 12m × 1
2	Non-shielded RJ-11 cable, 1.84m × 1

SETUP DIAGRAM FOR TESTS

EUT & peripherals setup diagram is shown in appendix setup photos.

EUT OPERATING CONDITION

1. Setup all computers like the setup diagram.
2. Run Realtek software.
3. Select the following settings.
4. TX Mode:
 - ⇒ Tx Data Rate: 1Mbps Bandwidth 20 (IEEE 802.11b mode)
6Mbps Bandwidth 20 (IEEE 802.11g mode)
6.5Mbps Bandwidth 20 (IEEE 802.11n HT20 mode)
13.5Mbps Bandwidth 40 (IEEE 802.11n HT40 mode)
 - ⇒ Power control:
 - IEEE 802.11b Channel Low (2412MHz) TX Power 46
 - IEEE 802.11b Channel Mid (2437MHz) TX Power 45
 - IEEE 802.11b Channel High (2462MHz) TX Power 43
 - IEEE 802.11g Channel Low (2412MHz) TX Power 51
 - IEEE 802.11g Channel Mid (2437MHz) TX Power 51
 - IEEE 802.11g Channel High (2462MHz) TX Power 47



IEEE 802.11n HT20 Channel Low (2412MHz) TX Power 51
IEEE 802.11n HT20 Channel Mid (2437MHz) TX Power 49
IEEE 802.11n HT20 Channel High (2462MHz) TX Power 47
IEEE 802.11n HT40 Channel Low (2422MHz) TX Power 51
IEEE 802.11n HT40 Channel Mid (2437MHz) TX Power 51
IEEE 802.11n HT40 Channel High (2452MHz) TX Power 46

5. All of the functions are under run.
6. Start test.



7. FCC PART 15.247 REQUIREMENTS

7.1 6dB BANDWIDTH

LIMITS

§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/14/2013

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

1. The transmitter output was connected to a spectrum analyzer.
2. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
3. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



TEST RESULTS

IEEE 802.11b Mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	10.13	500	PASS
Middle	2437	10.13	500	PASS
High	2462	10.13	500	PASS

IEEE 802.11g Mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	16.67	500	PASS
Middle	2437	16.67	500	PASS
High	2462	16.67	500	PASS

IEEE 802.11n HT20 Mode



Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	17.87	500	PASS
Middle	2437	17.87	500	PASS
High	2462	17.87	500	PASS


IEEE 802.11n HT40 Mode



Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2422	36.40	500	PASS
Middle	2437	36.50	500	PASS
High	2452	36.60	500	PASS






6dB BANDWIDTH

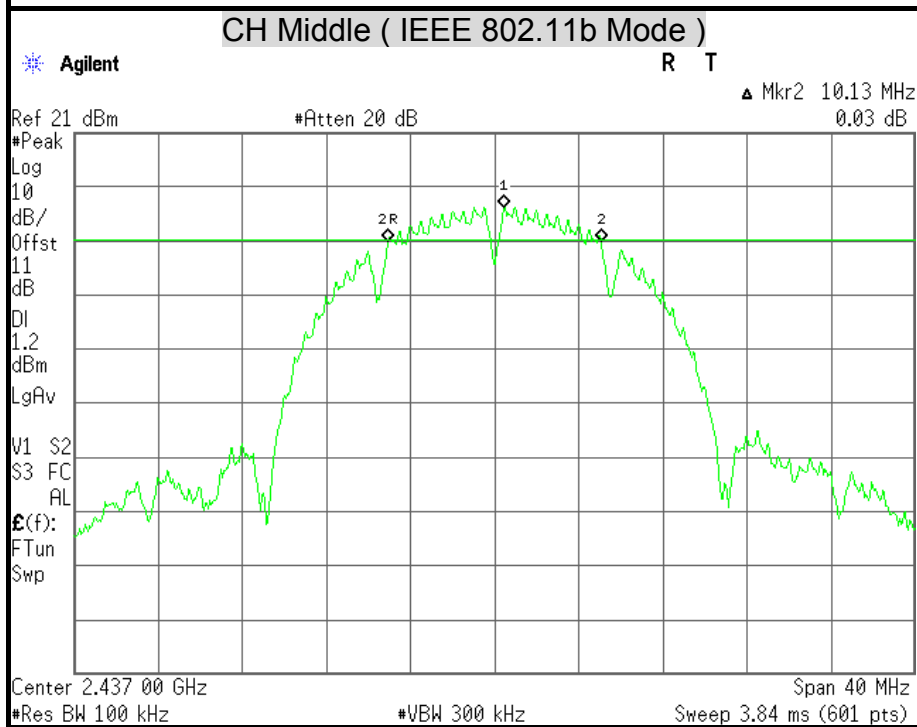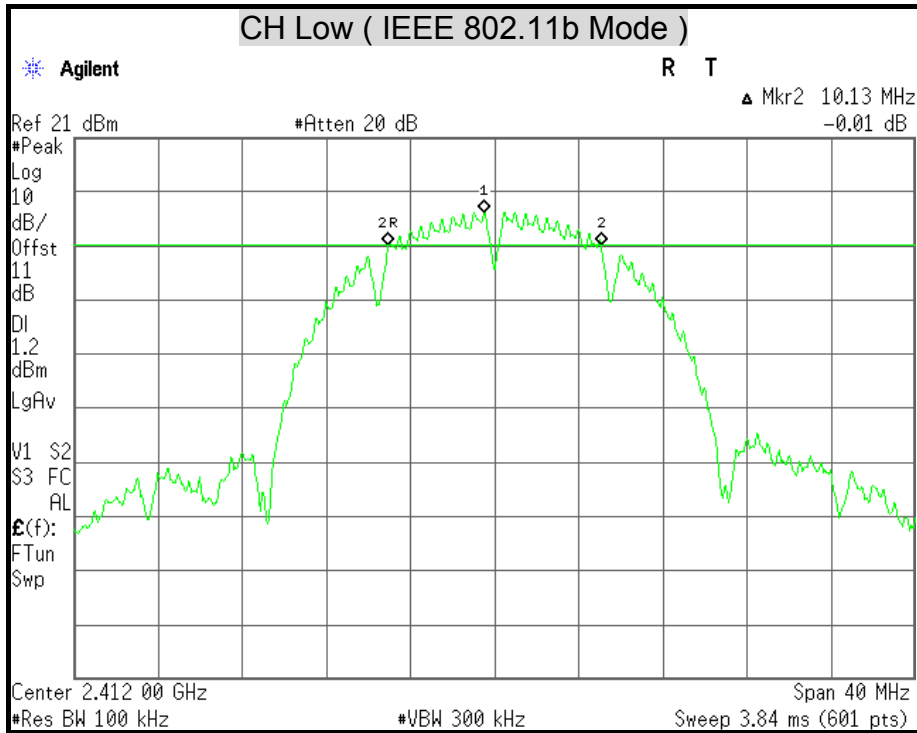



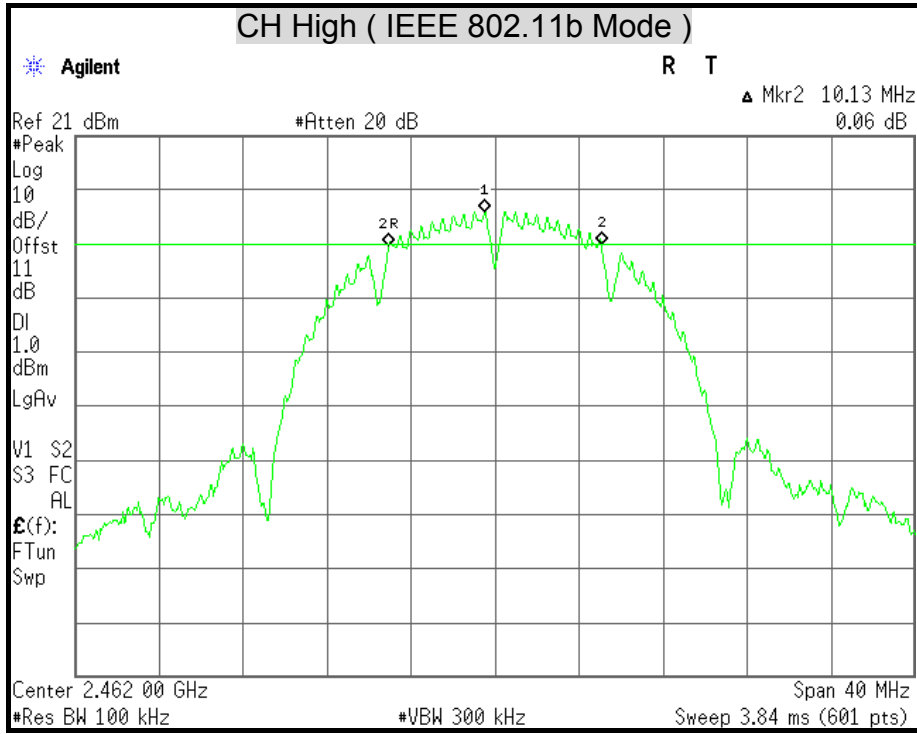


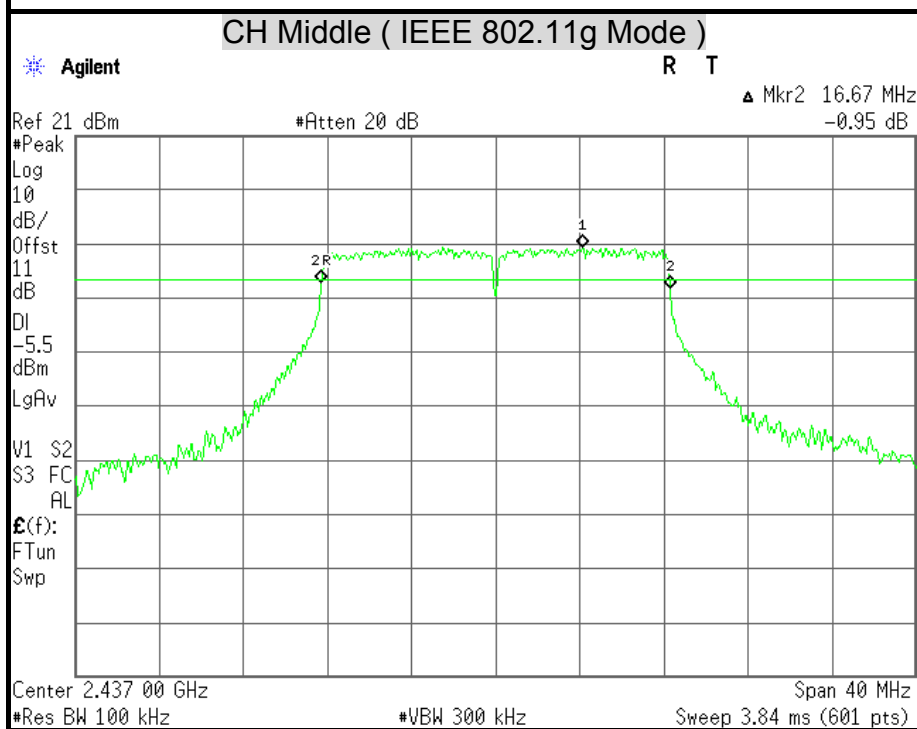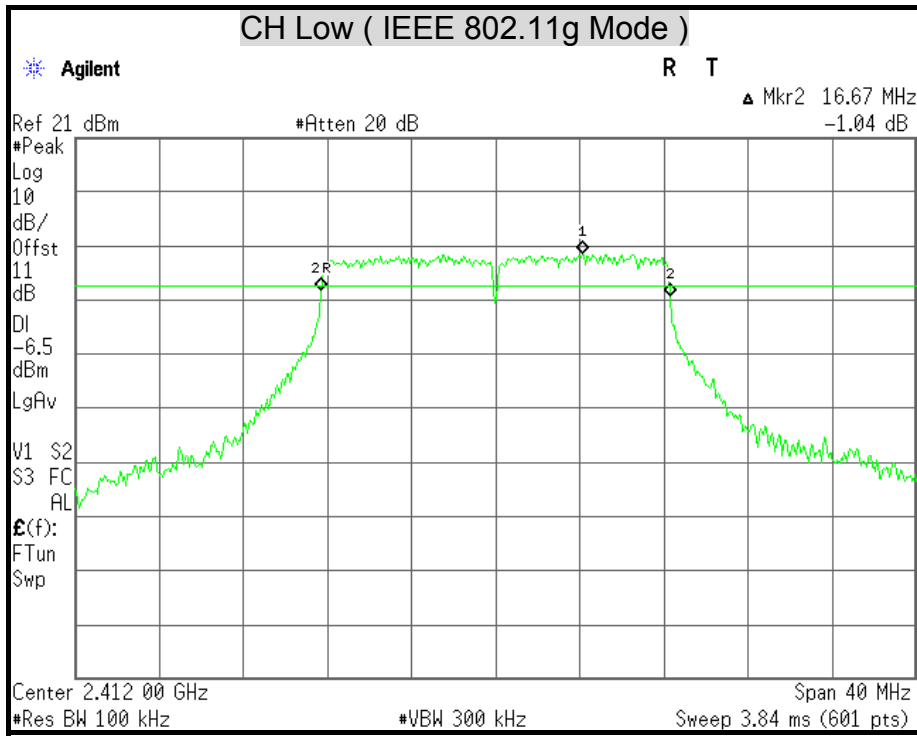


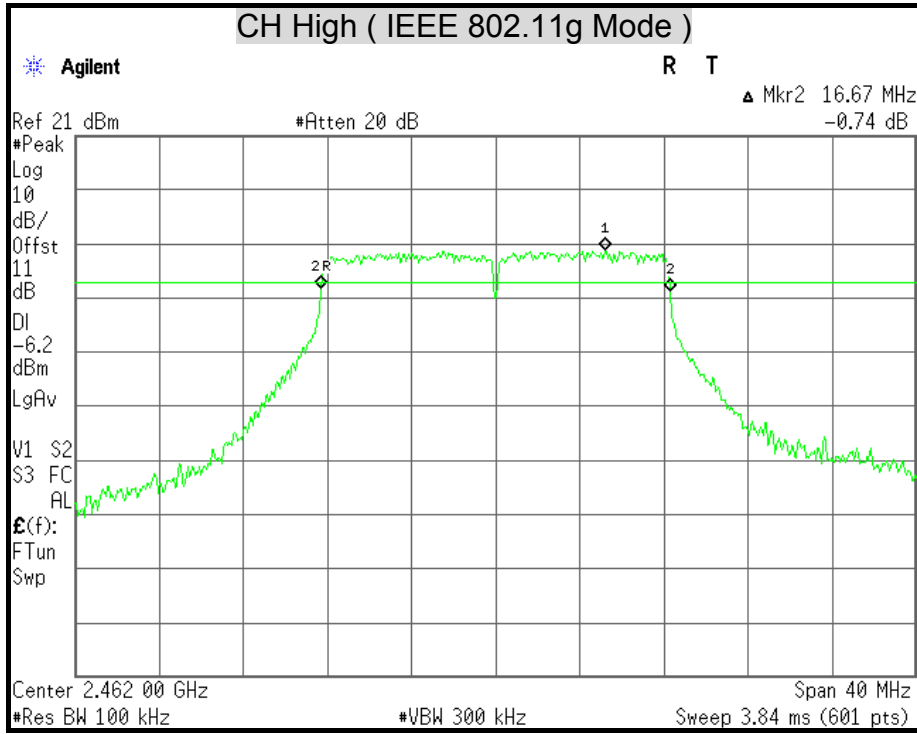

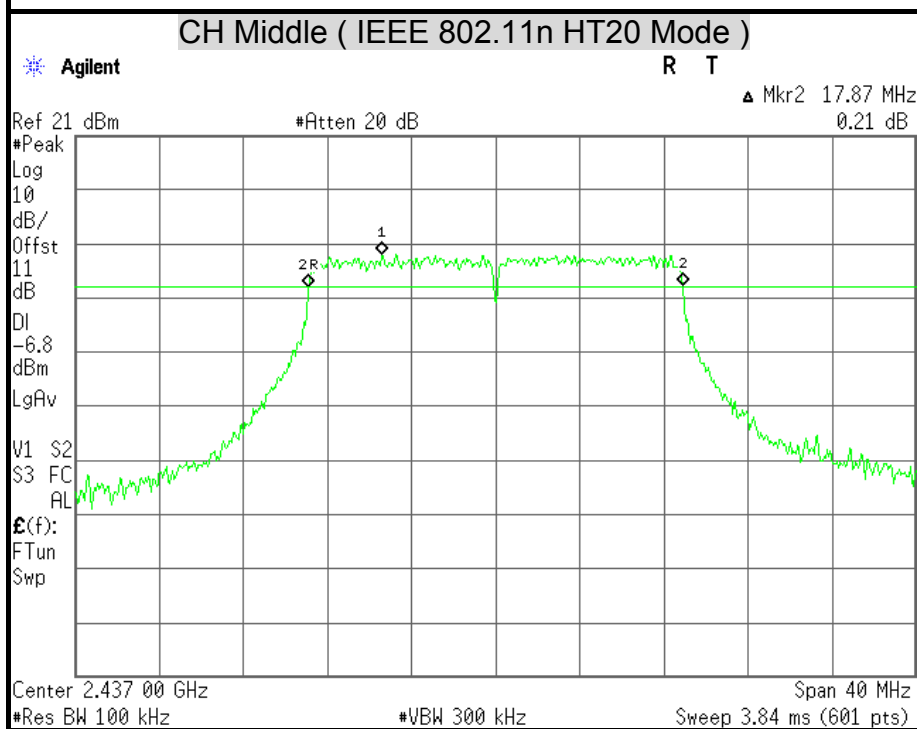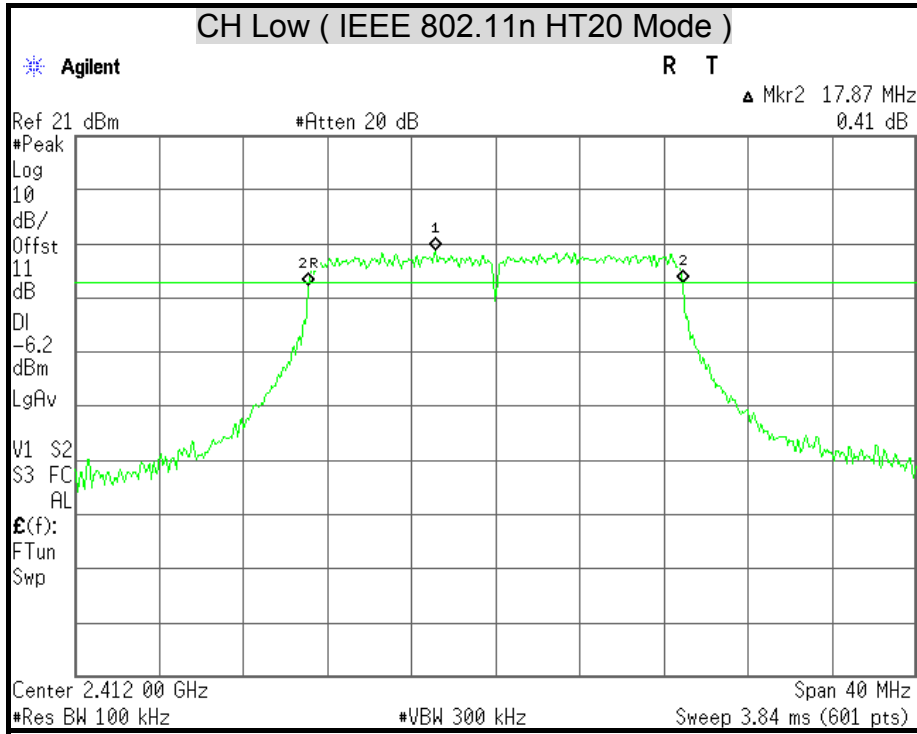

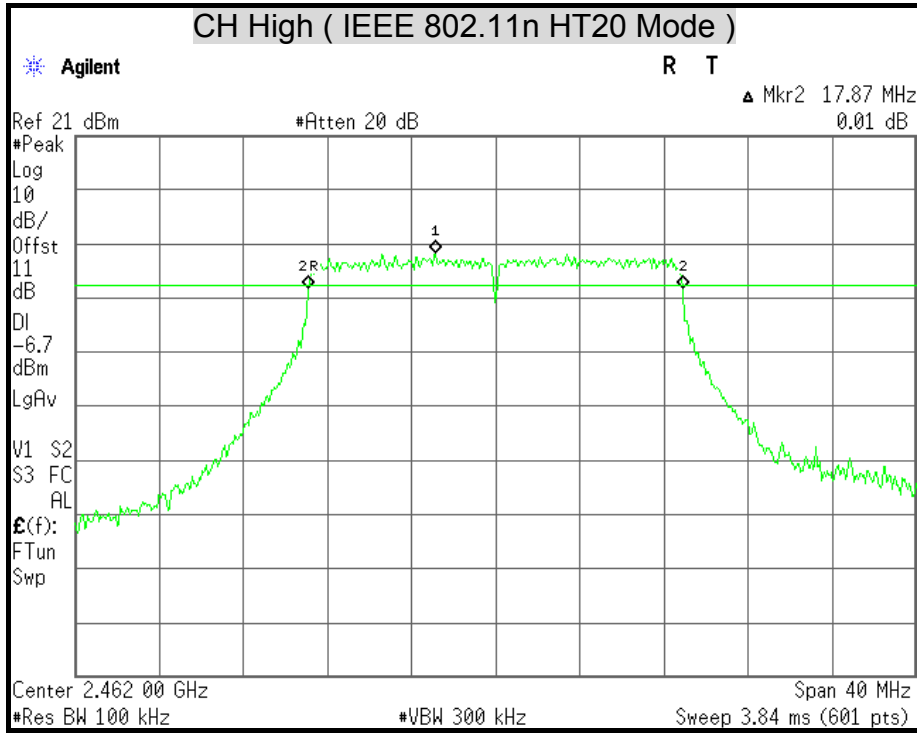

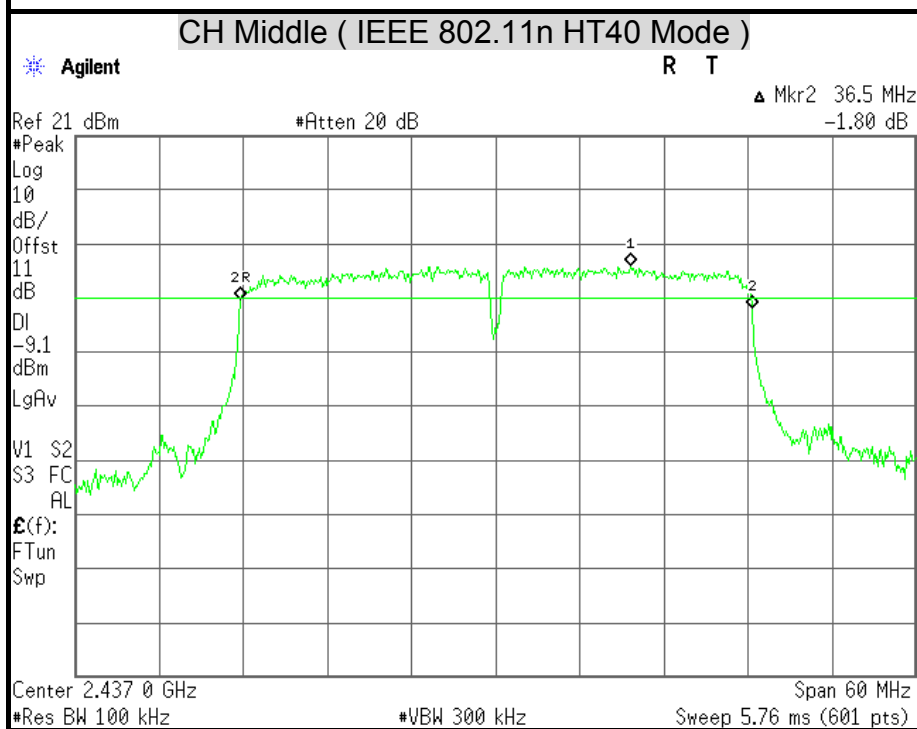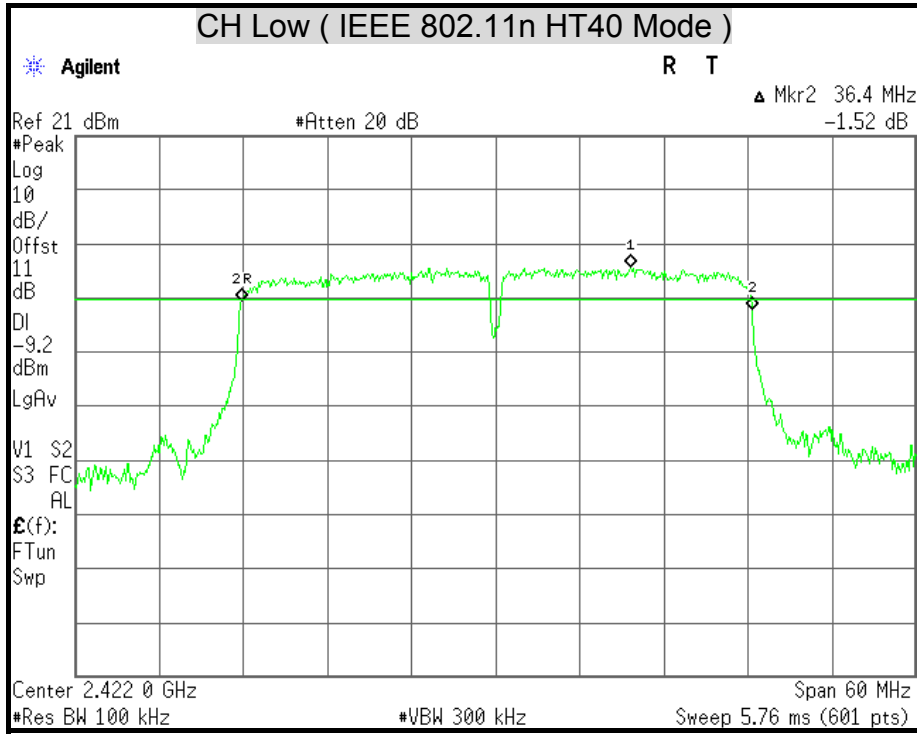

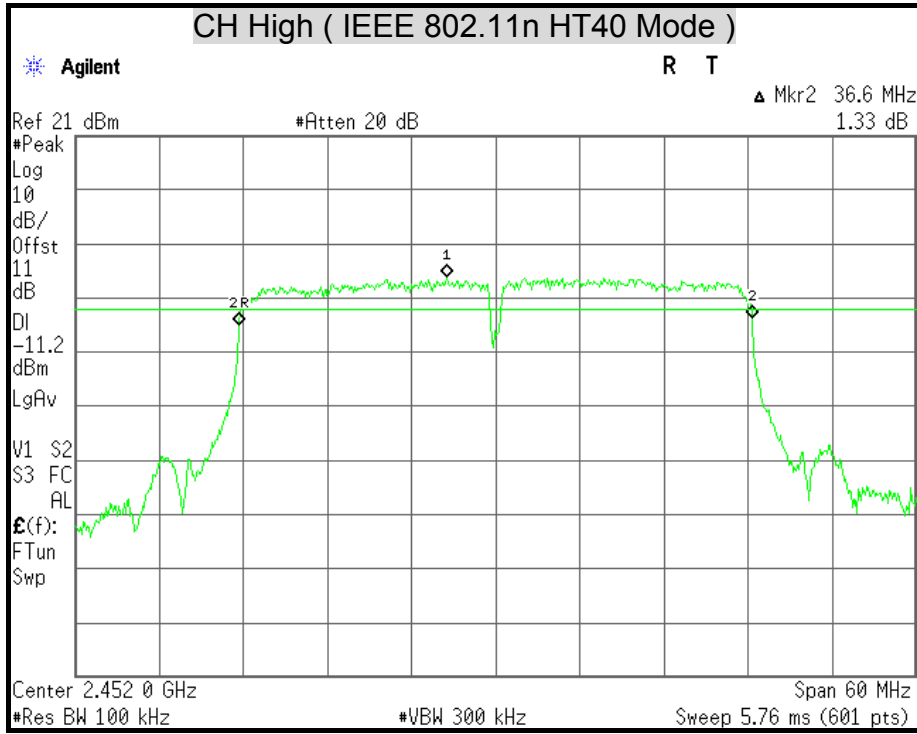



7.2 MAXIMUM PEAK OUTPUT POWER

LIMITS

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	Anritsu	ML2495A	1149001	12/06/2013
Power Sensor	Anritsu	MA2411B	1126148	12/07/2013

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.



TEST RESULTS

IEEE 802.11b Mode

Channel	Channel Frequency (MHz)	Peak Power		Peak Power Limit		Pass / Fail
		(dBm)	(W)	(dBm)	(W)	
Low	2412	19.93	0.0984	30	1	PASS
Middle	2437	19.94	0.0986	30	1	PASS
High	2462	19.61	0.0914	30	1	PASS

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 11.5dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.

IEEE 802.11g Mode

Channel	Channel Frequency (MHz)	Peak Power		Peak Power Limit		Pass / Fail
		(dBm)	(W)	(dBm)	(W)	
Low	2412	23.51	0.2244	30	1	PASS
Middle	2437	24.49	0.2812	30	1	PASS
High	2462	23.47	0.2223	30	1	PASS

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.5dB (including 10 dB pad and 1.5 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.



IEEE 802.11n HT20 Mode

Channel	Channel Frequency (MHz)	Peak Power		Peak Power Limit		Pass / Fail
		(dBm)	(W)	(dBm)	(W)	
Low	2412	23.52	0.2249	30	1	PASS
Middle	2437	23.70	0.2344	30	1	PASS
High	2462	23.01	0.2000	30	1	PASS

Remark:

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 11dB (including 10 dB pad and 1 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.

IEEE 802.11n HT40 Mode

Channel	Channel Frequency (MHz)	Peak Power		Peak Power Limit		Pass / Fail
		(dBm)	(W)	(dBm)	(W)	
Low	2422	23.30	0.2138	30	1	PASS
Middle	2437	23.84	0.2421	30	1	PASS
High	2452	22.19	0.1656	30	1	PASS

Remark:

1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 11dB (including 10 dB pad and 1 dB cable) was Entered as an offset in the power meter to allow for direct reading of power.



7.3 POWER SPECTRAL DENSITY

LIMITS

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/14/2013

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set analyzer center frequency to DTS channel center frequency.
3. Set the span to 1.5 times the DTS channel bandwidth.
4. Set the RBW \geq 3 kHz.
5. Set the VBW \geq 3 x RBW.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



TEST RESULTS

IEEE 802.11b Mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Minimum Limit (dBm)	Pass / Fail
Low	2412	-12.71	8	PASS
Middle	2437	-12.52	8	PASS
High	2462	-13.05	8	PASS

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g Mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Minimum Limit (dBm)	Pass / Fail
Low	2412	-14.69	8	PASS
Middle	2437	-14.00	8	PASS
High	2462	-15.11	8	PASS

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.



IEEE 802.11n HT20 Mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Minimum Limit (dBm)	Pass / Fail
Low	2412	-14.77	8	PASS
Middle	2437	-14.47	8	PASS
High	2462	-14.75	8	PASS

Remark:

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT40 Mode



Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Minimum Limit (dBm)	Pass / Fail
Low	2422	-14.74	8	PASS
Middle	2437	-13.90	8	PASS
High	2452	-16.11	8	PASS


Remark:



1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.






POWER SPECTRAL DENSITY

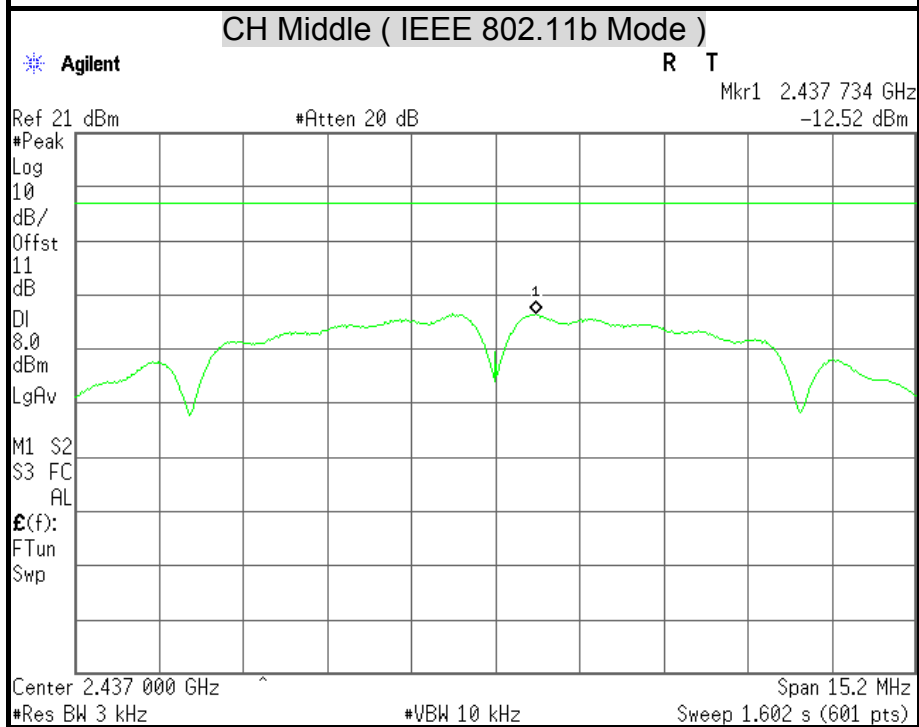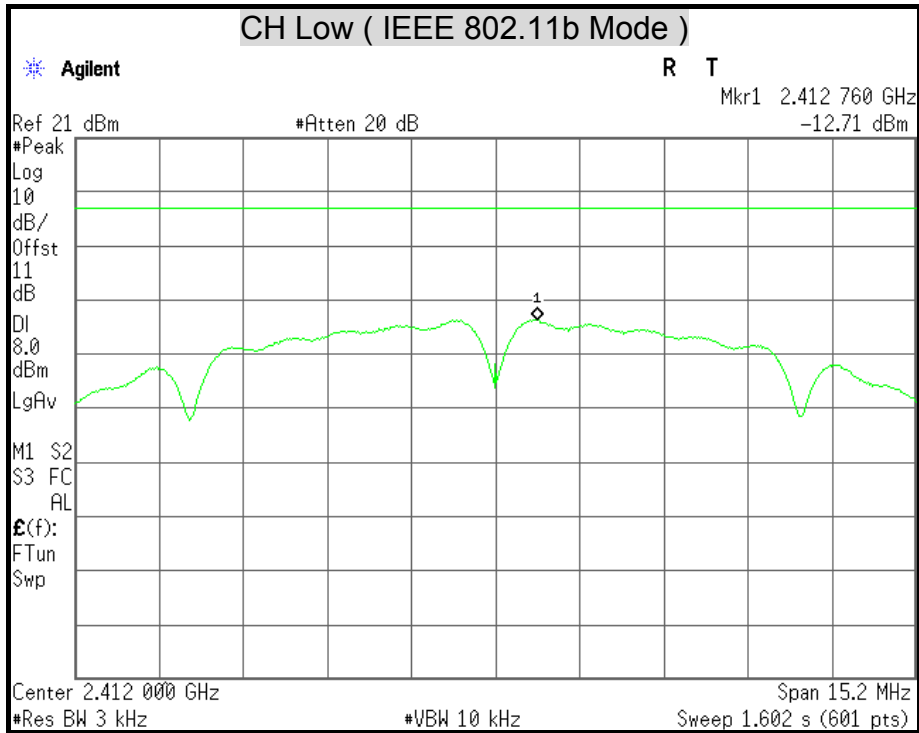



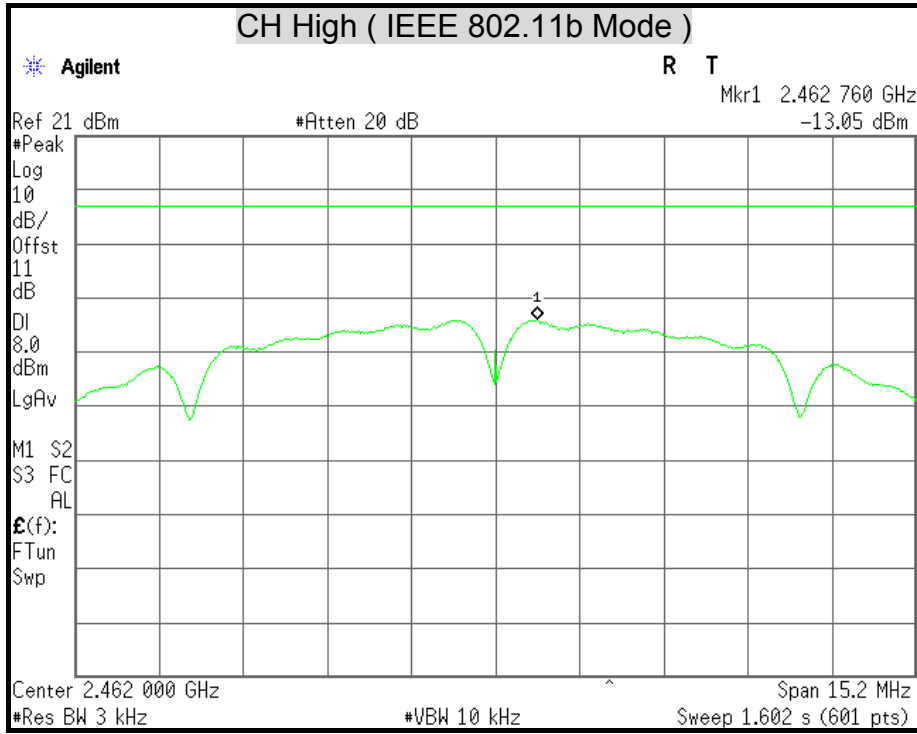


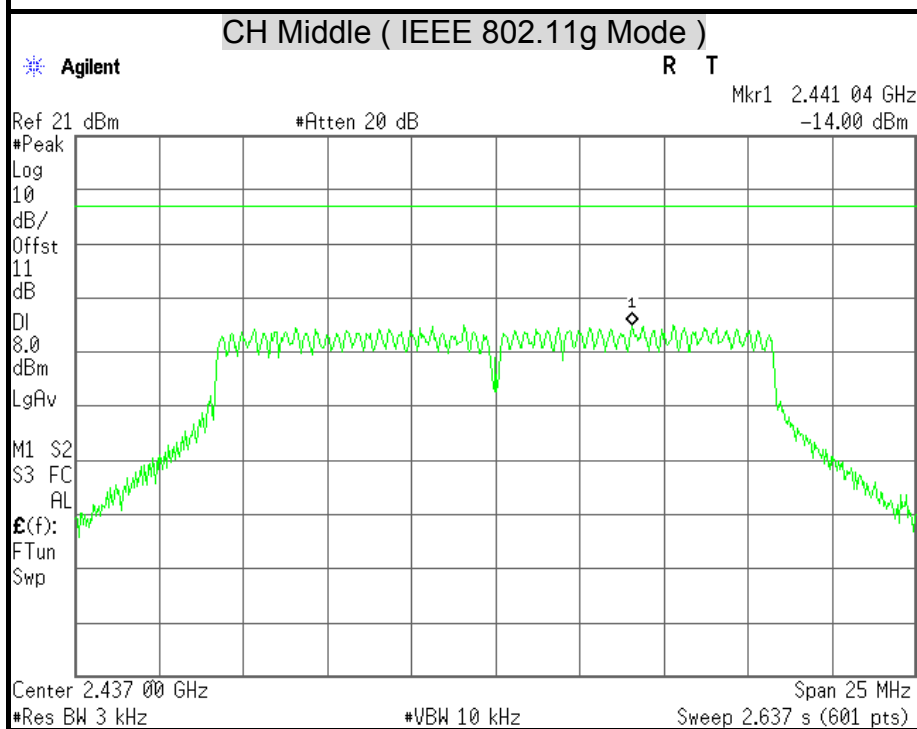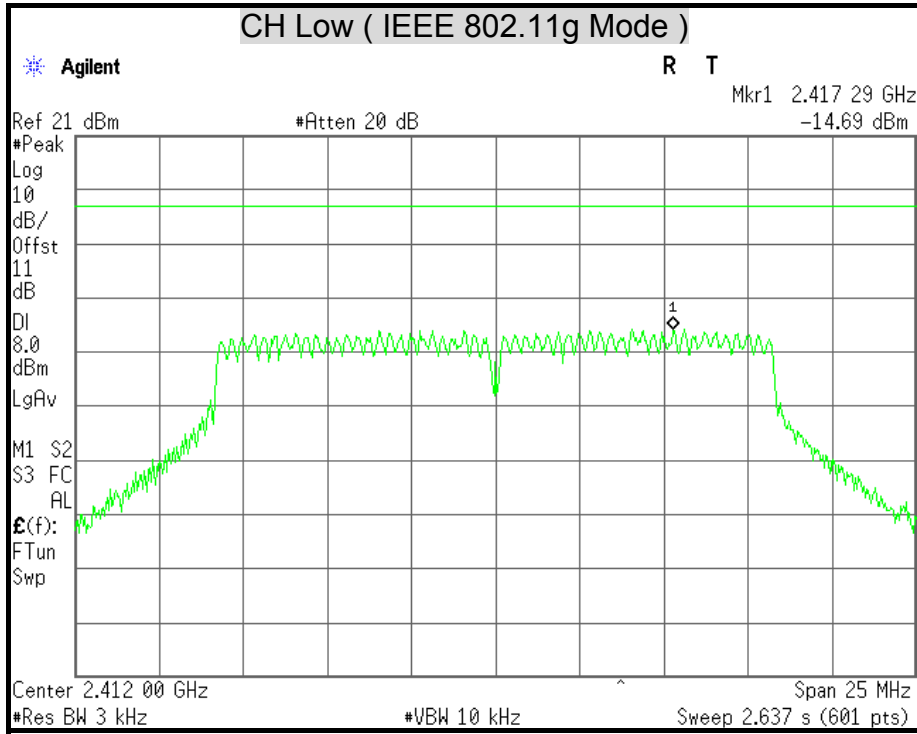


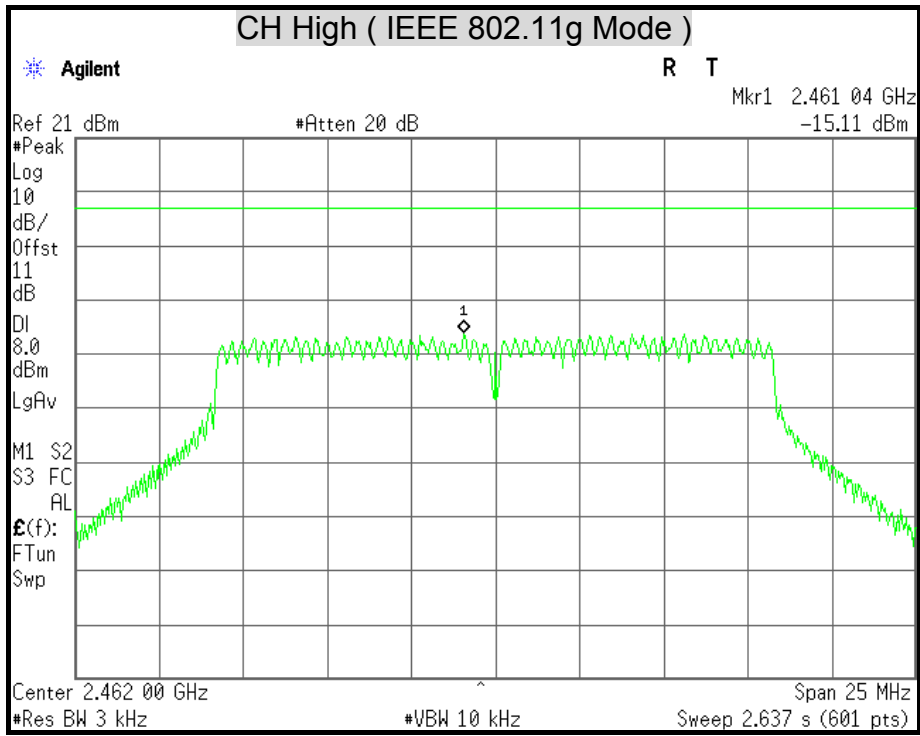

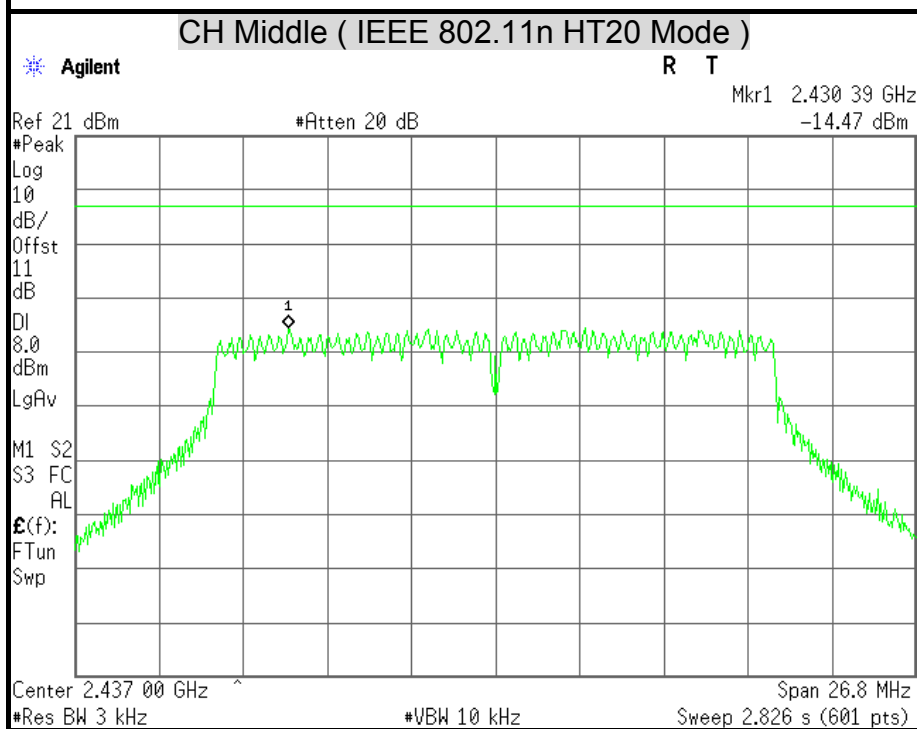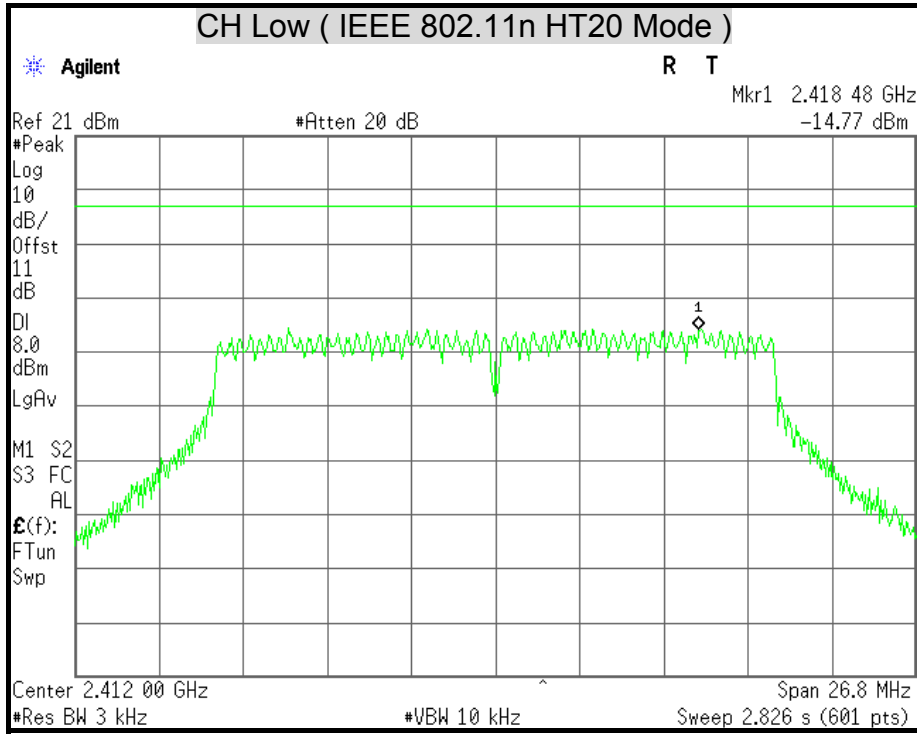

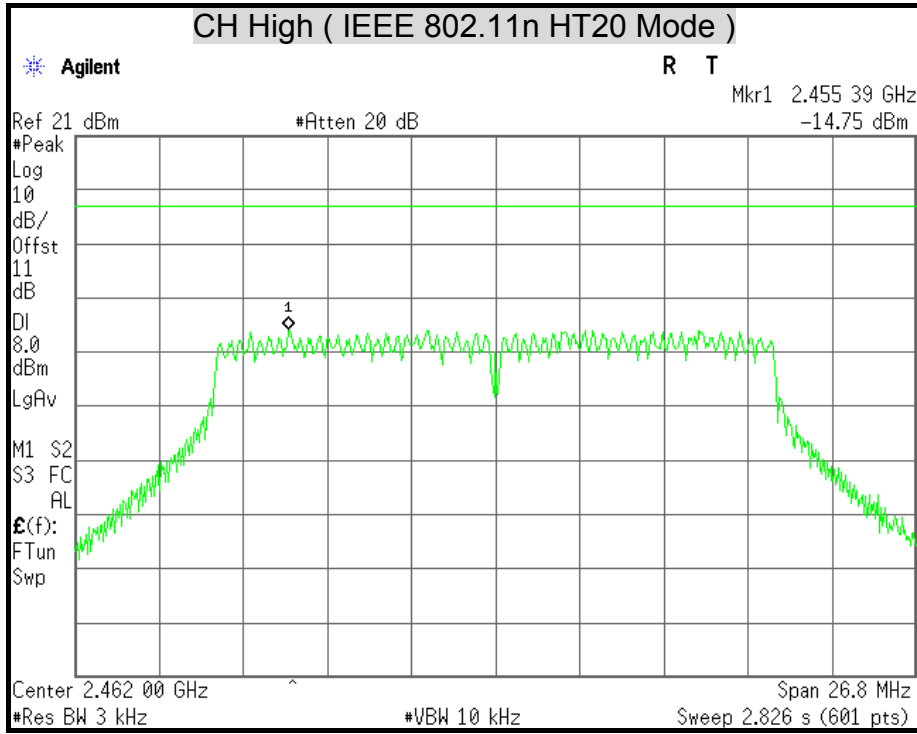

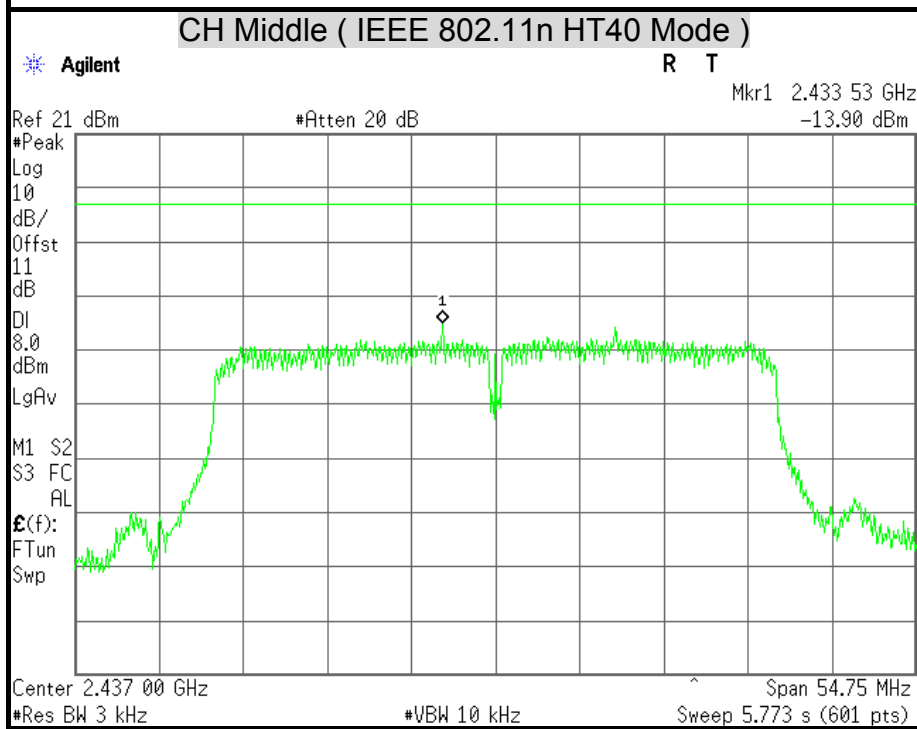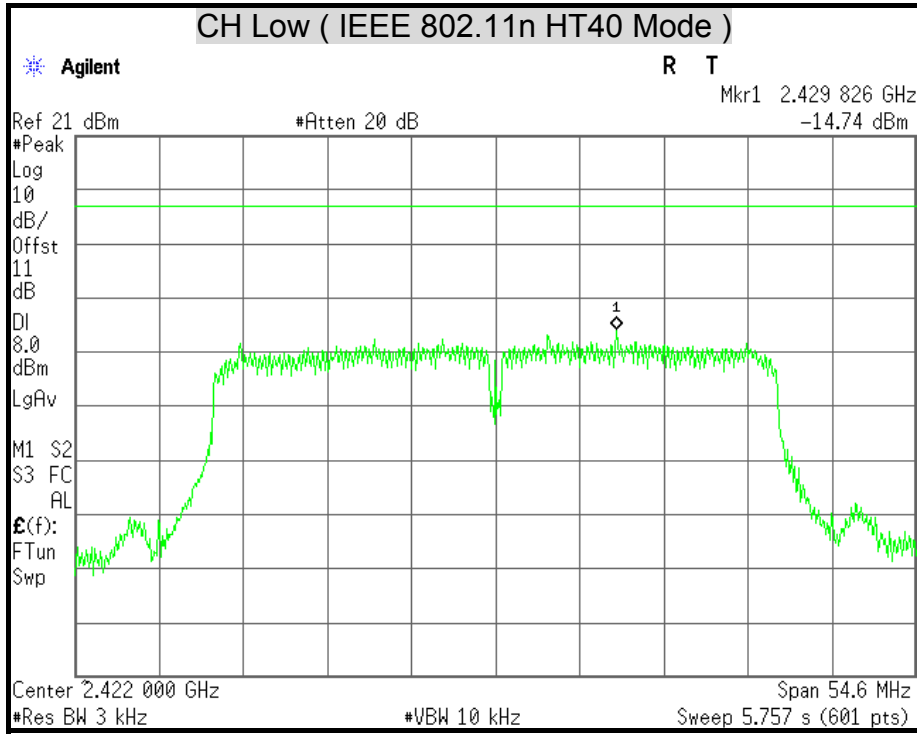

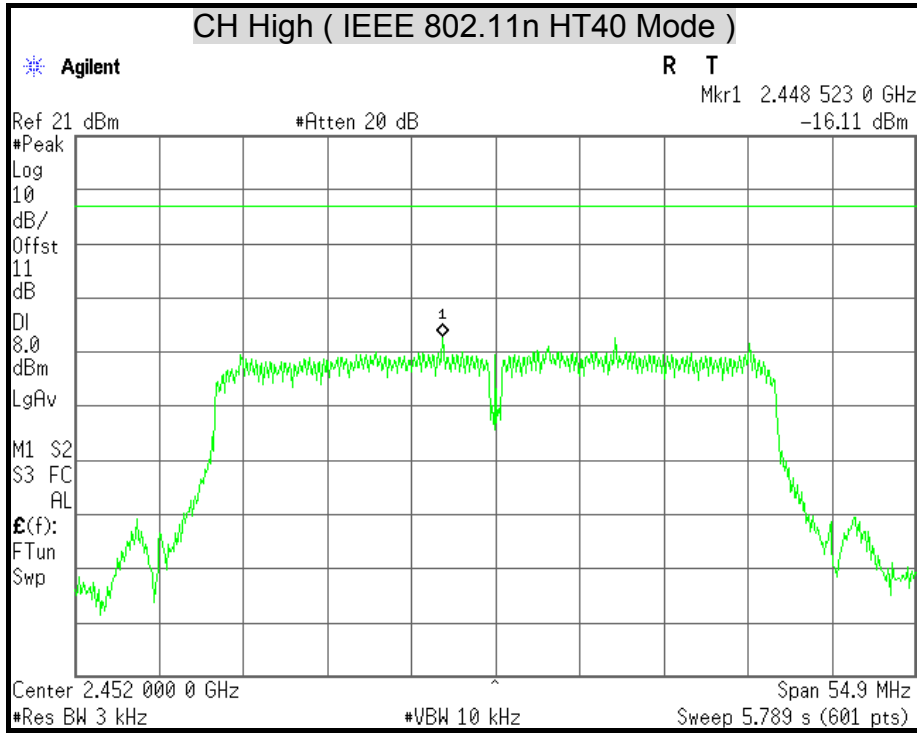



7.4 CONDUCTED SPURIOUS EMISSION

LIMITS


§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/14/2013

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP

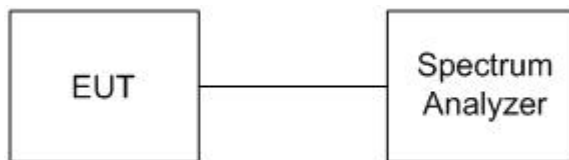

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.







TEST RESULTS



OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

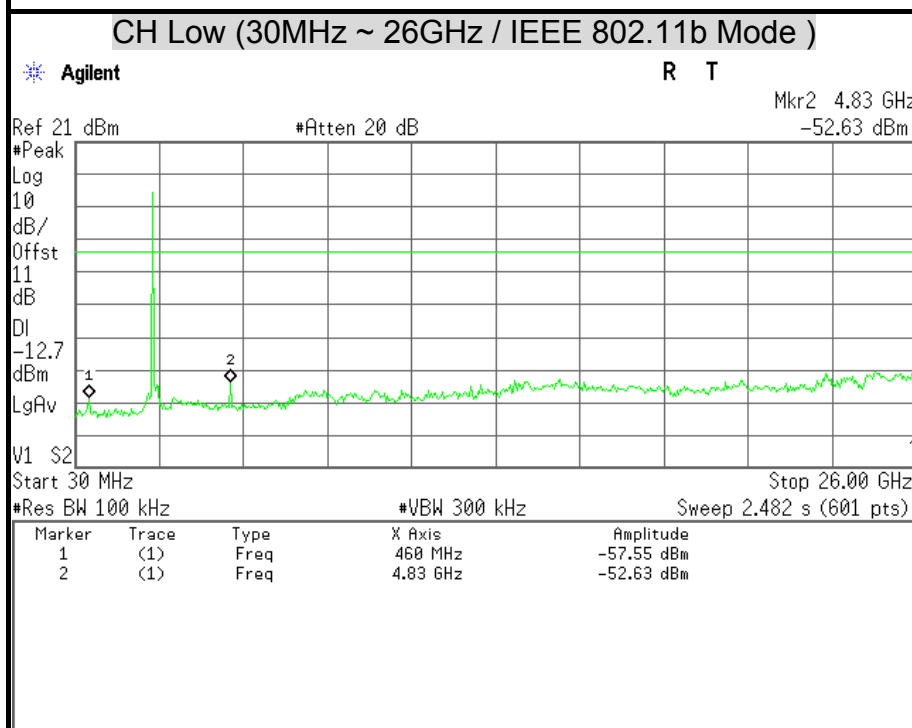
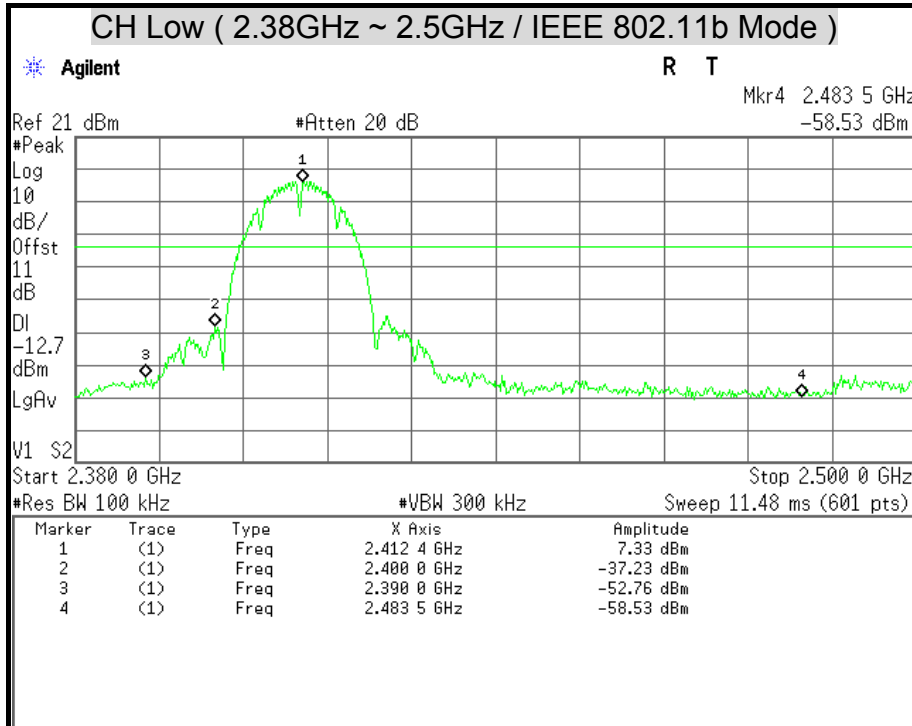


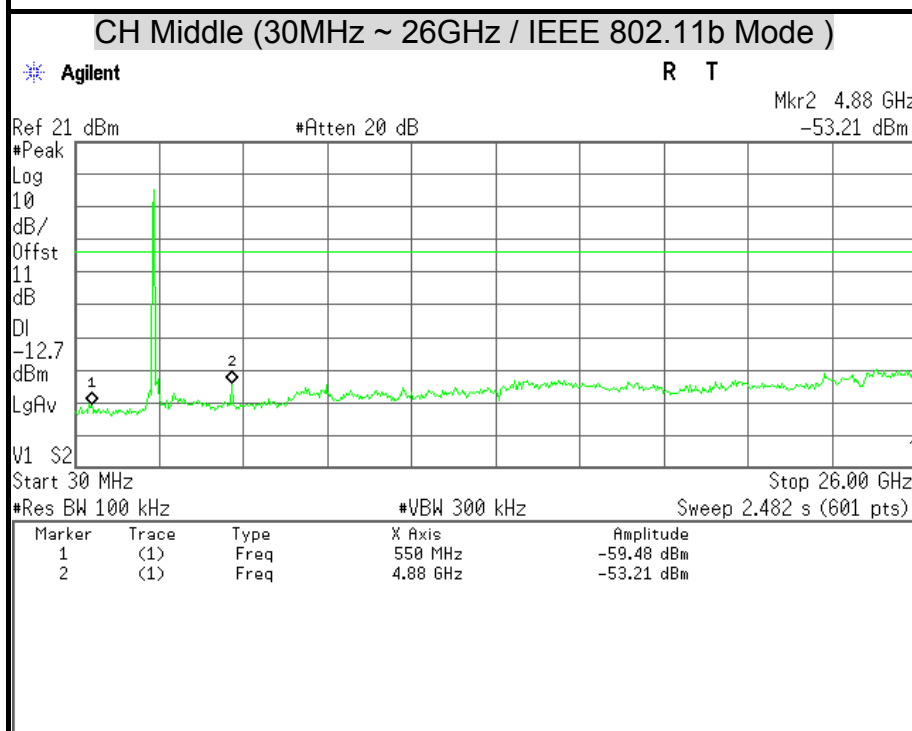
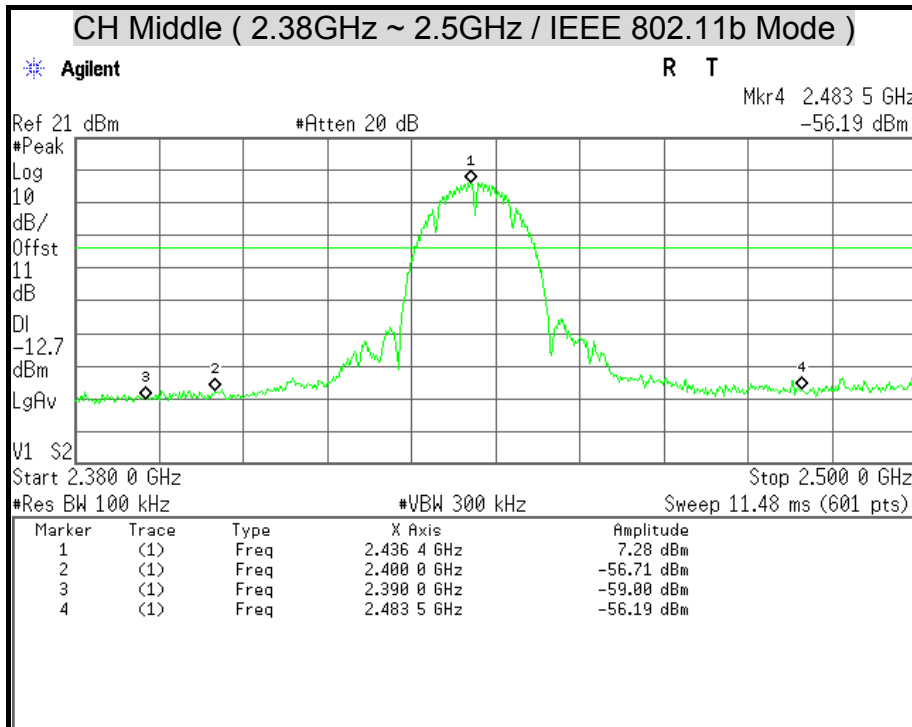


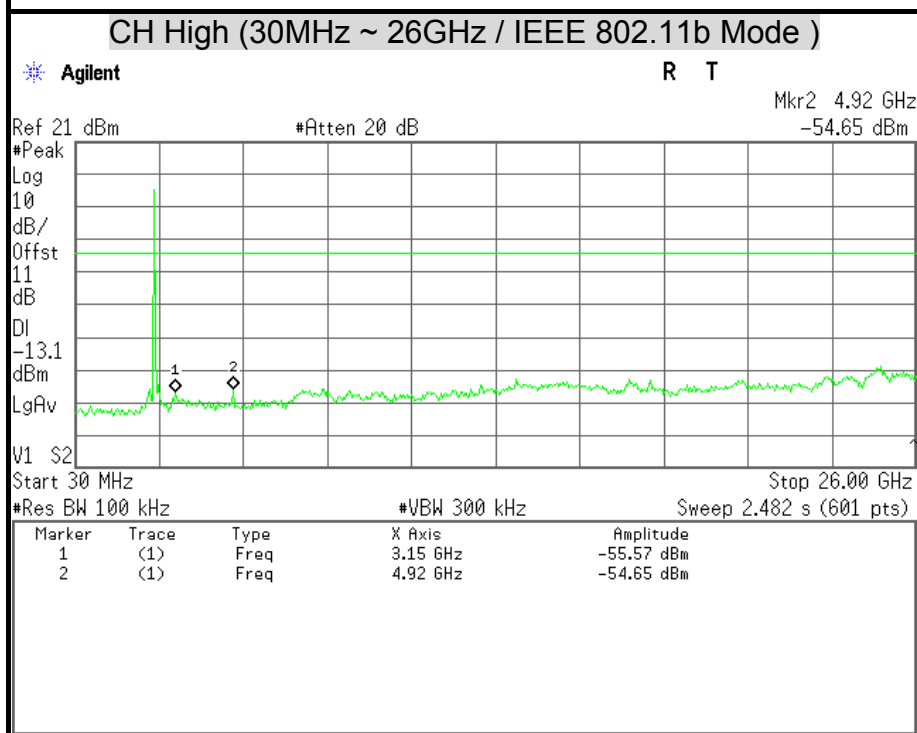
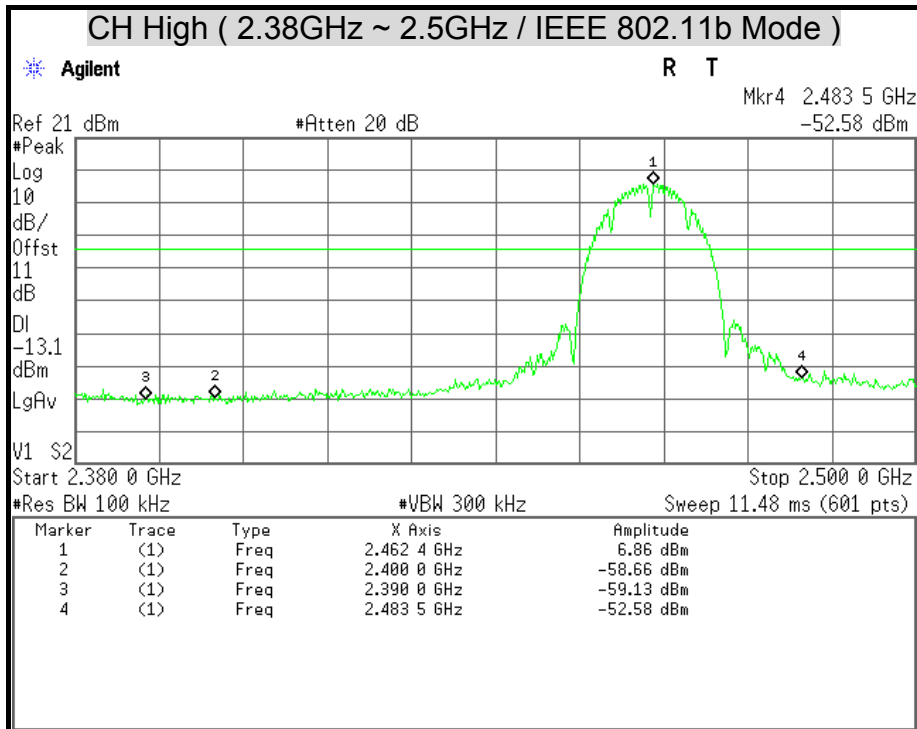


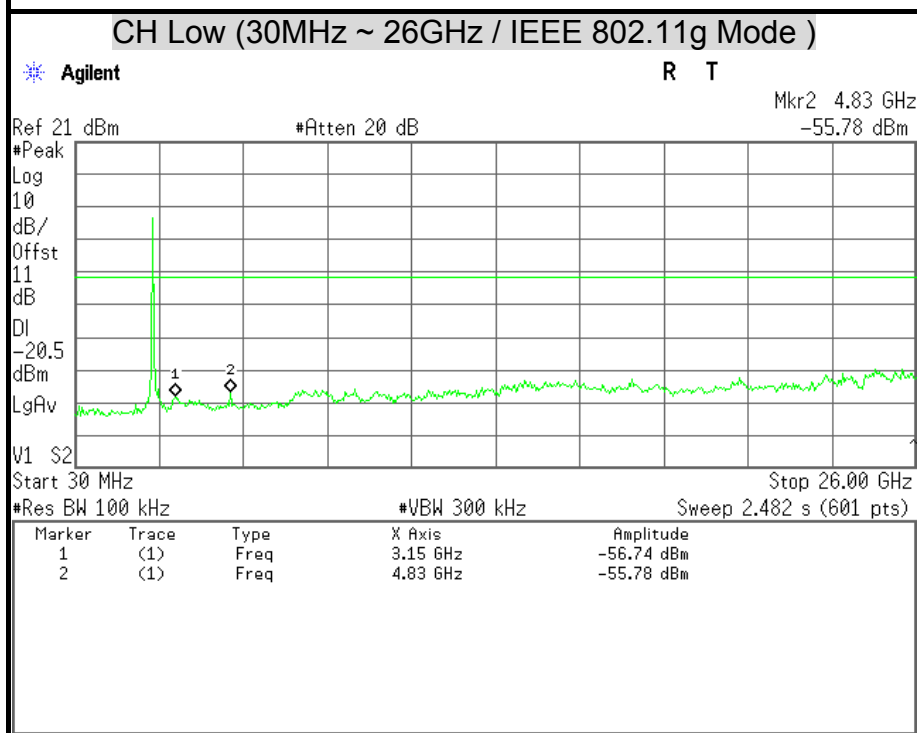
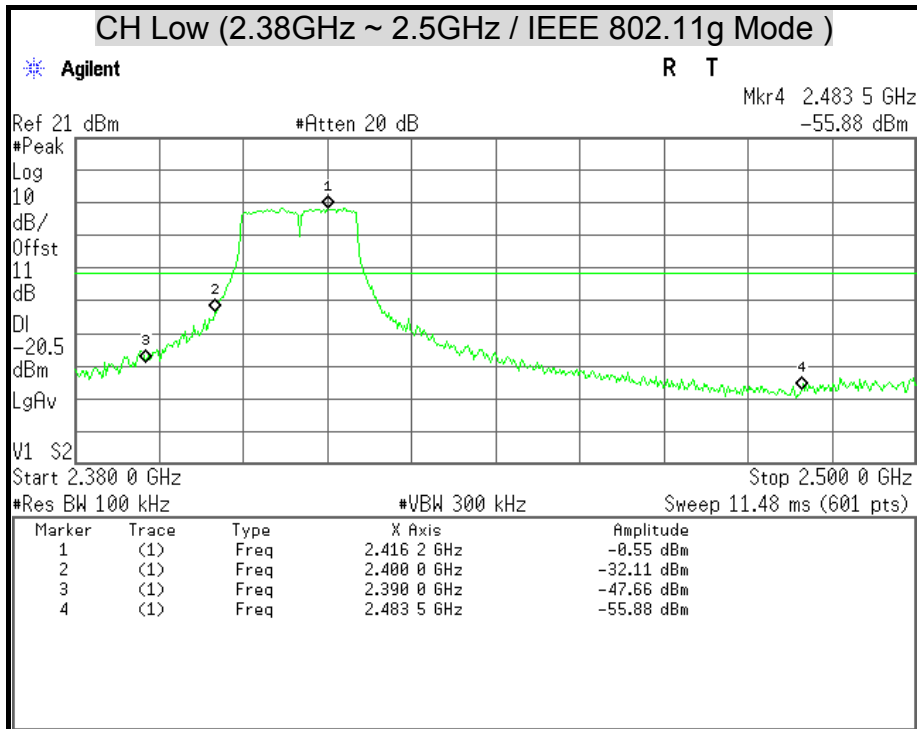


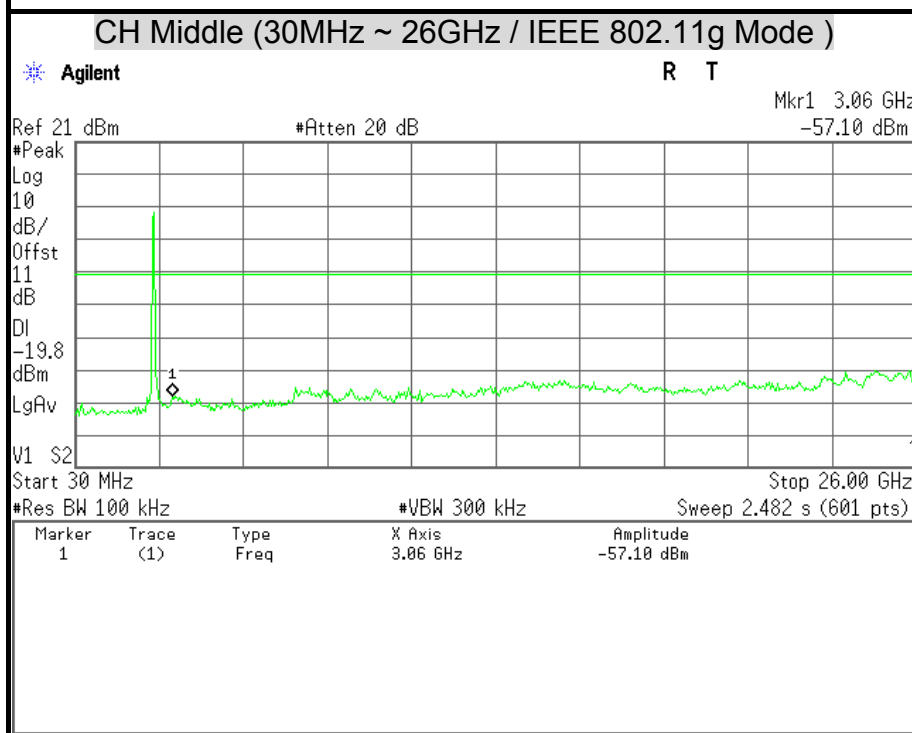
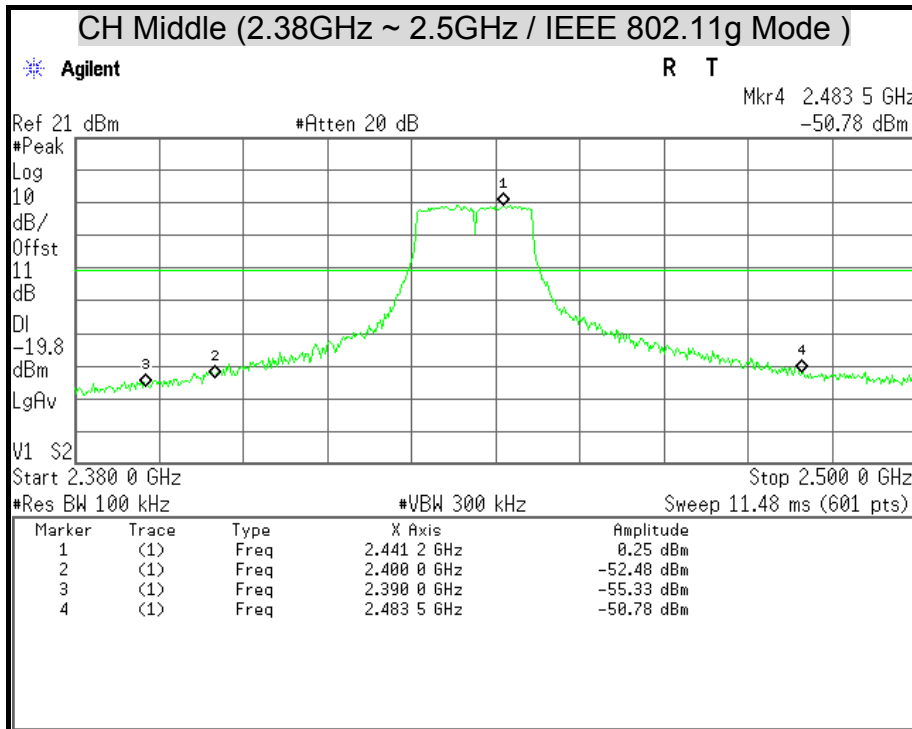


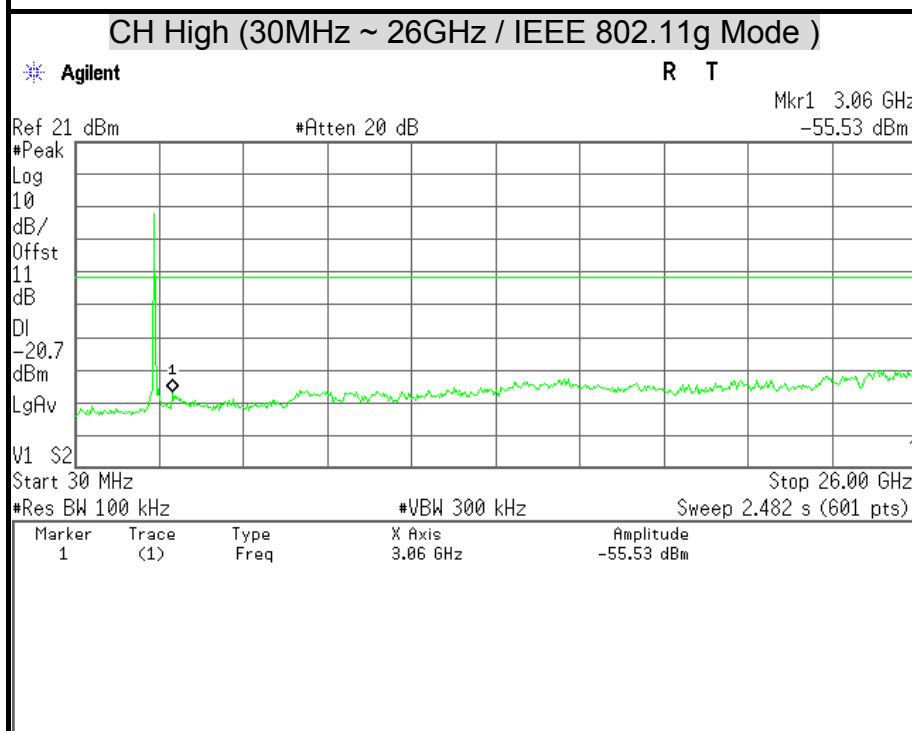
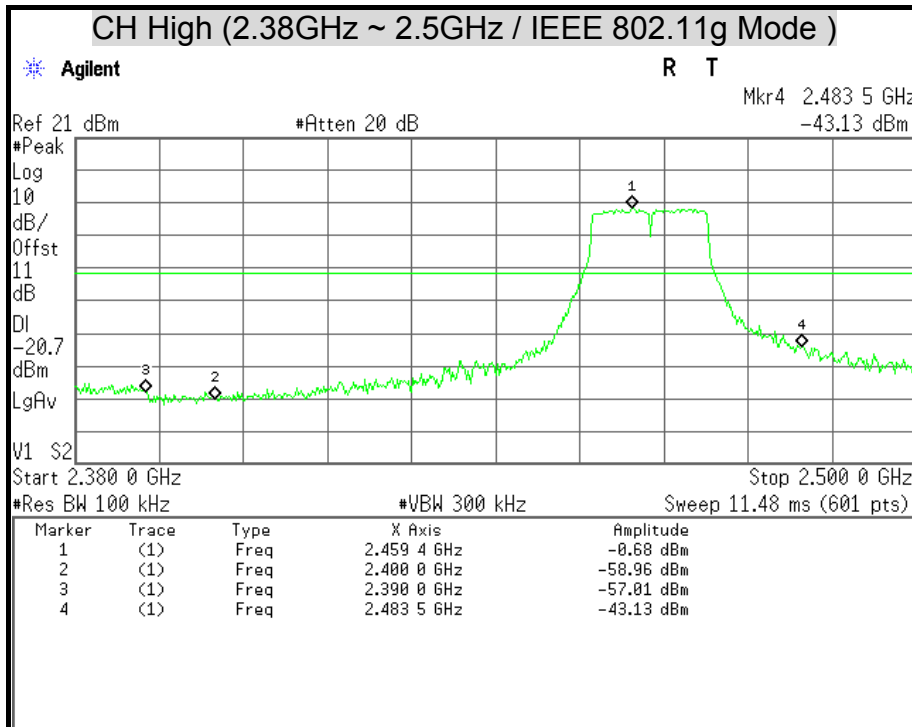


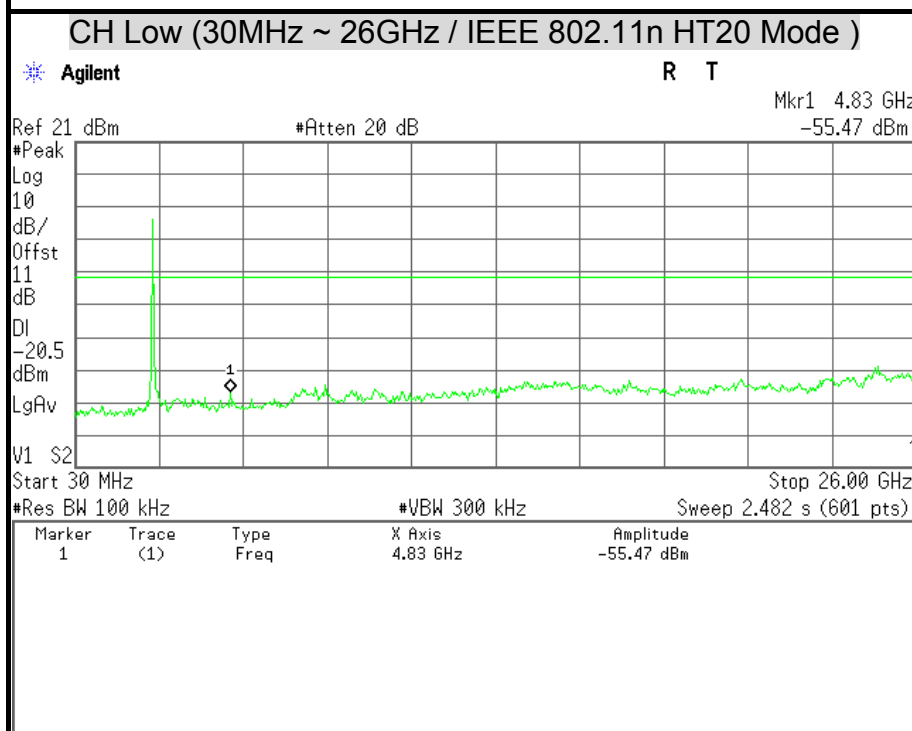
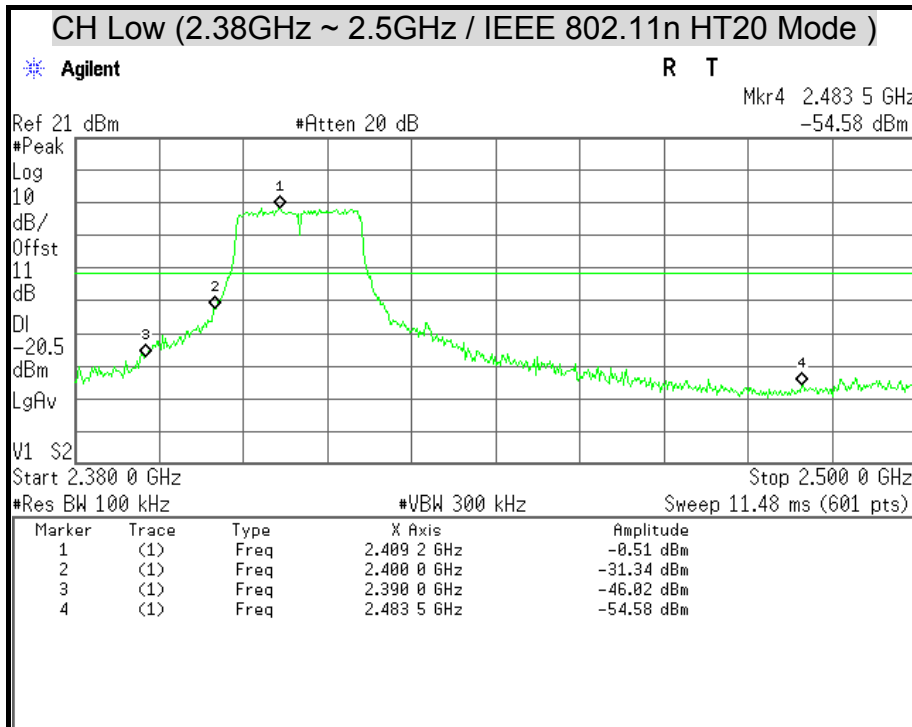


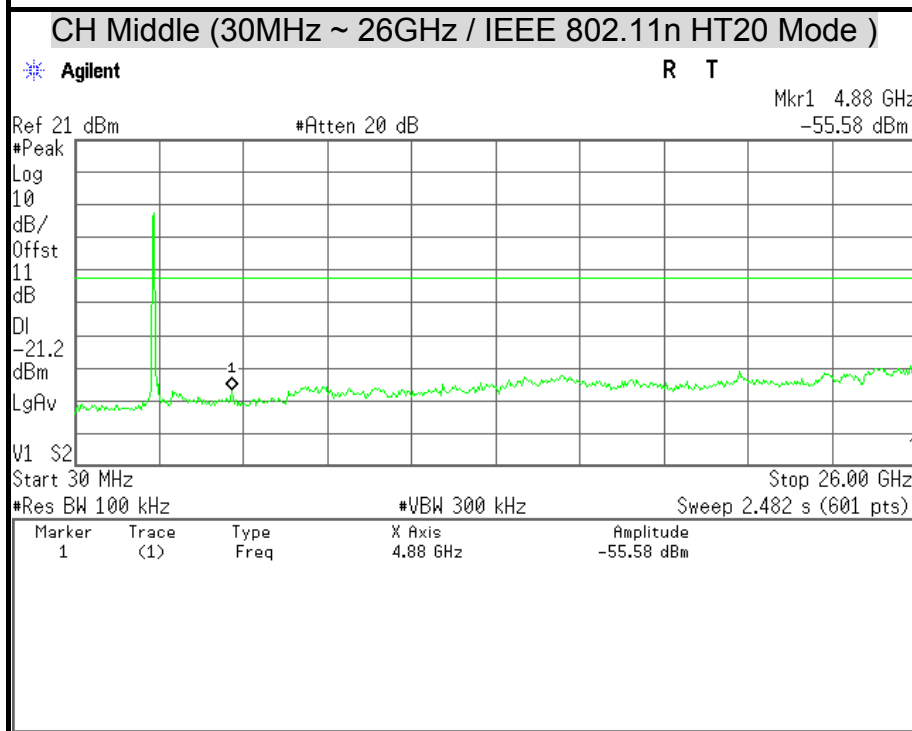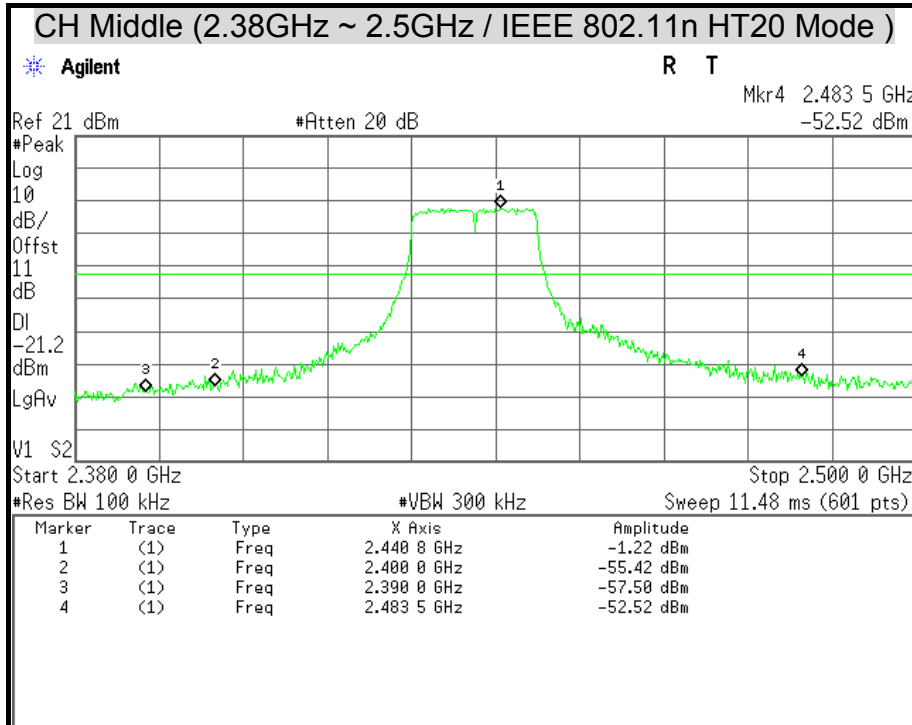

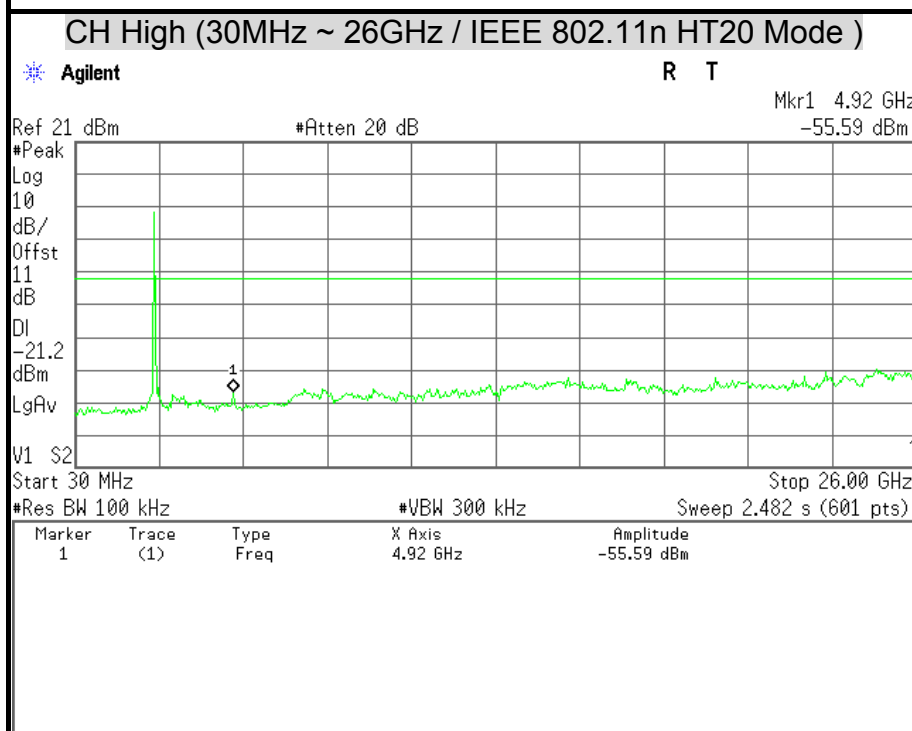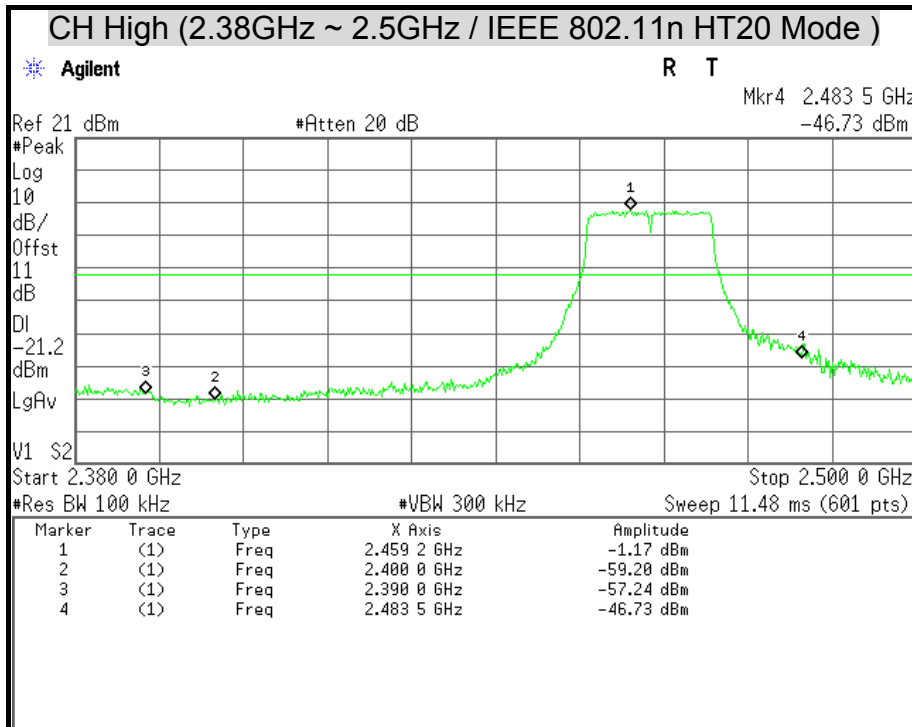

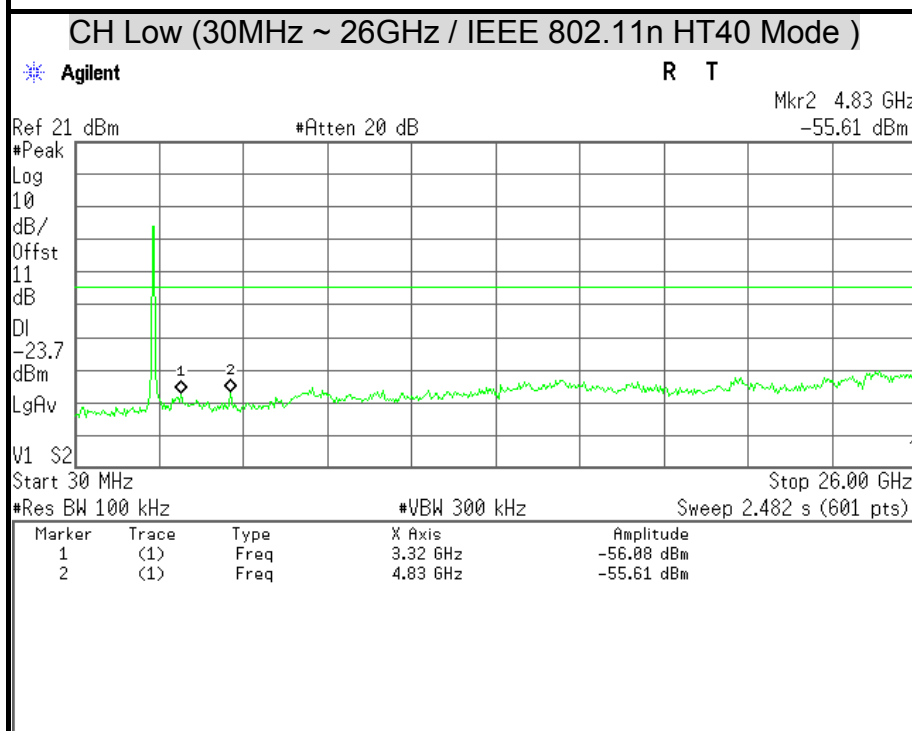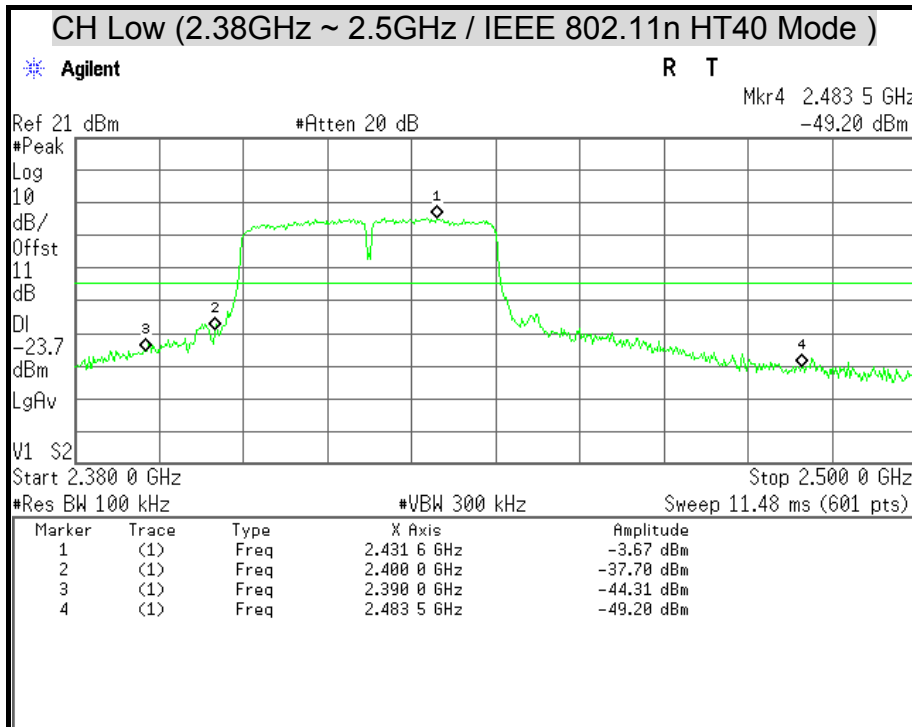

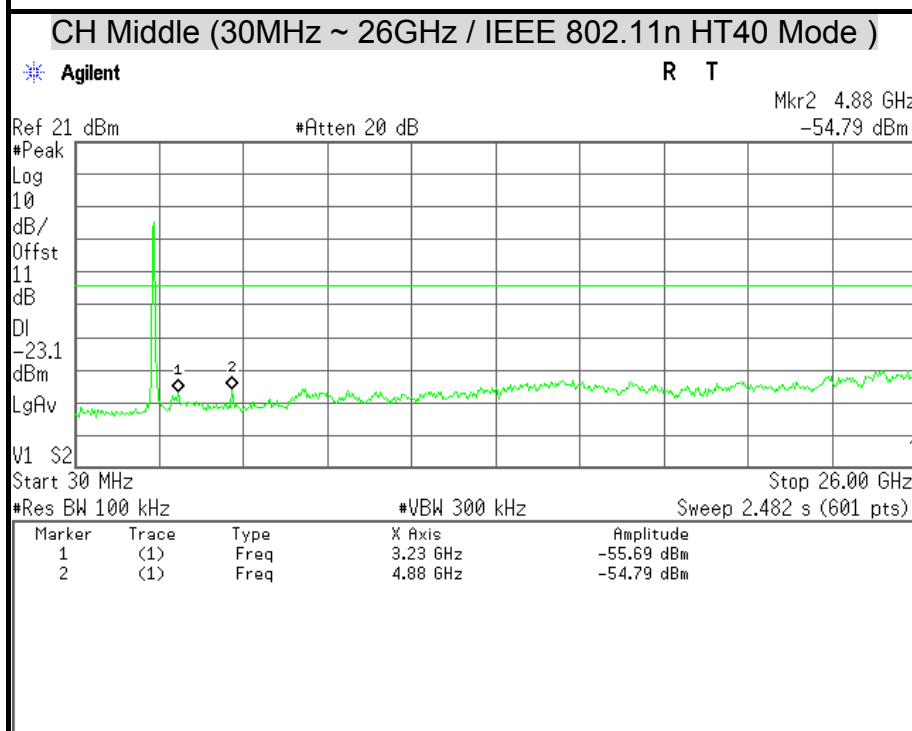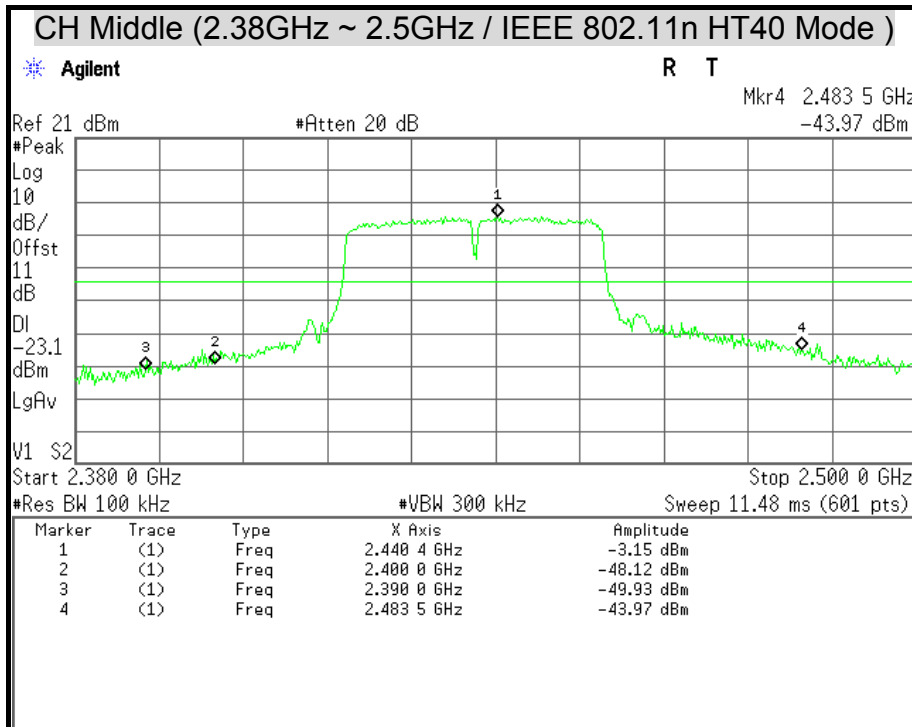

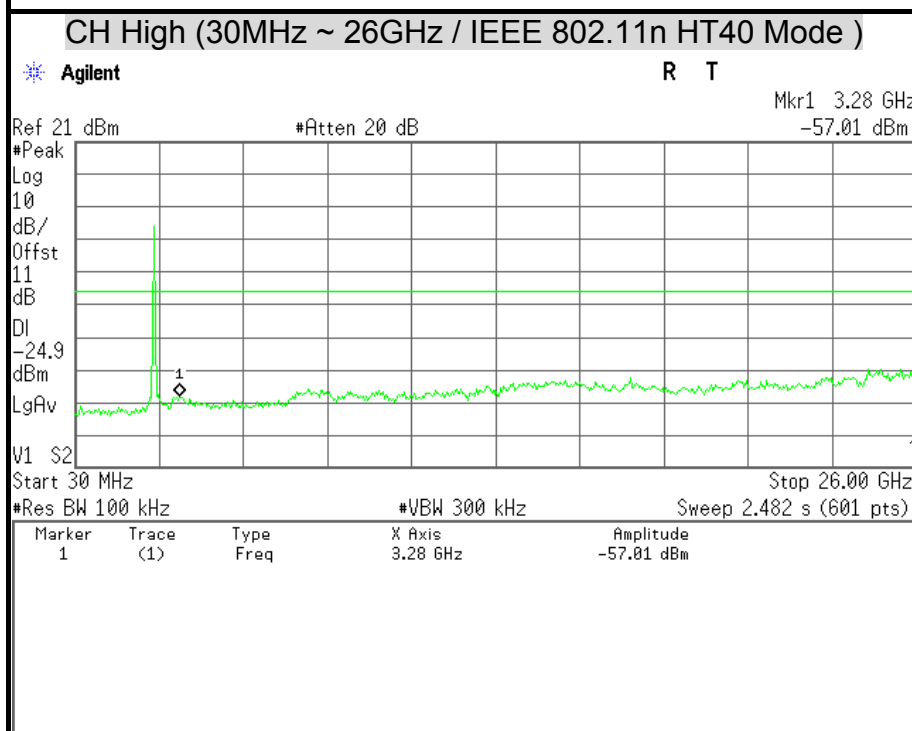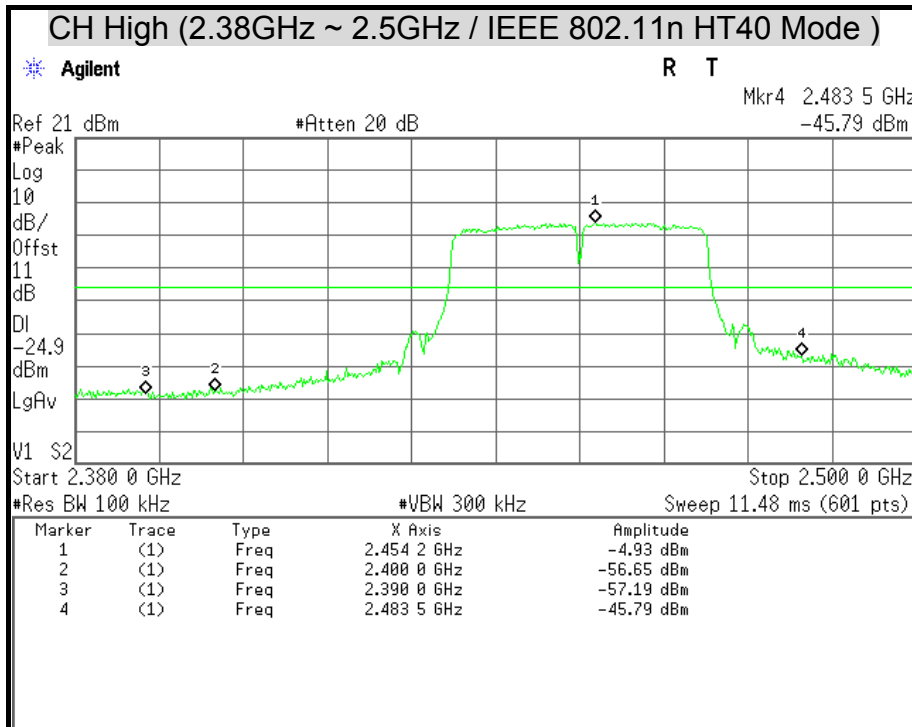



7.5 RADIATED EMISSION

LIMITS

(1) According to § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Remark:

- 1. ¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
- 2. ² Above 38.6

(2) According to § 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



(3) According to § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

Remark: **Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(4) According to § 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST EQUIPMENT

Radiated Emission / 966Chamber_B

Name of Equipment	Manufacture	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY46180323	04/15/2014
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101131	01/14/2014
Bi-log Antenna	SCHWARZBECK	VULB 9168	9168-250	09/26/2013
Double-Ridged Waveguide Horn	ETS-LINDGREN	3117	00078733	12/11/2013
Horn Antenna	COM-POWER	AH-840	03077	12/20/2013
Pre-Amplifier	Agilent	8447D	2944A10052	07/17/2013
Pre-Amplifier	Agilent	8449B	3008A01916	07/17/2013
LOOP Antenna	EMCO	6502	8905-2356	06/10/2013
Notch Filters Band Reject	Micro-Tronics	BRM05702-01	026	N.C.R


Remark: 1. Each piece of equipment is scheduled for calibration once a year.
2. N.C.R = No Calibration Request.




TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from below 1GHz.

9kHz ~ 30MHz

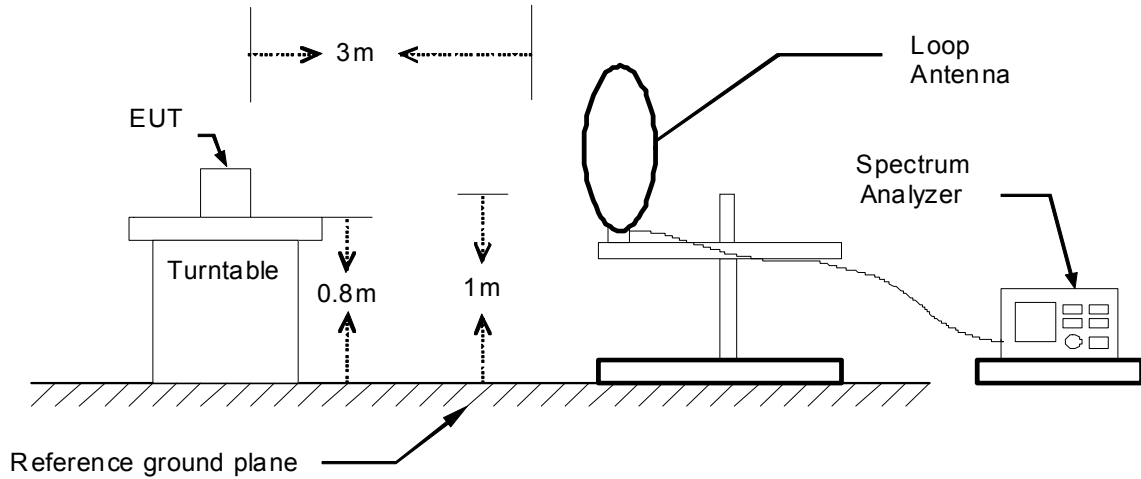


30MHz ~ 1GHz

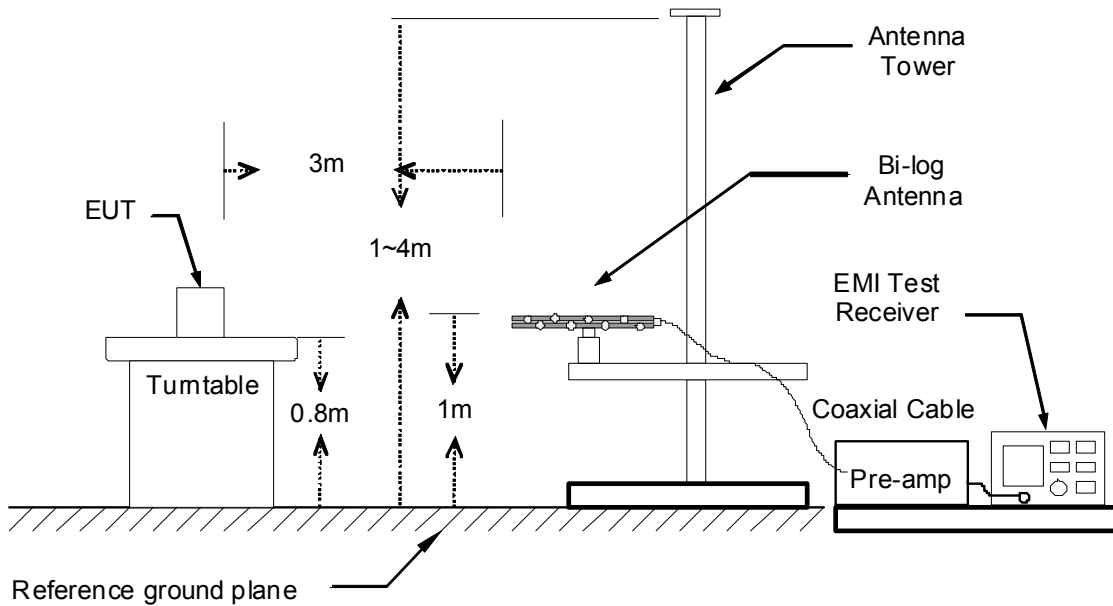



The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

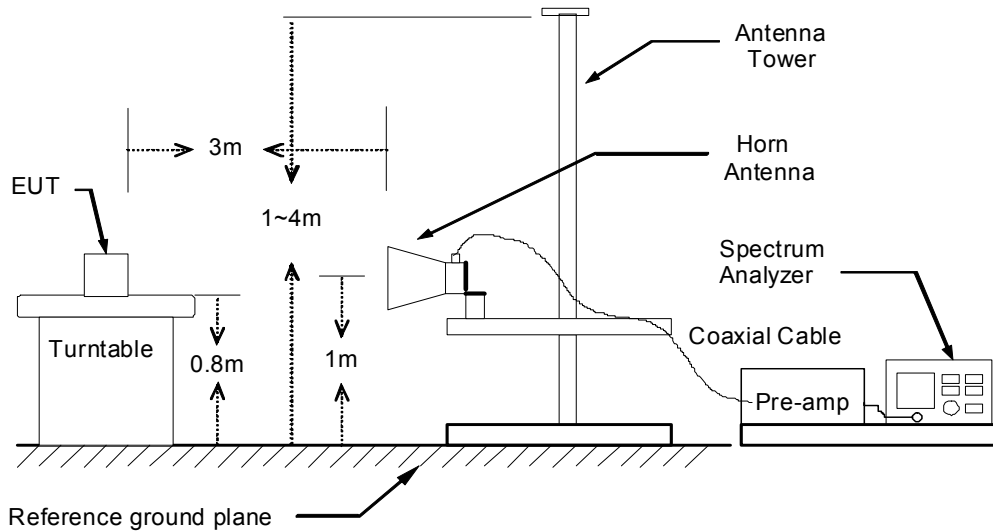

TEST PROCEDURE

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
2. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Remark :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.



TEST RESULTS

Below 1 GHz (9kHz ~ 30MHz)

No emission found between lowest internal used/generated frequency to 30MHz.

Below 1 GHz (30MHz ~ 1GHz)

Product Name	Computer	Test By	Allen Liu
Test Model	DS-561SQ-S7A1E	Test Date	2013/03/06
Test Mode	TX Mode / Power Adapter 2	Temp. & Humidity	23°C, 51%

966 Chamber_B at 3Meter / Horizontal						
Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Remark
61.04	49.18	-14.49	34.69	40.00	-5.31	Peak
78.50	53.54	-17.64	35.90	40.00	-4.10	Peak
235.64	51.87	-13.93	37.94	46.00	-8.06	Peak
314.21	44.42	-11.07	33.35	46.00	-12.65	Peak
527.61	44.45	-7.27	37.18	46.00	-8.82	Peak
549.92	42.98	-6.84	36.14	46.00	-9.86	Peak
849.65	40.38	-1.55	38.83	46.00	-7.17	Peak
935.98	37.92	-0.20	37.72	46.00	-8.28	Peak

966 Chamber_B at 3Meter / Vertical						
Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Remark
30.97	50.22	-14.64	35.58	40.00	-4.42	QP
242.43	52.70	-13.52	39.17	46.00	-6.83	Peak
323.91	48.30	-10.90	37.41	46.00	-8.59	Peak
527.61	43.29	-7.27	36.03	46.00	-9.97	Peak
623.64	41.95	-5.18	36.76	46.00	-9.24	Peak
780.78	40.26	-2.60	37.66	46.00	-8.34	Peak
849.65	39.67	-1.55	38.13	46.00	-7.87	Peak
935.98	39.07	-0.20	38.87	46.00	-7.13	Peak

Remark:

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – PreAmp.Gain (dB)
4. Result (dBµV/m) = Reading (dBµV) + Correction Factor (dB/m)
5. Margin (dB) = Remark result (dBµV/m) - Quasi-peak limit (dBµV/m).



Product Name	Computer	Test By	Allen Liu
Test Model	DS-562SQ-S6A1E	Test Date	2013/03/06
Test Mode	TX Mode / Power Adapter 2	Temp. & Humidity	23 °C, 51%

966 Chamber_B at 3Meter / Horizontal						
Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Remark
60.07	45.77	-14.35	31.42	40.00	-8.58	Peak
78.50	50.44	-17.64	32.80	40.00	-7.20	Peak
256.98	48.36	-12.94	35.41	46.00	-10.59	Peak
322.94	49.90	-10.92	38.99	46.00	-7.01	Peak
386.96	47.97	-9.68	38.30	46.00	-7.70	Peak
450.98	42.77	-8.24	34.53	46.00	-11.47	Peak
533.43	39.86	-7.15	32.70	46.00	-13.30	Peak
910.76	34.71	-0.34	34.37	46.00	-11.63	Peak

966 Chamber_B at 3Meter / Vertical						
Frequency (MHz)	Reading (dBµV)	Correction Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Remark
31.94	50.19	-14.62	35.58	40.00	-4.42	Peak
40.67	48.93	-13.58	35.35	40.00	-4.65	Peak
62.98	46.78	-14.78	32.00	40.00	-8.00	Peak
118.27	47.80	-15.96	31.83	43.50	-11.67	Peak
321.97	44.83	-10.93	33.90	46.00	-12.10	Peak
386.96	42.39	-9.68	32.71	46.00	-13.29	Peak
533.43	39.47	-7.15	32.31	46.00	-13.69	Peak
914.64	35.40	-0.32	35.08	46.00	-10.92	Peak

Remark:

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – PreAmp.Gain (dB)
4. Result (dBuV/m) = Reading (dBuV) + Correction Factor (dB/m)
5. Margin (dB) = Remark result (dBuV/m) - Quasi-peak limit (dBuV/m).



Above 1 GHz

Product Name	Computer	Test By	Allen Liu
Test Model	DS-561SQ-S7A1E	Test Date	2013/03/12
Test Mode	IEEE 802.11b TX / CH Low	Temp. & Humidity	23°C, 52%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1548.00	47.22	---	-1.82	45.41	---	74.00	54.00	-8.59	Peak
1892.00	45.75	---	1.28	47.03	---	74.00	54.00	-6.97	Peak
2506.00	45.66	---	3.96	49.62	---	74.00	54.00	-4.38	Peak
3345.00	42.54	---	5.70	48.24	---	74.00	54.00	-5.76	Peak
3750.00	42.66	---	6.60	49.26	---	74.00	54.00	-4.74	Peak
4860.00	39.82	---	9.32	49.14	---	74.00	54.00	-4.86	Peak
5160.00	39.64	---	9.91	49.55	---	74.00	54.00	-4.45	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1076.00	46.88	---	-3.73	43.15	---	74.00	54.00	-10.85	Peak
1152.00	47.29	---	-3.47	43.82	---	74.00	54.00	-10.18	Peak
2018.00	53.11	33.66	2.31	55.42	35.97	74.00	54.00	-18.03	AVG
2490.00	51.71	38.96	3.92	55.63	42.88	74.00	54.00	-11.12	AVG
3120.00	43.97	---	5.24	49.21	---	74.00	54.00	-4.79	Peak
3525.00	41.00	---	6.08	47.08	---	74.00	54.00	-6.92	Peak
3960.00	42.33	---	7.09	49.42	---	74.00	54.00	-4.58	Peak
4875.00	39.82	---	9.36	49.18	---	74.00	54.00	-4.82	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Computer	Test By	Allen Liu
Test Model	DS-561SQ-S7A1E	Test Date	2013/03/12
Test Mode	IEEE 802.11b TX / CH Middle	Temp. & Humidity	23 °C, 52%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1202.00	45.98	---	-3.29	42.69	---	74.00	54.00	-11.31	Peak
1902.00	45.77	---	1.37	47.14	---	74.00	54.00	-6.86	Peak
2282.00	45.90	---	3.21	49.11	---	74.00	54.00	-4.89	Peak
2616.00	44.96	---	4.19	49.15	---	74.00	54.00	-4.85	Peak
3180.00	42.34	---	5.37	47.71	---	74.00	54.00	-6.29	Peak
3750.00	41.41	---	6.60	48.01	---	74.00	54.00	-5.99	Peak
4050.00	43.02	---	7.30	50.32	---	74.00	54.00	-3.68	Peak
4995.00	45.20	32.10	9.68	54.88	41.78	74.00	54.00	-12.22	AVG

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
2024.00	54.26	33.30	2.33	56.59	35.63	74.00	54.00	-18.37	AVG
2318.00	47.14	---	3.33	50.47	---	74.00	54.00	-3.53	Peak
2496.00	50.59	36.66	3.94	54.53	40.60	74.00	54.00	-13.40	AVG
2560.00	51.32	38.76	4.08	55.40	42.84	74.00	54.00	-11.16	AVG
3120.00	43.51	---	5.24	48.76	---	74.00	54.00	-5.24	Peak
3435.00	44.69	---	5.89	50.58	---	74.00	54.00	-3.42	Peak
4770.00	40.81	---	9.08	49.90	---	74.00	54.00	-4.10	Peak
4995.00	41.21	---	9.68	50.89	---	74.00	54.00	-3.11	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Computer	Test By	Allen Liu
Test Model	DS-561SQ-S7A1E	Test Date	2013/03/12
Test Mode	IEEE 802.11b TX / CH High	Temp. & Humidity	23°C, 52%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1282.00	46.20	---	-3.01	43.18	---	74.00	54.00	-10.82	Peak
2104.00	46.45	---	2.60	49.05	---	74.00	54.00	-4.95	Peak
2390.00	44.06	---	3.58	47.64	---	74.00	54.00	-6.36	Peak
2984.00	45.34	---	4.97	50.30	---	74.00	54.00	-3.70	Peak
3135.00	41.96	---	5.28	47.24	---	74.00	54.00	-6.76	Peak
3705.00	41.53	---	6.50	48.02	---	74.00	54.00	-5.98	Peak
4530.00	40.51	---	8.45	48.96	---	74.00	54.00	-5.04	Peak
4995.00	39.94	---	9.68	49.62	---	74.00	54.00	-4.38	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1052.00	47.34	---	-3.82	43.52	---	74.00	54.00	-10.48	Peak
1300.00	45.85	---	-2.95	42.90	---	74.00	54.00	-11.10	Peak
2020.00	53.58	33.59	2.32	55.90	35.91	74.00	54.00	-18.09	AVG
2340.00	51.00	39.80	3.41	54.41	43.21	74.00	54.00	-10.79	AVG
3135.00	49.20	29.60	5.28	54.48	34.88	74.00	54.00	-19.12	AVG
3690.00	41.70	---	6.46	48.16	---	74.00	54.00	-5.84	Peak
4680.00	40.28	---	8.85	49.13	---	74.00	54.00	-4.87	Peak
4995.00	39.78	---	9.68	49.46	---	74.00	54.00	-4.54	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Computer	Test By	Allen Liu
Test Model	DS-561SQ-S7A1E	Test Date	2013/03/12
Test Mode	IEEE 802.11g TX / CH Low	Temp. & Humidity	23°C, 52%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1174.00	46.32	---	-3.39	42.93	---	74.00	54.00	-11.07	Peak
1778.00	44.88	---	0.25	45.14	---	74.00	54.00	-8.86	Peak
1968.00	46.04	---	1.96	48.00	---	74.00	54.00	-6.00	Peak
2574.00	45.63	---	4.11	49.73	---	74.00	54.00	-4.27	Peak
3120.00	42.62	---	5.24	47.86	---	74.00	54.00	-6.14	Peak
3300.00	41.85	---	5.61	47.46	---	74.00	54.00	-6.54	Peak
4455.00	40.44	---	8.26	48.70	---	74.00	54.00	-5.30	Peak
4995.00	39.59	---	9.68	49.26	---	74.00	54.00	-4.74	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1182.00	47.05	---	-3.36	43.69	---	74.00	54.00	-10.31	Peak
2010.00	53.37	33.67	2.28	55.65	35.95	74.00	54.00	-18.05	AVG
2490.00	51.77	36.16	3.92	55.69	40.08	74.00	54.00	-13.92	AVG
2580.00	51.45	37.81	4.12	55.57	41.93	74.00	54.00	-12.07	AVG
3120.00	43.82	---	5.24	49.07	---	74.00	54.00	-4.93	Peak
3870.00	42.50	---	6.88	49.38	---	74.00	54.00	-4.62	Peak
4635.00	40.24	---	8.73	48.97	---	74.00	54.00	-5.03	Peak
4995.00	40.38	---	9.68	50.06	---	74.00	54.00	-3.94	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Computer	Test By	Allen Liu
Test Model	DS-561SQ-S7A1E	Test Date	2013/03/12
Test Mode	IEEE 802.11g TX / CH Middle	Temp. & Humidity	23°C, 52%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1296.00	46.28	---	-2.96	43.31	---	74.00	54.00	-10.69	Peak
2360.00	45.09	---	3.47	48.56	---	74.00	54.00	-5.44	Peak
2484.00	46.28	---	3.90	50.18	---	74.00	54.00	-3.82	Peak
2506.00	47.01	---	3.96	50.98	---	74.00	54.00	-3.02	Peak
3360.00	42.14	---	5.73	47.88	---	74.00	54.00	-6.12	Peak
3750.00	41.62	---	6.60	48.22	---	74.00	54.00	-5.78	Peak
4245.00	40.01	---	7.76	47.77	---	74.00	54.00	-6.23	Peak
4800.00	40.08	---	9.16	49.24	---	74.00	54.00	-4.76	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1236.00	46.92	---	-3.17	43.74	---	74.00	54.00	-10.26	Peak
2078.00	53.75	33.35	2.52	56.27	35.87	74.00	54.00	-18.13	AVG
2390.00	52.77	36.95	3.58	56.35	40.53	74.00	54.00	-13.47	AVG
2484.00	58.95	37.92	3.90	62.85	41.82	74.00	54.00	-12.18	AVG
3120.00	43.17	---	5.24	48.41	---	74.00	54.00	-5.59	Peak
3570.00	42.61	---	6.18	48.79	---	74.00	54.00	-5.21	Peak
3870.00	41.20	---	6.88	48.08	---	74.00	54.00	-5.92	Peak
4335.00	40.78	---	7.98	48.76	---	74.00	54.00	-5.24	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Computer	Test By	Allen Liu
Test Model	DS-561SQ-S7A1E	Test Date	2013/03/12
Test Mode	IEEE 802.11g TX / CH High	Temp. & Humidity	23°C, 52%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1234.00	47.09	---	-3.18	43.91	---	74.00	54.00	-10.09	Peak
1546.00	46.59	---	-1.84	44.76	---	74.00	54.00	-9.24	Peak
2390.00	44.63	---	3.58	48.21	---	74.00	54.00	-5.79	Peak
2678.00	46.41	---	4.32	50.74	---	74.00	54.00	-3.26	Peak
3165.00	41.78	---	5.34	47.12	---	74.00	54.00	-6.88	Peak
3750.00	41.82	---	6.60	48.42	---	74.00	54.00	-5.58	Peak
4260.00	40.48	---	7.80	48.28	---	74.00	54.00	-5.72	Peak
4995.00	40.16	---	9.68	49.84	---	74.00	54.00	-4.16	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1250.00	46.33	---	-3.12	43.21	---	74.00	54.00	-10.79	Peak
2022.00	53.86	33.00	2.32	56.18	35.32	74.00	54.00	-18.68	AVG
2376.00	47.07	---	3.53	50.60	---	74.00	54.00	-3.40	Peak
2616.00	51.30	36.12	4.19	55.49	40.31	74.00	54.00	-13.69	AVG
3120.00	44.46	---	5.24	49.70	---	74.00	54.00	-4.30	Peak
3690.00	41.61	---	6.46	48.07	---	74.00	54.00	-5.93	Peak
4380.00	40.65	---	8.08	48.74	---	74.00	54.00	-5.26	Peak
4995.00	41.77	---	9.68	51.45	---	74.00	54.00	-2.55	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Computer	Test By	Allen Liu
Test Model	DS-561SQ-S7A1E	Test Date	2013/03/12
Test Mode	IEEE 802.11n HT20 TX / CH Low	Temp. & Humidity	23°C, 52%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1726.00	45.87	---	-0.22	45.65	---	74.00	54.00	-8.35	Peak
1934.00	46.96	---	1.66	48.62	---	74.00	54.00	-5.38	Peak
1994.00	47.59	---	2.20	49.78	---	74.00	54.00	-4.22	Peak
2492.00	45.96	---	3.92	49.88	---	74.00	54.00	-4.12	Peak
3120.00	42.56	---	5.24	47.81	---	74.00	54.00	-6.19	Peak
3705.00	41.73	---	6.50	48.23	---	74.00	54.00	-5.77	Peak
4770.00	39.79	---	9.08	48.87	---	74.00	54.00	-5.13	Peak
5025.00	40.09	---	9.72	49.81	---	74.00	54.00	-4.19	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1164.00	47.38	---	-3.43	43.95	---	74.00	54.00	-10.05	Peak
1696.00	45.68	---	-0.49	45.19	---	74.00	54.00	-8.81	Peak
2018.00	53.02	32.75	2.31	55.33	35.06	74.00	54.00	-18.94	AVG
2496.00	50.58	36.95	3.94	54.52	40.89	74.00	54.00	-13.11	AVG
3120.00	45.18	---	5.24	50.42	---	74.00	54.00	-3.58	Peak
3255.00	43.05	---	5.52	48.57	---	74.00	54.00	-5.43	Peak
3975.00	40.96	---	7.12	48.08	---	74.00	54.00	-5.92	Peak
4995.00	40.06	---	9.68	49.73	---	74.00	54.00	-4.27	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Computer	Test By	Allen Liu
Test Model	DS-561SQ-S7A1E	Test Date	2013/03/12
Test Mode	IEEE 802.11n HT20 TX / CH Middle	Temp. & Humidity	23°C, 52%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1372.00	45.88	---	-2.70	43.18	---	74.00	54.00	-10.82	Peak
2018.00	47.19	---	2.31	49.51	---	74.00	54.00	-4.49	Peak
2390.00	44.60	---	3.58	48.17	---	74.00	54.00	-5.83	Peak
2484.00	44.04	---	3.90	47.94	---	74.00	54.00	-6.06	Peak
3240.00	42.23	---	5.49	47.72	---	74.00	54.00	-6.28	Peak
3615.00	41.95	---	6.29	48.24	---	74.00	54.00	-5.76	Peak
4665.00	39.78	---	8.81	48.59	---	74.00	54.00	-5.41	Peak
4905.00	39.80	---	9.44	49.24	---	74.00	54.00	-4.76	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1316.00	46.91	---	-2.89	44.01	---	74.00	54.00	-9.99	Peak
2024.00	53.14	34.36	2.33	55.47	36.69	74.00	54.00	-17.31	AVG
2354.00	47.25	---	3.45	50.70	---	74.00	54.00	-3.30	Peak
2484.00	54.64	35.45	3.90	58.54	39.35	74.00	54.00	-14.65	AVG
3135.00	44.39	---	5.28	49.67	---	74.00	54.00	-4.33	Peak
4005.00	40.89	---	7.19	48.08	---	74.00	54.00	-5.92	Peak
4245.00	40.32	---	7.76	48.09	---	74.00	54.00	-5.91	Peak
4830.00	41.56	---	9.24	50.80	---	74.00	54.00	-3.20	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Computer	Test By	Allen Liu
Test Model	DS-561SQ-S7A1E	Test Date	2013/03/12
Test Mode	IEEE 802.11n HT20 TX / CH High	Temp. & Humidity	23 °C, 52%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1934.00	46.15	---	1.66	47.81	---	74.00	54.00	-6.19	Peak
2176.00	45.71	---	2.85	48.56	---	74.00	54.00	-5.44	Peak
2390.00	44.32	---	3.58	47.90	---	74.00	54.00	-6.10	Peak
2676.00	44.86	---	4.32	49.18	---	74.00	54.00	-4.82	Peak
3120.00	44.24	---	5.24	49.49	---	74.00	54.00	-4.51	Peak
3690.00	42.13	---	6.46	48.59	---	74.00	54.00	-5.41	Peak
3975.00	40.49	---	7.12	47.61	---	74.00	54.00	-6.39	Peak
4995.00	40.27	---	9.68	49.95	---	74.00	54.00	-4.05	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1428.00	45.78	---	-2.50	43.28	---	74.00	54.00	-10.72	Peak
1736.00	46.02	---	-0.13	45.90	---	74.00	54.00	-8.10	Peak
2016.00	54.70	33.82	2.30	57.00	36.12	74.00	54.00	-17.88	AVG
2380.00	46.73	---	3.54	50.28	---	74.00	54.00	-3.72	Peak
3120.00	43.56	---	5.24	48.81	---	74.00	54.00	-5.19	Peak
3720.00	41.68	---	6.53	48.21	---	74.00	54.00	-5.79	Peak
4665.00	39.98	---	8.81	48.78	---	74.00	54.00	-5.22	Peak
4995.00	40.73	---	9.68	50.41	---	74.00	54.00	-3.59	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
 Margin = Result - Limit
 Remark Peak = Result(PK) - Limit(AV)
 Remark AVG = Result(AV) - Limit(AV)



Product Name	Computer	Test By	Allen Liu
Test Model	DS-561SQ-S7A1E	Test Date	2013/03/12
Test Mode	IEEE 802.11n HT40 TX / CH Low	Temp. & Humidity	23°C, 52%

966 Chamber_B at 3Meter / Horizontal

Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1332.00	46.15	---	-2.84	43.31	---	74.00	54.00	-10.69	Peak
1882.00	45.49	---	1.19	46.68	---	74.00	54.00	-7.32	Peak
1992.00	45.57	---	2.18	47.75	---	74.00	54.00	-6.25	Peak
2484.00	45.83	---	3.90	49.73	---	74.00	54.00	-4.27	Peak
3195.00	42.41	---	5.40	47.81	---	74.00	54.00	-6.19	Peak
3750.00	42.23	---	6.60	48.83	---	74.00	54.00	-5.17	Peak
4185.00	41.24	---	7.62	48.86	---	74.00	54.00	-5.14	Peak
4770.00	39.98	---	9.08	49.06	---	74.00	54.00	-4.94	Peak

966 Chamber_B at 3Meter / Vertical

Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1472.00	45.79	---	-2.35	43.44	---	74.00	54.00	-10.56	Peak
1850.00	46.06	---	0.90	46.96	---	74.00	54.00	-7.04	Peak
2042.00	54.35	34.50	2.39	56.74	36.89	74.00	54.00	-17.11	AVG
2484.00	57.46	37.33	3.90	61.36	41.23	74.00	54.00	-12.77	AVG
3120.00	44.40	---	5.24	49.65	---	74.00	54.00	-4.35	Peak
3405.00	41.83	---	5.83	47.65	---	74.00	54.00	-6.35	Peak
4005.00	40.92	---	7.19	48.12	---	74.00	54.00	-5.88	Peak
4695.00	40.28	---	8.88	49.17	---	74.00	54.00	-4.83	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Computer	Test By	Allen Liu
Test Model	DS-561SQ-S7A1E	Test Date	2013/03/12
Test Mode	IEEE 802.11n HT40 TX / CH Middle	Temp. & Humidity	23 °C, 52%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1662.00	46.74	---	-0.79	45.95	---	74.00	54.00	-8.05	Peak
1976.00	48.08	---	2.03	50.11	---	74.00	54.00	-3.89	Peak
2390.00	52.52	34.38	3.58	56.10	37.96	74.00	54.00	-16.04	AVG
2484.00	54.28	36.13	3.90	58.18	40.03	74.00	54.00	-13.97	AVG
3120.00	43.77	---	5.24	49.01	---	74.00	54.00	-4.99	Peak
3870.00	41.92	---	6.88	48.80	---	74.00	54.00	-5.20	Peak
4785.00	40.11	---	9.12	49.23	---	74.00	54.00	-4.77	Peak
5340.00	39.47	---	10.15	49.63	---	74.00	54.00	-4.37	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1268.00	47.07	---	-3.06	44.00	---	74.00	54.00	-10.00	Peak
2056.00	53.76	34.93	2.44	56.20	37.37	74.00	54.00	-16.63	AVG
2390.00	58.32	38.90	3.58	61.90	42.48	74.00	54.00	-11.52	AVG
2484.00	63.62	43.63	3.90	67.52	47.53	74.00	54.00	-6.47	AVG
3120.00	43.38	---	5.24	48.63	---	74.00	54.00	-5.37	Peak
3915.00	41.51	---	6.98	48.49	---	74.00	54.00	-5.51	Peak
4590.00	41.33	---	8.61	49.94	---	74.00	54.00	-4.06	Peak
4995.00	41.12	---	9.68	50.79	---	74.00	54.00	-3.21	Peak
5610.00	39.94	---	10.64	50.58	---	74.00	54.00	-3.42	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	Computer	Test By	Allen Liu
Test Model	DS-561SQ-S7A1E	Test Date	2013/03/12
Test Mode	IEEE 802.11n HT40 TX / CH High	Temp. & Humidity	23 °C, 52%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1428.00	46.26	---	-2.50	43.75	---	74.00	54.00	-10.25	Peak
1660.00	45.48	---	-0.81	44.67	---	74.00	54.00	-9.33	Peak
1998.00	46.32	---	2.23	48.55	---	74.00	54.00	-5.45	Peak
2390.00	45.15	---	3.58	48.72	---	74.00	54.00	-5.28	Peak
3255.00	43.13	---	5.52	48.65	---	74.00	54.00	-5.35	Peak
3750.00	41.94	---	6.60	48.54	---	74.00	54.00	-5.46	Peak
4425.00	40.07	---	8.19	48.27	---	74.00	54.00	-5.73	Peak
4770.00	40.01	---	9.08	49.09	---	74.00	54.00	-4.91	Peak



966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1270.00	47.32	---	-3.06	44.27	---	74.00	54.00	-9.73	Peak
1786.00	45.33	---	0.32	45.66	---	74.00	54.00	-8.34	Peak
2080.00	54.32	33.82	2.52	56.84	36.34	74.00	54.00	-17.66	AVG
2338.00	48.46	33.33	3.40	51.86	36.73	74.00	54.00	-17.27	AVG
3120.00	45.28	---	5.24	50.53	---	74.00	54.00	-3.47	Peak
3705.00	42.18	---	6.50	48.67	---	74.00	54.00	-5.33	Peak
4395.00	40.76	---	8.12	48.88	---	74.00	54.00	-5.12	Peak
4995.00	40.87	---	9.68	50.54	---	74.00	54.00	-3.46	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Result = Reading + Correction Factor
 Margin = Result - Limit
 Remark Peak = Result(PK) - Limit(AV)
 Remark AVG = Result(AV) - Limit(AV)




Restricted Band Edges

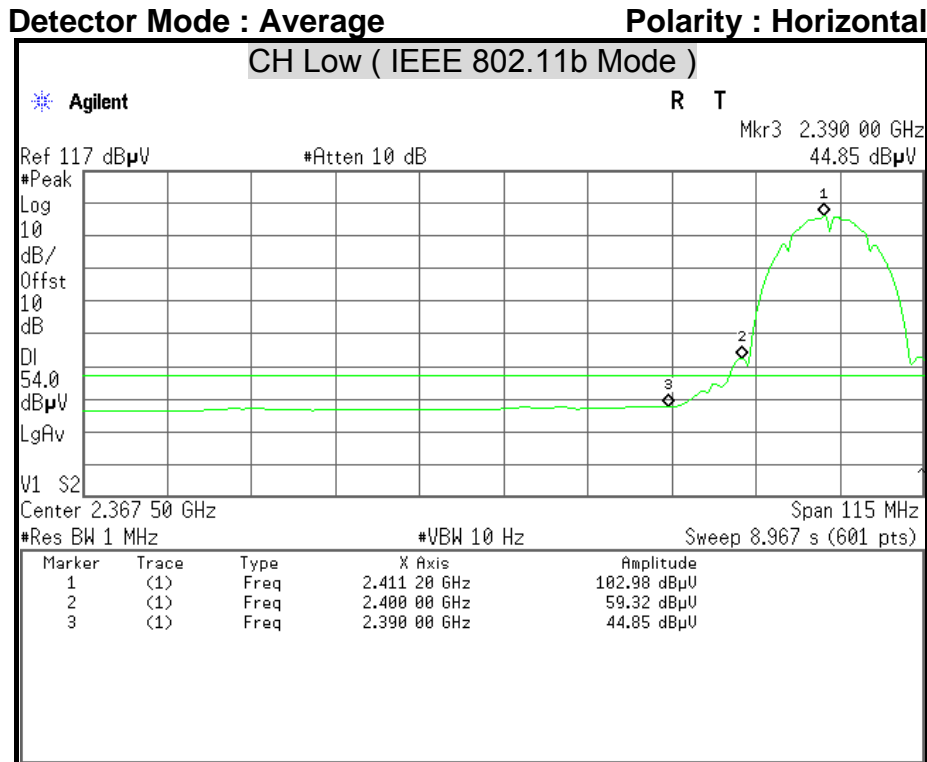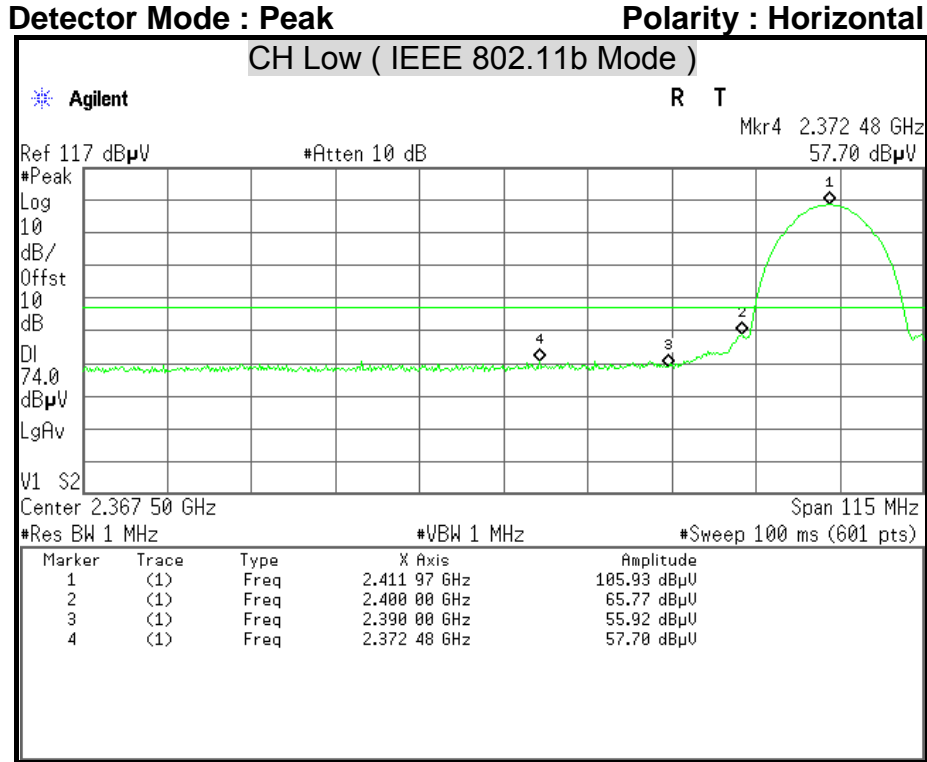




Detector Mode : Peak

Polarity : Vertical

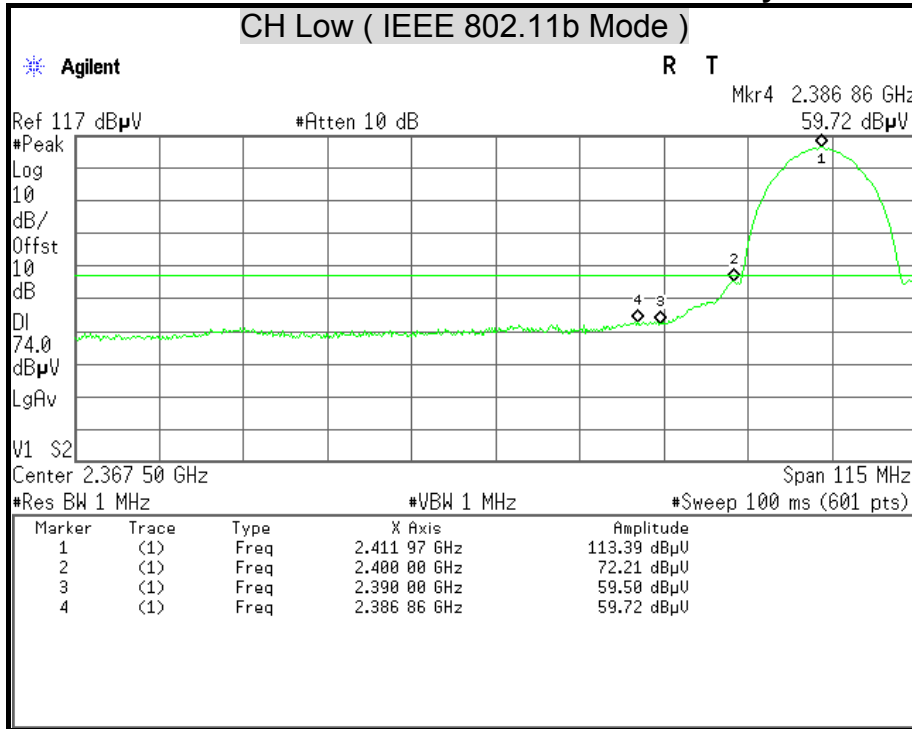

Detector Mode : Average


Polarity : Vertical

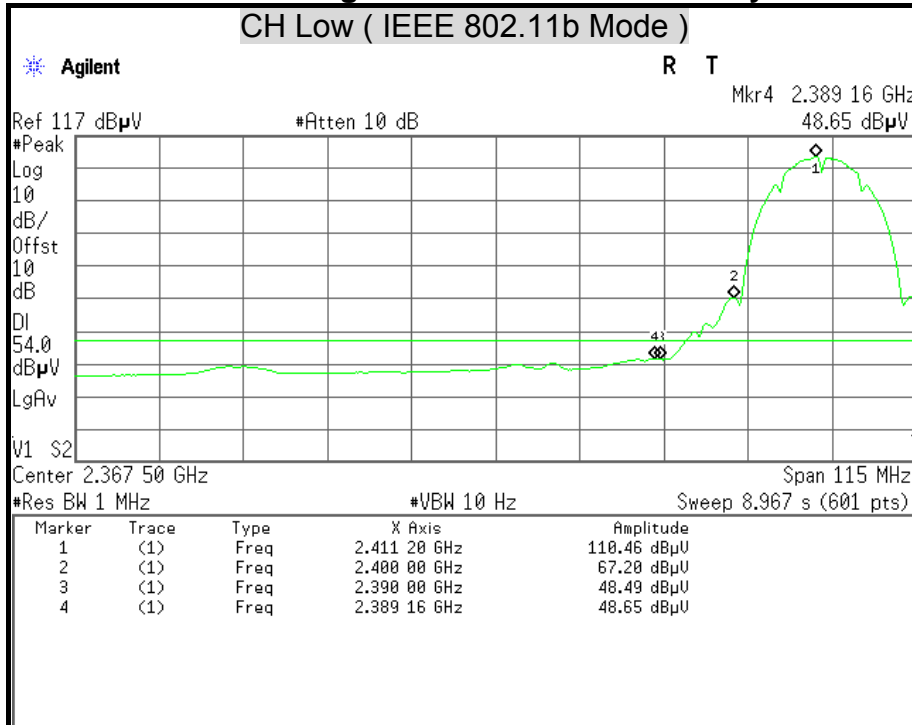




Detector Mode : Peak

Polarity : Horizontal

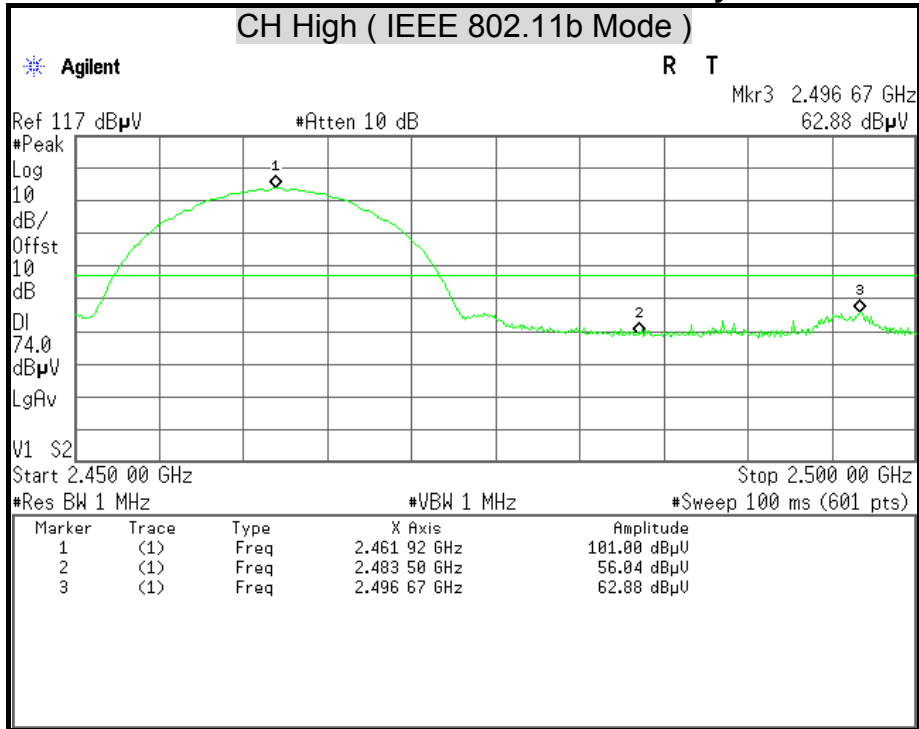

Detector Mode : Average


Polarity : Horizontal

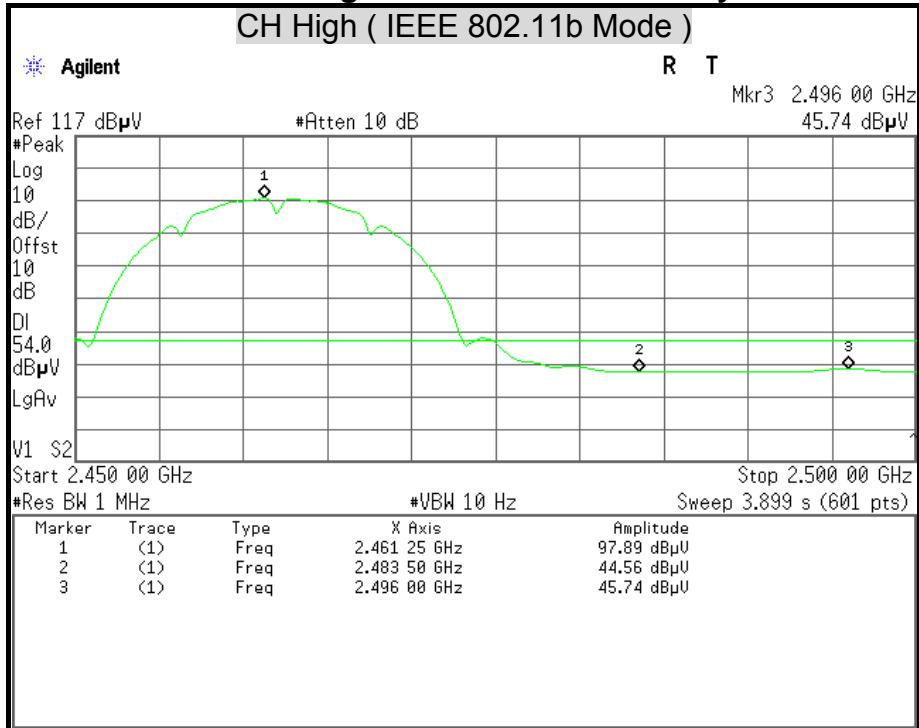




Detector Mode : Peak

Polarity : Vertical

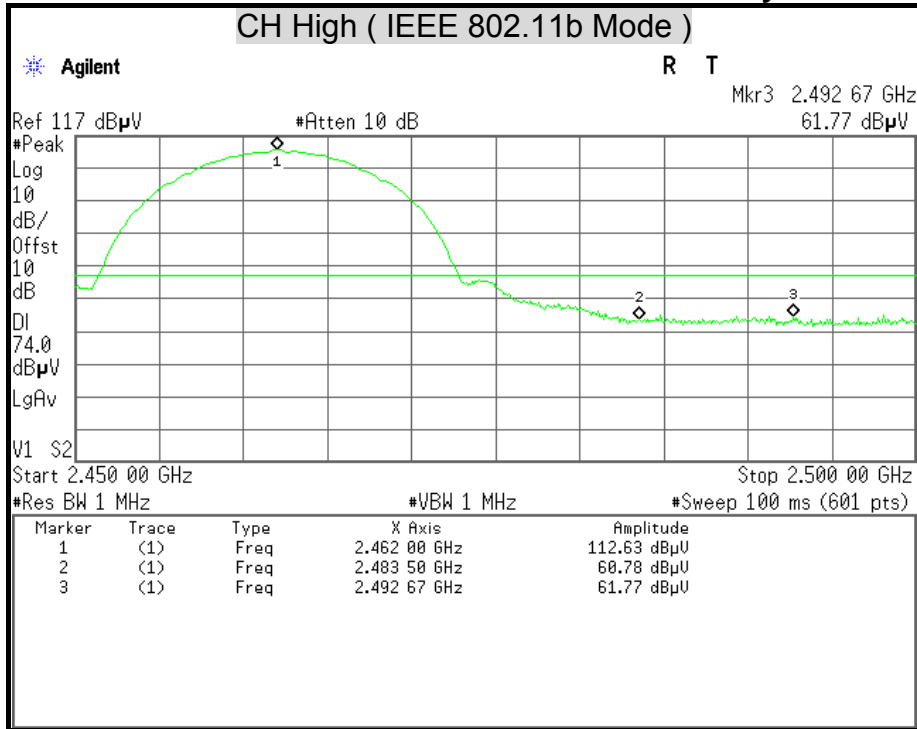

Detector Mode : Average


Polarity : Vertical

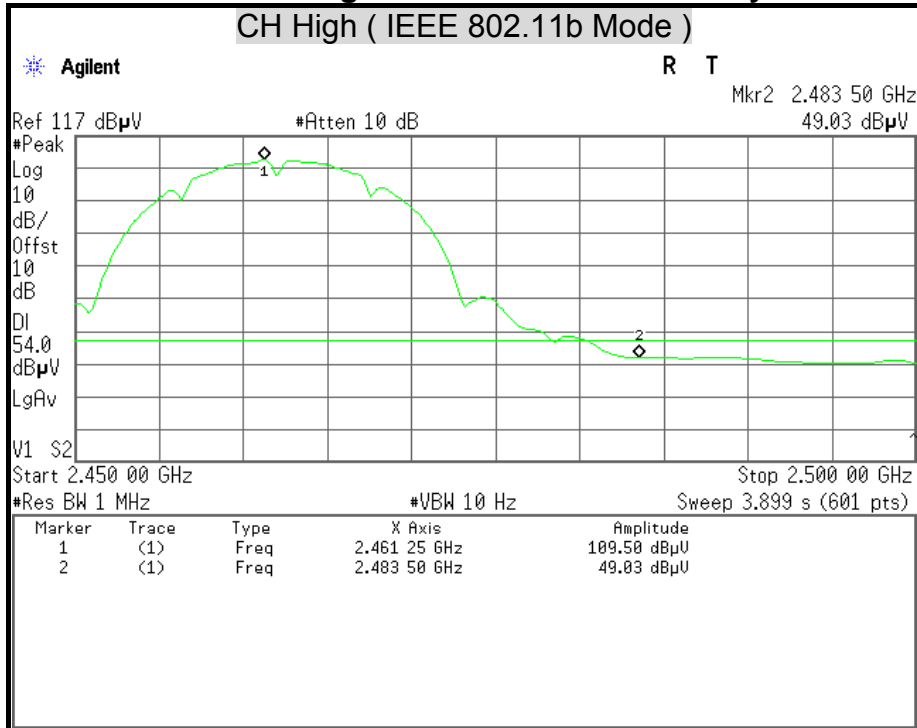




Detector Mode : Peak

Polarity : Horizontal

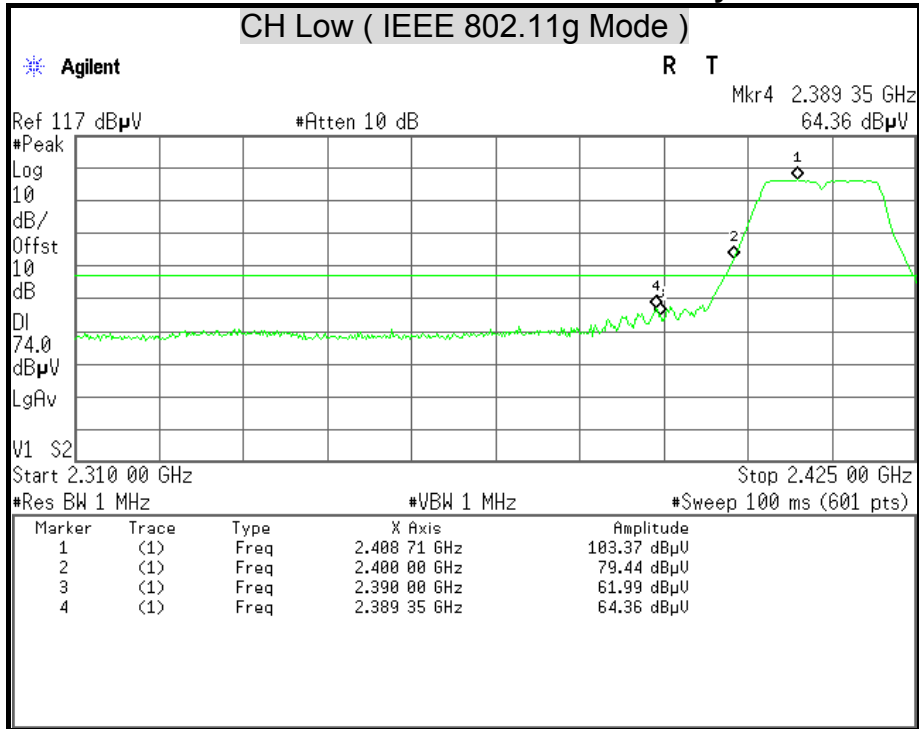

Detector Mode : Average


Polarity : Horizontal

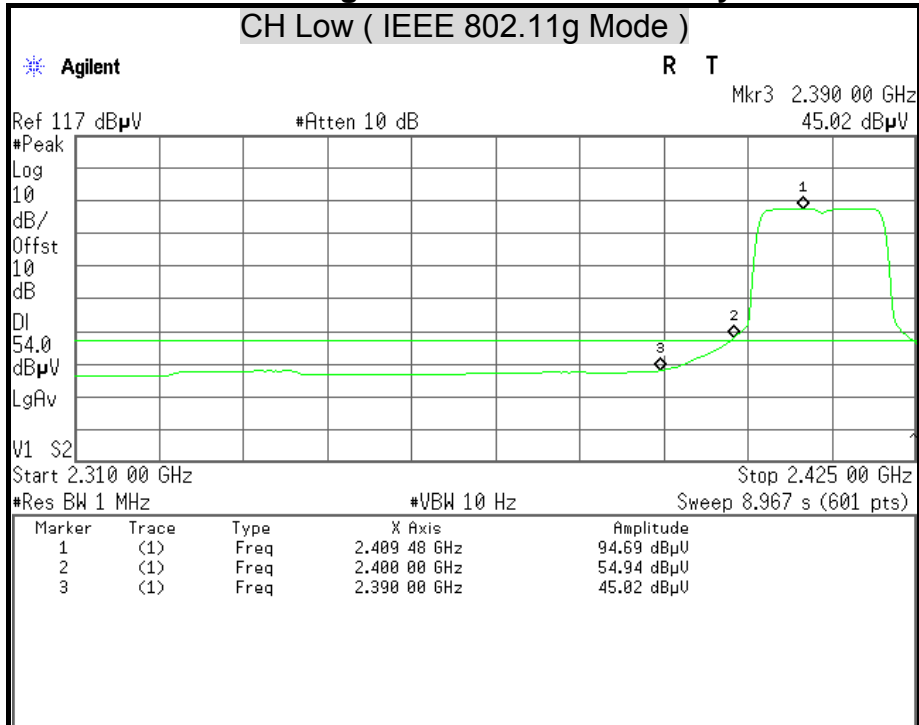




Detector Mode : Peak

Polarity : Vertical

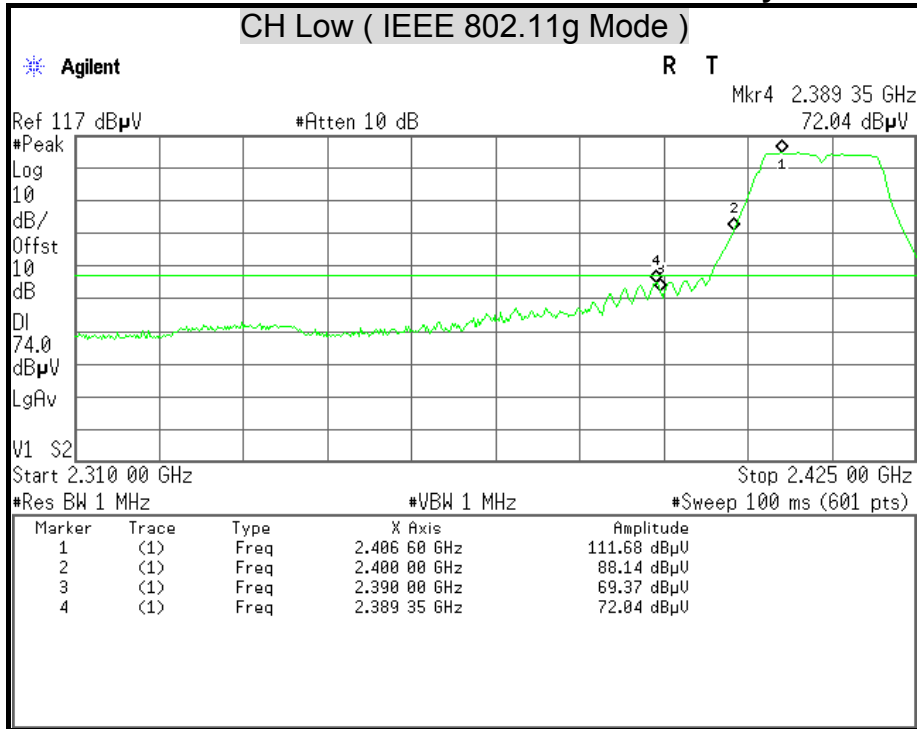

Detector Mode : Average


Polarity : Vertical

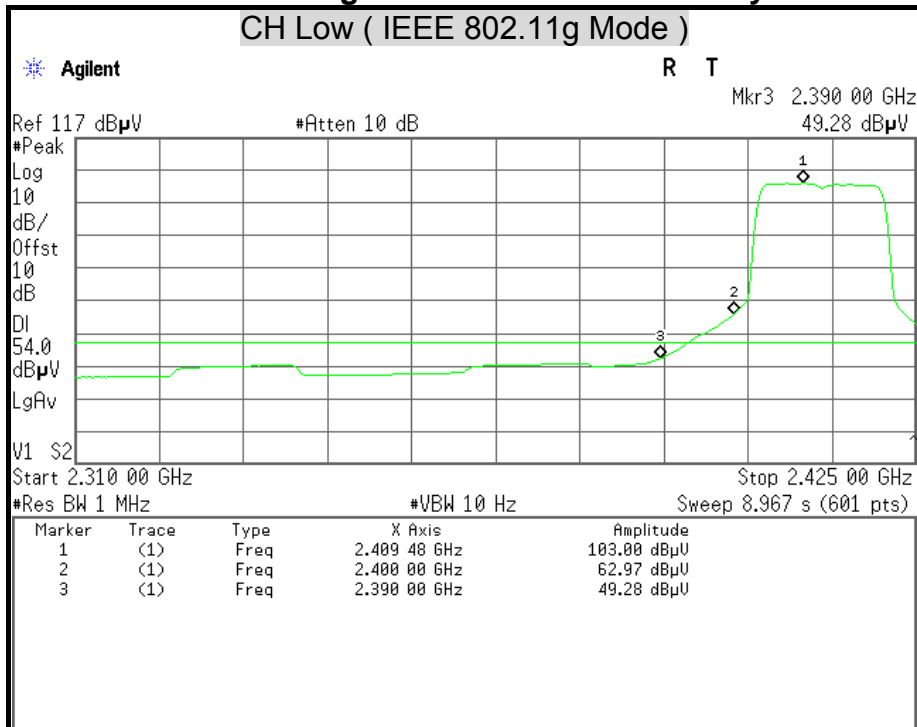




Detector Mode : Peak

Polarity : Horizontal

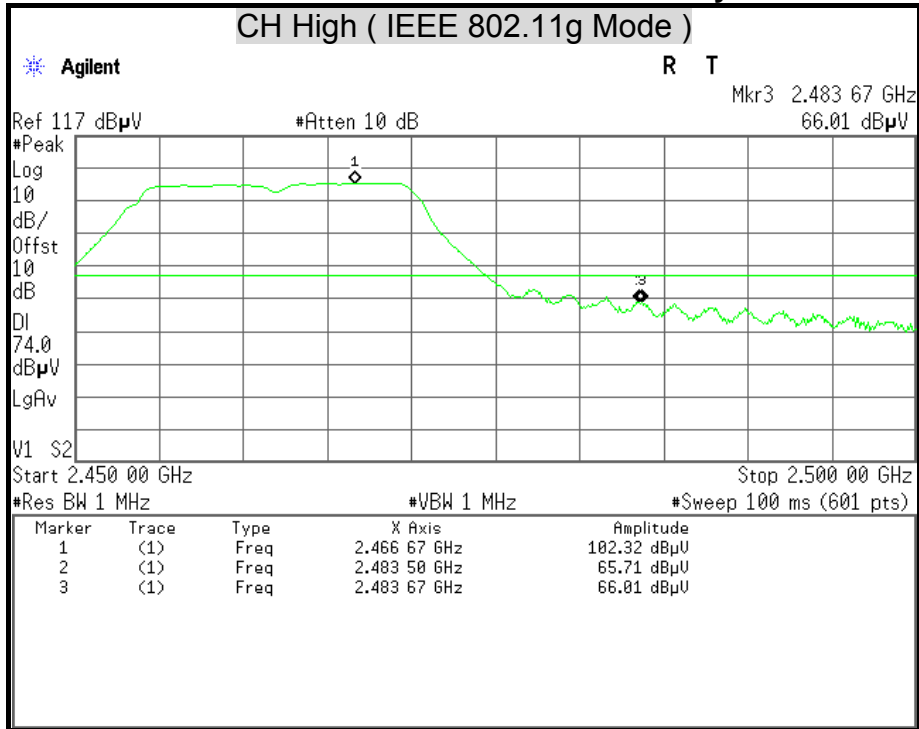

Detector Mode : Average


Polarity : Horizontal

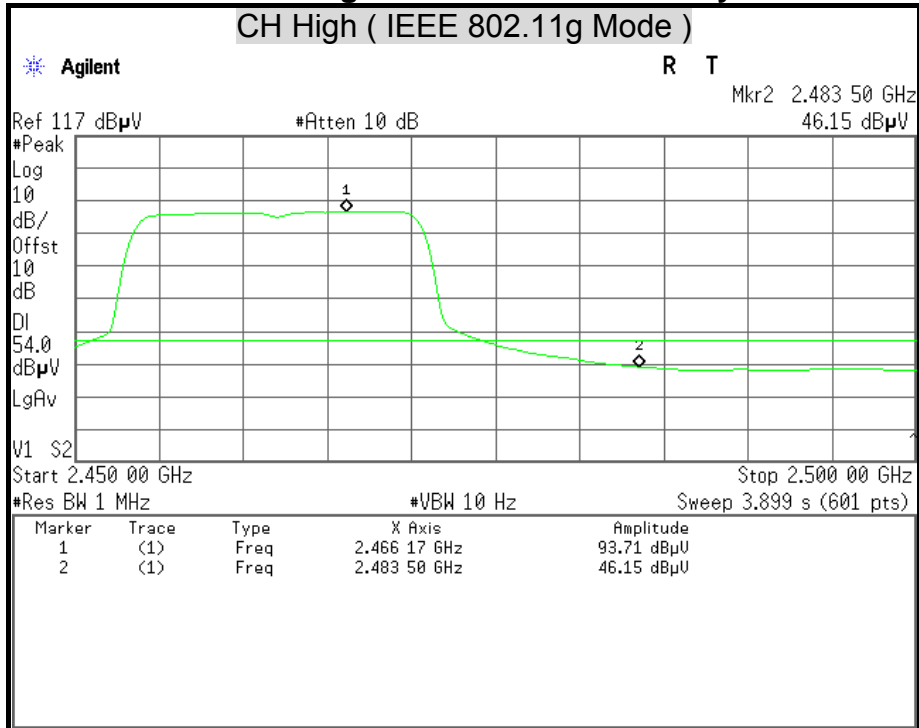




Detector Mode : Peak

Polarity : Vertical

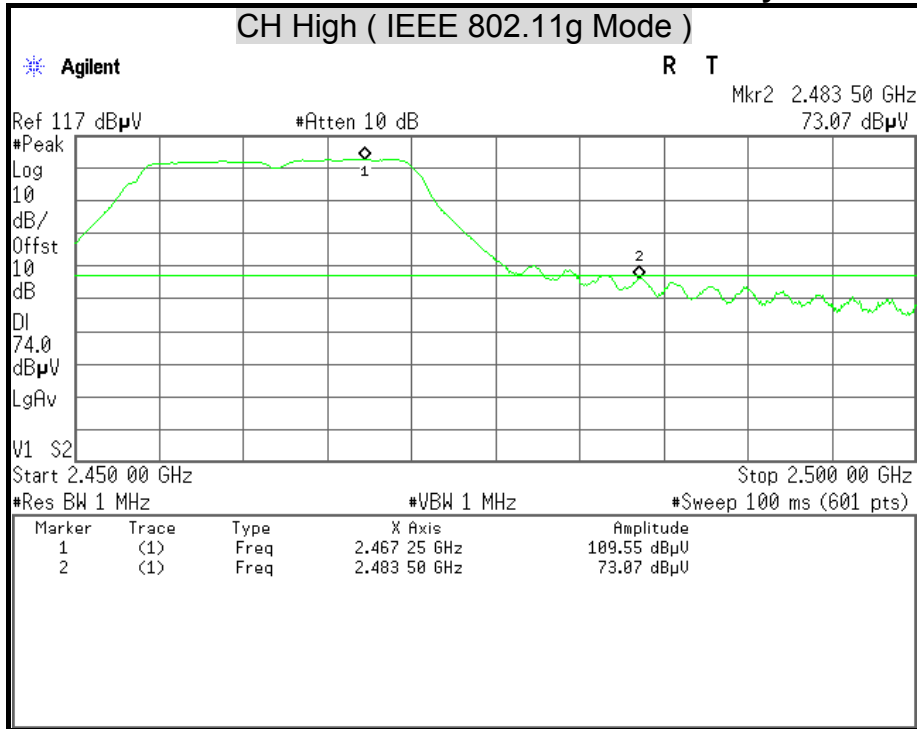

Detector Mode : Average


Polarity : Vertical

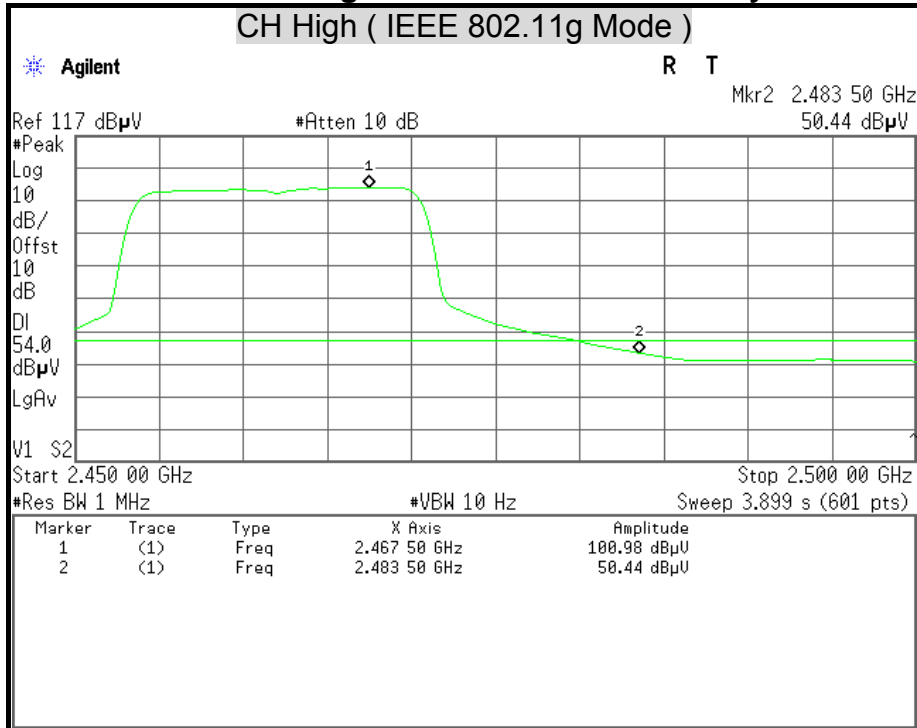




Detector Mode : Peak

Polarity : Horizontal

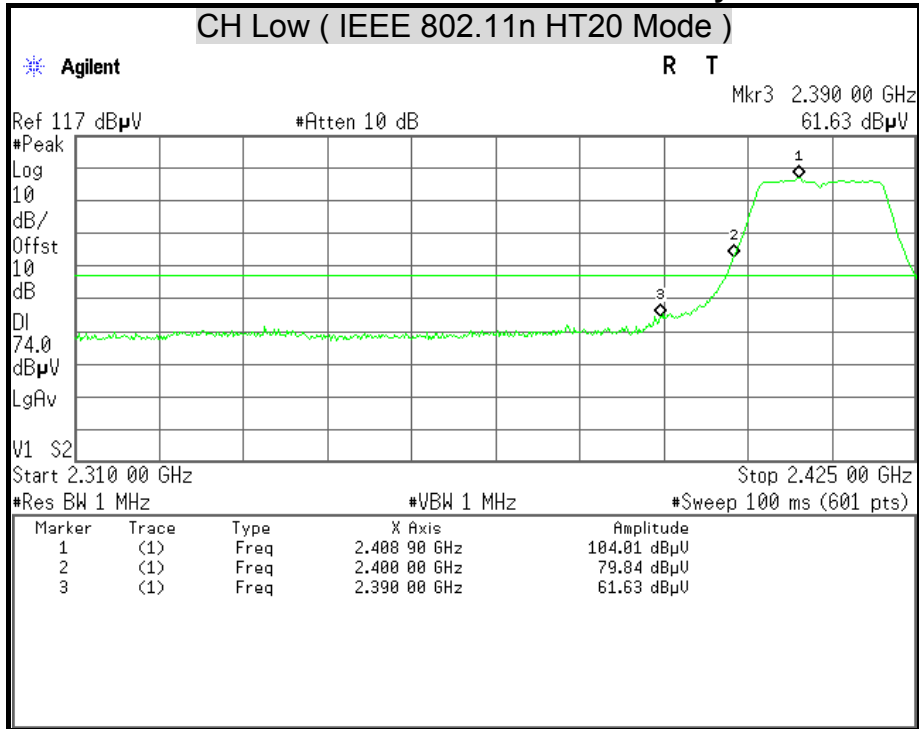

Detector Mode : Average


Polarity : Horizontal

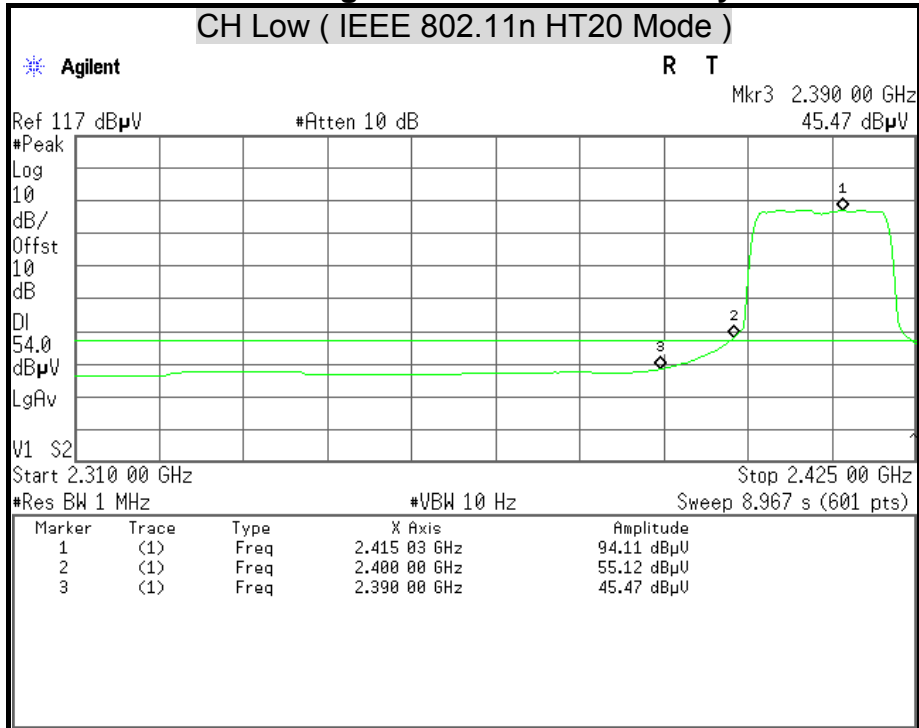




Detector Mode : Peak

Polarity : Vertical

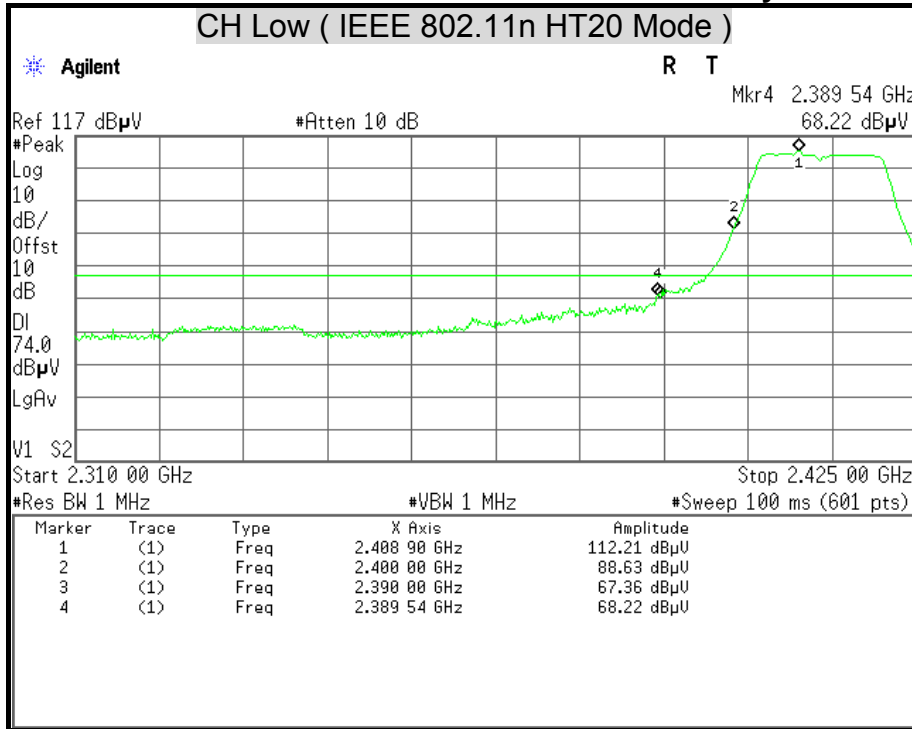

Detector Mode : Average


Polarity : Vertical

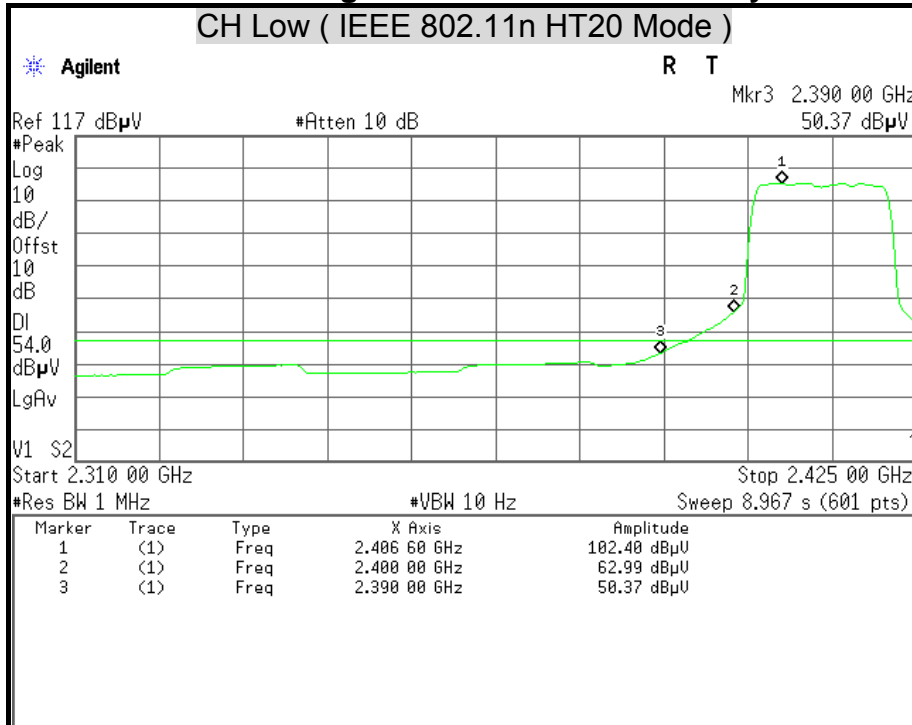




Detector Mode : Peak

Polarity : Horizontal

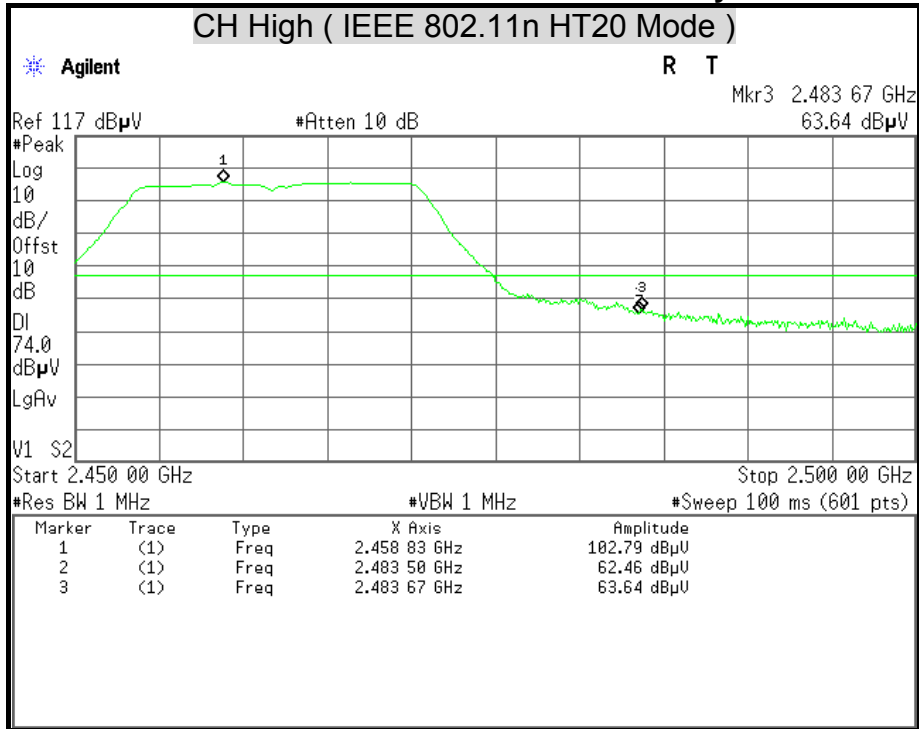

Detector Mode : Average


Polarity : Horizontal

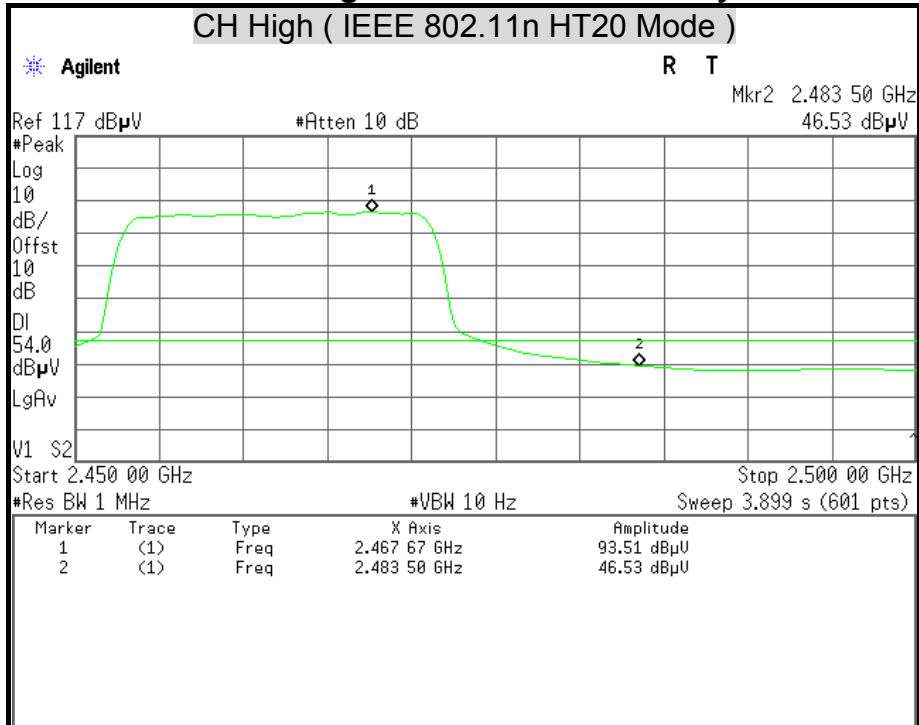




Detector Mode : Peak

Polarity : Vertical

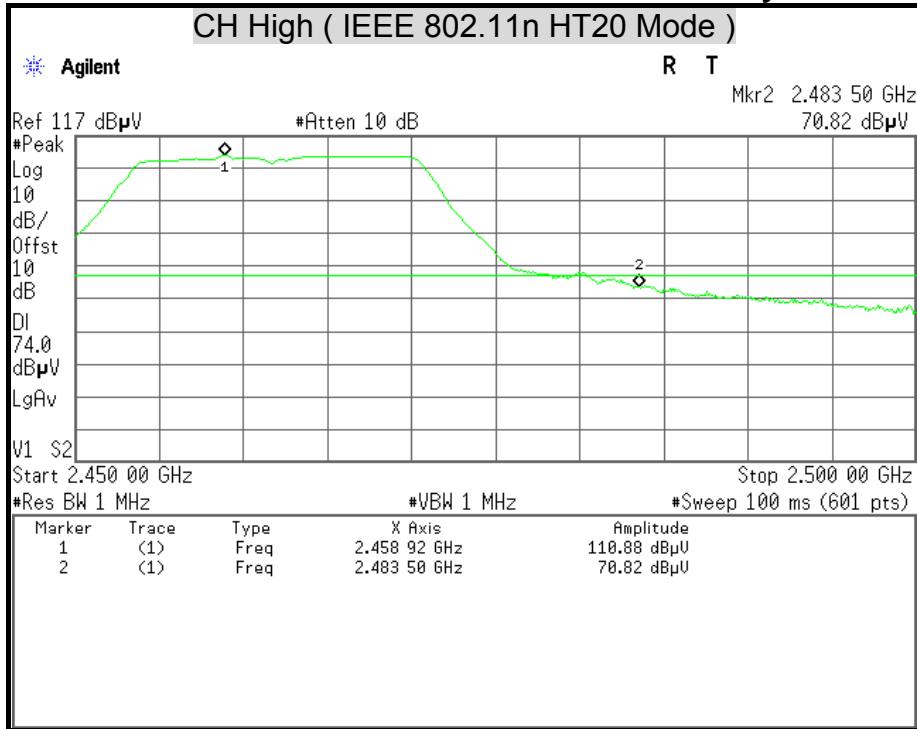

Detector Mode : Average


Polarity : Vertical

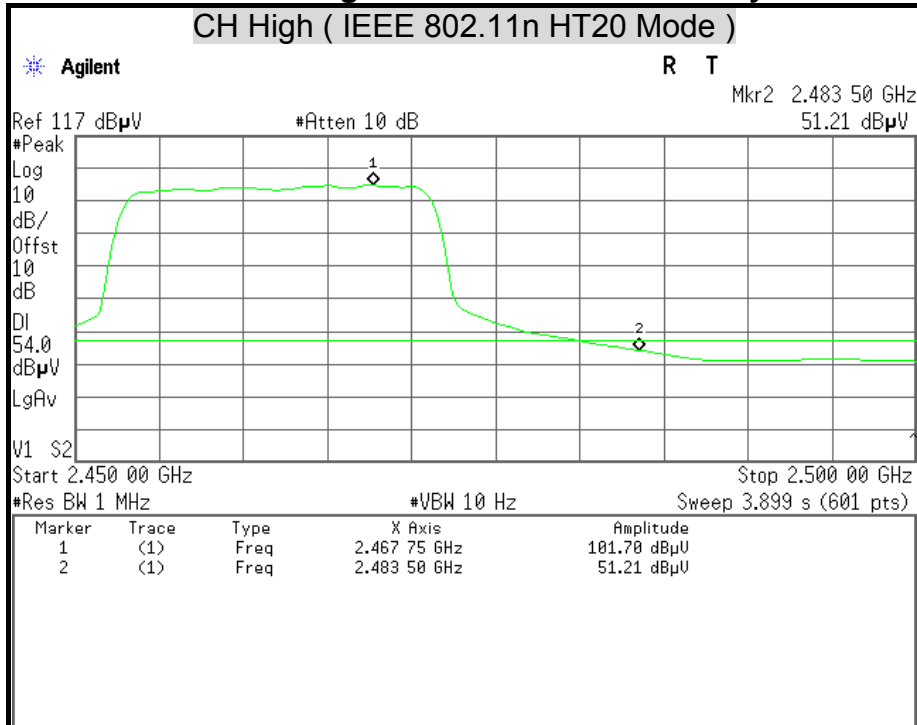




Detector Mode : Peak

Polarity : Horizontal

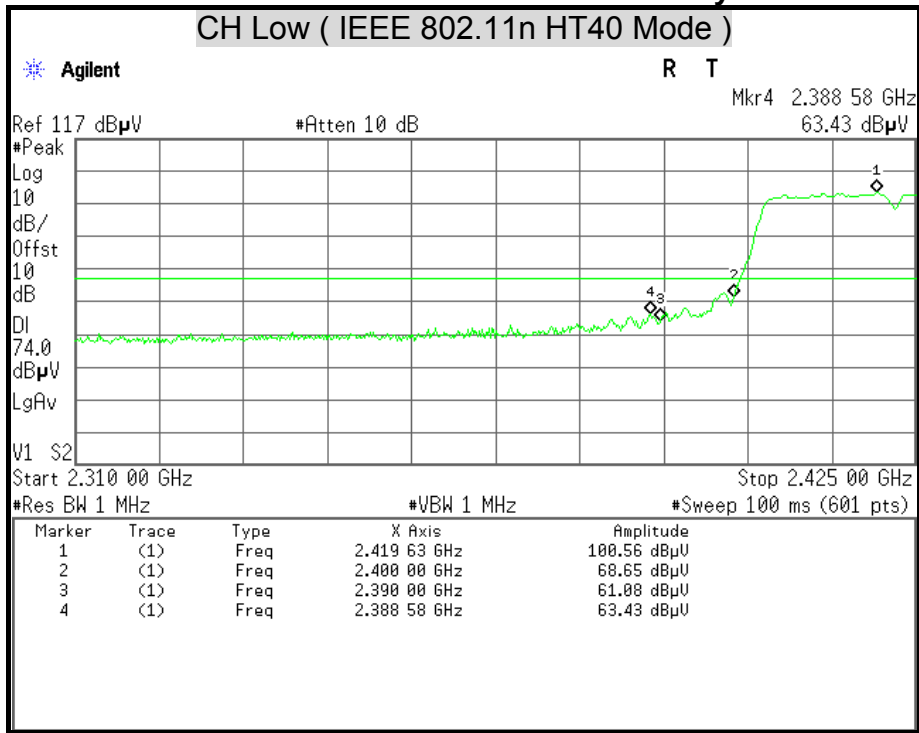

Detector Mode : Average


Polarity : Horizontal

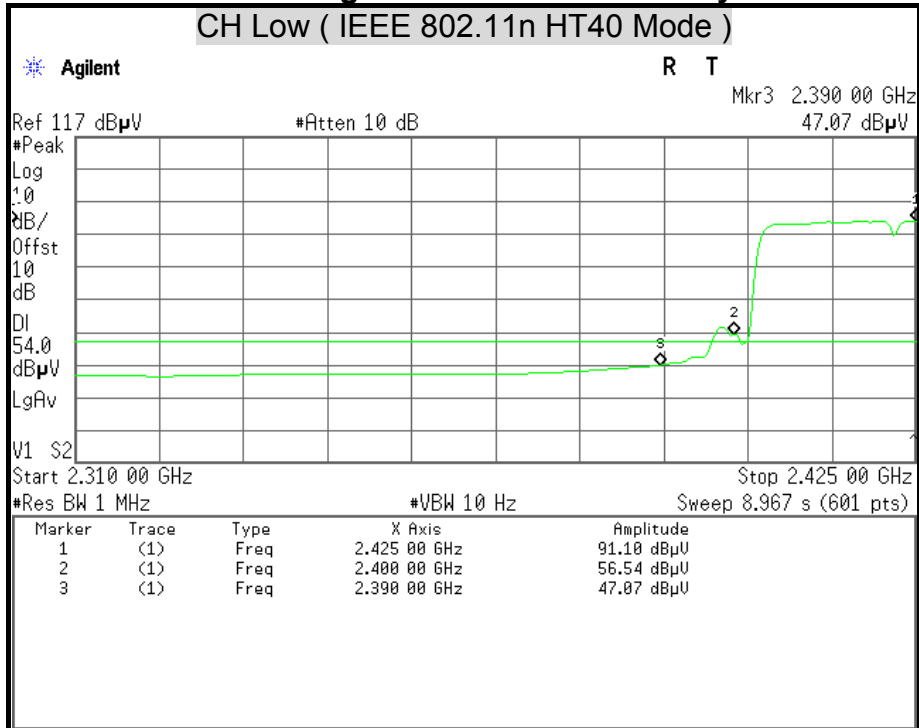




Detector Mode : Peak

Polarity : Vertical

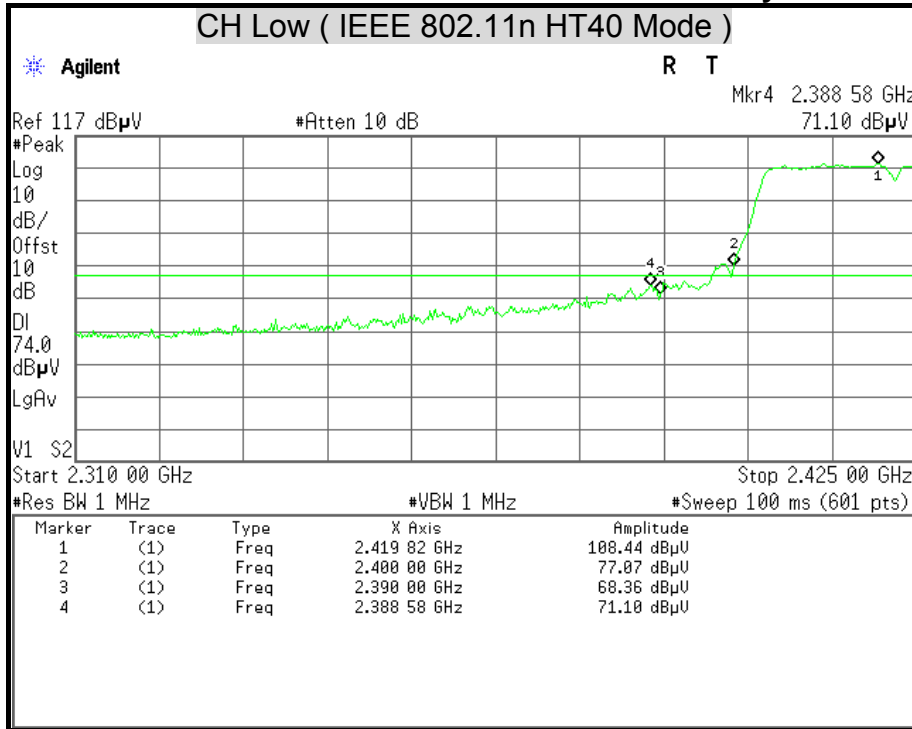

Detector Mode : Average


Polarity : Vertical

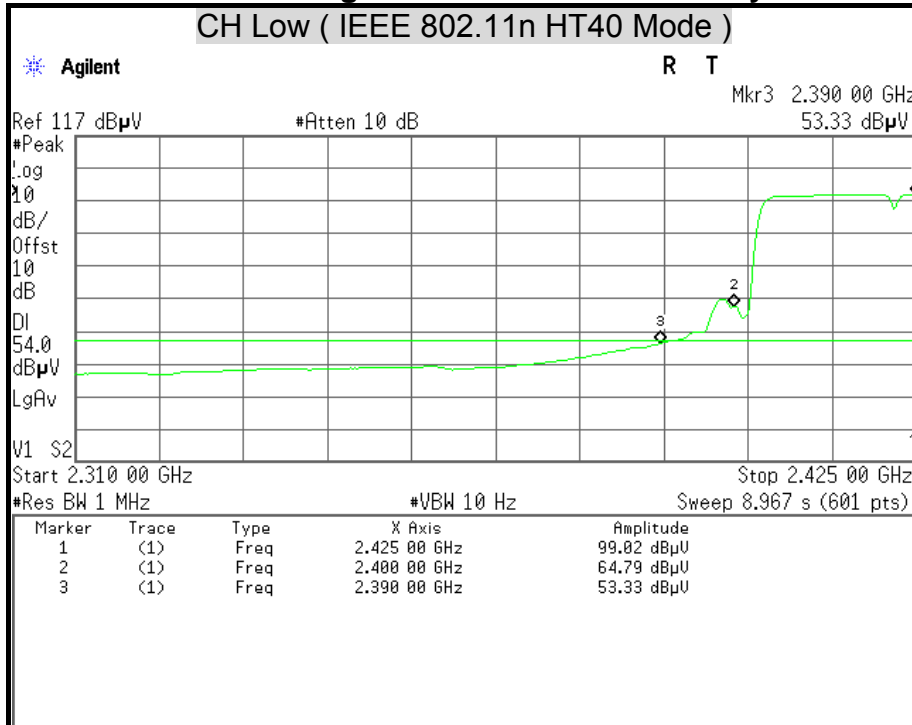




Detector Mode : Peak

Polarity : Horizontal

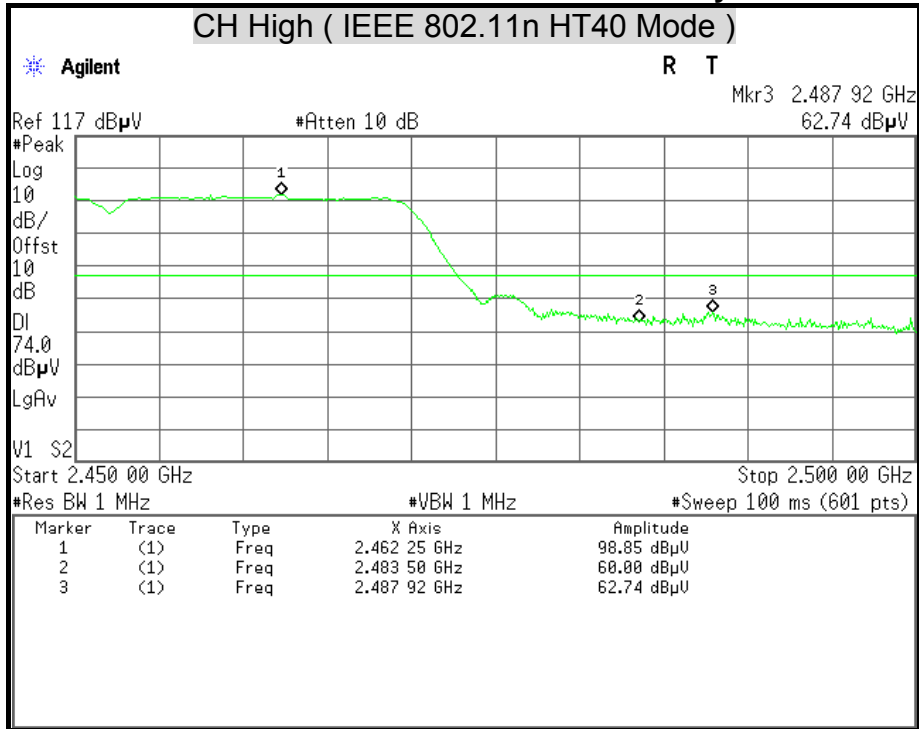

Detector Mode : Average


Polarity : Horizontal

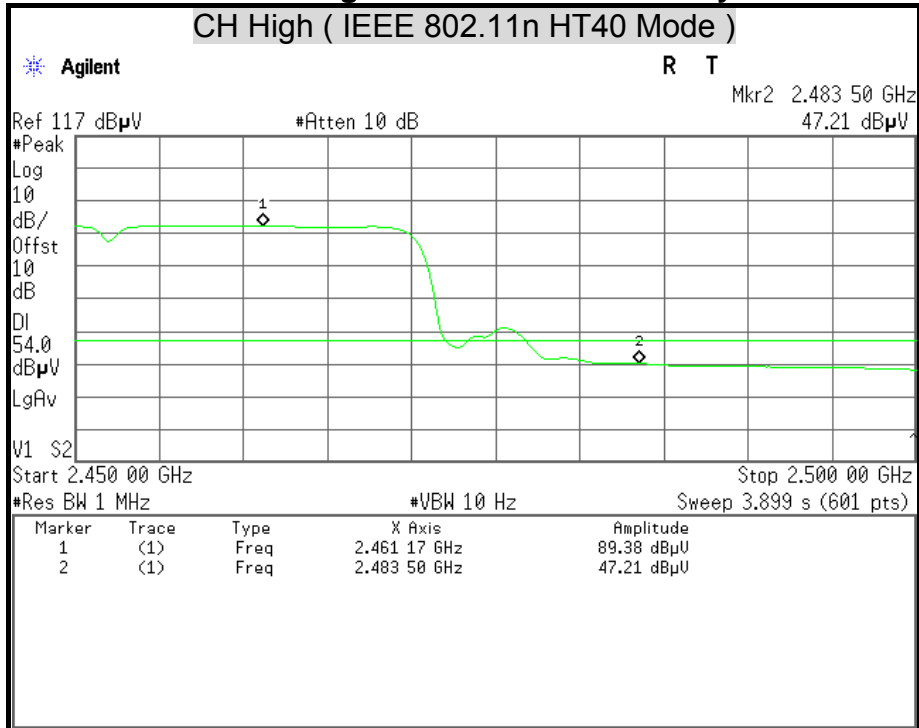




Detector Mode : Peak

Polarity : Vertical

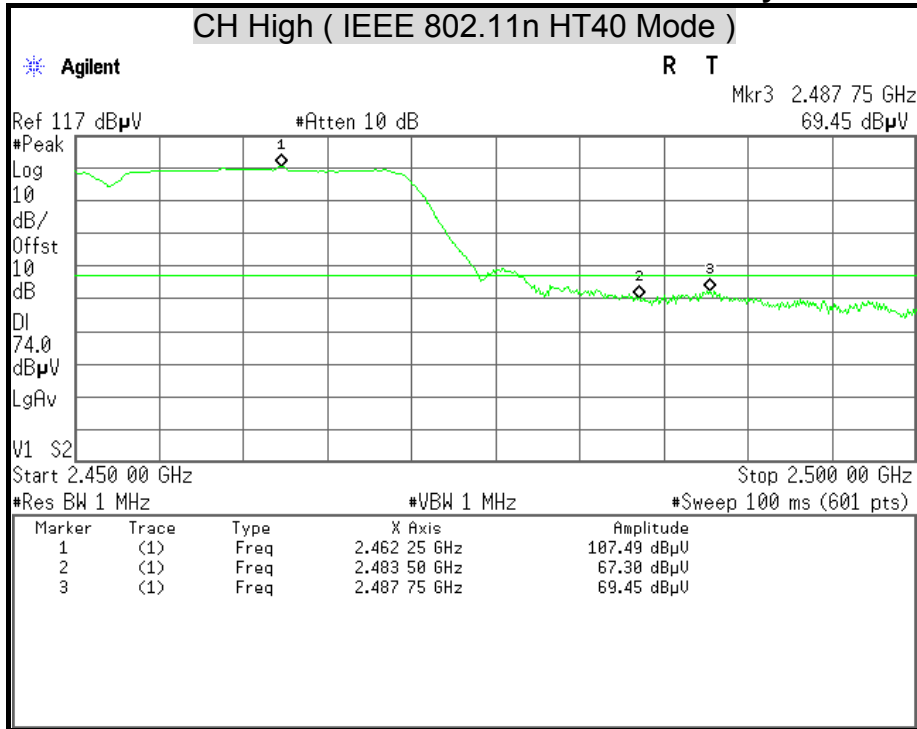

Detector Mode : Average

Polarity : Vertical

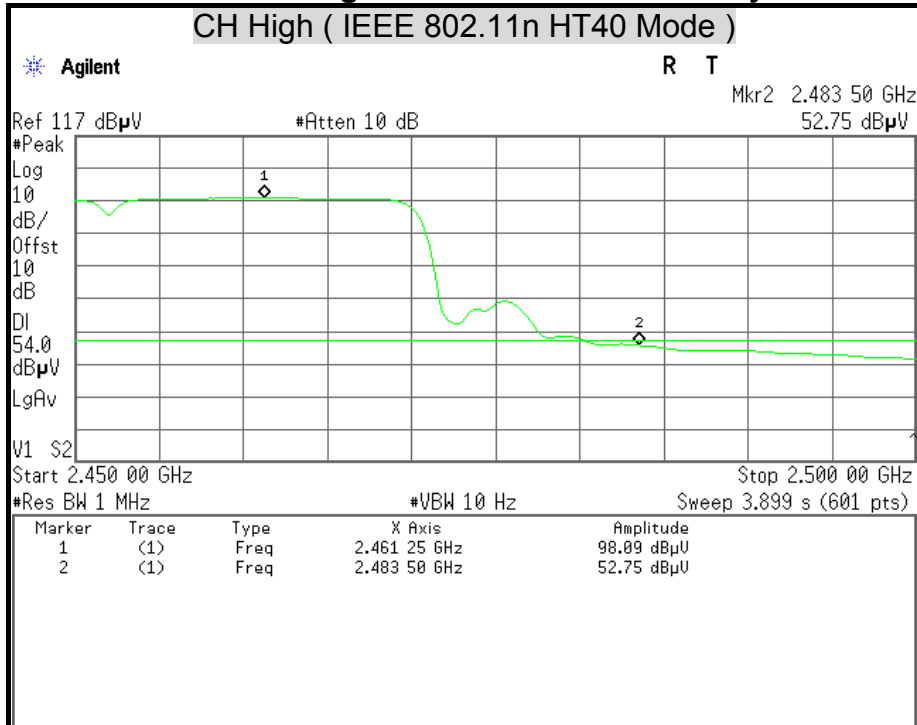



7.6 CONDUCTED EMISSION

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dB μ v)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5.00	56	46
5.00 - 30.0	60	50



TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-465	08/07/2013
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-473	03/07/2014
EMI Receiver	ROHDE & SCHWARZ	ESCS 30	835418/008	10/16/2013
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	100117	07/03/2013

Remark: Each piece of equipment is scheduled for calibration once a year.



TEST SETUP

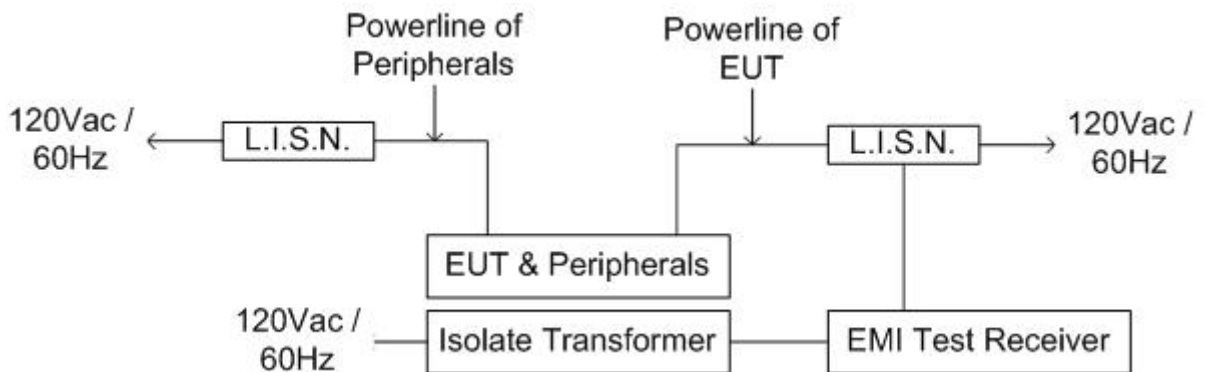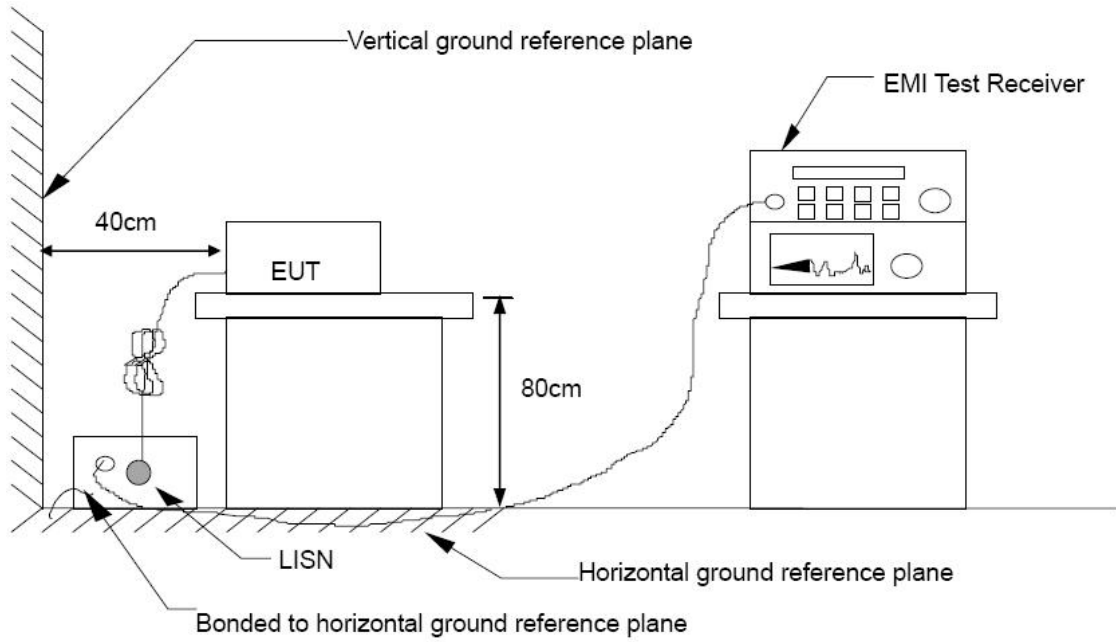



TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4:2009.

The test procedure is performed in a 4m × 3m × 2.4m (L×W×H) shielded room.

The EUT along with its peripherals were placed on a 1.0m (W) × 1.5m (L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.

The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.


The EUT was located so that the distance between the boundary of the EUT and the closest surface of the LISN is 0.8 m. Where a mains flexible cord was provided by the manufacturer shall be 1 m long, or if in excess of 1 m, the excess cable was folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.



TEST RESULTS

Product Name	Computer	Test By	Allen Liu
Test Model	DS-561SQ-S7A1E	Test Date	2013/05/13
Test Mode	TX Mode / Power Adapter 1	Temp. & Humidity	21°C, 61%

LINE

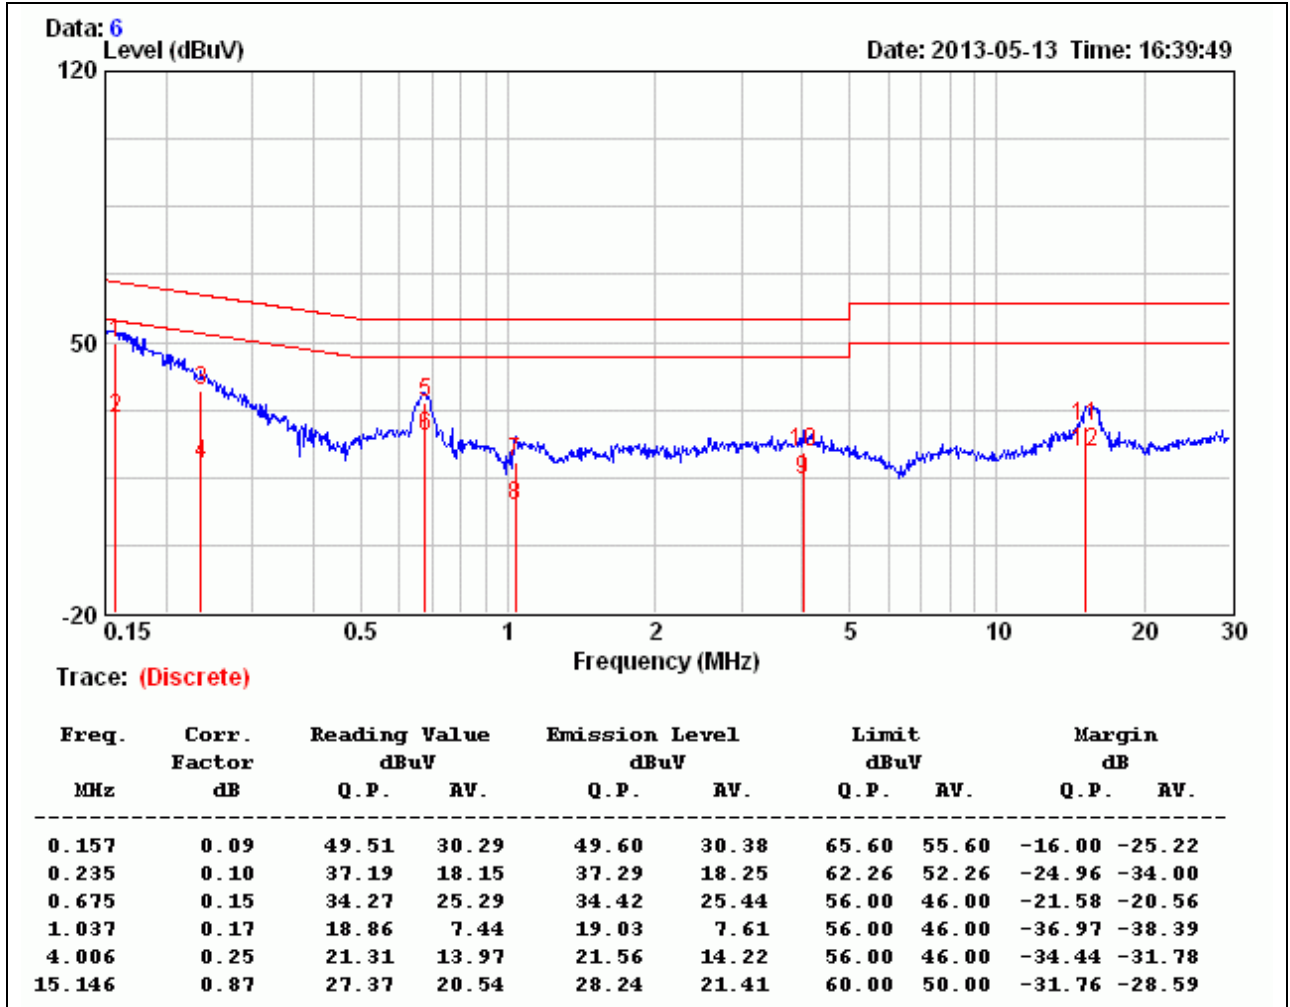


Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level - Limit value



Product Name	Computer	Test By	Allen Liu
Test Model	DS-561SQ-S7A1E	Test Date	2013/05/13
Test Mode	TX Mode / Power Adapter 1	Temp. & Humidity	21°C, 61%

NEUTRAL

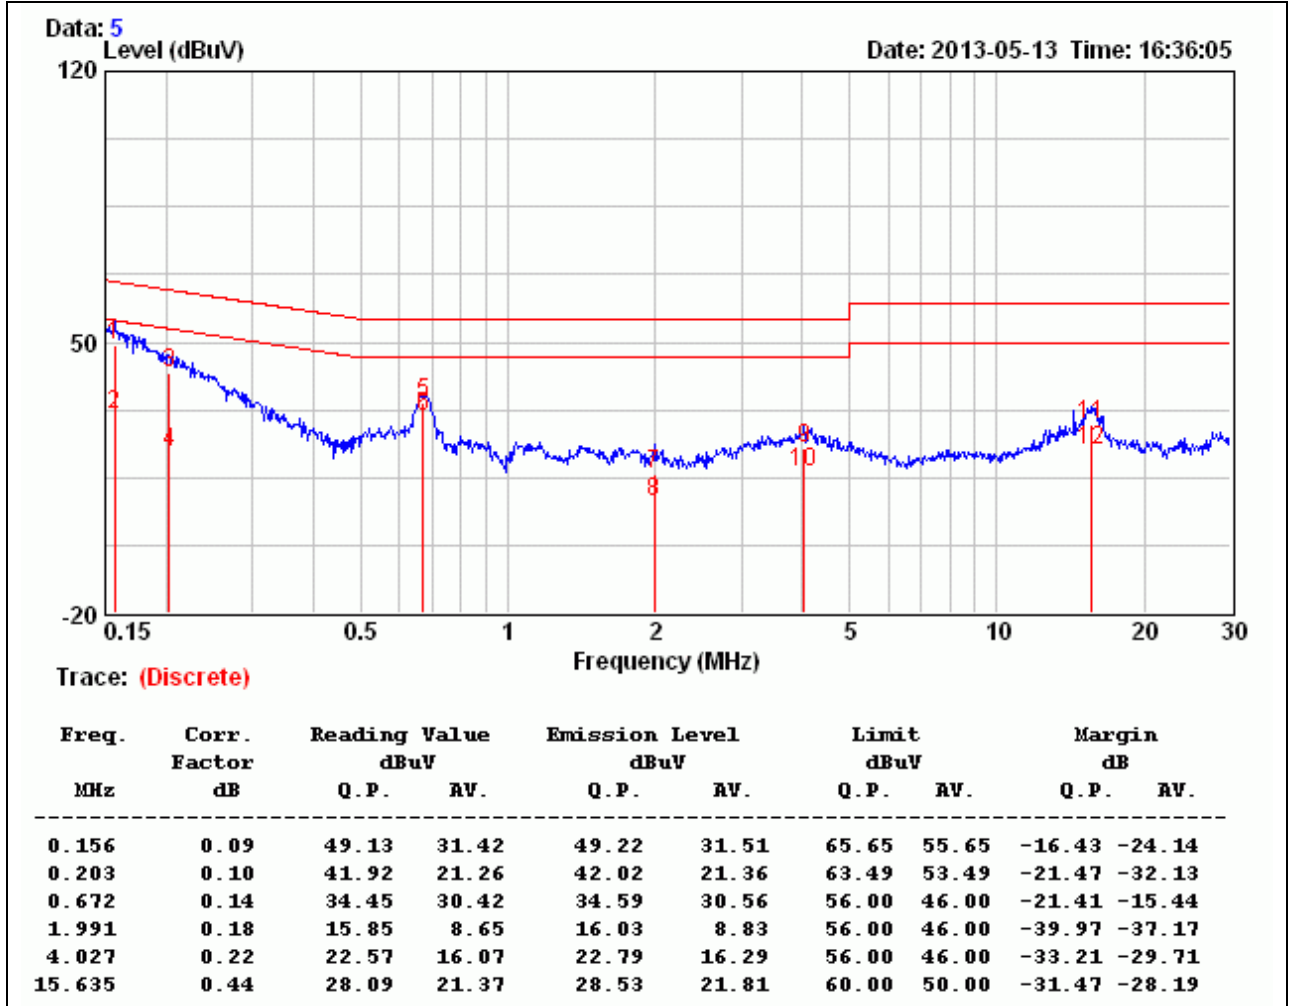


Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level - Limit value



Product Name	Computer	Test By	Allen Liu
Test Model	DS-561SQ-S7A1E	Test Date	2013/05/13
Test Mode	TX Mode / Power Adapter 2	Temp. & Humidity	21°C, 61%

LINE

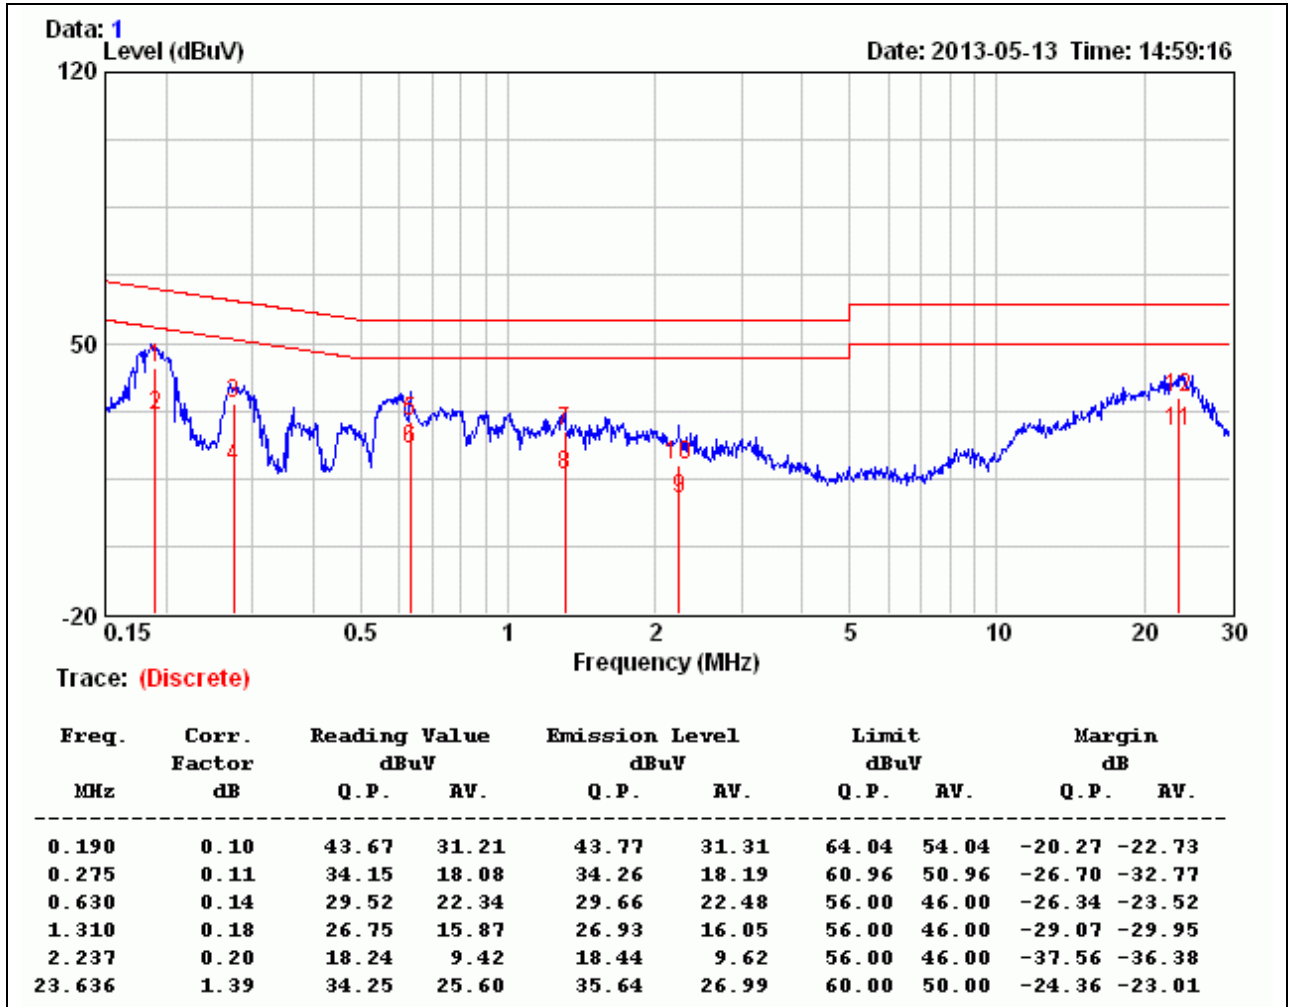


Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level – Limit value



Product Name	Computer	Test By	Allen Liu
Test Model	DS-561SQ-S7A1E	Test Date	2013/05/13
Test Mode	TX Mode / Power Adapter 2	Temp. & Humidity	21°C, 61%

NEUTRAL

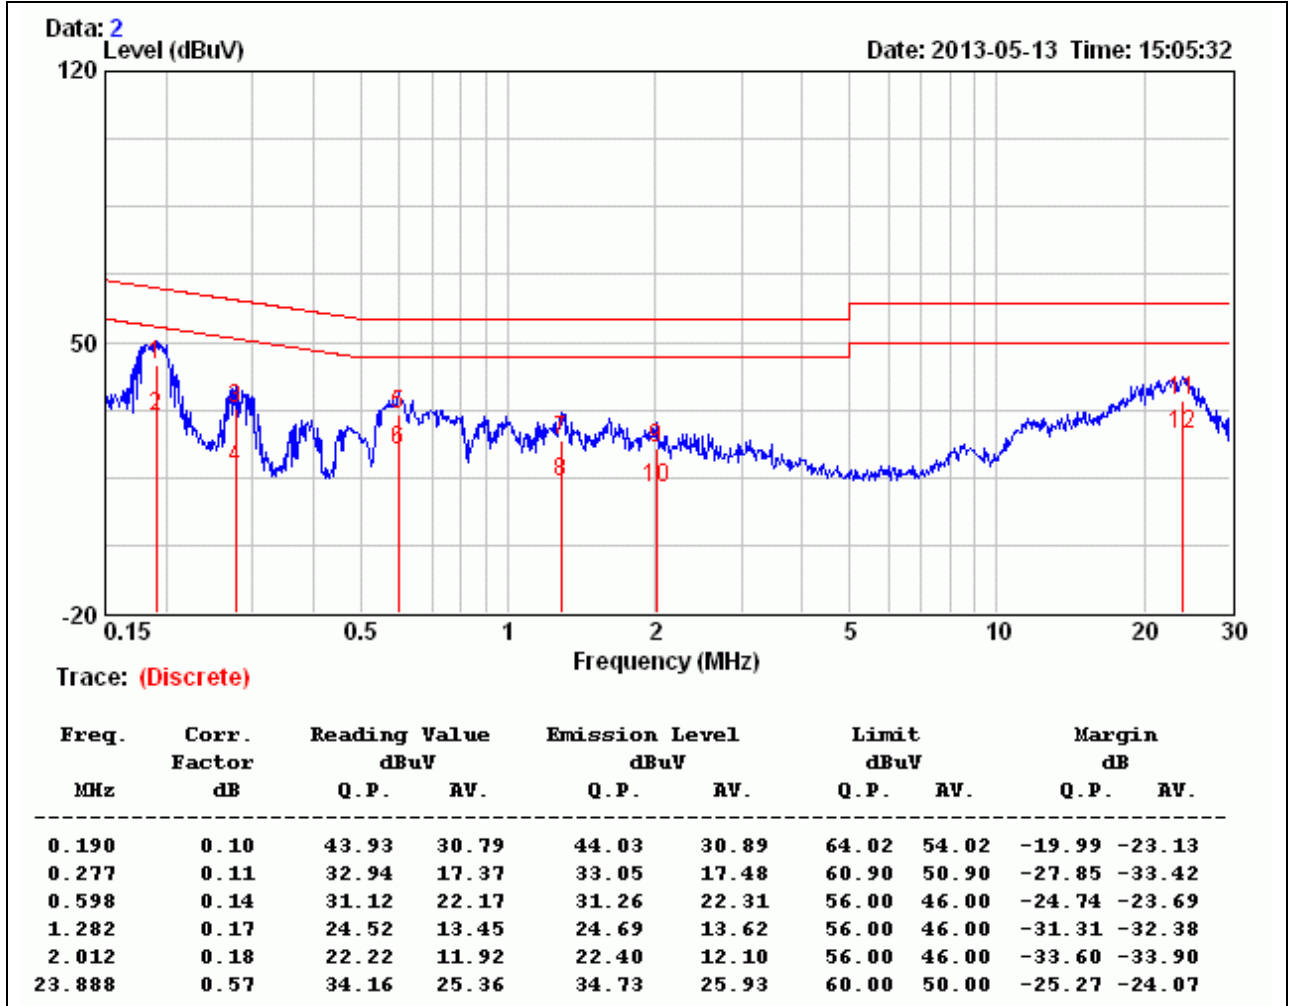


Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading value + Correction factor
3. Margin value = Emission level - Limit value



Product Name	Computer	Test By	Allen Liu
Test Model	DS-562SQ-S6A1E	Test Date	2013/05/13
Test Mode	TX Mode / Power Adapter 1	Temp. & Humidity	21°C, 61%

LINE

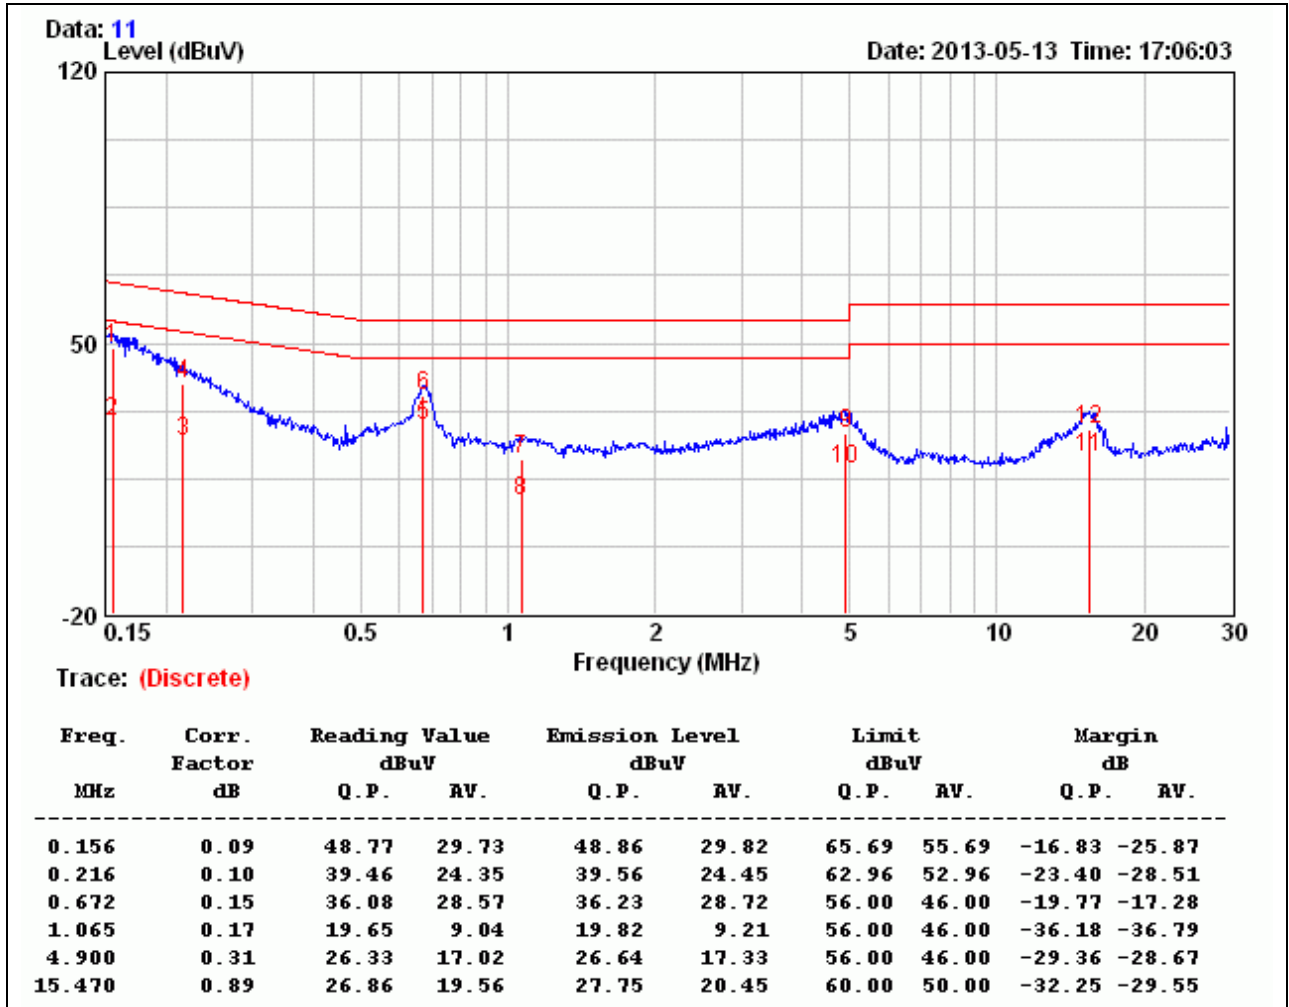


Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level - Limit value



Product Name	Computer	Test By	Allen Liu
Test Model	DS-562SQ-S6A1E	Test Date	2013/05/13
Test Mode	TX Mode / Power Adapter 1	Temp. & Humidity	21°C, 61%

NEUTRAL

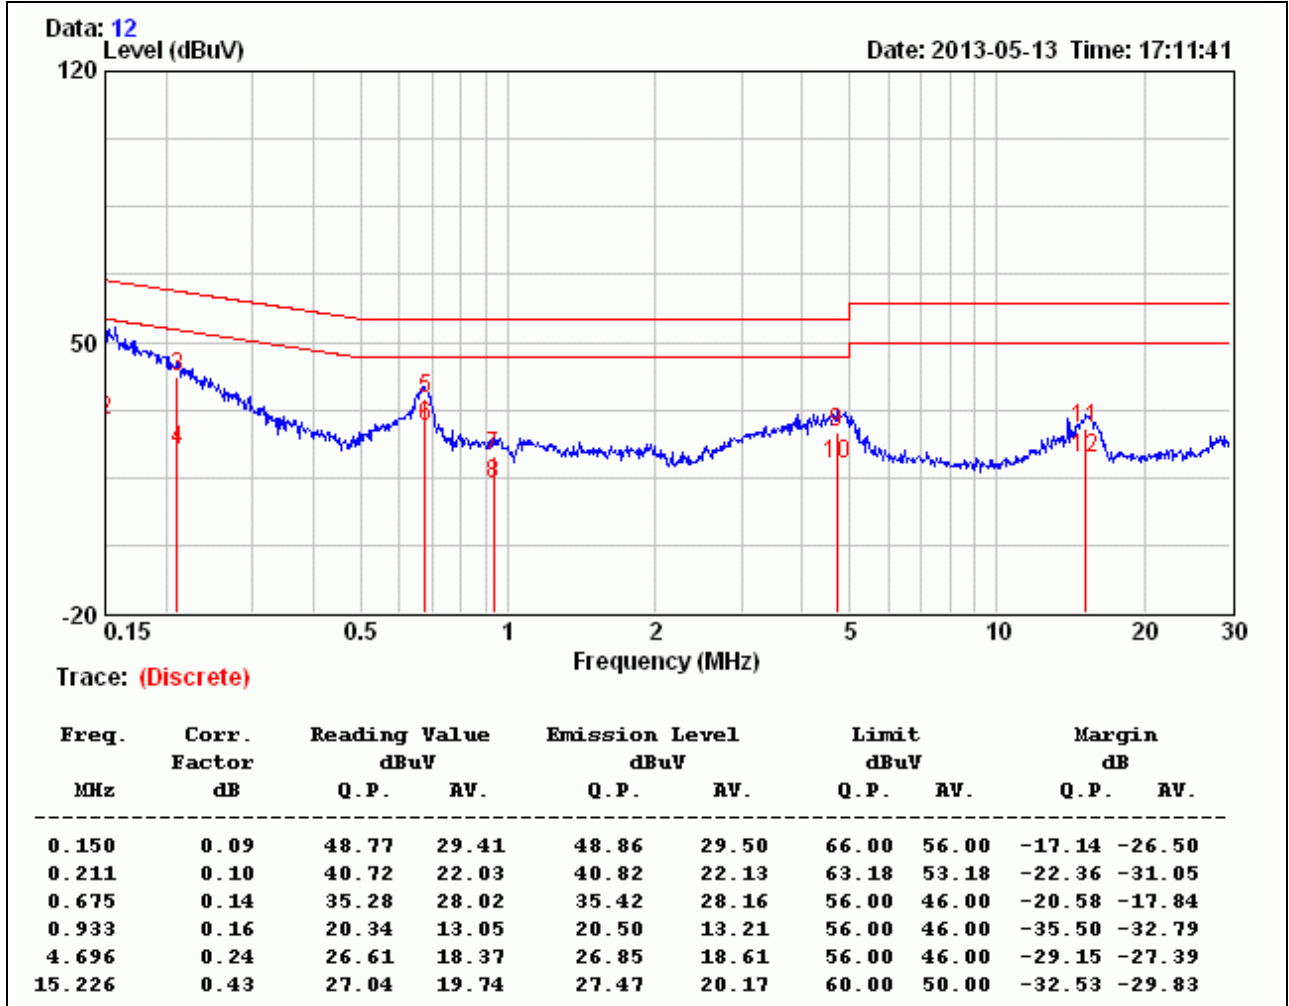


Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level - Limit value



Product Name	Computer	Test By	Allen Liu
Test Model	DS-562SQ-S6A1E	Test Date	2013/05/13
Test Mode	TX Mode / Power Adapter 2	Temp. & Humidity	21°C, 61%

LINE

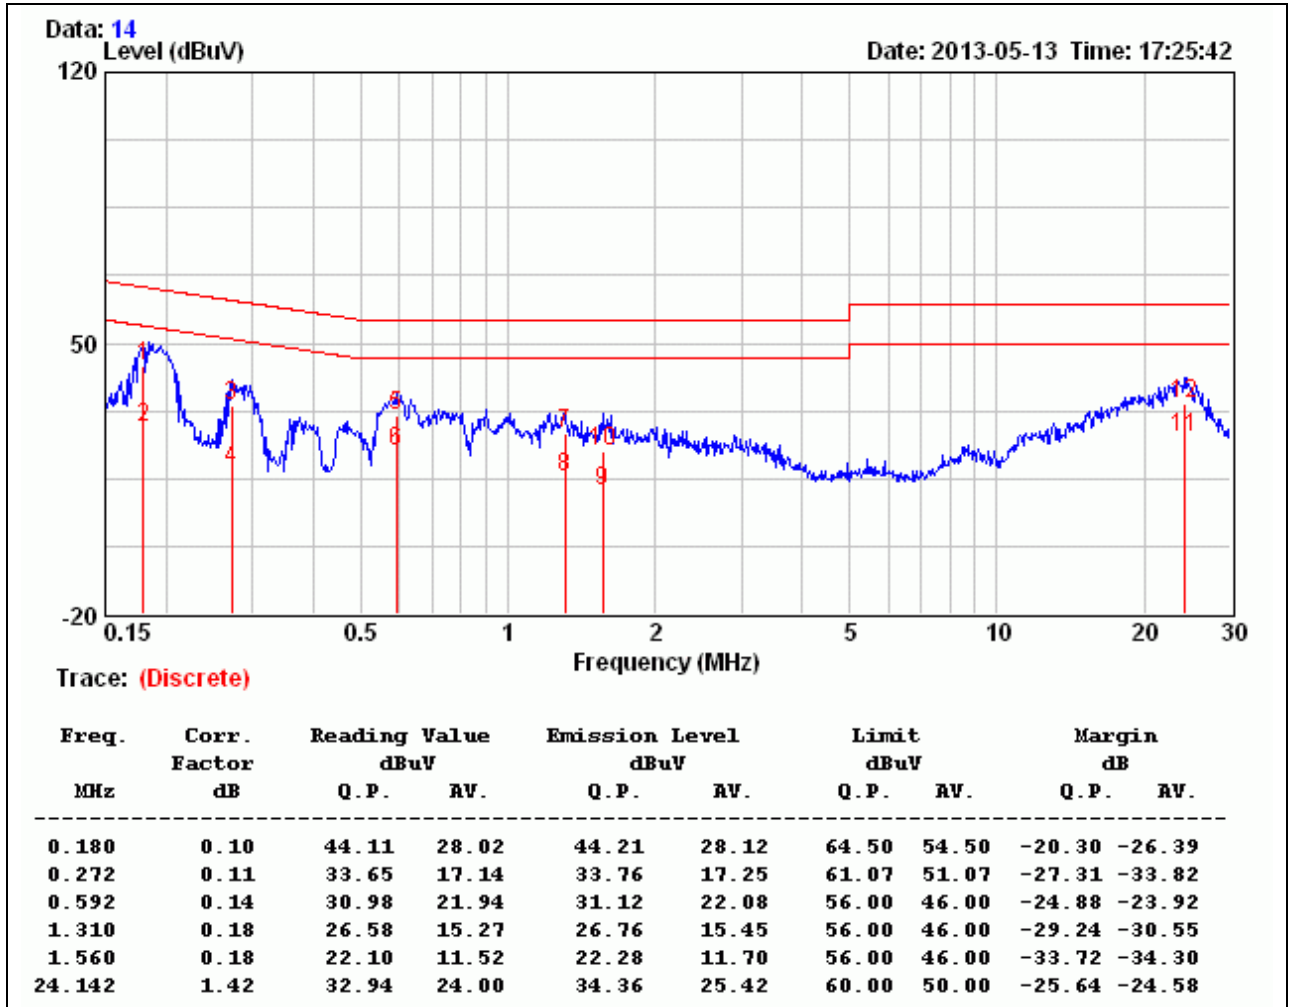


Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level - Limit value



Product Name	Computer	Test By	Allen Liu
Test Model	DS-562SQ-S6A1E	Test Date	2013/05/13
Test Mode	TX Mode / Power Adapter 2	Temp. & Humidity	21°C, 61%

NEUTRAL

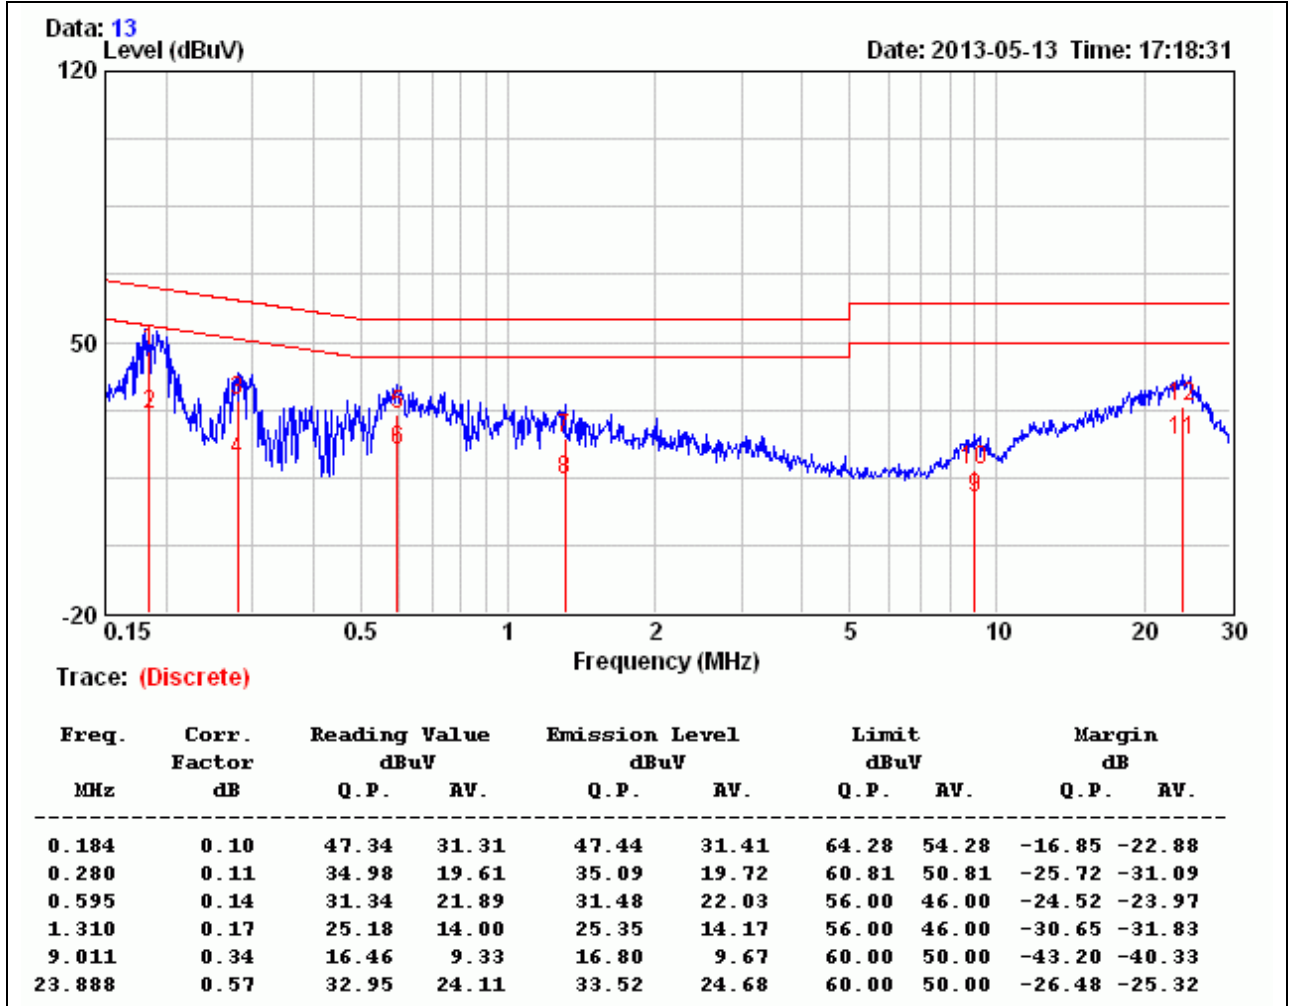

Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading value + Correction factor
3. Margin value = Emission level - Limit value