

# FCC Test Report

**Equipment** : UHF RFID  
**Brand Name** : Advantech  
**Model No.** : PWS-870 UHF RFID Extension  
**FCC ID** : M82-TPC130UHFRFID  
**Standard** : 47 CFR FCC Part 15.247  
**Operating Band** : 902 MHz – 928 MHz  
**Installed Area** : Outdoor used  
**Applicant** : Advantech Co., Ltd.  
**Manufacturer** : No.1, Alley 20, Lane 26, Rueiguang Rd.,  
Neihu District, Taipei City, Taiwan, R.O.C.

The product sample received on Aug. 05, 2015 and completely tested on Aug. 28, 2015. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

  
Vic Hsiao / Supervisor





# Table of Contents

- 1 GENERAL DESCRIPTION .....5**
- 1.1 Information.....5
- 1.2 Support Equipment.....7
- 1.3 Testing Applied Standards .....7
- 1.4 Testing Location Information .....7
- 1.5 Measurement Uncertainty .....8
- 2 TEST CONFIGURATION OF EUT.....9**
- 2.1 The Worst Case Modulation Configuration .....9
- 2.2 The Worst Case Power Setting Parameter .....9
- 2.3 The Worst Case Measurement Configuration .....10
- 2.4 Test Setup Diagram ..... 11
- 3 TRANSMITTER TEST RESULT .....13**
- 3.1 AC Power-line Conducted Emissions .....13
- 3.2 20dB Bandwidth and Carrier Frequency Separation.....16
- 3.3 Number of Hopping Frequencies .....18
- 3.4 Time of Occupancy (Dwell Time) .....20
- 3.5 RF Output Power.....22
- 3.6 Transmitter Bandedge Emissions .....24
- 3.7 Transmitter Unwanted Emissions.....27
- 4 TEST EQUIPMENT AND CALIBRATION DATA .....38**

**APPENDIX A. TEST PHOTOS**

**APPENDIX B. PHOTOGRAPHS OF EUT**



## Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 18.09MHz 42.16 (Margin 7.84dB) - AV 50.20 (Margin 9.80dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	20dB Bandwidth	104.20 kHz	≤ 250 kHz	Complied
3.2	15.247(a)	Carrier Frequency Separation (ChS)	500 kHz	ChS ≥ MAX(25kHz, BW <sub>20dB</sub> )	Complied
3.3	15.247(a)	Number of Hopping Frequencies (N)	Max:50	N ≥ 50	Complied
3.4	15.247(a)	Time of Occupancy (Dwell Time)	0.3113 s	0.4 s within 0.4 x N	Complied
3.5	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm]: 19.31	Power [dBm]: 27	Complied
3.6	15.247(c)	Transmitter Bandedge Emissions	901.480MHz 54.28 dBc	Non-Restricted Bands: > 20 dBc	Complied
3.7	15.247(c)	Transmitter Unwanted Emissions	[dBuV/m at 3m]:86.260MHz 34.44 (Margin 5.56dB) - PK	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied



## Revision History

Report No.	Version	Description	Issued Date
FR580449	Rev. 01	Initial issue of report	Sep. 11, 2015

# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

RF General Information				
Frequency Range (MHz)	Ch. Frequency (MHz)	Modulation Mode	Channel Number	RF Output Power (dBm)
902-928	902.75 - 927.25	ASK	50	19.31

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

### 1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	PCB	2.03



1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input checked="" type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/> Operated normally hopping mode for worst duty cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 100% - test mode single channel	0.00

1.1.5 EUT Operational Condition

Supply Voltage	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input checked="" type="checkbox"/> From Host System	<input type="checkbox"/> External AC adapter	<input type="checkbox"/> Li-ion Battery

## 1.2 Support Equipment

Support Equipment			
No.	Equipment	Brand Name	Model Name
1	Tablet	ADVANTECH	PWS870-4S2P
2	AC Adapter for Tablet	FSP	FSP065-REBN2

Note : The Tablet and AC Adapter for Tablet provides is by customer.

## 1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ FCC KDB 558074 D01 v03r03
- ◆ FCC Public Notice DA 00-705

## 1.4 Testing Location Information

Testing Location			
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.	
		TEL : 886-3-327-3456	FAX : 886-3-318-0055
<b>Test Site Registration Number: FCC 636805</b>			
Test Condition	Test Site No.	Test Engineer	Test Environment
AC Conduction	CO04-HY	Zeus	22 °C / 58%
RF Conducted	TH06-HY	Leo	22.5 °C / 65 %
Radiated Emission	03CH03-HY	Hunter	24.1 °C / 56.4 %

## 1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		±2.3 dB
Emission bandwidth, 6dB bandwidth		±0.6 %
RF output power, conducted		±0.1 dB
Power density, conducted		±0.6 dB
Unwanted emissions, conducted	9 – 150 kHz	±0.4 dB
	0.15 – 30 MHz	±0.4 dB
	30 – 1000 MHz	±0.6 dB
	1 – 18 GHz	±0.5 dB
	18 – 40 GHz	±0.5 dB
	40 – 200 GHz	N/A
All emissions, radiated	9 – 150 kHz	±2.5 dB
	0.15 – 30 MHz	±2.3 dB
	30 – 1000 MHz	±2.6 dB
	1 – 18 GHz	±3.6 dB
	18 – 40 GHz	±3.8 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±5 %
DC and low frequency voltages		±0.9 %
Time		±1.4 %
Duty Cycle		±0.6 %





## 2 Test Configuration of EUT

### 2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing	
Modulation Mode	RF Output Power (dBm)
ASK-Transmit	19.31




### 2.2 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter			
Test Software Version	Reader Settings MTI RFID ME		
Modulation Mode	902.75 MHz	914.75 MHz	927.25 MHz
ASK-Transmit	18	18	18


### 2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
<b>Operating Mode</b>	Operating Mode Description
1	Transmit Mode


The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	RF Output Power, 20dB Bandwidth, Carrier Frequency Separation (ChS) Number of Hopping Frequencies (N), Time of Occupancy (Dwell Time)
<b>Test Condition</b>	Conducted measurement at transmit chains
<b>Modulation Mode</b>	ASK-Transmit

The Worst Case Mode for Following Conformance Tests			
<b>Tests Item</b>	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
<b>Test Condition</b>	Radiated measurement		
<b>User Position</b>	<input type="checkbox"/> EUT will be placed in fixed position.		
	<input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes.		
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions.		
<b>Operating Mode</b>	Transmit Mode		
<b>Test Mode</b>	ASK-Transmit		
<b>Orthogonal Planes of EUT</b>	<b>X Plane</b>	<b>Y Plane</b>	<b>Z Plane</b>
			
<b>Worst Planes of EUT</b>		V	


## 2.4 Test Setup Diagram

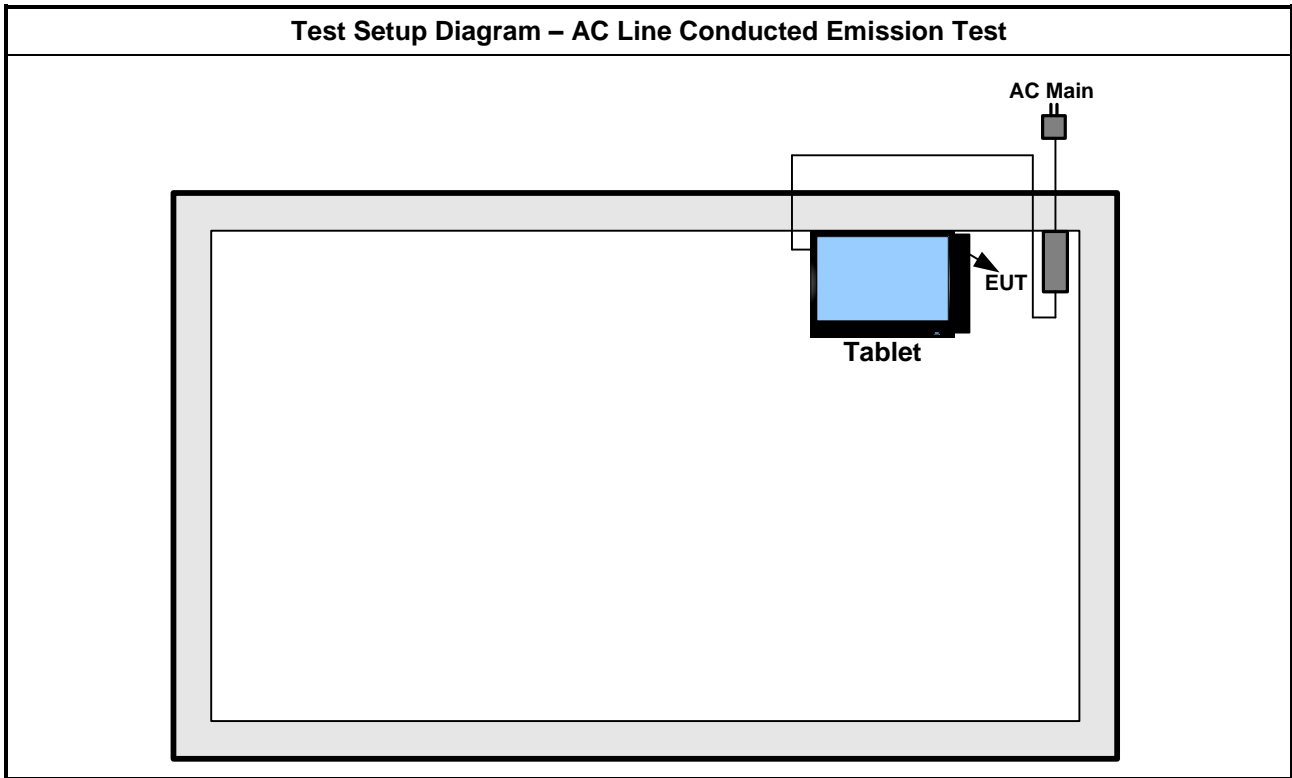

Test Setup Diagram - Radiated Test (Below 1GHz)

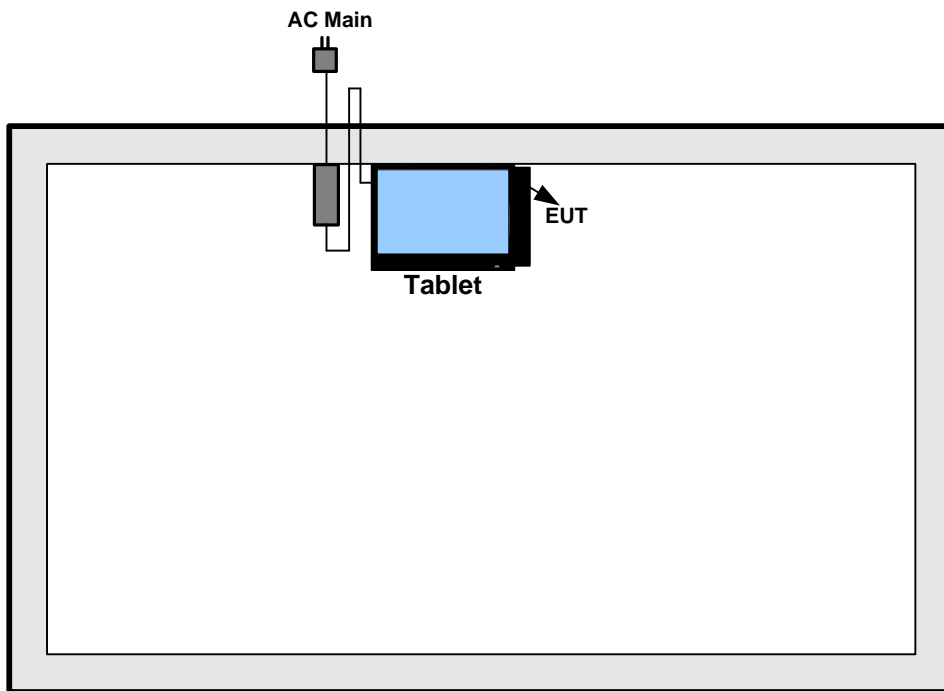

Test Setup Diagram - Radiated Test (Above 1GHz)

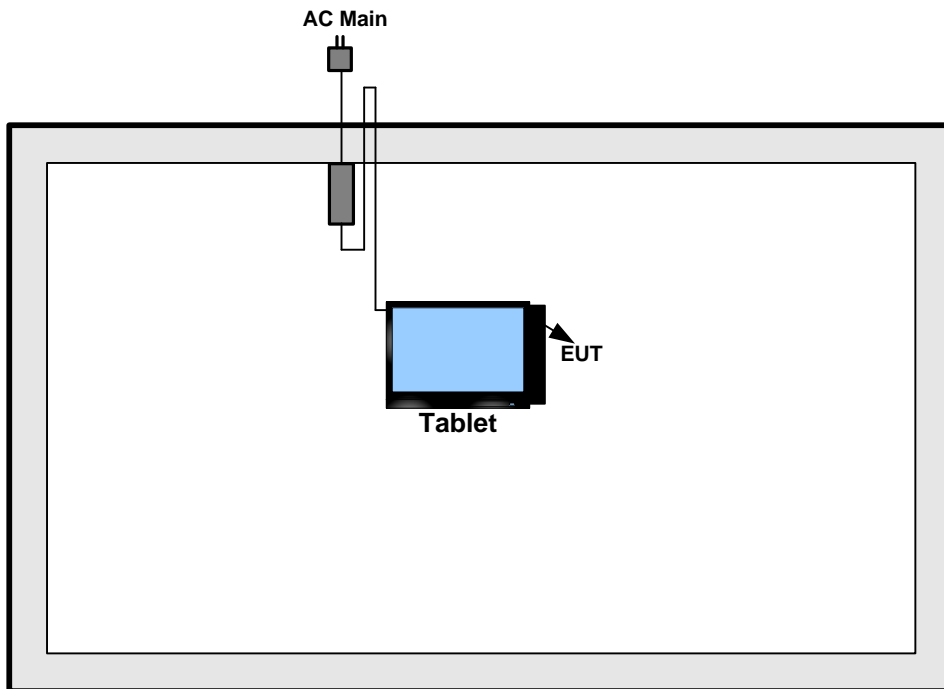

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures


Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

##### 3.1.4 Test Setup

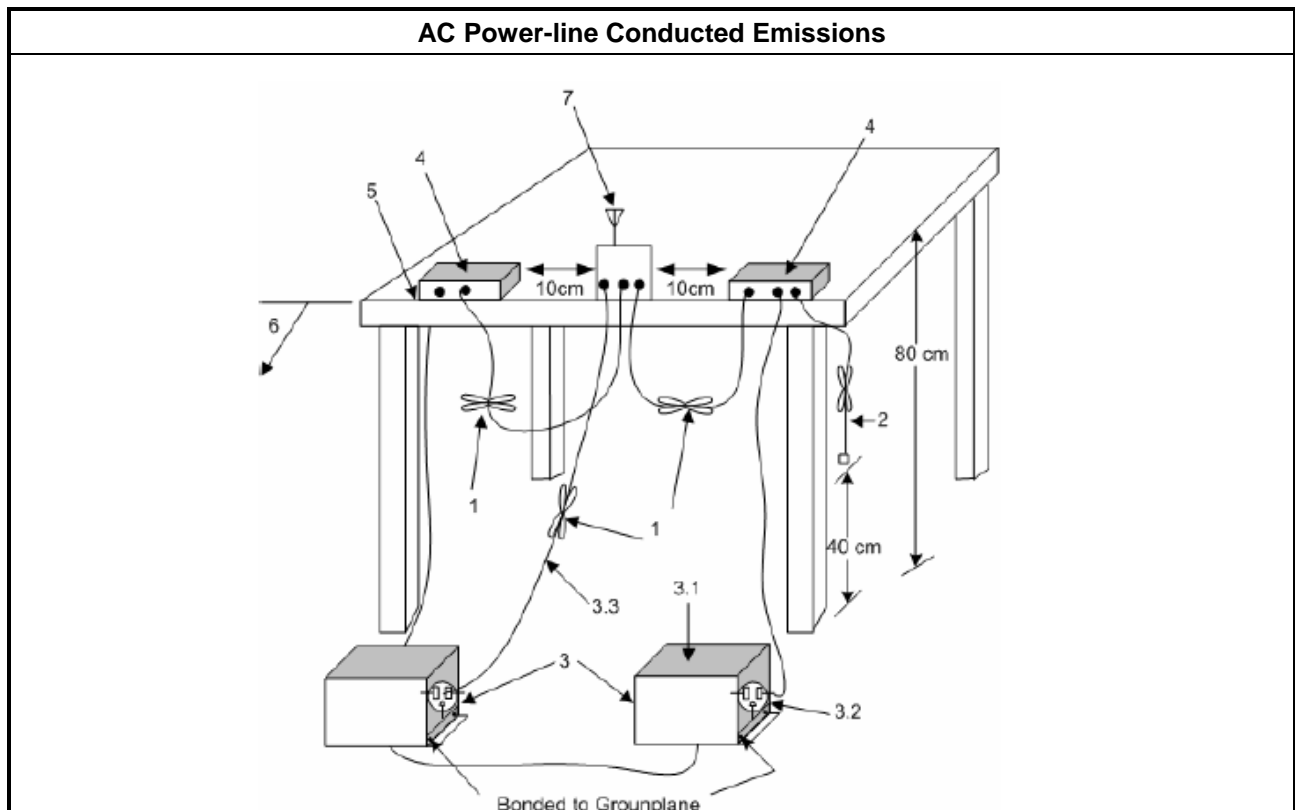




3.1.5 Test Result of AC Power-line Conducted Emissions

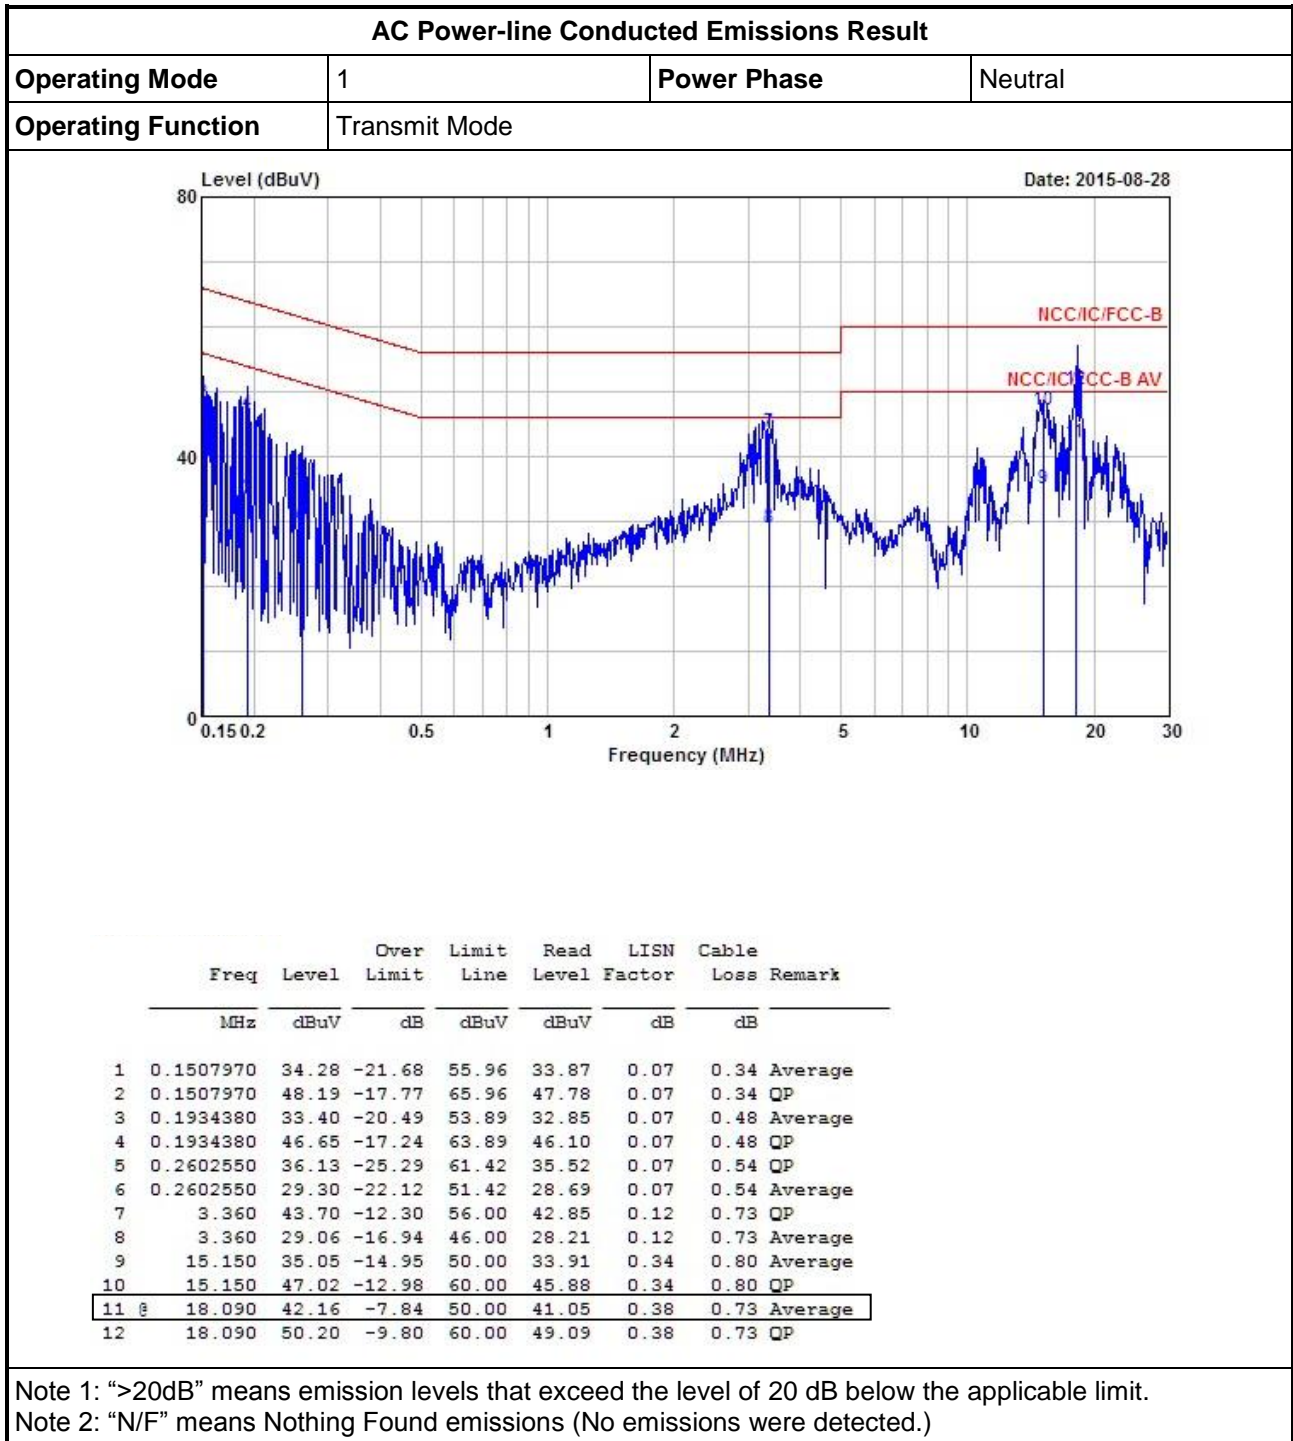



AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Transmit Mode		

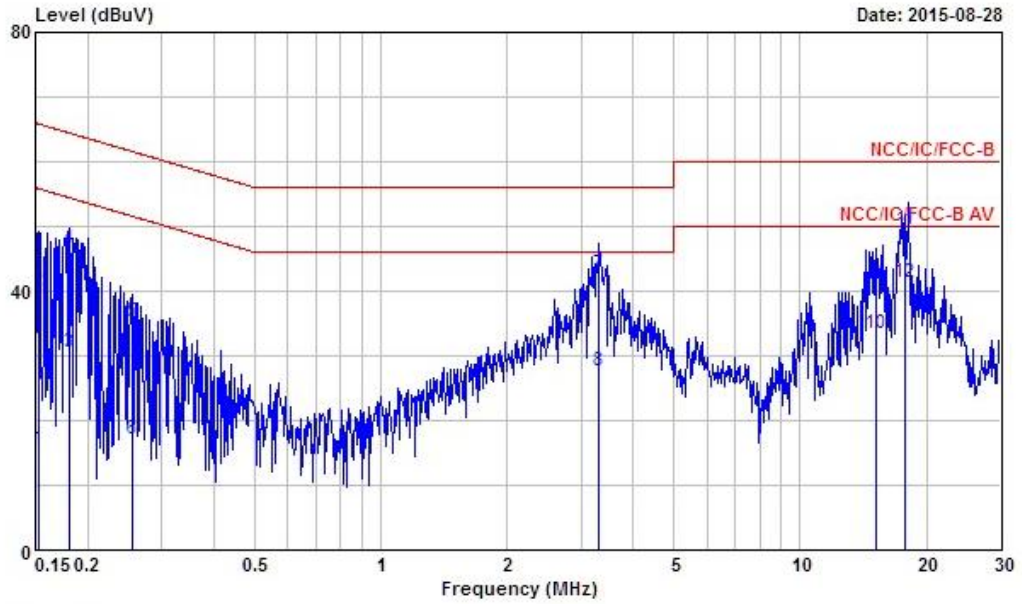

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1532130	15.47	-40.35	55.82	15.08	0.05	0.34	Average
2	0.1532130	40.05	-25.77	65.82	39.66	0.05	0.34	QP
3	0.1805620	30.46	-24.00	54.46	29.96	0.06	0.44	Average
4	0.1805620	46.64	-17.82	64.46	46.14	0.06	0.44	QP
5	0.2547970	35.14	-26.46	61.60	34.55	0.06	0.53	QP
6	0.2547970	17.04	-34.56	51.60	16.45	0.06	0.53	Average
7	3.310	42.59	-13.41	56.00	41.74	0.12	0.73	QP
8	3.310	27.57	-18.43	46.00	26.72	0.12	0.73	Average
9	15.150	41.63	-18.37	60.00	40.52	0.31	0.80	QP
10	15.150	33.50	-16.50	50.00	32.39	0.31	0.80	Average
11	17.850	49.54	-10.46	60.00	48.46	0.34	0.74	QP
12	17.850	41.40	-8.60	50.00	40.32	0.34	0.74	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

### 3.2 20dB Bandwidth and Carrier Frequency Separation

#### 3.2.1 20dB Bandwidth and Carrier Frequency Separation Limit

20dB Bandwidth and Carrier Frequency Separation Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/>	902-928 MHz Band:
<input checked="" type="checkbox"/>	ChS $\geq$ MAX (20 dB bandwidth, 25 kHz).
<input checked="" type="checkbox"/>	20 dB bandwidth $\leq$ 250 kHz
<b>N:</b> Number of Hopping Frequencies; <b>ChS:</b> Hopping Channel Separation	


#### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.2.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2 for 20 dB bandwidth measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.8.2 for carrier frequency separation measurement.
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.



#### 3.2.4 Test Setup

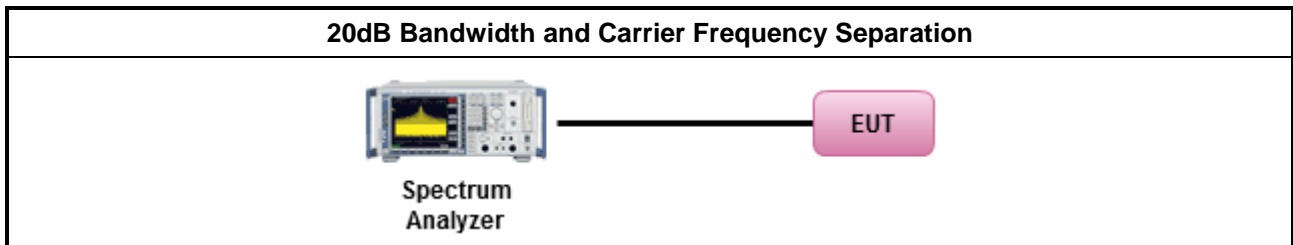



### 3.2.5 Test Result of 20dB Bandwidth and Carrier Frequency Separation

20dB Bandwidth and Carrier Frequency Separation Result					
Modulation Mode	Freq. (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)	Channel Spacing (kHz)	20dB Bandwidth Limits (kHz)
ASK-Transmit	902.75	104.20	98.40	500	250
ASK-Transmit	914.75	101.30	96.96	500	250
ASK-Transmit	927.25	94.10	101.30	500	250
<b>Result</b>		<b>Complied</b>			

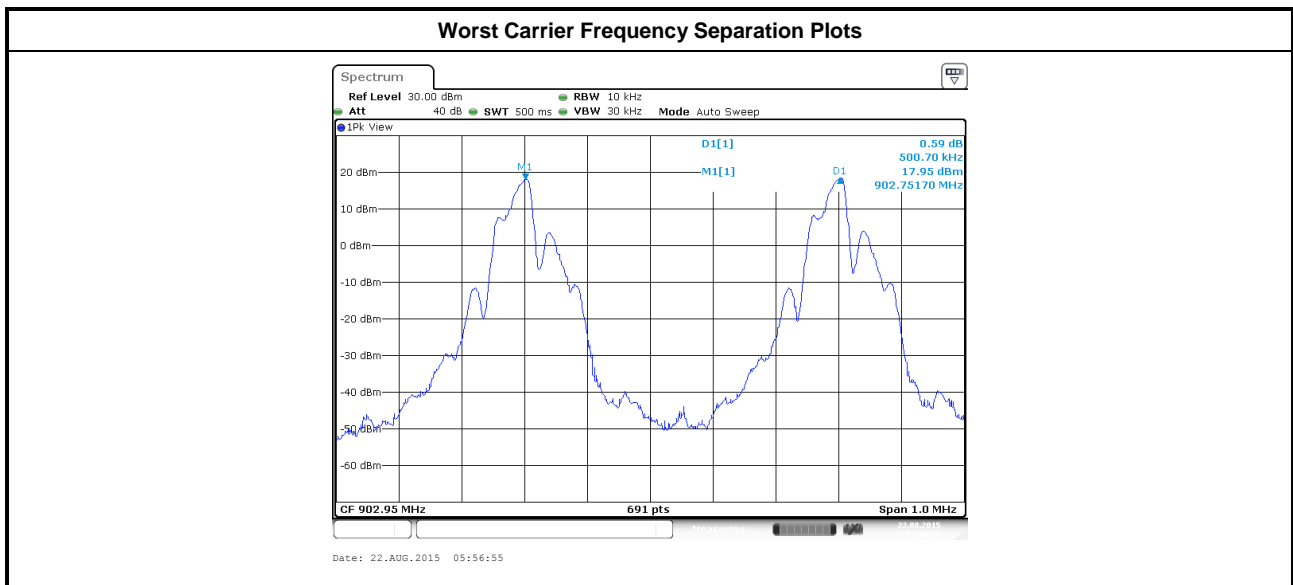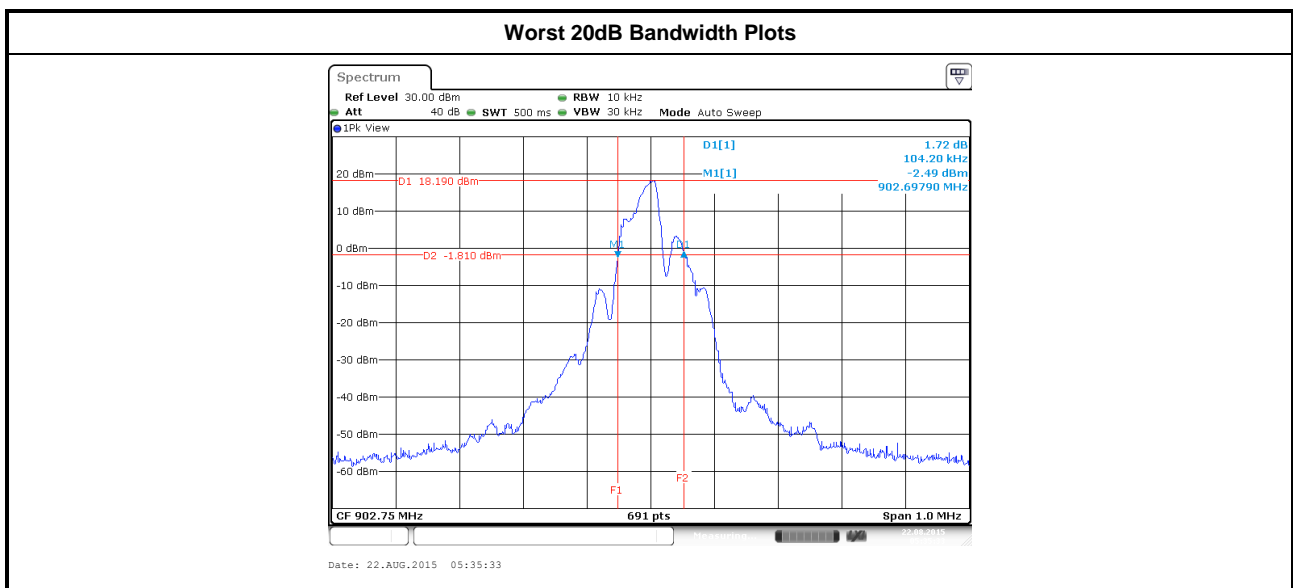

### 3.3 Number of Hopping Frequencies

#### 3.3.1 Number of Hopping Frequencies Limit

Number of Hopping Frequencies Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/>	902-928 MHz Band:
<input checked="" type="checkbox"/>	If 20 dB bandwidth $\leq$ 250 kHz, then $N \geq 50$ .
<input type="checkbox"/>	If 250 kHz < 20 dB bandwidth $\leq$ 500 kHz, then $N \geq 25$
<b>N:</b> Number of Hopping Frequencies; <b>ChS:</b> Hopping Channel Separation	


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.8.3 for number of hopping frequencies measurement.
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.


#### 3.3.4 Test Setup

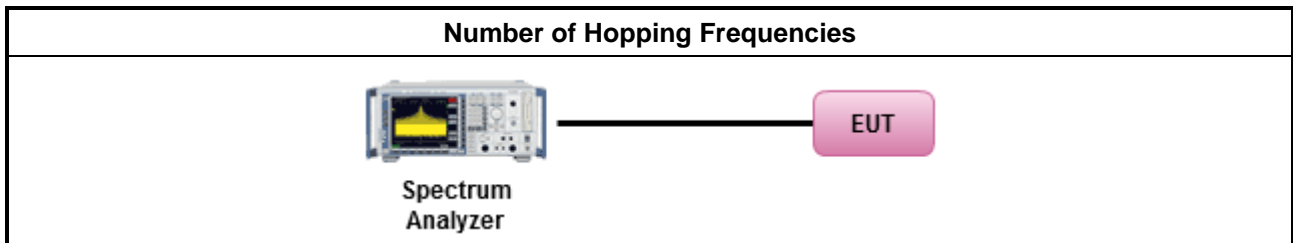



### 3.3.5 Test Result of Number of Hopping Frequencies

Number of Hopping Frequencies Result			
Modulation Mode	Freq. (MHz)	Hopping Channel Number (N)	Hopping Channel Number Limits
ASK-Transmit	902.5 ~ 927.5	50	50
<b>Result</b>	<b>Complied</b>		

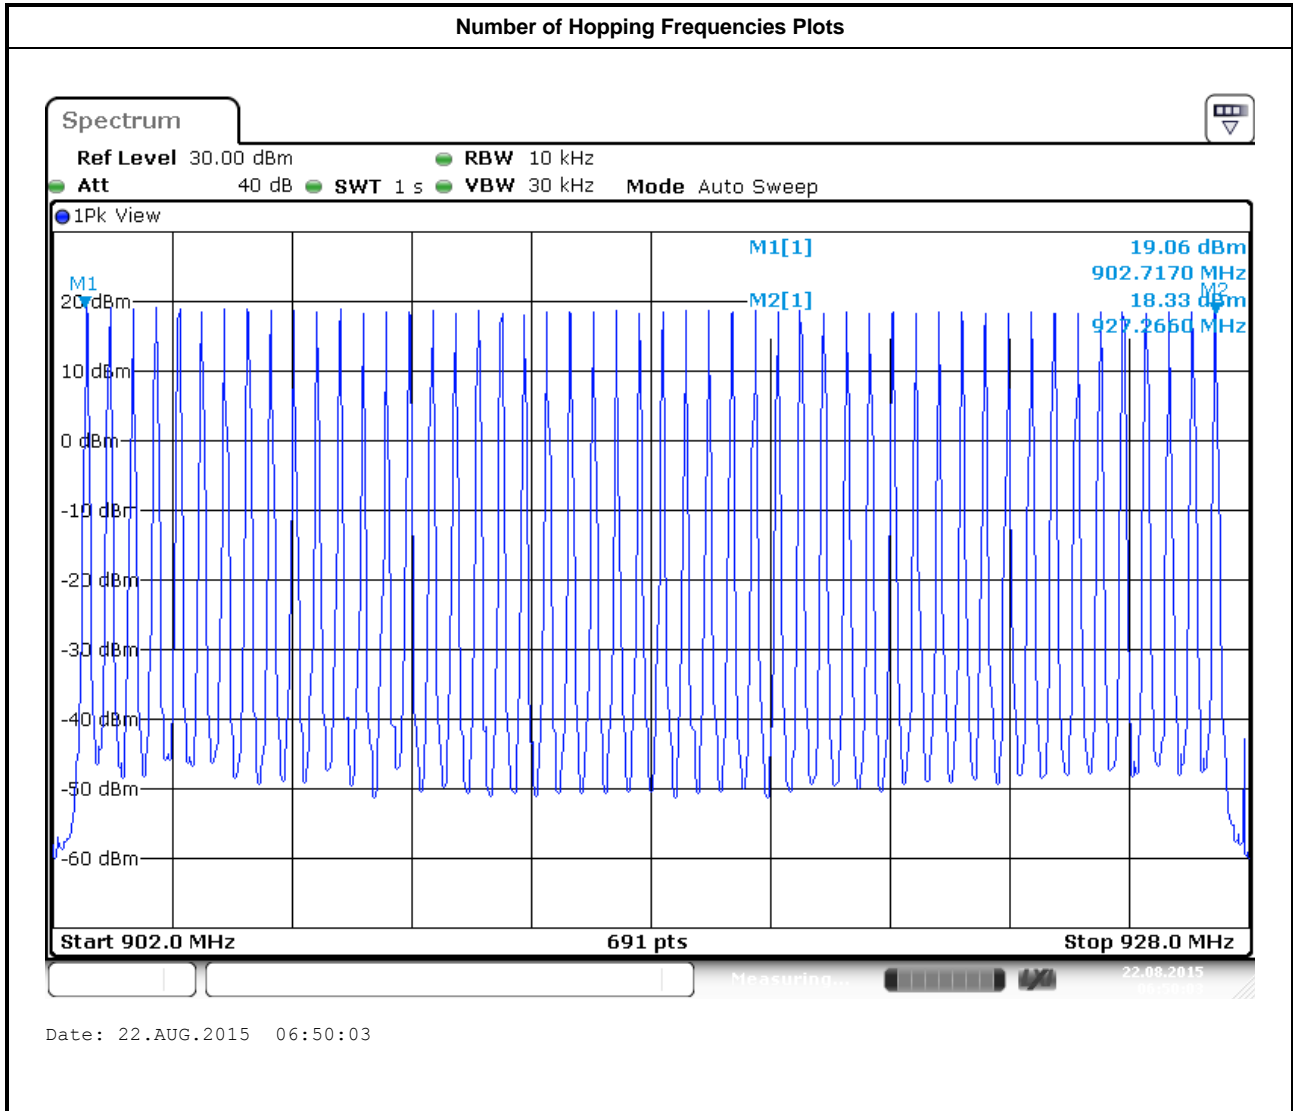

### 3.4 Time of Occupancy (Dwell Time)

#### 3.4.1 Time of Occupancy (Dwell Time) Limit

Time of Occupancy (Dwell Time) Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/>	902-928 MHz Band: Dwell time $\leq 0.4$ second within $0.4 \times N$
N: Number of Hopping Frequencies	


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.8.4 for dwell time measurement.
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

#### 3.4.4 Test Setup

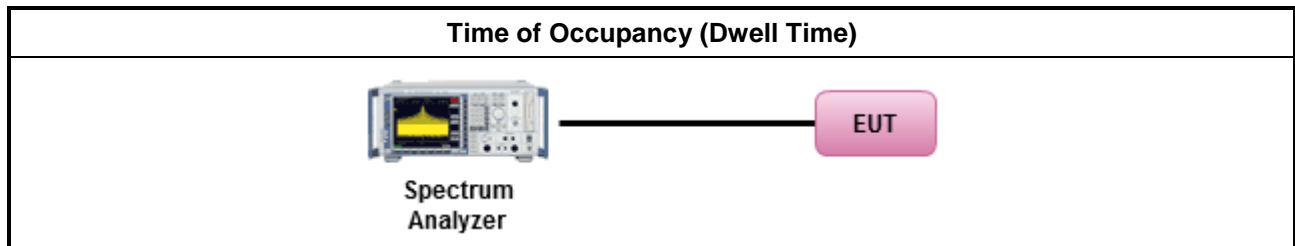

3.4.5 Test Result of Time of Occupancy (Dwell Time)

Time of Occupancy (Dwell Time) Result					
Modulation Mode	Freq. (MHz)	Pulse Duration (ms)	Number of Pulses	Dwell Time in (s)	Dwell Time Limits (s)
ASK-Transmit	902.75	0.6250	493	0.3081	0.4000
ASK-Transmit	914.75	0.6250	498	0.3113	0.4000
ASK-Transmit	927.25	0.6250	495	0.3094	0.4000
<b>Result</b>		<b>Complied</b>			

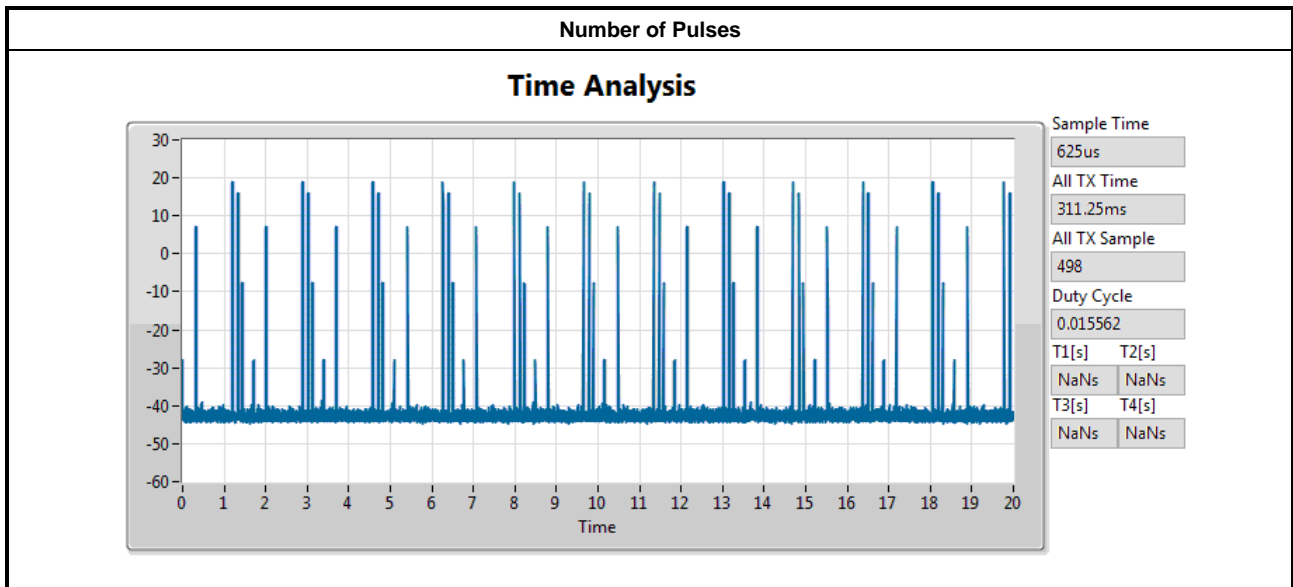

### 3.5 RF Output Power

#### 3.5.1 RF Output Power Limit

RF Output Power Limit for Frequency Hopping Systems	
<b>Maximum Peak Conducted Output Power Limit</b>	
<input checked="" type="checkbox"/> 902-928 MHz Band:	
<input checked="" type="checkbox"/>	For devices installed outdoor: 0.5W (27dBm)
<input checked="" type="checkbox"/>	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 27$ dBm (0.5 W)
<input type="checkbox"/>	If $G_{TX} > 6$ dBi, then $P_{Out} = 27 - (G_{TX} - 6)$ dBm
<input type="checkbox"/>	For devices installed indoor or "specific area": 1W (30dBm)
<input type="checkbox"/>	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
<input type="checkbox"/>	If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
<b>e.i.r.p. Power Limit:</b> $P_{eirp} \leq 36$ dBm (4 W)	
$G_{TX}$ = the maximum transmitting antenna directional gain in dBi. $P_{eirp}$ = e.i.r.p. Power in dBm. "specific area" is specified to particular, closed and restricted fields with management (for both indoor and outdoor).	


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/> Maximum Peak Conducted Output Power	
<input type="checkbox"/>	Refer as FCC DA 00-0705, spectrum analyzer for peak power.
<input checked="" type="checkbox"/>	Refer as FCC DA 00-0705, peak power meter for peak power.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 11.9.1.3) for peak power meter.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 11.9.1.1) for spectrum analyzer - (RBW $\geq$ EBW).
<input checked="" type="checkbox"/> For conducted measurement.	
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

### 3.5.4 Test Setup

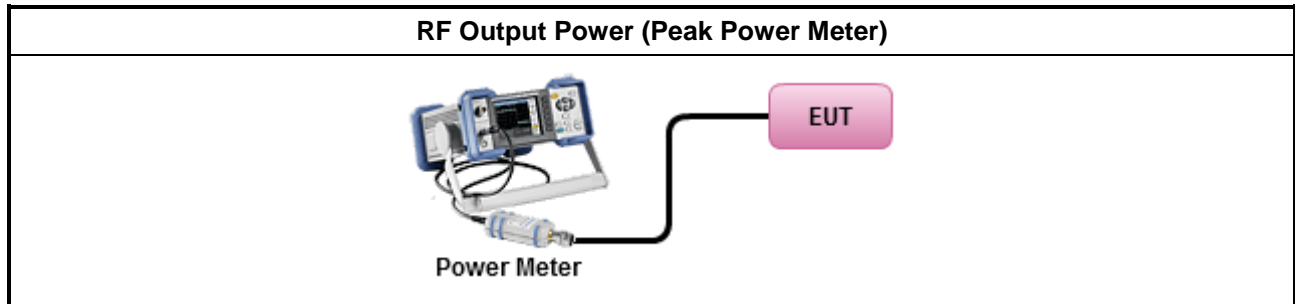

### 3.5.5 Test Result of Maximum Peak Conducted Output Power


Maximum Peak Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
ASK-Transmit	902.75	19.31	27	2.03	21.34	30
ASK-Transmit	914.75	19.12	27	2.03	21.15	30
ASK-Transmit	927.25	18.85	27	2.03	20.88	30
<b>Result</b>		<b>Complied</b>				

### 3.5.6 Test Result of Maximum Conducted Output Power

Maximum Peak Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
ASK-Transmit	902.75	17.84	27	2.03	19.87	30
ASK-Transmit	914.75	17.56	27	2.03	19.59	30
ASK-Transmit	927.25	17.25	27	2.03	19.28	30
<b>Result</b>		<b>Complied</b>				

### 3.6 Transmitter Bandedge Emissions

#### 3.6.1 Transmitter Radiated Bandedge Emissions Limit

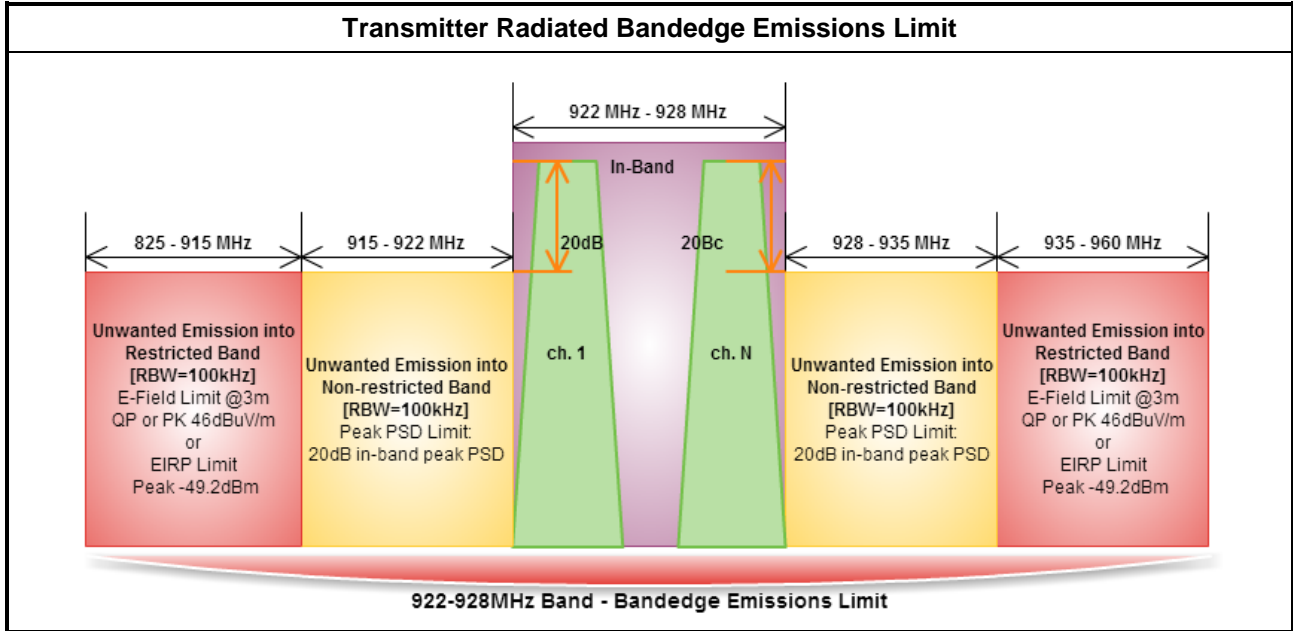

#### 3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



### 3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq 98$ or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.10 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq 98\%$ )
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW $\geq 1/T$ ).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW). VBW $\geq 1/T$ , where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 13.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.10 for band-edge testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.10.6.2 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 12.2.7 and ANSI C63.10, clause 6.6. Test distance is 3m.

### 3.6.4 Test Setup

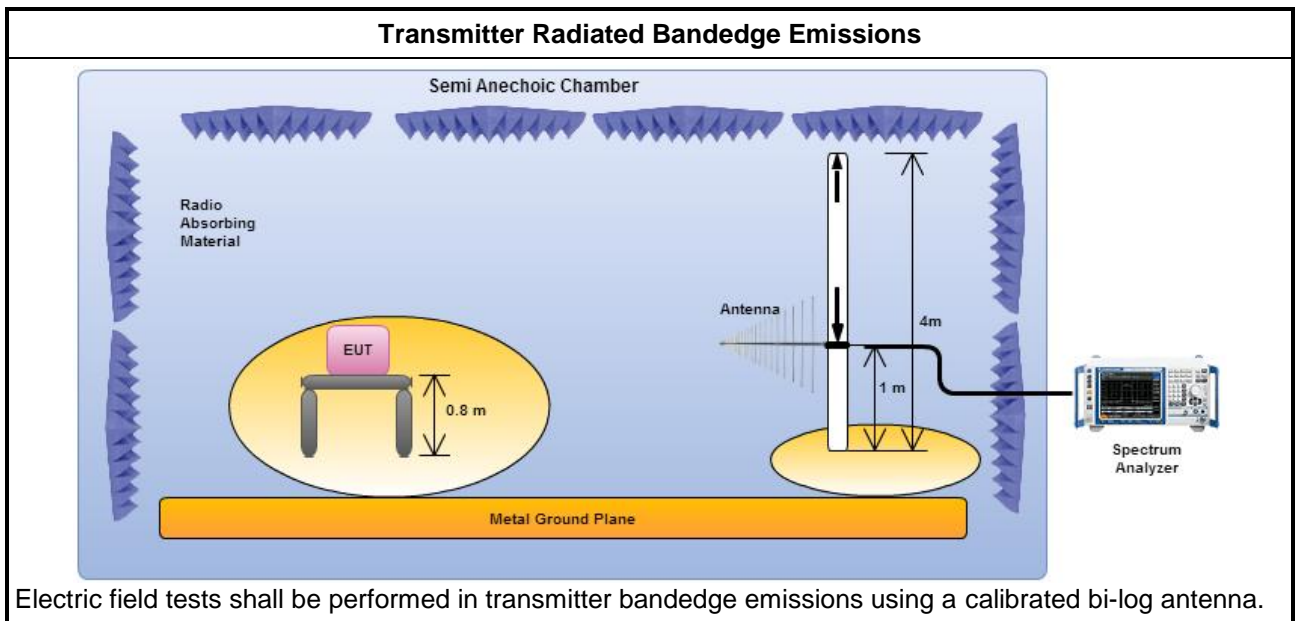



### 3.6.5 Transmitter Radiated Bandedge Emissions

902-928MHz Transmitter Radiated Bandedge Emissions (Non-restricted Band)							
Modulation	Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.
ASK-Transmit	902.75	119.50	901.988	64.37	55.13	20	H
ASK-Transmit	914.75	119.23	901.480	64.95	54.28	20	H
ASK-Transmit	927.25	119.44	929.028	64.54	54.90	20	H

Note : Measurement worst emissions of receive antenna polarization

### 3.7 Transmitter Unwanted Emissions

#### 3.7.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.



#### 3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.7.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12 for unwanted emissions into restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.1 Option 1 (trace averaging for duty cycle $\geq$ 98%)
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.5.3 Option 3 (Reduced VBW $\geq$ 1/T).
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 11.3 and 12.2.4 measurement procedure peak limit.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 12.2.3 measurement procedure Quasi-Peak limit.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 12.2.7.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


### 3.7.4 Test Setup

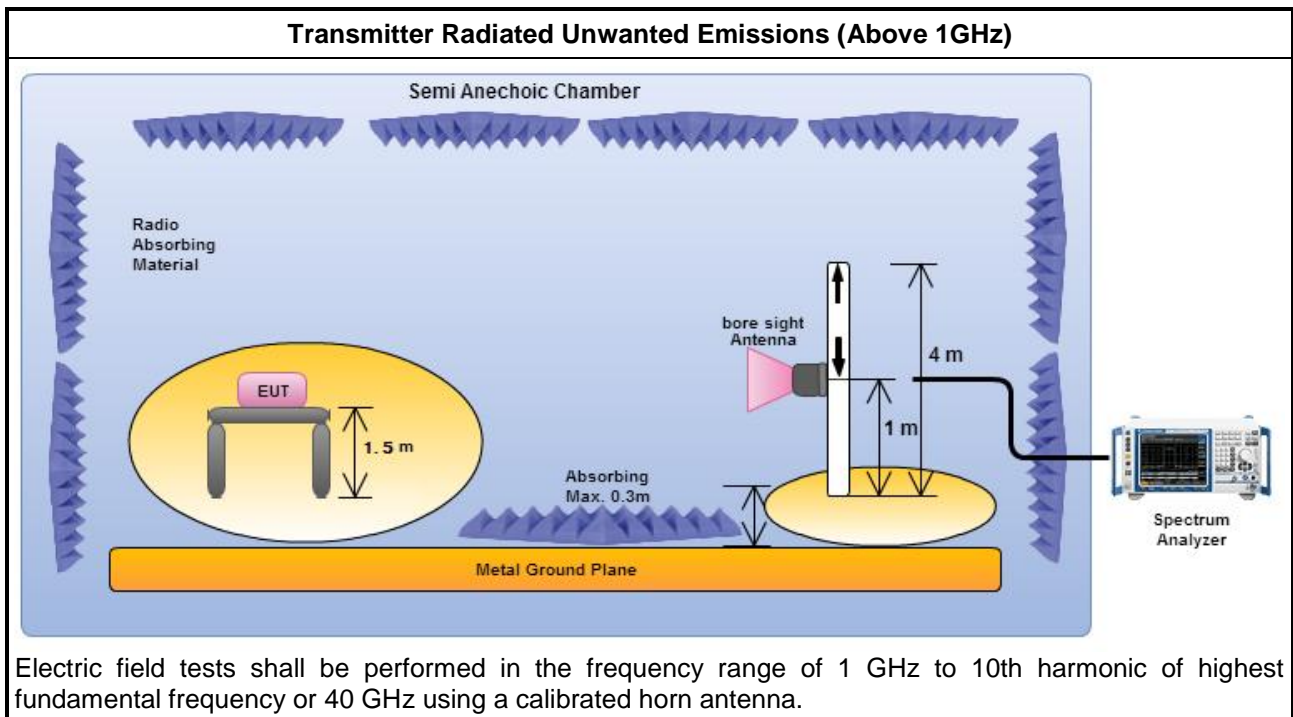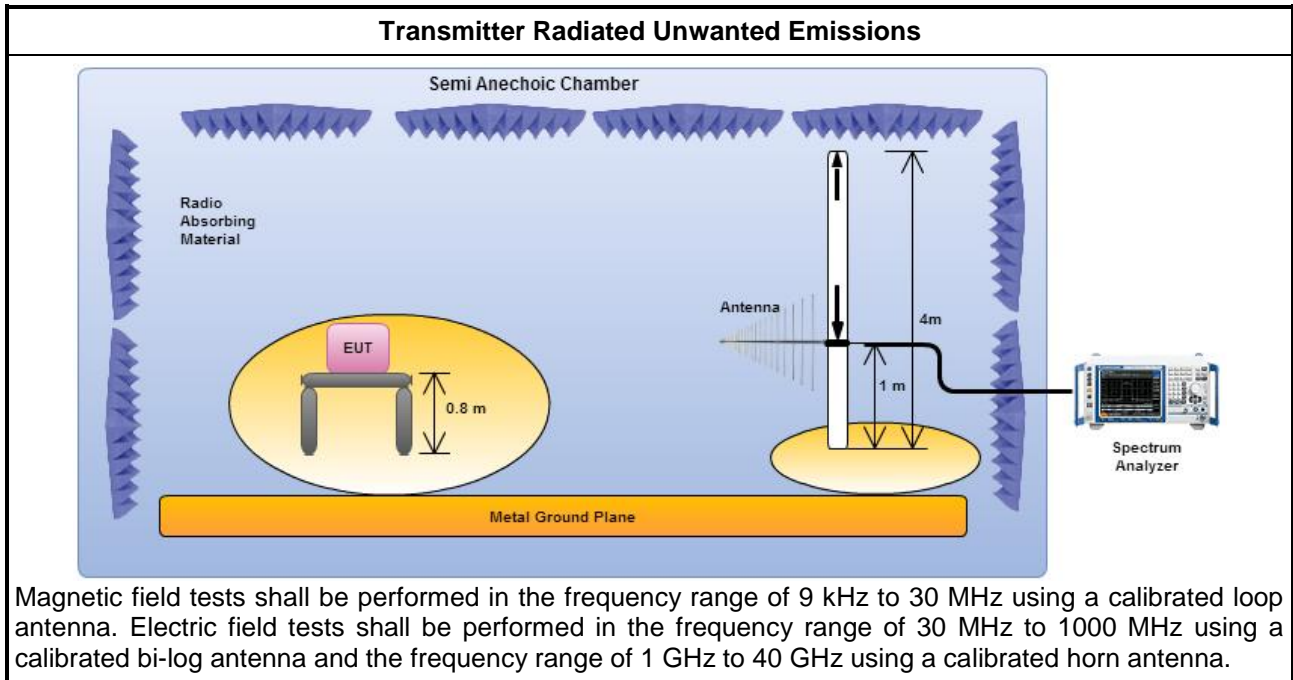

### 3.7.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


3.7.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

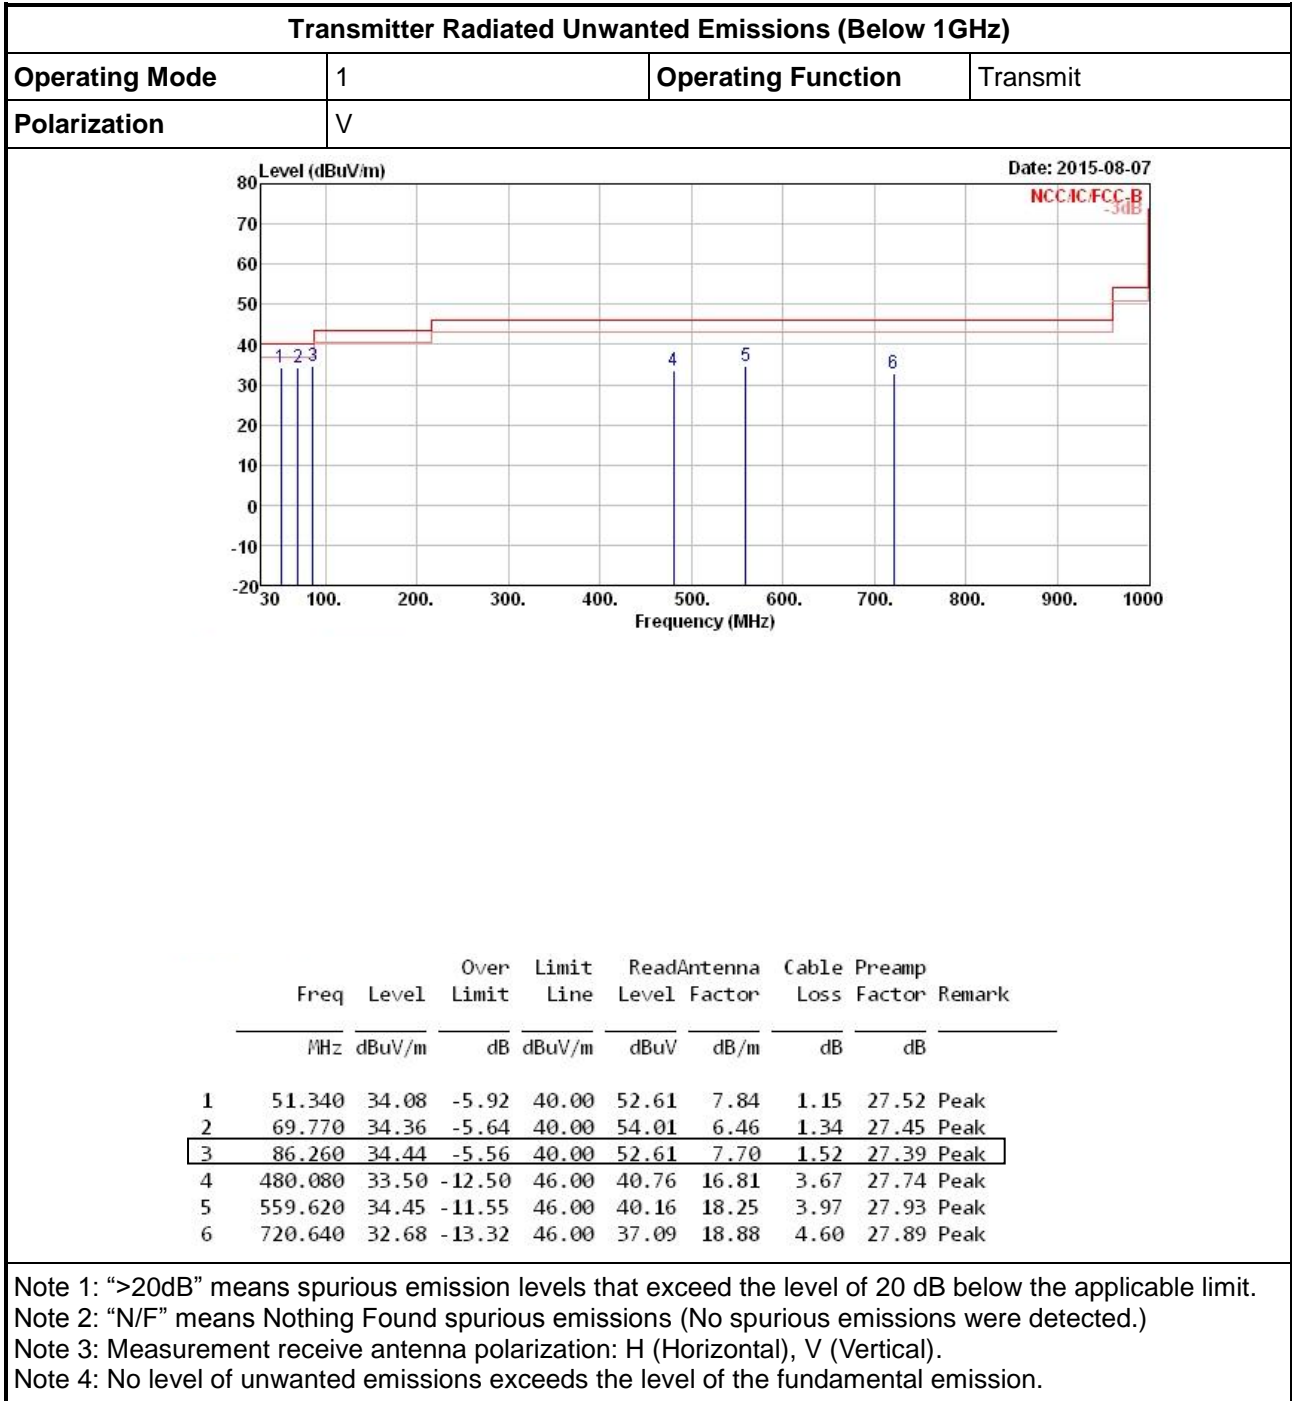



Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Operating Function	Transmit
Polarization	H		

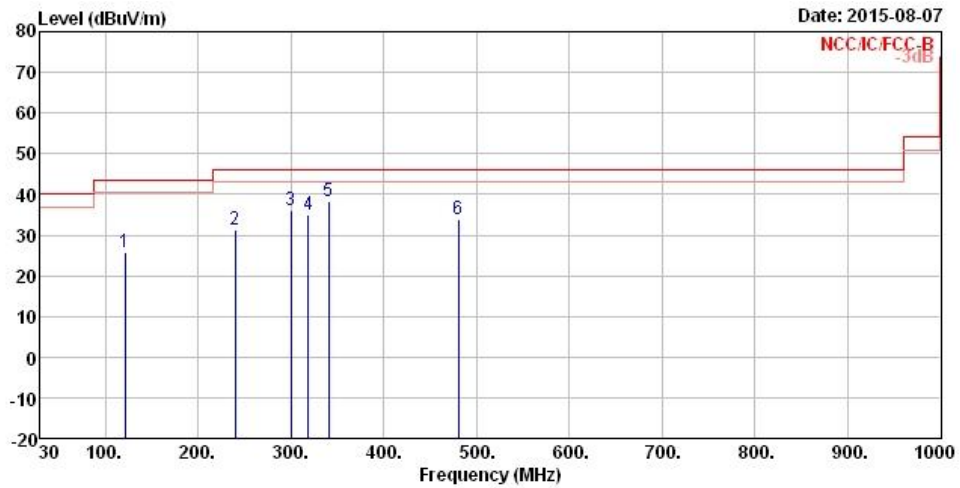


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	121.180	25.68	-17.82	43.50	38.90	12.24	1.80	27.26	Peak
2	239.520	31.12	-14.88	46.00	44.27	11.14	2.55	26.84	Peak
3	299.660	36.19	-9.81	46.00	47.08	12.87	2.90	26.66	Peak
4	319.060	34.92	-11.08	46.00	45.45	13.27	2.98	26.78	Peak
5	340.400	38.45	-7.55	46.00	48.76	13.54	3.08	26.93	Peak
6	480.080	33.99	-12.01	46.00	41.25	16.81	3.67	27.74	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).  
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.



3.7.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	ASK-Transmit	Test Freq. (FX)	902.75 MHz
Operating Function	Transmit	Polarization	V

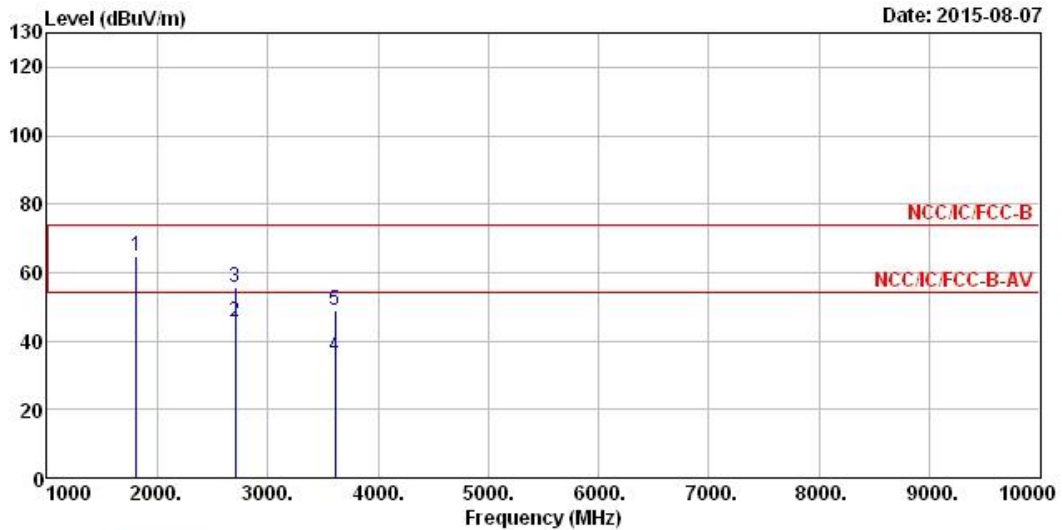

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	1805.500	64.69			67.06	26.64	3.69	32.70 Peak
2	2708.250	45.50	-8.50	54.00	43.97	29.18	4.88	32.53 Average
3	2708.250	55.44	-18.56	74.00	53.91	29.18	4.88	32.53 Peak
4	3611.000	35.57	-18.43	54.00	30.16	31.49	6.45	32.53 Average
5	3611.000	49.15	-24.85	74.00	43.74	31.49	6.45	32.53 Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).  
 Note 5: No level of unwanted emissions exceeds the level of the fundamental emission. (119.50 dBuV/m).





Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	ASK-Transmit	Test Freq. (FX)	902.75 MHz
Operating Function	Transmit	Polarization	H

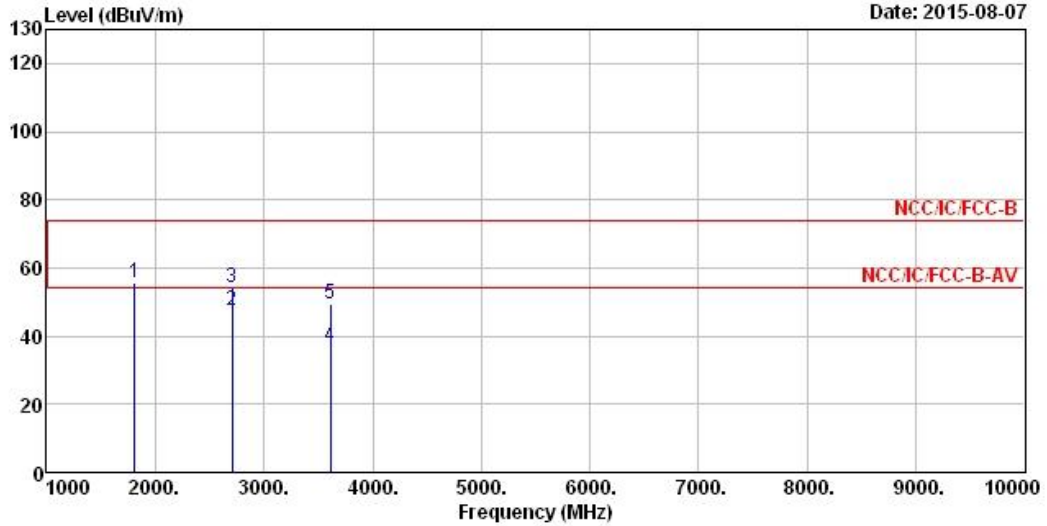


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	1805.500	55.60			57.97	26.64	3.69	32.70 Peak
2	2708.250	47.31	-6.69	54.00	45.78	29.18	4.88	32.53 Average
3	2708.250	54.09	-19.91	74.00	52.56	29.18	4.88	32.53 Peak
4	3611.000	37.13	-16.87	54.00	31.72	31.49	6.45	32.53 Average
5	3611.000	49.62	-24.38	74.00	44.21	31.49	6.45	32.53 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.  
 Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).  
 Note 5: No level of unwanted emissions exceeds the level of the fundamental emission. (119.50 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	ASK-Transmit	Test Freq. (FX)	914.75 MHz
Operating Function	Transmit	Polarization	V

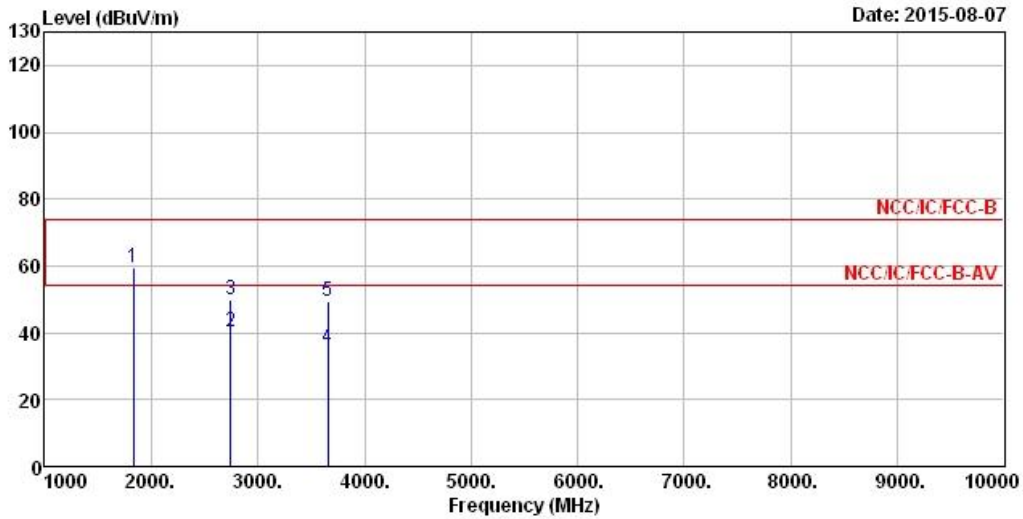


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	1829.500	59.52			61.72	26.80	3.69	32.69 Peak
2	2744.250	40.32	-13.68	54.00	38.56	29.35	4.93	32.52 Average
3	2744.250	49.79	-24.21	74.00	48.03	29.35	4.93	32.52 Peak
4	3659.000	35.31	-18.69	54.00	29.77	31.60	6.47	32.53 Average
5	3659.000	49.20	-24.80	74.00	43.66	31.60	6.47	32.53 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).
- Note 5: No level of unwanted emissions exceeds the level of the fundamental emission. (119.23 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	ASK-Transmit	Test Freq. (FX)	914.75 MHz
Operating Function	Transmit	Polarization	H

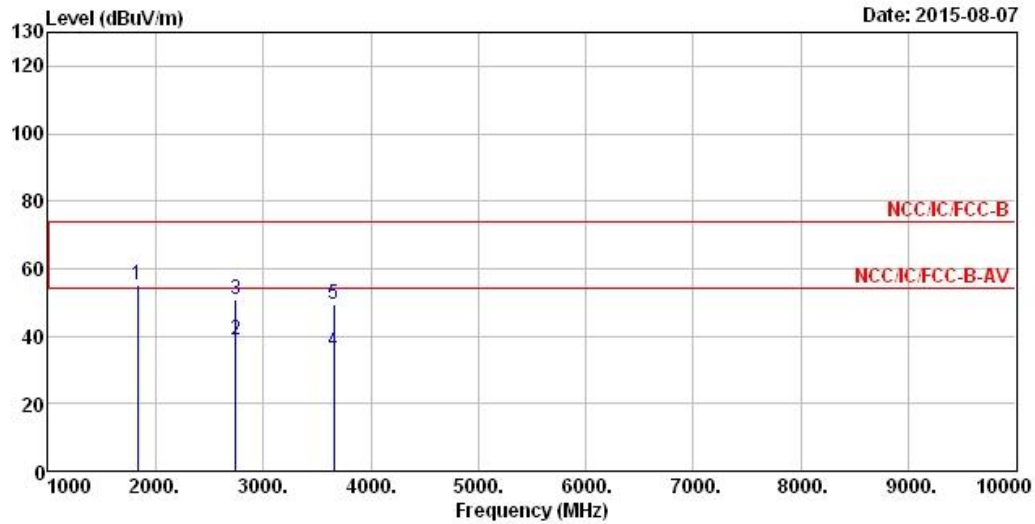


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	1829.500	55.02			57.22	26.80	3.69	32.69	Peak
2	2744.250	38.97	-15.03	54.00	37.21	29.35	4.93	32.52	Average
3	2744.250	50.73	-23.27	74.00	48.97	29.35	4.93	32.52	Peak
4	3659.000	35.66	-18.34	54.00	30.12	31.60	6.47	32.53	Average
5	3659.000	49.50	-24.50	74.00	43.96	31.60	6.47	32.53	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).
- Note 5: No level of unwanted emissions exceeds the level of the fundamental emission. (119.23 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	ASK-Transmit	Test Freq. (FX)	927.25 MHz
Operating Function	Transmit	Polarization	V

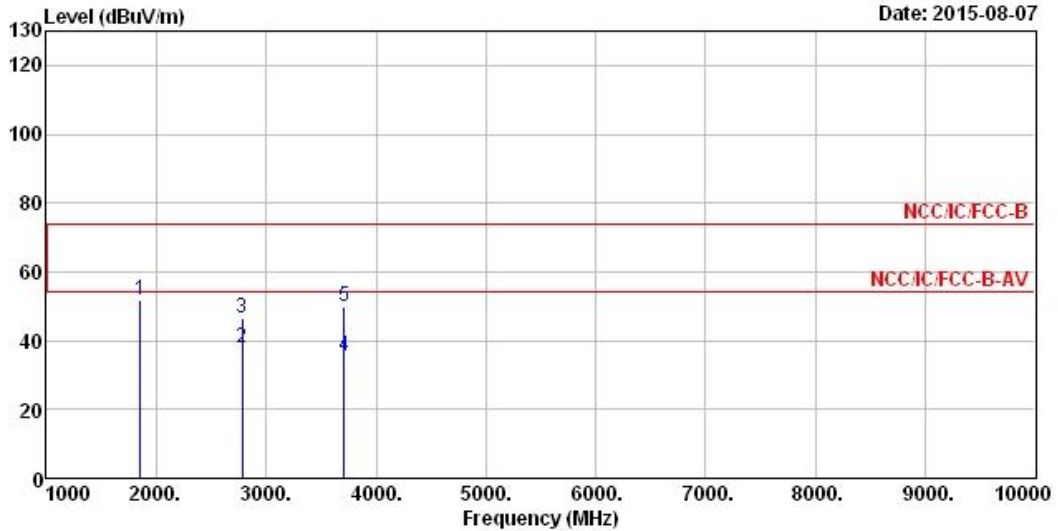


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	1854.500	51.66			53.71	26.88	3.74	32.67	Peak
2	2781.750	37.67	-16.33	54.00	35.75	29.46	4.98	32.52	Average
3	2781.750	46.44	-27.56	74.00	44.52	29.46	4.98	32.52	Peak
4	3709.000	35.66	-18.34	54.00	29.95	31.76	6.49	32.54	Average
5	3709.000	49.73	-24.27	74.00	44.02	31.76	6.49	32.54	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).
- Note 5: No level of unwanted emissions exceeds the level of the fundamental emission. (119.44 dBuV/m).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	ASK-Transmit	Test Freq. (FX)	927.25 MHz
Operating Function	Transmit	Polarization	H

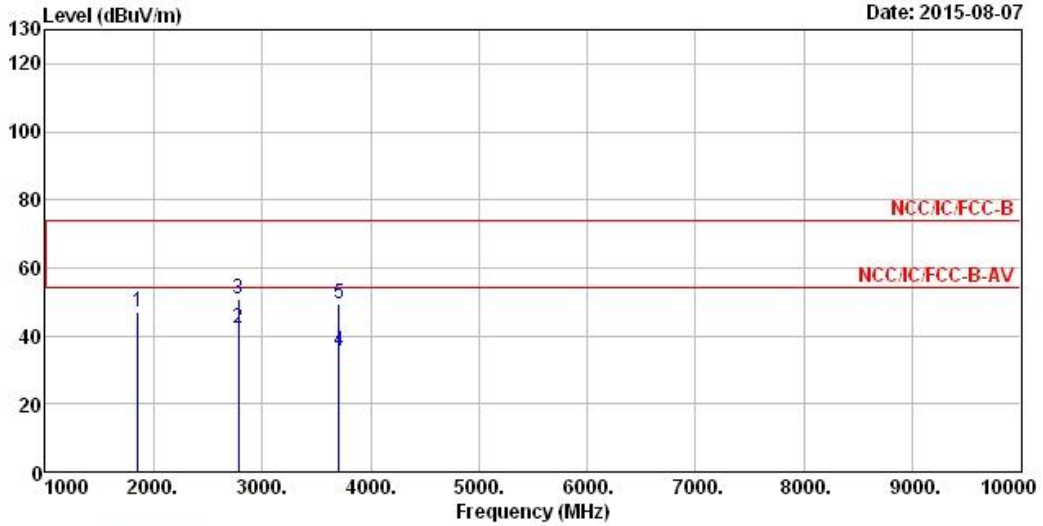

Date: 2015-08-07

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	1854.500	47.08			49.13	26.88	3.74	32.67	Peak
2	2781.750	42.04	-11.96	54.00	40.12	29.46	4.98	32.52	Average
3	2781.750	50.67	-23.33	74.00	48.75	29.46	4.98	32.52	Peak
4	3709.000	35.33	-18.67	54.00	29.62	31.76	6.49	32.54	Average
5	3709.000	49.21	-24.79	74.00	43.50	31.76	6.49	32.54	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).
- Note 5: No level of unwanted emissions exceeds the level of the fundamental emission. (119.44 dBuV/m).



## 4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Apr. 15, 2015	AC Conduction
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	JAN. 22, 2015	AC Conduction
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	Oct. 31, 2014	AC Conduction
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	NA	AC Conduction

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101500	9KHz~40GHz	May 06, 2015	RF Conducted
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jul. 28, 2015	RF Conducted
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Jan. 29, 2015	RF Conducted
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Jan. 29, 2015	RF Conducted

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 29, 2014	Radiation
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May 11, 2015	Radiation
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Sep. 01, 2014	Radiation
Spectrum	R&S	FSP40	100004	9kHz ~ 40GHz	Apr. 02, 2015	Radiation
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 20, 2014	Radiation
Horn Antenna	ETS · LINDGREN	3115	6741	1GHz ~ 18GHz	Jul. 15, 2015	Radiation
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 15, 2014	Radiation
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Dec. 12, 2014	Radiation
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiation
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz~30 MHz	Feb. 02, 2015	Radiation

Note: Calibration Interval of instruments listed above is two years.