

Measurement Report

Product: ***REMOTE CONTROL TRANSMITTER***
Manufacture: ***FEGO PRECISION INDUSTRIAL CO., LTD.***
FCC ID: ***M8CBAP1200***
Model: ***BAP1200***
Report No.: ***MLT0406P15002***
Test Date: ***06/16/2004***

Test By

Max Light Technology Co.,Ltd.

*Room 5, 8F, No.125, Section 3 Roosevelt Road,
Taipei, Taiwan., R.O.C.*

Tel: 886-2-363-2447 Fax: 886-2-363-2597

The test report consists of 33 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory.



MAX LIGHT

MEASUREMENT REPORT

Table of Contents :

I. General	4.
II. Conducted Emissions Requirements	6.
III. Radiated Emissions Requirements	11.
IV. Transmitter Bandwidth Measurements	22.
V. Transmitter Duty Cycle Measurements	25.
VI. Verification of De-activation after 5 seconds	31.
Appendix I (EUT Test Setup)	33.



CERTIFICATION

We here by verify that :

The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2001. All test were conducted by *MLT (Max Light Technology Co.,Ltd) Room 5, 8F, No.125, Section 3 Roosevelt Road, Taipei, Taiwan, R.O.C* Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is in compliance with radiated emission limit of FCC Rules Part 15 Subpart C Section 15.231.

EUT : REMOTE CONTROL TRANSMITTER

Applicant : FEGO PRECISION INDUSTRIAL CO., LTD.
NO. 947 LIN-SEN RD., WU FONG
SHIANG, TAICHUNG HSIEN,
TAIWAN

Manufacturer : FEGO PRECISION INDUSTRIAL CO., LTD.
NO. 947 LIN-SEN RD., WU FONG
SHIANG, TAICHUNG HSIEN,
TAIWAN

Model No : BAP1200

FCC ID : M8CBAP1200

Prepared by:  Country Huang approved by  Roger Chen



I. GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of Fego Precision Industrial Co., Ltd. In support of an Intentional Periodic Radiator certification in accordance with Part 2 Subpart J and Part 15 Subpart A And C of the Commission's and Regulations.

1.2 Description of EUT

EUT : REMOTE CONTROL TRANSMITTER

Applicant : FEGO PRECISION INDUSTRIAL CO., LTD.
NO. 947 LIN-SEN RD., WU FONG
SHIANG, TAICHUNG HSIEN,
TAIWAN

Manufacturer : FEGO PRECISION INDUSTRIAL CO., LTD.
NO. 947 LIN-SEN RD., WU FONG
SHIANG, TAICHUNG HSIEN,
TAIWAN

Model No : BAP1200

FCC ID : M8CBAP1200


Power Type : Powered by AC

The EUT(BAP1200) is Remote Control of Lamp/Fan Controller. The operation frequency is 314.58Mhz.Press the button on remote transmitter, can set the can set the Speed button.

1.3 Description of Support Equipment

The EUT itself forms a system. No support equipment is required for its normal operation.

1.4 Configuration of System Under Test

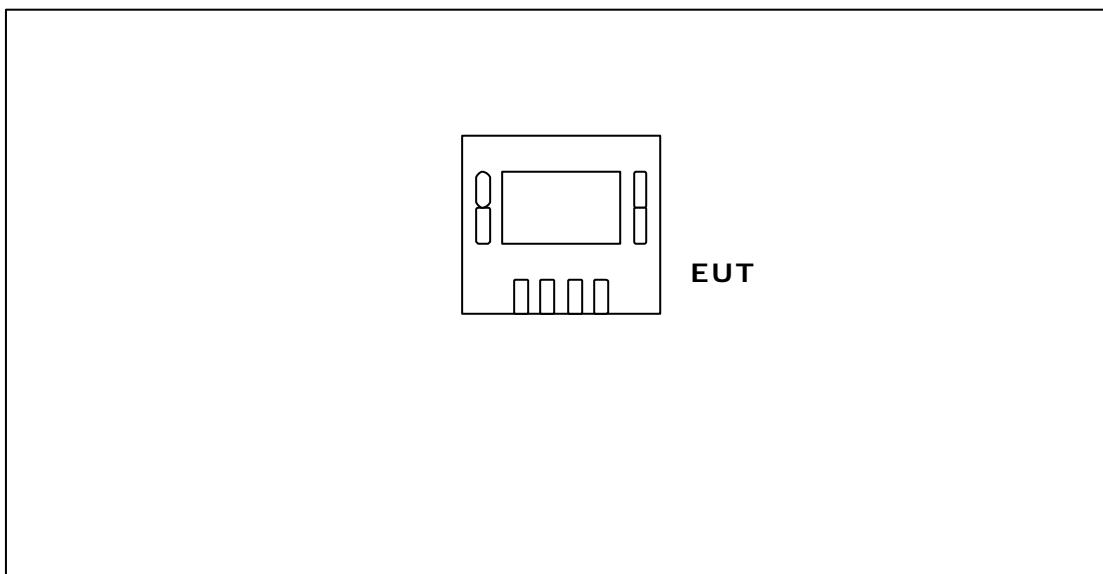

1.7 Test Procedure

All measurements contained in this report were performed according to the techniques described in Measurement procedure ANSI ANSI C63.4:2001 "Measurement of Intentional Radiators."

1.8 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests was chosen as that which produced the highest emission levels. However, only those conditions which the EUT was considered likely to encounter in normal use were investigated.



II. Conducted Emissions Requirements

2.1 General & Setup :

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3825/2 Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPER quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 2.6.

2.2 Test Equipment List:

- A. EMCO 3825/2 LISN (S/N:2654)
- B. EMCO 3825/2 LISN (S/N:2658)
- C. HP 8591EM 9KHZ-1.8GHz Spectrum Analyzer (S/N:73412A00110)
- D. R&S ESH3 Test Receiver (S/N:892108/025)
- E. Shielded Room (MLT-SR1)

2.3 Test Configuration:



Front View of The Test Configuration



Rear View of The Test Configuration



MAX LIGHT

MEASUREMENT REPORT

2.4 Test condition:

EUT tested in accordance with the specifications given by the manufacturer , and exercised in the most unfavorable manner.

2.5 Conducted Emissions Limits:

<i>Frequency range (MHz)</i>	<i>Limits (dBuV)</i>	
	<i>Quasi-peak</i>	<i>Average</i>
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.0	56	46
5.0 to 30	60	50



MAX LIGHT

MEASUREMENT REPORT

2.6 Measurement Data Of Conducted Emissions:

2.6.1 Conducted Emissions (Subpart B)

The following table show a summary of the highest emissions of power line conducted emissions to the HOT and NATURAL conductor of the EUT power.

Applicant : FEGO PRECISION INDUSTRIAL CO., LTD.
 Model No : BAP1200
 EUT : REMOTE CONTROL TRANSMITTER
 Test Date : 06/17/2004

Power Line Conducted Emissions (Class B)					
Conductor	Frequency (MHz)	Quasi-Peak (dBuV)	Limits	Average (dBuV)	Limits
L1	0.16	57.71/PK	65.96	48.10	55.96
	0.19	55.39/PK	63.95	46.80	53.95
	1.05	39.82/PK	56	--	46
	4.72	51.03/PK	56	38.70	46
	6.59	40.92/PK	56	--	46
	12.00	37.45/PK	60	--	50
	14.99	37.18/PK	60	--	50
L2	0.16	49.14/PK	65.13	--	55.13
	0.60	43.81/PK	56	--	46
	0.81	52.57/PK	56	37.90	46
	4.80	50.90/PK	56	39.40	46
	6.59	39.57/PK	56	--	46
	14.99	41.07/PK	60	--	50
	18.04	43.13/PK	60	--	50

- Notes :
- 1.L1: One end & Ground L1: The other end & Ground
 - 2.Height of table on which the EUT was placed : 0.8 m.
 - 3.The Quasi-Peak Value have already met the Average Value Limit showed on above limits.
 - 4.The above test results are obtained under the normal condition.



III. Radiated Emissions Requirements

3.1 General Configuration:

Prior to open-field testing, the EUT was placed in a shielded enclosure and scanned at a close distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration which produced the highest emissions was noted so it could be reproduced later during the open-field tests. This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

3.2 General Configuration:

Final radiation measurements were made on a three-meter, open-field test site. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 30 MHz to 5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.



MAX LIGHT

MEASUREMENT REPORT

Page: 12/33

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

The field strength below 1 GHz was measured by EMCO Biconilog Antenna (mode 3142) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 - 40 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post - detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.



MAX LIGHT

MEASUREMENT REPORT

Page: 13/33

(1) Amplitude (dBuV/m) = FI(dBuV) + AF(dBuV) + CL(dBuV) - Gain(dB)

FI = Reading of the field intensity.

AF = Antenna factor.

CL = Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Duty(dB) - Dis(dB)

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(1) For fundamental frequency :

$$\text{Emission Limit}(\mu\text{V/m}) = [\text{FEUT}(\text{MHz}) - 260(\text{MHz})] \times \frac{12500(\mu\text{V/m}) - 3750(\mu\text{V/m})}{470(\text{MHz}) - 260(\text{MHz})} + 3750(\mu\text{V/m})$$

FEUT = EUT Operating Frequency.

(2) For spurious frequency :

Spurious emission limits = fundamental emission limit / 10

3.3 Test Equipment List:

- A. HP 8591EM 9KHz-1.8GHz Spectrum Analyzer (S/N:73412A00230)
- B. HP 8447D Pre Amplifier (S/N:2944A08954)
- C. EMCO 3142 26MHz~2000MHz Biconilog Antenna (S/N:1184)
- D. R&S ESVP 20MHz~1300MHz Test Receiver (S/N:881121/01)
- E. Agilent E4407B 9KHz-26.5GHz Spectrum Analyzer (S/N:A872JS02291)
- F. HP 8449B 1GHZ~26.5GHZ PRE Amplifier (S/N:1982901A91)
- G. SCHWARZBECK BBHA 9120D 1GHZ~18GHZ Horn Antenna (S/N:141S3)
- H. SCHWARZBECK BBHA 9170 15GHZ~40GHZ Horn Antenna (S/N:192S5)

3.4 Test Configuration:



Front View of The Test Configuration



Rear View of The Test Configuration



MAX LIGHT

MEASUREMENT REPORT

3.5 Measurement Data Of Radiated Emissions:

3.5.1 Open Field Radiated Emissions (Horizontal/X-axis)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following

Applicant : FEGO PRECISION INDUSTRIAL CO., LTD.
Model No : BAP1200
EUT : REMOTE CONTROL TRANSMITTER
Test Date : 06/17/2004

Radiated Emissions (HORIZONTAL)								
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Dist (dB)	Actual Amp (dBuV/m)	Limit (dBuV/m)	Margin (dB)
314.58	73.87	1.5	200	9.46	0	64.41	75.59	-11.18
629.18	53.45	1	300	9.46	0	43.99	55.59	-11.60
943.77	42.45	1.4	190	9.46	0	32.99	54.00	-21.01
1258.32	54.12	1	130	9.46	9.54	35.12	55.59	-20.47
1572.96	52.34	1	190	9.46	9.54	33.34	54.00	-20.66
1887.48	50.98	1	230	9.46	9.54	31.98	55.59	-23.61
2202.06	51.88	1	120	9.46	9.54	32.88	54.00	-21.12

- Notes :
- 1.Margin= Amplitude - Limits
 - 2.Distance of Measurement : 3 Meter (30-1000MHz)
 - 3.Height of table for EUT placed: 0.8 Meter.
 - 4.ANT= Antenna height.
 - 5.Duty= Duty cycle correction factor.
 - 6.Dis= Distance extrapolation factor.
 - 7.Amplitude= Reading Amplitude - Amplifier gain+Cable loss +Antenna factor
(Auto calculate in spectrum analyzer)
 - 8.Actual Amp= Amplitude - Duty - Dis.
 9. EUT Orthogonal Axes : X denotes Laid on Table ; Z denotes Side Stand ; Y denotes Vertical Stand.



MAX LIGHT

MEASUREMENT REPORT

3.5.2 Open Field Radiated Emissions (Vertical/X-axis)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following.

Applicant : FEGO PRECISION INDUSTRIAL CO., LTD.
Model No : BAP1200
EUT : REMOTE CONTROL TRANSMITTER
Test Date : 06/17/2004

Radiated Emissions (VERTICAL)								
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Dist (dB)	Actual Amp (dBuV/m)	Limit (dBuV/m)	Margin (dB)
314.58	69.06	1.5	300	9.46	0	59.60	75.59	-15.99
629.12	49.88	1.5	390	9.46	0	40.42	55.59	-15.17
943.74	43.51	1	100	9.46	0	34.05	54.00	-19.95
1258.33	52.76	1	290	9.46	9.54	33.76	55.59	-21.83
1572.92	53.21	1	310	9.46	9.54	34.21	54.00	-19.79
1887.48	51.34	1	90	9.46	9.54	32.34	55.59	-23.25
2202.09	53.45	1	240	9.46	9.54	34.45	54.00	-19.55

- Notes :
- 1.Margin= Amplitude - Limits
 - 2.Distance of Measurement : 3 Meter (30-1000MHz)
 - 3.Height of table for EUT placed: 0.8 Meter.
 - 4.ANT= Antenna height.
 - 5.Duty= Duty cycle correction factor.
 - 6.Dis= Distance extrapolation factor.
 - 7.Amplitude= Reading Amplitude - Amplifier gain+Cable loss +Antenna factor
(Auto calculate in spectrum analyzer)
 - 8.Actual Amp= Amplitude - Duty - Dis.
 9. EUT Orthogonal Axes : X denotes Laid on Table ; Z denotes Side Stand ; Y denotes Vertical Stand.



MAX LIGHT

MEASUREMENT REPORT

3.5.3 Open Field Radiated Emissions (Horizontal/Y-axis)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following

Applicant : FEGO PRECISION INDUSTRIAL CO., LTD.
Model No : BAP1200
EUT : REMOTE CONTROL TRANSMITTER
Test Date : 06/17/2004

Radiated Emissions (HORIZONTAL)								
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Dist (dB)	Actual Amp (dBuV/m)	Limit (dBuV/m)	Margin (dB)
314.58	73.78	1.5	300	9.46	0	64.32	75.59	-11.27
629.15	53.98	2	290	9.46	0	44.52	55.59	-11.07
943.73	43.87	2	250	9.46	0	34.41	54.00	-19.59
1258.36	52.87	1.1	120	9.46	9.54	33.87	55.59	-21.72
1572.95	50.90	1	150	9.46	9.54	31.90	54.00	-22.10
1887.42	52.87	1	290	9.46	9.54	33.87	55.59	-21.72
2202.08	50.65	1	230	9.46	9.54	31.65	54.00	-22.35

- Notes :
- 1.Margin= Amplitude - Limits
 - 2.Distance of Measurement : 3 Meter (30-1000MHz)
 - 3.Height of table for EUT placed: 0.8 Meter.
 - 4.ANT= Antenna height.
 - 5.Duty= Duty cycle correction factor.
 - 6.Dis= Distance extrapolation factor.
 - 7.Amplitude= Reading Amplitude - Amplifier gain+Cable loss +Antenna factor
(Auto calculate in spectrum analyzer)
 - 8.Actual Amp= Amplitude - Duty - Dis.
 9. EUT Orthogonal Axes : X denotes Laid on Table ; Z denotes Side Stand ; Y denotes Vertical Stand.



MAX LIGHT

MEASUREMENT REPORT

3.5.4 Open Field Radiated Emissions (Vertical/Y-axis)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following.

Applicant : FEGO PRECISION INDUSTRIAL CO., LTD.
Model No : BAP1200
EUT : REMOTE CONTROL TRANSMITTER
Test Date : 06/17/2004

Radiated Emissions (VERTICAL)								
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Dist (dB)	Actual Amp (dBuV/m)	Limit (dBuV/m)	Margin (dB)
314.58	65.80	1.5	100	9.46	0	56.34	75.59	-19.25
629.13	53.44	1.5	200	9.46	0	43.98	55.59	-11.61
943.75	51.34	2	270	9.46	0	41.88	54.00	-12.12
1258.35	49.87	1	200	9.46	9.54	30.87	55.59	-24.72
1572.93	50.61	1	120	9.46	9.54	31.61	54.00	-22.39
1887.45	52.35	1	270	9.46	9.54	33.35	55.59	-22.24
2202.09	50.32	1	220	9.46	9.54	31.32	54.00	-22.68

- Notes :
- 1.Margin= Amplitude - Limits
 - 2.Distance of Measurement : 3 Meter (30-1000MHz)
 - 3.Height of table for EUT placed: 0.8 Meter.
 - 4.ANT= Antenna height.
 - 5.Duty= Duty cycle correction factor.
 - 6.Dis= Distance extrapolation factor.
 - 7.Amplitude= Reading Amplitude - Amplifier gain+Cable loss +Antenna factor
(Auto calculate in spectrum analyzer)
 - 8.Actual Amp= Amplitude - Duty - Dis.
 9. EUT Orthogonal Axes : X denotes Laid on Table ; Z denotes Side Stand ; Y denotes Vertical Stand.



MAX LIGHT

MEASUREMENT REPORT

3.5.5 Open Field Radiated Emissions (Horizontal/Z-axis)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following

Applicant : FEGO PRECISION INDUSTRIAL CO., LTD.
Model No : BAP1200
EUT : REMOTE CONTROL TRANSMITTER
Test Date : 06/17/2004

Radiated Emissions (HORIZONTAL)								
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Dist (dB)	Actual Amp (dBuV/m)	Limit (dBuV/m)	Margin (dB)
314.58	66.47	1.5	270	9.46	0	57.01	75.59	-18.58
629.19	54.98	1	300	9.46	0	45.52	55.59	-10.07
943.72	47.98	1.5	220	9.46	0	38.52	54.00	-15.48
1258.35	51.23	1	340	9.46	9.54	32.23	55.59	-23.36
1572.97	51.23	1	290	9.46	9.54	32.23	54.00	-21.77
1887.42	52.34	1	120	9.46	9.54	33.34	55.59	-22.25
2202.09	50.98	1	240	9.46	9.54	31.98	54.00	-22.02

- Notes :
- 1.Margin= Amplitude - Limits
 - 2.Distance of Measurement : 3 Meter (30-1000MHz)
 - 3.Height of table for EUT placed: 0.8 Meter.
 - 4.ANT= Antenna height.
 - 5.Duty= Duty cycle correction factor.
 - 6.Dis= Distance extrapolation factor.
 - 7.Amplitude= Reading Amplitude - Amplifier gain+Cable loss +Antenna factor
(Auto calculate in spectrum analyzer)
 - 8.Actual Amp= Amplitude - Duty - Dis.
 9. EUT Orthogonal Axes : X denotes Laid on Table ; Z denotes Side Stand ; Y denotes Vertical Stand.



MAX LIGHT

MEASUREMENT REPORT

3.5.6 Open Field Radiated Emissions (Vertical/Z-axis)

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarization, EUT orientation , etc. are recorded on the following.

Applicant : FEGO PRECISION INDUSTRIAL CO., LTD.
 Model No : BAP1200
 EUT : REMOTE CONTROL TRANSMITTER
 Test Date : 06/17/2004

Radiated Emissions (VERTICAL)								
Frequency (MHz)	Amplitude (dBuV/m)	Ant. (m)	Table (Degree)	Duty (dB)	Dist (dB)	Actual Amp (dBuV/m)	Limit (dBuV/m)	Margin (dB)
314.58	70.46	1.8	320	9.46	0	61.00	75.59	-14.59
629.12	52.39	1.5	220	9.46	0	42.93	55.59	-12.66
943.75	48.74	2	300	9.46	0	39.28	54.00	-14.72
1258.31	51.34	1	170	9.46	9.54	32.34	55.59	-23.25
1572.95	52.09	1	190	9.46	9.54	33.09	54.00	-20.91
1887.46	51.33	1	200	9.46	9.54	32.33	55.59	-23.26
2202.03	53.54	1	270	9.46	9.54	34.54	54.00	-19.46


- Notes :
- 1.Margin= Amplitude - Limits
 - 2.Distance of Measurement : 3 Meter (30-1000MHz)
 - 3.Height of table for EUT placed: 0.8 Meter.
 - 4.ANT= Antenna height.
 - 5.Duty= Duty cycle correction factor.
 - 6.Dis= Distance extrapolation factor.
 - 7.Amplitude= Reading Amplitude - Amplifier gain+Cable loss +Antenna factor
(Auto calculate in spectrum analyzer)
 - 8.Actual Amp= Amplitude - Duty - Dis.
 9. EUT Orthogonal Axes : X denotes Laid on Table ; Z denotes Side Stand ; Y denotes Vertical Stand.

IV. Transmitter Bandwidth Measurement

4.1 Test Condition & Setup :

The transmitter bandwidth measurements were performed in a shielded enclosure. The EUT was placed on a wooded table which is 0.8 meters height and a near field probe was used at a distance about 20 cm for receiving. While testing, EUT was set to transmit continuously. The resolution bandwidth of the spectrum analyzer was set to 10KHz. The detector function was set to peak and hold mode to clearly observe the components. The maximum permitted bandwidth at -20dB with respect to the reference level specified by the rule was 0.25 % of the center frequency of the EUT.

4.2 Test Instruments Configuration:

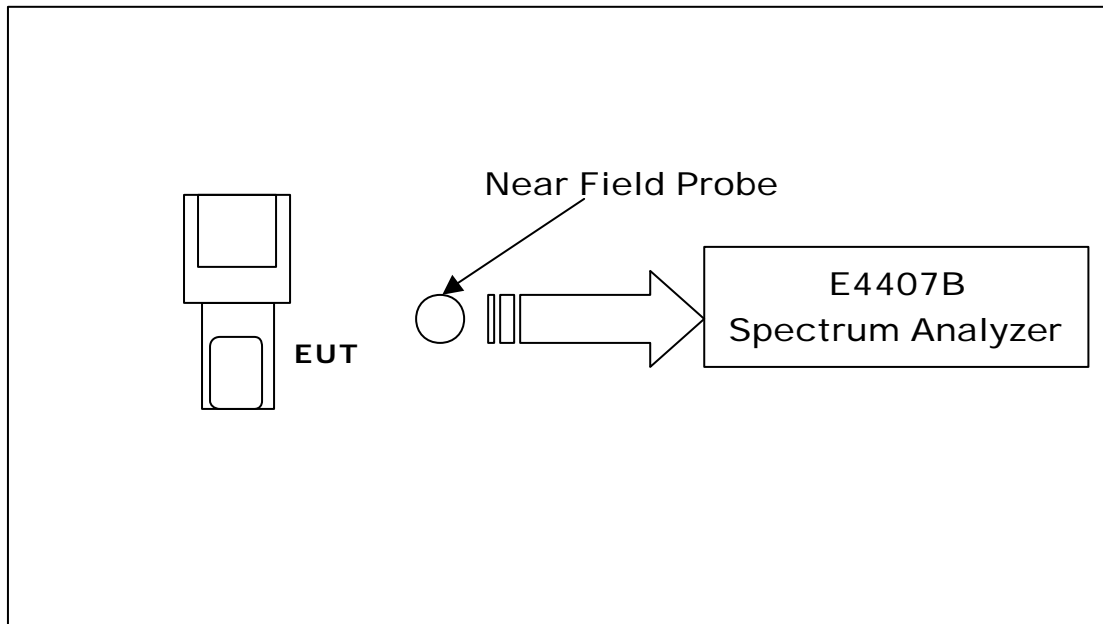



MAX LIGHT

MEASUREMENT REPORT

4.3 Test Equipment List:


- A. Tektronix FG504 0.1H~40MHz (S/N:43AS251)
- B. EMCO Near Field Probe (S/N:7901-291)
- C. HPE4407B 9KHz~26.8GHz Spectrum Analyzer (S/N: US39240419)
- D. Shielded Room (MLT-SR1)

4.4 Test Result:

Permitted Maximum Bandwidth	786.45KHz
Bandwidth Measurement	443.00KHz

4.5 Test Graphs:

See next page.

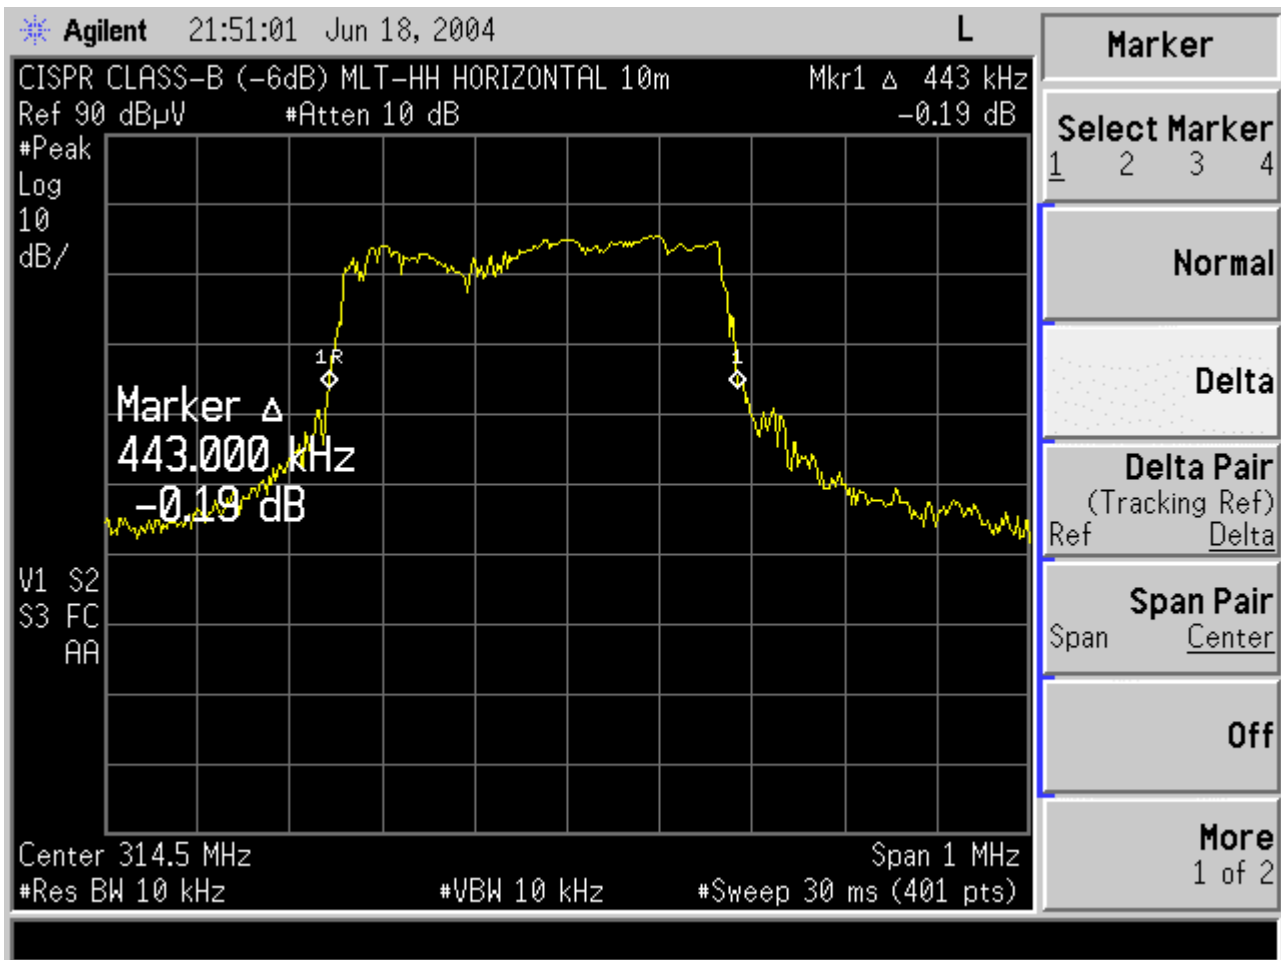

V. Transmitter Duty Cycle Measurement

5.1 Test Condition & Setup :

The transmitter bandwidth measurements were performed in a shielded enclosure. The EUT was placed on a wooded table which is 0.8 meters height and a near field probe was used at a distance about 20 cm for receiving. While testing, EUT was set to transmit continuously. Various key configurations were also investigated to find the maximum duty cycle.

The spectrum analyzer resolution bandwidth and video bandwidth were all set to 1 MHz to encompass all Significant spectral components during the test. The analyzer was operated in linear scale and zero span mode after tuning to the transmitter carrier frequency. A digital oscilloscope was connected to the aux video output of the spectrum analyzer for measuring pulse width. The pulse width was determined by the difference between the half voltage points on a pulse.


The duty cycle was determined by the following equation :

TO calculate the actual field intensity, the duty cycle correction factor in decibel is needed for later use and can be obtained from following conversion :

$$\text{Duty Cycle(\%)} = \frac{(\text{Total On Interval in a Complete Pulse Train})}{(\text{Length of a Complete Pulse Train})} \times 100\%$$

$$\text{Duty Cycle Correction Factor (dB)} = 20 \times \text{Log}_{10} (\text{Duty Cycle(\%)})$$

5.2 Test Instruments Configuration:

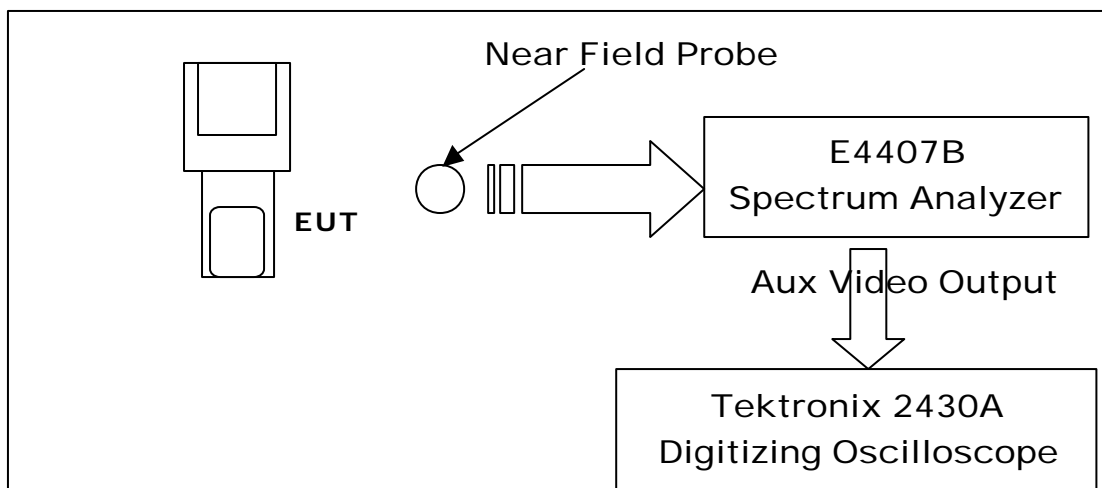



MAX LIGHT

MEASUREMENT REPORT

5.3 Test Equipment List:

- A. Tektronix FG504 0.1H~40MHz (S/N:43AS251)
- B. EMCO Near Field Probe (S/N:7901-291)
- C. HPE4407B 9KHz~26.8GHz Spectrum Analyzer (S/N: US39240419)
- D. Tektronix 2230 Digitizing Oscilloscope (S/N:A13F148F09)
- E. Shielded Room (MLT-SR1)


5.4 Test Result:

Pulse Train	Number of Pulse	T(ms)	Total Time (ms)
Long Pulse	8	1.050	8.40 msec
Short Pulse	26	0.525	13.65 msec

Total ON interval in a complete pulse train	22.05 msec
Length of a complete pulse train	65.50 msec
Duty Cycle (%)	33.66%
Duty Cycle Correction Factor (dB)	9.46

5.5 Test Graphs: *See next page.*

Length of A Complete Pulse Train

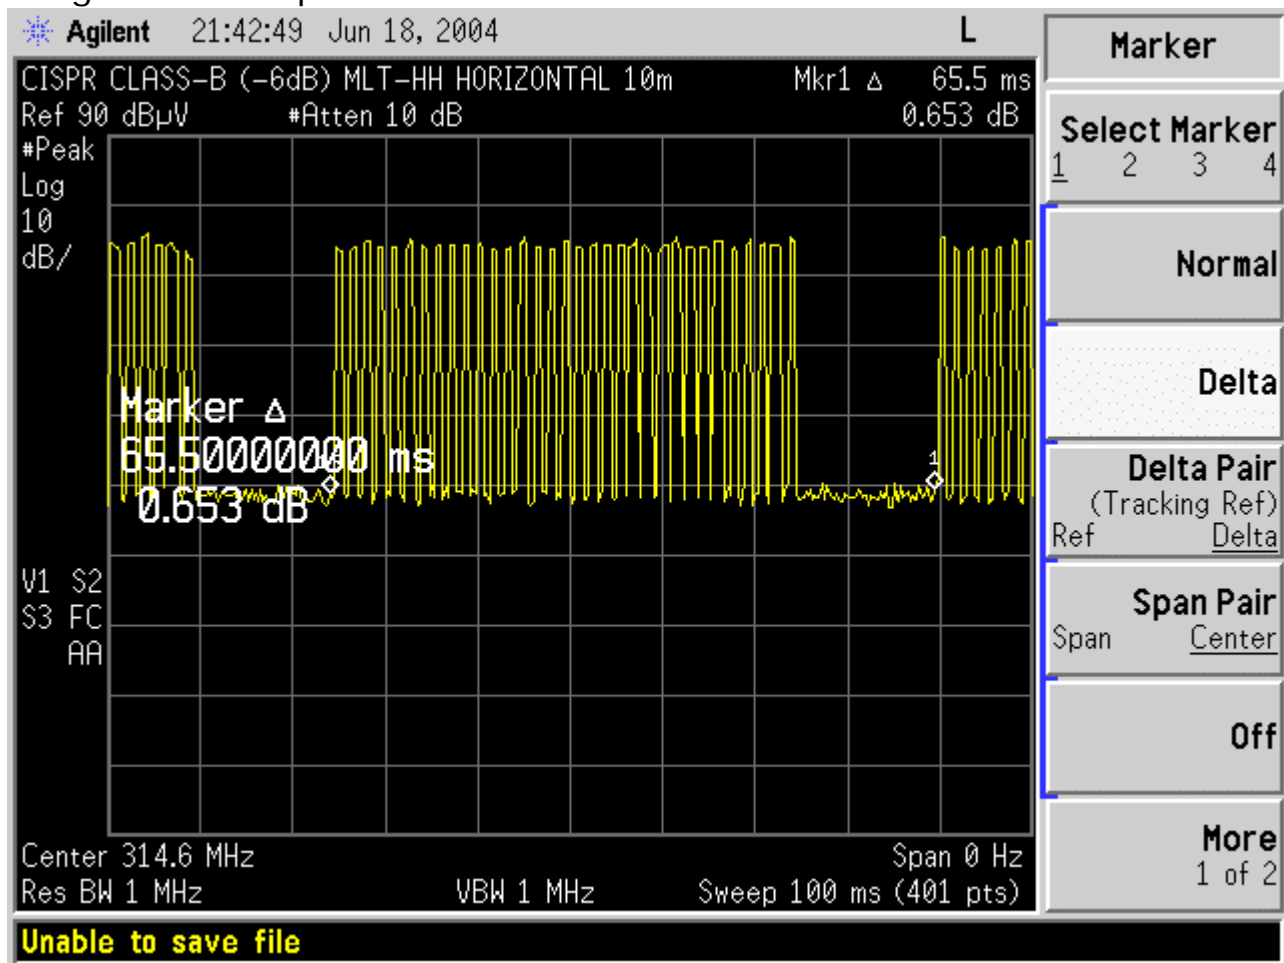





MAX LIGHT

MEASUREMENT REPORT


Long Pulse

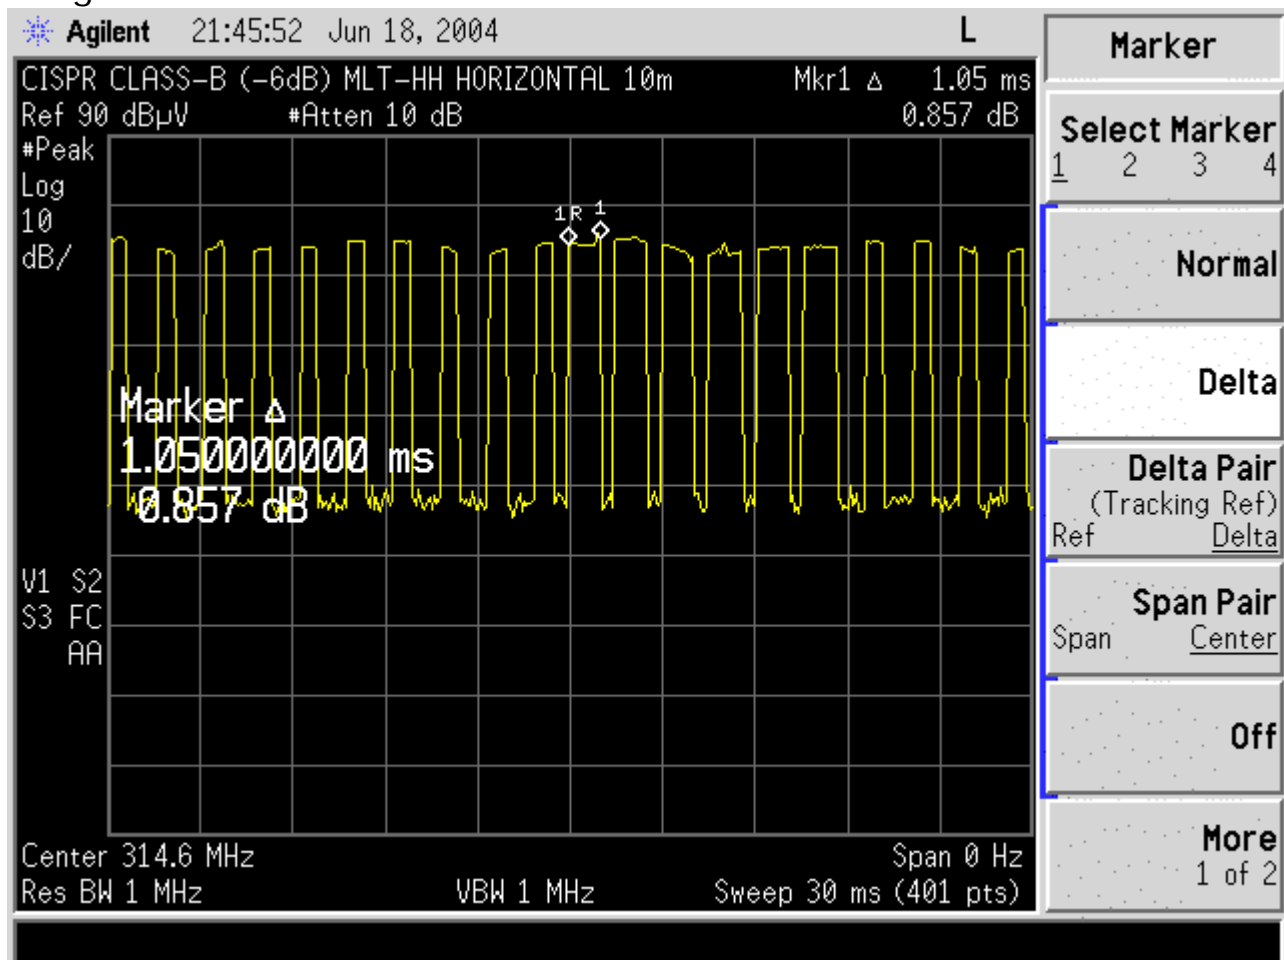

Short Pulse

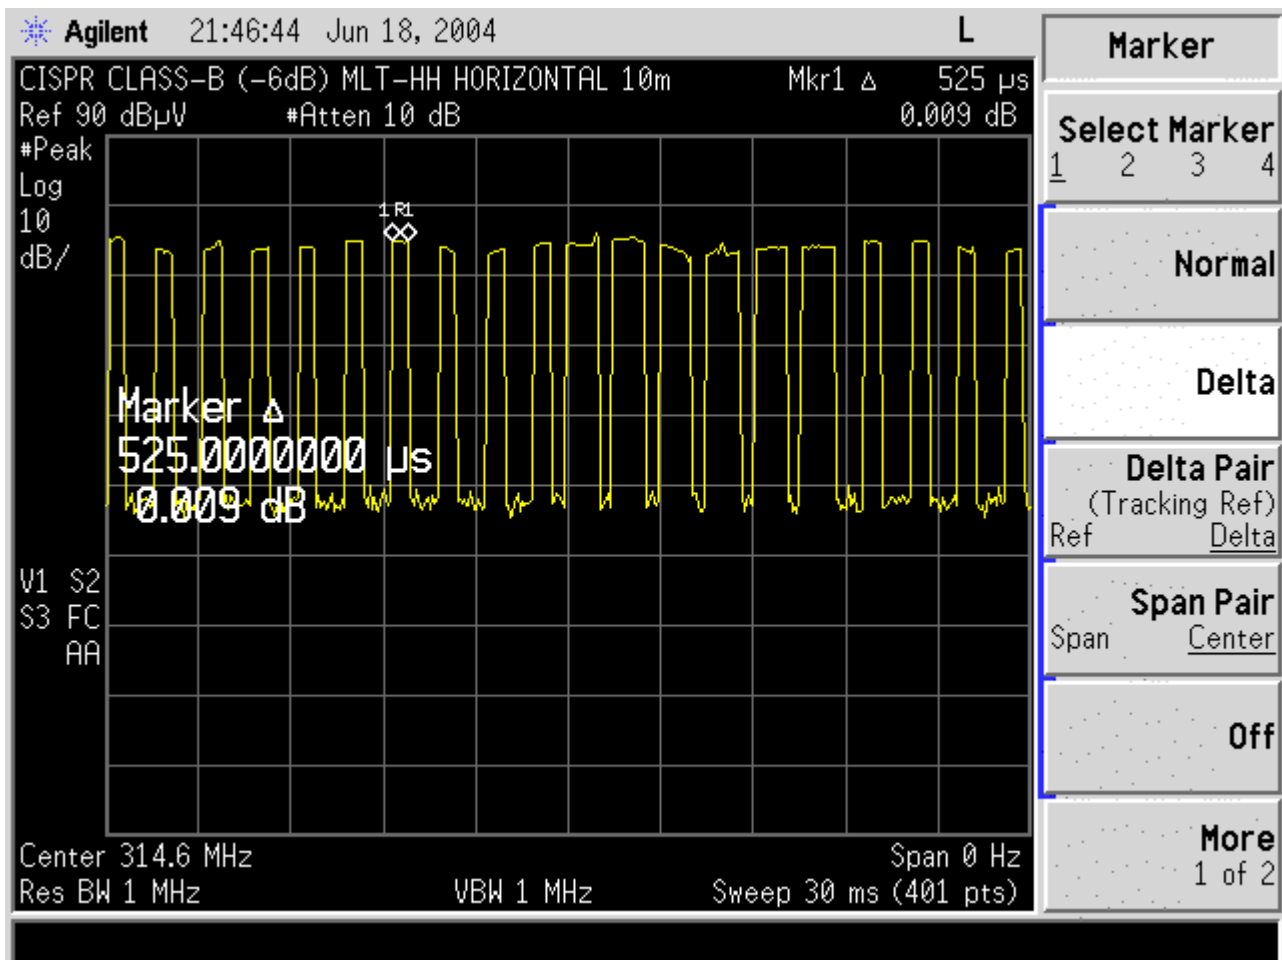

Long Pulse & Short Pulse (Number of Pulse)

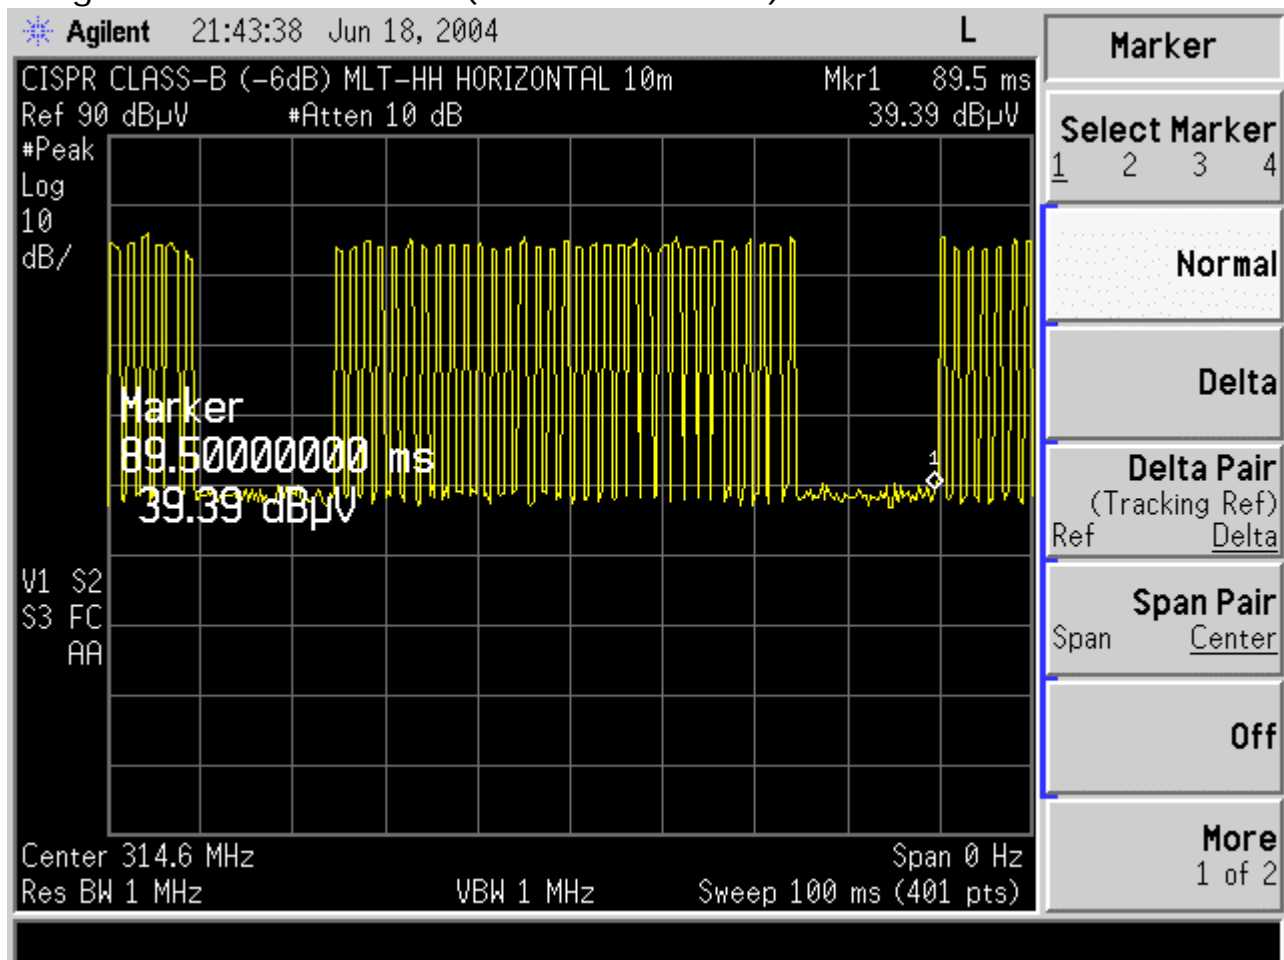


VI. Verification of De-activation after 5 seconds

6.1 Test Condition & Setup :

The transmitter bandwidth measurements were performed in a shielded enclosure. The EUT was placed on a wooded table which is 0.8 meters height and a near field probe was used at a distance about 20 cm for receiving. While testing, EUT was set to transmit continuously. Various key configurations were also investigated to find the maximum duty cycle.

The spectrum analyzer resolution bandwidth and video bandwidth were all set to 100KHZ to encompass all Significant spectral components during the test. The analyzer was operated in linear scale and zero span mode after tuning to the transmitter carrier frequency.

6.2 Test Instruments Configuration:

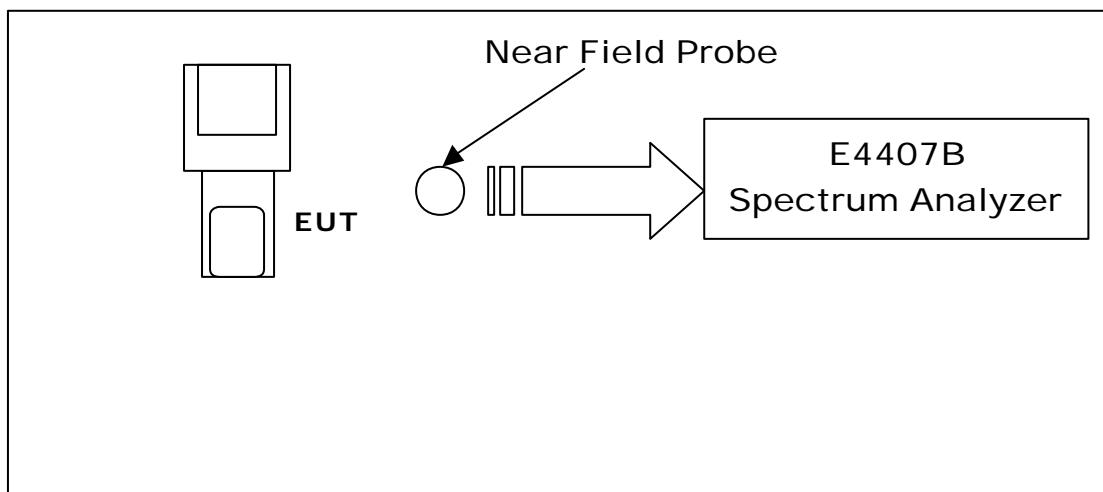


6.3 Test Equipment List:

- A. Tektronix FG504 0.1H~40MHz (S/N:43AS251)
- B. EMCO Near Field Probe (S/N:7901-291)
- C. E4407B 9KHz~26.8GHz Spectrum Analyzer (S/N: US39240419)
- E. Shielded Room (MLT-SR1)

6.4 Test Result:

Compliant Conditions (Section 15.231)	EUT Status	
Was the EUT manually operated ?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
If yes, did the EUT employ a switch that would automatically deactivate the transmitter within not more than 5 seconds of being released ?	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
Was the EUT automatically activated ?	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
Was the EUT used for periodic transmissions at regular predetermined intervals ?	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No

Note: This device stops transmitting once the activation button is depressed.

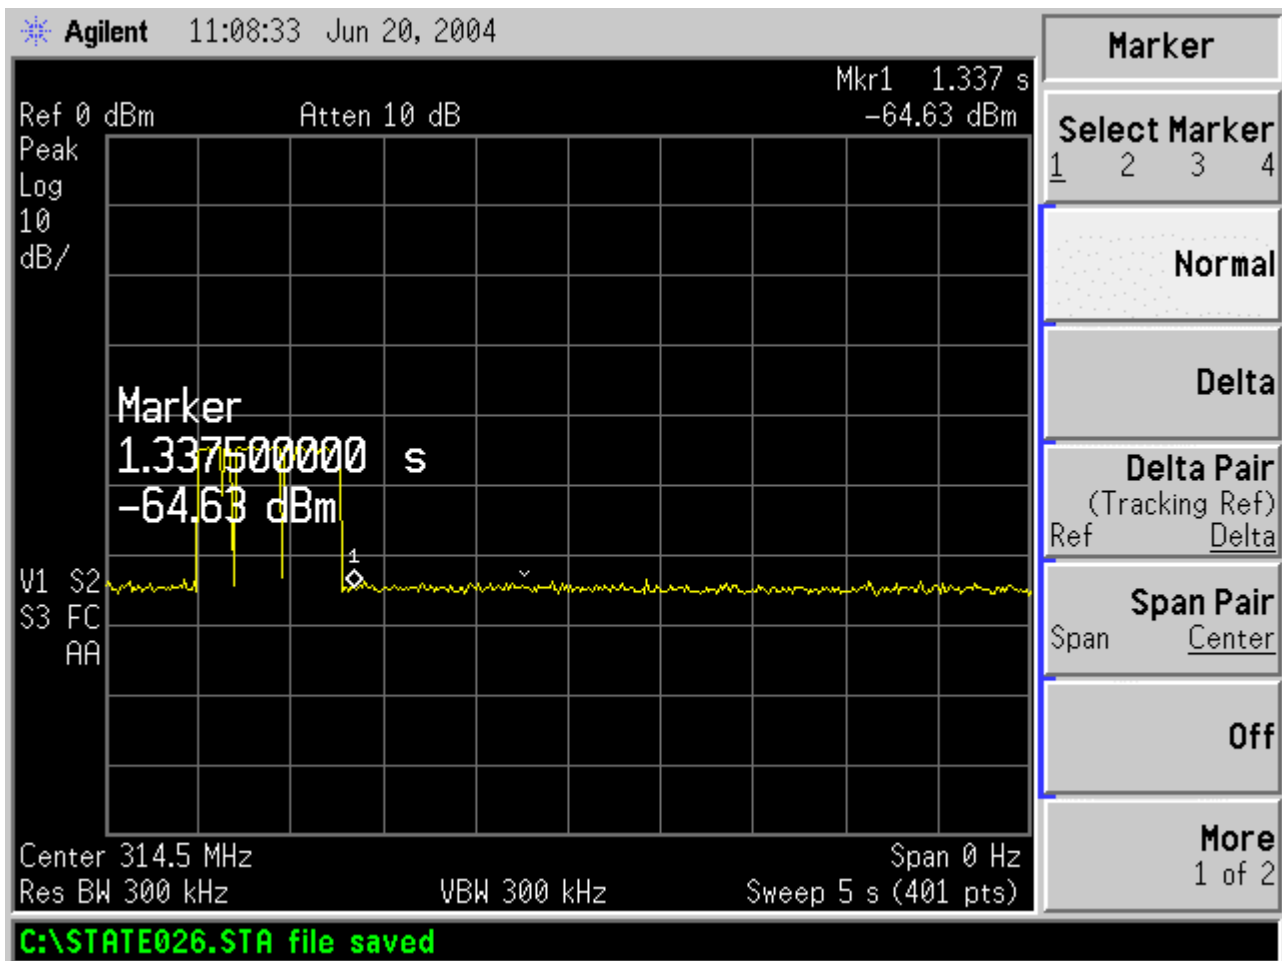

Appendix I- EUT Test SETUP

MEASUREMENT OF RADIATED EMISSION

