



## Electromagnetic Compatibility Test Report

Tests Performed on an RF Ideas, Inc.

125 kHz RFID Reader, Model RDR-6081AK0

Radiometrics Document RP-7841A



*Product Detail:*

FCC ID: M9MLC608XU0

IC ID: 6571A-LC608XU0

Equipment type: 125 kHz RFID Card Reader

*Test Standards:*

US CFR Title 47, Chapter I, FCC Part 15 Subpart C

FCC Part 15 CFR Title 47: 2012

Industry Canada RSS-210, Issue 8: 2010 as required for Category I Equipment

This report concerns: Original Equipment

FCC Part 15.209

*Tests Performed For:*

**RF Ideas, Inc.**

4020 Winnetka Av.

Rolling Meadows, IL 60008

*Test Facility:*

**Radiometrics Midwest Corporation**

12 East Devonwood

Romeoville, IL 60446

*Test Date(s): (Month-Day-Year)*

May 23 and June 3, 2014

Document RP-7841A Revisions:

| Rev. | Issue Date    | Affected Sections  | Revised By        |
|------|---------------|--------------------|-------------------|
| 0    | June 6, 2014  |                    |                   |
| 1    | June 26, 2014 | 10.3.1, 10.2, 10.4 | Joseph Strzelecki |
|      |               |                    |                   |
|      |               |                    |                   |

## Table of Contents



|   |    |
|---|----|
| 1 ADMINISTRATIVE DATA .....   | 3  |
| 2 TEST SUMMARY AND RESULTS .....  | 3  |
| 2.1 RF Exposure Compliance Requirements .....                           | 3  |
| 3 EQUIPMENT UNDER TEST (EUT) DETAILS .....                              | 4  |
| 3.1 EUT Description .....   | 4  |
| 3.1.1 FCC Section 15.203 & RSS-GEN Antenna Requirements .....           | 4  |
| 3.2 Related Submittals .....  | 4  |
| 4 TESTED SYSTEM DETAILS .....   | 4  |
| 4.1 Tested System Configuration .....                                   | 4  |
| 4.2 Special Accessories .....   | 4  |
| 4.3 Equipment Modifications .....                                       | 4  |
| 5 TEST SPECIFICATIONS AND RELATED DOCUMENTS.....                        | 5  |
| 6 RADIOMETRICS' TEST FACILITIES .....                                   | 5  |
| 7 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS.....           | 6  |
| 8 CERTIFICATION .....   | 6  |
| 9 TEST EQUIPMENT TABLE .....  | 6  |
| 10 TEST SECTIONS .....  | 6  |
| 10.1 AC Conducted Emissions.....  | 6  |
| 10.2 Radiated RF Emissions.....   | 10 |
| 10.2.1 Field Strength Calculation.....                                  | 11 |
| 10.2.2 Radiated Emissions Test Results .....                            | 11 |
| 10.3 Magnetic Field Measurements and Decay Factor Calculations .....    | 14 |
| 10.3.1 Magnetic Field Radiated Emissions Results (0.009 to 30 MHz)..... | 14 |
| 10.4 Occupied Bandwidth Data.....                                       | 15 |

Notice: This report must not be reproduced (except in full) without the written approval of Radiometrics Midwest Corporation.

**RADIOMETRICS MIDWEST CORPORATION - EMC Test Report**

Testing of RF IDEas, Models RDR-6081AK0, 125 kHz RFID Card Reader

**1 ADMINISTRATIVE DATA**
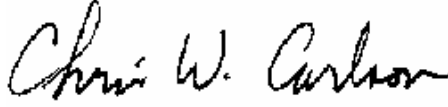
|  |  |
|--|--|
| <i>Equipment Under Test:</i><br>A RF IDEas, Inc., 125 kHz RFID Card Reader<br>Model: RDR-6081AK0 Serial Number: A300000011<br>This will be referred to as the EUT in this Report                                   |  |
| <i>Date EUT Received at Radiometrics:</i><br>May 23 2014   | <i>Test Date(s):</i><br>May 23 and June 3, 2014  |
| <i>Test Report Written By:</i><br>Joseph Strzelecki<br>Senior EMC Engineer   | <i>Test Witnessed By:</i><br>The tests were not witnessed by RF IDEas, Inc.  |
| <i>Radiometrics' Personnel Responsible for Test:</i><br><br><hr/> Joseph Strzelecki<br>Senior EMC Engineer<br>NARTE EMC-000877-NE | <i>Test Report Approved By</i><br><br><hr/> Chris W. Carlson<br>Director of Engineering<br>NARTE EMC-000921-NE |

**2 TEST SUMMARY AND RESULTS**

The EUT (Equipment Under Test) is a 125 kHz RFID Card Reader, Model RDR-6081AK0, manufactured by RF IDEas, Inc. The detailed test results are presented in a separate section. The following is a summary of the test results.

**Emissions Tests Results**

| Environmental Phenomena       | Frequency Range | Basic Standard        | Test Result |
|-------------------------------|-----------------|-----------------------|-------------|
| RF Radiated Emissions         | 30-1000 MHz     | RSS-210 & FCC Part 15 | Pass        |
| Conducted Emissions, AC Mains | 0.15 - 30 MHz   | RSS-210 & FCC Part 15 | Pass        |
| RF Radiated Emissions H-Field | 0.009 – 30 MHz  | RSS-210 & FCC Part 15 | Pass        |

Note: The RSS-210 specification is not currently covered in Radiometrics' Scope of Accreditation. This is technically very similar to FCC, CFR 47 Part 15 which is on Radiometrics scope.

**2.1 RF Exposure Compliance Requirements**

Since the effective power output is less than 1 mW, the EUT meets the FCC requirement for RF exposure and is exempt from RSS-102. There are no power level adjustments and the antenna is permanently attached. The detailed calculations for RF Exposure are presented in a separate document.

### 3 EQUIPMENT UNDER TEST (EUT) DETAILS

#### 3.1 EUT Description

The EUT is a 125 kHz RFID card reader, Model RDR-6081AK0, manufactured by RF IDEas, Inc. The EUT was in good working condition during the tests, with no known defects.

##### 3.1.1 FCC Section 15.203 & RSS-GEN Antenna Requirements

The antenna is permanently attached to the PCB. The antenna is internal to the EUT and it is not readily available to be modified by the end user.

#### 3.2 Related Submittals

RF IDEas, Inc. is not submitting any other products simultaneously for equipment authorization related to the EUT.

### 4 TESTED SYSTEM DETAILS

#### 4.1 Tested System Configuration

The system was configured for testing in a typical fashion. The EUT was placed on an 80-cm high, nonconductive test stand. The testing was performed in conditions as close as possible to installed conditions. Wiring was consistent with manufacturer's recommendations. Power was supplied at 115 VAC, 60 Hz single-phase to the host computer. The EUT was powered from either the USB or PS/2 port.

The identification for all equipment, plus descriptions of all cables used in the tested system, are:

**Tested System Configuration List**

| Item | Description        | Type* | Manufacturer      | Model Number | Serial Number  |
|------|--------------------|-------|-------------------|--------------|----------------|
| 1    | Card Reader:       | E     | RF IDEas          | RDR-6081AK0  | A300000011     |
| 2    | Laptop PC (NB8)    | H     | General Dynamics  | Go Book VR-2 | ZZGE8068ZZ8252 |
| 3    | Power Supply (NB8) | H     | Delta Electronics | ADP-65HB BB  | 635W94601GEA   |

\* Type: E = EUT, P = Peripheral, S = Support Equipment; H = Host Computer

**List of Cables Connected to the EUT**

| QTY | Length (m) | Cable Description                                 | Shielded? |
|-----|------------|---|-----------|
| 1   | 1.85       | USB Cable to Card Reader from Laptop computer NB7 | Yes       |

See previous table for Item #'s.

#### 4.2 Special Accessories

No special accessories were used during the tests in order to achieve compliance.

#### 4.3 Equipment Modifications

No modifications were made at Radiometrics in order to meet the requirements listed in this report.

**5 TEST SPECIFICATIONS AND RELATED DOCUMENTS**

| Document              | Date | Title  |
|-----------------------|------|--|
| FCC<br>CFR Title 47   | 2012 | Code of Federal Regulations Title 47, Chapter 1, Federal Communications Commission, Part 15 - Radio Frequency Devices                |
| ANSI<br>C63.4-2009    | 2009 | Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| IC RSS-210<br>Issue 8 | 2010 | Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands) Category I Equipment                                       |
| IC RSS-Gen<br>Issue 3 | 2010 | General Requirements and Information for the Certification of Radiocommunication Equipment (RSS-Gen)                                 |

The test procedures used are in accordance with the Industry Canada RSS-Gen and ANSI document C63.4-2009, "Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The specific procedures are described herein. Radiated testing was performed at an antenna to EUT distance of 3 meters. The antenna was raised and lowered from 1 to 4 meters.

**6 RADIOMETRICS' TEST FACILITIES**

The results of these tests were obtained at Radiometrics Midwest Corp. in Romeoville, Illinois, USA. Radiometrics is accredited by A2LA (American Association for Laboratory Accreditation) to conform to ISO/IEC 17025: 2005 "General Requirements for the Competence of Calibration and Testing Laboratories". Radiometrics' Lab Code is 121191 and Certification Number is 1495.01. Radiometrics' scope of accreditation includes all of the test methods listed herein. A copy of the accreditation can be accessed on our web site ([www.radiomet.com](http://www.radiomet.com)). Radiometrics accreditation status can be verified at A2LA's web site ([www.a2la2.org](http://www.a2la2.org)).

The following is a list of shielded enclosures located in Romeoville, Illinois used during the tests:

Chamber A: Is an anechoic chamber that measures 24' L X 12' W X 12' H. The walls and ceiling are fully lined with ferrite absorber tiles. The floor has a 10' x 10' section of ferrite absorber tiles located in the center. Panashield of Rowayton, Connecticut manufactured the chamber. The enclosure is NAMAS certified.

Chamber E: Is a custom made anechoic chamber that measures 52' L X 30' W X 18' H. The walls and ceiling are fully lined with RF absorber. Pro-shield of Collinsville, Oklahoma manufactured the chamber.

Test Station F: Is an area that measures 10' D X 12' W X 10' H. The floor and back wall are metal shielded. This area is used for conducted emissions measurements.

A separate ten-foot long, brass plated, steel ground rod attached via a 6 inch copper braid grounds each of the above chambers. Each enclosure is also equipped with low-pass power line filters.

The FCC has accepted these sites as test site number US1065. The FCC test site Registration Number is 732175. Details of the site characteristics are on file with the Industry Canada as site number IC8727A-1.

A complete list of the test equipment is provided herein. The calibration due dates are indicated on the equipment list. The equipment is calibrated in accordance to ANSI/NCSL Z540-1 with traceability to the National Institute of Standards and Technology (NIST).

**7 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS**

There were no deviations or exclusions from the test specifications.

**8 CERTIFICATION**

Radiometrics Midwest Corporation certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specification. The results relate only to the EUT listed herein. Any modifications made to the EUT subsequent to the indicated test date will invalidate the data and void this certification.

**9 TEST EQUIPMENT TABLE**

| RMC ID | Manufacturer   | Description       | Model No.    | Serial No. | Frequency Range | Cal Period | Cal Date |
|--------|----------------|-------------------|--------------|------------|-----------------|------------|----------|
| AMP-22 | Anritsu        | Pre-amplifier     | MH648A       | M23969     | 0.1-1200MHz     | 12 Mo.     | 01/15/14 |
| ANT-44 | ARA            | Super Log Antenna | SL-20M2G     | 1002       | 20-2000MHz      | 24 Mo.     | 12/10/13 |
| ANT-53 | EMCO           | Loop Antenna      | 6507         | 1453       | 1 kHz-30 MHz    | 24 Mo      | 12/02/13 |
| HPF-01 | Solar          | High Pass Filter  | 7930-100     | HPF-1      | 0.15-30MHz      | 24 Mo.     | 02/24/14 |
| LSN-01 | Electrometrics | 50 uH LISN        | FCC/VDE 50/2 | 1001       | 0.01-30MHz      | 24 Mo.     | 06/21/13 |
| LSN-03 | Farnell        | 50 uH LISN        | 1EXLSN30B    | 000314     | 0.01-30MHz      | 24 Mo.     | 06/21/13 |
| REC-03 | Anritsu        | Spectrum Analyzer | MS2601B      | MT94589    | 0.01-2200MHz    | 12 Mo.     | 04/16/14 |
| THM-02 | Fluke          | Temp/Humid Meter  | 971          | 93490471   | N/A             | 24 Mo.     | 06/27/13 |
| REC-11 | HP / Agilent   | Spectrum Analyzer | E7405A       | US39110103 | 9Hz-26.5GHz     | 12 Mo      | 06/13/13 |

Note: All calibrated equipment is subject to periodic checks.

**10 TEST SECTIONS**

**10.1 AC Conducted Emissions**

The tests and limits are in accordance with FCC section 15.207 and RSS Gen section 7.2.2.

A computer-controlled analyzer was used to perform the conducted emissions measurements. The frequency range was divided into 500 subranges equally spaced on a logarithmic scale. The computer recorded the peak of each subrange. This data was then plotted on semi-log graph paper generated by the computer and plotter. Adjusting the positions of the cables and orientation of the test system then maximizes the highest emissions.

Mains Conducted emission measurements were performed using a 50 Ohm/50 uH Line Impedance Stabilization Network (LISN) as the pick-up device. Measurements were repeated on both leads within the power cord. If the EUT power cord exceeded 80 cm in length, the excess length of the power cord was made into a 30 to 40 cm bundle near the center of the cord. The LISN was placed on the floor at the base of the test platform and electrically bonded to the ground plane.

**FCC/IC Limits of Conducted Emissions at the AC Mains Ports**

| Frequency Range (MHz)   | Class B Limits (dBUV) |         |
|---|-----------------------|---------|
|   | Quasi-Peak            | Average |
| 0.150 - 0.50*   | 66 - 56               | 56 - 46 |
| 0.5 - 5.0   | 56                    | 46      |
| 5.0 - 30  | 60                    | 50      |
| * The limit decreases linearly with the logarithm of the frequency in this range. |                       |         |

The initial step in collecting conducted data is a peak detector scan and the plotting of the measurement range. Significant peaks are then marked as shown on the following table, and these signals are then measured with the quasi-peak detector. The following represents the worst case emissions from the host computer (with the EUT connected) power cord, after testing all modes of operation.

In accordance with the FCC rules regarding transmitters below 30 MHz.

The transmitter was tested with a dummy load under the following conditions:


- 1) First, the AC line conducted tests with the antenna attached were performed to determine if the EUT complies with the 15.207 limits outside of the transmitter's fundamental emission band.
- 2) The AC line conducted emissions were retested with a dummy load to make sure the device complies with the 15.207 limits inside the transmitter's fundamental emission band. Only the fundamental TX emission band needs to be retested. The load was 100 Ohm. This is the characteristic impedance of the antenna.

Test Date : May 23, 2014

QP readings are quasi-peak with a 9 kHz bandwidth and no video filter.

# RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEAS, Models RDR-6081AK0, 125 kHz RFID Card Reader

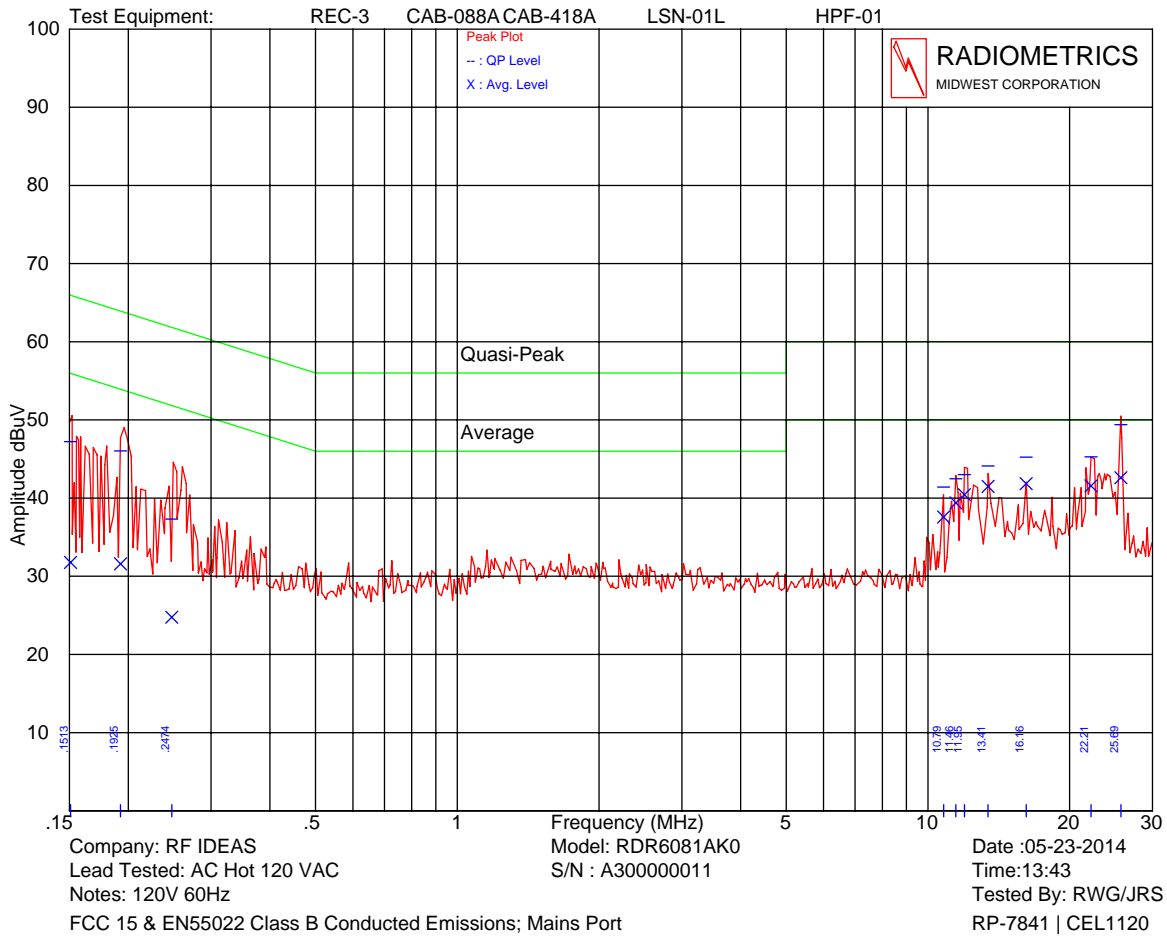


Model: RDR-6081AK0 with Antenna Installed

| Frequency MHz | QP Amplitude | QP Limit | Average Amplitude | Average Limit |
|---------------|--------------|----------|-------------------|---------------|
| 0.151         | 47.2Q        | 66.3     | 31.8              | 56.3          |
| 0.193         | 46.0Q        | 63.9     | 31.6              | 53.9          |
| 0.247         | 37.3Q        | 61.8     | 24.8              | 51.8          |
| 10.793        | 41.4Q        | 60.0     | 37.6              | 50.0          |
| 11.465        | 42.5Q        | 60.0     | 39.4              | 50.0          |
| 11.953        | 43.0Q        | 60.0     | 40.4              | 50.0          |
| 13.419        | 44.1Q        | 60.0     | 41.5              | 50.0          |
| 16.167        | 45.2Q        | 60.0     | 41.8              | 50.0          |
| 22.213        | 45.3Q        | 60.0     | 41.6              | 50.0          |
| 25.694        | 49.4Q        | 60.0     | 42.6              | 50.0          |



# RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEAS, Models RDR-6081AK0, 125 kHz RFID Card Reader

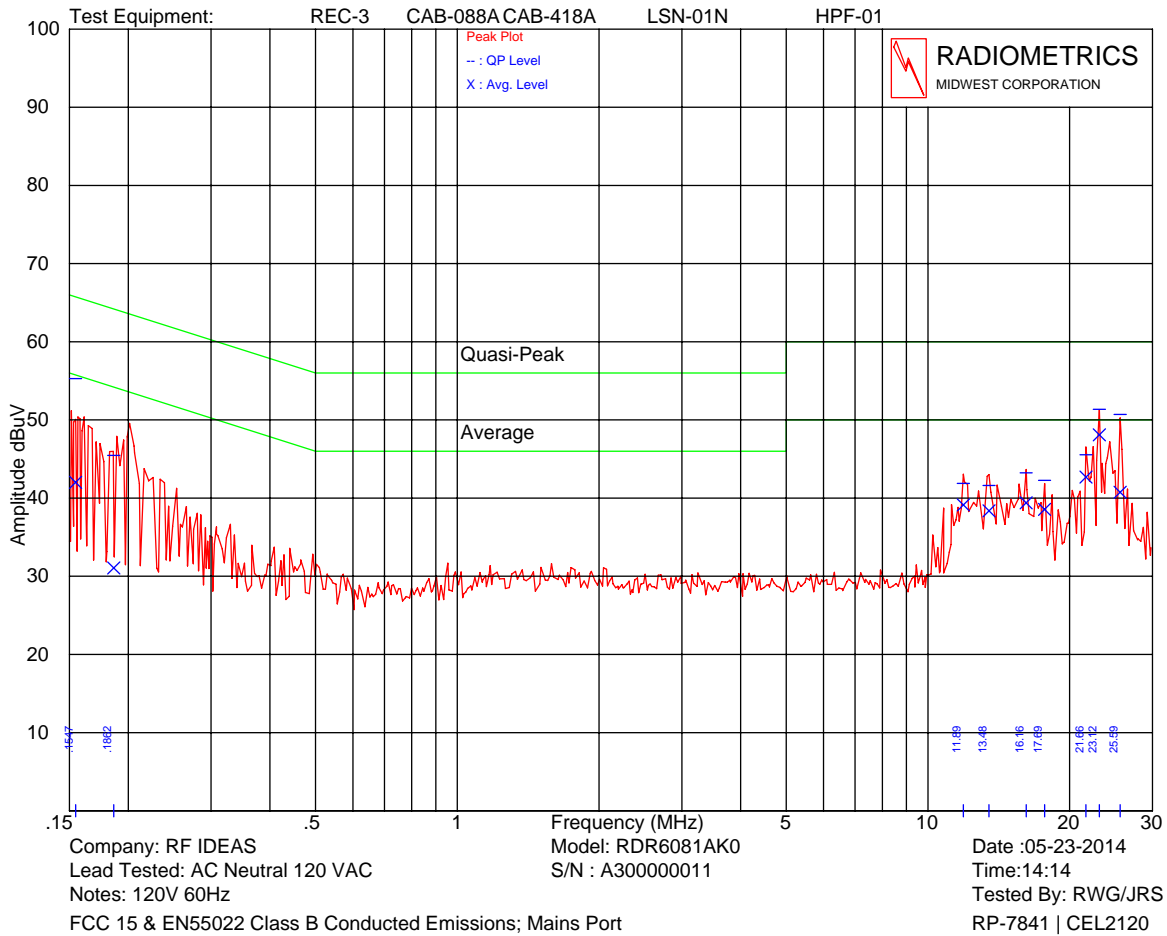


Model: RDR-6081AK0 with Antenna Installed

| Frequency MHz | QP Amplitude | QP Limit | Average Amplitude | Average Limit |
|---------------|--------------|----------|-------------------|---------------|
| 0.155         | 55.3Q        | 66.9     | 42.0              | 56.9          |
| 0.186         | 45.5Q        | 64.2     | 31.1              | 54.2          |
| 11.893        | 41.9Q        | 60.0     | 39.1              | 50.0          |
| 13.480        | 41.6Q        | 60.0     | 38.4              | 50.0          |
| 16.167        | 43.2Q        | 60.0     | 39.4              | 50.0          |
| 17.693        | 42.3Q        | 60.0     | 38.6              | 50.0          |
| 21.663        | 45.5Q        | 60.0     | 42.7              | 50.0          |
| 23.128        | 51.3Q        | 60.0     | 48.1              | 50.0          |
| 25.600        | 50.7Q        | 60.0     | 40.8              | 50.0          |

Judgment: Passed by 1.9 dB.

Figure 1. Conducted Emissions Test Setup (USB Reader)

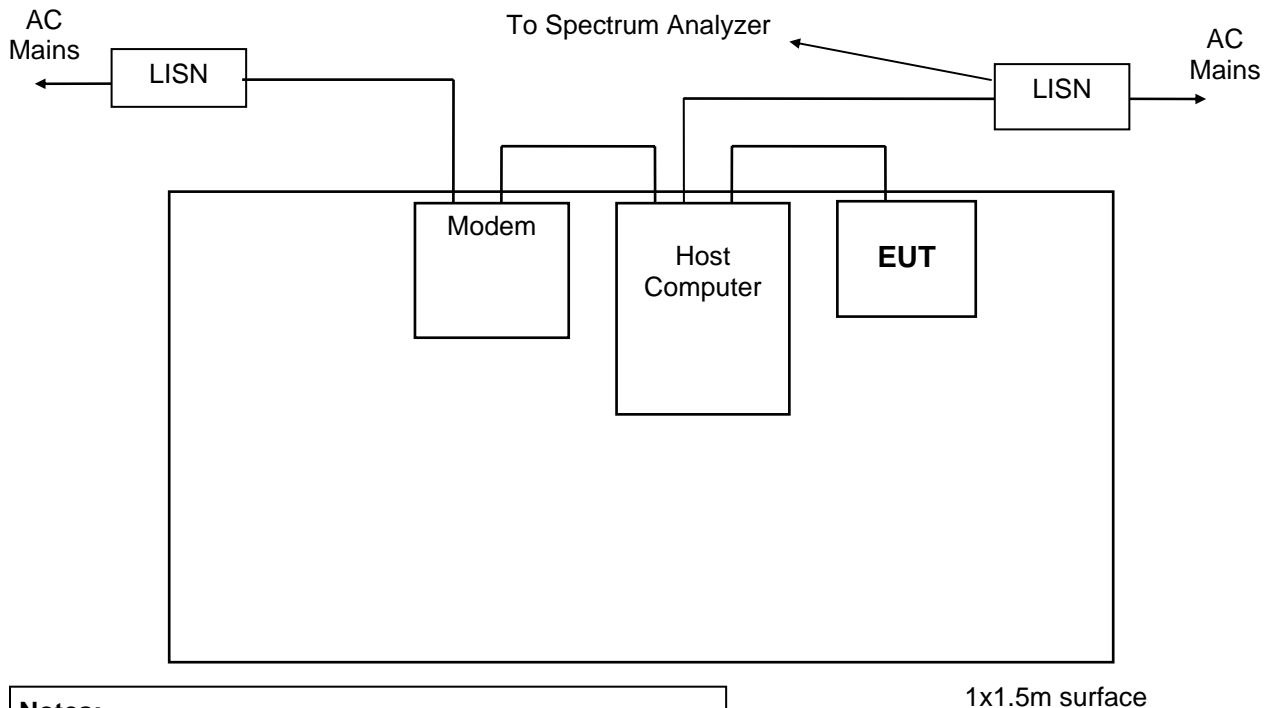**Notes:**

- LISN's at least 80 cm from EUT chassis
- Vertical conductive plane 40 cm from rear of table top
- EUT power cord bundled

1x1.5m surface

## 10.2 Radiated RF Emissions

Radiated emission measurements were performed with linearly polarized broadband antennas. The results obtained with these antennas can be correlated with results obtained with a tuned dipole antenna. The radiated emission measurements were performed with a spectrum analyzer. The bandwidth used from 150 kHz to 30 MHz is 9 or 10 kHz and the bandwidth from 30 MHz to 1000 MHz is 100 or 120 kHz. Above 1 GHz, a 1 MHz bandwidth is used. A 10 dB linearity check is performed prior to start of testing in order to determine if an overload condition exists.

From 30 to 1000 MHz, an Anritsu spectrum analyzer was used. For tests from 1 to 25 GHz, an HP 8566 spectrum analyzer was used. Figure 4 herein lists the details of the test equipment used during radiated emissions tests.

Final radiated emissions measurements were performed inside of an anechoic chamber at a test distance of 3 meters. The anechoic chamber is designated as Chamber E. This Chamber meets the Site Attenuation requirements of ANSI C63.4 and CISPR 16-1. Chamber E is located at 12 East Devonwood Ave. Romeoville, Illinois EMI test lab.

# RADIOMETRICS MIDWEST CORPORATION - EMC Test Report

Testing of RF IDEas, Models RDR-6081AK0, 125 kHz RFID Card Reader

The entire frequency range from 30 to 1000 MHz was slowly scanned with particular attention paid to those frequency ranges which appeared high. Measurements were performed using two antenna polarizations, (vertical and horizontal). The worst case emissions were recorded. All measurements may be performed using either the peak, average or quasi-peak detector functions. If the peak detector data exceeds or is marginally close to the limits, the measurements are repeated using a quasi-peak detector or average function as required by the specification for final determination of compliance.

The detected emission levels were maximized by rotating the EUT, adjusting the positions of all cables, and by scanning the measurement antenna from 1 to 4 meters above the ground.

### Radiated Emissions Field Strength Limits

| Frequency Range (MHz) | Test Distance (meters) | Class B Limits (dBuV/m) |         |      |
|-----------------------|------------------------|-------------------------|---------|------|
|                       |                        | QP                      | Average | Peak |
| 0.009-0.490           | 300                    | 2400/F(kHz)             | N/A     | N/A  |
| 0.490-1.705           | 30                     | 24000/F(kHz)            | N/A     | N/A  |
| 1.705-30.0            | 30                     | 30                      | N/A     | N/A  |
| 30 - 230              | 10                     | 30                      | N/A     | N/A  |
| 230 - 1000            | 10                     | 37                      | N/A     | N/A  |
| 1000 - 3000           | 3                      | N/A                     | 50      | 70   |
| >3000                 | 3                      | N/A                     | 54      | 74   |

An Average detector can be used for 9-90 kHz and 110-490 kHz.

## 10.2.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and by subtracting the Amplifier Gain from the measured reading. The basic equation is as follows:

$$FS = RA + AF + CF - AG$$

Where: FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

## 10.2.2 Radiated Emissions Test Results

|               |   |
|---------------|---|
| Test Date     | 05/23/2014  |
| EUT           | RDR-6081AK0; Serial Number A300000011                                     |
| Test Distance | 3 Meters  |
| Specification | FCC Part 15 Subpart C & RSS-210   |
| Notes         | Cable and Amp Factors = cable loss – preamp gain                          |
| Abbreviations | P = peak; Q = QP Pol = Antenna Polarization; V = Vertical; H = Horizontal |

| Freq. MHz | Meter Reading dBuV | Decet. | Ant. Pol. | Ant Factor | Cable & Amp Factors | Dist Fact dB | EUT dBuV/m | Limit dBuV/m | Margin Under Limit dB |
|-----------|--------------------|--------|-----------|------------|---------------------|--------------|------------|--------------|-----------------------|
| 34.4      | 30.9               | P      | H         | 16.6       | -18.4               | 0.0          | 29.1       | 40.0         | 10.9                  |
| 38.8      | 32.4               | Q      | H         | 16.3       | -18.3               | 0.0          | 30.4       | 40.0         | 9.6                   |
| 43.5      | 36.8               | P      | H         | 15.7       | -18.3               | 0.0          | 34.2       | 40.0         | 5.8                   |
| 46.5      | 37.6               | Q      | H         | 15.1       | -18.3               | 0.0          | 34.4       | 40.0         | 5.6                   |
| 55.4      | 36.0               | Q      | H         | 12.4       | -18.1               | 0.0          | 30.3       | 40.0         | 9.7                   |
| 56.3      | 36.1               | Q      | H         | 12.0       | -18.1               | 0.0          | 30.0       | 40.0         | 10.0                  |

**RADIOMETRICS MIDWEST CORPORATION - EMC Test Report**


Testing of RF IDEas, Models RDR-6081AK0, 125 kHz RFID Card Reader

| Freq. MHz | Meter Reading dBuV | Dect. | Ant. Pol. | Ant Factor | Cable & Amp Factors | Dist Fact dB | EUT dBuV/m | Limit dBuV/m | Margin Under Limit dB |
|-----------|--------------------|-------|-----------|------------|---------------------|--------------|------------|--------------|-----------------------|
| 58.6      | 35.3               | Q     | H         | 11.1       | -18.1               | 0.0          | 28.3       | 40.0         | 11.7                  |
| 63.9      | 42.1               | P     | H         | 9.3        | -18.1               | 0.0          | 33.3       | 40.0         | 6.7                   |
| 65.2      | 36.0               | P     | H         | 8.9        | -18.1               | 0.0          | 26.8       | 40.0         | 13.2                  |
| 70.2      | 34.5               | P     | H         | 7.7        | -18.1               | 0.0          | 24.1       | 40.0         | 15.9                  |
| 72.9      | 40.7               | P     | H         | 7.3        | -18.1               | 0.0          | 29.9       | 40.0         | 10.1                  |
| 78.5      | 45.2               | P     | H         | 7.0        | -18.0               | 0.0          | 34.2       | 40.0         | 5.8                   |
| 99.8      | 31.0               | P     | H         | 9.2        | -17.9               | 0.0          | 22.3       | 43.5         | 21.2                  |
| 168.1     | 34.6               | P     | H         | 9.7        | -17.6               | 0.0          | 26.7       | 43.5         | 16.8                  |
| 192.3     | 34.7               | P     | H         | 9.5        | -17.4               | 0.0          | 26.8       | 43.5         | 16.7                  |
| 203.8     | 34.2               | P     | H         | 10.2       | -17.4               | 0.0          | 27.0       | 43.5         | 16.5                  |
| 215.9     | 38.6               | P     | H         | 11.5       | -17.4               | 0.0          | 32.7       | 43.5         | 10.8                  |
| 240.1     | 39.9               | P     | H         | 12.2       | -17.3               | 0.0          | 34.8       | 46.0         | 11.2                  |
| 260.6     | 35.4               | P     | H         | 12.9       | -17.4               | 0.0          | 30.9       | 46.0         | 15.1                  |
| 288.1     | 36.3               | P     | H         | 12.9       | -17.4               | 0.0          | 31.8       | 46.0         | 14.2                  |
| 305.6     | 31.8               | P     | H         | 13.7       | -17.3               | 0.0          | 28.2       | 46.0         | 17.8                  |
| 320.0     | 31.1               | P     | H         | 14.2       | -17.3               | 0.0          | 28.0       | 46.0         | 18.0                  |
| 400.0     | 30.8               | P     | H         | 16.0       | -17.2               | 0.0          | 29.6       | 46.0         | 16.4                  |
| 431.9     | 31.1               | P     | H         | 17.1       | -17.1               | 0.0          | 31.1       | 46.0         | 14.9                  |
| 498.1     | 34.3               | P     | H         | 17.4       | -16.8               | 0.0          | 34.9       | 46.0         | 11.1                  |
| 521.3     | 31.5               | P     | H         | 19.1       | -16.6               | 0.0          | 34.0       | 46.0         | 12.0                  |
| 528.8     | 37.7               | P     | H         | 18.9       | -16.6               | 0.0          | 40.0       | 46.0         | 6.0                   |
| 576.3     | 30.9               | P     | H         | 20.4       | -16.5               | 0.0          | 34.8       | 46.0         | 11.2                  |
| 625.0     | 33.1               | P     | H         | 19.0       | -16.2               | 0.0          | 35.9       | 46.0         | 10.1                  |
| 721.3     | 36.0               | P     | H         | 19.7       | -15.7               | 0.0          | 40.0       | 46.0         | 6.0                   |
| 816.3     | 30.3               | P     | H         | 20.9       | -15.3               | 0.0          | 35.9       | 46.0         | 10.1                  |
| 912.5     | 30.7               | P     | H         | 22.3       | -15.0               | 0.0          | 38.0       | 46.0         | 8.0                   |
| 38.8      | 37.5               | P     | V         | 16.3       | -18.3               | 0.0          | 35.5       | 40.0         | 4.5                   |
| 59.2      | 43.9               | P     | V         | 11.0       | -18.1               | 0.0          | 36.8       | 40.0         | 3.2                   |
| 72.9      | 40.3               | P     | V         | 7.3        | -18.1               | 0.0          | 29.5       | 40.0         | 10.5                  |
| 81.7      | 44.2               | P     | V         | 7.1        | -18.0               | 0.0          | 33.3       | 40.0         | 6.7                   |
| 99.8      | 37.2               | P     | V         | 9.2        | -17.9               | 0.0          | 28.5       | 43.5         | 15.0                  |
| 180.1     | 36.1               | P     | V         | 9.3        | -17.5               | 0.0          | 27.9       | 43.5         | 15.6                  |
| 195.0     | 37.3               | P     | V         | 9.8        | -17.4               | 0.0          | 29.7       | 43.5         | 13.8                  |
| 215.9     | 35.1               | P     | V         | 11.5       | -17.4               | 0.0          | 29.2       | 43.5         | 14.3                  |
| 240.1     | 35.7               | P     | V         | 12.2       | -17.3               | 0.0          | 30.6       | 46.0         | 15.4                  |
| 250.0     | 35.5               | P     | V         | 12.4       | -17.4               | 0.0          | 30.5       | 46.0         | 15.5                  |
| 263.8     | 31.7               | P     | V         | 12.9       | -17.4               | 0.0          | 27.2       | 46.0         | 18.8                  |
| 288.1     | 33.0               | P     | V         | 12.9       | -17.4               | 0.0          | 28.5       | 46.0         | 17.5                  |
| 300.0     | 32.2               | P     | V         | 13.3       | -17.3               | 0.0          | 28.2       | 46.0         | 17.8                  |
| 320.0     | 31.0               | P     | V         | 14.2       | -17.3               | 0.0          | 27.9       | 46.0         | 18.1                  |
| 330.0     | 30.7               | P     | V         | 14.3       | -17.2               | 0.0          | 27.8       | 46.0         | 18.2                  |
| 390.6     | 31.1               | P     | V         | 15.5       | -17.2               | 0.0          | 29.4       | 46.0         | 16.6                  |
| 420.0     | 34.3               | P     | V         | 17.0       | -17.1               | 0.0          | 34.2       | 46.0         | 11.8                  |
| 465.0     | 35.0               | P     | V         | 17.1       | -17.0               | 0.0          | 35.1       | 46.0         | 10.9                  |
| 480.0     | 31.6               | P     | V         | 17.5       | -16.9               | 0.0          | 32.2       | 46.0         | 13.8                  |
| 528.8     | 38.1               | P     | V         | 18.9       | -16.6               | 0.0          | 40.4       | 46.0         | 5.6                   |
| 576.3     | 30.6               | P     | V         | 20.4       | -16.5               | 0.0          | 34.5       | 46.0         | 11.5                  |
| 625.0     | 30.6               | P     | V         | 19.0       | -16.2               | 0.0          | 33.4       | 46.0         | 12.6                  |
| 721.3     | 35.4               | P     | V         | 19.7       | -15.7               | 0.0          | 39.4       | 46.0         | 6.6                   |
| 912.5     | 30.9               | P     | V         | 22.3       | -15.0               | 0.0          | 38.2       | 46.0         | 7.8                   |

Judgment: Passed by at least 3.2 dB

**Figure 2. Drawing of Radiated Emissions Test Setup**

Chamber E, anechoic

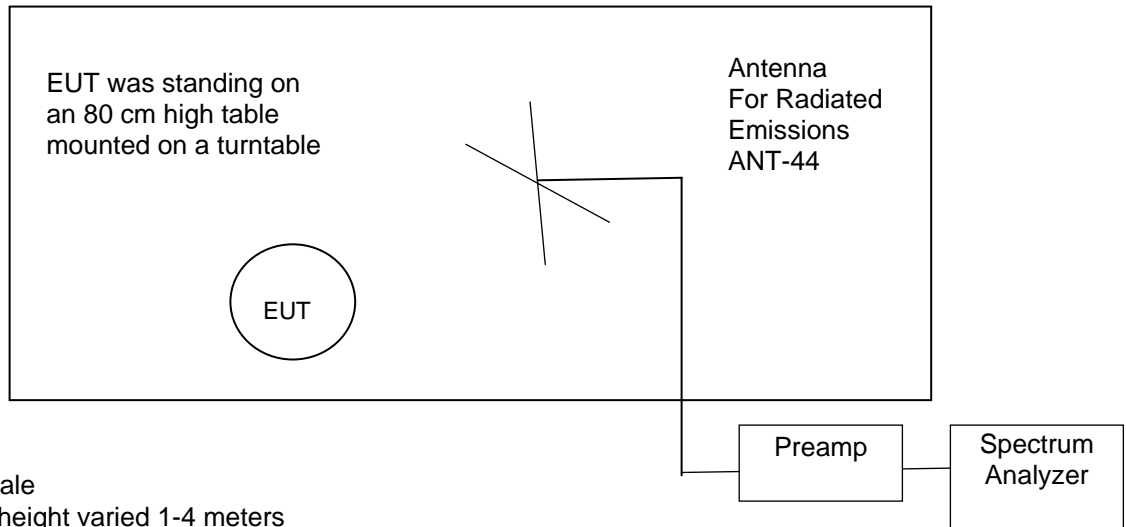

**Notes:**

- Not to Scale
- Antenna height varied 1-4 meters
- Distance from antenna to tested system is 3 meters
- AC cords not shown. They are connected to AC outlet with low-pass filter on turntable

| Frequency Range | Receive Antenna | Pre-Amplifier | Spectrum Analyzer |
|-----------------|-----------------|---------------|-------------------|
| 0.01 to 30 MHz  | ANT-53          | None          | REC-11            |
| 30 to 1000 MHz  | ANT-44          | AMP-22        | REC-11            |

**10.3 Magnetic Field Measurements and Decay Factor Calculations**

Radiated emission measurements are performed with a shielded loop antenna. An EMCO Loop antenna was used. The antenna was rotated in order to find the maximize readings.

The distance factor in (dB) =  $DE \cdot 20 \cdot \log(TD/SD)$

Where: DE = Decay Exponent (2.0 is used for this)

TD = Test distance in meters. This is usually 3 meters

SD = Specification Distance in meters

For frequencies below 490 kHz, the specification distance is 300 meters below 490 kHz. The Distance correction factor at 3 meters is -80 dB for frequencies below 490 kHz.

For frequencies above 490 kHz, the specification distance is 30. The Distance correction factor at 3 meters is -40 dB.

**10.3.1 Magnetic Field Radiated Emissions Results (0.009 to 30 MHz)**

|               |   |
|---------------|---|
| Test Date     | 05/23/2014                                      |
| Test Distance | 3 Meters  |
| Specification | FCC 15 & RSS-GEN                                |
| Notes         | A shielded Loop Antenna was used for this test. |

The distance correction factor is calculated as follows:

Distance factor (dB) =  $(\text{Decay Exponent}) \cdot 20 \cdot \log(TD/SD)$

The decay exponent is 2 for 125 kHz, below 2 MHz.

TD is the actual test distance in meters. SD is the specification distance in meters.

From 9 kHz to 490 kHz, the Specification Distance is 300m therefore the distance factor is  $2 \cdot 20 \cdot \log(300/3) = 80$  dB. .

From 490 kHz to 490 kHz, the Specification Distance is 300m therefore the distance factor is  $2 \cdot 20 \cdot \log(300/3) = 80$  dB. .

| Freq (kHz) | Peak Analyzer reading dBuV | Loop Ant Factor | Dist (m) | Decay exp | Cable Loss dB | FCC Distance factor dB | Field Strength dBuV/m | FCC/Can Limit dBuV/m | Margin under limit |
|------------|----------------------------|-----------------|----------|-----------|---------------|------------------------|-----------------------|----------------------|--------------------|
| 125.0      | 66.7                       | 19.1            | 3.0      | 3.0       | 0.1           | -80.0                  | 5.9                   | 25.7                 | 19.8               |
| 250.0      | 34.0                       | 18.9            | 3.0      | 3.0       | 0.1           | -80.0                  | -27.0                 | 19.6                 | 46.6               |
| 375.0      | 33.0                       | 18.9            | 3.0      | 3.0       | 0.1           | -80.0                  | -28.0                 | 16.1                 | 44.1               |
| 500.0      | 31.0                       | 18.8            | 3.0      | 3.0       | 0.1           | -40.0                  | 9.9                   | 33.6                 | 23.7               |
| 625.0      | 30.0                       | 18.7            | 3.0      | 3.0       | 0.1           | -40.0                  | 8.8                   | 31.7                 | 22.9               |
| 750.0      | 28.0                       | 18.6            | 3.0      | 3.0       | 0.1           | -40.0                  | 6.7                   | 30.1                 | 23.4               |
| 875.0      | 25.0                       | 18.6            | 3.0      | 3.0       | 0.2           | -40.0                  | 3.8                   | 28.8                 | 25.0               |
| 1000.0     | 23.0                       | 18.5            | 3.0      | 3.0       | 0.2           | -40.0                  | 1.7                   | 27.6                 | 25.9               |
| 1125.0     | 23.0                       | 18.4            | 3.0      | 3.0       | 0.2           | -40.0                  | 1.6                   | 26.6                 | 25.0               |
| 1250.0     | 20.0                       | 18.4            | 3.0      | 3.0       | 0.2           | -40.0                  | -1.4                  | 25.7                 | 27.1               |

Judgement: Passed by 19.8 dB.

No other emissions were detected from 10 kHz to 30 MHz.

### 10.4 Occupied Bandwidth Data

The occupied bandwidth of the RF output was measured using a spectrum analyzer. The bandwidth was measured using the peak detector function and a narrow resolution bandwidth.

A broadband antenna was used to receive the modulated signal. The spectrum analyzer was set to the MAX HOLD mode to record the worst case of the modulation. The spectrum analyzer display was digitized and plotted. A limit was drawn on the plots based on the level of the modulated carrier. The plots of the occupied bandwidth for the EUT are supplied on the following page.

|         |                 |
|---------|-----------------|
|         | 20 dB EBW (99%) |
| Product | 125 kHz Signal  |
| USB     | 3.45 kHz        |

Judgement: Pass

Figure 3. Occupied Bandwidth Plot 125 kHz

