

Appendix C

SAR System Validation Data

of

Product Name

Notebook Personal Computer

Model

V100

(with SIERRA EVDO Module, Model:MC5725V)

(with WLAN a/b/g Module, INTEL, Model:WM3945ABG)

(with Bluetooth Module, BILLIONTON, Model:GUBTCR42M)

Brand: GETAC

1. 835 MHz System Validation Data

Report Date : 14-JAN-2008
Measurement Date : 14-JAN-2008

Product Data

Device Name : Dipole-835
Serial No. : Validation
Type : Dipole
Model : Standard
Frequency : 835.00 MHz
Max. Transmit Pwr : 1 W
Drift Time : 0 min(s)
Length : 161 mm
Width : 3.6 mm
Depth : 89.8 mm
Antenna Type : Internal
Power Drift-Start : 9.021 W/kg
Power Drift-Finish: 8.952 W/kg
Power Drift (%) : -0.767

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Location : Center

Tissue Data

Type : HEAD
Serial No. : 835HEAD
Frequency : 835.00 MHz
Last Calib. Date : 14-JAN-2008
Temperature : 22.10 °C
Ambient Temp. : 22.40 °C
Humidity : 51.00 RH%
Epsilon : 42.15 F/m
Sigma : 0.91 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field Probe
Model : ALS-E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 09-Jul-2007
Frequency : 835.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 6.6
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Ambient Temp. : 22.40 °C


Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm,
z=4mm

Other Data

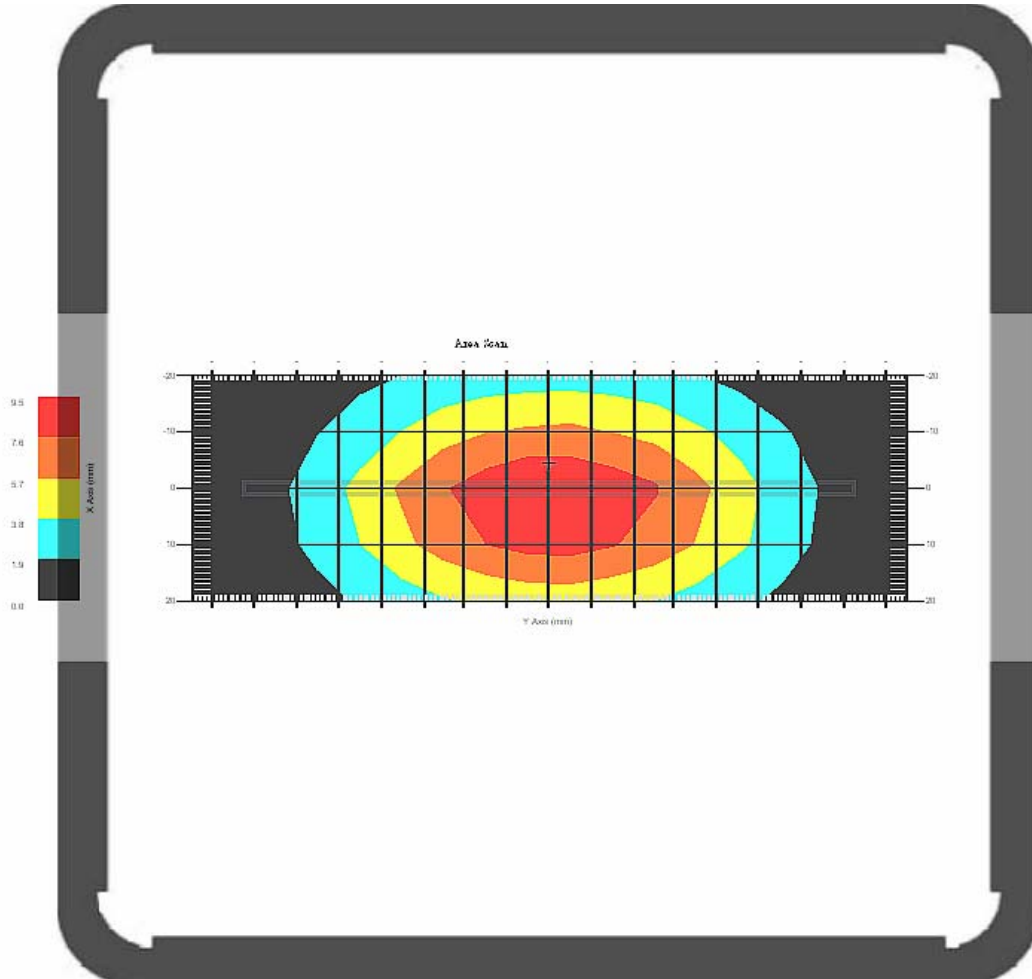


1 gram SAR value : 8.991 W/kg
10 gram SAR value : 5.864 W/kg
Area Scan Peak SAR : 9.499 W/kg
Zoom Scan Peak SAR : 13.312 W/kg

Area Scan Plot

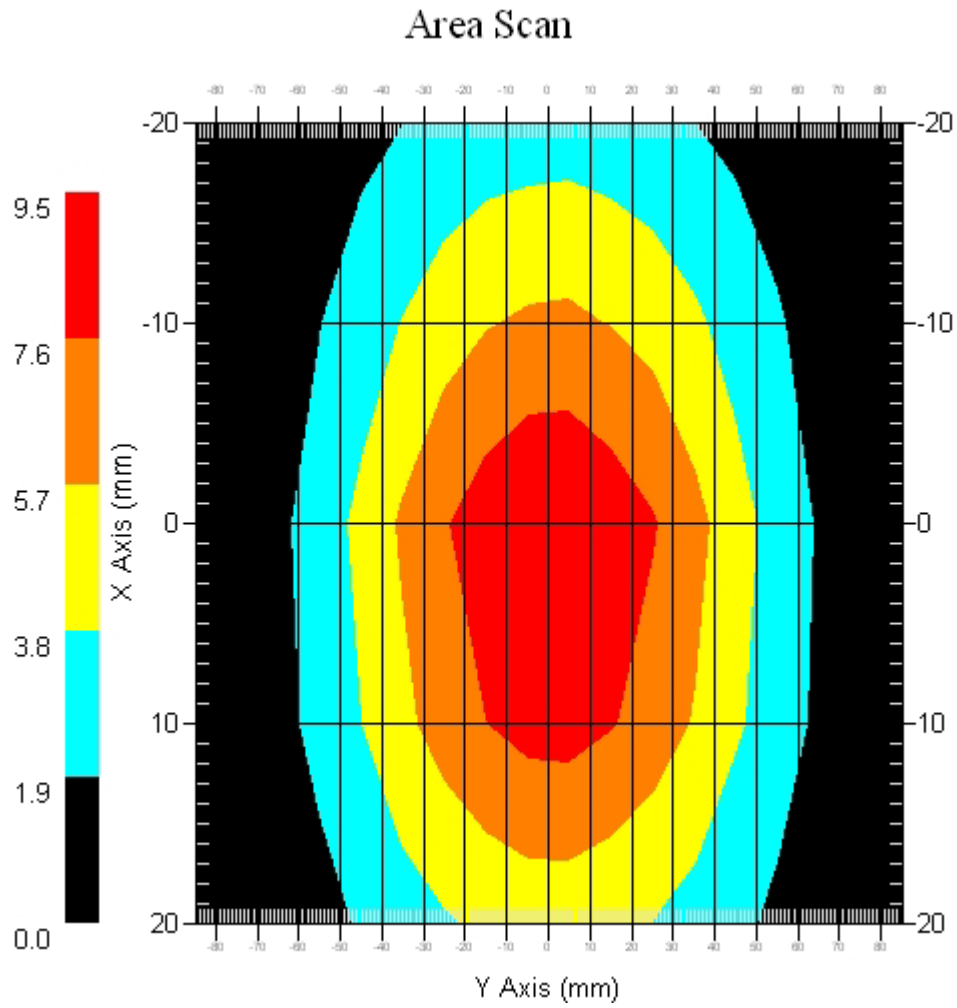

SAR-Z Axis
at Hotspot x:0.00 y:0.00

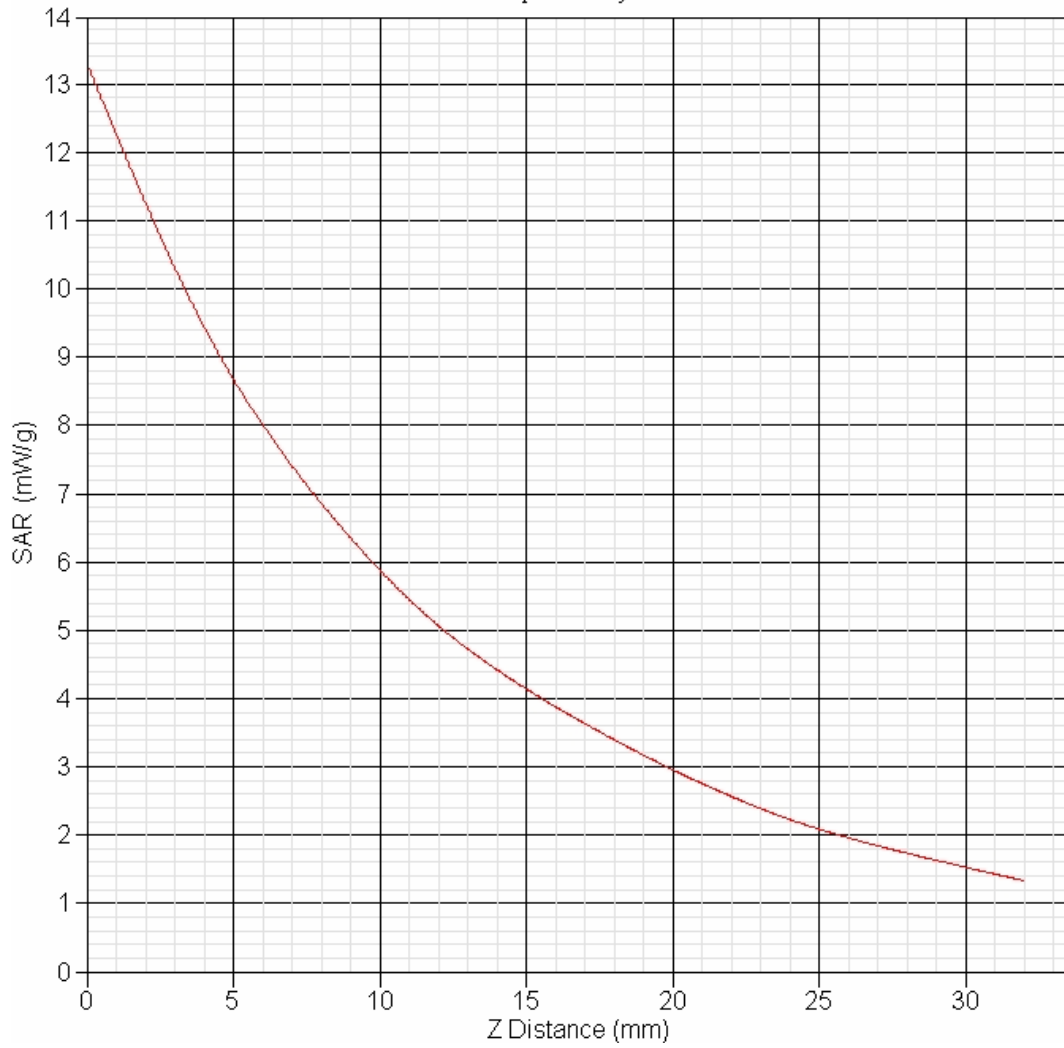

2. 1900 MHz System Validation Data

Report Date : 14-JAN-2008
Measurement Date : 14-JAN-2008

Product Data

Device Name : Dipole-1900
Serial No. : Validation
Type : Dipole
Model : Standard
Frequency : 1900.00 MHz
Max. Transmit Pwr : 1 W
Drift Time : 0 min(s)
Length : 68 mm
Width : 3.6 mm
Depth : 39.5 mm
Antenna Type : Internal
Power Drift-Start : 46.820 W/kg
Power Drift-Finish: 47.024 W/kg
Power Drift (%) : 0.436

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Location : Center

Tissue Data

Type : HEAD
Serial No. : 1900
Frequency : 1900.00 MHz
Last Calib. Date : 14-JAN-2008
Temperature : 22.10 °C
Ambient Temp. : 22.40 °C
Humidity : 51.00 RH%
Epsilon : 40.00 F/m
Sigma : 1.41 S/m
Density : 1000.00 kg/cu. m

Probe Data


Name : E-field Probe
Model : ALS-E-020
Type : E-Field Triangle
Serial No. : 266
Last Calib. Date : 09-Jul-2007
Frequency : 1900.00 MHz
Duty Cycle Factor: 1
Conversion Factor: 5.5
Probe Sensitivity: 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point: 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Ambient Temp. : 22.40 °C


Zoom Scan : 5x5x8 : Measurement x=8mm, y=8mm,
z=4mm

Other Data

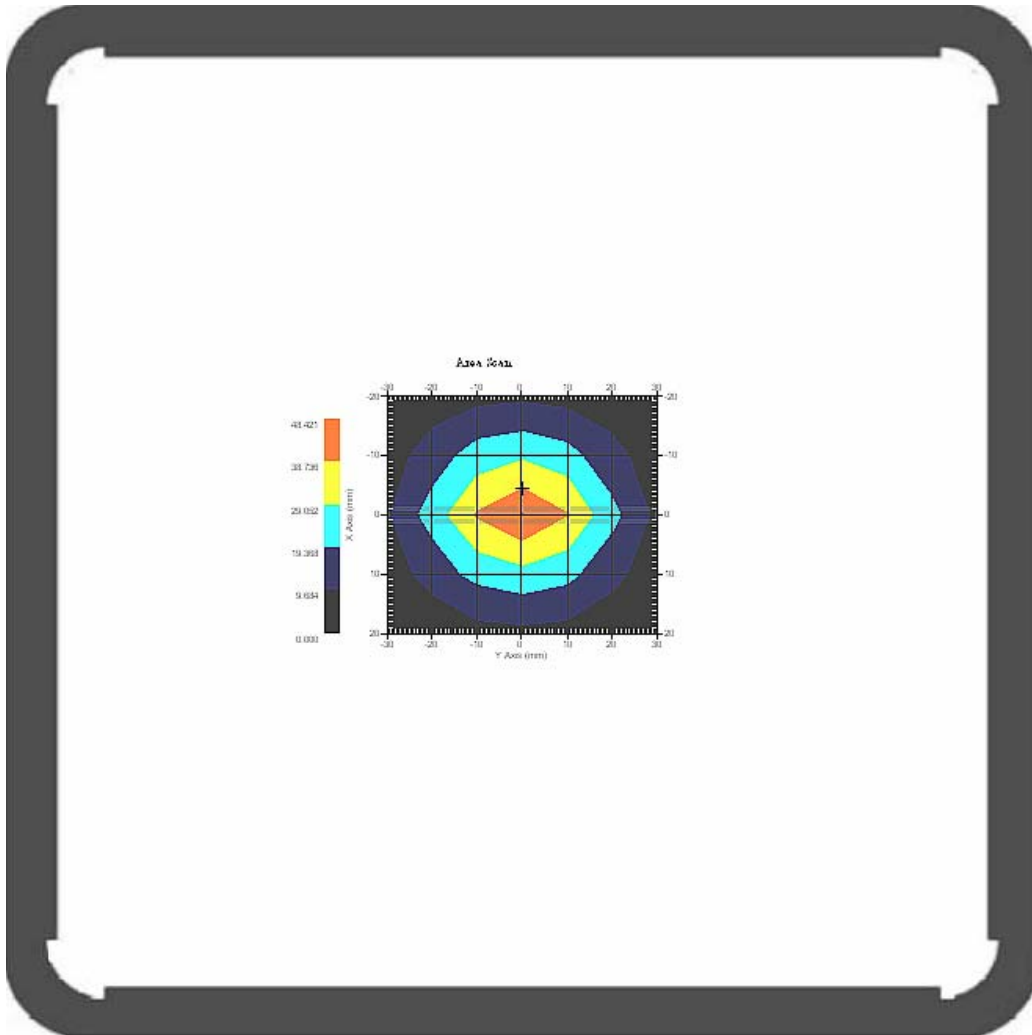

1 gram SAR value : 40.864 W/kg
10 gram SAR value : 20.197 W/kg
Area Scan Peak SAR : 48.421 W/kg
Zoom Scan Peak SAR : 81.302 W/kg

Area Scan Plot

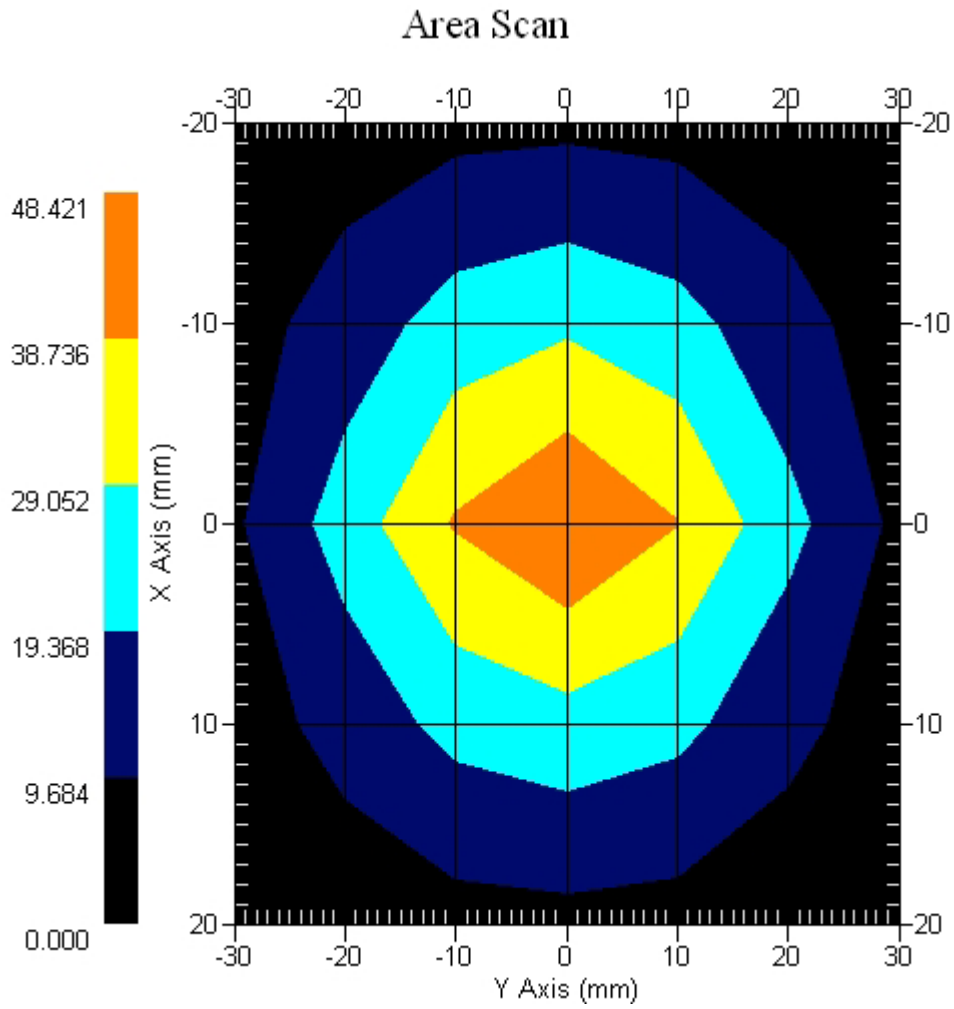

SAR-Z Axis
at Hotspot x:0.00 y:0.00

