



**FCC 47 CFR PART 15 SUBPART E**

**TEST REPORT**

**For**

**NOTEBOOK COMPUTER**

**Model: X500**

**Trade Name: Getac**

*Issued to*

**Getac Technology Corp.**

**No.1, R&D Road 2, Hsinchu Science Based Industrial Park,  
Hsinchu, Taiwan**

*Issued by*

**Compliance Certification Services Inc.**

**No.11, Wu-Gong 6th Rd., Wugu Industrial Park,  
New Taipei City 248, Taiwan (R.O.C.)**

**<http://www.ccsrf.com>**

**[service@ccsrf.com](mailto:service@ccsrf.com)**

**Issued Date: July 20, 2011**



---

*Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



**Revision History**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	July 20, 2011	Initial Issue	ALL	Eunice Shen



## **TABLE OF CONTENTS**

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>4</b>
<b>2. EUT DESCRIPTION .....</b>	<b>5</b>
<b>3. TEST METHODOLOGY .....</b>	<b>7</b>
3.1 EUT CONFIGURATION .....	7
3.2 EUT EXERCISE .....	7
3.3 GENERAL TEST PROCEDURES .....	7
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS .....	8
3.5 DESCRIPTION OF TEST MODES .....	9
<b>4. INSTRUMENT CALIBRATION.....</b>	<b>10</b>
4.1 MEASURING INSTRUMENT CALIBRATION .....	10
4.2 MEASUREMENT EQUIPMENT USED .....	10
<b>5. FACILITIES AND ACCREDITATIONS .....</b>	<b>11</b>
5.1 FACILITIES .....	11
5.2 EQUIPMENT .....	11
5.3 TABLE OF ACCREDITATIONS AND LISTINGS .....	12
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>13</b>
6.1 SETUP CONFIGURATION OF EUT .....	13
6.2 SUPPORT EQUIPMENT .....	13
<b>7. FCC PART 15 REQUIREMENTS.....</b>	<b>14</b>
7.1 DYNAMIC FREQUENCY SELECTION.....	14
<b>APPENDIX II PHOTOGRAPHS OF TEST SETUP.....</b>	<b>53</b>
<b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b>	



# 1. TEST RESULT CERTIFICATION

**Applicant:** Getac Technology Corp.  
No.1, R&D Road 2, Hsinchu Science Based Industrial Park,  
Hsinchu, Taiwan

**Equipment Under Test:** NOTEBOOK COMPUTER

**Trade Name:** Getac

**Model:** X500

**Date of Test:** July 3 ~ 4, 2011

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart E	No non-compliance noted

### We hereby certify that:

Compliance Certification Services Inc. tested the above equipment. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Reviewed by:

---

Rex Lai  
Section Manager  
Compliance Certification Services Inc.

---

Gina Lo  
Section Manager  
Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	NOTEBOOK COMPUTER			
<b>Trade Name</b>	Getac			
<b>Model Number</b>	X500			
<b>Model Discrepancy</b>	N/A			
<b>WLAN Module Trade Name / Model</b>	Intel / Intel Advanced-N 6200 WiFi Card			
<b>Received Date</b>	June 2, 2011			
<b>Power Supply</b>	<p>1. Power Adapter: Getac / ADM-6019M I/P: 100-240V, 1.5A, 50-60Hz O/P: 19V, 3.16A</p> <p>2. VDC from Battery: Mode: BP-LC2600/33-01SI Rating: DC 11.1V, 7800mAh, 87Wh</p>			
<b>Operating Frequency Range &amp; Number of Channels</b>		<b>Mode</b>	<b>Frequency Range (MHz)</b>	<b>Number of Channels</b>
	UNII Band I	IEEE 802.11a	5180 – 5240	4 Channels
		IEEE 802.11n HT 20 MHz	5180 – 5240	4 Channels
		IEEE 802.11n HT 40 MHz	5190 – 5230	2 Channels
	UNII Band II	IEEE 802.11a	5260 - 5320	4 Channels
		IEEE 802.11n HT 20 MHz	5260 - 5320	4 Channels
		IEEE 802.11n HT 40 MHz	5270 - 5310	2 Channels
	UNII Band III	IEEE 802.11a	5500 - 5700	11 Channels
		IEEE 802.11n HT 20 MHz	5500 – 5700	11 Channels
IEEE 802.11n HT 40 MHz		5510 - 5670	5 Channels	
<b>Transmit Power</b>	<p>IEEE 802.11a : 5180MHz ~ 5240MHz : 14.05 dBm (0.0254W) 5260MHz ~ 5320MHz : 17.25 dBm (0.0531W) 5500MHz ~ 5700MHz : 17.47 dBm (0.0558W)</p> <p>IEEE 802.11n HT20 : 5180MHz ~ 5240MHz : 10.25 dBm (0.0106W) 5260MHz ~ 5320MHz : 15.68 dBm (0.0370W) 5500MHz ~ 5700MHz : 16.46 dBm (0.0443W)</p> <p>IEEE 802.11n HT40 : 5190MHz ~ 5230MHz : 12.38 dBm (0.0173W) 5270MHz ~ 5310MHz : 15.56 dBm (0.0360W) 5510MHz ~ 5670MHz : 17.22 dBm (0.0527W)</p>			
<b>Modulation Technique</b>	OFDM (QPSK, BPSK, 16-QAM, 64-QAM)			
<b>Transmit Data Rate</b>	<p>IEEE 802.11a mode: 54, 48, 36, 24, 18, 12, 9, 6 Mbps</p> <p>IEEE 802.11n HT 20 MHz mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps)</p> <p>IEEE 802.11n HT 40 MHz mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps)</p>			
<b>Antenna Specification</b>	Antenna Gain:1.66 dBi			
<b>Antenna Designation</b>	PIFA Antenna			



**Operation Frequency:**

UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII)	
CHANNEL	MHz
36	5180
38	5190
40	5200
44	5220
46	5230
48	5240
52	5260
54	5270
56	5280
60	5300
62	5310
64	5320
100	5500
102	5510
104	5520
108	5540
110	5550
112	5560
116	5580
118	5590
120	5600
124	5620
126	5630
128	5640
132	5660
134	5670
136	5680
140	5700
149	5745
153	5765
157	5785
161	5805
165	5825

***Remark:***

- 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.*
- 2. This submittal(s) (test report) is intended for FCC ID: **MAU045** filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.*



### **3. TEST METHODOLOGY**

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4. Radiated testing was performed at an antenna to EUT distance 3 meters.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT is operated in the engineering mode to fix the Tx frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is positioned at 0.8 m above the ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

##### **Radiated Emissions**

The EUT is placed on the turntable, which is 0.8 m above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.





### 3.5 DESCRIPTION OF TEST MODES

The EUT (model: X500) had been tested under operating condition.

The EUT comes with one battery and one power adapter for sale. After the preliminary test, the EUT with power adapter was found to emit the worst emissions and therefore had been tested under standby condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

**IEEE 802.11n HT 20 MHz mode / 5260 ~ 5320MHz:**

Channel (5300MHz) with 6.5Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz:**

Channel (5310MHz) with 13.5Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz:**

Channel (5500MHz) with 6.5Mbps data rate were chosen for full testing.

**IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz:**

Channel (5510MHz) with 13.5Mbps data rate were chosen for full testing.



## 4. INSTRUMENT CALIBRATION

### 4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 4.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

*Remark: Each piece of equipment is scheduled for calibration once a year.*

Dynamic Frequency Selection				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Rohde&Schwarz	FSEK 30	100264	05/24/2012
Signal Generator	Agilent	E8267C	US42340162	08/08/2011



## **5. FACILITIES AND ACCREDITATIONS**

### **5.1 FACILITIES**

All measurement facilities used to collect the measurement data are located at

- No.199, Chungshen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.  
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
- No.11, Wu-Gong 6th Rd., Wugu Industrial Park, New Taipei City 248, Taiwan (R.O.C.)  
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
- No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.  
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### **5.2 EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.




Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



### 5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	TOSHIBA	Satellite 1110	Y2382909	FCC DoC	N/A	AC I/P: Unshielded, 1.8m with a core DC O/P: Unshielded, 1.8m

**Remark:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



## 7. FCC PART 15 REQUIREMENTS

### 7.1 DYNAMIC FREQUENCY SELECTION

#### LIMIT

According to §15.407 (h) and FCC 06-96 appendix “compliance measurement procedures for unlicensed-national information infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection”.

**Table 1: Applicability of DFS requirements prior to use of a channel**

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client(with radar detection)
Non-Occupancy Period	Yes	Yes	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
Uniform Spreading	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

**Table 2: Applicability of DFS requirements during normal operation**

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client(with radar detection)
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes

**Table 3: Interference Threshold values, Master or Client incorporating In-Service**

Maximum Transmit Power	Value (see note)
≥200 Milliwatt	-64 dBm
< 200 Milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.



**Table 4: DFS Response requirement values**

Parameter	Value
Non-occupancy period	30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds
Channel Closing Transmission Time	200 milliseconds + approx. 60 milliseconds over remaining 10 second period
U-NII Detection Bandwidth	Minimum 80% of the UNII 99% transmission power bandwidth. See Note 3.

The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate channel changes (an aggregate of approximately 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

**Table 5 – Short Pulse Radar Test Waveforms**

Radar Type	Pulse Width (Microseconds)	PRI (Microseconds)	Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

**Table 6 – Long Pulse Radar Test Signal**

Radar Waveform	Bursts	Pulses per Burst	Pulse Width (µsec)	Chirp Width (µsec)	PRI (µsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80%	30

**Table 7 – Frequency Hopping Radar Test Signal**

Radar Waveform	Pulse Width (µsec)	PRI (µsec)	Burst Length (ms)	Pulses Per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.33	70%	30



## **DESCRIPTION OF EUT**

### **Overview Of EUT With Respect To §15.407 (H) Requirements**

The EUT operates over the 5250-5350 MHz range as a Client Device that does not have radar detection capability.

The antenna assembly utilized with the EUT has a gain of 1.66 dBi.

The highest power level is 17.47 dBm EIRP in the 5500 ~ 5700MHz band.

The EUT has two antenna ports(2.4G&5G).

The 2.4G port is disabled by connecting it to a 50 ohm terminal.

The 5G port is connected to the DFS tester.

The Slave device associated with the EUT during these tests does not have radar detection capability.

WLAN traffic is generated by streaming the video file TestFile.mp2 “6 ½ Magic Hours” from the Master to the Slave in full motion video mode using the media player with the V2.61 Codec package.

TPC is not required since the maximum EIRP is less than 500 mW (27 dBm).

The EUT utilizes the 802.11a architecture, with a nominal channel bandwidth of 20 MHz.

The Master Device is a Cisco Aironet 802.11a/b/g Access Point, FCC ID: LDK102056.

The rated output power of the Master unit is < 23dBm (EIRP). Therefore the required interference threshold level is -62 dBm. After correction for antenna gain and procedural adjustments, the required conducted threshold at the antenna port is  $-62 + 5 = -57$ dBm.

The calibrated conducted DFS Detection Threshold level is set to -62 dBm. The tested level is lower than the required level hence it provides margin to the limit.

### **Manufacturer’s Statement Regarding Uniform Channel Spreading**

The end product implements an automatic channel selection feature at startup such that operation commences on channels distributed across the entire set of allowed 5GHz channels. This feature will ensure uniform spreading is achieved while avoiding non-allowed channels due to prior radar events.





## **TEST AND MEASUREMENT SYSTEM**

### **System Overview**

The measurement system is based on a conducted test method.

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.


The short pulse types 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC 06-96 APPENDIX. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer set to display 8001 bins on the horizontal axis. The time-domain resolution is 2 msec / bin with a 16 second sweep time, meeting the 10 second short pulse reporting criteria. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold. The time-domain resolution is 3 msec / bin with a 24 second sweep time, meeting the 22 second long pulse reporting criteria and allowing a minimum of 10 seconds after the end of the long pulse waveform.

Should multiple RF ports be utilized for the Master and/or Slave devices (for example, for diversity or MIMO implementations), 50 ohm termination would be removed from the splitter so that connection can be established between splitter and the Master and/or Slave devices.

### **Conducted Method System Block Diagram**

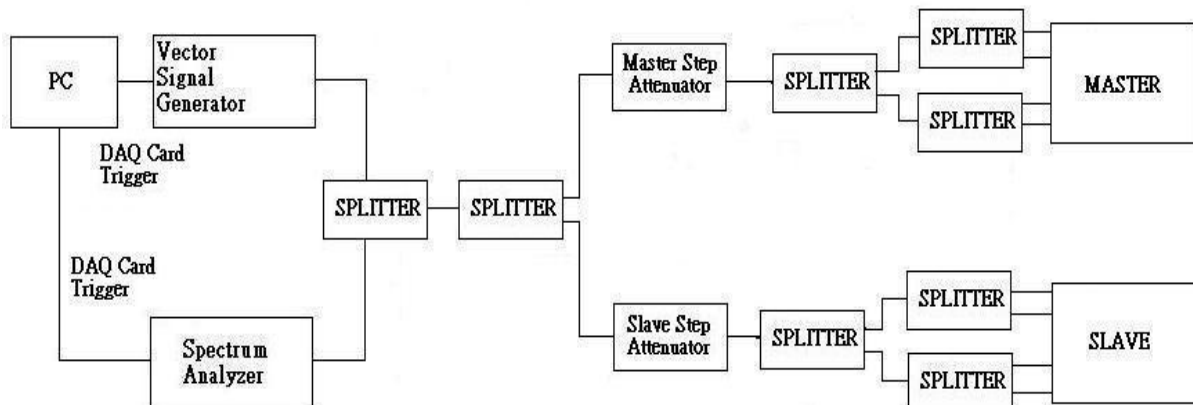



### **System Calibration**

Connect the spectrum analyzer to the test system in place of the master device. Set the signal generator to CW mode. Adjust the amplitude of the signal generator to yield a measured level of  $-62$  dBm on the spectrum analyzer.

Without changing any of the instrument settings, reconnect the spectrum analyzer to the Common port of the Spectrum Analyzer Combiner/Divider and connect a 50 ohm load to the Master Device port of the test system.

Measure the amplitude and calculate the difference from  $-62$  dBm. Adjust the Reference Level Offset of the spectrum analyzer to this difference. Confirm that the signal is displayed at  $-62$  dBm. Readjust the RBW and VBW to 3 MHz, set the span to 10 MHz, and confirm that the signal is still displayed at  $-62$  dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of  $-62$  dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

Set the signal generator to produce a radar waveform, trigger a burst manually and measure the level on the spectrum analyzer. Readjust the amplitude of the signal generator as required so that the peak level of the waveform is at a displayed level equal to the required or desired interference detection threshold. Separate signal generator amplitude settings are determined as required for each radar type.


### **Adjustment Of Displayed Traffic Level**

Establish a link between the Master and Slave, adjusting the Link Step Attenuator as needed to provide a suitable received level at the Master and Slave devices. Stream the video test file to generate WLAN traffic. Confirm that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold. Confirm that the displayed traffic is from the Master Device. For Master Device testing confirm that the displayed traffic does not include Slave Device traffic. For Slave Device testing confirm that the displayed traffic does not include Master Device traffic.

If a different setting of the Master Step Attenuator is required to meet the above conditions, perform a new System Calibration for the new Master Step Attenuator setting.



**Test Setup**

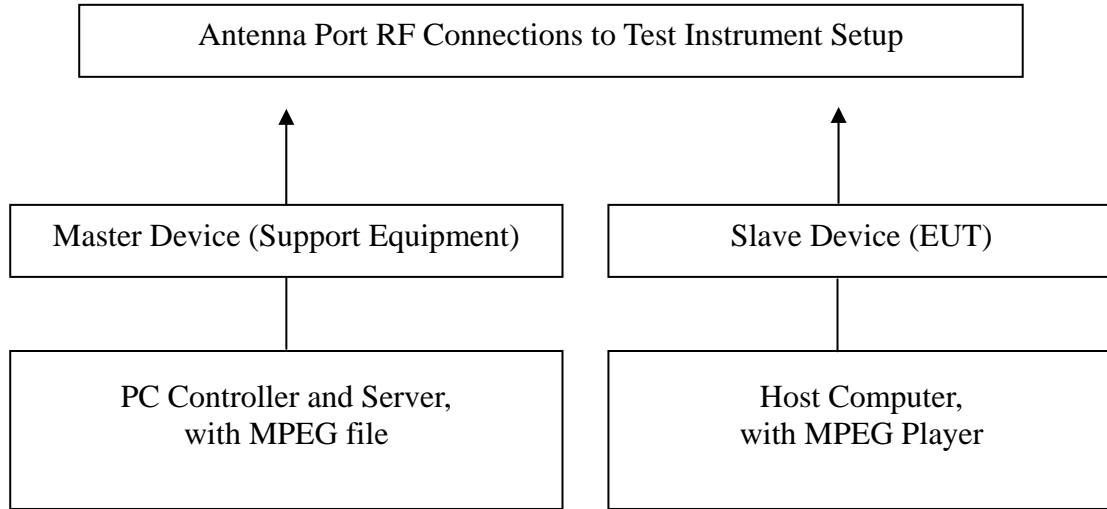

**TEST RESULTS**

*No non-compliance noted*



### Test Plot


### PLOTS OF RADAR WAVEFORMS

### IEEE 802.11n HT 20 MHz mode mode

### Sample of Short Pulse Radar Type 1

Agilent 17:20:47 Jul 4, 2011


T

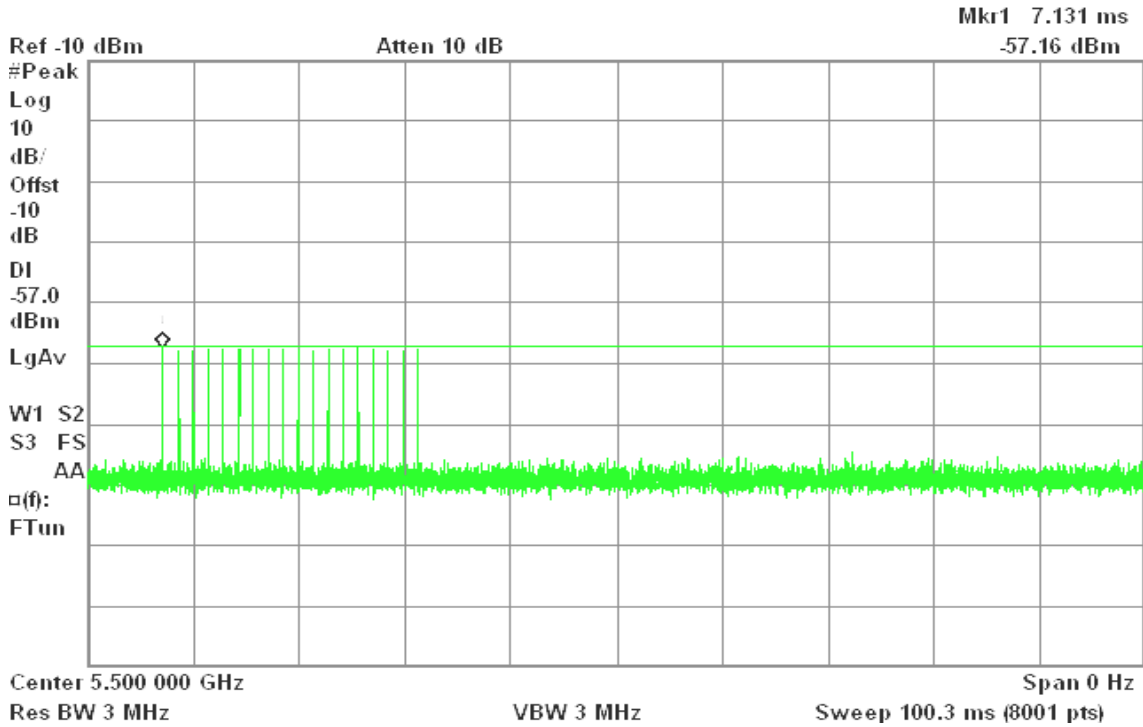

### Sample of Short Pulse Radar Type 2

Agilent 17:18:57 Jul 4, 2011

T

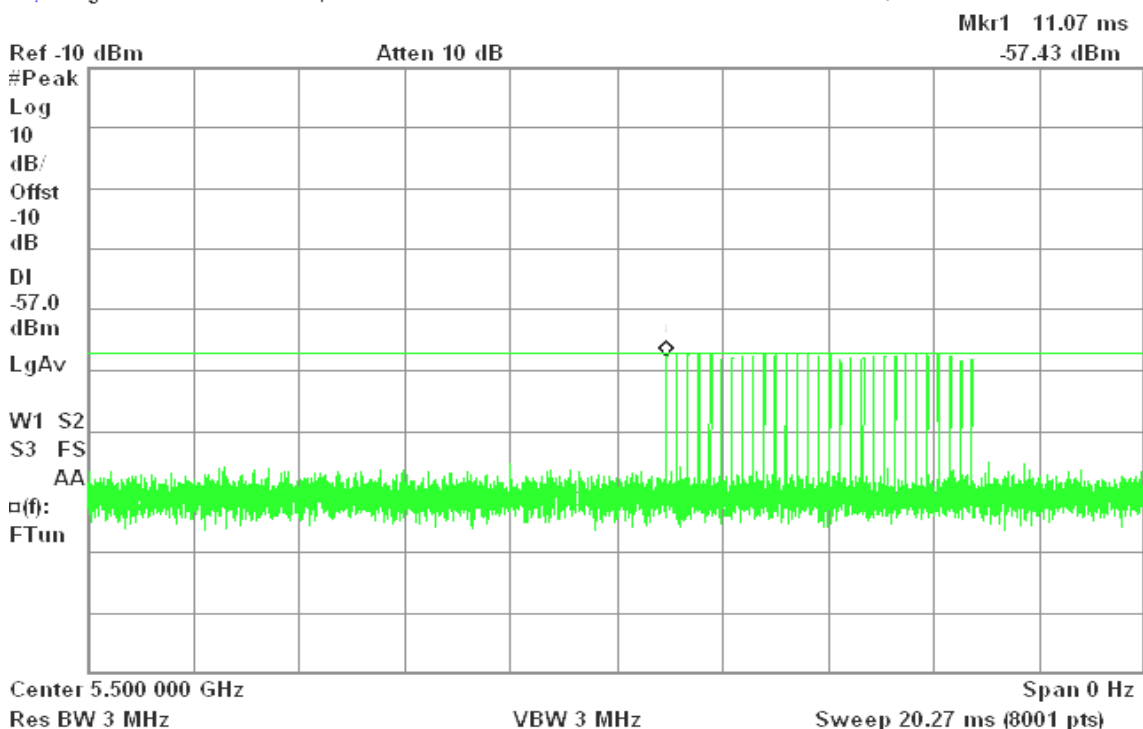




### Sample of Short Pulse Radar Type 3

Agilent 17:17:54 Jul 4, 2011


T

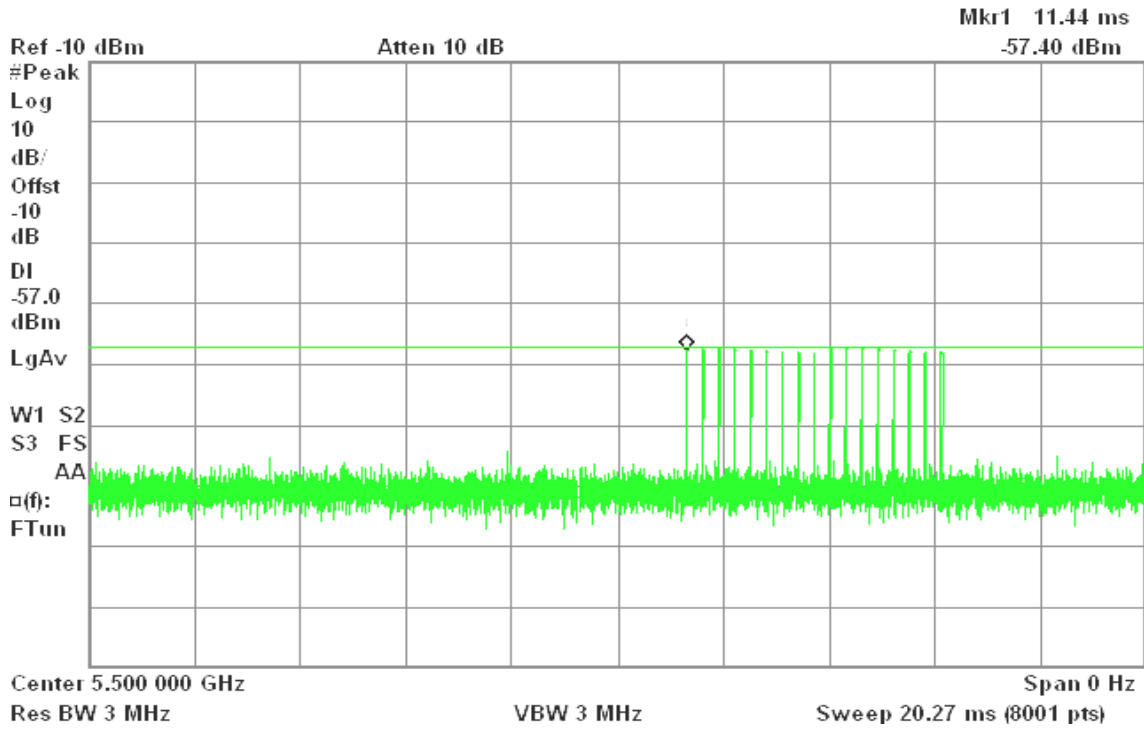

### Sample of Short Pulse Radar Type 4

Agilent 17:16:39 Jul 4, 2011

T

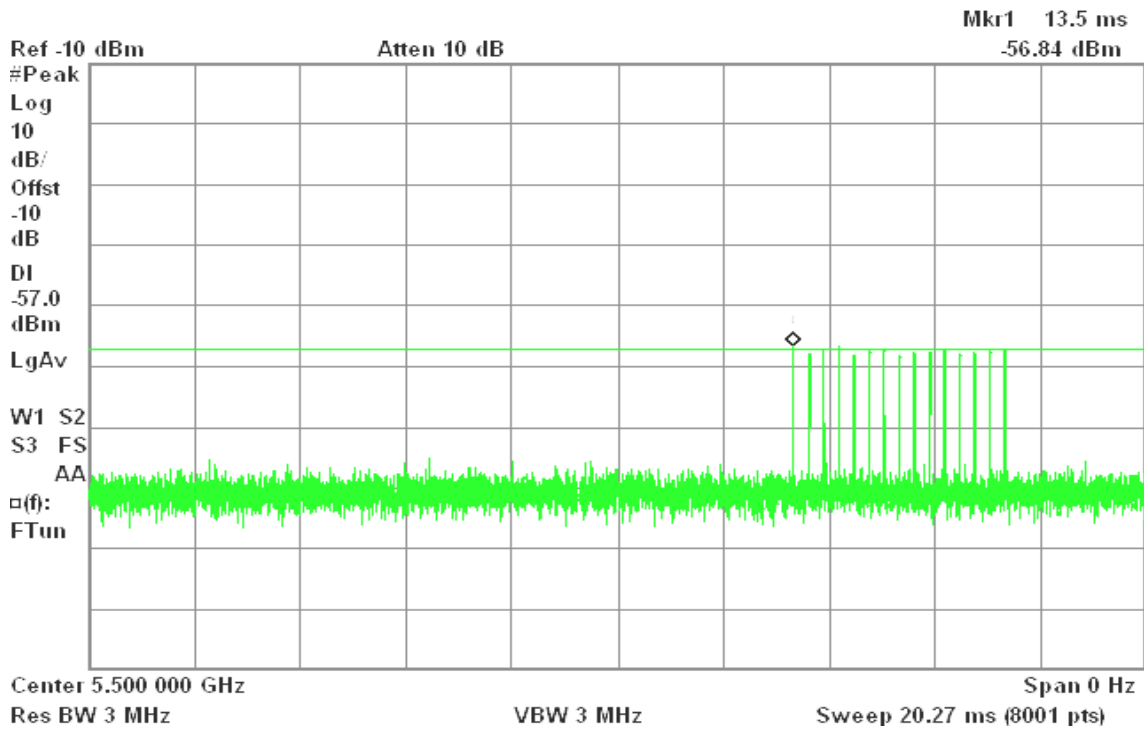




### Sample of Long Pulse Radar Type 5

Agilent 17:02:21 Jul 4, 2011

T

Mkr1 3.14 s  
-57.79 dBm

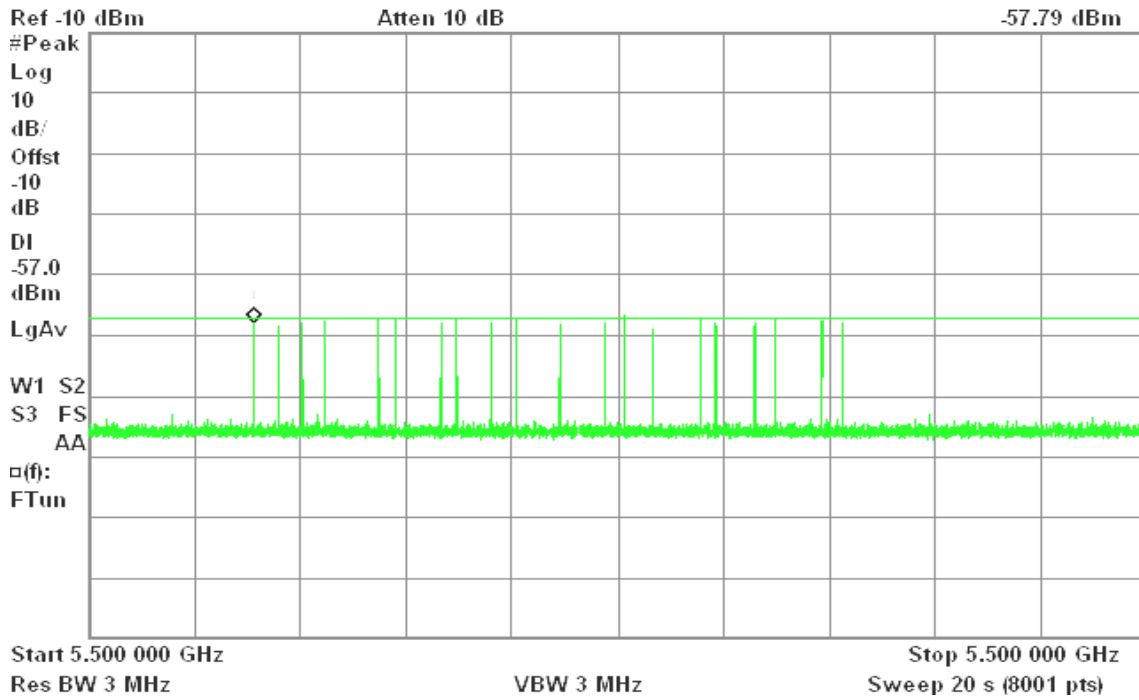


### Sample of Frequency Hopping Radar Type 6

Agilent 17:14:44 Jul 4, 2011

R T

Mkr1 16.85 ms  
-57.36 dBm

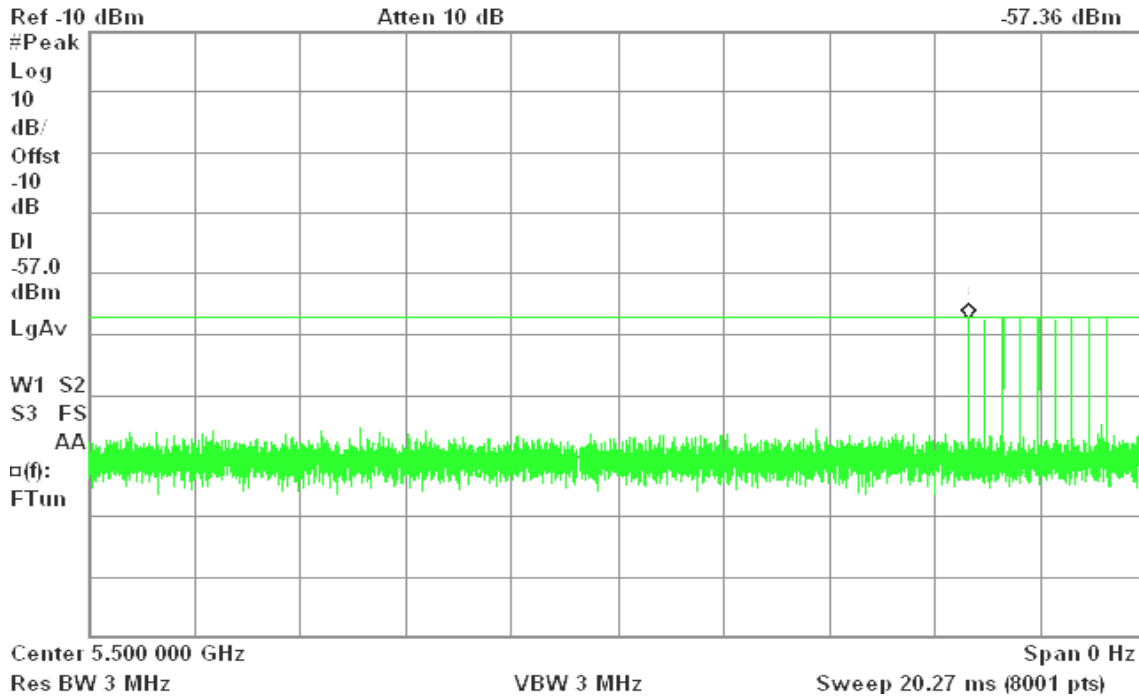




### Plot of WLAN Traffic from Slave

Agilent 15:34:46 Jul 3, 2011

R T

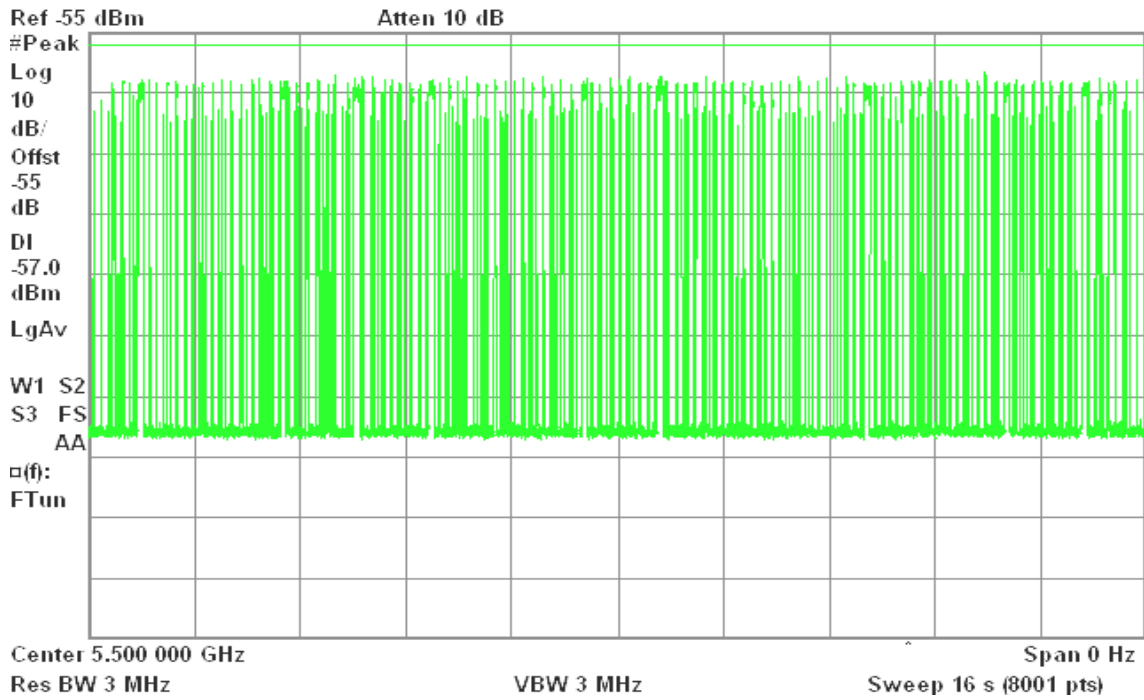




### IEEE 802.11n HT 40 MHz mode

#### Sample of Short Pulse Radar Type 1

Agilent 16:51:36 Jul 4, 2011


T

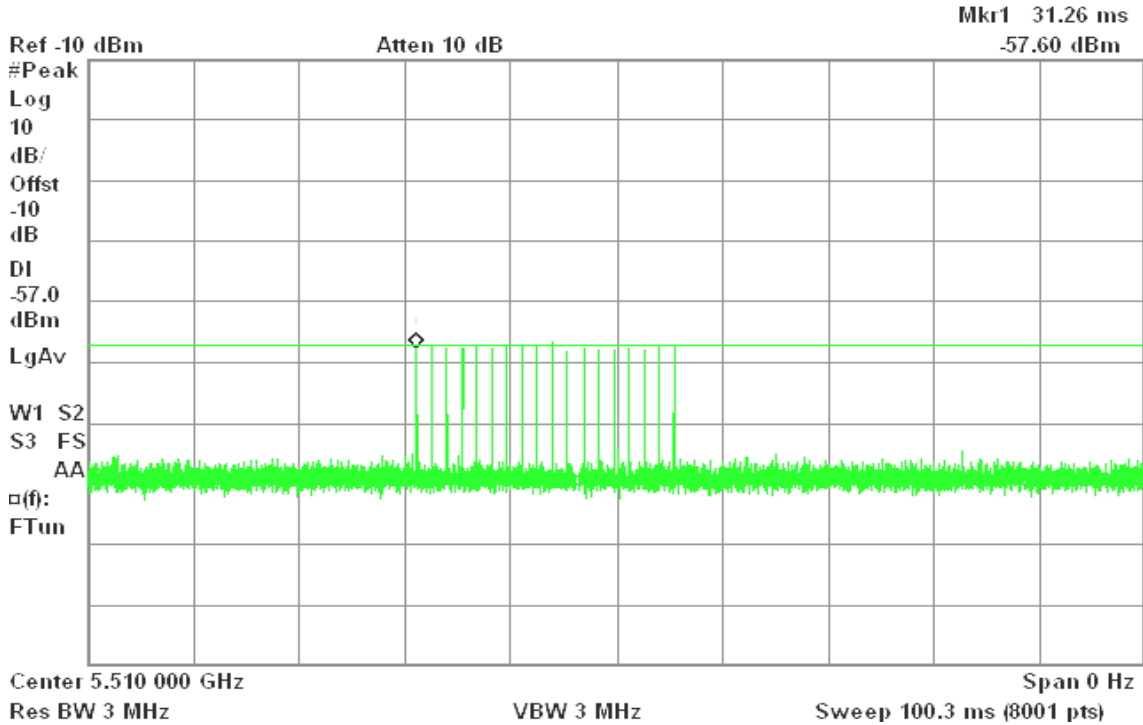

#### Sample of Short Pulse Radar Type 2

Agilent 16:53:09 Jul 4, 2011

T

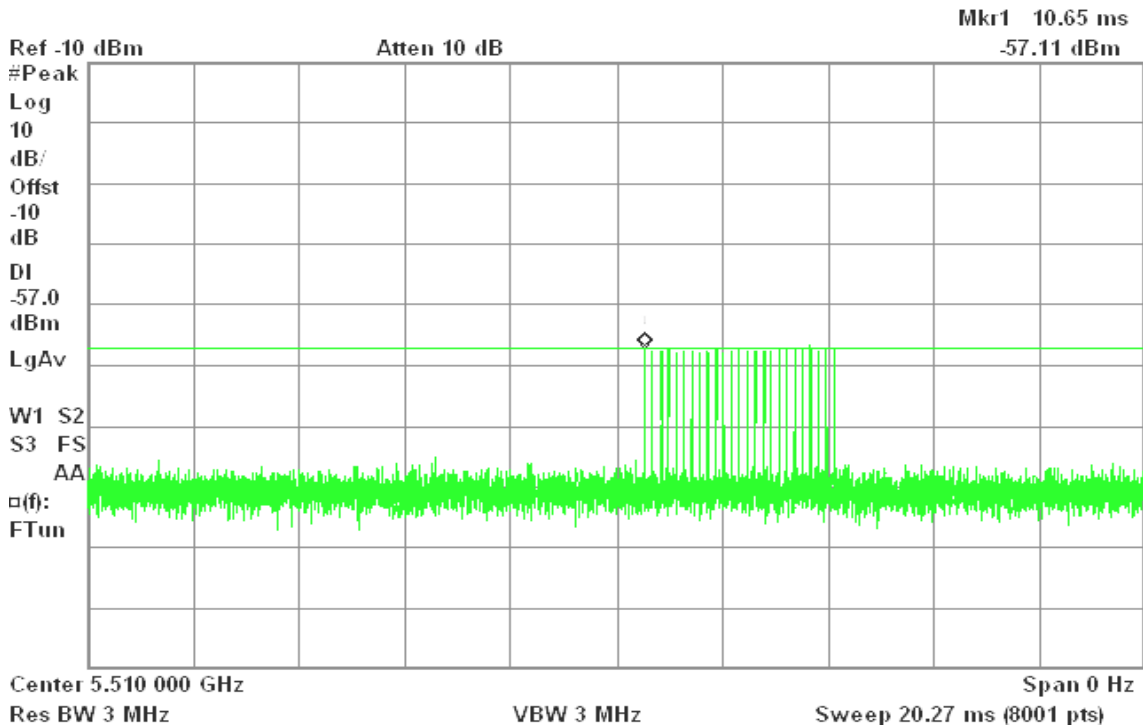






### Sample of Short Pulse Radar Type 3

Agilent 16:54:47 Jul 4, 2011


T

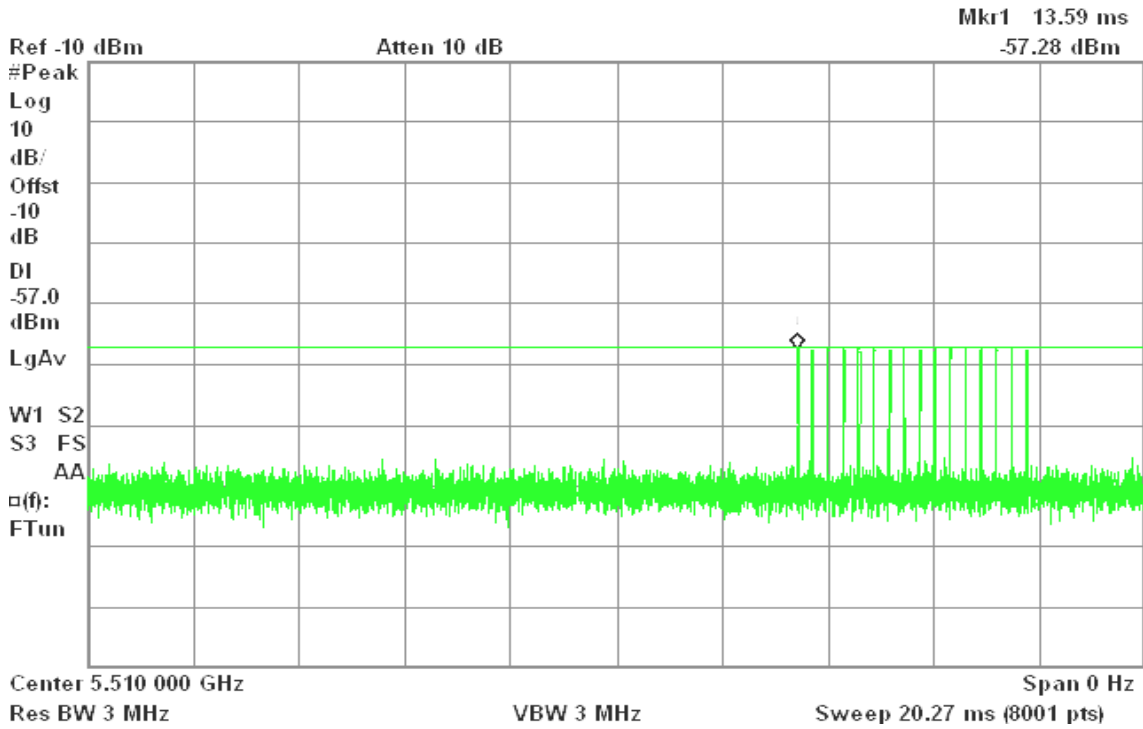

### Sample of Short Pulse Radar Type 4

Agilent 16:55:59 Jul 4, 2011

T

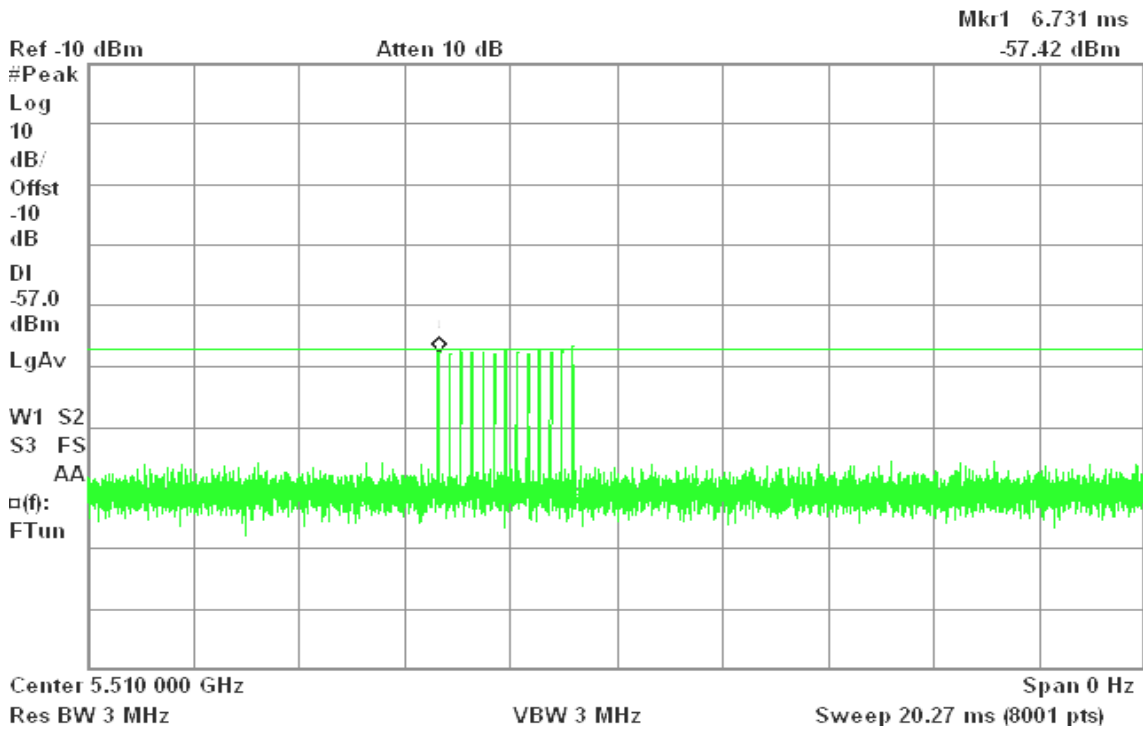




### Sample of Long Pulse Radar Type 5

Agilent 17:00:57 Jul 4, 2011

T

Mkr1 2.4 s  
-57.56 dBm

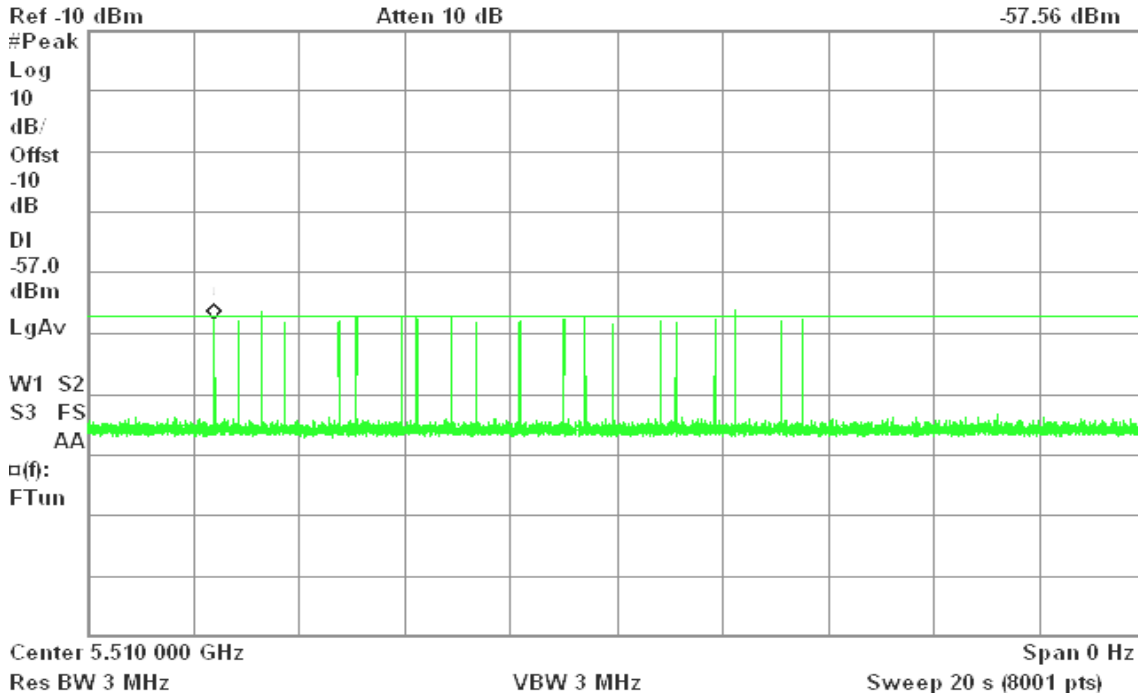


### Sample of Frequency Hopping Radar Type 6

Agilent 17:11:39 Jul 4, 2011

R T

Mkr1 10.76 ms  
-57.37 dBm

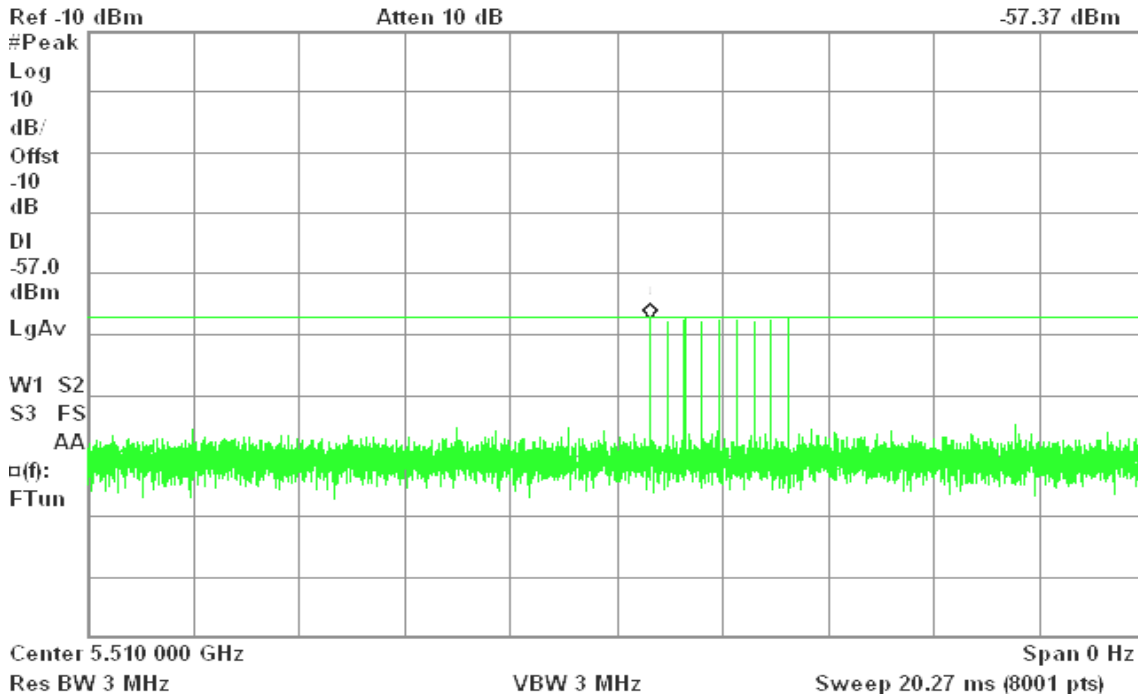




### Plot of WLAN Traffic from Slave

Agilent 13:13:31 Jul 4, 2011

R T

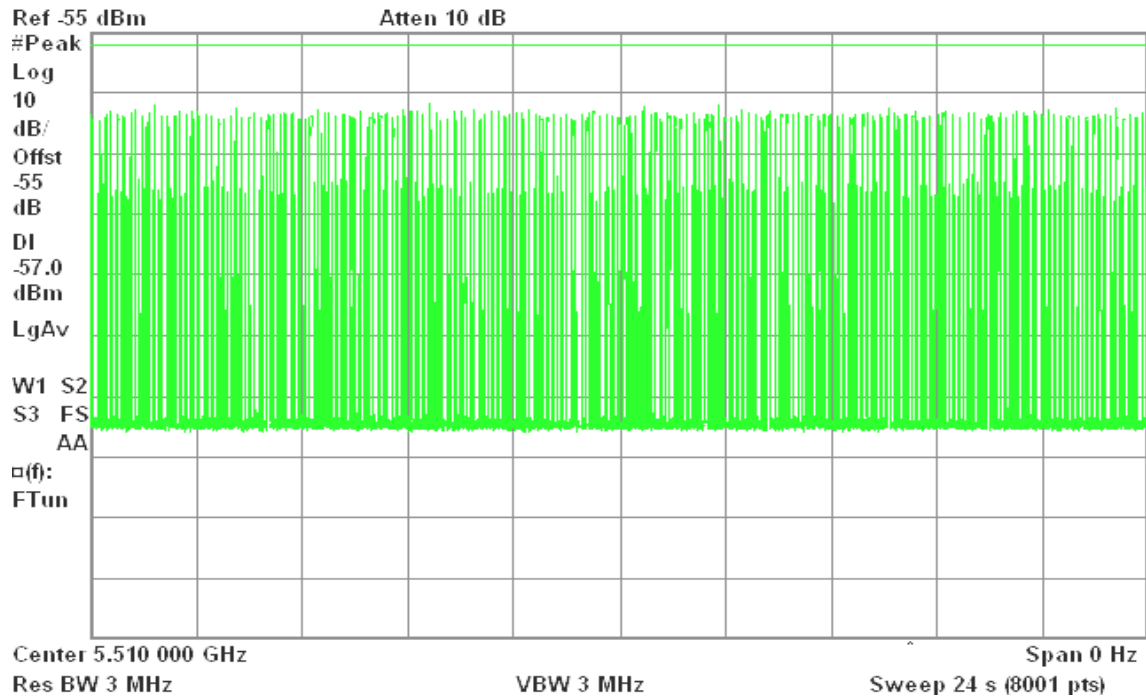



## **TEST CHANNEL AND METHOD**

All tests were performed at a channel center frequency of 5500 MHz utilizing a conducted test method.

## **CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME**

### **GENERAL REPORTING NOTES**

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =

(Number of analyzer bins showing transmission) \* (dwell time per bin)

The observation period over which the aggregate time is calculated

Begins at (Reference Marker + 200 msec) and

Ends no earlier than (Reference Marker + 10 sec).



### UNII Band II

### IEEE 802.11n HT 20 MHz mode

### Type 1 Channel Move Time Results

No non-compliance noted.

Channel Move Time (s)	Limit (s)
2.686	10

Agilent 19:22:38 Jul 4, 2011

R T

Mkr2 2.686 s



Center 5.300 000 GHz Span 0 Hz  
 Res BW 3 MHz VBW 3 MHz Sweep 16 s (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	2.234 s	-56.87 dBm
1Δ	(1)	Time	10 s	-57.82 dB
2	(1)	Time	2.686 s	-65.20 dBm



**IEEE 802.11n HT 40 MHz mode**


**Type 1 Channel Move Time Results**

No non-compliance noted.

Channel Move Time (s)	Limit (s)
2.774	10

Agilent 14:43:35 Jul 4, 2011

R T

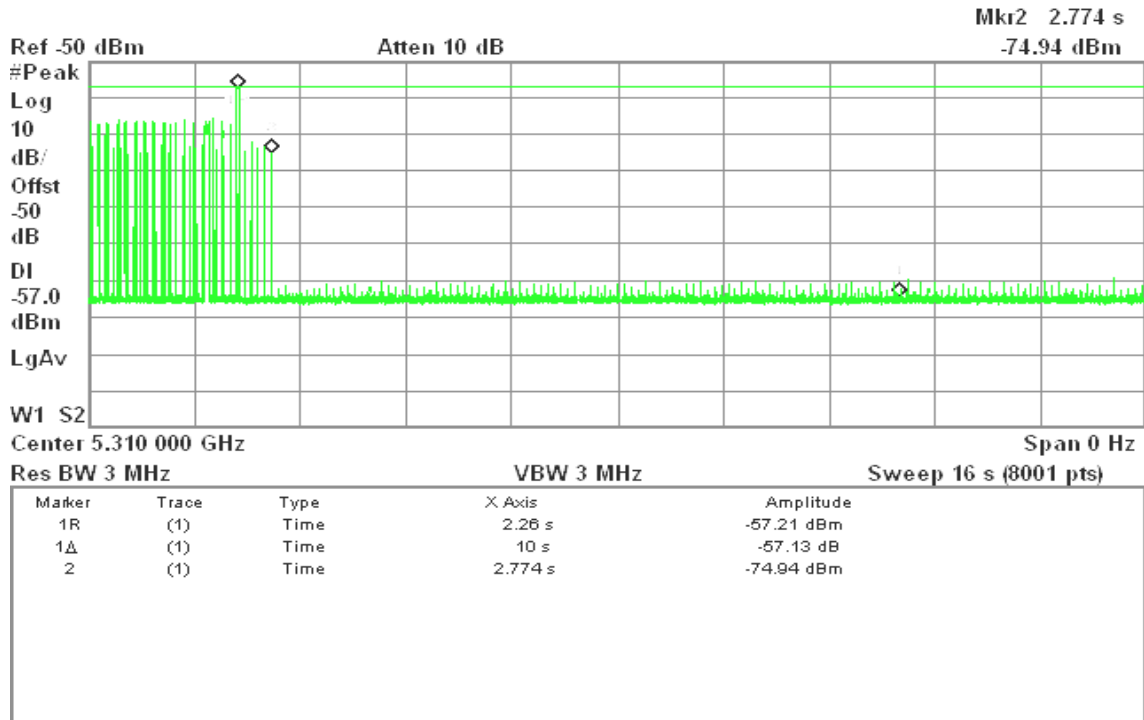







**IEEE 802.11n HT 20 MHz mode**

**Type 1 Channel Closing Transmission Time Results**

No non-compliance noted.

Aggregate Transmission Time (ms)	Limit (ms)	Margin (ms)
8	60	-52

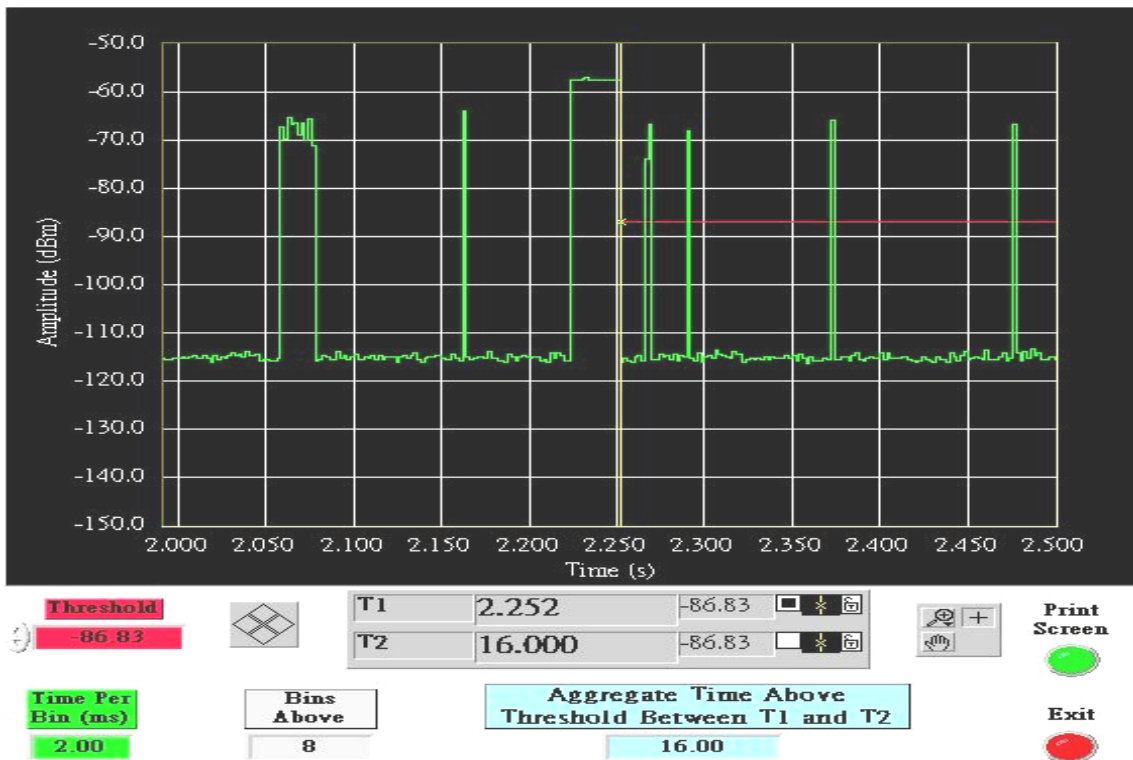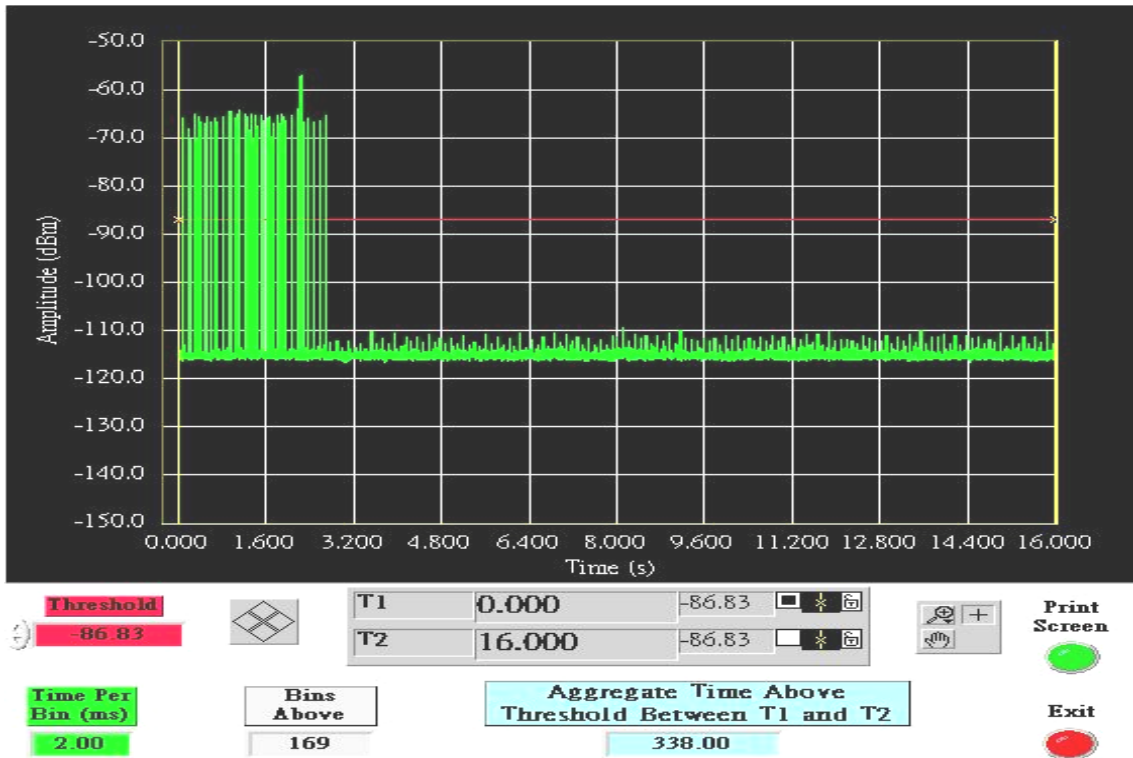

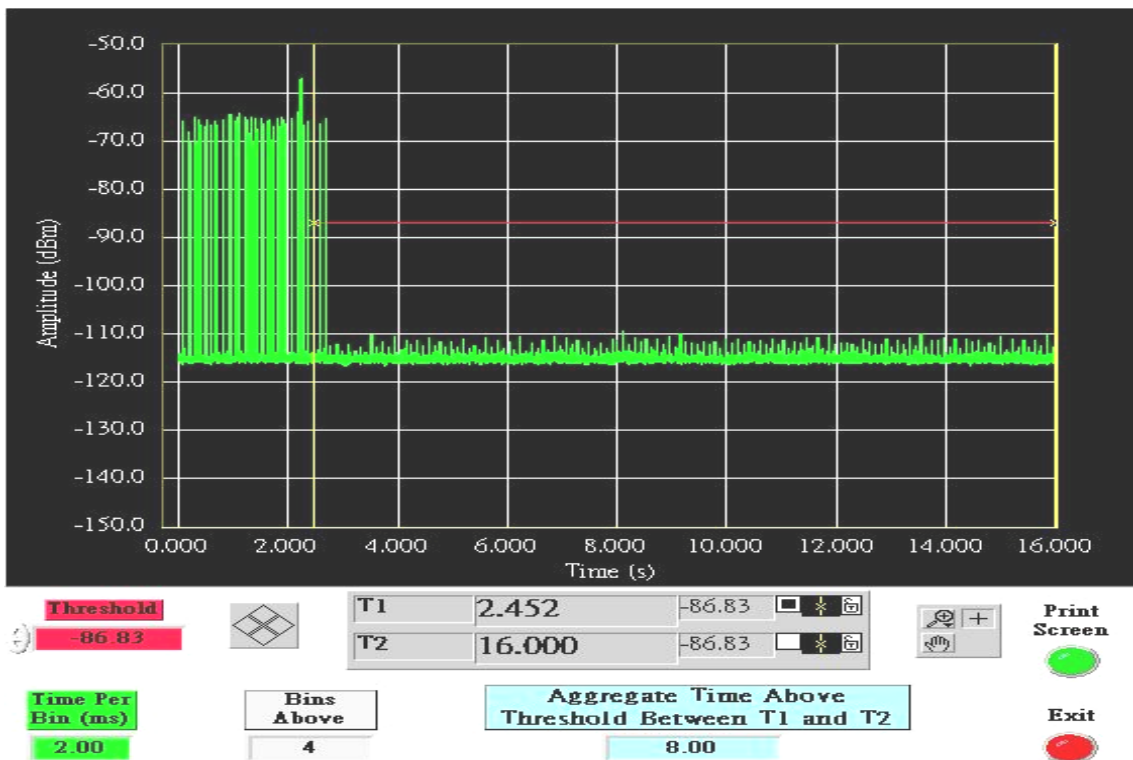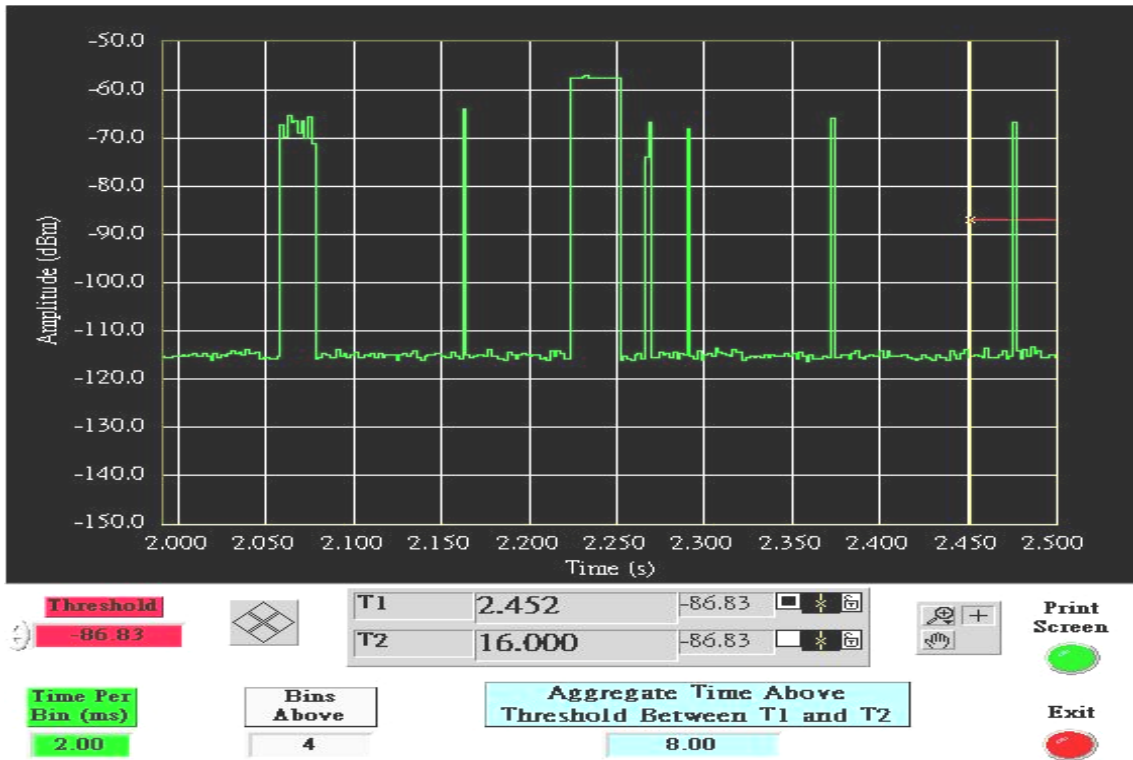






**IEEE 802.11n HT 40 MHz mode**

**Type 1 Channel Closing Transmission Time Results**

No non-compliance noted.

Aggregate Transmission Time (ms)	Limit (ms)	Margin (ms)
8	60	-52

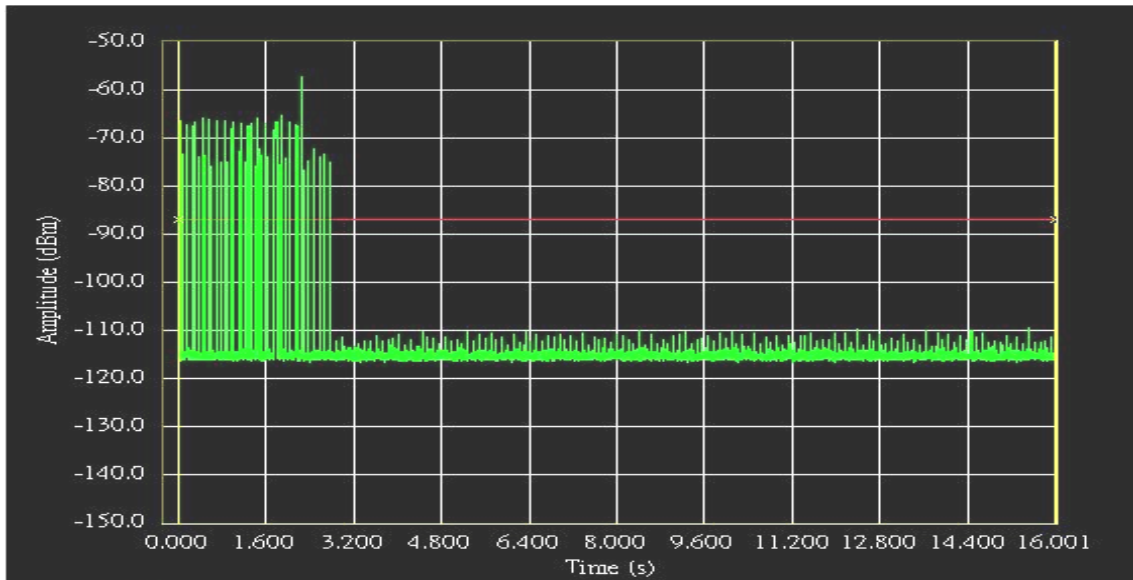

Threshold: -86.96


T1: 0.000, T2: 16.001

Time Per Bin (ms): 2.00

Bins Above: 193

Aggregate Time Above Threshold Between T1 and T2: 386.01

Print Screen, Exit

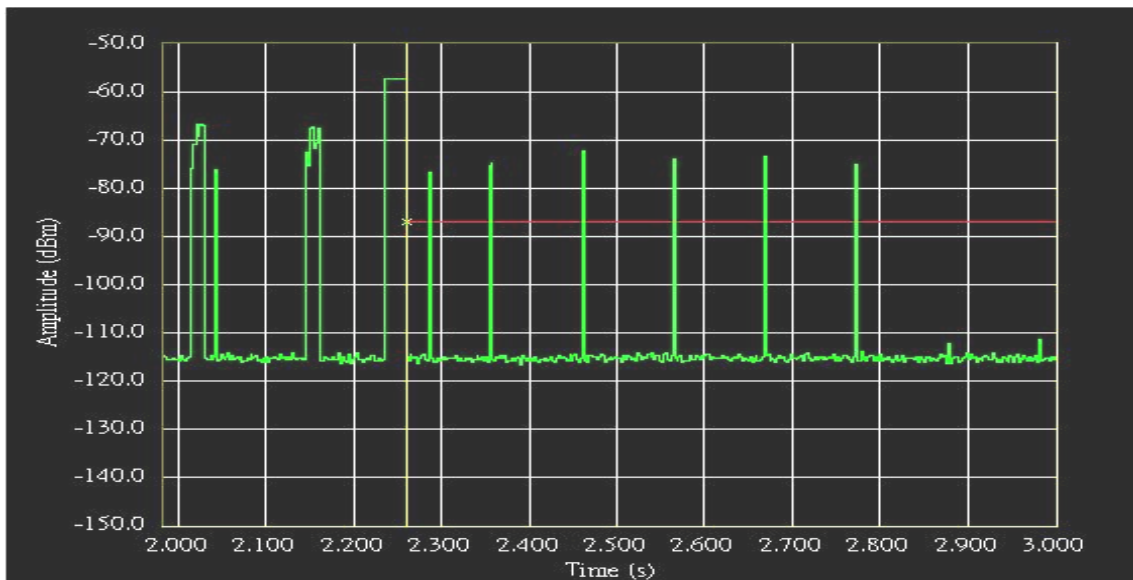

Threshold: -86.96



T1: 2.260, T2: 16.001

Time Per Bin (ms): 2.00

Bins Above: 7

Aggregate Time Above Threshold Between T1 and T2: 14.00

Print Screen, Exit

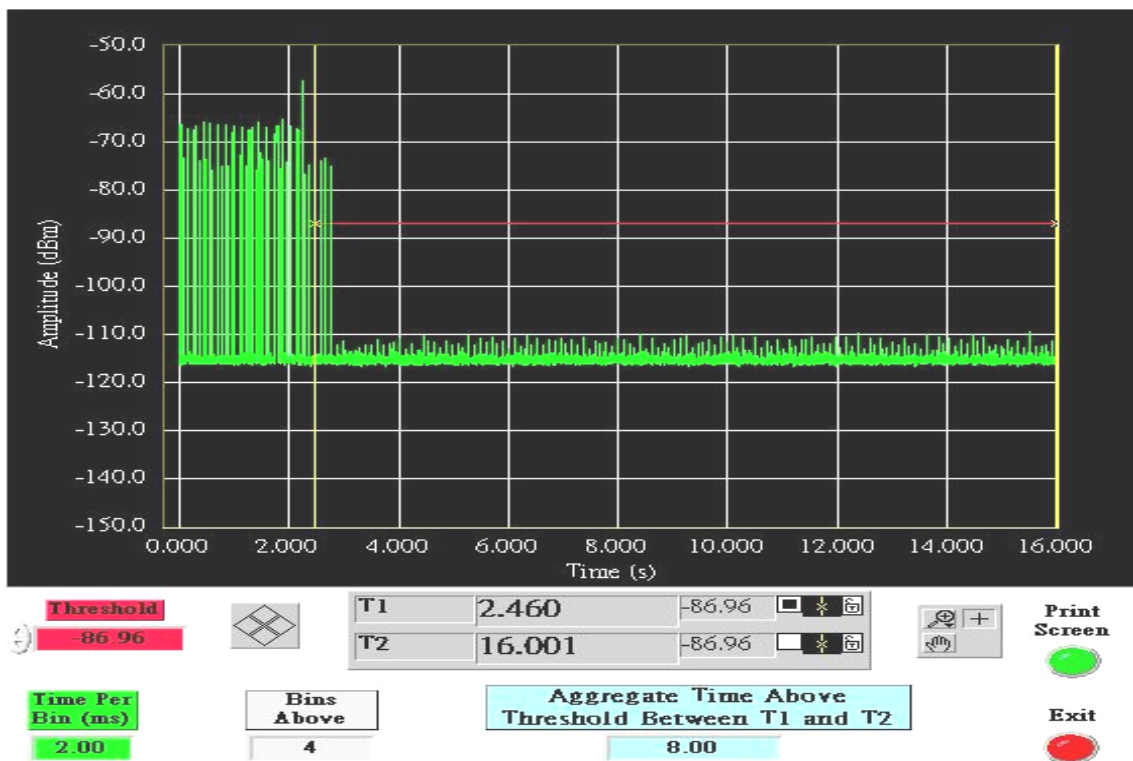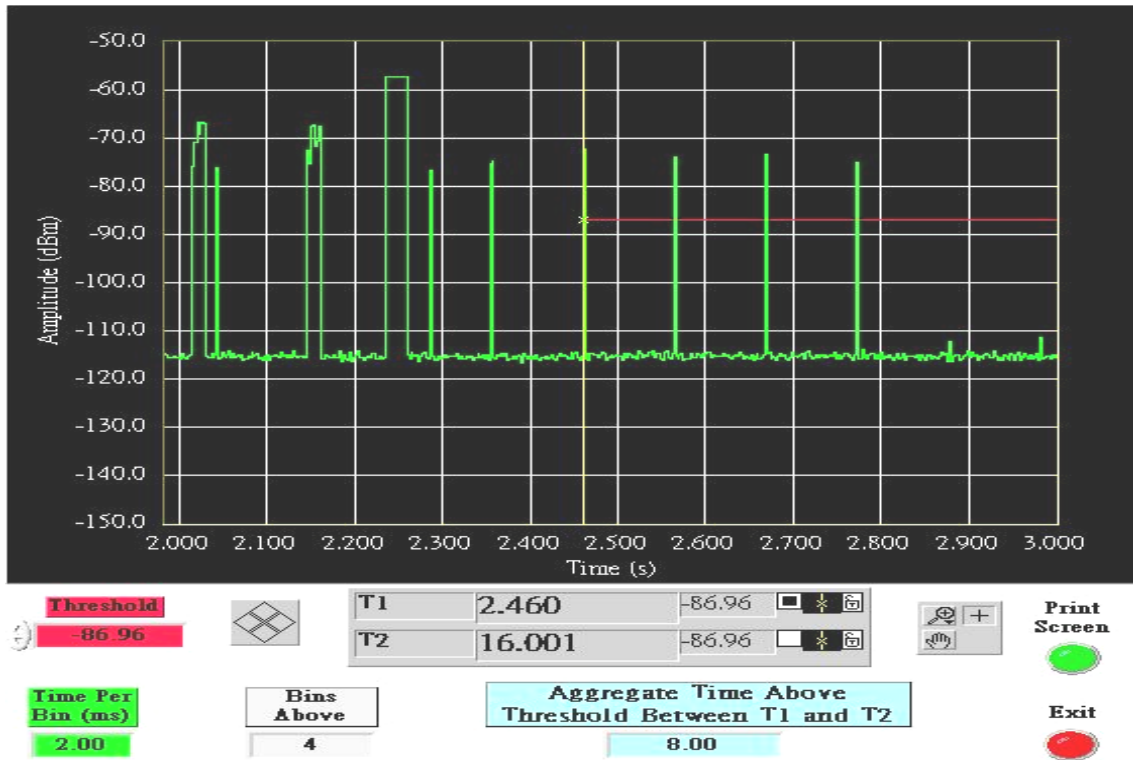



**IEEE 802.11n HT 20 MHz mode**


**Type 5 Channel Move Time Results**

No non-compliance noted: The traffic ceases prior to the end of the radar waveform, therefore it also ceases prior to 10 seconds after the end of the radar waveform.

Agilent 19:31:45 Jul 4, 2011

R T

Δ Mkr1 10 s

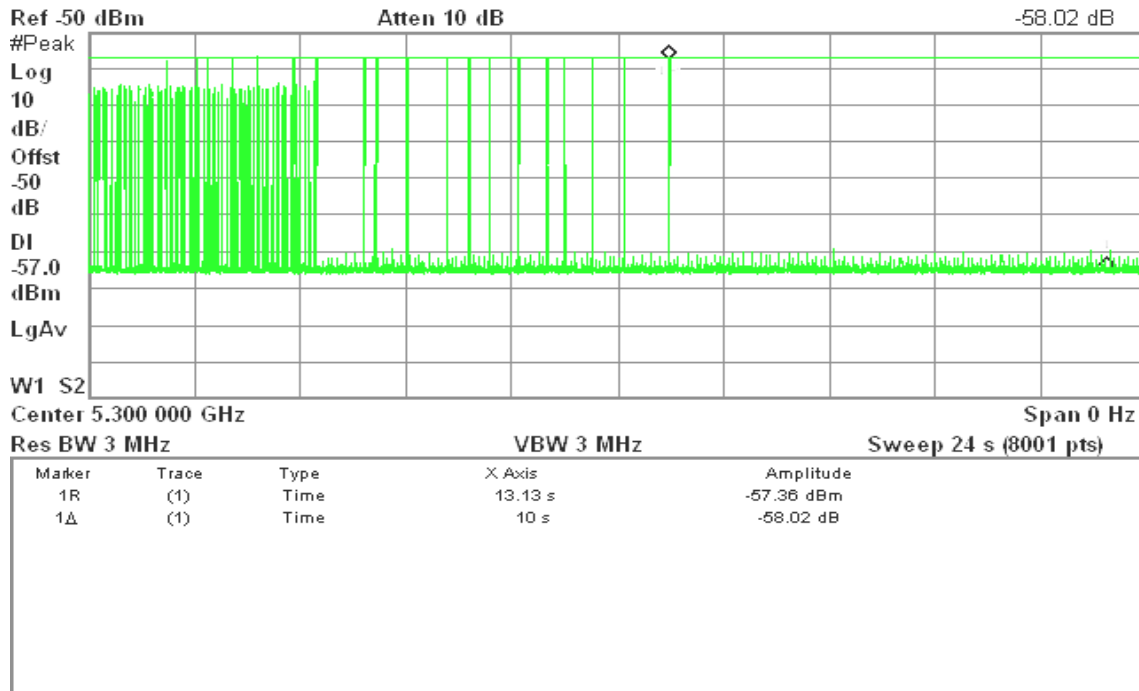



**IEEE 802.11n HT 40 MHz mode**


**Type 5 Channel Move Time Results**

No non-compliance noted: The traffic ceases prior to the end of the radar waveform, therefore it also ceases prior to 10 seconds after the end of the radar waveform.

Agilent 14:51:27 Jul 4, 2011

R T

Δ Mkr1 10 s  
-58.69 dB

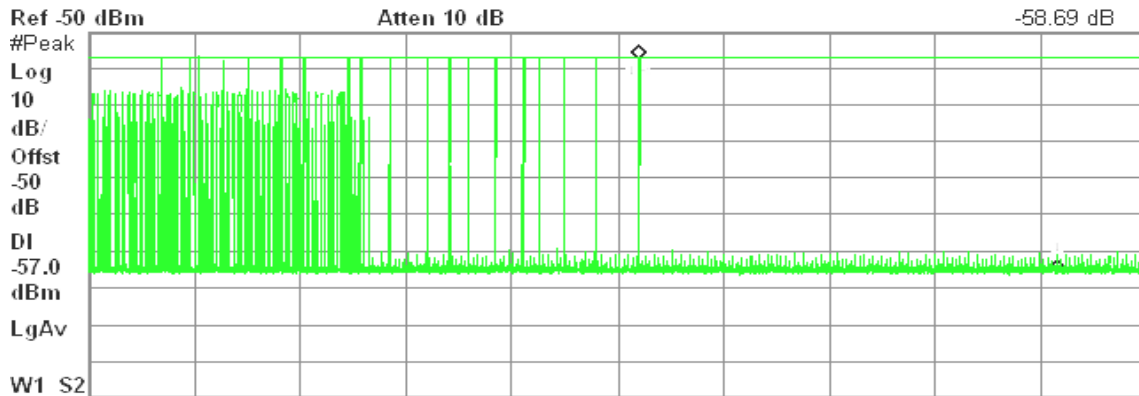

Center 5.310 000 GHz Span 0 Hz  
 Res BW 3 MHz VBW 3 MHz Sweep 24 s (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	13.08 s	-57.40 dBm
1Δ	(1)	Time	10 s	-58.69 dB



### UNII Band III

### IEEE 802.11n HT 20 MHz mode

### Type 1 Channel Move Time Results

No non-compliance noted.

Channel Move Time (s)	Limit (s)
2.86	10

Agilent 15:51:51 Jul 3, 2011

R T

Mkr2 2.86 s

-70.38 dBm



Center 5.500 000 GHz

Span 0 Hz

Res BW 3 MHz

VBW 3 MHz

Sweep 16 s (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	2.372 s	-57.31 dBm
1Δ	(1)	Time	10 s	-59.56 dB
2	(1)	Time	2.86 s	-70.38 dBm



**IEEE 802.11n HT 40 MHz mode**


**Type 1 Channel Move Time Results**

No non-compliance noted.

Channel Move Time (s)	Limit (s)
4.018	10

Agilent 15:27:02 Jul 4, 2011

R T

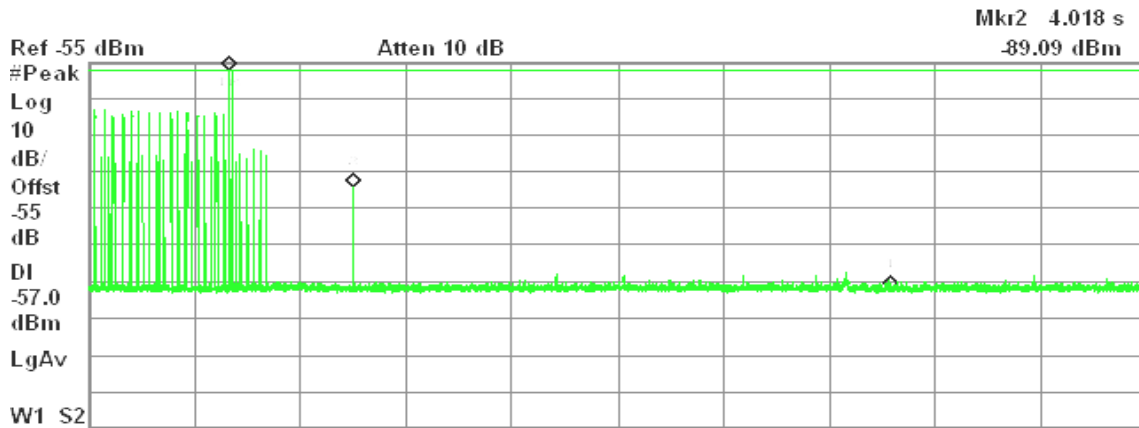

Start 5.510 000 GHz      Stop 5.510 000 GHz  
 Res BW 3 MHz      VBW 3 MHz      Sweep 16 s (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	2.124 s	-57.24 dBm
1Δ	(1)	Time	10 s	-60.04 dB
2	(1)	Time	4.018 s	-89.09 dBm






**IEEE 802.11n HT 20 MHz mode**

**Type 1 Channel Closing Transmission Time Results**


No non-compliance noted.

Aggregate Transmission Time (ms)	Limit (ms)	Margin (ms)
8	60	-52

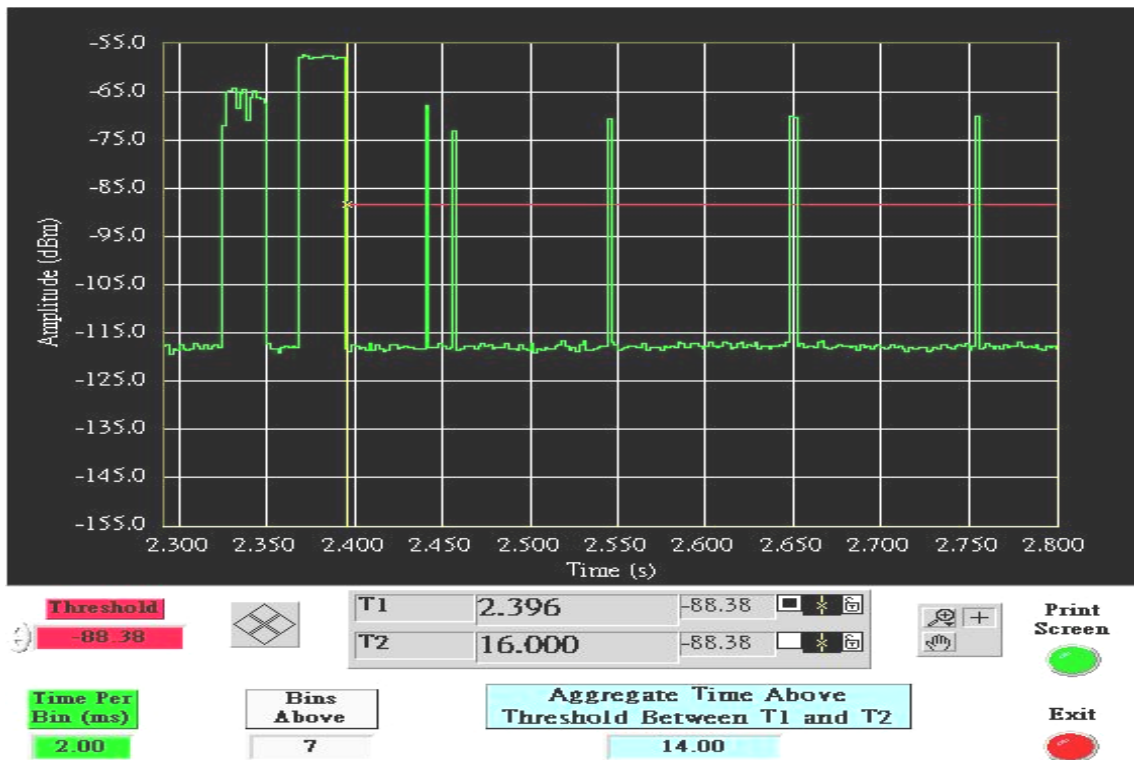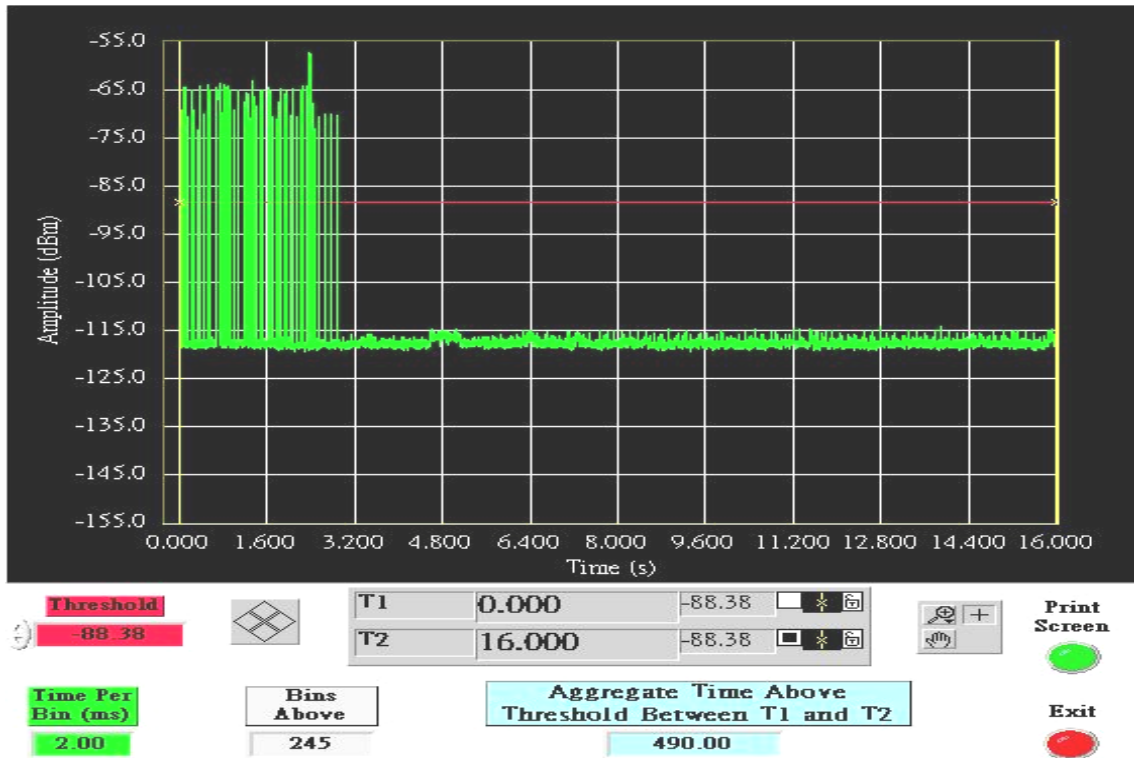

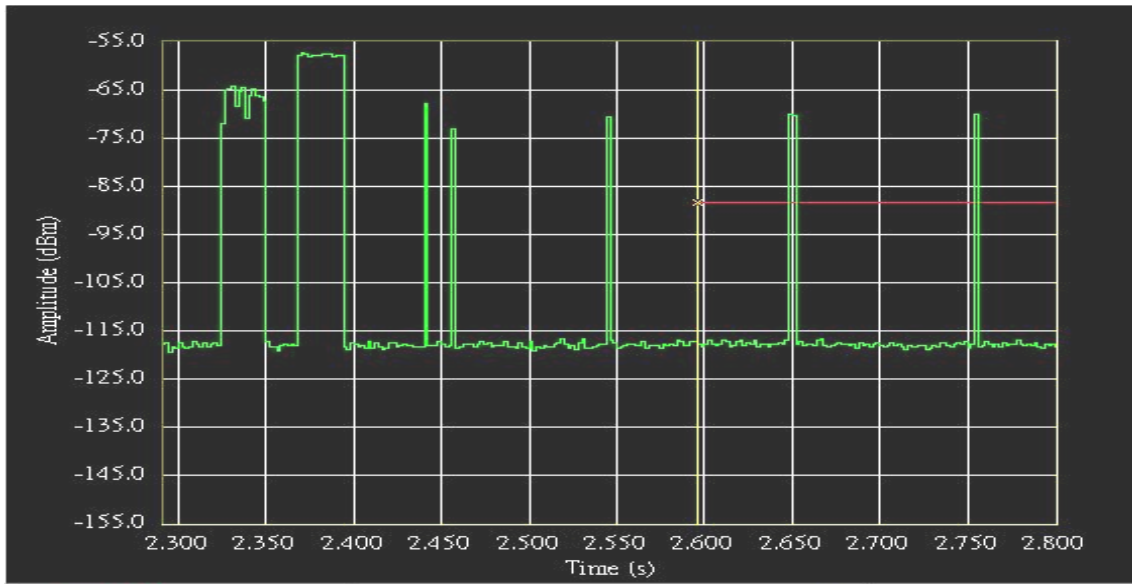

<b>Threshold</b>		T1	2.596	-88.38			<b>Print Screen</b> 
-88.38		T2	16.000	-88.38			
<b>Time Per Bin (ms)</b>	<b>Bins Above</b>	<b>Aggregate Time Above Threshold Between T1 and T2</b>				<b>Exit</b> 	
2.00	4	8.00					

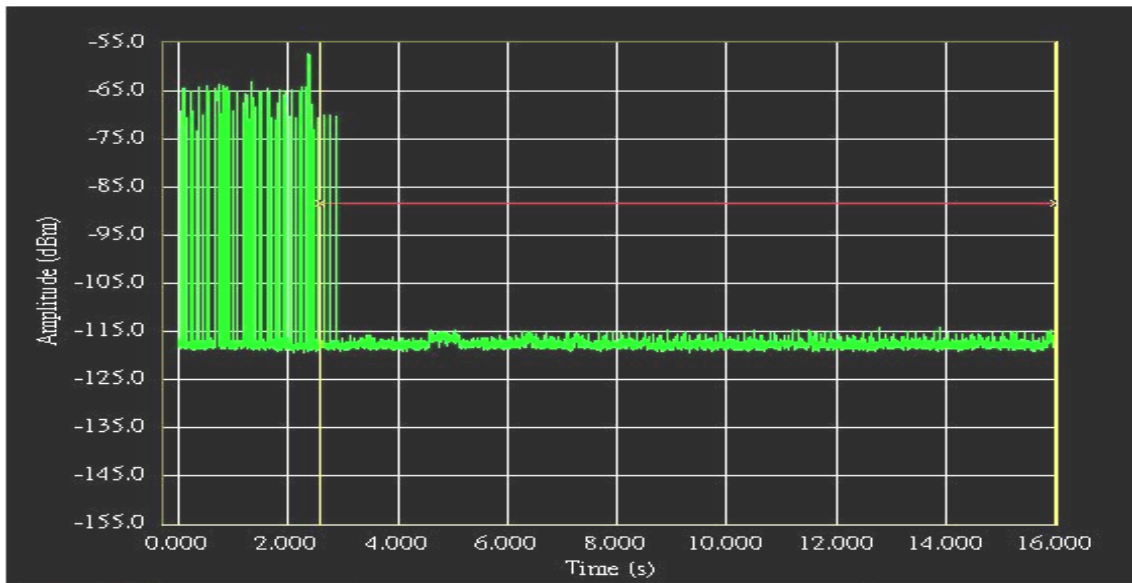

<b>Threshold</b>		T1	2.596	-88.38			<b>Print Screen</b> 
-88.38		T2	16.000	-88.38			
<b>Time Per Bin (ms)</b>	<b>Bins Above</b>	<b>Aggregate Time Above Threshold Between T1 and T2</b>				<b>Exit</b> 	
2.00	4	8.00					






**IEEE 802.11n HT 40 MHz mode**

**Type 1 Channel Closing Transmission Time Results**

No non-compliance noted.

Aggregate Transmission Time (ms)	Limit (ms)	Margin (ms)
12	60	-48

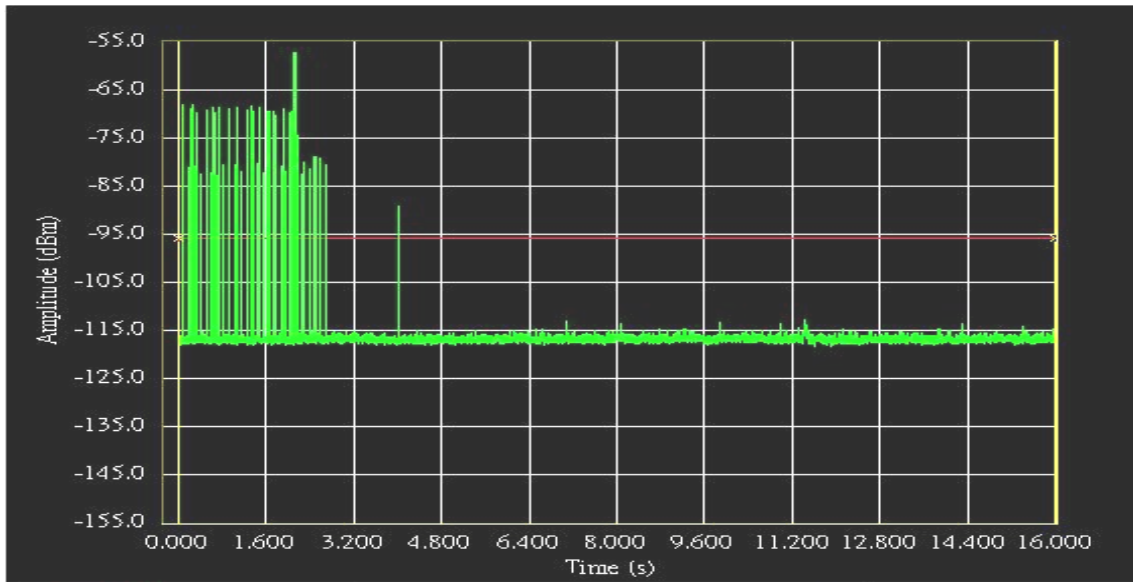

Threshold: -95.78

T1: 0.000    -95.78

T2: 16.000    -95.78


Time Per Bin (ms): 2.00

Bins Above: 157

Aggregate Time Above Threshold Between T1 and T2: 314.00

Print Screen

Exit

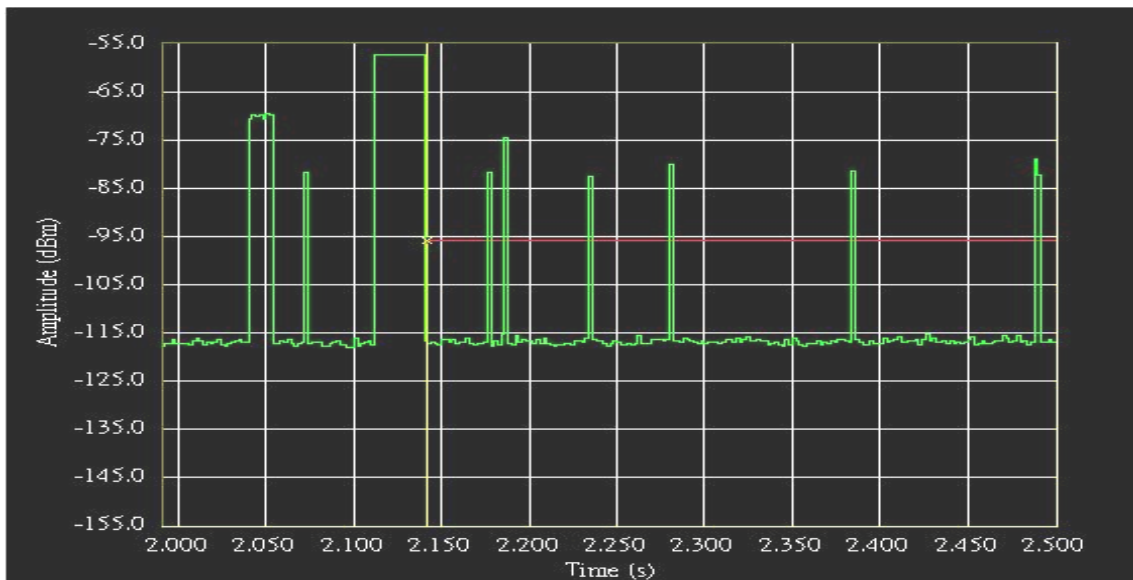

Threshold: -95.78

T1: 2.142    -95.78

T2: 16.000    -95.78



Time Per Bin (ms): 2.00

Bins Above: 10

Aggregate Time Above Threshold Between T1 and T2: 20.00

Print Screen

Exit

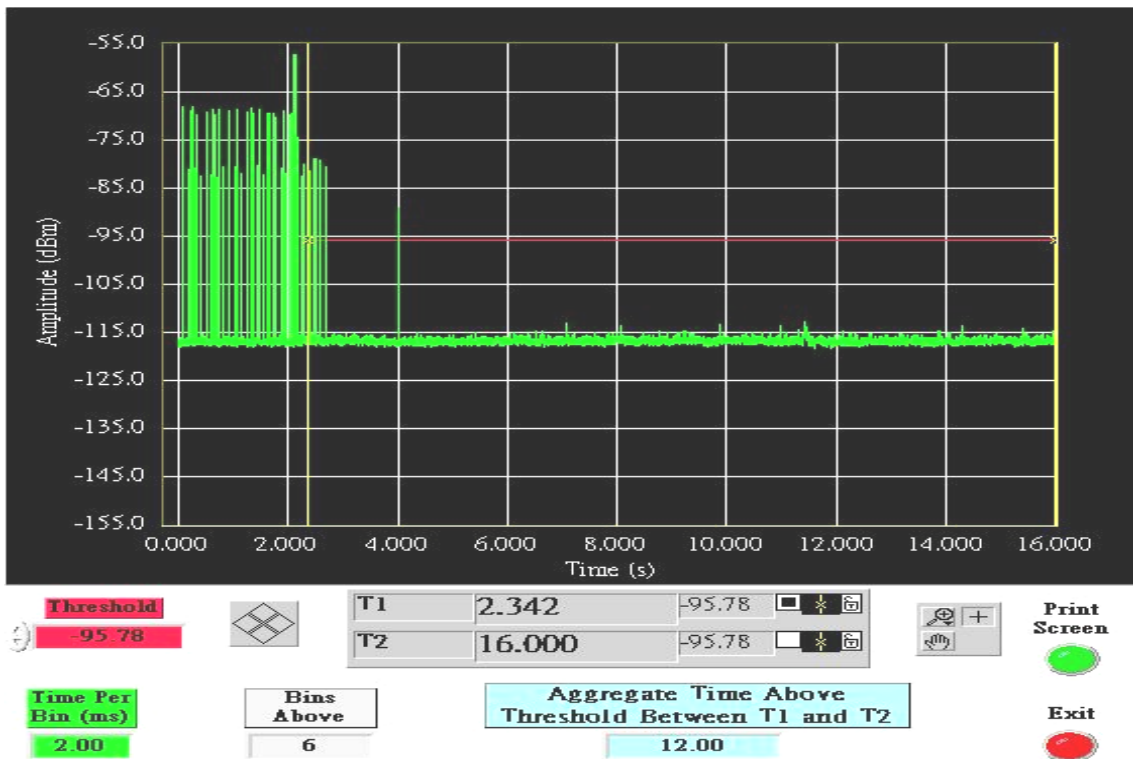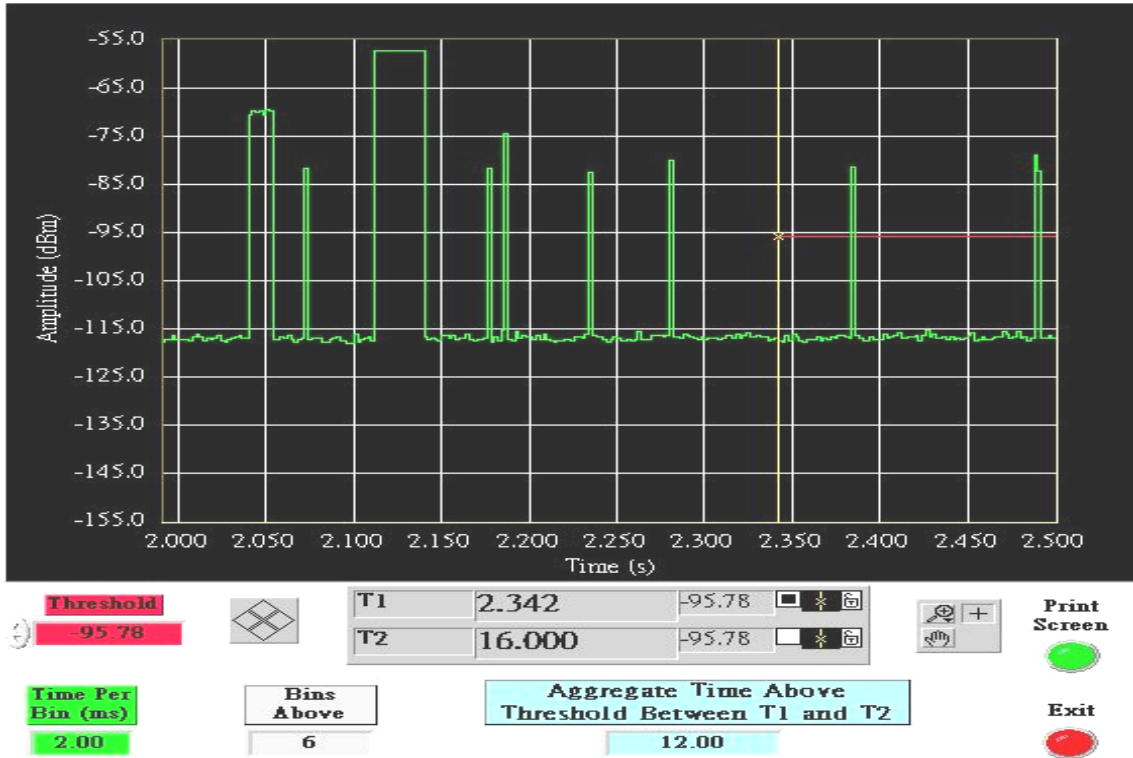



**IEEE 802.11n HT 20 MHz mode**

**Type 5 Channel Move Time Results**


No non-compliance noted: The traffic ceases prior to the end of the radar waveform, therefore it also ceases prior to 10 seconds after the end of the radar waveform.

Agilent 11:51:46 Jul 4, 2011

R T

Δ Mkr1 10 s

-57.98 dB

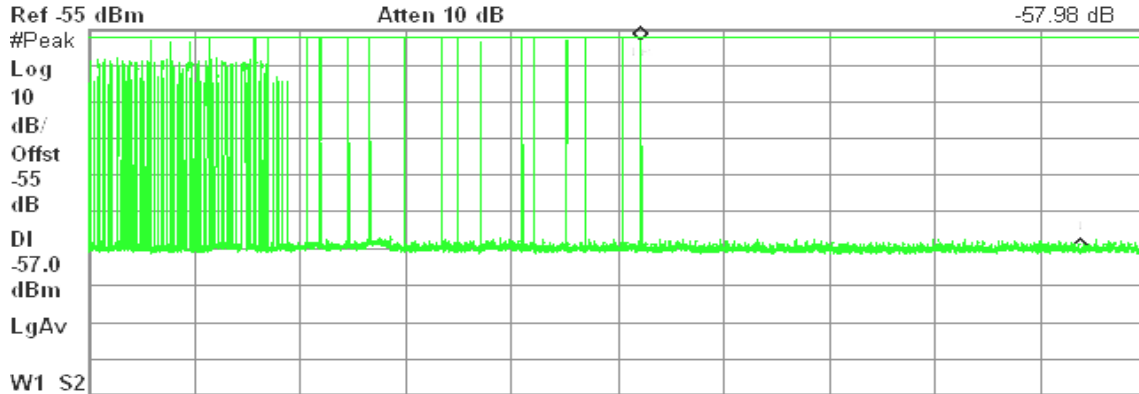

Center 5.500 000 GHz

Span 0 Hz

Res BW 3 MHz

VBW 3 MHz

Sweep 24 s (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	12.52 s	-57.94 dBm
1Δ	(1)	Time	10 s	-57.98 dB



**IEEE 802.11n HT 40 MHz mode**


**Type 5 Channel Move Time Results**

No non-compliance noted: The traffic ceases prior to the end of the radar waveform, therefore it also ceases prior to 10 seconds after the end of the radar waveform.

Agilent 13:17:04 Jul 4, 2011

R T

Δ Mkr1 10 s  
-57.55 dB

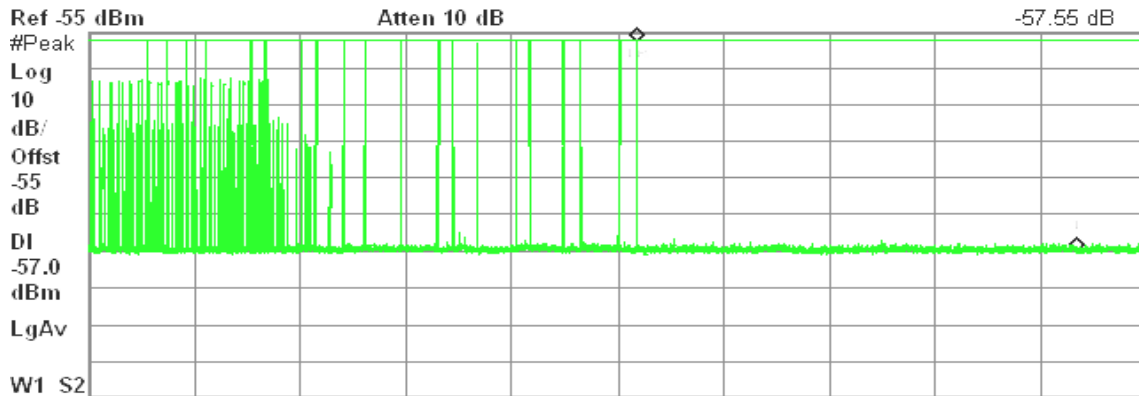

Center 5.510 000 GHz

Span 0 Hz

Res BW 3 MHz

VBW 3 MHz

Sweep 24 s (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	12.42 s	-57.54 dBm
1Δ	(1)	Time	10 s	-57.55 dB



### NON-OCCUPANCY PERIOD

#### **UNII Band II**

#### IEEE 802.11n HT 20 MHz mode


#### Type 1 Non-Occupancy Period Test Results

No non-compliance noted.

No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 20:52:42 Jul 4, 2011

R T

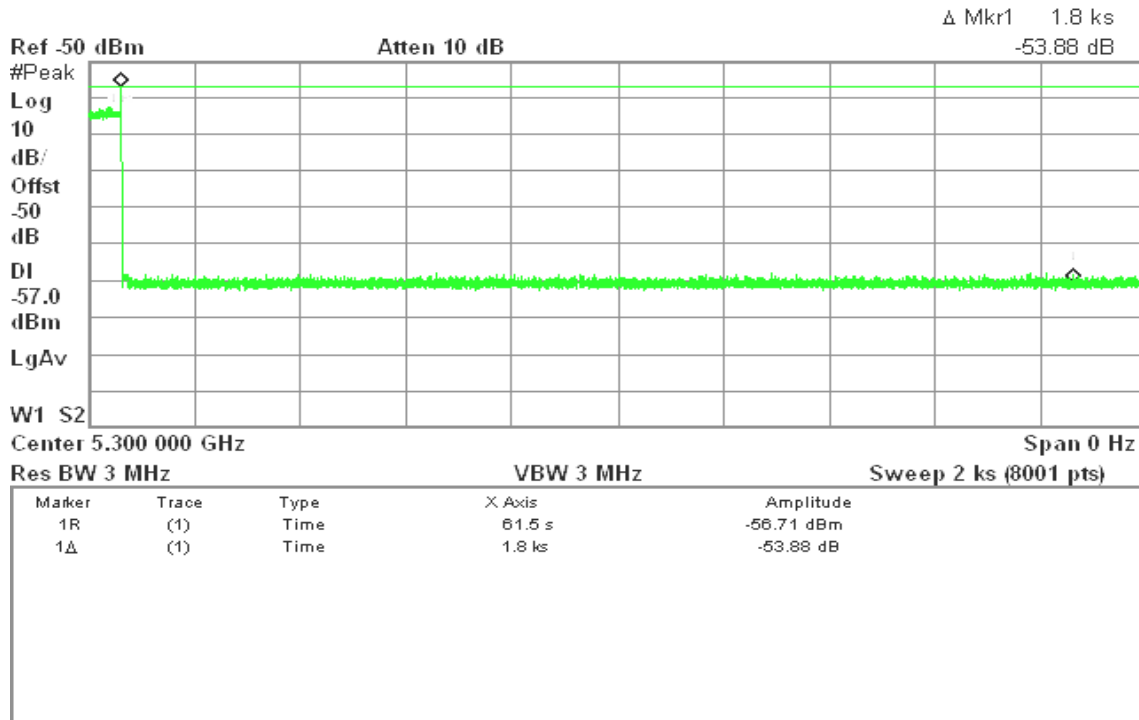



**Type 5 Non-Occupancy Period Test Results**

No non-compliance noted.


No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 20:13:28 Jul 4, 2011

R T

Δ Mkr1 1.8 ks

-53.72 dB

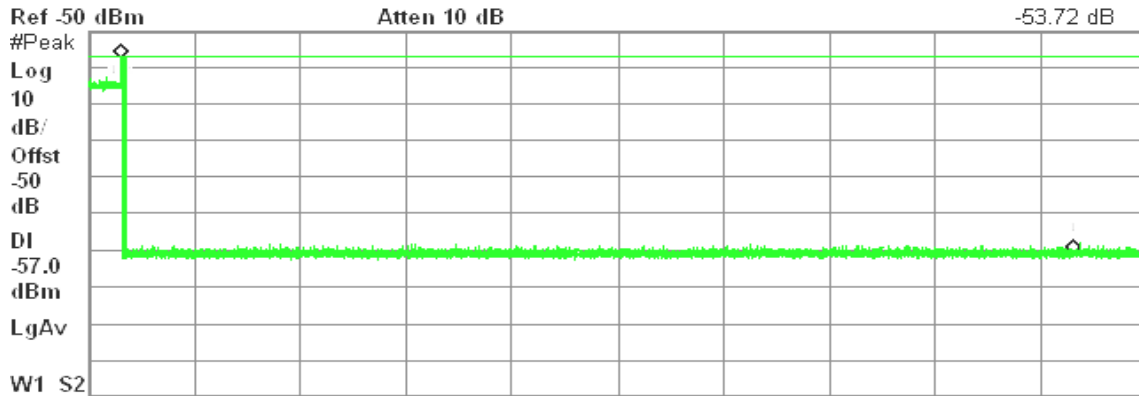

Center 5.300 000 GHz

Span 0 Hz

Res BW 3 MHz

VBW 3 MHz

Sweep 2 ks (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	61 s	-57.27 dBm
1Δ	(1)	Time	1.8 ks	-53.72 dB



**IEEE 802.11n HT 40 MHz mode**

**Type 1 Non-Occupancy Period Test Results**


No non-compliance noted.

No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 18:36:38 Jul 4, 2011

R T

Δ Mkr1 1.8 ks

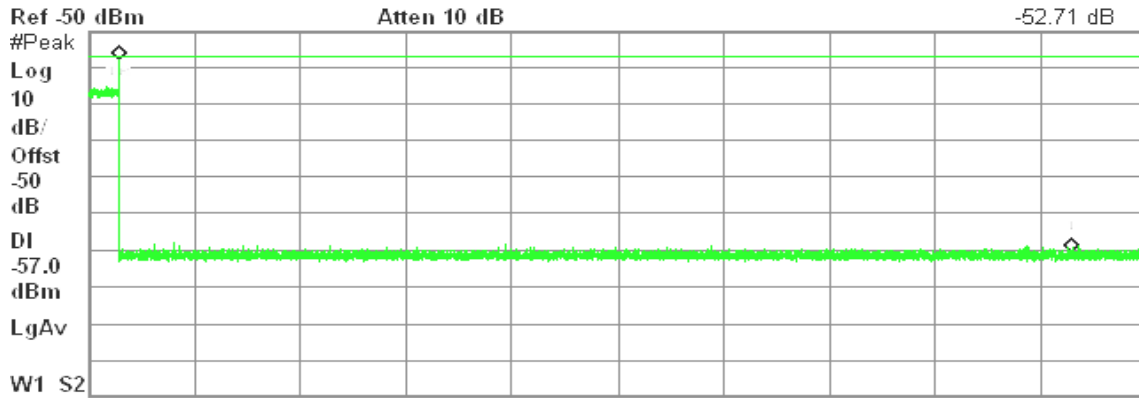

Center 5.310 000 GHz

Span 0 Hz

Res BW 3 MHz

VBW 3 MHz

Sweep 2 ks (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	57.5 s	-57.83 dBm
1Δ	(1)	Time	1.8 ks	-52.71 dB



**Type 5 Non-Occupancy Period Test Results**

No non-compliance noted.


No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 18:07:54 Jul 4, 2011

R T

Δ Mkr1 1.8 ks

-52.95 dB

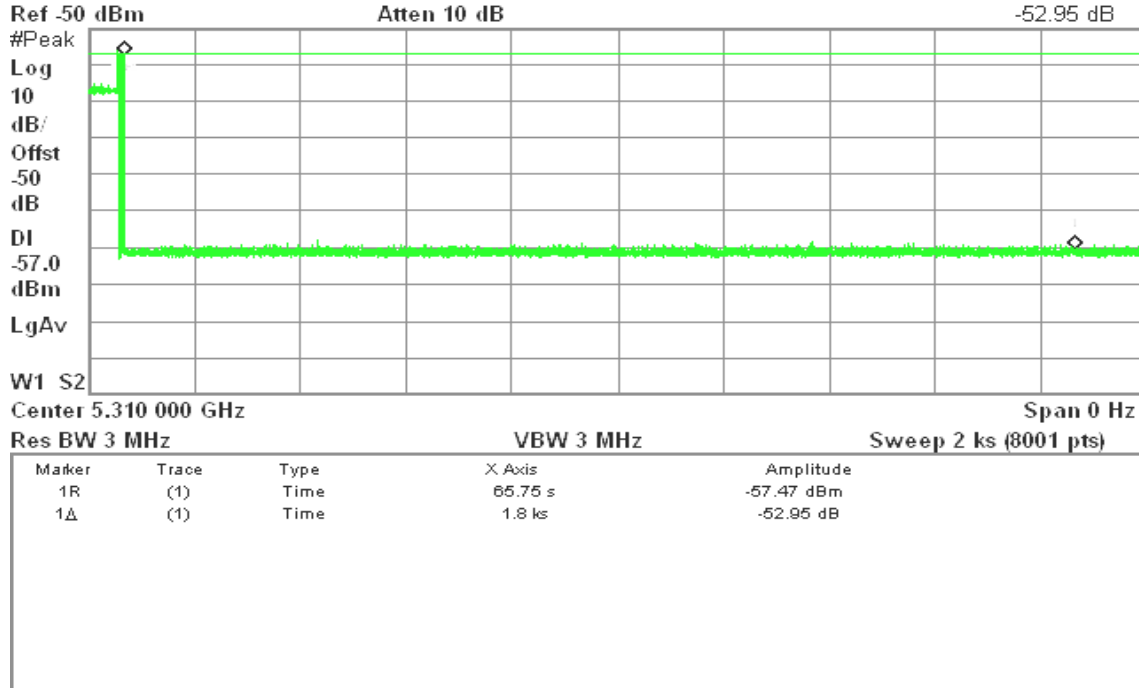





### UNII Band III

#### IEEE 802.11n HT 20 MHz mode

#### Type 1 Non-Occupancy Period Test Results

No non-compliance noted.

No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 16:49:54 Jul 3, 2011

R T

Δ Mkr1 1.8 ks



Center 5.500 000 GHz Span 0 Hz  
 Res BW 3 MHz VBW 3 MHz Sweep 2 ks (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	68.25 s	-56.66 dBm
1Δ	(1)	Time	1.8 ks	-59.62 dB



**Type 5 Non-Occupancy Period Test Results**

No non-compliance noted.


No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 14:51:07 Jul 4, 2011

R T

Δ Mkr1 1.8 ks

-56.26 dB

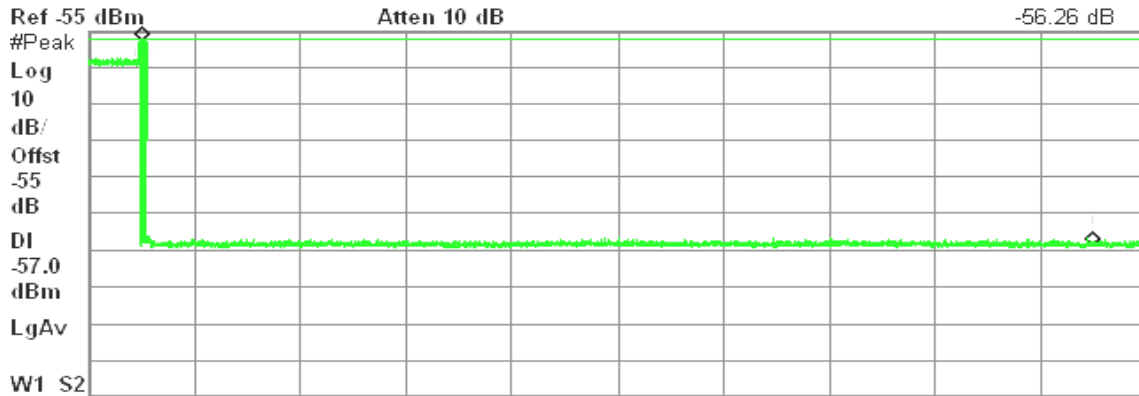

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	100.5 s	-57.56 dBm
1Δ	(1)	Time	1.8 ks	-56.26 dB



**IEEE 802.11n HT 40 MHz mode**

**Type 1 Non-Occupancy Period Test Results**


No non-compliance noted.

No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 16:27:55 Jul 4, 2011

R T

Δ Mkr1 1.8 ks

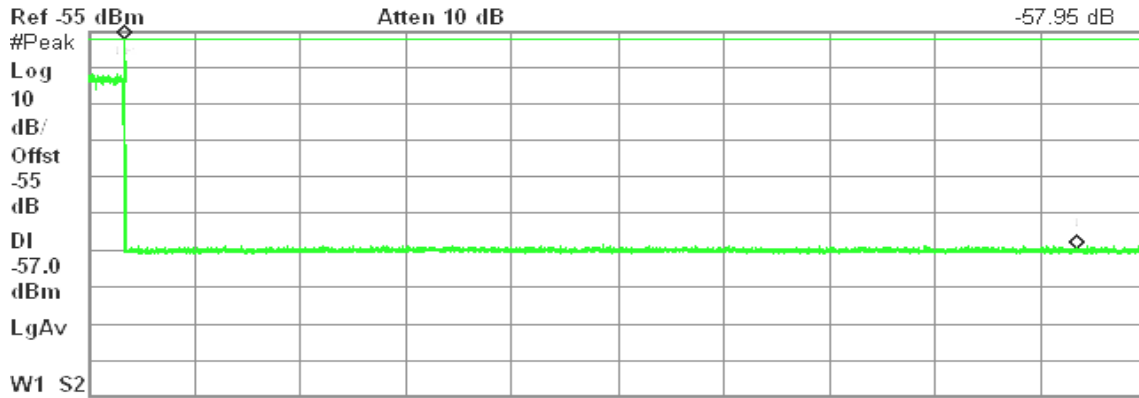

Center 5.510 000 GHz

Span 0 Hz

Res BW 3 MHz

VBW 3 MHz

Sweep 2 ks (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	67.75 s	-56.97 dBm
1Δ	(1)	Time	1.8 ks	-57.95 dB



### Type 5 Non-Occupancy Period Test Results

No non-compliance noted.

No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 14:09:22 Jul 4, 2011

R L

Δ Mkr1 1.8 ks

