

FCC PART 15 SUBPART C
EMI MEASUREMENT AND TEST REPORT
For
AMBIT Microsystems Corporation

4-1, Ming Shen Street, Tu Chen Industrial District.
Tu Chen, Taipei Hsien 236, Taiwan, R.O.C.

FCC ID: MCLAIRMPI350

July 17, 2002

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: Wireless MiniPCI Card
Test Engineer: <u>Benjamin Jin</u>	
Report No.: <u>R0206144</u>	
Test Date: <u>June 26, 2002</u>	
Reviewed By: <u>Jeff Lee</u>	
Prepared By: Bay Area Compliance Laboratory Corporation 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732 9164	

Note: This test report is specially limited to the above client company and the product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

1 - GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 OBJECTIVE	4
1.3 RELATED SUBMITTAL(S)/GRANT(S).....	5
1.4 TEST METHODOLOGY	5
1.5 TEST FACILITY	5
1.6 TEST EQUIPMENT LIST AND DETAILS.....	6
1.7 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS.....	6
2 - SYSTEM TEST CONFIGURATION	7
2.1 JUSTIFICATION	7
2.2 EUT EXERCISE SOFTWARE	7
2.3 SPECIAL ACCESSORIES	7
2.4 SCHEMATICS / BLOCK DIAGRAM	7
2.5 EQUIPMENT MODIFICATIONS	7
2.6 CONFIGURATION OF TEST SYSTEM.....	8
2.7 TEST SETUP BLOCK DIAGRAM	8
3 - SUMMARY OF TEST RESULTS	9
4 - PEAK OUTPUT POWER MEASUREMENT	10
4.1 STANDARD APPLICABLE	10
4.2 MEASUREMENT PROCEDURE.....	10
4.3 MEASUREMENT RESULT	10
4.4 PLOT OF MAXIMUM PEAK OUTPUT POWER.....	10
5 - SPURIOUS EMISSION	11
5.1 STANDARD APPLICABLE	11
5.2 MEASUREMENT PROCEDURE.....	11
5.3 MEASUREMENT RESULT	11
6 - PEAK POWER SPECTRAL DENSITY	12
6.1 STANDARD APPLICABLE	12
6.2 MEASUREMENT PROCEDURE.....	12
6.3 MEASUREMENT RESULTS.....	12
6.4 PLOT OF PEAK POWER SPECTRAL DENSITY	12
7 - 6 DB BANDWIDTH	13
7.1 STANDARD APPLICABLE	13
7.2 MEASUREMENT PROCEDURE.....	13
7.3 MEASUREMENT RESULT	13
7.4 PLOTS OF 6DB BANDWIDTH.....	13
8 -100 KHZ BANDWIDTH OF BAND EDGES MEASUREMENT	14
8.1 STANDARD APPLICABLE	14
8.2 MEASUREMENT PROCEDURE.....	14
8.3 MEASURE RESULTS.....	14
9 - ANTENNA REQUIREMENT	15
9.1 STANDARD APPLICABLE	15
9.2 ANTENNA CONNECTED CONSTRUCTION	15
10 - RF EXPOSURE	16
11 - SPURIOUS RADIATED EMISSION	17
11.1 MEASUREMENT UNCERTAINTY	17
11.2 EUT SETUP.....	17
11.3 SPECTRUM ANALYZER SETUP	17
11.4 TEST PROCEDURE	18

11.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	18
11.6 SUMMARY OF TEST RESULTS	19
12 - CONDUCTED EMISSIONS	26
12.1 MEASUREMENT UNCERTAINTY	26
12.2 EUT SETUP	26
12.3 SPECTRUM ANALYZER SETUP	26
12.4 TEST PROCEDURE	26
12.5 SUMMARY OF TEST RESULTS	27
12.6 CONDUCTED EMISSIONS TEST DATA	27
12.7 PLOT OF CONDUCTED EMISSIONS TEST DATA	27

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

The *AMBIT Microsystems Corporation*'s Model: *AIR-MPI350* or the "EUT" as referred to in this report is a wireless MiniPCI Card.

The mini PCI card wireless LAN card provides RF modem functionality utilizing direct sequence spread spectrum technology for client applications in the ISM 2.4GHz RF frequency band. Supporting a Type IIIA mini PCI form factor, this product provides industry-standard PHY/MAC functionality per the standard of IEEE 802.11b at 1, 2, 5.5 & 11 Mb/s data rates. The design is based on the Intersil Prism 2.5 chipset. This product will be PCI 2.2 compliant, and will provide a standard Mini PCI Card Interface through the industry-standard 124-pin connector. The product interface utilizes bus mastering DMA for all packet data transfers across the system bus.

The EUT provides the following feature(s):

- Compatible with IEEE 802.11b high rate standard to provide wireless Ethernet speeds of 11Mbps data rate
- Modulation BPSK-1 Mbps, QPSK-2 Mbps, CCK 5.5 and 11 Mbps
- Allow auto fallback data rate for optimized reliability, throughput and transmission range
- Supports wireless data encryption with 128-bit WEP standard for security, EAP and LEAP security is addresses with WEP (up to 1024 bit) and other security management provisions as enabled by the firmware and the host driver.
- Dual diversity antenna connectors supported for the multi-path environment
- Frequency 2400-2500MHz, useable 2412-2484 MHz in 1 MHz steps
- External ON/OFF switch & indicator LEDs
- It is a bus mastering PCI interface with full support for power management including ACPI power states D0-D3, CAM, MaxPSP and Fast PSP.
- 4M flash was designed to allow for the PXE code (remote boot), which is a BIOS extension.

The EUT was fed by Toshiba notebook PC AC/DC power, M/N: ADP45XH.

* *The test data in this test report was good for the test sample only. It may have deviation for other test samples.*

1.2 Objective

This type approval report is prepared on behalf of *Ambit Microsystems Corporation* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The objective of the manufacturer is to demonstrate compliance with FCC rules for Output Power, Antenna Requirements, 6 dB Bandwidth, power density, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Spurious Radiated Emission.

1.3 Related Submittal(s)/Grant(s)

No Related Submittal(s).

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2000, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory Corporation. The radiated testing was performed at an antenna-to-EUT distance of 3 Meters.

1.5 Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI).

The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2000.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, IEC/CISPR 22: 1998, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

1.6 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Due Date
HP	Spectrum Analyzer	8568B	2610A02165	12/6/02
HP	Spectrum Analyzer	8593B	2919A00242	12/20/02
HP	Amplifier	8349B	2644A02662	12/20/02
HP	Quasi-Peak Adapter	85650A	917059	12/6/02
HP	Amplifier	8447E	1937A01046	12/6/02
A.H. System	Horn Antenna	SAS0200/571	261	12/27/02
Com-Power	Log Periodic Antenna	AL-100	16005	11/2/02
Com-Power	Biconical Antenna	AB-100	14012	11/2/02
Solar Electronics	LISN	8012-50-R-24-BNC	968447	12/28/02
Com-Power	LISN	LI-200	12208	12/20/02
Com-Power	LISN	LI-200	12005	12/20/02
BACL	Data Entry Software	DES1	0001	12/20/02

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. certifies that all calibration has been performed using suitable standards traceable to the NATIONAL INSTITUTE of STANDARDS and TECHNOLOGY (NIST).

1.7 Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
Toshiba	Notebook PC	PP40IU	12012395	DOC
Toshiba	AC/DC Power Adapter	ADP45XH	None	DOC

2 - SYSTEM TEST CONFIGURATION

2.1 Justification

The host system was configured for testing in a typical fashion (as a normally used by a typical user).

The EUT was tested in the normal (native) operating mode to represent *worst-case* results during the final qualification test.

2.2 EUT Exercise Software

The EUT exercising program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The test software, terminal.exe, provided by the customer, is started the Windows 98 terminal program under the Windows 98 operating system. Once loaded, the program sequentially exercises each system component.

The sequence used is as follows:

1. Lines of Hs scroll across the notebook PC.

This process is continuous throughout all tests.

2.3 Special Accessories

As shown in section 2.5, all interface cables used for compliance testing are shielded as normally supplied by INMAC and their respective support equipment manufacturers. The notebook pc featured shielded metal connectors.


2.4 Schematics / Block Diagram

Please refer to Exhibit D.


2.5 Equipment Modifications

No modifications were made by BACL Corporation to ensure the EUT to comply with the applicable limits and requirements.

2.6 Configuration of Test System



2.7 Test Setup Block Diagram

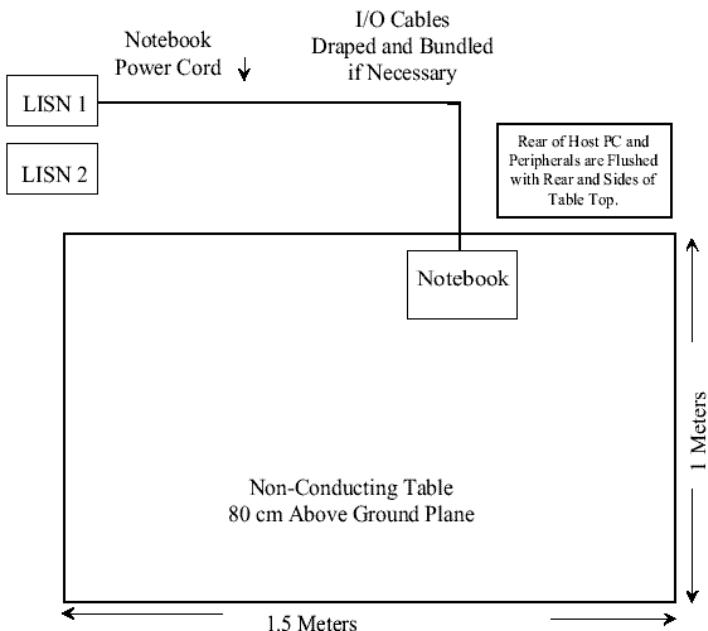

3 - SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT	REFERENCE
§ 2.1091	RF Safety Requirements	Compliant	Section 10
§15.203	Antenna Requirement	Compliant	Section 9 Appendix F
§ 15.205	Restricted Bands	Compliant	Section 11
§15.207 (a)	Conducted Emission	Compliant	Section 12
§15.209 (a)	Radiated Emission	Compliant	Section 11
§15.209 (f)	Spurious Emission	Compliant	Section 5 Appendix B
§15.247 (a) (2)	6 dB Bandwidth	Compliant	Section 6 Appendix C
§15.247 (b) (2)	Maximum Peak Output Power	Compliant	Section 4 Appendix A
§ 15.247 (c)	100 kHz Bandwidth of Frequency Band Edge	Compliant	Section 8 Appendix E
§15.247 (d)	Peak Power Spectral Density	Compliant	Section 7 Appendix D

4 - PEAK OUTPUT POWER MEASUREMENT

4.1 Standard Applicable

According to §15.247(b) (2), for all direct sequence systems, the maximum peak output power of the intentional radiator shall not exceed 1 Watt.

4.2 Measurement Procedure

1. Place the EUT on the turntable and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

4.3 Measurement Result

Please refer to the attached pictures for more information.

Frequency	Output Power in dBm	Output Power in W	Standard	Result
Left Antenna				
Low	10.00	0.010	≤ 1W	Compliant
Mid	11.33	0.014	≤ 1W	Compliant
High	8.17	0.007	≤ 1W	Compliant
Right Antenna				
Low	10.17	0.013	≤ 1W	Compliant
Mid	11.50	0.014	≤ 1W	Compliant
High	8.17	0.007	≤ 1W	Compliant

4.4 Plot of Maximum Peak Output Power

Refer to Appendix A.

5 - SPURIOUS EMISSION

5.1 Standard Applicable

According to §15.209 (f) and §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit.

5.2 Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

5.3 Measurement Result

The plots of spurious emission please refer to the Appendix B.

6 - PEAK POWER SPECTRAL DENSITY

6.1 Standard Applicable

According to §15.247 (d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Repeat above procedures until all frequencies measured were complete.

6.3 Measurement Results

Frequency	Output Power in dBm	Standard (dBm)	Result
Left Antenna			
Low	-23.50	≤ 8	Compliant
Mid	-23.33	≤ 8	Compliant
High	-21.67	≤ 8	Compliant
Right Antenna			
Low	-21.17	≤ 8	Compliant
Mid	-19.67	≤ 8	Compliant
High	-21.00	≤ 8	Compliant

6.4 Plot of Peak Power Spectral Density

Refer to Appendix C.

7 - 6 DB BANDWIDTH

7.1 Standard Applicable

According to §15.247(a)(2), for direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

7.3 Measurement Result

Please refer to appending plot for more information.

Frequency	Measured (MHz)	Standard (kHz)	Result
Left Antenna			
Low	9.17	≥ 500	Compliant
Mid	10.10	≥ 500	Compliant
High	10.83	≥ 500	Compliant
Right Antenna			
Low	10.10	≥ 500	Compliant
Mid	10.13	≥ 500	Compliant
High	10.27	≥ 500	Compliant

7.4 Plots of 6dB Bandwidth

Refer to Appendix D.

8 -100 KHZ BANDWIDTH OF BAND EDGES MEASUREMENT

8.1 Standard Applicable

According to §15.247(c), in *any* 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) see §15.2057(c)).

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.3 Measure Results

Please refer to the appending plot for more information.

9 - ANTENNA REQUIREMENT

9.1 Standard Applicable

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to § 15.247 (1), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

9.2 Antenna Connected Construction

The directional gain of antenna used for transmitting is 2 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement.

Please refer to the Appendix F and the EUT photo for details.

10 - RF EXPOSURE

According to §15.247(b)(4) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1093 RF exposure is calculated.

Limits for Maximum Permissive Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-15000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

MPE Prediction

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal: 11.50 (dBm)

Maximum peak output power at antenna input terminal: 14.13 (mW)

Antenna Gain (typical): 2 (dBi)

Maximum antenna gain: 1.58 (numeric)

Prediction distance: 20 (cm)

Predication frequency: 2400 (MHz)

MPE limit for uncontrolled exposure at prediction frequency: 1 (mW/cm²)

Power density at predication frequency: 0.0044 (mW/cm²)

Maximum allowable antenna gain: 355.56 (dBm)

Maximum allowable antenna gain: 25.51 (numeric)

Test Result

The predicted power density level at 3 cm is 0.0044mW/cm². This is below the uncontrolled exposure limit of 1mW/cm² at 2400 MHz.

This radio is classed as mobile equipment.

11 - SPURIOUS RADIATED EMISSION

11.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is ± 4.0 dB.

11.2 EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup in accordance with the ANSI C63.4-2000. The specification used was the FCC 15 Subpart C limits.

The EUT was installed in the notebook. The notebook was put on the center back edge of the test table.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The host PC system was connected with 120Vac/60Hz power source.

11.3 Spectrum Analyzer Setup

According to FCC Rules, 47 CFR §15.33 (a) (1), the system was tested to 25GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Start Frequency	30 MHz
Stop Frequency	25GHz
Sweep Speed	Auto
IF Bandwidth	1 MHz
Video Bandwidth	1 MHz
Quasi-Peak Adapter Bandwidth.....	120 kHz
Quasi-Peak Adapter Mode	Normal
Resolution Bandwidth.....	1MHz

11.4 Test Procedure

For the radiated emissions test, the Host PC system power cord was connected to the AC floor outlet since the power supply used in the EUT did not provide an accessory power outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "Qp" in the data table.

11.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Subpart C. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Subpart C Limit}$$

11.6 Summary of Test Results

According to the data in section 11.7, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.207 and 15.247, and had the worst margin of:

Left Film Antenna 30MHz to 25GHz, 3 meters

-10.4 dB μ V (AVG.) at 4824.00 MHz in the horizontal polarization, Low Channel
-13.0 dB μ V (AVG.) at 4884.00 MHz in the Horizontal polarization, Middle Channel
-15.5 dB μ V (AVG.) at 4944.00 MHz in the Vertical polarization, High Channel

Right Film Antenna 30MHz to 25GHz, 3 meters

-9.9 dB μ V (AVG.) at 4824.00 MHz in the horizontal polarization, Low Channel
-12.9 dB μ V (AVG.) at 4884.00 MHz in the Horizontal polarization, Middle Channel
-15.0 dB μ V (AVG.) at 4944.00 MHz in the Vertical polarization, High Channel

Left Stick Antenna 30MHz to 25GHz, 3 meters

-10.3 dB μ V (AVG.) at 4824.00 MHz in the horizontal polarization, Low Channel
-13.4 dB μ V (AVG.) at 4884.00 MHz in the Horizontal polarization, Middle Channel
-15.4 dB μ V (AVG.) at 4944.00 MHz in the Vertical polarization, High Channel

Right Stick Antenna 30MHz to 26GHz, 3 meters

-9.9 dB μ V (AVG.) at 4824.00 MHz in the horizontal polarization, Low Channel
-12.8 dB μ V (AVG.) at 4884.00 MHz in the Horizontal polarization, Middle Channel
-15.0 dB μ V (AVG.) at 4944.00 MHz in the Vertical polarization, High Channel

Left Dual Band Antenna 30MHz to 26GHz, 3 meters

-10.3 dB μ V (AVG.) at 4824.00 MHz in the horizontal polarization, Low Channel
-13.1 dB μ V (AVG.) at 4884.00 MHz in the Horizontal polarization, Middle Channel
-15.5 dB μ V (AVG.) at 4944.00 MHz in the Vertical polarization, High Channel

Right Dual Band Antenna 30MHz to 26GHz, 3 meters

-10.0 dB μ V (AVG.) at 4824.00 MHz in the horizontal polarization, Low Channel
-13.1 dB μ V (AVG.) at 4884.00 MHz in the Horizontal polarization, Middle Channel
-15.1 dB μ V (AVG.) at 4944.00 MHz in the Vertical polarization, High Channel

11.7.1 Final test data, left film antenna

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dB μ V/m	Comments	Angle Degree	Height Meter	Polar H/V	Antenna dB μ V/m	Cable DB	Amp. DB	Corr. Ampl. dB μ V/m	Limit dB μ V/m	Margin dB
Low Channel											
4824.00	36.2	AVG.	230	1.2	H	32.5	4.9	30.0	43.6	54	-10.4
4824.00	34.1	AVG.	250	1.2	V	32.5	4.9	30.0	41.5	54	-12.5
258.06	34.3		180	1.5	V	13.1	3.0	25.0	25.4	46	-20.6
258.06	32.5		160	1.5	H	13.1	3.0	25.0	23.6	46	-22.4
245.62	29.8		0	1.0	H	12.6	2.3	25.0	19.7	46	-26.3
245.62	28.2		30	1.0	V	12.6	2.3	25.0	18.1	46	-27.9
Middle Channel											
4884.00	33.6	AVG.	270	1.2	H	32.5	4.9	30.0	41.0	54	-13.0
4874.00	30.2	AVG.	210	1.2	V	32.5	4.9	30.0	37.6	54	-16.4
351.80	33.6		90	2.5	V	15.5	4.3	25.0	28.4	46	-17.6
351.80	34.7		30	1.0	H	15.5	4.3	30.0	24.5	46	-21.5
226.90	31.4		150	1.0	H	12.1	3.9	25.0	22.4	46	-23.6
226.90	30.5		160	1.2	V	12.1	3.9	25.0	21.5	46	-24.5
High Channel											
4974.00	31.1	AVG.	150	1.0	V	32.5	4.9	30.0	38.5	54	-15.5
4974.00	29.4	AVG.	180	1.2	H	32.5	4.9	30.0	36.8	54	-17.2
310.52	31.2		270	1.2	V	15.9	3.7	25.0	25.8	46	-20.2
310.52	30.6		250	1.0	H	15.9	3.7	25.0	25.2	46	-20.8
221.64	30.7		60	1.2	V	12.1	3.9	25.0	21.7	46	-24.3
221.64	29.5		90	1.0	H	12.1	3.9	25.0	20.5	46	-25.5

* There was no apparent emission after the second harmonics.

11.7.2 Final test data, right film antenna

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dB μ V/m	Comments		Angle Degree	Height Meter	Polar H/V	Antenna dB μ V/m	Cable DB		Corr. Ampl. dB μ V/m	Limit dB μ V/m
Low Channel											
4824.00	36.7	AVG.	210	1.2	H	32.5	4.9	30.0	44.1	54	-9.9
4824.00	34.6	AVG.	180	1.2	V	32.5	4.9	30.0	42.0	54	-12.0
258.06	34.5		270	1.5	V	13.1	3.0	25.0	25.6	46	-20.4
258.06	32.2		240	1.5	H	13.1	3.0	25.0	23.3	46	-22.7
245.62	30.7		0	1.0	H	12.6	2.3	25.0	20.6	46	-25.4
245.62	28.4		30	1.0	V	12.6	2.3	25.0	18.3	46	-27.7
Middle Channel											
4884.00	33.7	AVG.	310	1.2	H	32.5	4.9	30.0	41.1	54	-12.9
4874.00	30.4	AVG.	270	1.2	V	32.5	4.9	30.0	37.8	54	-16.2
351.80	33.5		150	2.5	V	15.5	4.3	25.0	28.3	46	-17.7
351.80	34.6		30	1.0	H	15.5	4.3	30.0	24.4	46	-21.6
226.90	31.9		180	1.0	H	12.1	3.9	25.0	22.9	46	-23.1
226.90	30.2		160	1.2	V	12.1	3.9	25.0	21.2	46	-24.8
High Channel											
4944.00	31.6	AVG.	150	1.0	V	32.5	4.9	30.0	39.0	54	-15.0
4944.00	29.8	AVG.	110	1.2	H	32.5	4.9	30.0	37.2	54	-16.8
310.52	31.5		0	1.2	V	15.9	3.7	25.0	26.1	46	-19.9
310.52	30.4		90	1.0	H	15.9	3.7	25.0	25.0	46	-21.0
221.64	30.4		30	1.2	V	12.1	3.9	25.0	21.4	46	-24.6
221.64	29.9		60	1.0	H	12.1	3.9	25.0	20.9	46	-25.1

* There was no apparent emission after the second harmonics.

11.7.3 Final test data, left stick antenna

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dB μ V/m	Comments		Angle Degree	Height Meter	Polar H/V	Antenna dB μ V/m	Cable DB		Corr. Ampl. dB μ V/m	Limit dB μ V/m
Low Channel											
4824.00	36.3	AVG.	220	1.2	H	32.5	4.9	30.0	43.7	54	-10.3
4824.00	34.0	AVG.	240	1.2	V	32.5	4.9	30.0	41.4	54	-12.6
258.06	34.5		180	1.5	V	13.1	3.0	25.0	25.6	46	-20.4
258.06	32.2		150	1.5	H	13.1	3.0	25.0	23.3	46	-22.7
245.62	29.8		30	1.0	H	12.6	2.3	25.0	19.7	46	-26.3
245.62	28.2		0	1.0	V	12.6	2.3	25.0	18.1	46	-27.9
Middle Channel											
4884.00	33.2	AVG.	250	1.2	H	32.5	4.9	30.0	40.6	54	-13.4
4874.00	30.6	AVG.	200	1.2	V	32.5	4.9	30.0	38.0	54	-16.0
351.80	33.8		90	2.5	V	15.5	4.3	25.0	28.6	46	-17.4
351.80	34.5		60	1.0	H	15.5	4.3	30.0	24.3	46	-21.7
226.90	31.4		150	1.0	H	12.1	3.9	25.0	22.4	46	-23.6
226.90	30.5		140	1.2	V	12.1	3.9	25.0	21.5	46	-24.5
High Channel											
4944.00	31.2	AVG.	150	1.0	V	32.5	4.9	30.0	38.6	54	-15.4
4944.00	29.4	AVG.	120	1.2	H	32.5	4.9	30.0	36.8	54	-17.2
310.52	31.8		230	1.2	V	15.9	3.7	25.0	26.4	46	-19.6
310.52	30.6		250	1.0	H	15.9	3.7	25.0	25.2	46	-20.8
221.64	30.7		110	1.2	V	12.1	3.9	25.0	21.7	46	-24.3
221.64	29.5		90	1.0	H	12.1	3.9	25.0	20.5	46	-25.5

* There was no apparent emission after the second harmonics.

11.7.4 Final test data, right stick antenna

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dB μ V/m	Comments		Angle Degree	Height Meter	Polar H/V	Antenna dB μ V/m	Cable DB		Corr. Ampl. dB μ V/m	Limit dB μ V/m
Low Channel											
4824.00	36.7	AVG.	210	1.2	H	32.5	4.9	30.0	44.1	54	-9.9
4824.00	34.5	AVG.	180	1.2	V	32.5	4.9	30.0	41.9	54	-12.1
258.06	34.5		270	1.5	V	13.1	3.0	25.0	25.6	46	-20.4
258.06	32.2		240	1.5	H	13.1	3.0	25.0	23.3	46	-22.7
245.62	30.7		0	1.0	H	12.6	2.3	25.0	20.6	46	-25.4
245.62	28.4		30	1.0	V	12.6	2.3	25.0	18.3	46	-27.7
Middle Channel											
4884.00	33.8	AVG.	270	1.2	H	32.5	4.9	30.0	41.2	54	-12.8
4874.00	30.4	AVG.	290	1.2	V	32.5	4.9	30.0	37.8	54	-16.2
351.80	33.5		150	2.5	V	15.5	4.3	25.0	28.3	46	-17.7
351.80	34.6		30	1.0	H	15.5	4.3	30.0	24.4	46	-21.6
226.90	31.6		180	1.0	H	12.1	3.9	25.0	22.6	46	-23.4
226.90	30.2		190	1.2	V	12.1	3.9	25.0	21.2	46	-24.8
High Channel											
4944.00	31.6	AVG.	160	1.0	V	32.5	4.9	30.0	39.0	54	-15.0
4944.00	29.8	AVG.	110	1.2	H	32.5	4.9	30.0	37.2	54	-16.8
310.52	31.5		0	1.2	V	15.9	3.7	25.0	26.1	46	-19.9
310.52	30.4		45	1.0	H	15.9	3.7	25.0	25.0	46	-21.0
221.64	30.4		30	1.2	V	12.1	3.9	25.0	21.4	46	-24.6
221.64	29.9		60	1.0	H	12.1	3.9	25.0	20.9	46	-25.1

* There was no apparent emission after the second harmonics.

11.7.5 Final test data, left dual band antenna

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dB μ V/m	Comments		Angle Degree	Height Meter	Polar H/V	Antenna dB μ V/m	Cable DB		Corr. Ampl. dB μ V/m	Limit dB μ V/m
Low Channel											
4824.00	36.3	AVG.	230	1.2	H	32.5	4.9	30.0	43.7	54	-10.3
4824.00	34.2	AVG.	250	1.2	V	32.5	4.9	30.0	41.6	54	-12.4
258.06	34.7		180	1.5	V	13.1	3.0	25.0	25.8	46	-20.2
258.06	32.5		160	1.5	H	13.1	3.0	25.0	23.6	46	-22.4
245.62	29.8		0	1.0	H	12.6	2.3	25.0	19.7	46	-26.3
245.62	28.2		30	1.0	V	12.6	2.3	25.0	18.1	46	-27.9
Middle Channel											
4884.00	33.5	AVG.	270	1.2	H	32.5	4.9	30.0	40.9	54	-13.1
4874.00	30.2	AVG.	210	1.2	V	32.5	4.9	30.0	37.6	54	-16.4
351.80	33.6		90	2.5	V	15.5	4.3	25.0	28.4	46	-17.6
351.80	34.7		30	1.0	H	15.5	4.3	30.0	24.5	46	-21.5
226.90	31.6		150	1.0	H	12.1	3.9	25.0	22.6	46	-23.4
226.90	30.5		160	1.2	V	12.1	3.9	25.0	21.5	46	-24.5
High Channel											
4944.00	31.1	AVG.	150	1.0	V	32.5	4.9	30.0	38.5	54	-15.5
4944.00	29.3	AVG.	180	1.2	H	32.5	4.9	30.0	36.7	54	-17.3
310.52	31.5		270	1.2	V	15.9	3.7	25.0	26.1	46	-19.9
310.52	30.6		250	1.0	H	15.9	3.7	25.0	25.2	46	-20.8
221.64	30.7		60	1.2	V	12.1	3.9	25.0	21.7	46	-24.3
221.64	29.7		90	1.0	H	12.1	3.9	25.0	20.7	46	-25.3

- There was no apparent emission after the second harmonics.

11.7.6 Final test data, right dual band antenna

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dB μ V/m	Comments		Angle Degree	Height Meter	Polar H/V	Antenna dB μ V/m	Cable DB		Corr. Ampl. dB μ V/m	Limit dB μ V/m
Low Channel											
4824.00	36.6	AVG.	210	1.2	H	32.5	4.9	30.0	44.0	54	-10.0
4824.00	34.7	AVG.	180	1.2	V	32.5	4.9	30.0	42.1	54	-11.9
258.06	34.4		270	1.5	V	13.1	3.0	25.0	25.5	46	-20.5
258.06	32.5		240	1.5	H	13.1	3.0	25.0	23.6	46	-22.4
245.62	30.5		0	1.0	H	12.6	2.3	25.0	20.4	46	-25.6
245.62	28.6		30	1.0	V	12.6	2.3	25.0	18.5	46	-27.5
Middle Channel											
4884.00	33.5	AVG.	310	1.2	H	32.5	4.9	30.0	40.9	54	-13.1
4874.00	30.6	AVG.	270	1.2	V	32.5	4.9	30.0	38.0	54	-16.0
351.80	33.4		150	2.5	V	15.5	4.3	25.0	28.2	46	-17.8
351.80	34.9		30	1.0	H	15.5	4.3	30.0	24.7	46	-21.3
226.90	31.7		180	1.0	H	12.1	3.9	25.0	22.7	46	-23.3
226.90	30.3		160	1.2	V	12.1	3.9	25.0	21.3	46	-24.7
High Channel											
4974.00	31.5	AVG.	150	1.0	V	32.5	4.9	30.0	38.9	54	-15.1
4974.00	29.9	AVG.	110	1.2	H	32.5	4.9	30.0	37.3	54	-16.7
310.52	31.6		0	1.2	V	15.9	3.7	25.0	26.2	46	-19.8
310.52	30.5		90	1.0	H	15.9	3.7	25.0	25.1	46	-20.9
221.64	30.2		30	1.2	V	12.1	3.9	25.0	21.2	46	-24.8
221.64	29.7		60	1.0	H	12.1	3.9	25.0	20.7	46	-25.3

* There was no apparent emission after the second harmonics.

12 - CONDUCTED EMISSIONS

12.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is ± 2.4 dB.

12.2 EUT Setup

The measurement was performed at the **Open Area Test Site**, using the same setup per ANSI C63.4-2000 measurement procedure. The specification used was FCC 15 Subpart C limits.

The EUT was installed in the notebook. The notebook was put on the center back edge of the test table.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The host PC system was connected with 120Vac/60Hz power source.

12.3 Spectrum Analyzer Setup

The spectrum analyzer was set with the following configurations during the conduction test:

Start Frequency.....	450 kHz
Stop Frequency.....	30 MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10 kHz
Video Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode.....	Normal

12.4 Test Procedure

During the conducted emission test, the power cord of the host system was connected to the auxiliary outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of each modes tested to ensure EUT is compliant with all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings were only performed when an emission was found to be marginal (within -4 dB μ V of specification limits). Quasi-peak readings are distinguished with a "Qp".

12.5 Summary of Test Results

According to the data in section 12.6, the EUT complied with the FCC Conducted margin for a Class B device, with the *worst* margin reading of:

-10.5 dB μ V at 0.89 MHz in the Line mode

12.6 Conducted Emissions Test Data

LINE CONDUCTED EMISSIONS				FCC PART 15 CLASS B	
Frequency MHz	Amplitude dB μ V	Detector Qp/Ave/Peak	Phase Line/Neutral	Limit dB μ V	Margin dB
0.89	37.5	QP	Line	48	-10.5
0.86	37.3	QP	Neutral	48	-10.7
0.47	37.1	QP	Neutral	48	-10.9
0.51	37.0	QP	Line	48	-11.0
20.15	28.4	QP	Neutral	48	-19.6
4.55	27.9	QP	Line	48	-20.1

12.7 Plot of Conducted Emissions Test Data

Plot(s) of Conducted Emissions Test Data is presented hereinafter as reference.

