



FCC TEST REPORT

REPORT NO.: RF920618R04

MODEL NO.: T60H677.02

RECEIVED: Jun. 18, 2003

TESTED: Jun. 19 to 27, 2003

APPLICANT: AMBIT Microsystems Corporation

ADDRESS: 4-1, Ming-Sheng ST., Tu-Cheng Industrial Area,
Tu-Cheng City, Taipei, Taiwan R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 84 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



Lab Code: 200376-0



Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS.....	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS.....	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT.....	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	9
4.1.2	TEST INSTRUMENTS	9
4.1.3	TEST SETUP	10
4.1.4	EUT OPERATING CONDITIONS	11
4.1.5	TEST RESULTS.....	12
4.2	RADIATED EMISSION MEASUREMENT	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	18
4.2.2	TEST INSTRUMENTS	19
4.2.3	TEST PROCEDURES	20
4.2.4	TEST SETUP	21
4.2.5	EUT OPERATING CONDITIONS	21
4.2.6	TEST RESULTS (A).....	22
4.2.7	TEST RESULTS (A) - DSSS	23
4.2.8	TEST RESULTS (A) -OFDM.....	26
4.2.9	TEST RESULTS (B).....	29
4.2.10	TEST RESULTS (B) - DSSS	30
4.2.11	TEST RESULTS (B) -OFDM.....	33
4.2.12	TEST RESULTS (C).....	36
4.2.13	TEST RESULTS (C) - DSSS	37
4.2.14	TEST RESULTS (C) -OFDM.....	40
4.2.15	TEST RESULTS (D).....	43
4.2.16	TEST RESULTS (D) - DSSS	44
4.2.17	TEST RESULTS (D) -OFDM.....	47
4.3	6dB BANDWIDTH MEASUREMENT	50
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	50
4.3.2	TEST INSTRUMENTS	50



4.3.3 TEST PROCEDURE51

4.3.4 TEST SETUP51

4.3.5 EUT OPERATING CONDITIONS51

4.3.6 TEST RESULTS-DSSS52

4.3.7 TEST RESULTS-OFDM56

4.4 MAXIMUM PEAK OUTPUT POWER60

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT60

4.4.2 TEST INSTRUMENTS60

4.4.3 TEST PROCEDURES61

4.4.4 TEST SETUP61

4.4.5 EUT OPERATING CONDITIONS61

4.4.6 TEST RESULTS-DSSS62

4.4.7 TEST RESULTS-OFDM62

4.5 POWER SPECTRAL DENSITY MEASUREMENT63

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....63

4.5.2 TEST INSTRUMENTS63

4.5.3 TEST PROCEDURE64

4.5.4 TEST SETUP64

4.5.5 EUT OPERATING CONDITIONS64

4.5.6 TEST RESULTS-DSSS65

4.5.7 TEST RESULTS-OFDM69

4.6 BAND EDGES MEASUREMENT.....73

4.6.1 LIMITS OF BAND EDGES MEASUREMENT.....73

4.6.2 TEST INSTRUMENTS73

4.6.3 TEST PROCEDURE73

4.6.4 EUT OPERATING CONDITION.....73

4.6.5 TEST RESULTS - DSSS74

4.6.6 TEST RESULTS-OFDM77

4.7 ANTENNA REQUIREMENT.....80

4.7.1 STANDARD APPLICABLE.....80

4.7.2 ANTENNA CONNECTED CONSTRUCTION80

5 PHOTOGRAPHS OF THE TEST CONFIGURATION.....81

6 INFORMATION ON THE TESTING LABORATORIES.....84



1 CERTIFICATION

PRODUCT : 802.11b/g MiniPCI module
BRAND NAME : AMBIT
MODEL NO. : T60H677.02
APPLICANT : AMBIT Microsystems Corporation
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Jun. 19 to 27, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: *Amanda Chu* , **DATE:** *Jul. 03, 2003*
(Amanda Chu)

APPROVED BY: *Eric Lin* , **DATE:** *Jul. 03, 2003*
(Eric Lin, Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission Limit: 48dBuV	PASS	Meet the requirement of limit Minimum passing margin is -10.83 dBuV at 8.3125 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -1.1 dBuV at 352.01MHz & 192.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11b/g MiniPCI module
MODEL NO.	T60H677.02
POWER SUPPLY	3.3VDC from host equipment
MODULATION TYPE	CCK, OFDM, DBPSK, DQPSK
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	1/2/5.5/6/9/11/12/18/24/36/48/54Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	16.36dBm
ANTENNA TYPE	Inverted F antenna & PIFA Antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. There are five types of antennas provided to this EUT, please refer to the following table:

No.	Model No.	Gain (dBi)	Antenna Type / Connector
1	ANTB24	-2.83	Inverted F antenna / with UFL connector
2	HFD04-R	-1.98	PIFA Antenna / with UFL connector
3	HFD01-R	-2.33	PIFA Antenna / with UFL connector
4	IFX-254/255	0.78	Inverted F antenna / with UFL connector
5	ANT-S-596	-2.6	Inverted F antenna / with UFL connector

2. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
3. The EUT complies with IEEE 802.11g draft standards, and backwards compatible with IEEE 802.11b products.
4. For a more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.
3. Test result (A) is for antenna 1, test result (B) is for antenna 2, test result (C) is for antenna 4 and test result (D) is for antenna 5, which were mentioned on section 3.1.
4. Transfer rate, 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst case, were chosen for final test.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a 802.11b/g MiniPCI module. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of 47 CFR Part 15, Subpart B, Class B (DoC). The test report has been issued separately.




3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP01L	TW-09C748-12800-17Q-C504	FCC DoC
2	PRINTER	EPSON	LQ-300+	DCGY017079	FCC DoC
3	MODEM	ACEEX	1414	0206026775	IFAXDM1414

No.	Signal cable description
1	NA
2	1.8 m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
3	1.3 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

Note: 1. All power cords of the above support units are unshielded (1.8m).

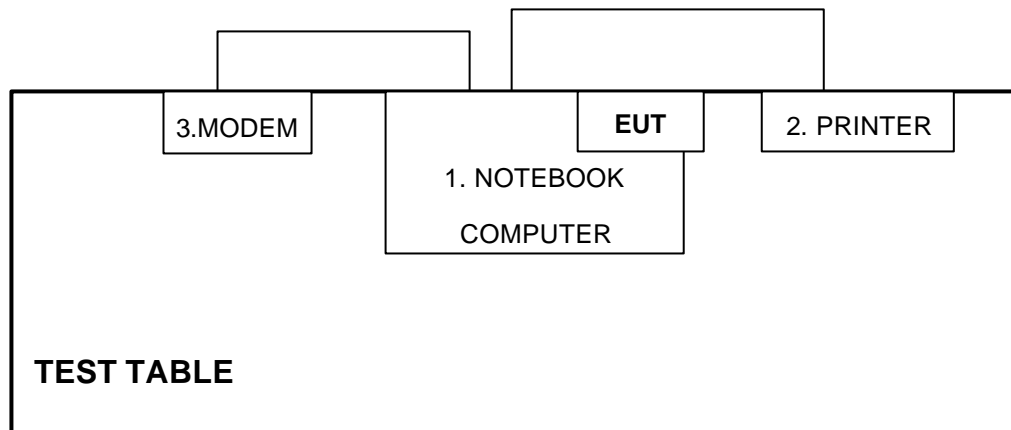

NOTE: 1. Please refer to the photos of test configuration in Item 5 also.



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	847124/029	Nov. 17, 2003
ROHDE & SCHWARZ LISN (for EUT)	ESHS-Z5	848773/004	Nov. 13, 2003
KYORITSU LISN (for peripheral)	KNW-407	8/1395/12	Jul. 23, 2003
RF Cable (JETBAO)	RG233/U	Cable_CA_01	Jul. 03, 2004
Terminator(for KYORITSU)	50	3	Apr. 11, 2004
Software	Cond-V2e	NA	NA

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.

3. TEST PROCEDURES

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.3 TEST SETUP

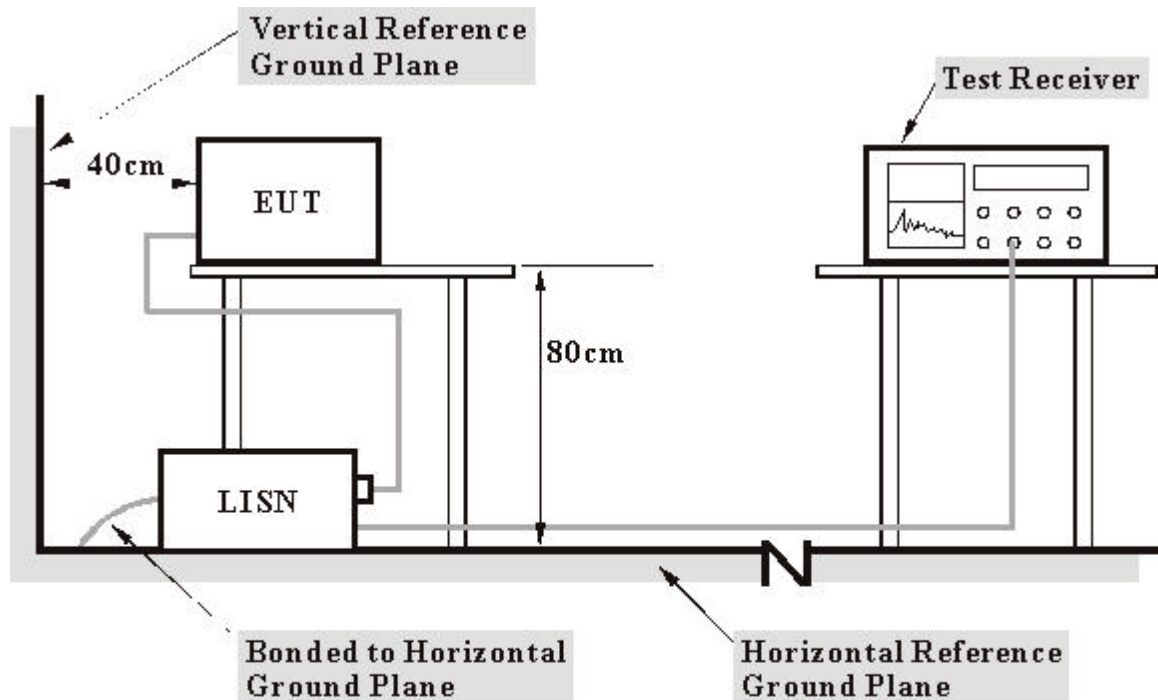

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.4 EUT OPERATING CONDITIONS

- a. Plug the EUT into the support unit 1 (Notebook computer) which placed on a testing table.
- b. The support unit 1 (Notebook computer) ran a test program to enable EUT under transmission condition continuously at specific channel frequency.




4.1.5 TEST RESULTS

EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	28 deg. C, 50%RH, 979 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	43.49	-	43.59	-	66.00	56.00	-22.41	-
2	0.193	0.10	46.18	-	46.28	-	63.91	53.91	-17.63	-
3	2.861	0.14	36.27	-	36.41	-	56.00	46.00	-19.59	-
4	3.820	0.19	35.58	-	35.77	-	56.00	46.00	-20.23	-
5	8.156	0.54	35.87	-	36.41	-	60.00	50.00	-23.59	-
6	11.523	0.66	35.24	-	35.90	-	60.00	50.00	-24.10	-

- NOTES: (1) "-": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

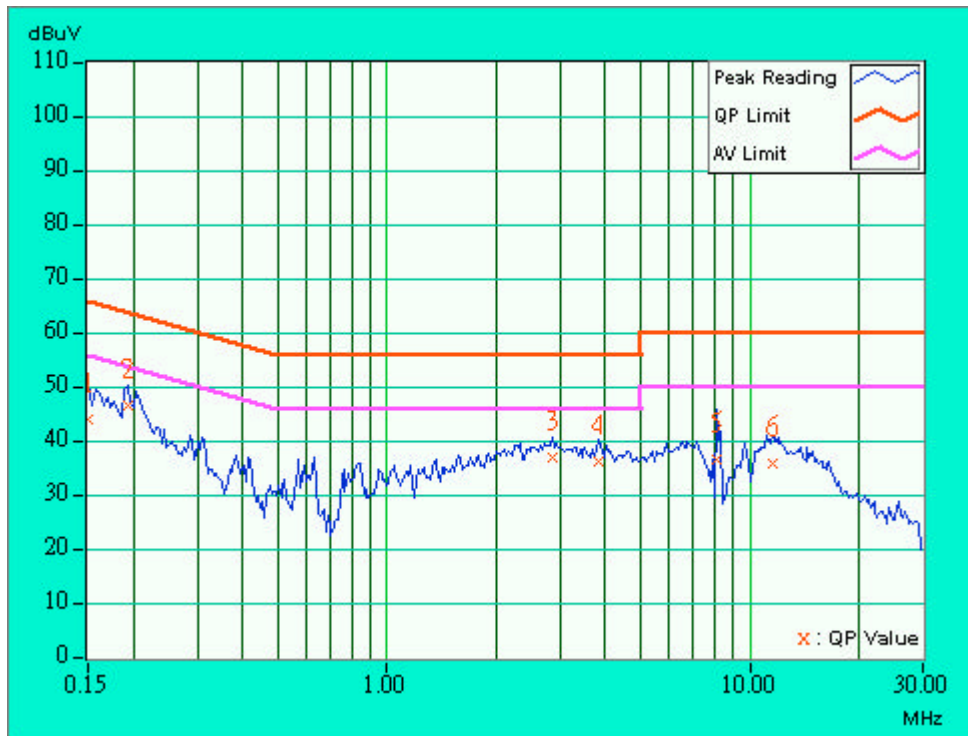




EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	28 deg. C, 50%RH, 979 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.10	40.73	-	40.83	-	65.38	55.38	-24.55	-
2	0.193	0.10	45.45	-	45.55	-	63.91	53.91	-18.36	-
3	0.841	0.10	35.59	-	35.69	-	56.00	46.00	-20.31	-
4	2.873	0.14	35.97	-	36.11	-	56.00	46.00	-19.89	-
5	8.320	0.47	43.46	-	43.93	-	60.00	50.00	-16.07	-
6	11.391	0.53	36.22	-	36.75	-	60.00	50.00	-23.25	-

- NOTES: (1) "*": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

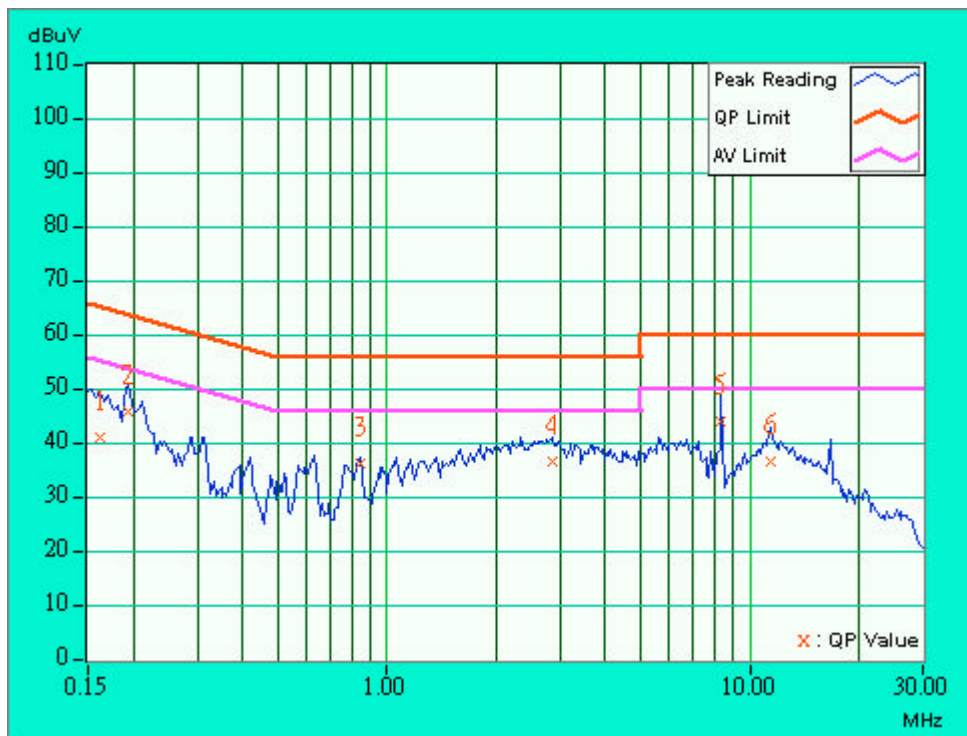




EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	28 deg. C, 50%RH, 979 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.10	42.17	-	42.27	-	65.79	55.79	-23.52	-
2	0.193	0.10	43.32	-	43.42	-	63.91	53.91	-20.49	-
3	0.634	0.10	34.21	-	34.31	-	56.00	46.00	-21.69	-
4	3.750	0.19	36.23	-	36.42	-	56.00	46.00	-19.58	-
5	8.333	0.54	37.50	-	38.04	-	60.00	50.00	-21.96	-
6	12.484	0.70	35.06	-	35.76	-	60.00	50.00	-24.24	-

- NOTES: (1) "-": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

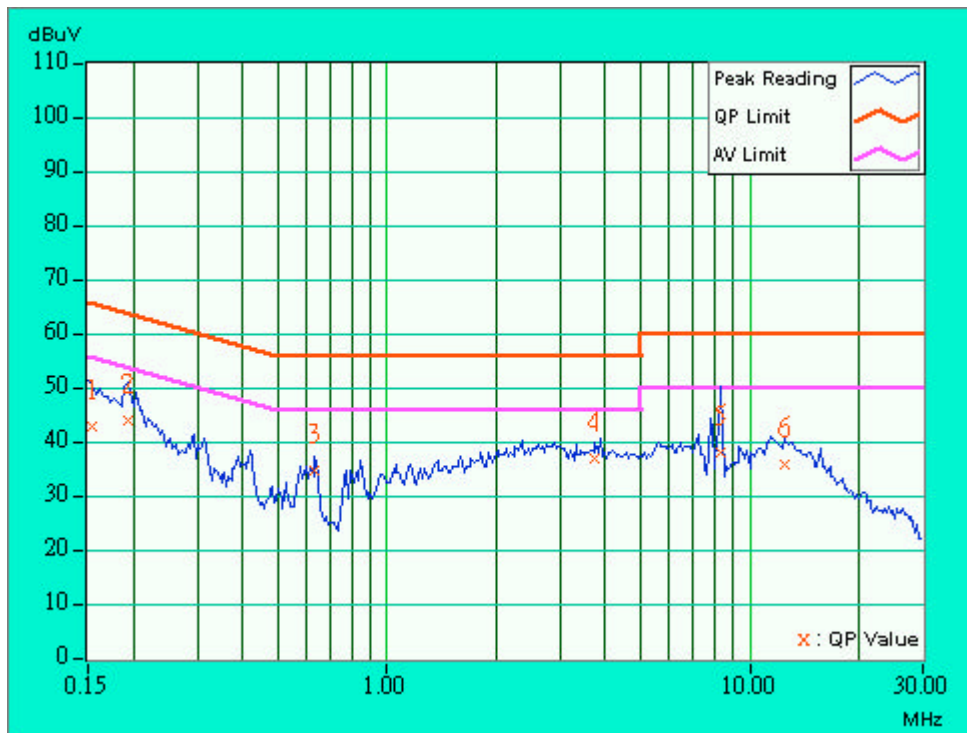




EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	28 deg. C, 50%RH, 979 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	41.89	-	41.99	-	66.00	56.00	-24.01	-
2	0.201	0.10	40.57	-	40.67	-	63.58	53.58	-22.91	-
3	0.634	0.10	35.83	-	35.93	-	56.00	46.00	-20.07	-
4	2.353	0.12	37.85	-	37.97	-	56.00	46.00	-18.03	-
5	8.016	0.47	34.74	-	35.21	-	60.00	50.00	-24.79	-
6	11.512	0.53	35.84	-	36.37	-	60.00	50.00	-23.63	-

- NOTES: (1) "-": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

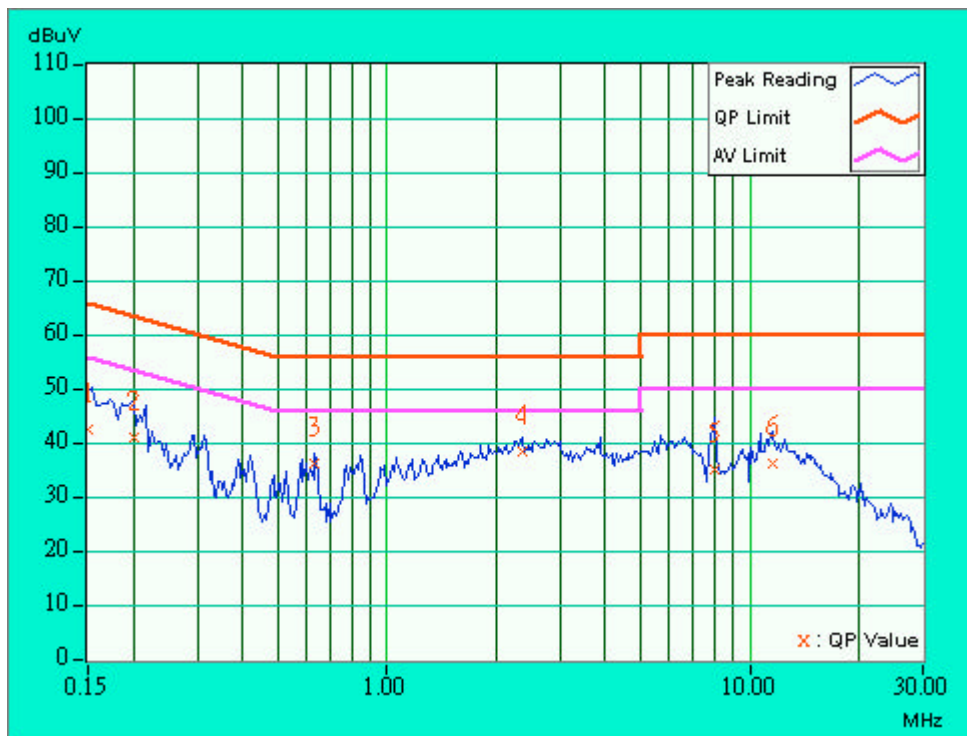




EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	28 deg. C, 50%RH, 979 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	42.77	-	42.87	-	66.00	56.00	-23.13	-
2	0.197	0.10	42.92	-	43.02	-	63.74	53.74	-20.72	-
3	2.357	0.12	36.70	-	36.82	-	56.00	46.00	-19.18	-
4	3.762	0.19	34.86	-	35.05	-	56.00	46.00	-20.95	-
5	8.313	0.54	48.63	-	49.17	-	60.00	50.00	-10.83	-
6	11.535	0.66	35.68	-	36.34	-	60.00	50.00	-23.66	-

- NOTES: (1) "-": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

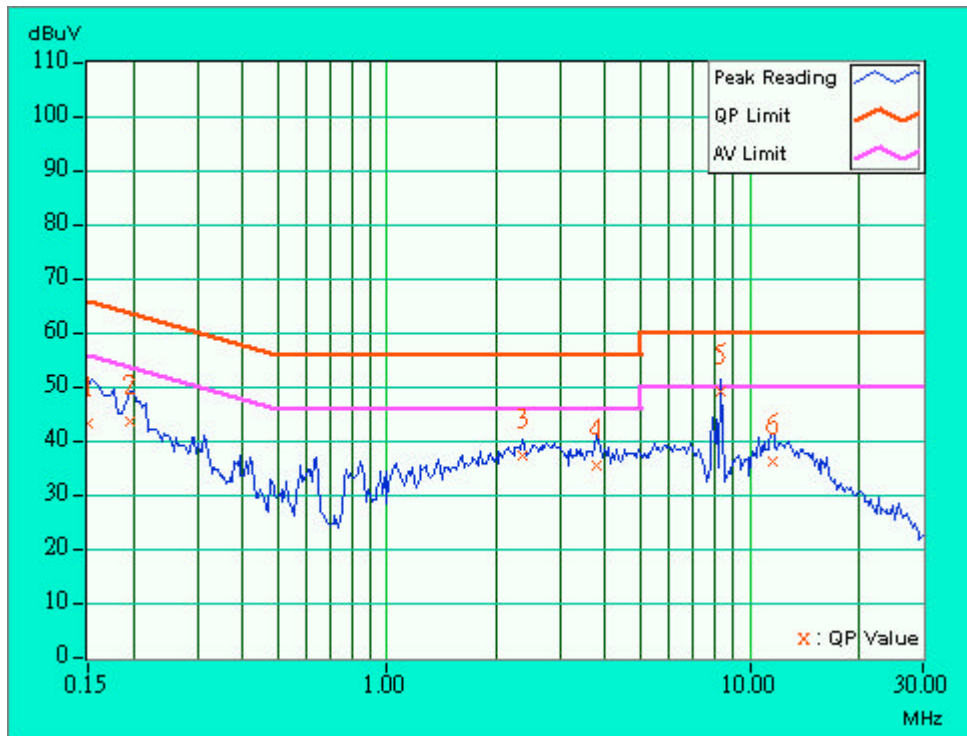




EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	28 deg. C, 50%RH, 979 hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	42.27	-	42.37	-	66.00	56.00	-23.63	-
2	0.193	0.10	42.22	-	42.32	-	63.91	53.91	-21.59	-
3	0.634	0.10	35.65	-	35.75	-	56.00	46.00	-20.25	-
4	2.373	0.12	36.84	-	36.96	-	56.00	46.00	-19.04	-
5	6.598	0.37	36.18	-	36.55	-	60.00	50.00	-23.45	-
6	8.332	0.47	41.83	-	42.30	-	60.00	50.00	-17.70	-

- NOTES: (1) "-": Undetectable
 (2) Q.P. and AV. are abbreviations of quasi-peak and average.
 (3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
 (4) The emission levels of other frequencies were very low against the limit.
 (5) Correction Factor = Insertion loss + Cable loss
 (6) Margin value = Emission level - Limit value

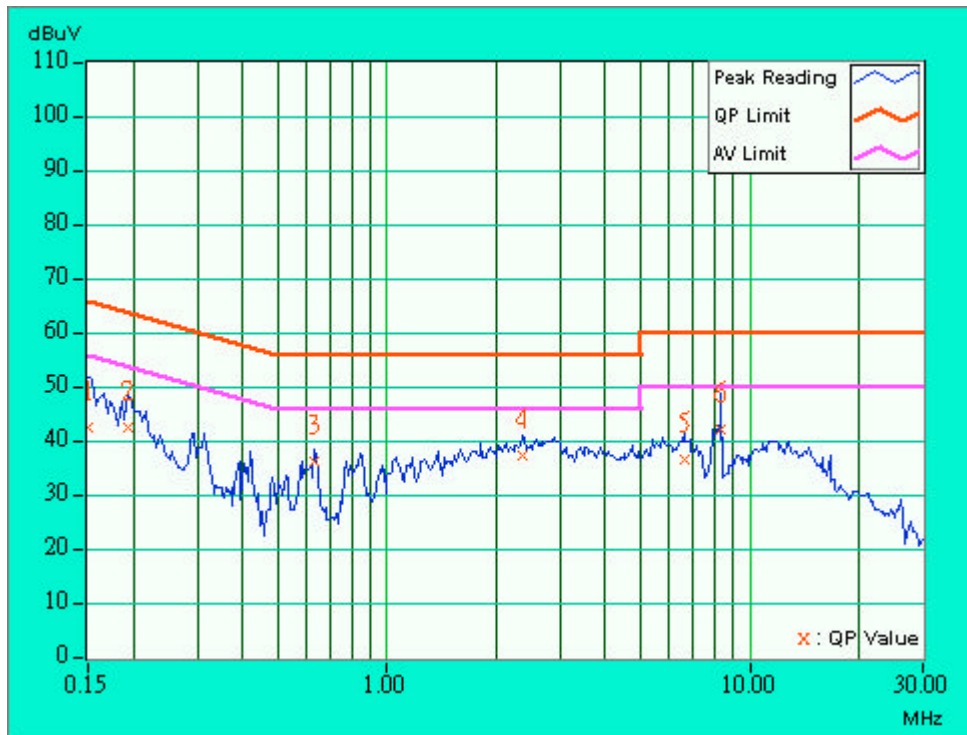



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	uV/m	dBuV/m
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

NOTE

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8594ER	3829U04676	Jul. 14, 2003
ADVANTEST Spectrum Analyzer	R3271A	85060311	May 21, 2004
CHASE RF Pre_Amplifier	CPA9232	1057	Apr. 24, 2004
HP Pre_Amplifier	8449B	3008A01281	June 27, 2004
ROHDE & SCHWARZ Test Receiver	ESVS 10	849231 /019	Nov. 03, 2003
CHASE Broadband Antenna	CBL6111c	2730	Jul 17, 2003
Schwarzbeck Horn_Antenna	BBHA9120-D1	D123	Jul. 31, 2003
SCHWARZBECK Tunable Dipole Antenna	UHAP	897	Mar. 07, 2005
SCHWARZBECK Tunable Dipole Antenna	VHAP	880	Mar. 07, 2005
RF Switches (ARNITSU)	CS-201	1565157	Jul. 29, 2003
RF CABLE (Chaintek) 1GHz-20GHz	Ak 9515-D	001	Aug, 20.2003
RF Cable(RICHTEC)	9913-30M	STCCAB-30M- 1GHz-021	Nov. 5, 2003
Software	AS60P8	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

- Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Tunable Dipole Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.
2. * = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. C.
5. The FCC Site Registration No. is 656396.
6. The VCCI Site Registration No. is R-1626.
7. The CANADA Site Registration No. is IC 3789-C.




4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

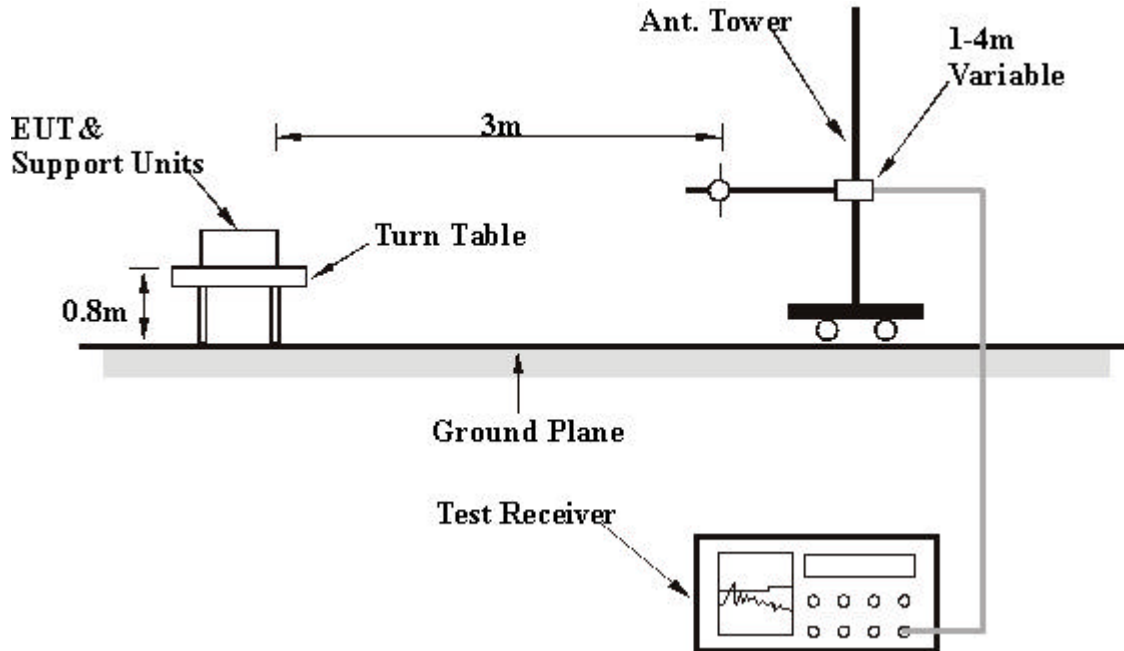

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5.



4.2.6 TEST RESULTS (A)

EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	27 deg. C, 54 % RH, 979 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	126.51	40.0 QP	43.50	-3.50	1.34 H	355	28.10	12.00
2	224.01	39.2 QP	46.00	-6.80	1.25 H	11	29.30	9.90
3	256.01	35.8 QP	46.00	-10.20	1.08 H	47	21.90	13.90
4	288.01	40.8 QP	46.00	-5.20	1.01 H	68	26.90	13.90
5	320.01	42.7 QP	46.00	-3.30	1.07 H	355	28.10	14.60
6	333.50	43.3 QP	46.00	-2.70	1.02 H	326	28.30	15.00
7	352.01	44.9 QP	46.00	-1.10	1.20 H	355	29.40	15.50
8	576.01	34.4 QP	46.00	-11.60	1.44 H	12	13.20	21.30
9	608.01	29.8 QP	46.00	-16.20	1.70 H	137	8.60	21.20
10	672.01	27.4 QP	46.00	-18.60	1.65 H	141	5.20	22.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	50.03	27.9 QP	40.00	-12.10	1.33 V	303	19.40	8.50
2	288.01	35.3 QP	46.00	-10.70	1.35 V	106	21.40	13.90
3	320.01	37.6 QP	46.00	-8.40	1.37 V	356	23.00	14.60
4	352.00	35.4 QP	46.00	-10.60	1.33 V	345	19.90	15.50
5	416.00	31.6 QP	46.00	-14.40	1.66 V	181	13.90	17.70
6	448.00	32.1 QP	46.00	-13.90	1.65 V	226	14.00	18.00
7	512.00	32.9 QP	46.00	-13.10	1.57 V	236	13.50	19.40
8	576.00	29.6 QP	46.00	-16.40	1.42 V	199	8.30	21.30
9	880.00	26.9 QP	46.00	-19.10	1.26 V	351	1.90	25.00
10	928.00	27.8 QP	46.00	-18.20	1.35 V	89	1.70	26.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247



4.2.7 TEST RESULTS (A) - DSSS

EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 62 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	53.0 PK	74.00	-21.00	1.63 H	324	23.30	29.70
1	2368.00	40.3 AV	54.00	-13.70	1.63 H	324	10.60	29.70
2	2390.00	51.8 PK	74.00	-22.20	1.07 H	49	22.00	29.80
2	2390.00	42.1 AV	54.00	-11.90	1.07 H	49	12.30	29.80
3	*2412.00	96.9 PK			1.62 H	52	67.00	29.90
3	*2412.00	89.8 AV			1.62 H	52	59.90	29.90
4	4824.00	42.7 PK	74.00	-31.30	1.63 H	30	6.50	36.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	55.0 PK	74.00	-19.00	1.62 V	38	25.30	29.70
1	2368.00	42.9 AV	54.00	-11.10	1.62 V	38	13.20	29.70
2	2390.00	53.0 PK	74.00	-21.00	1.21 V	55	23.20	29.80
2	2390.00	44.0 AV	54.00	-10.00	1.21 V	55	14.20	29.80
3	*2412.00	97.1 PK			1.25 V	24	67.20	29.90
3	*2412.00	90.1 AV			1.25 V	24	60.20	29.90
4	4824.00	43.3 PK	74.00	-30.70	1.25 V	5	7.00	36.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 62 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.2 PK	74.00	-22.80	1.46 H	338	21.40	29.80
1	2390.00	40.0 AV	54.00	-14.00	1.46 H	338	10.20	29.80
2	*2437.00	95.2 PK			1.04 H	213	65.20	30.00
2	*2437.00	89.2 AV			1.04 H	213	59.20	30.00
3	2483.50	48.7 PK	74.00	-25.30	1.63 H	135	18.60	30.10
4	4874.00	45.9 PK	74.00	-28.10	1.25 H	35	9.50	36.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.3 PK	74.00	-20.70	1.27 V	57	23.50	29.80
1	2390.00	44.0 AV	54.00	-10.00	1.27 V	57	14.20	29.80
2	*2437.00	98.3 PK			1.65 V	24	68.40	30.00
2	*2437.00	89.9 AV			1.65 V	24	59.90	30.00
3	2483.50	54.7 PK	74.00	-19.30	1.68 V	357	24.60	30.10
3	2483.50	42.7 AV	54.00	-11.30	1.68 V	357	12.50	30.10
4	4874.00	45.4 PK	74.00	-28.60	1.02 V	241	9.00	36.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 62 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.3 PK			1.35 H	249	65.20	30.10
1	*2462.00	88.3 AV			1.35 H	249	58.20	30.10
2	2483.50	51.7 PK	74.00	-22.30	1.00 H	20	21.60	30.10
2	2483.50	42.4 AV	54.00	-11.60	1.00 H	20	12.30	30.10
3	2496.00	50.2 PK	74.00	-23.80	1.68 H	67	20.00	30.20
4	4924.00	43.2 PK	74.00	-30.80	1.63 H	352	6.50	36.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.3 PK			1.36 V	62	68.20	30.10
1	*2462.00	90.3 AV			1.36 V	62	60.20	30.10
2	2483.50	53.6 PK	74.00	-20.40	1.42 V	254	23.50	30.10
2	2483.50	43.4 AV	54.00	-10.60	1.42 V	254	13.20	30.10
3	2496.00	56.4 PK	74.00	-17.60	1.54 V	289	26.20	30.20
3	2496.00	42.4 AV	54.00	-11.60	1.54 V	289	12.20	30.20
4	4924.00	45.8 PK	74.00	-28.20	1.68 V	357	9.10	36.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



4.2.8 TEST RESULTS (A) -OFDM

EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 62 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	50.0 PK	74.00	-24.00	1.33 H	269	20.30	29.70
2	2390.00	54.3 PK	74.00	-19.70	1.52 H	201	24.50	29.80
2	2390.00	43.3 AV	54.00	-10.70	1.52 H	201	13.50	29.70
3	*2412.00	89.9 PK			1.02 H	147	60.00	29.90
3	*2412.00	82.2 AV			1.02 H	147	52.30	29.80
4	4824.00	42.6 PK	74.00	-31.40	1.25 H	254	6.40	36.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	53.9 PK	74.00	-20.10	1.55 V	206	24.20	29.70
1	2368.00	42.9 AV	54.00	-11.10	1.55 V	206	13.20	29.70
2	2390.00	56.2 PK	74.00	-17.80	1.21 V	24	26.30	29.80
2	2390.00	45.0 AV	54.00	-9.00	1.21 V	24	15.20	29.80
3	*2412.00	90.7 PK			1.01 V	92	60.80	29.90
3	*2412.00	81.8 AV			1.01 V	92	51.90	29.90
4	4824.00	42.2 PK	74.00	-31.80	1.01 V	198	6.00	36.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 62 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.5 PK	74.00	-20.50	1.67 H	3	23.70	29.80
1	2390.00	42.0 AV	54.00	-12.00	1.67 H	3	12.20	29.80
2	*2437.00	89.6 PK			1.03 H	49	59.60	30.00
2	*2437.00	82.3 AV			1.03 H	49	52.30	30.00
3	2483.50	54.4 PK	74.00	-19.60	1.02 H	333	24.30	30.10
3	2483.50	43.4 AV	54.00	-10.60	1.02 H	333	13.20	30.10
4	4874.00	42.9 PK	74.00	-31.10	1.35 H	24	6.50	36.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.4 PK	74.00	-20.60	1.63 V	357	23.60	29.80
1	2390.00	42.1 AV	54.00	-11.90	1.63 V	357	12.30	29.80
2	*2437.00	91.2 PK			1.47 V	24	61.20	30.00
2	*2437.00	83.2 AV			1.47 V	24	53.20	30.00
3	2483.50	51.0 PK	74.00	-23.00	1.05 V	279	20.90	30.10
3	2483.50	42.3 AV	54.00	-11.70	1.05 V	279	12.20	30.10
4	4874.00	42.5 PK	74.00	-31.50	1.54 V	21	6.00	36.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 62 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	90.0 PK			1.58 H	37	59.90	30.10
1	*2462.00	82.1 AV			1.58 H	37	52.00	30.10
2	2483.50	54.7 PK	74.00	-19.30	1.55 H	269	24.60	30.10
2	2483.50	42.4 AV	54.00	-11.60	1.55 H	269	12.20	30.10
3	2496.00	55.7 PK	74.00	-18.30	1.37 H	262	25.50	30.20
3	2496.00	42.4 AV	54.00	-11.60	1.37 H	262	12.20	30.20
4	4924.00	45.8 PK	74.00	-28.20	1.32 H	27	9.10	36.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	92.3 PK			1.32 V	20	62.20	30.10
1	*2462.00	83.0 AV			1.32 V	20	52.90	30.10
2	2483.50	56.6 PK	74.00	-17.40	1.42 V	328	26.50	30.10
2	2483.50	44.4 AV	54.00	-9.60	1.42 V	328	14.30	30.10
3	2496.00	50.5 PK	74.00	-23.50	1.04 V	221	20.30	30.20
4	4924.00	46.2 PK	74.00	-27.80	1.00 V	92	9.50	36.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



4.2.9 TEST RESULTS (B)

EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	27 deg. C, 54 % RH, 979 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	192.00	42.4 QP	43.50	-1.10	1.00 H	166	33.20	9.20
2	234.25	42.6 QP	46.00	-3.40	1.14 H	115	31.50	11.10
3	256.00	41.5 QP	46.00	-4.50	1.06 H	187	27.60	13.90
4	288.00	43.1 QP	46.00	-2.90	1.10 H	171	29.20	13.90
5	301.00	41.2 QP	46.00	-4.80	1.07 H	76	27.00	14.20
6	320.00	42.8 QP	46.00	-3.20	1.00 H	153	28.20	14.60
7	352.00	36.6 QP	46.00	-9.40	1.00 H	339	21.10	15.50
8	416.01	38.5 QP	46.00	-7.50	1.00 H	280	20.90	17.70
9	480.01	37.4 QP	46.00	-8.60	1.00 H	234	18.50	18.90
10	736.01	28.3 QP	46.00	-17.70	1.00 H	100	4.70	23.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	69.97	38.7 QP	40.00	-1.30	1.63 V	120	32.80	5.90
2	191.70	38.2 QP	43.50	-5.30	1.63 V	113	29.00	9.20
3	234.50	39.4 QP	46.00	-6.60	1.49 V	146	28.30	11.10
4	288.00	36.6 QP	46.00	-9.40	1.60 V	60	22.70	13.90
5	332.75	40.3 QP	46.00	-5.70	1.57 V	151	25.30	15.00
6	544.00	30.9 QP	46.00	-15.10	1.60 V	244	10.20	20.80
7	576.00	33.5 QP	46.00	-12.50	1.67 V	52	12.20	21.30
8	608.00	29.6 QP	46.00	-16.40	1.53 V	238	8.30	21.20
9	640.00	26.5 QP	46.00	-19.50	1.50 V	221	4.70	21.90
10	736.00	30.9 QP	46.00	-15.10	1.22 V	238	7.30	23.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247



4.2.10 TEST RESULTS (B) - DSSS

EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	21 deg. C, 57 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	47.1 PK	74.00	-26.90	1.86 H	237	17.40	29.70
2	2390.00	50.4 PK	74.00	-23.60	1.33 H	91	20.60	29.80
3	*2412.00	96.5 PK			1.35 H	159	66.60	29.90
3	*2412.00	87.2 AV			1.35 H	159	57.30	29.70
4	4824.00	42.2 PK	74.00	-31.80	1.25 H	320	5.90	36.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	52.8 PK	74.00	-21.20	1.43 V	324	23.10	29.70
1	2368.00	39.9 AV	54.00	-14.10	1.43 V	324	10.20	29.70
2	2390.00	53.4 PK	74.00	-20.60	1.02 V	304	23.60	29.80
2	2390.00	44.0 AV	54.00	-10.00	1.02 V	304	14.20	29.80
3	*2412.00	97.4 PK			1.68 V	222	67.50	29.90
3	*2412.00	89.1 AV			1.68 V	222	59.20	29.90
4	4824.00	45.9 PK	74.00	-28.10	1.54 V	24	9.60	36.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21 deg. C, 57 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	48.4 PK	74.00	-25.60	1.52 H	47	18.60	29.80
2	*2437.00	96.1 PK			1.23 H	35	66.10	30.00
2	*2437.00	86.9 AV			1.23 H	35	56.90	29.80
3	2483.50	48.4 PK	74.00	-25.60	1.63 H	24	18.30	30.10
4	4874.00	42.2 PK	74.00	-31.80	1.23 H	325	5.80	36.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	50.4 PK	74.00	-23.60	1.40 V	333	20.60	29.80
2	*2437.00	98.1 PK			1.49 V	309	68.10	30.00
2	*2437.00	88.6 AV			1.49 V	309	58.60	29.80
3	2483.50	55.7 PK	74.00	-18.30	1.35 V	29	25.60	30.10
3	2483.50	42.4 AV	54.00	-11.60	1.35 V	29	12.30	30.00
4	4874.00	45.5 PK	74.00	-28.50	1.32 V	228	9.10	36.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21 deg. C, 57 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	96.3 PK			1.45 H	20	66.20	30.10
1	*2462.00	86.4 AV			1.45 H	20	56.30	30.10
2	2483.50	53.3 PK	74.00	-20.70	1.02 H	114	23.20	30.10
2	2483.50	40.3 AV	54.00	-13.70	1.02 H	114	10.20	30.10
3	2496.00	46.5 PK	74.00	-27.50	1.65 H	247	16.30	30.20
4	4924.00	42.8 PK	74.00	-31.20	1.02 H	3	6.10	36.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.2 PK			1.35 V	240	68.10	30.10
1	*2462.00	89.0 AV			1.35 V	240	58.90	30.10
2	2483.50	56.4 PK	74.00	-17.60	1.33 V	329	26.30	30.10
2	2483.50	44.3 AV	54.00	-9.70	1.33 V	329	14.20	30.10
3	2496.00	52.3 PK	74.00	-21.70	1.20 V	325	22.10	30.20
3	2496.00	43.3 AV	54.00	-10.70	1.20 V	325	13.20	30.20
4	4924.00	46.2 PK	74.00	-27.80	1.35 V	247	9.50	36.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



4.2.11 TEST RESULTS (B) -OFDM

EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	21 deg. C, 57 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	49.1 PK	74.00	-24.90	1.51 H	53	19.40	29.70
2	2390.00	50.4 PK	74.00	-23.60	1.33 H	288	20.60	29.80
3	*2412.00	85.3 PK			1.58 H	37	55.40	29.90
3	*2412.00	77.1 AV			1.58 H	37	47.20	29.70
4	4824.00	42.6 PK	74.00	-31.40	1.00 H	360	6.30	36.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	53.2 PK	74.00	-20.80	1.22 V	352	23.50	29.70
1	2368.00	42.9 AV	54.00	-11.10	1.22 V	352	13.20	29.70
2	2390.00	54.7 PK	74.00	-19.30	1.30 V	24	24.90	29.80
2	2390.00	45.0 AV	54.00	-9.00	1.30 V	24	15.20	29.80
3	*2412.00	95.7 PK			1.36 V	254	65.80	29.90
3	*2412.00	83.5 AV			1.36 V	254	53.60	29.90
4	4824.00	46.7 PK	74.00	-27.30	1.85 V	201	10.40	36.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21 deg. C, 57 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	49.0 PK	74.00	-25.00	1.53 H	321	19.20	29.80
2	*2437.00	86.2 PK			1.02 H	214	56.20	30.00
2	*2437.00	79.3 AV			1.02 H	214	49.30	29.80
3	2483.50	47.3 PK	74.00	-26.70	1.42 H	320	17.20	30.10
4	4874.00	43.9 PK	74.00	-30.10	1.55 H	320	7.50	36.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.5 PK	74.00	-21.50	1.45 V	24	22.60	29.80
1	2390.00	42.1 AV	54.00	-11.90	1.45 V	24	12.30	29.80
2	*2437.00	96.1 PK			1.85 V	320	66.10	30.00
2	*2437.00	84.2 AV			1.85 V	320	54.30	30.00
3	2483.50	50.8 PK	74.00	-23.20	1.42 V	35	20.60	30.10
4	4874.00	46.4 PK	74.00	-27.60	1.25 V	10	10.00	36.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21 deg. C, 57 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	87.6 PK			1.47 H	24	57.50	30.10
1	*2462.00	77.8 AV			1.47 H	24	47.70	30.10
2	2483.50	49.4 PK	74.00	-24.60	1.65 H	324	19.30	30.10
3	2496.00	49.8 PK	74.00	-24.20	1.22 H	90	19.60	30.20
4	4924.00	43.2 PK	74.00	-30.80	1.53 H	142	6.50	36.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	92.2 PK			1.05 V	38	62.10	30.10
1	*2462.00	83.0 AV			1.05 V	38	52.90	30.10
2	2483.50	55.7 PK	74.00	-18.30	1.58 V	320	25.60	30.10
2	2483.50	44.3 AV	54.00	-9.70	1.58 V	320	14.20	30.10
3	2496.00	52.8 PK	74.00	-21.20	1.54 V	247	22.60	30.20
3	2496.00	42.5 AV	54.00	-11.50	1.54 V	247	12.30	30.20
4	4924.00	47.7 PK	74.00	-26.30	1.64 V	249	11.00	36.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



4.2.12 TEST RESULTS (C)

EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 65 % RH, 979 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	117.08	35.4 QP	43.50	-8.10	1.61 H	202	24.00	11.40
2	210.00	28.9 QP	43.50	-14.60	1.13 H	286	20.00	8.90
3	288.01	43.0 QP	46.00	-3.00	1.11 H	302	29.10	13.90
4	320.00	41.6 QP	46.00	-4.40	1.02 H	245	27.00	14.60
5	352.00	33.1 QP	46.00	-12.90	1.11 H	304	17.60	15.50
6	416.00	36.5 QP	46.00	-9.50	1.05 H	207	18.80	17.70
7	448.00	30.0 QP	46.00	-16.00	1.12 H	210	12.00	18.00
8	480.01	35.0 QP	46.00	-11.00	1.10 H	202	16.10	18.90
9	512.01	28.9 QP	46.00	-17.10	1.08 H	133	9.50	19.40
10	576.01	30.5 QP	46.00	-15.50	1.94 H	121	9.30	21.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	50.00	28.1 QP	40.00	-11.90	1.08 V	42	19.60	8.50
2	210.00	24.3 QP	43.50	-19.20	1.10 V	186	15.40	8.90
3	288.01	36.5 QP	46.00	-9.50	1.02 V	167	22.60	13.90
4	320.00	36.1 QP	46.00	-9.90	1.34 V	298	21.50	14.60
5	352.00	28.6 QP	46.00	-17.40	1.18 V	116	13.10	15.50
6	415.99	29.1 QP	46.00	-16.90	1.07 V	106	11.40	17.70
7	448.00	30.0 QP	46.00	-16.00	1.46 V	194	12.00	18.00
8	480.00	35.2 QP	46.00	-10.80	1.03 V	10	16.30	18.90
9	512.00	30.9 QP	46.00	-15.10	1.49 V	161	11.50	19.40
10	576.01	29.3 QP	46.00	-16.70	1.08 V	133	8.10	21.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247



4.2.13 TEST RESULTS (C) - DSSS

EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 62 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	49.4 PK	74.00	-24.60	1.66 H	357	19.70	29.70
2	2390.00	50.3 PK	74.00	-23.70	1.25 H	24	20.50	29.80
3	*2412.00	96.7 PK			1.54 H	25	66.80	29.90
3	*2412.00	89.1 AV			1.54 H	25	59.20	29.70
4	4824.00	42.6 PK	74.00	-31.40	1.54 H	24	6.30	36.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	53.2 PK	74.00	-20.80	1.00 V	2	23.50	29.70
1	2368.00	43.9 AV	54.00	-10.10	1.00 V	2	14.20	29.70
2	2390.00	58.0 PK	74.00	-16.00	1.55 V	337	28.20	29.80
2	2390.00	46.7 AV	54.00	-7.30	1.55 V	337	16.90	29.80
3	*2412.00	97.8 PK			1.09 V	285	67.90	29.90
3	*2412.00	90.1 AV			1.09 V	285	60.20	29.90
4	4824.00	42.1 PK	74.00	-31.90	1.22 V	46	5.80	36.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 62 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	50.3 PK	74.00	-23.70	1.23 H	324	20.50	29.80
2	*2437.00	96.4 PK			1.54 H	24	66.40	30.00
2	*2437.00	89.2 AV			1.54 H	24	59.20	29.80
3	2483.50	47.8 PK	74.00	-26.20	1.05 H	135	17.70	30.10
4	4874.00	42.8 PK	74.00	-31.20	1.52 H	210	6.40	36.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.3 PK	74.00	-19.70	1.58 V	47	24.50	29.80
1	2390.00	44.1 AV	54.00	-9.90	1.58 V	47	14.30	29.80
2	*2437.00	98.2 PK			1.55 V	247	68.20	30.00
2	*2437.00	91.9 AV			1.55 V	247	61.90	30.00
3	2483.50	55.8 PK	74.00	-18.20	1.65 V	237	25.70	30.10
3	2483.50	43.4 AV	54.00	-10.60	1.65 V	237	13.30	30.10
4	4874.00	45.6 PK	74.00	-28.40	1.84 V	247	9.10	36.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 62 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.7 PK			1.20 H	302	65.60	30.10
1	*2462.00	88.5 AV			1.20 H	302	58.40	30.10
2	2483.50	51.0 PK	74.00	-23.00	1.22 H	197	20.90	30.10
2	2483.50	40.4 AV	54.00	-13.60	1.22 H	197	10.30	30.10
3	2496.00	47.4 PK	74.00	-26.60	1.01 H	8	17.20	30.20
4	4924.00	42.1 PK	74.00	-31.90	1.47 H	8	5.40	36.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.6 PK			1.26 V	352	68.50	30.10
1	*2462.00	91.1 AV			1.26 V	352	61.00	30.10
2	2483.50	58.0 PK	74.00	-16.00	1.58 V	24	27.90	30.10
2	2483.50	46.4 AV	54.00	-7.60	1.58 V	24	16.20	30.10
3	2496.00	53.8 PK	74.00	-20.20	1.30 V	209	23.60	30.20
3	2496.00	45.4 AV	54.00	-8.60	1.30 V	209	15.20	30.20
4	4924.00	44.2 PK	74.00	-29.80	1.11 V	332	7.50	36.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



4.2.14 TEST RESULTS (C) -OFDM

EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 62 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1120.00	35.5 PK	74.00	-38.50	1.38 H	69	9.20	26.30
2	2368.00	51.0 PK	74.00	-23.00	1.25 H	178	21.30	29.70
2	2368.00	40.3 AV	54.00	-13.70	1.25 H	178	10.60	26.30
3	2390.00	55.6 PK	74.00	-18.40	1.45 H	49	25.80	29.80
3	2390.00	44.4 AV	54.00	-9.60	1.45 H	49	14.60	29.70
4	*2412.00	86.6 PK			1.58 H	37	56.80	29.90
4	*2412.00	78.6 AV			1.58 H	37	48.70	29.80
5	4824.00	44.0 PK	74.00	-30.00	1.20 H	333	7.80	36.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1120.00	35.0 PK	74.00	-39.00	1.35 V	110	8.70	26.30
2	2368.00	54.6 PK	74.00	-19.40	1.29 V	3	24.90	29.70
2	2368.00	45.3 AV	54.00	-8.70	1.29 V	3	15.60	26.30
3	2390.00	58.5 PK	74.00	-15.50	1.52 V	245	28.70	29.80
3	2390.00	48.5 AV	54.00	-5.50	1.52 V	245	18.70	29.70
4	*2412.00	93.1 PK			1.01 V	119	63.20	29.90
4	*2412.00	84.9 AV			1.01 V	119	55.00	29.80
5	4824.00	46.6 PK	74.00	-27.40	1.34 V	86	10.30	36.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 62 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.6 PK	74.00	-22.40	1.56 H	137	21.80	29.80
1	2390.00	40.1 AV	54.00	-13.90	1.56 H	137	10.30	29.80
2	*2437.00	86.2 PK			1.52 H	222	56.20	30.00
2	*2437.00	78.9 AV			1.52 H	222	48.90	30.00
3	2483.50	50.4 PK	74.00	-23.60	1.25 H	258	20.30	30.10
4	4874.00	43.9 PK	74.00	-30.10	1.52 H	191	7.50	36.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.4 PK	74.00	-20.60	1.35 V	269	23.60	29.80
1	2390.00	44.0 AV	54.00	-10.00	1.35 V	269	14.20	29.80
2	*2437.00	94.2 PK			1.11 V	20	64.20	30.00
2	*2437.00	86.2 AV			1.11 V	20	56.20	30.00
3	2483.50	53.6 PK	74.00	-20.40	1.47 V	247	23.50	30.10
3	2483.50	42.4 AV	54.00	-11.60	1.47 V	247	12.20	30.10
4	4874.00	42.8 PK	74.00	-31.20	1.02 V	20	6.40	36.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 62 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	86.3 PK			1.57 H	34	56.20	30.10
1	*2462.00	79.3 AV			1.57 H	34	49.20	30.10
2	2483.50	51.4 PK	74.00	-22.60	1.02 H	47	21.30	30.10
2	2483.50	40.3 AV	54.00	-13.70	1.02 H	47	10.20	30.10
3	2496.00	49.3 PK	74.00	-24.70	1.35 H	222	19.10	30.20
4	4924.00	41.8 PK	74.00	-32.20	1.36 H	209	5.10	36.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	94.3 PK			1.03 V	21	64.20	30.10
1	*2462.00	86.0 AV			1.03 V	21	55.90	30.10
2	2483.50	59.4 PK	74.00	-14.60	1.32 V	24	29.20	30.10
2	2483.50	47.4 AV	54.00	-6.60	1.32 V	24	17.20	30.10
3	2496.00	56.5 PK	74.00	-17.50	1.00 V	37	26.30	30.20
3	2496.00	44.4 AV	54.00	-9.60	1.00 V	37	14.20	30.20
4	4924.00	46.2 PK	74.00	-27.80	1.08 V	129	9.50	36.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



4.2.15 TEST RESULTS (D)

EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26 deg. C, 68 % RH, 979 hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	83.50	35.5 QP	40.00	-4.50	1.91 H	0	27.20	8.20
2	210.00	29.3 QP	43.50	-14.20	1.31 H	307	20.40	8.90
3	288.00	43.9 QP	46.00	-2.10	1.02 H	313	29.90	13.90
4	320.00	44.6 QP	46.00	-1.40	1.00 H	290	30.00	14.60
5	352.01	39.7 QP	46.00	-6.30	1.13 H	246	24.20	15.50
6	416.01	34.8 QP	46.00	-11.20	1.09 H	240	17.10	17.70
7	448.01	28.6 QP	46.00	-17.40	1.80 H	243	10.60	18.00
8	480.01	37.3 QP	46.00	-8.70	1.72 H	351	18.40	18.90
9	512.01	34.0 QP	46.00	-12.00	1.64 H	344	14.60	19.40
10	576.01	32.4 QP	46.00	-13.60	1.75 H	347	11.10	21.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	50.01	25.6 QP	40.00	-14.40	1.20 V	207	17.10	8.50
2	210.01	24.8 QP	43.50	-18.70	1.17 V	176	15.90	8.90
3	288.00	35.6 QP	46.00	-10.40	1.50 V	85	21.70	13.90
4	320.01	36.0 QP	46.00	-10.00	1.50 V	118	21.40	14.60
5	352.01	37.1 QP	46.00	-8.90	1.25 V	151	21.60	15.50
6	416.01	33.8 QP	46.00	-12.20	1.30 V	85	16.10	17.70
7	448.01	29.0 QP	46.00	-17.00	1.38 V	204	10.90	18.00
8	480.01	32.9 QP	46.00	-13.10	1.25 V	201	14.00	18.90
9	512.01	30.3 QP	46.00	-15.70	1.44 V	284	10.90	19.40
10	576.01	33.8 QP	46.00	-12.20	1.52 V	242	12.60	21.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247



4.2.16 TEST RESULTS (D) - DSSS

EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	21 deg. C, 57 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	49.0 PK	74.00	-25.00	1.02 H	55	19.30	29.70
2	2390.00	49.2 PK	74.00	-24.80	1.28 H	54	19.40	29.80
3	*2412.00	92.3 PK			1.07 H	45	62.40	29.90
3	*2412.00	85.1 AV			1.07 H	45	55.20	29.70
4	4824.00	42.6 PK	74.00	-31.40	1.36 H	207	6.30	36.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	54.3 PK	74.00	-19.70	1.85 V	92	24.60	29.70
1	2368.00	41.9 AV	54.00	-12.10	1.85 V	92	12.20	29.70
2	2390.00	53.4 PK	74.00	-20.60	1.54 V	28	23.60	29.80
2	2390.00	43.0 AV	54.00	-11.00	1.54 V	28	13.20	29.80
3	*2412.00	95.1 PK			1.35 V	246	65.20	29.90
3	*2412.00	87.5 AV			1.35 V	246	57.60	29.90
4	4824.00	45.2 PK	74.00	-28.80	1.52 V	89	8.90	36.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21 deg. C, 57 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	49.9 PK	74.00	-24.10	1.45 H	358	20.10	29.80
2	*2437.00	93.4 PK			1.07 H	55	63.40	30.00
2	*2437.00	85.9 AV			1.07 H	55	55.90	29.80
3	2483.50	49.4 PK	74.00	-24.60	1.30 H	24	19.30	30.10
4	4874.00	43.1 PK	74.00	-30.90	1.02 H	25	6.70	36.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.3 PK	74.00	-20.70	1.45 V	28	23.50	29.80
1	2390.00	41.0 AV	54.00	-13.00	1.45 V	28	11.20	29.80
2	*2437.00	96.3 PK			1.33 V	28	66.30	30.00
2	*2437.00	87.6 AV			1.33 V	28	57.60	30.00
3	2483.50	50.7 PK	74.00	-23.30	1.53 V	35	20.60	30.10
4	4874.00	46.8 PK	74.00	-27.20	1.55 V	320	10.40	36.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21 deg. C, 57 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	91.3 PK			1.54 H	289	61.20	30.10
1	*2462.00	85.3 AV			1.54 H	289	55.20	30.10
2	2483.50	49.4 PK	74.00	-24.60	1.50 H	333	19.30	30.10
3	2496.00	51.3 PK	74.00	-22.70	1.30 H	120	21.10	30.20
3	2496.00	39.8 AV	54.00	-14.20	1.30 H	120	9.60	30.10
4	4924.00	43.4 PK	74.00	-30.60	1.59 H	3	6.70	36.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.4 PK			1.00 V	205	65.30	30.10
1	*2462.00	87.3 AV			1.00 V	205	57.20	30.10
2	2483.50	53.7 PK	74.00	-20.30	1.52 V	4	23.60	30.10
2	2483.50	43.3 AV	54.00	-10.70	1.52 V	4	13.20	30.10
3	2496.00	53.7 PK	74.00	-20.30	1.68 V	333	23.50	30.20
3	2496.00	42.2 AV	54.00	-11.80	1.68 V	333	12.00	30.20
4	4924.00	45.8 PK	74.00	-28.20	1.58 V	5	9.10	36.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



4.2.17 TEST RESULTS (D) -OFDM

EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average(AV)
ENVIRONMENTAL CONDITIONS	21 deg. C, 57 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	46.9 PK	74.00	-27.10	1.25 H	333	17.20	29.70
2	2390.00	49.4 PK	74.00	-24.60	1.25 H	247	19.60	29.80
3	*2412.00	85.5 PK			1.35 H	9	55.60	29.90
3	*2412.00	76.1 AV			1.35 H	9	46.20	29.70
4	4824.00	42.7 PK	74.00	-31.30	1.52 H	32	6.40	36.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.00	50.0 PK	74.00	-24.00	1.22 V	30	20.30	29.70
2	2390.00	52.9 PK	74.00	-21.10	1.45 V	241	23.10	29.80
2	2390.00	43.0 AV	54.00	-11.00	1.45 V	241	13.20	29.70
3	*2412.00	90.1 PK			1.23 V	52	60.20	29.90
3	*2412.00	83.5 AV			1.23 V	52	53.60	29.80
4	4824.00	45.7 PK	74.00	-28.30	1.32 V	54	9.40	36.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21 deg. C, 57 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	49.1 PK	74.00	-24.90	1.68 H	357	19.30	29.80
2	*2437.00	83.1 PK			1.11 H	299	53.10	30.00
2	*2437.00	76.2 AV			1.11 H	299	46.20	29.80
3	2483.50	49.6 PK	74.00	-24.40	1.02 H	24	19.50	30.10
4	4874.00	42.5 PK	74.00	-31.50	1.07 H	234	6.00	36.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	49.7 PK	74.00	-24.30	1.11 V	247	19.90	29.80
2	*2437.00	89.6 PK			1.25 V	241	59.60	30.00
2	*2437.00	82.9 AV			1.25 V	241	52.90	29.80
3	2483.50	55.4 PK	74.00	-18.60	1.53 V	324	25.30	30.10
3	2483.50	42.4 AV	54.00	-11.60	1.53 V	324	12.30	30.00
4	4874.00	45.5 PK	74.00	-28.50	1.63 V	25	9.10	36.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11b/g MiniPCI module	MODEL	T60H677.02
MODE	Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	21 deg. C, 57 % RH, 979 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	83.2 PK			1.65 H	32	53.10	30.10
1	*2462.00	76.3 AV			1.65 H	32	46.20	30.10
2	2483.50	48.7 PK	74.00	-25.30	1.76 H	24	18.60	30.10
3	2496.00	49.8 PK	74.00	-24.20	1.63 H	24	19.60	30.20
4	4924.00	45.8 PK	74.00	-28.20	1.02 H	35	9.10	36.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	89.5 PK			1.55 V	20	59.40	30.10
1	*2462.00	82.7 AV			1.55 V	20	52.60	30.10
2	2483.50	54.7 PK	74.00	-19.30	1.52 V	247	24.60	30.10
2	2483.50	43.3 AV	54.00	-10.70	1.52 V	247	13.20	30.10
3	2496.00	51.5 PK	74.00	-22.50	1.02 V	3	21.30	30.20
3	2496.00	42.7 AV	54.00	-11.30	1.02 V	3	12.50	30.20
4	4924.00	45.8 PK	74.00	-28.20	1.02 V	44	9.10	36.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2003


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.6 TEST RESULTS-DSSS

EUT	802.11b/g MiniPCI module		
MODEL	T60H677.02	ENVIRONMENTAL CONDITIONS	27 deg. C, 56 %RH, 979 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Hunk Chung

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	12.32	0.5	PASS
6	2437	11.76	0.5	PASS
11	2462	11.44	0.5	PASS




CH1

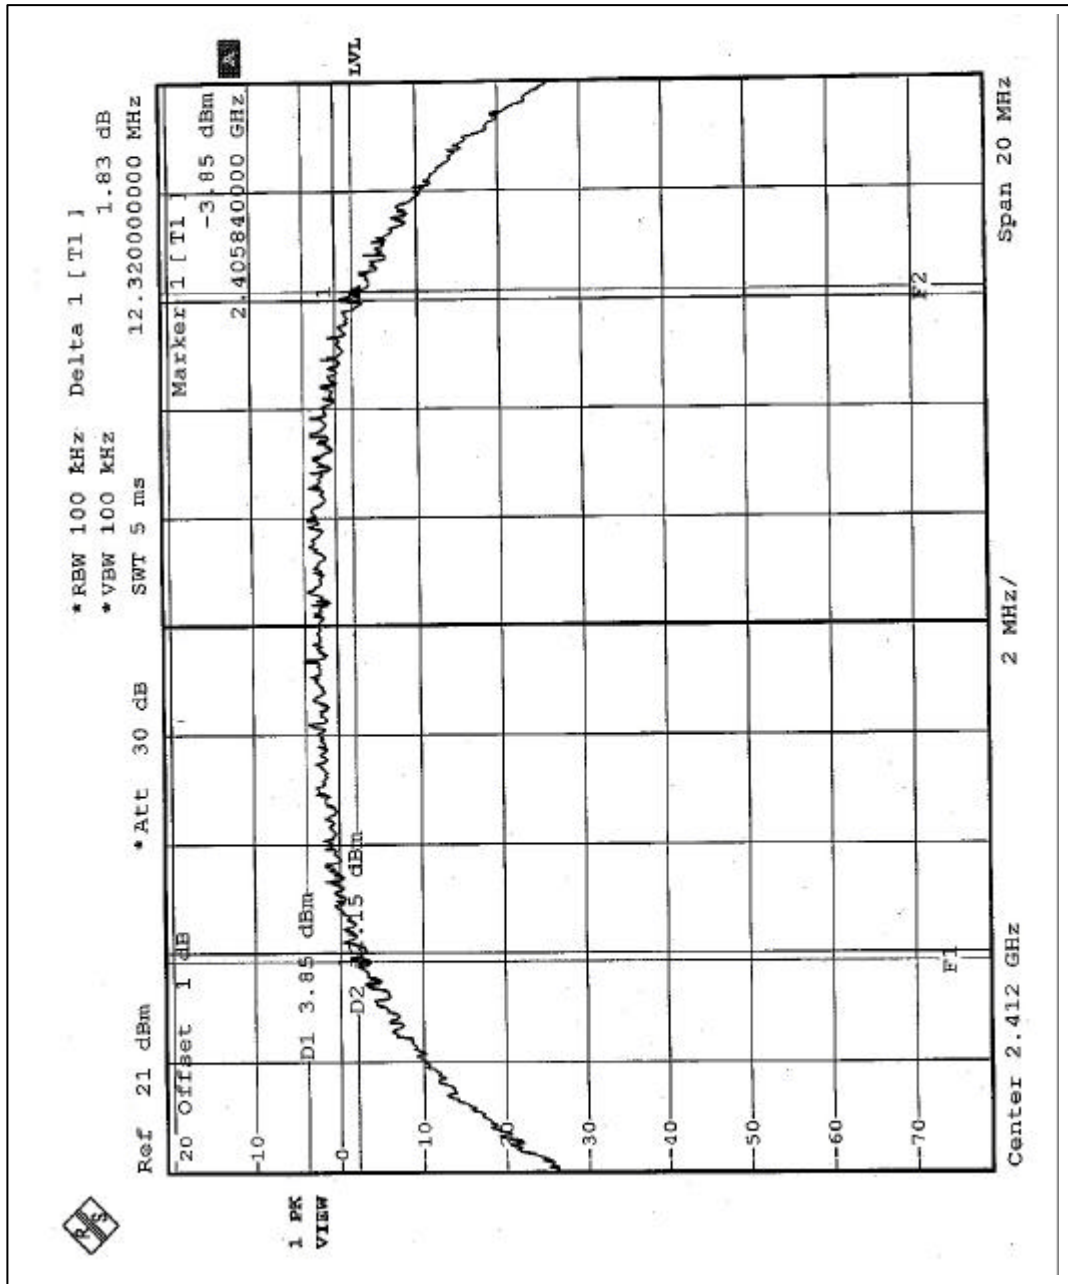




CH6

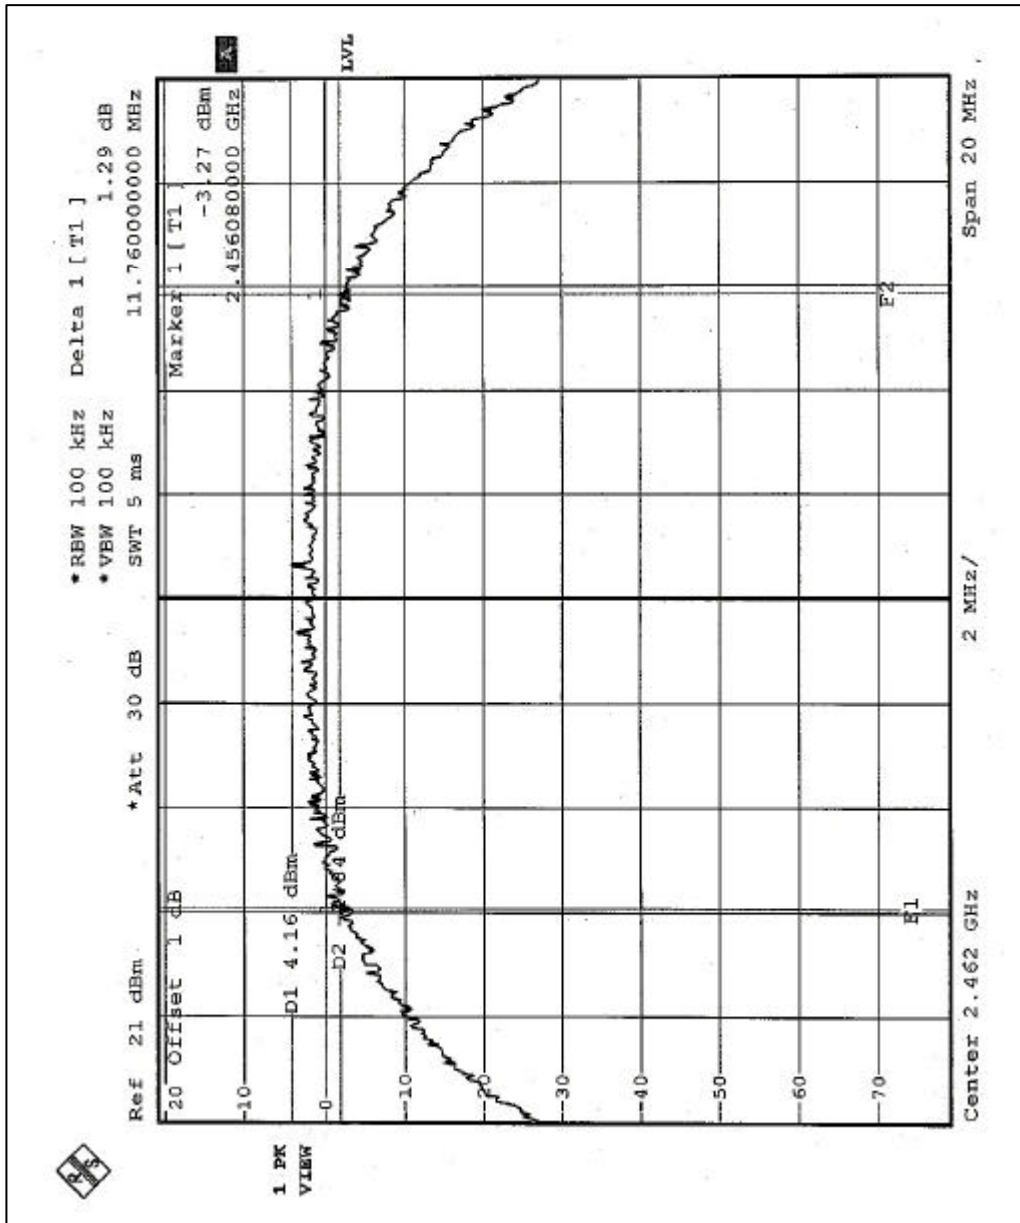



CH11

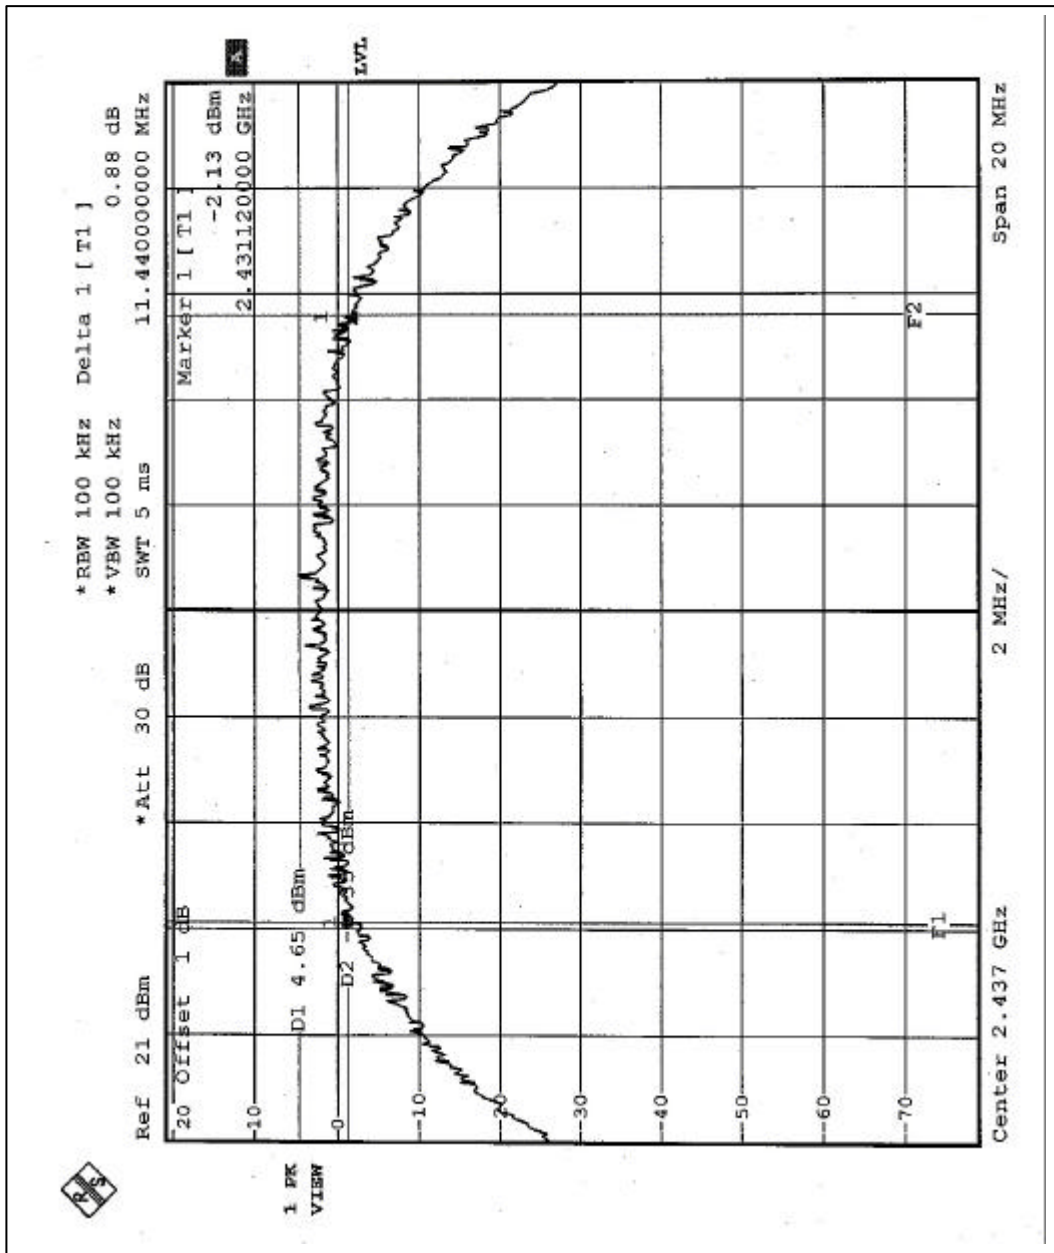




4.3.7 TEST RESULTS-OFDM

EUT	802.11b/g MiniPCI module		
MODEL	T60H677.02	ENVIRONMENTAL CONDITIONS	26 deg. C, 59 %RH, 979 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Hunk Chung

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.62	0.5	PASS
6	2437	16.62	0.5	PASS
11	2462	16.62	0.5	PASS




CH1

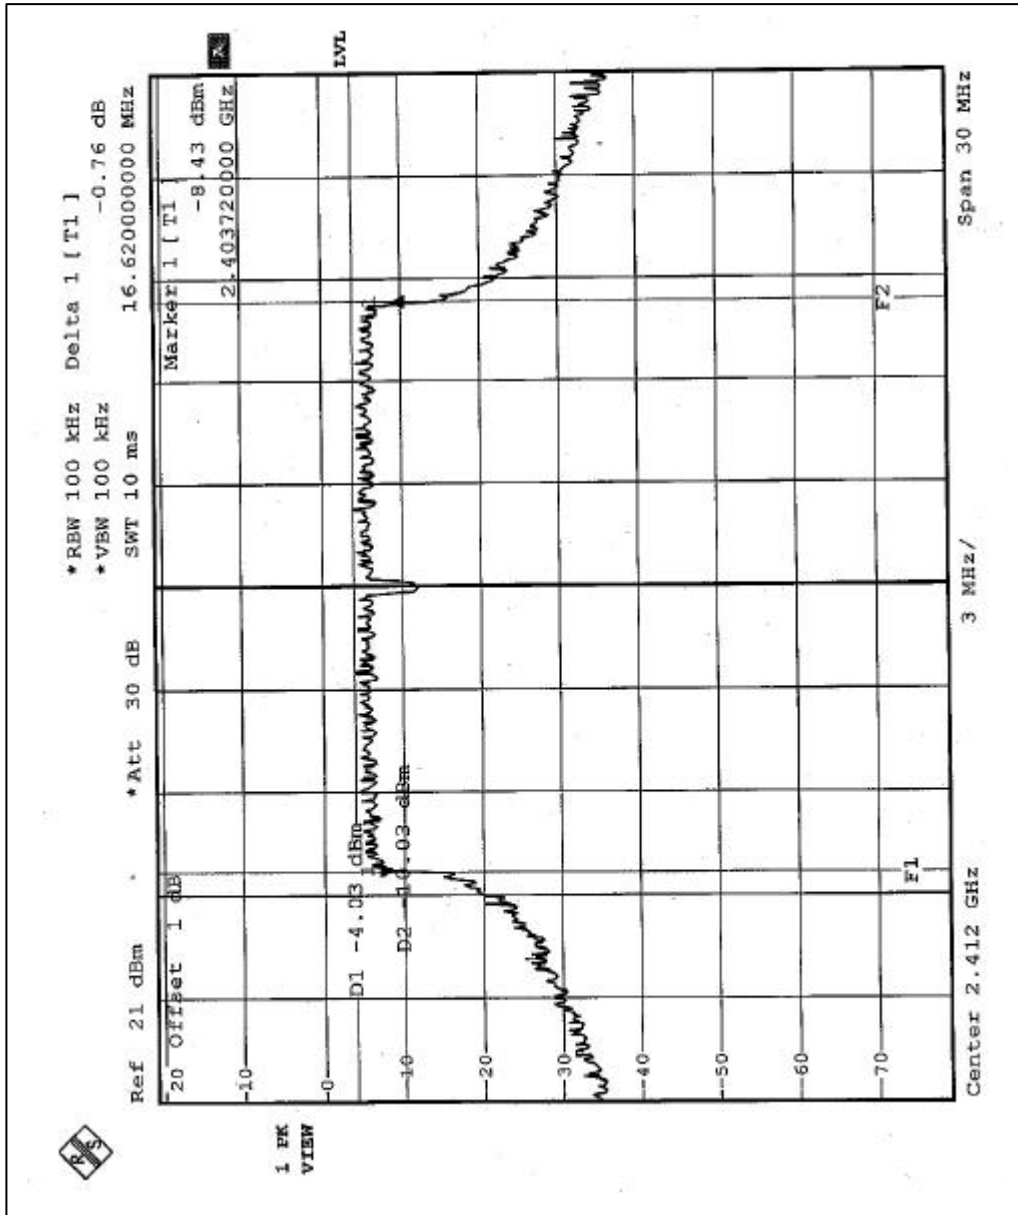




CH6

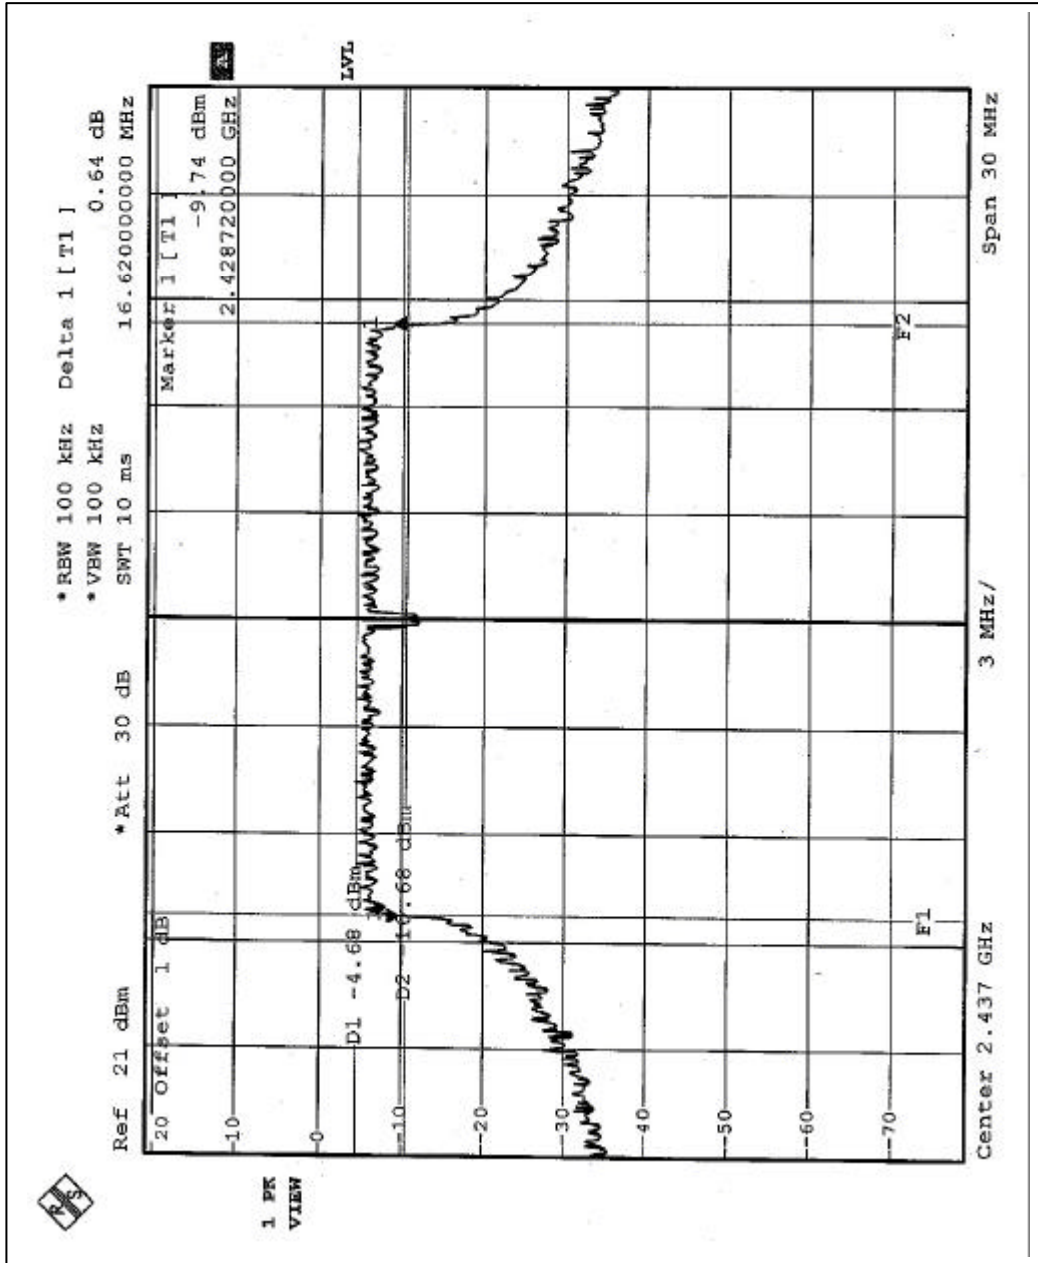



CH11

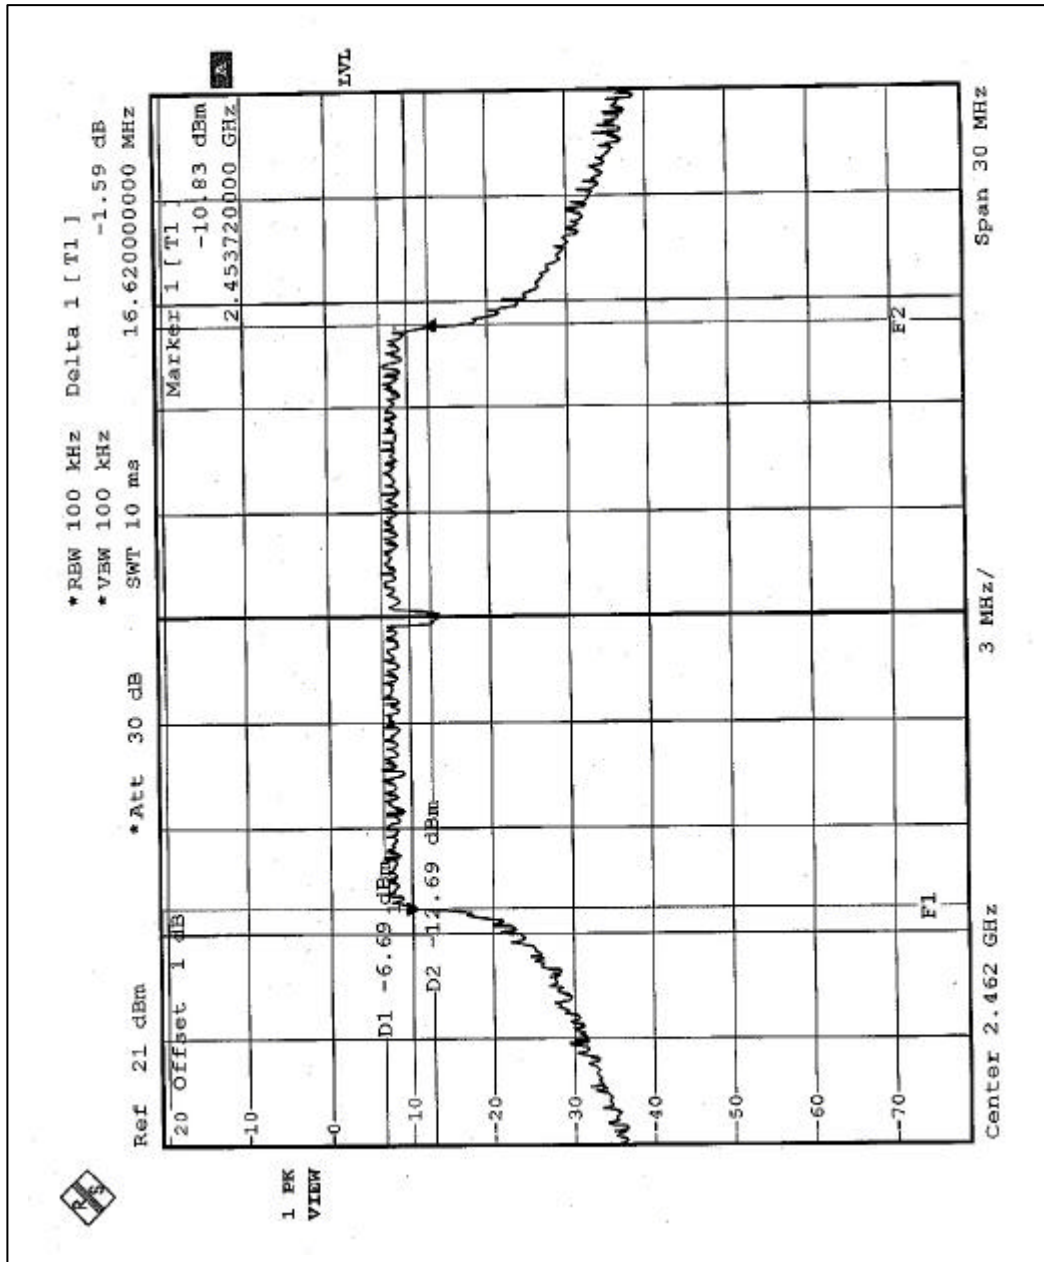



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Jul. 24, 2003
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:


The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5



4.4.6 TEST RESULTS-DSSS

EUT	802.11b/g MiniPCI module		
MODEL	T60H677.02	ENVIRONMENTAL CONDITIONS	27 deg. C, 56 %RH, 979 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Tony Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.52	30	PASS
6	2437	15.46	30	PASS
11	2462	15.22	30	PASS

4.4.7 TEST RESULTS-OFDM

EUT	802.11b/g MiniPCI module		
MODEL	T60H677.02	ENVIRONMENTAL CONDITIONS	27 deg. C, 56 %RH, 979 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Tony Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.36	30	PASS
6	2437	15.02	30	PASS
11	2462	14.29	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2003


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITIONS

Same as 4.3.5




4.5.6 TEST RESULTS-DSSS

EUT	802.11b/g MiniPCI module		
MODEL	T60H677.02	ENVIRONMENTAL CONDITIONS	27 deg. C, 56 %RH, 979 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Tony Chen

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-9.32	8	PASS
6	2437	-9.45	8	PASS
11	2462	-10.07	8	PASS




CH1

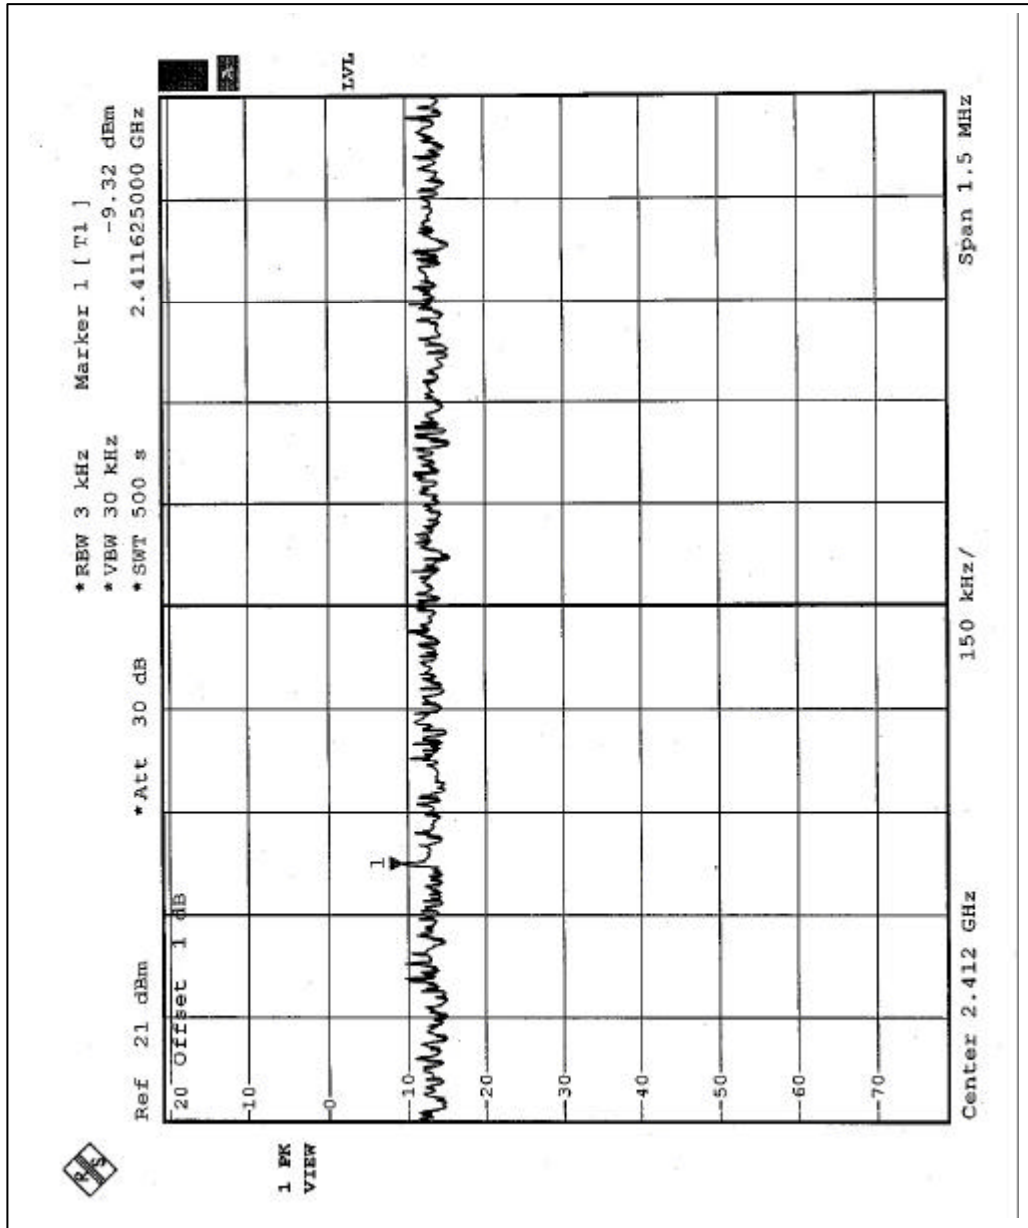




CH6

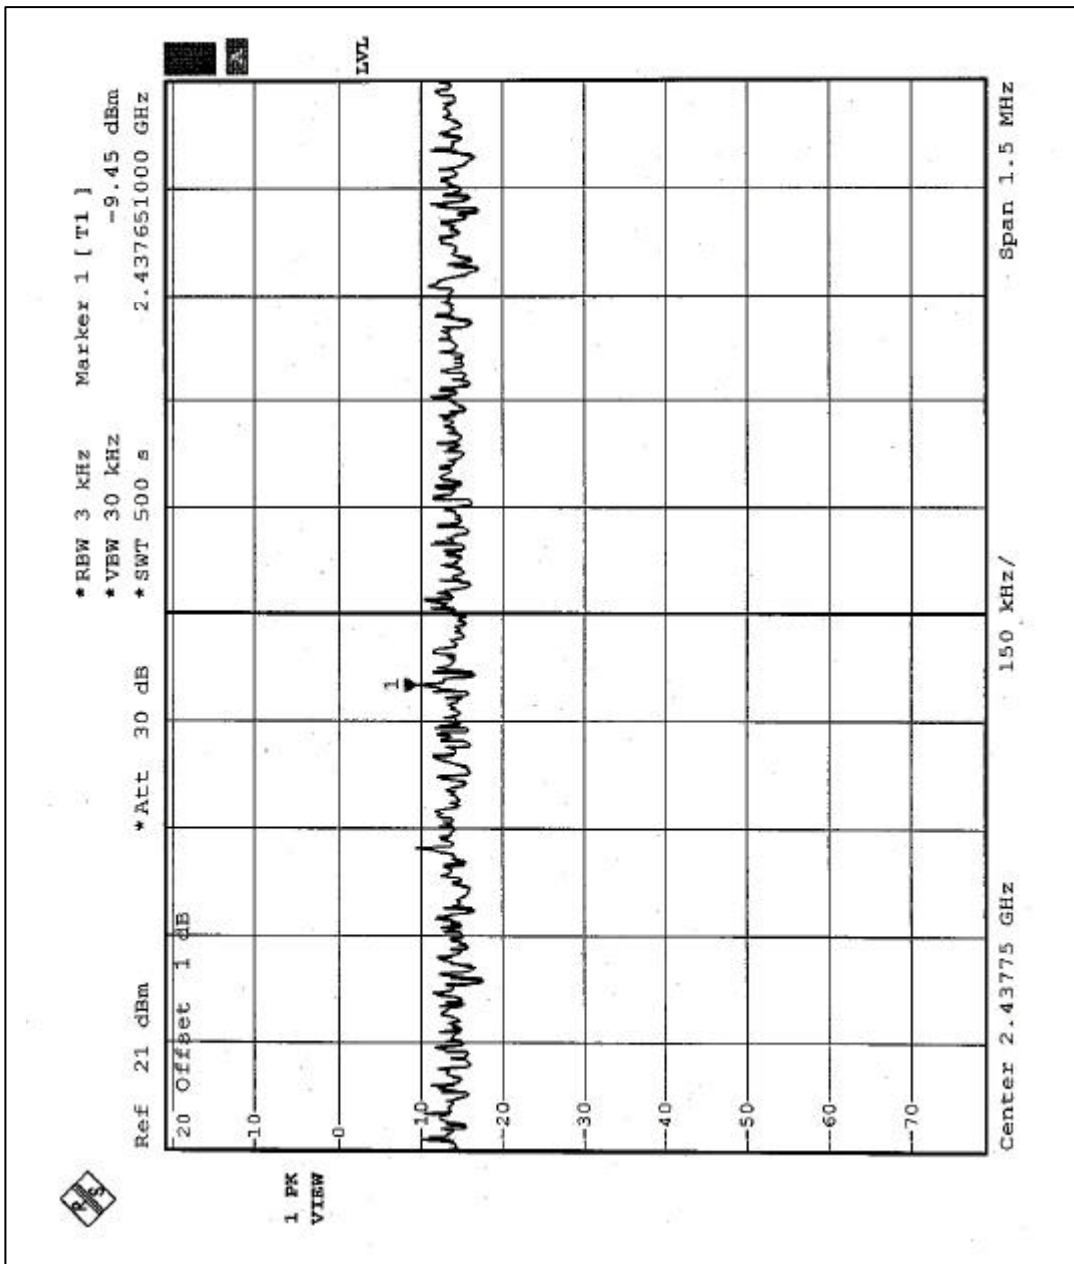



CH11

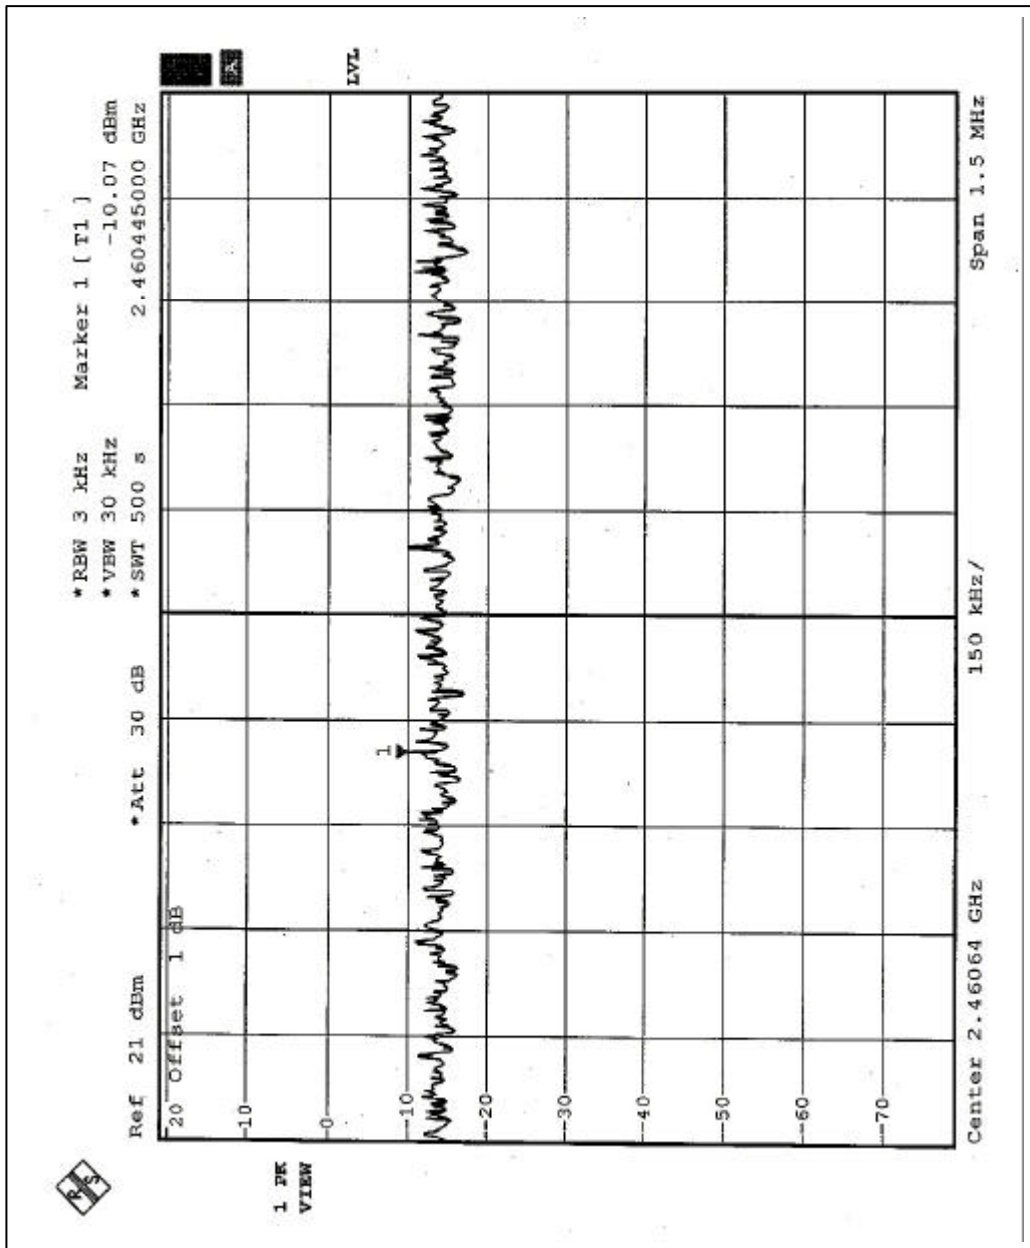


4.5.7 TEST RESULTS-OFDM

EUT	802.11b/g MiniPCI module		
MODEL	T60H677.02	ENVIRONMENTAL CONDITIONS	27 deg. C, 56 %RH, 979 hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Tony Chen

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-15.89	8	PASS
6	2437	-15.07	8	PASS
11	2462	-17.60	8	PASS




CH1

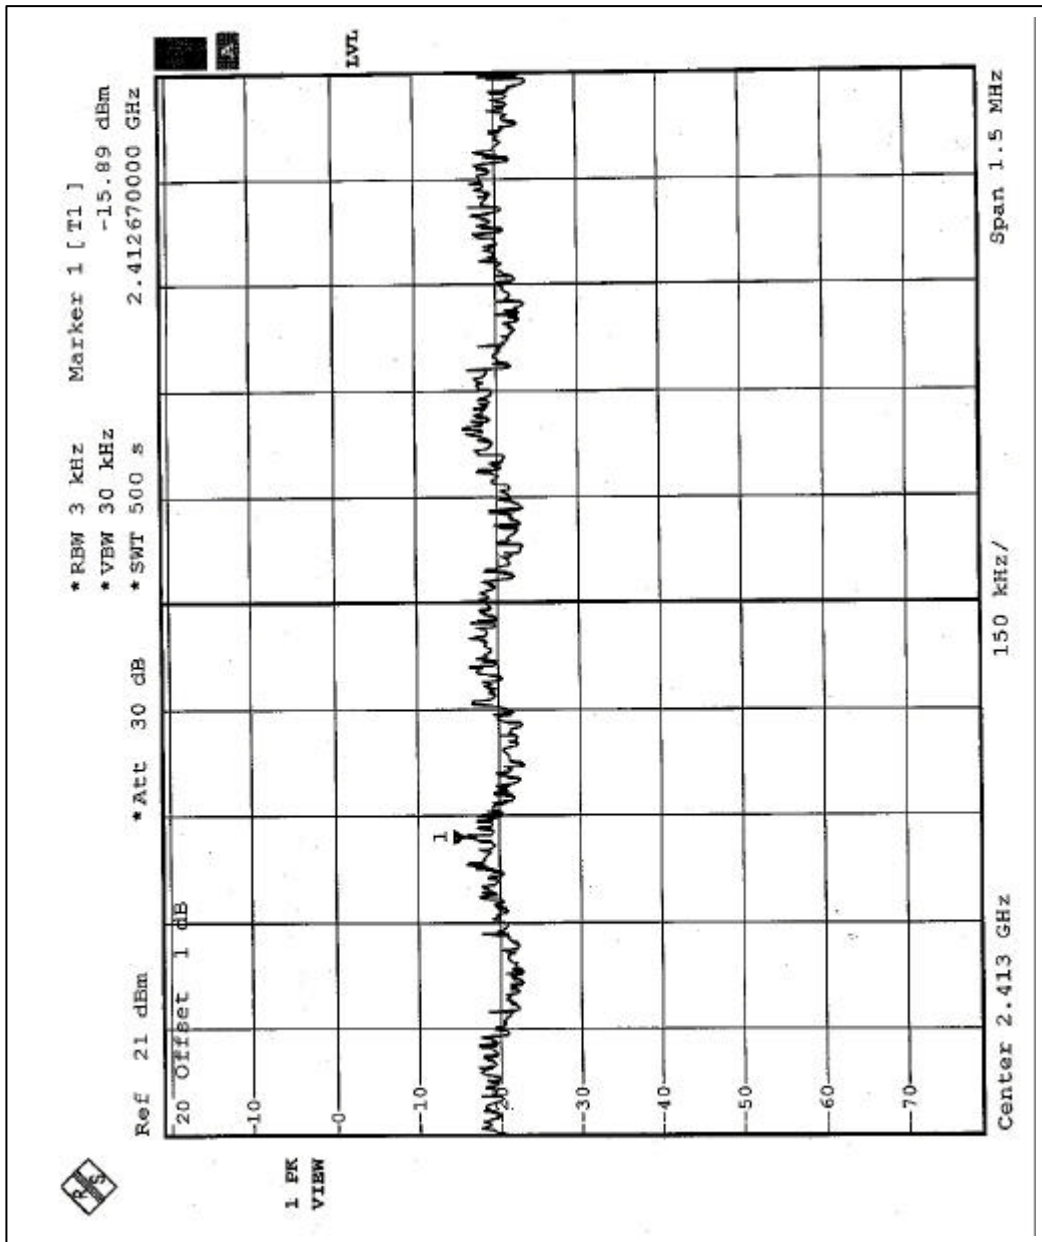




CH6

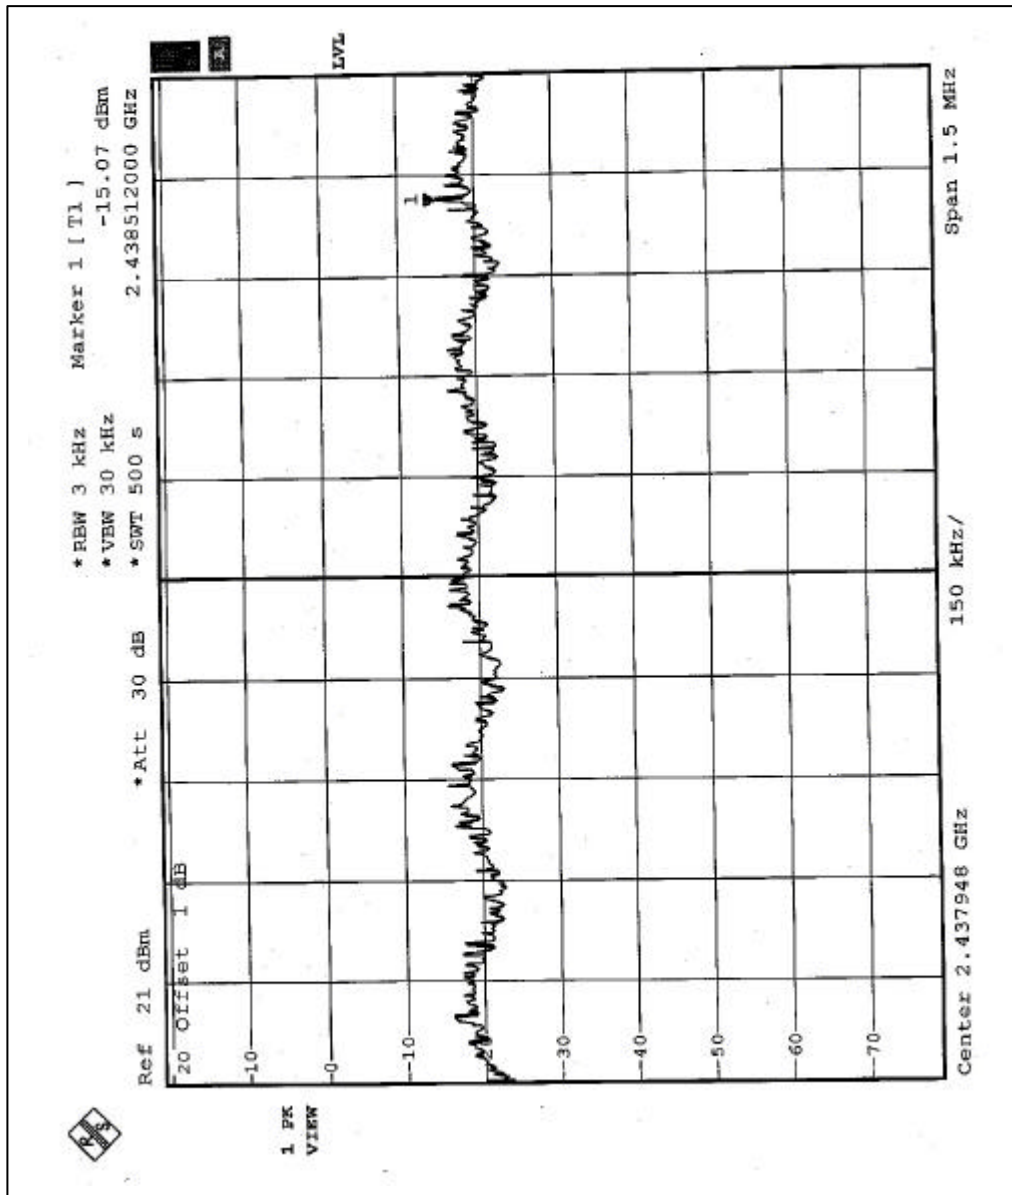



CH11

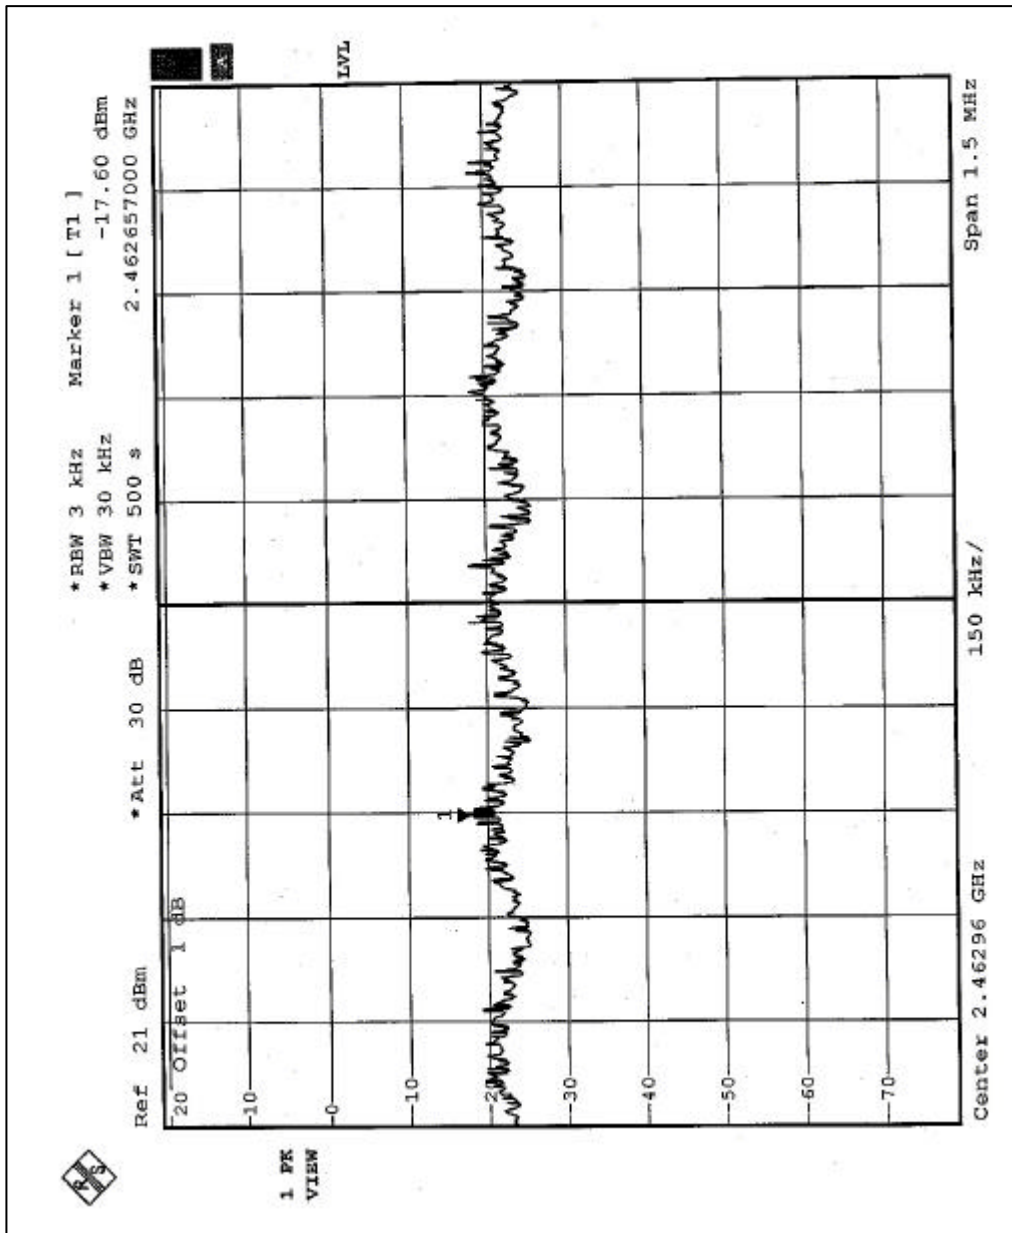



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP	1093.4495.30	Dec. 19, 2003

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 EUT OPERATING CONDITION

Same as Item 4.3.5





4.6.5 TEST RESULTS - DSSS

The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

NOTE (1): The band edge emission plot on the following first page shows 45.84dB delta between carrier maximum power and local maximum emission in restrict band (2.3682GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 90.1 dBuV/m, so the maximum field strength in restrict band is $90.1 - 45.84 = 44.26$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following second page shows 50.98dB delta between carrier maximum power and local maximum emission in restrict band (2.4960GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 91.1 dBuV/m, so the maximum field strength in restrict band is $91.1 - 50.98 = 40.12$ dBuV/m which is under 54 dBuV/m limit.

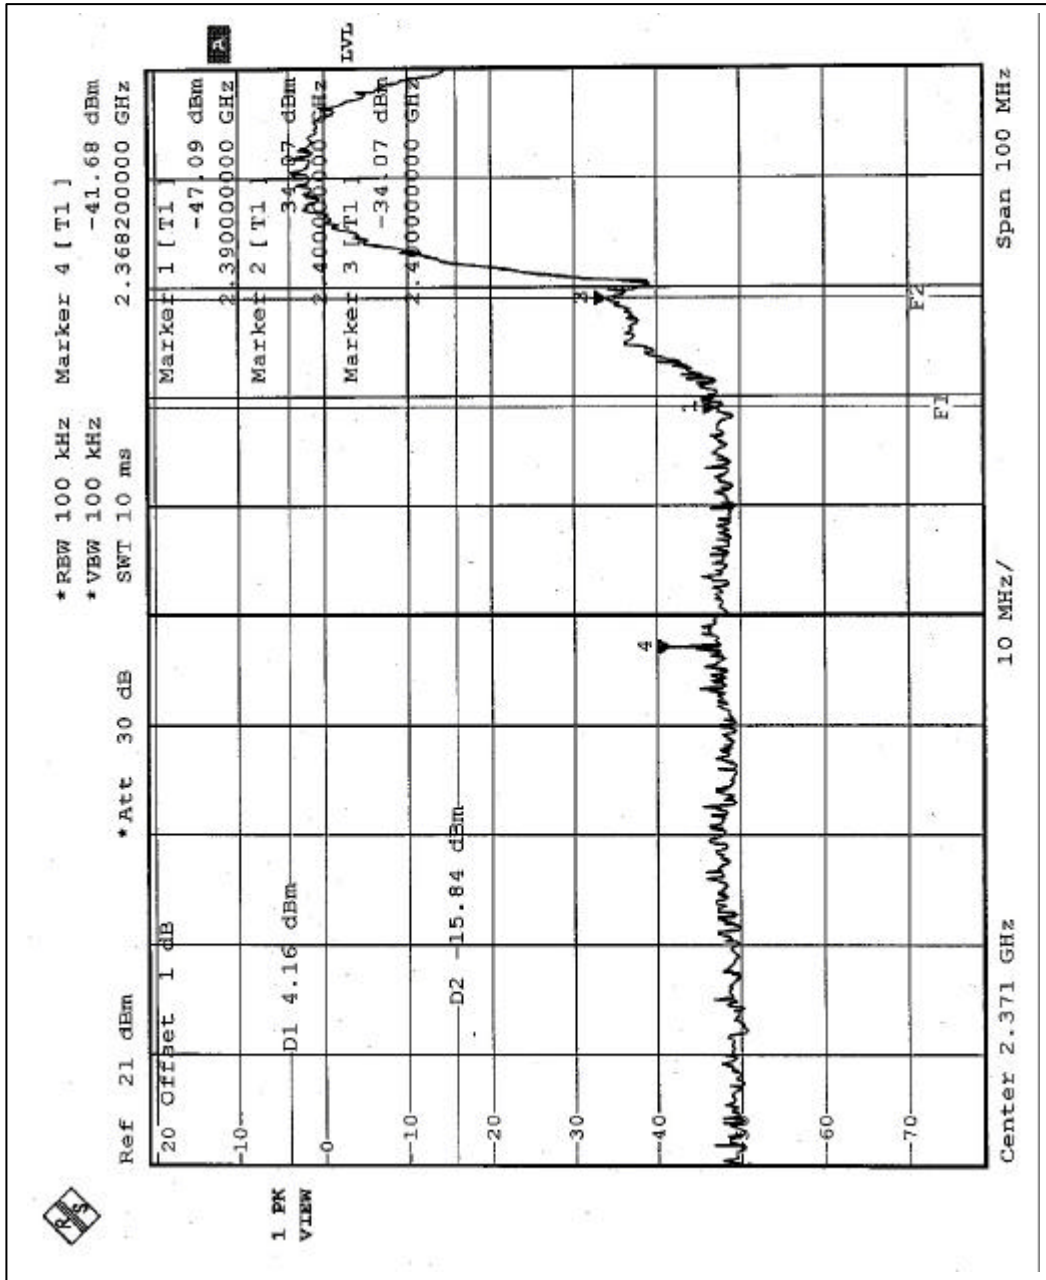

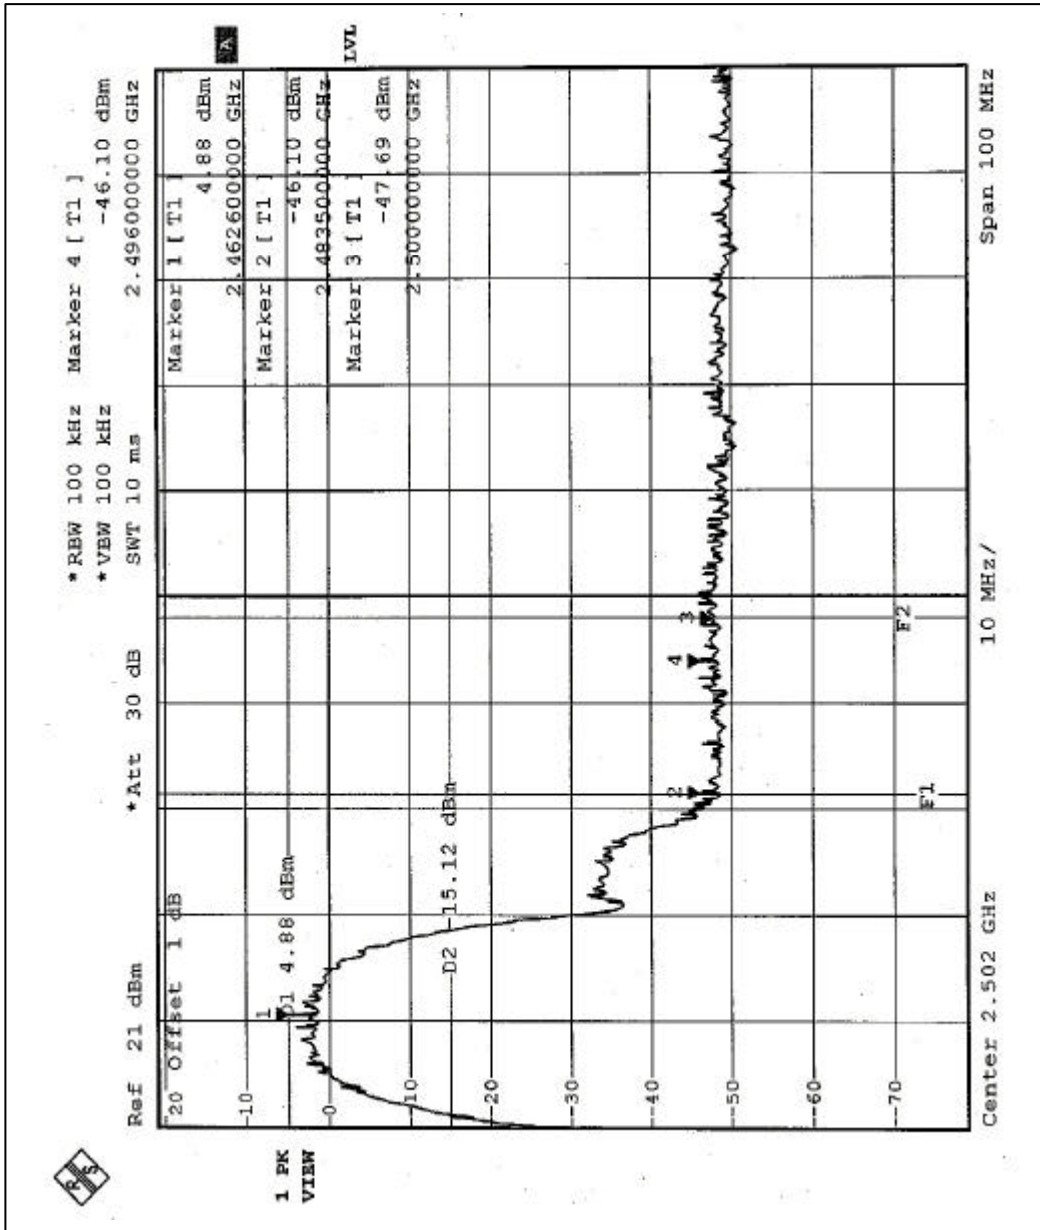





4.6.6 TEST RESULTS-OFDM

The spectrum plots are attached on the following 2 pages. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

NOTE (1): The band edge emission plot on the following first page shows 38.20dB delta between carrier maximum power and local maximum emission in restrict band (2.3898GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.8 is 84.9dBuV/m, so the maximum field strength in restrict band is $84.9-38.2=46.70$ dBuV/m which is under 54 dBuV/m limit.

NOTE (2): The band edge emission plot on the following second page shows 38.47dB delta between carrier maximum power and local maximum emission in restrict band (2.4850GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.8 is 86.0dBuV/m, so the maximum field strength in restrict band is $86.0-38.47=47.53$ dBuV/m which is under 54 dBuV/m limit.

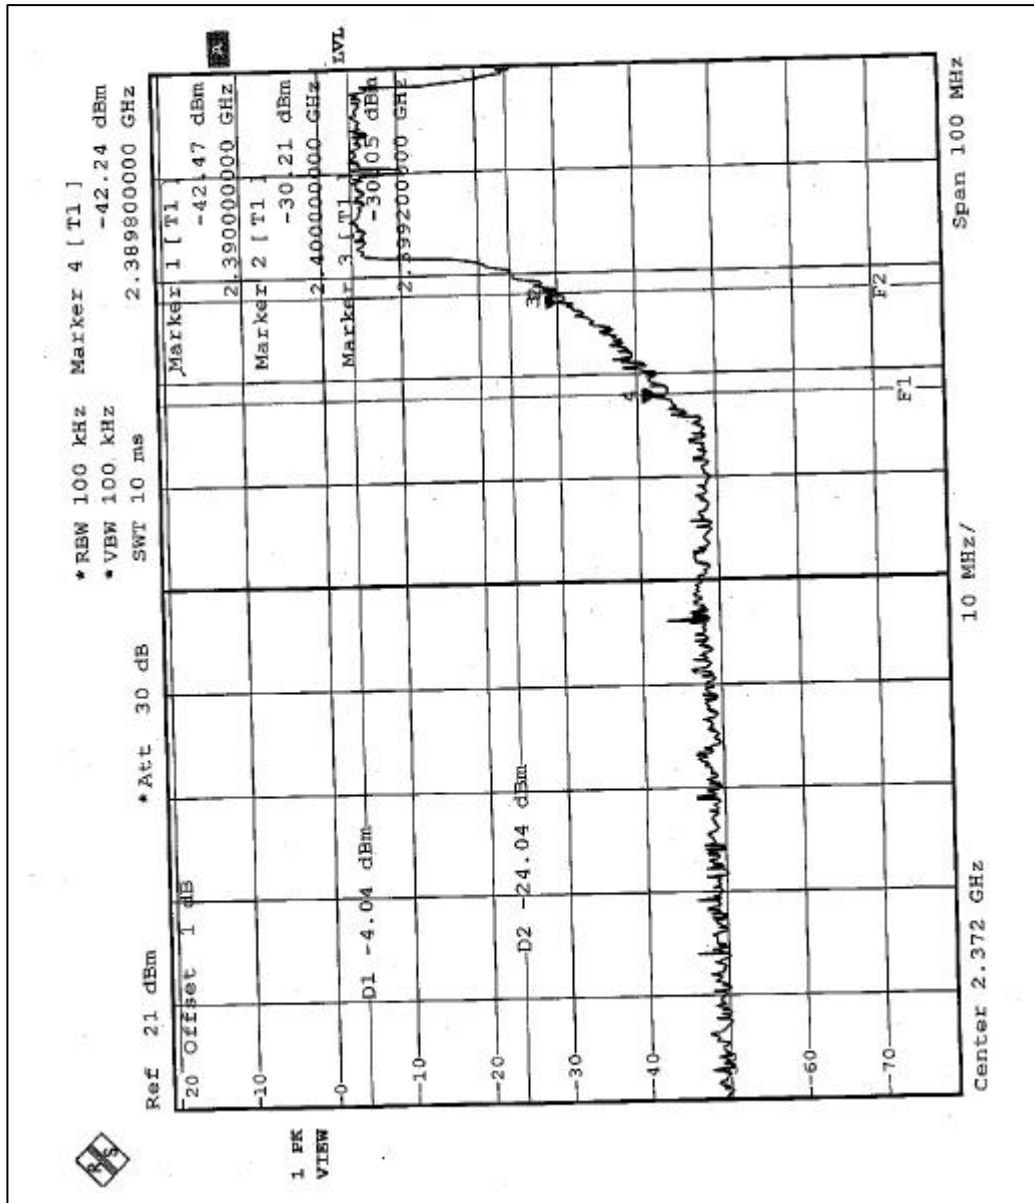

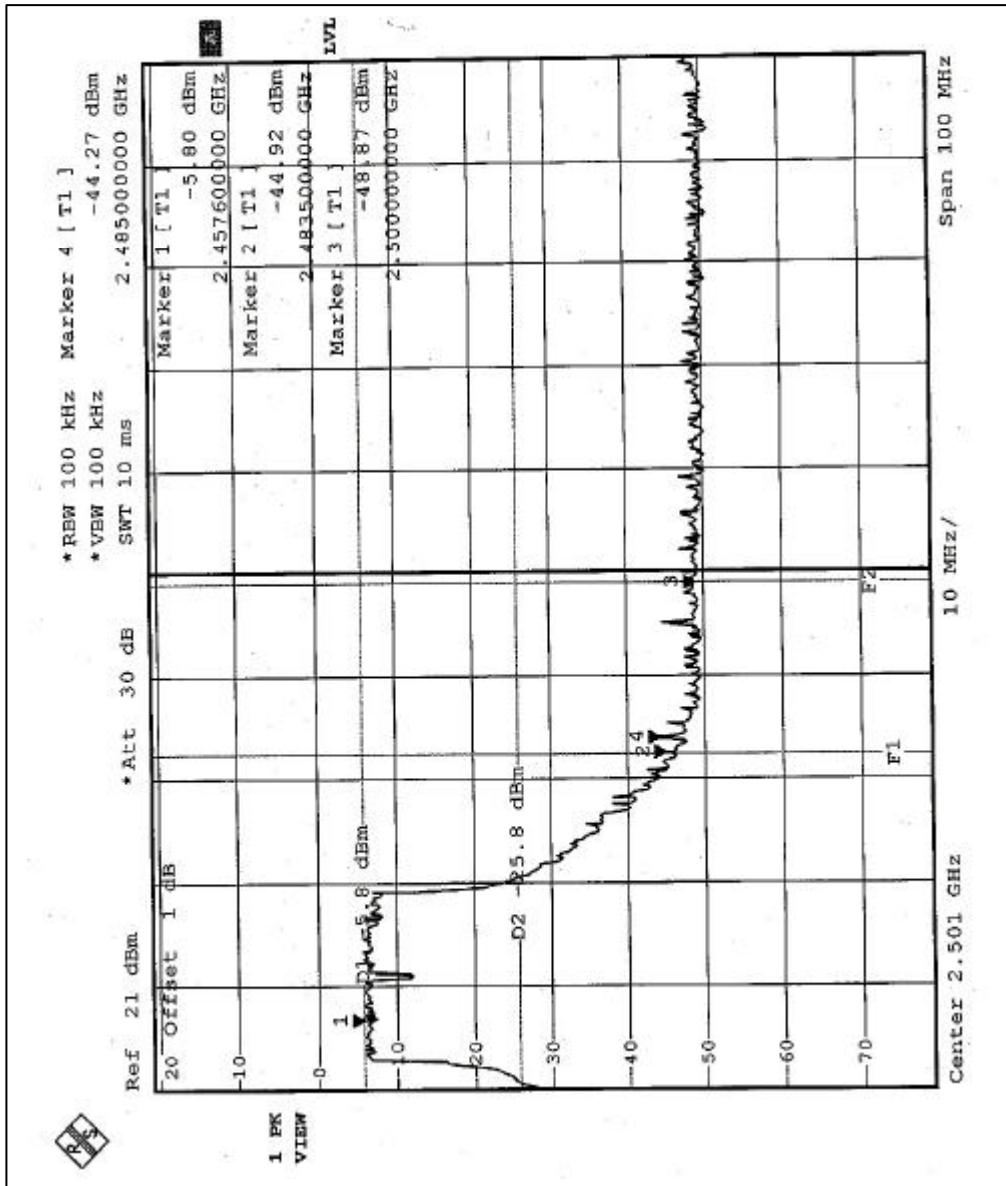



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna types used in this product are Inverted F antenna & PIFA Antenna with UFL connector. And the maximum Gain of this antenna is only 0.78dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST

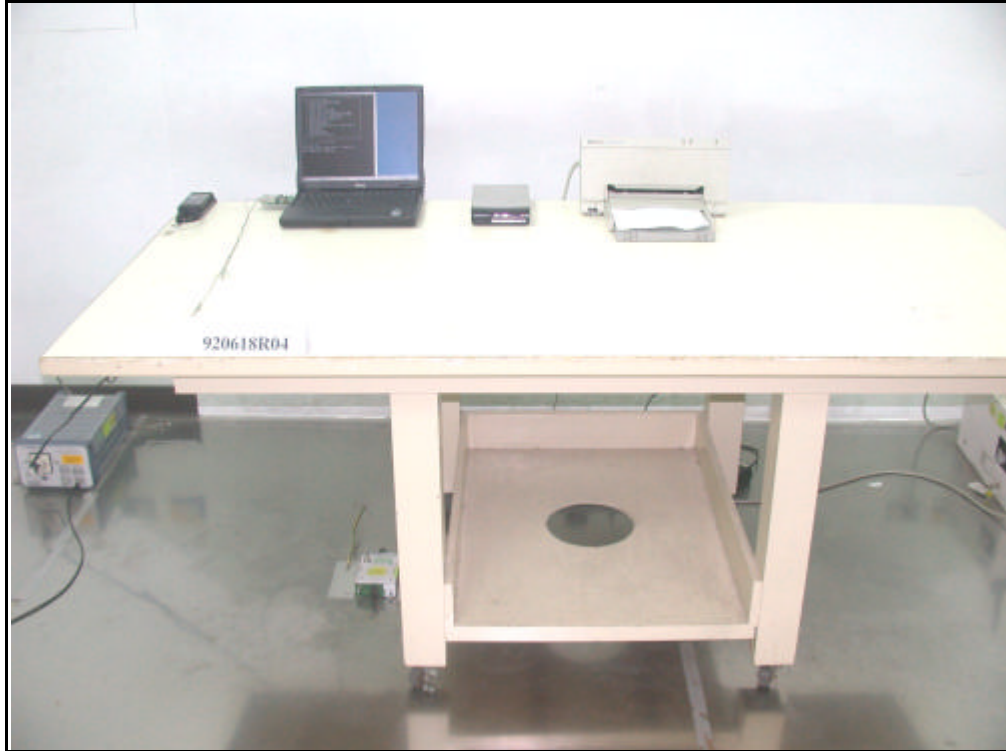

RADIATED EMISSION TEST







6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
Canada	INDUSTRY CANADA
R.O.C.	CNLA, BSMI

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.