



A D T

FCC TEST REPORT

REPORT NO.: RF110909E05 R1

MODEL NO.: T77H330

FCC ID: MCLT77H330

RECEIVED: Sep. 09, 2011

TESTED: Sep. 15 to 16, 2011

ISSUED: Oct. 04, 2011

APPLICANT: Hon Hai PRECISION IND.CO.,LTD

ADDRESS: 5F-1,5 Hsin-An Road Hsinchu, Science-Based
Industrial Park Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung
Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 80 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

Table of Contents

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.4 DESCRIPTION OF SUPPORT UNITS	15
3.5 CONFIGURATION OF SYSTEM UNDER TEST	16
4. TEST TYPES AND RESULTS	17
4.1 CONDUCTED EMISSION MEASUREMENT	17
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	17
4.1.2 TEST INSTRUMENTS	17
4.1.3 TEST PROCEDURES	18
4.1.4 DEVIATION FROM TEST STANDARD	18
4.1.5 TEST SETUP	19
4.1.6 EUT OPERATING CONDITIONS	19
4.1.7 TEST RESULTS	20
4.2 RADIATED EMISSION MEASUREMENT	22
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	22
4.2.2 TEST INSTRUMENTS	23
4.2.3 TEST PROCEDURES	24
4.2.4 DEVIATION FROM TEST STANDARD	24
4.2.5 TEST SETUP	25
4.2.6 EUT OPERATING CONDITIONS	25
4.2.7 TEST RESULTS	26
4.3 6dB BANDWIDTH MEASUREMENT	55
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	55
4.3.2 TEST INSTRUMENTS	55
4.3.3 TEST PROCEDURE	55
4.3.4 DEVIATION FROM TEST STANDARD	55
4.3.5 TEST SETUP	55
4.3.6 EUT OPERATING CONDITIONS	55
4.3.7 TEST RESULTS	56
4.4 MAXIMUM PEAK OUTPUT POWER	60
4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	60
4.4.2 INSTRUMENTS	60



A D T

4.4.3 TEST PROCEDURES	60
4.4.4 DEVIATION FROM TEST STANDARD.....	60
4.4.5 TEST SETUP	60
4.4.6 EUT OPERATING CONDITIONS	61
4.4.7 TEST RESULTS	61
4.5 POWER SPECTRAL DENSITY MEASUREMENT.....	63
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	63
4.5.2 TEST INSTRUMENTS.....	63
4.5.3 TEST PROCEDURE.....	63
4.5.4 DEVIATION FROM TEST STANDARD	63
4.5.5 TEST SETUP	63
4.5.6 EUT OPERATING CONDITION	64
4.5.7 TEST RESULTS	65
4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	69
4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	69
4.6.2 TEST INSTRUMENTS.....	69
4.6.3 TEST PROCEDURE.....	69
4.6.4 DEVIATION FROM TEST STANDARD	69
4.6.5 EUT OPERATING CONDITION	69
4.6.6 TEST RESULTS	69
5. INFORMATION ON THE TESTING LABORATORIES	79
6. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	80



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF110909E05	Original release	Sep. 30, 2011
RF110909E05 R1	Revised note 4 & 5 for section 4.2.2.	Oct. 04, 2011



A D T

1. CERTIFICATION

PRODUCT: WiFi Module

BRAND NAME: FOXCONN

MODEL NO.: T77H330

TEST SAMPLE: ENGINEERING SAMPLE

TESTED: Sep. 15 to 16, 2011

APPLICANT: Hon Hai PRECISION IND.CO.,LTD

STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003
ANSI C63.10-2009

The above equipment (Model: T77H330) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Midoli Peng, DATE: Oct. 04, 2011
(Midoli Peng, Specialist)

APPROVED BY : May Chen, DATE: Oct. 04, 2011
(May Chen, Deputy Manager)



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -5.22dB at 0.190MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -0.50dB at 2483.50MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Conducted Out-Band Emission Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.89dB
Radiated emissions (1GHz -18GHz)	2.19 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	WiFi Module
MODEL NO.	T77H330
FCC ID	MCLT77H330
POWER SUPPLY	DC 5V from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: Up to 11Mbps 802.11g: Up to 54Mbps 802.11n (20MHz, 800ns GI): Up to 65Mbps 802.11n (20MHz, 400ns GI): Up to 72.2Mbps 802.11n (40MHz, 800ns GI): Up to 135Mbps 802.11n (40MHz, 400ns GI): Up to 150Mbps
FREQUENCY OPERATING	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz)
MAXIMUM OUTPUT POWER	802.11b: 102.3mW 802.11g: 354.8mW 802.11n (20MHz): 338.8mW 802.11n (40MHz): 239.9mW
ANTENNA TYPE	Please see NOTE
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA



A D T

NOTE:

1. There are two antennas provided to this EUT, please refer to the following table:

Antenna No.	Antenna Type	Gain (dBi)	Connector Type	Diversity function
1	PCB Print	1.19	Switching type RF connector	YES
2	PCB Print	1.29	NA	YES

From the above antennas, Antenna 2 was selected as representative model for the test and its data was recorded in this report.

2. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.
3. The EUT was pre-tested under the following modes:

Test Mode	Description
Mode A	X-Y plane
Mode B	Y-Z plane
Mode C	Z-X plane

From the above modes, the worst spurious emission (below 1GHz) test was found in **Mode A** and the worst spurious emission (above 1GHz) was found in **Mode B**. Therefore only the test data of the mode was recorded in this report.

4. The EUT is 1 * 1 spatial SISO (1Tx & 1Rx) without beam forming function.
5. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 7.
6. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided for 802.11b, 802.11g, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		



A D T

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ³ 1G	APCM	OB	
MODE A	-	√	-	-	-	X-Y Plane
MODE B	√	-	√	√	√	Y-Z Plane

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz

RE ³ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement

OB: Conducted Out-Band Emission Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	1	OFDM	BPSK	6

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	1	OFDM	BPSK	6



A D T

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13



A D T

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 11	OFDM	BPSK	6
802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5
802.11n (40MHz)	3 to 9	3, 9	OFDM	BPSK	13

※ **TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
PLC	25deg. C, 79%RH,	120Vac, 60Hz	Eagle Chen
RE ³ 1G	26deg. C, 69%RH	120Vac, 60Hz	Rex Huang
RE<1G	24deg. C, 71%RH	120Vac, 60Hz	Rex Huang
APCM	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang
OB	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang



A D T

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.



A D T

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP19L	CN-OHC416-7016 6-5CA-0448	PIW632500516610
2	USB tool	Hon Hai	NA	NA	NA


NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	0.5m USB cable, shielded.

NOTE: All power cords of the above support units are non shielded (1.8m).



A D T

3.5 CONFIGURATION OF SYSTEM UNDER TEST

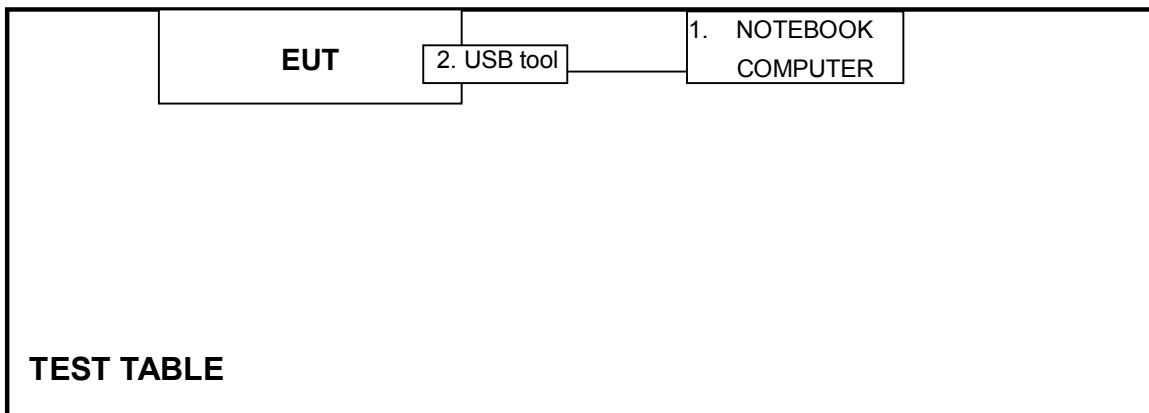



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Test date: Sep. 16, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 09, 2011	Mar. 08, 2012
Line-Impedance Stabilization Network (for EUT)	ENV216	100072	June 10, 2011	June 09, 2012
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Nov. 03, 2010	Nov. 02, 2011
RF Cable (JYEBAO)	5DFB	COCCAB-002	Aug. 29, 2011	Aug. 28, 2012
50 ohms Terminator	50	3	Oct. 07, 2010	Oct. 06, 2011
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.



A D T


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

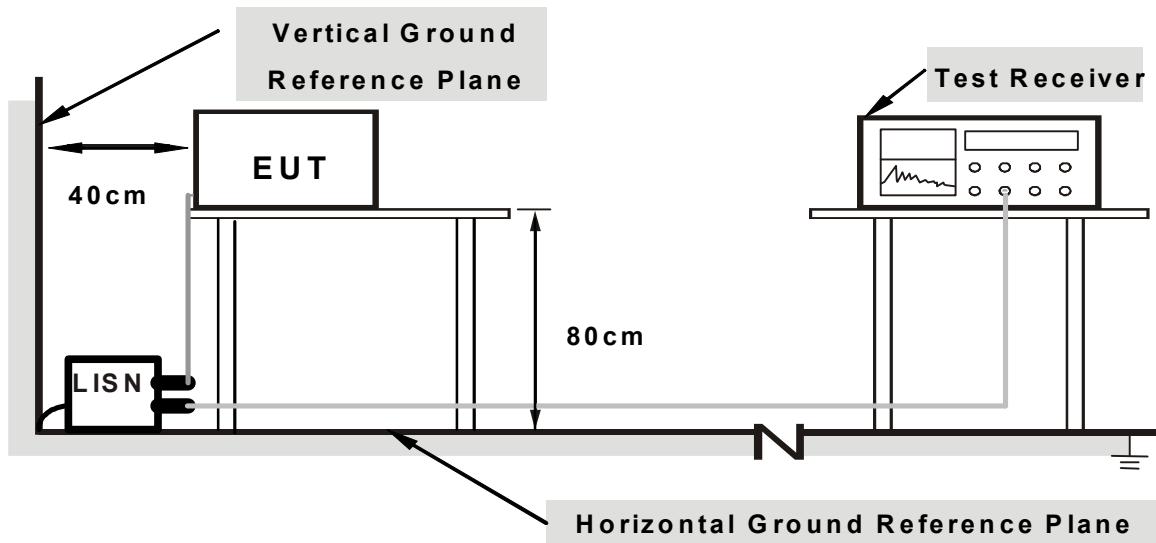

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Connect the EUT with the support unit 1 (Notebook Computer) which is placed on a testing table.
2. The communication partner run test program “RT5x7XQA.exe” to enable EUT under transmission/receiving condition continuously at specific channel frequency.




A D T

4.1.7 TEST RESULTS

PHASE	Line (L)	6dB BANDWIDTH		9 kHz	
-------	----------	---------------	--	-------	--

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	47.36	21.55	47.46	21.65	66.00	56.00	-18.54	-34.35
2	0.189	0.12	54.37	48.64	54.49	48.76	64.07	54.07	-9.57	-5.30
3	0.255	0.13	48.17	42.06	48.30	42.19	61.58	51.58	-13.28	-9.39
4	0.318	0.13	41.10	36.22	41.23	36.35	59.76	49.76	-18.53	-13.41
5	0.379	0.13	37.60	31.92	37.73	32.05	58.29	48.29	-20.56	-16.24
6	5.197	0.26	25.47	13.68	25.73	13.94	60.00	50.00	-34.27	-36.06

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

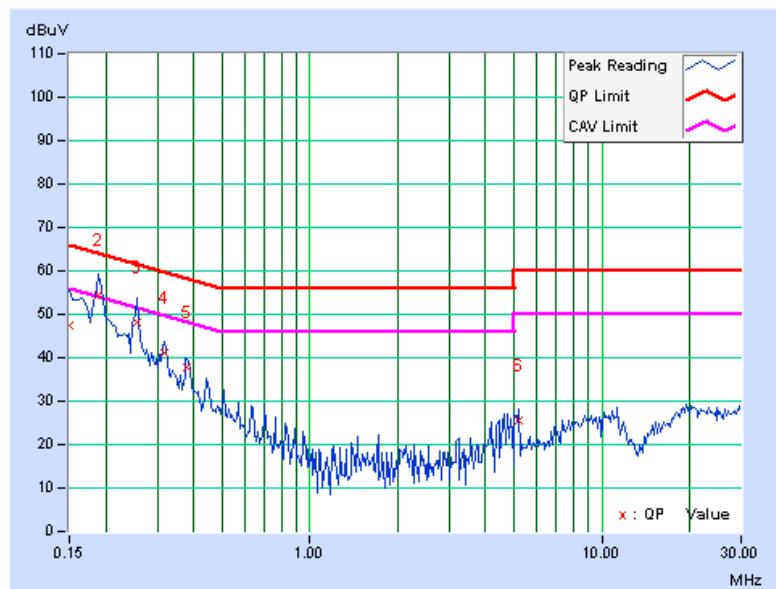




A D T

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	Q.P. [dB (uV)]	AV. [dB (uV)]	Q.P. [dB (uV)]	AV. [dB (uV)]	Q.P. [dB (uV)]	AV. [dB (uV)]	Q.P. [dB]	AV. [dB]
1	0.162	0.12	45.43	17.70	45.55	17.82	65.38	55.38	-19.82	-37.55
2	0.190	0.13	54.16	48.70	54.29	48.83	64.06	54.06	-9.76	-5.22
3	0.252	0.14	47.90	41.83	48.04	41.97	61.71	51.71	-13.66	-9.73
4	0.318	0.15	41.13	35.91	41.28	36.06	59.76	49.76	-18.48	-13.70
5	0.380	0.15	37.76	31.74	37.91	31.89	58.27	48.27	-20.36	-16.38
6	4.813	0.35	29.11	18.05	29.46	18.40	56.00	46.00	-26.54	-27.60

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

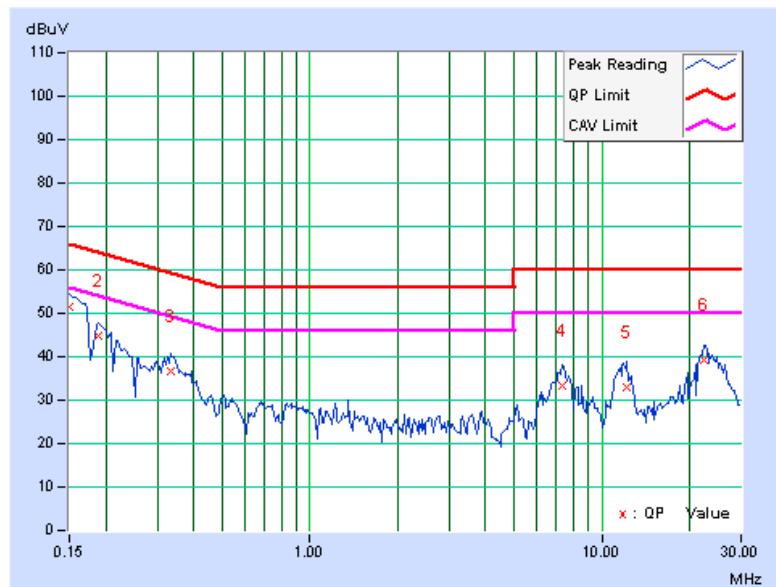



A D T

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_{uV/m}) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. Section 15.205 restricted bands of operation shall compliance with the limits in Section 15.209.



A D T

4.2.2 TEST INSTRUMENTS

Test date: Sep. 15 to 16, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 29, 2011	Aug. 28, 2012
Agilent Pre-Selector	N9039A	MY46520310	Aug. 29, 2011	Aug. 28, 2012
Agilent Signal Generator	N5181A	MY49060347	July 25, 2011	July 24, 2012
LIG NEX1 Test Receiver	ER-265	L09068005	Oct. 25, 2010	Oct. 24, 2011
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 16, 2010	Nov. 15, 2011
Agilent Pre-Amplifier	8449B	3008A02465	Feb. 28, 2011	Feb. 27, 2012
Miteq Pre-Amplifier	AFS33-1800265 0-30-8P-44	881786	Nov. 16, 2010	Nov. 15, 2011
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Apr. 14, 2011	Apr. 13, 2012
AISI Horn_Antenna	AIH.8018	0000220091110	Nov. 22, 2010	Nov. 21, 2011
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 08, 2010	Oct. 07, 2011
RF CABLE	NA	RF104-205 RF104-207 RF104-202	Dec. 28, 2010	Dec. 27, 2011
RF Cable	NA	CHHCAB_001	Oct. 17, 2010	Oct. 16, 2011
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in 966 Chamber No. H.
 4. The FCC Site Registration No. is 797305.
 5. The CANADA Site Registration No. is IC 7450H-3.



A D T

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

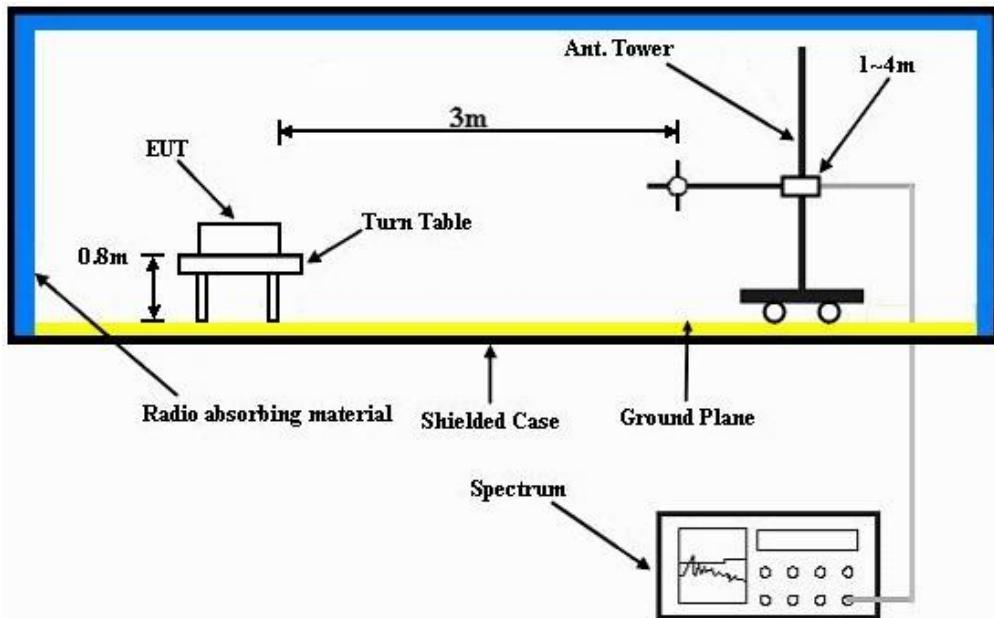

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



A D T

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 1		FREQUENCY RANGE Below 1000MHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Quasi-Peak
ENVIRONMENTAL CONDITIONS		24deg. C, 71%RH		TESTED BY Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	120.12	36.8 QP	43.5	-6.7	1.50 H	158	24.42	12.40
2	239.97	41.1 QP	46.0	-4.9	1.25 H	38	28.43	12.67
3	299.89	39.9 QP	46.0	-6.2	1.00 H	136	24.67	15.18
4	600.09	41.8 QP	46.0	-4.2	1.00 H	272	20.17	21.60
5	720.05	36.9 QP	46.0	-9.2	1.25 H	263	14.26	22.59
6	799.75	38.1 QP	46.0	-7.9	1.00 H	131	13.61	24.47
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	36.04	36.1 QP	40.0	-3.9	2.00 V	122	22.66	13.47
2	240.08	32.6 QP	46.0	-13.4	2.00 V	213	19.90	12.68
3	480.01	36.6 QP	46.0	-9.4	1.00 V	200	17.49	19.11
4	600.09	42.3 QP	46.0	-3.7	1.25 V	213	20.73	21.60
5	799.75	42.8 QP	46.0	-3.2	1.25 V	62	18.36	24.47
6	947.89	36.4 QP	46.0	-9.7	1.00 V	123	10.01	26.34

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz WORST-CASE DATA

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		FREQUENCY RANGE		1 ~ 25GHz
INPUT POWER (SYSTEM)		DETECTOR FUNCTION		Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		TESTED BY		Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	60.8 PK	74.0	-13.2	1.88 H	143	28.93	31.87
2	2386.00	52.5 AV	54.0	-1.5	1.88 H	143	20.63	31.87
3	*2412.00	107.7 PK			1.87 H	140	75.75	31.95
4	*2412.00	104.8 AV			1.87 H	140	72.85	31.95
5	4824.00	55.3 PK	74.0	-18.7	1.14 H	318	14.08	41.22
6	4824.00	52.6 AV	54.0	-1.4	1.14 H	318	11.38	41.22

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	57.2 PK	74.0	-16.8	1.00 V	73	25.35	31.87
2	2386.00	47.0 AV	54.0	-7.0	1.00 V	73	15.13	31.87
3	*2412.00	103.0 PK			2.00 V	356	71.05	31.95
4	*2412.00	100.1 AV			2.00 V	356	68.15	31.95
5	4824.00	55.6 PK	74.0	-18.4	1.15 V	350	14.38	41.22
6	4824.00	52.4 AV	54.0	-1.6	1.15 V	350	11.18	41.22

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 6		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		26deg. C, 69%RH		TESTED BY Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2389.30	61.2 PK	74.0	-12.8	1.43 H	120	29.32	31.88
2	2389.30	52.6 AV	54.0	-1.4	1.43 H	120	20.72	31.88
3	*2437.00	110.1 PK			1.43 H	120	78.06	32.04
4	*2437.00	107.2 AV			1.43 H	120	75.16	32.04
5	2484.50	60.1 PK	74.0	-13.9	1.43 H	120	27.90	32.20
6	2484.50	52.5 AV	54.0	-1.5	1.43 H	120	20.30	32.20
7	4874.00	55.2 PK	74.0	-18.8	1.32 H	317	13.84	41.36
8	4874.00	52.1 AV	54.0	-1.9	1.32 H	317	10.74	41.36
9	7311.00	53.4 PK	74.0	-20.6	1.19 H	233	7.73	45.67
10	7311.00	44.9 AV	54.0	-9.1	1.19 H	233	-0.77	45.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.7 PK			1.98 V	358	72.66	32.04
2	*2437.00	101.8 AV			1.98 V	358	69.76	32.04
3	4874.00	56.3 PK	74.0	-17.7	1.26 V	353	14.94	41.36
4	4874.00	52.9 AV	54.0	-1.1	1.26 V	353	11.54	41.36
5	7311.00	53.9 PK	74.0	-20.1	1.20 V	226	8.23	45.67
6	7311.00	45.1 AV	54.0	-8.9	1.20 V	226	-0.57	45.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 11		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		26deg. C, 69%RH		TESTED BY Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.7 PK			1.82 H	146	74.58	32.12
2	*2462.00	103.8 AV			1.82 H	146	71.68	32.12
3	2483.50	61.3 PK	74.0	-12.7	1.79 H	144	29.11	32.19
4	2483.50	53.5 AV	54.0	-0.5	1.79 H	144	21.31	32.19
5	4924.00	53.2 PK	74.0	-20.8	1.30 H	320	11.72	41.48
6	4924.00	50.4 AV	54.0	-3.6	1.30 H	320	8.92	41.48
7	7386.00	54.9 PK	74.0	-19.1	1.00 H	161	8.99	45.91
8	7386.00	43.1 AV	54.0	-10.9	1.00 H	161	-2.81	45.91



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.7 PK			1.95 V	358	70.58	32.12
2	*2462.00	99.6 AV			1.95 V	358	67.48	32.12
3	2483.50	59.3 PK	74.0	-14.7	1.82 V	175	27.11	32.19
4	2483.50	50.6 AV	54.0	-3.4	1.82 V	175	18.41	32.19
5	4924.00	53.8 PK	74.0	-20.2	1.25 V	262	12.32	41.48
6	4924.00	50.6 AV	54.0	-3.4	1.25 V	262	9.12	41.48
7	7386.00	54.0 PK	74.0	-20.0	1.00 V	0	8.09	45.91
8	7386.00	41.6 AV	54.0	-12.4	1.00 V	0	-4.31	45.91

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (802.11b MODE,CH1, HORIZONTAL)

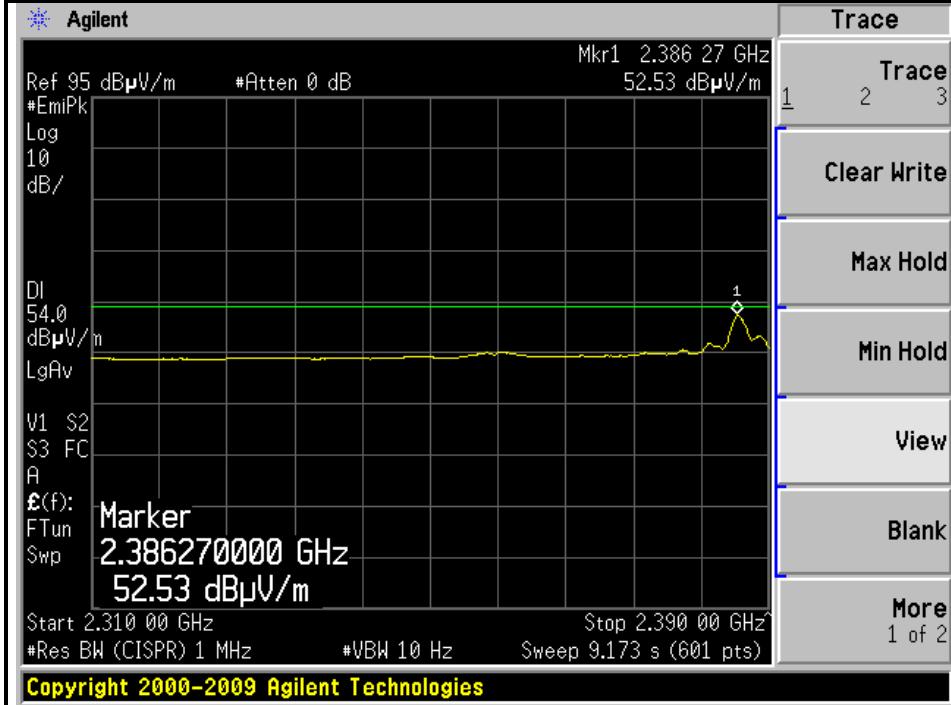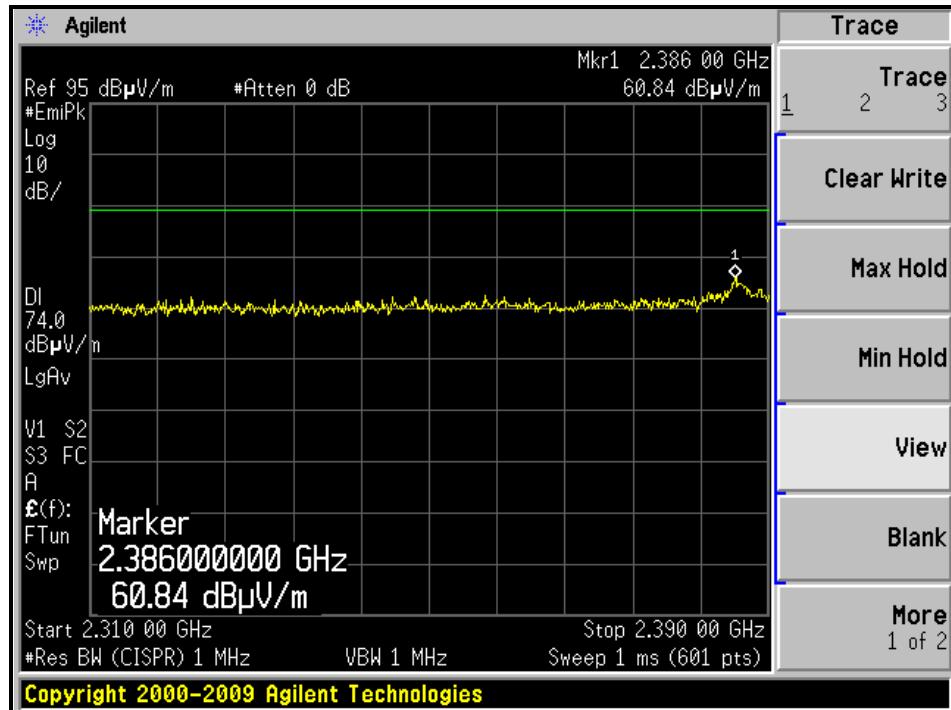



A D T



RESTRICTED BANDEDGE (802.11b MODE,CH1, VERTICAL)

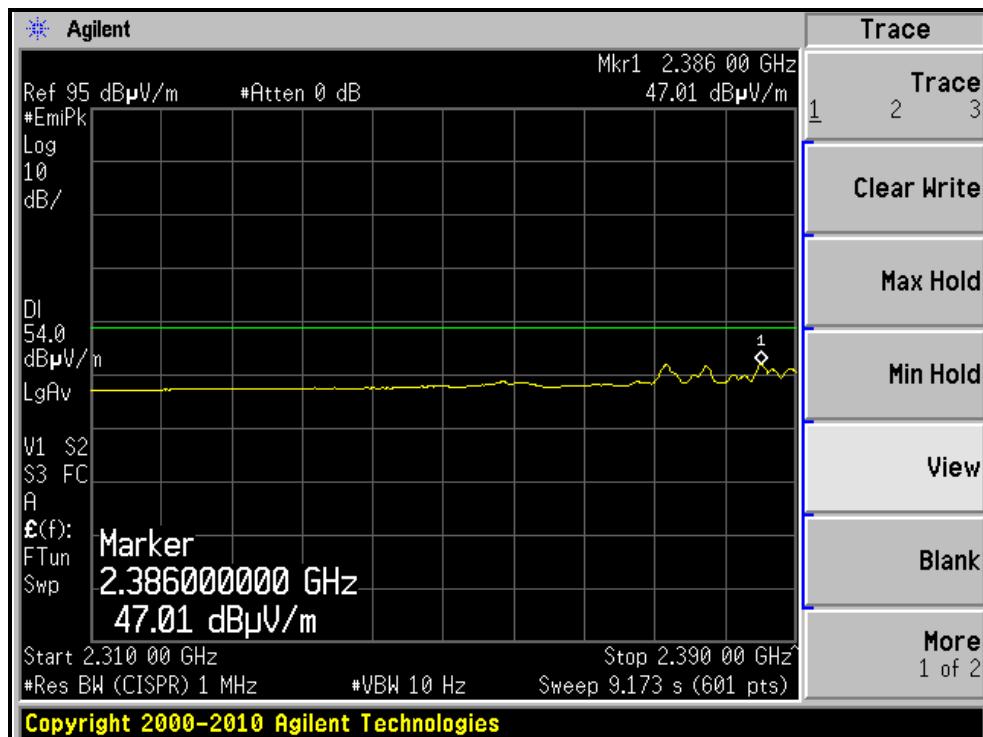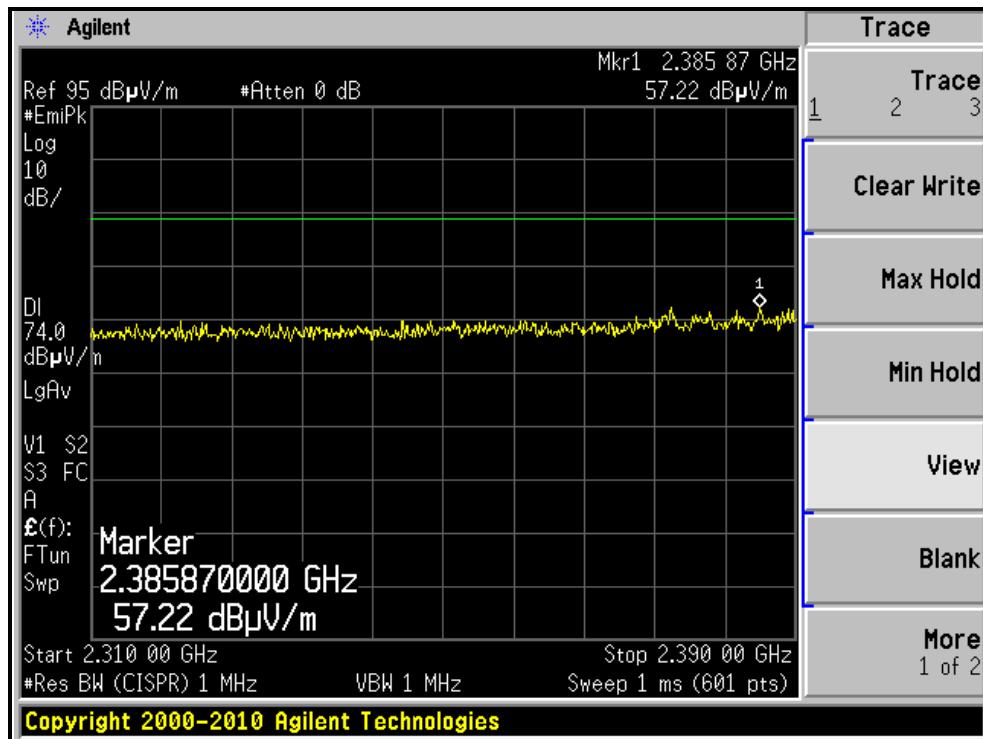



A D T



RESTRICTED BANDEDGE (802.11b MODE,CH11, HORIZONTAL)

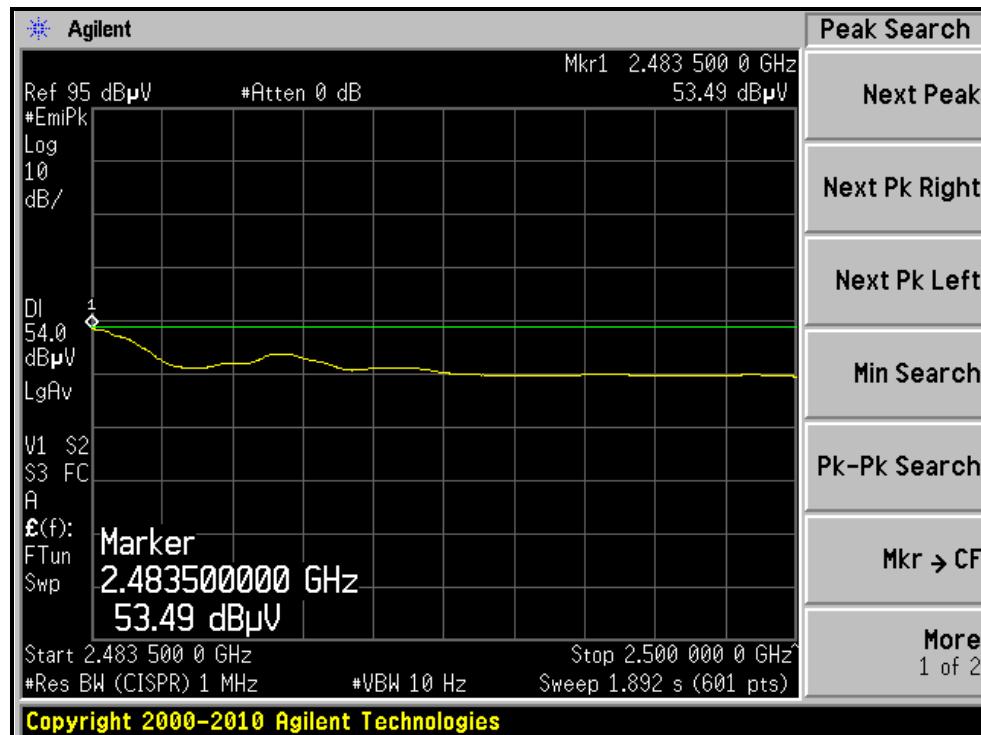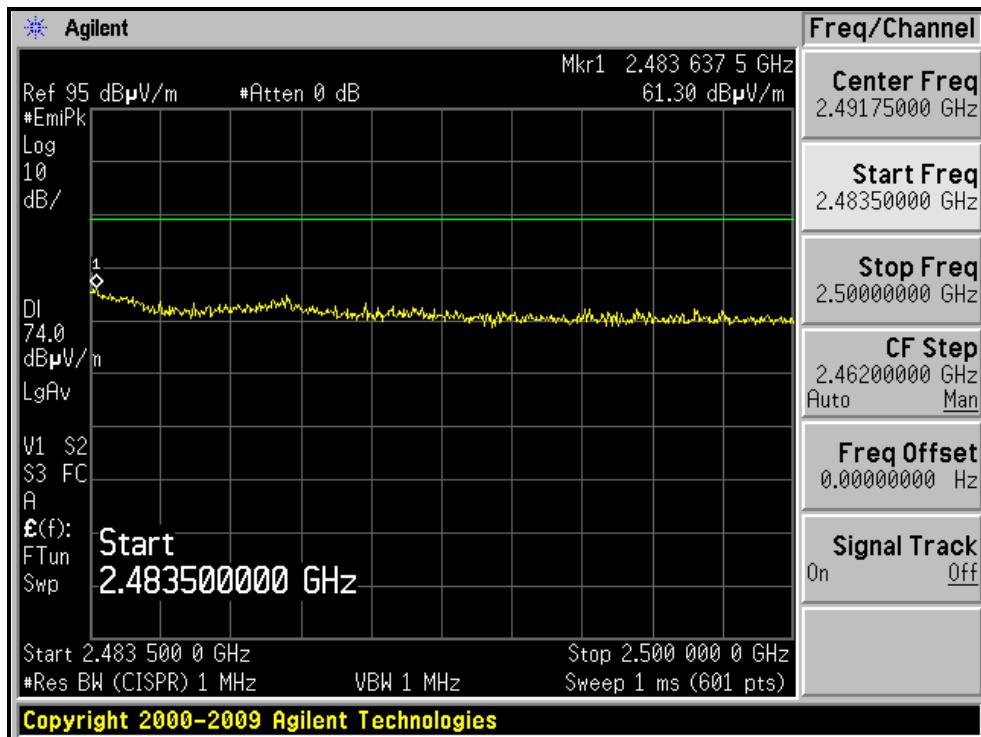



A D T

RESTRICTED BANDEDGE (802.11b MODE,CH11, VERTICAL)

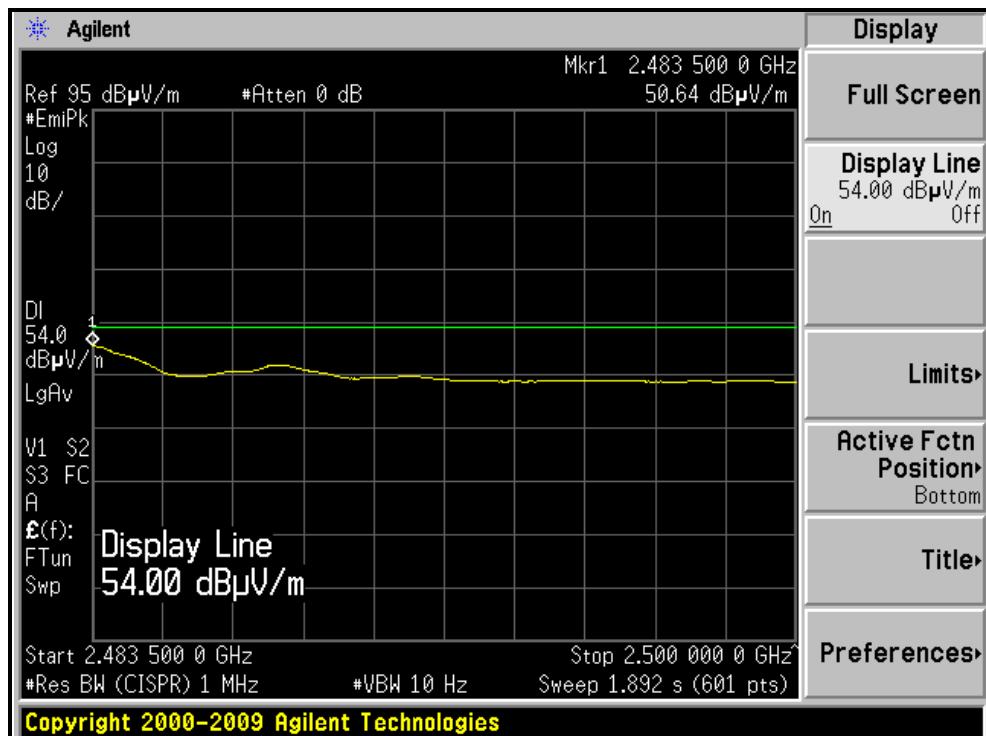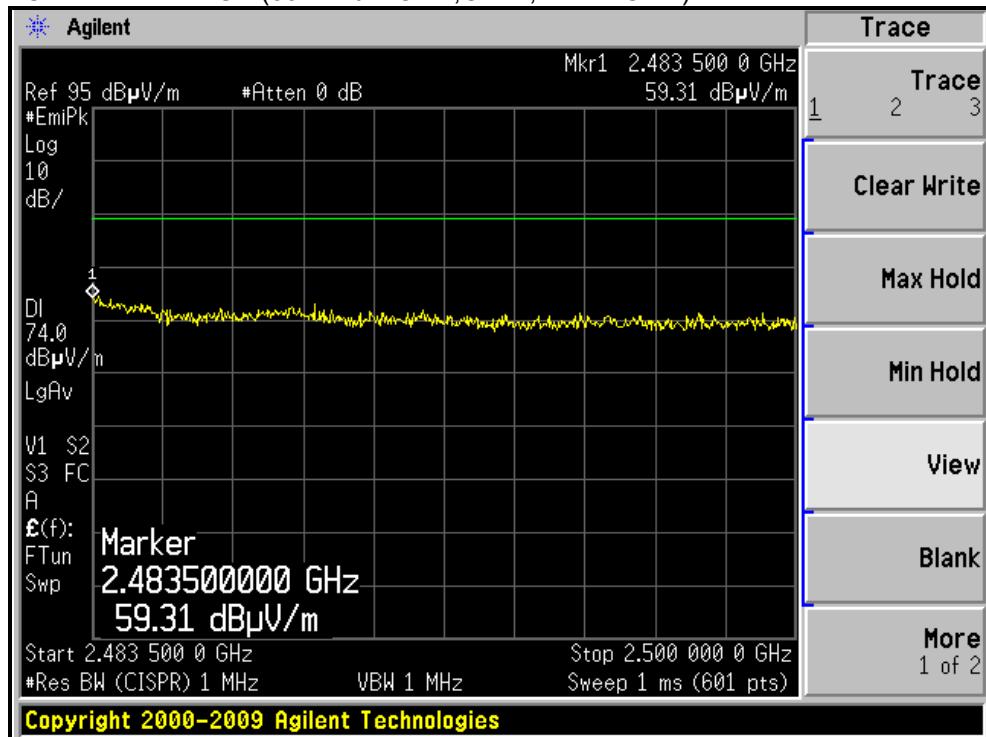



A D T

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 1		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		26deg. C, 69%RH		TESTED BY Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.4 PK	74.0	-2.6	1.87 H	140	39.52	31.88
2	2390.00	53.1 AV	54.0	-0.9	1.87 H	140	21.22	31.88
3	*2412.00	107.0 PK			1.83 H	143	75.05	31.95
4	*2412.00	93.3 AV			1.83 H	143	61.35	31.95
5	4824.00	52.1 PK	74.0	-21.9	1.36 H	307	10.88	41.22
6	4824.00	38.1 AV	54.0	-15.9	1.36 H	307	-3.12	41.22

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.2 PK	74.0	-3.8	1.05 V	264	38.32	31.88
2	2390.00	52.7 AV	54.0	-1.3	1.05 V	264	20.82	31.88
3	*2412.00	104.6 PK			1.95 V	356	72.65	31.95
4	*2412.00	91.2 AV			1.95 V	356	59.25	31.95
5	4824.00	52.0 PK	74.0	-22.0	1.18 V	268	10.78	41.22
6	4824.00	37.6 AV	54.0	-16.4	1.18 V	268	-3.62	41.22

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 6		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		26deg. C, 69%RH		TESTED BY Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2385.00	60.5 PK	74.0	-13.5	1.80 H	134	28.63	31.87
2	2385.00	48.4 AV	54.0	-5.6	1.80 H	134	16.53	31.87
3	*2437.00	109.4 PK			1.81 H	135	77.36	32.04
4	*2437.00	95.0 AV			1.81 H	135	62.96	32.04
5	2489.00	67.1 PK	74.0	-6.9	1.65 H	110	34.89	32.21
6	2489.00	50.5 AV	54.0	-3.5	1.65 H	110	18.29	32.21
7	4874.00	52.7 PK	74.0	-21.3	1.32 H	319	11.34	41.36
8	4874.00	38.4 AV	54.0	-15.6	1.32 H	319	-2.96	41.36
9	7311.00	54.0 PK	74.0	-20.0	1.00 H	163	8.33	45.67
10	7311.00	41.6 AV	54.0	-12.4	1.00 H	163	-4.07	45.67
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.6 PK			1.93 V	354	74.56	32.04
2	*2437.00	92.7 AV			1.93 V	354	60.66	32.04
3	4874.00	52.5 PK	74.0	-21.5	1.20 V	281	11.14	41.36
4	4874.00	38.1 AV	54.0	-15.9	1.20 V	281	-3.26	41.36
5	7311.00	55.6 PK	74.0	-18.4	1.19 V	226	9.93	45.67
6	7311.00	43.4 AV	54.0	-10.6	1.19 V	226	-2.27	45.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 11		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		26deg. C, 69%RH		TESTED BY Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.6 PK			1.81 H	143	75.48	32.12
2	*2462.00	93.2 AV			1.81 H	143	61.08	32.12
3	2483.50	72.4 PK	74.0	-1.6	1.78 H	143	40.21	32.19
4	2483.50	53.1 AV	54.0	-0.9	1.78 H	143	20.91	32.19
5	4924.00	52.3 PK	74.0	-21.7	1.26 H	327	10.82	41.48
6	4924.00	37.9 AV	54.0	-16.1	1.26 H	327	-3.58	41.48
7	7386.00	53.6 PK	74.0	-20.4	1.16 H	247	7.69	45.91
8	7386.00	45.0 AV	54.0	-9.0	1.16 H	247	-0.91	45.91



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.6 PK			1.94 V	355	72.48	32.12
2	*2462.00	90.6 AV			1.94 V	355	58.48	32.12
3	2483.50	69.0 PK	74.0	-5.0	1.92 V	359	36.81	32.19
4	2483.50	50.4 AV	54.0	-3.6	1.92 V	359	18.21	32.19
5	4924.00	52.3 PK	74.0	-21.7	1.22 V	282	10.82	41.48
6	4924.00	37.9 AV	54.0	-16.1	1.22 V	282	-3.58	41.48
7	7386.00	55.5 PK	74.0	-18.5	1.16 V	232	9.59	45.91
8	7386.00	43.3 AV	54.0	-10.7	1.16 V	232	-2.61	45.91

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (802.11g MODE,CH1, HORIZONTAL)

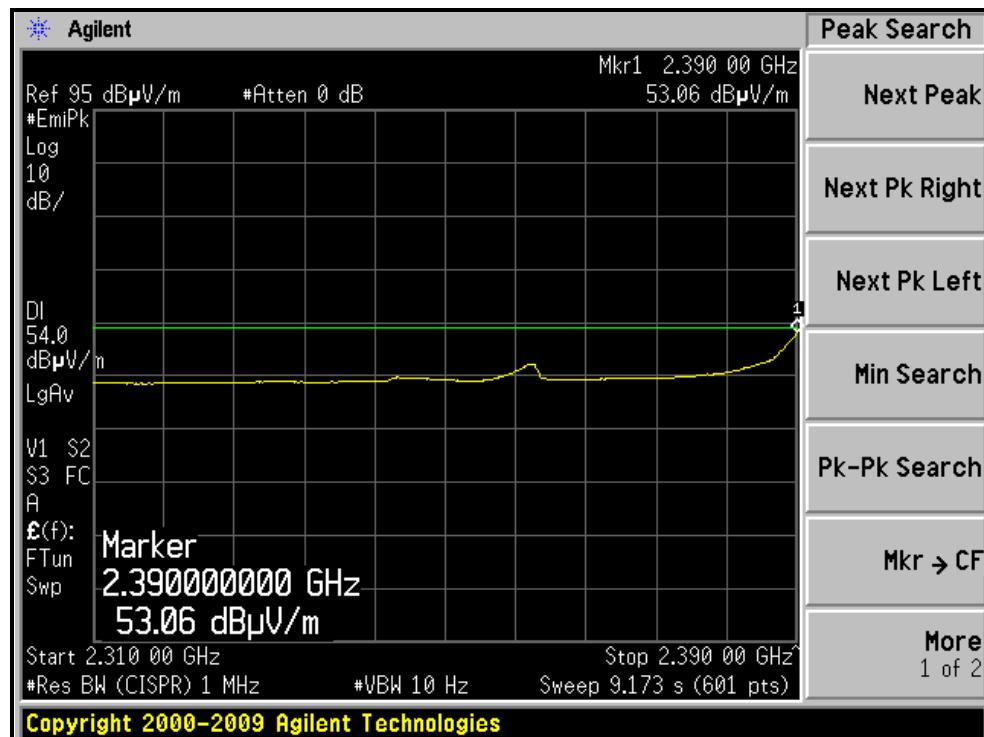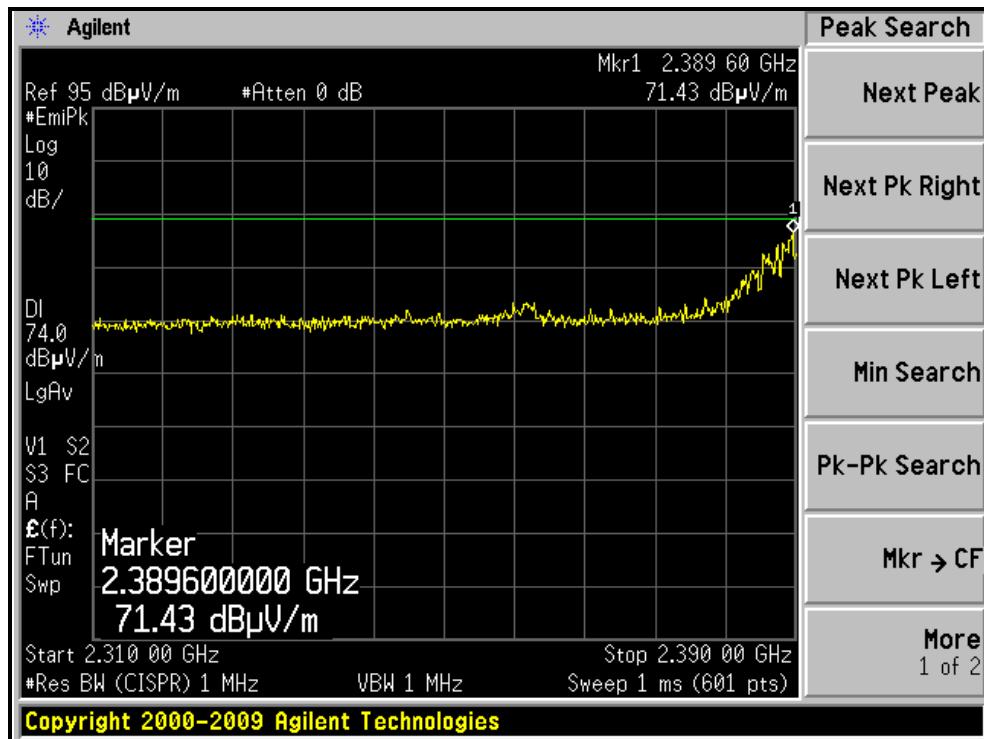



A D T



RESTRICTED BANDEDGE (802.11g MODE,CH1, VERTICAL)

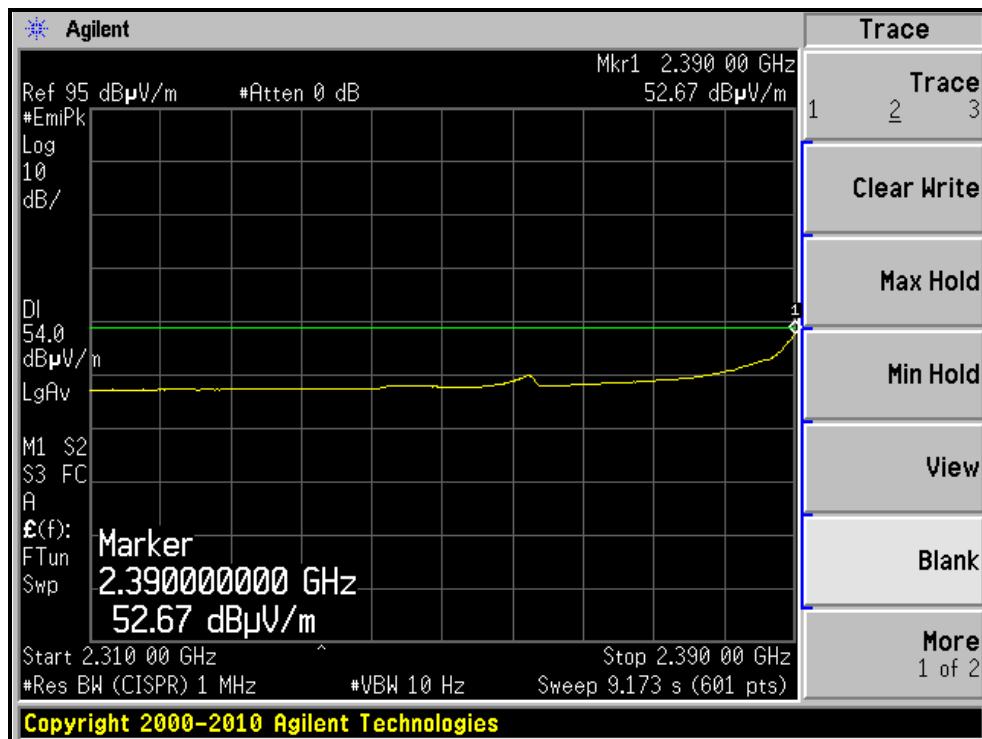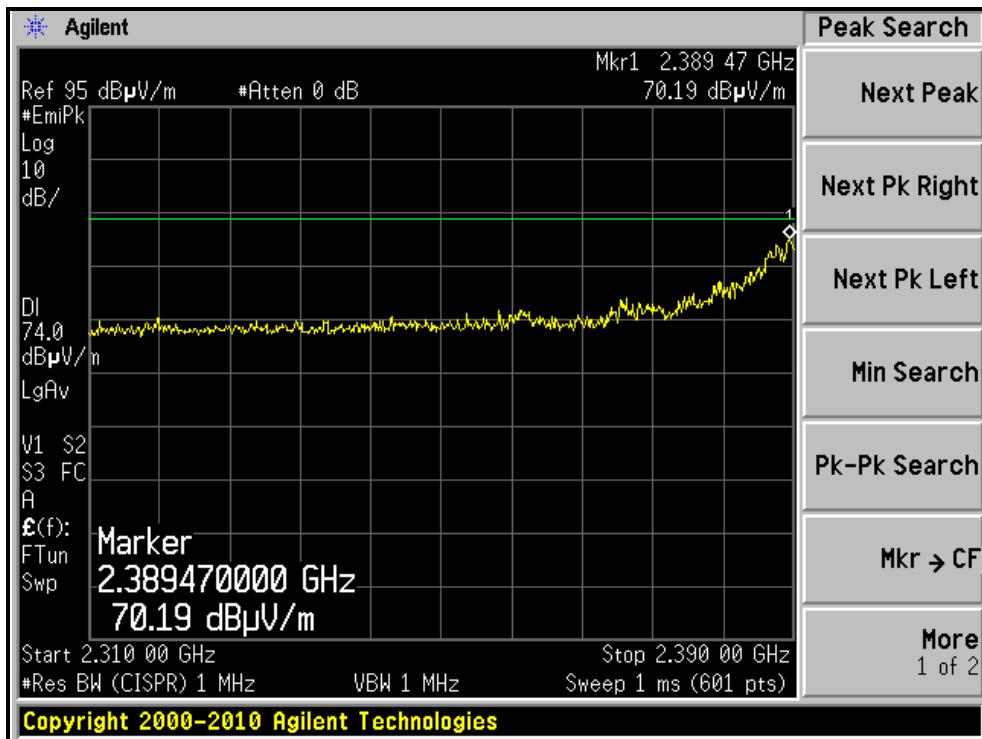



A D T



RESTRICTED BANDEDGE (802.11g MODE,CH11, HORIZONTAL)

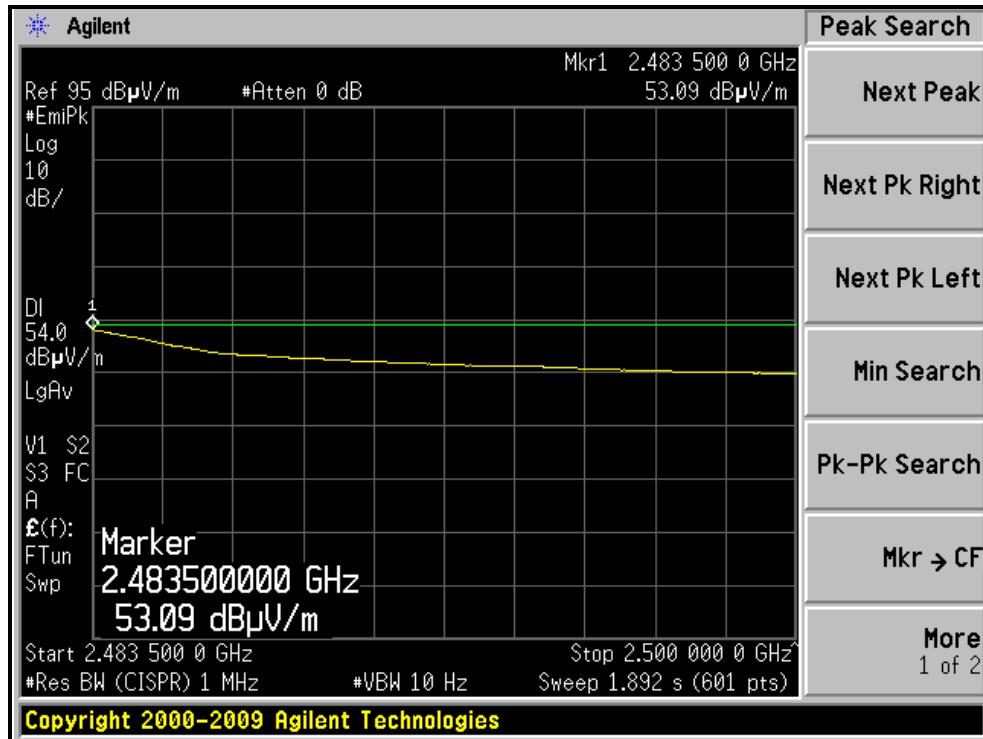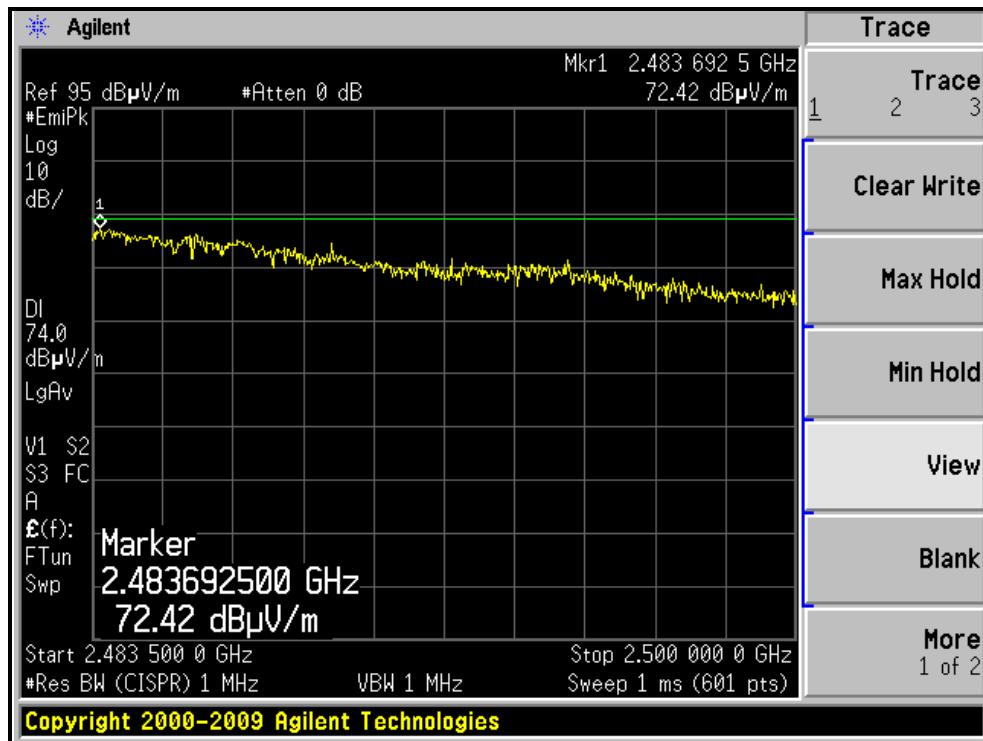



A D T

RESTRICTED BANDEDGE (802.11g MODE,CH11, VERTICAL)

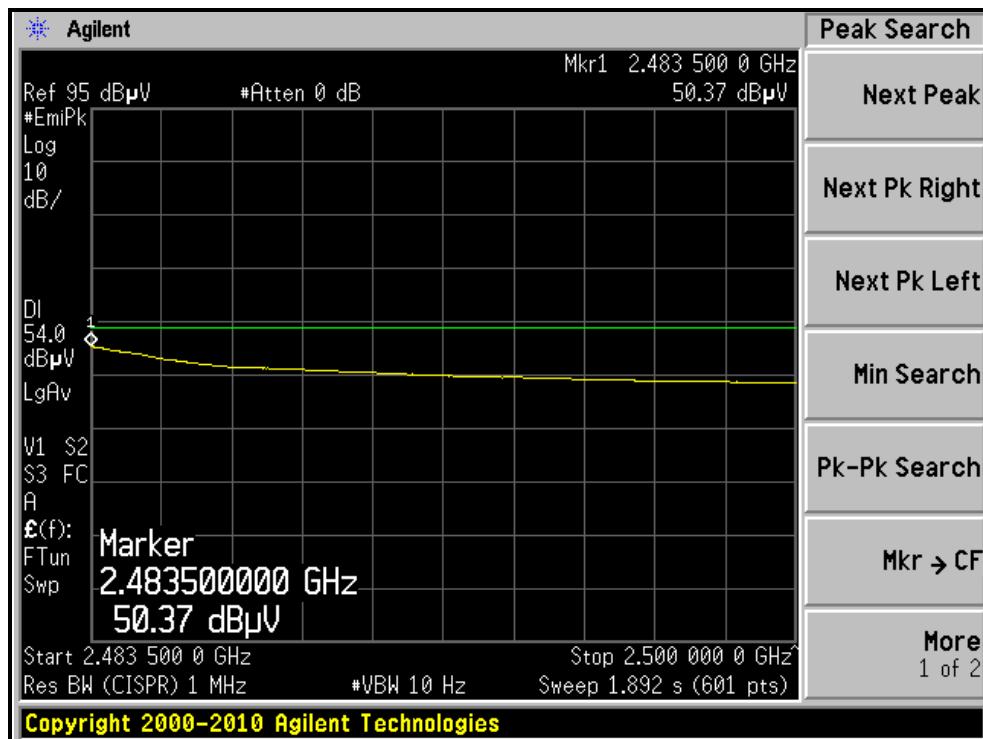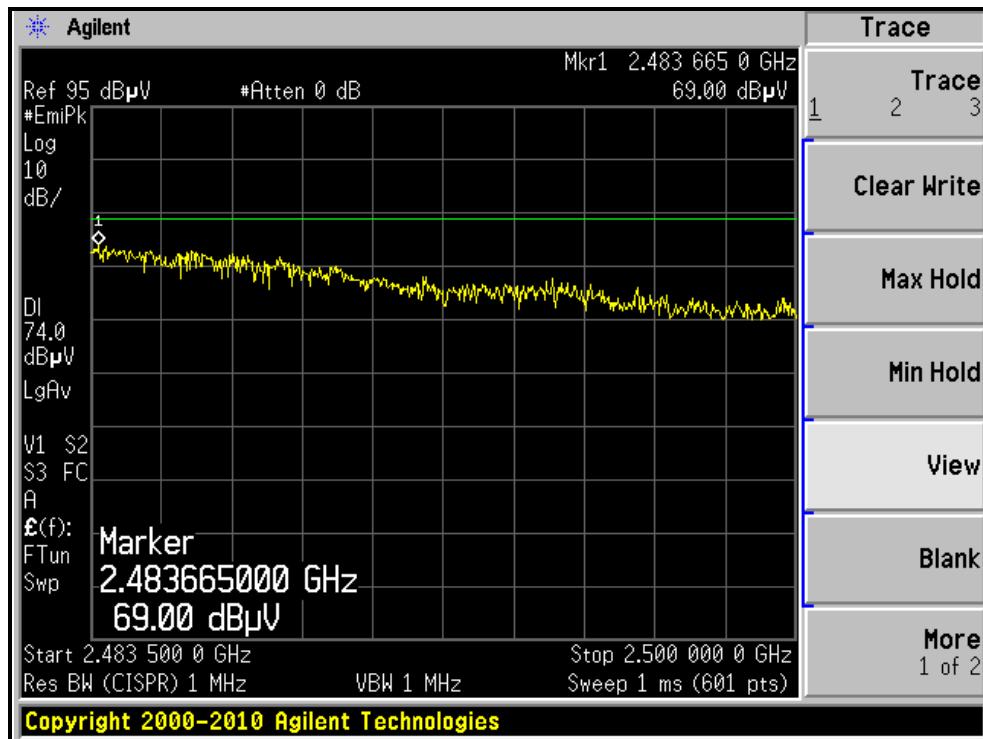



A D T

802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 1		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		26deg. C, 69%RH		TESTED BY Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.1 PK	74.0	-2.9	1.86 H	141	39.22	31.88
2	2390.00	53.3 AV	54.0	-0.7	1.86 H	141	21.42	31.88
3	*2412.00	106.1 PK			1.86 H	145	74.15	31.95
4	*2412.00	92.2 AV			1.86 H	145	60.25	31.95
5	4824.00	53.2 PK	74.0	-20.8	1.33 H	320	11.98	41.22
6	4824.00	39.3 AV	54.0	-14.7	1.33 H	320	-1.92	41.22

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.8 PK	74.0	-3.2	1.00 V	263	38.92	31.88
2	2390.00	52.7 AV	54.0	-1.3	1.00 V	263	20.82	31.88
3	*2412.00	103.2 PK			1.11 V	93	71.25	31.95
4	*2412.00	89.8 AV			1.11 V	93	57.85	31.95
5	4824.00	51.9 PK	74.0	-22.1	1.28 V	274	10.68	41.22
6	4824.00	37.5 AV	54.0	-16.5	1.28 V	274	-3.72	41.22

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 6		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		26deg. C, 69%RH		TESTED BY Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2385.00	61.3 PK	74.0	-12.7	1.88 H	139	29.43	31.87
2	2385.00	48.9 AV	54.0	-5.1	1.88 H	139	17.03	31.87
3	*2437.00	108.5 PK			1.88 H	140	76.46	32.04
4	*2437.00	94.5 AV			1.88 H	140	62.46	32.04
5	2488.00	69.3 PK	74.0	-4.7	1.78 H	144	37.09	32.21
6	2488.00	50.3 AV	54.0	-3.7	1.78 H	144	18.09	32.21
7	4874.00	53.0 PK	74.0	-21.0	1.27 H	331	11.64	41.36
8	4874.00	38.9 AV	54.0	-15.1	1.27 H	331	-2.46	41.36
9	7311.00	53.0 PK	74.0	-21.0	1.15 H	245	7.33	45.67
10	7311.00	44.7 AV	54.0	-9.3	1.15 H	245	-0.97	45.67
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.8 PK			1.09 V	124	73.76	32.04
2	*2437.00	92.0 AV			1.09 V	124	59.96	32.04
3	4874.00	51.9 PK	74.0	-22.1	1.29 V	293	10.54	41.36
4	4874.00	37.8 AV	54.0	-16.2	1.29 V	293	-3.56	41.36
5	7311.00	53.2 PK	74.0	-20.8	1.18 V	231	7.53	45.67
6	7311.00	42.8 AV	54.0	-11.2	1.18 V	231	-2.87	45.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 11		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		26deg. C, 69%RH		TESTED BY Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.6 PK			1.80 H	143	72.48	32.12
2	*2462.00	90.8 AV			1.80 H	143	58.68	32.12
3	2483.50	72.7 PK	74.0	-1.3	1.78 H	143	40.51	32.19
4	2483.50	52.9 AV	54.0	-1.1	1.78 H	143	20.71	32.19
5	4924.00	52.7 PK	74.0	-21.3	1.29 H	326	11.22	41.48
6	4924.00	38.8 AV	54.0	-15.2	1.29 H	326	-2.68	41.48
7	7386.00	53.0 PK	74.0	-21.0	1.19 H	255	7.09	45.91
8	7386.00	45.0 AV	54.0	-9.0	1.19 H	255	-0.91	45.91



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.1 PK			1.10 V	115	69.98	32.12
2	*2462.00	87.5 AV			1.10 V	115	55.38	32.12
3	2483.50	70.1 PK	74.0	-3.9	1.00 V	264	37.92	32.19
4	2483.50	52.4 AV	54.0	-1.6	1.00 V	264	20.21	32.19
5	4924.00	51.9 PK	74.0	-22.1	1.29 V	282	10.42	41.48
6	4924.00	37.9 AV	54.0	-16.1	1.29 V	282	-3.58	41.48
7	7386.00	53.1 PK	74.0	-20.9	1.20 V	221	7.19	45.91
8	7386.00	43.3 AV	54.0	-10.7	1.20 V	221	-2.61	45.91

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH1, HORIZONTAL)

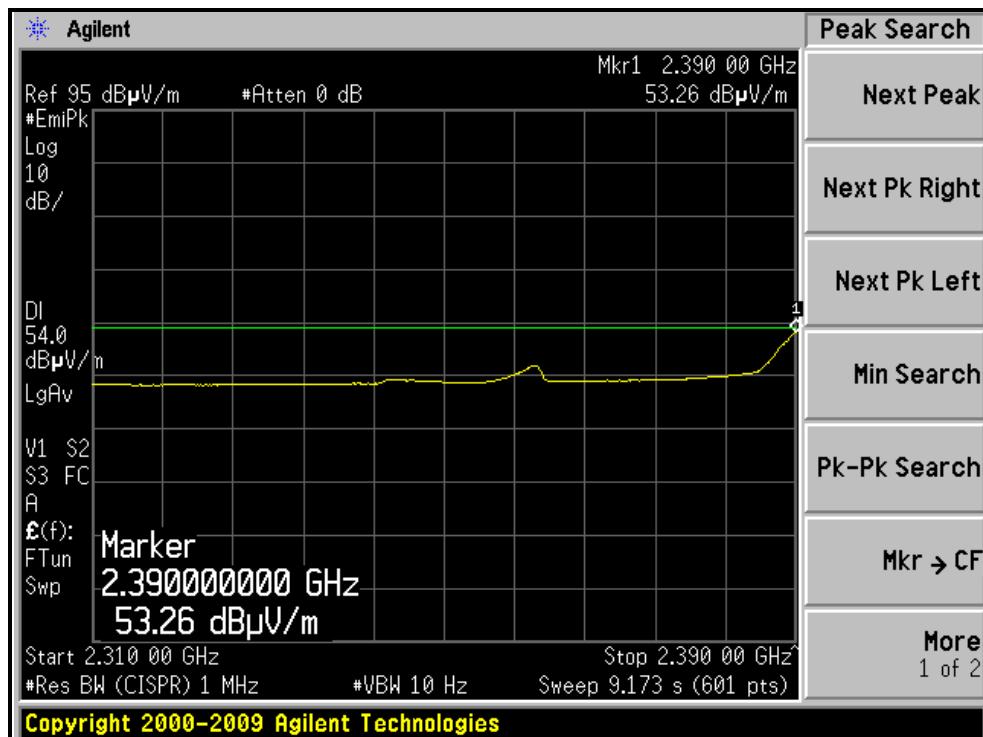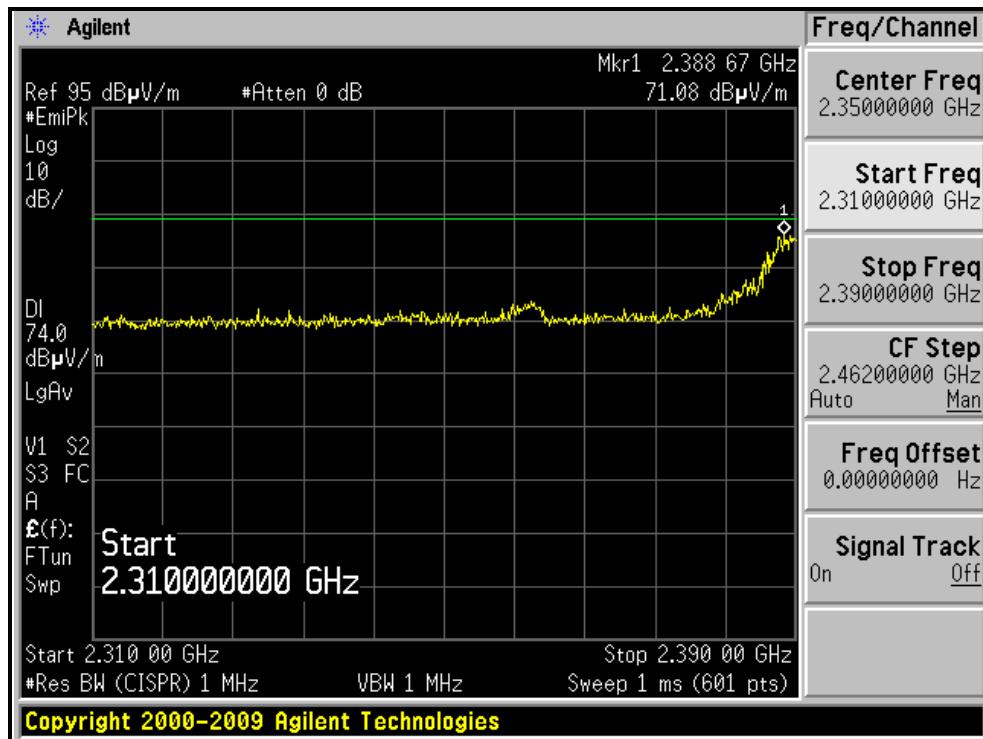



A D T



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH1, VERTICAL)

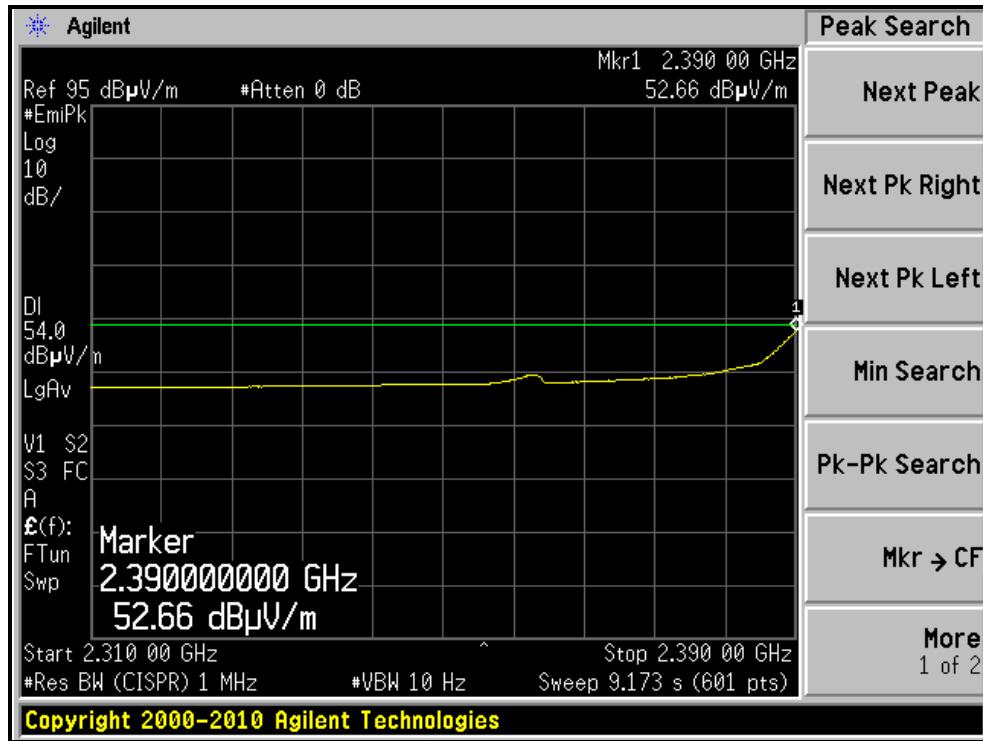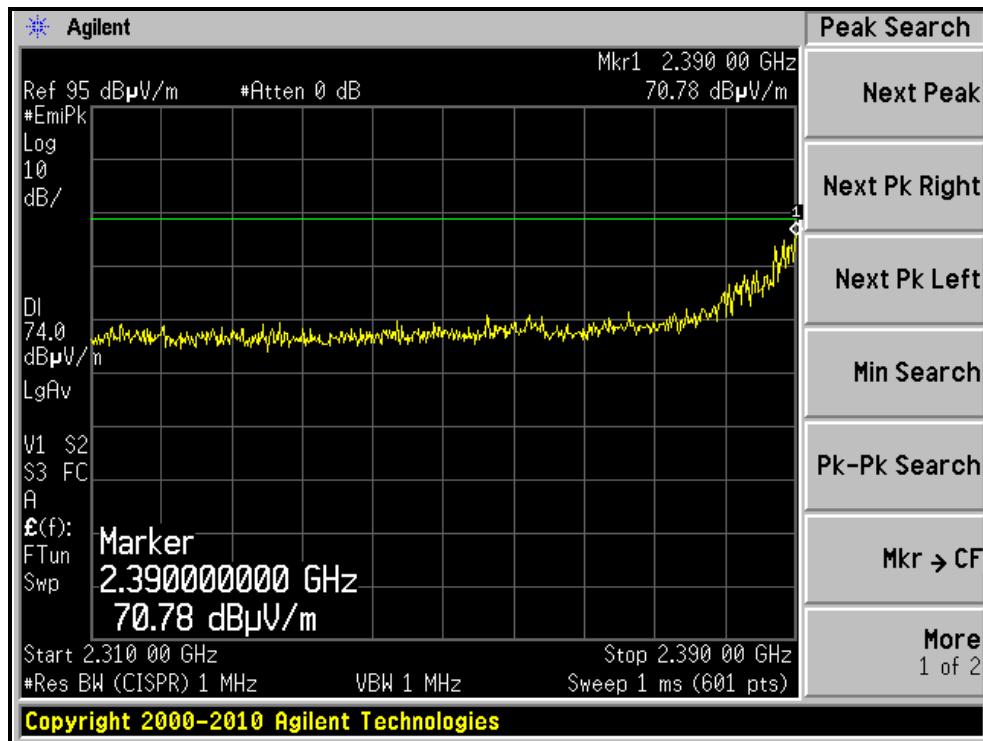



A D T



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH11, HORIZONTAL)

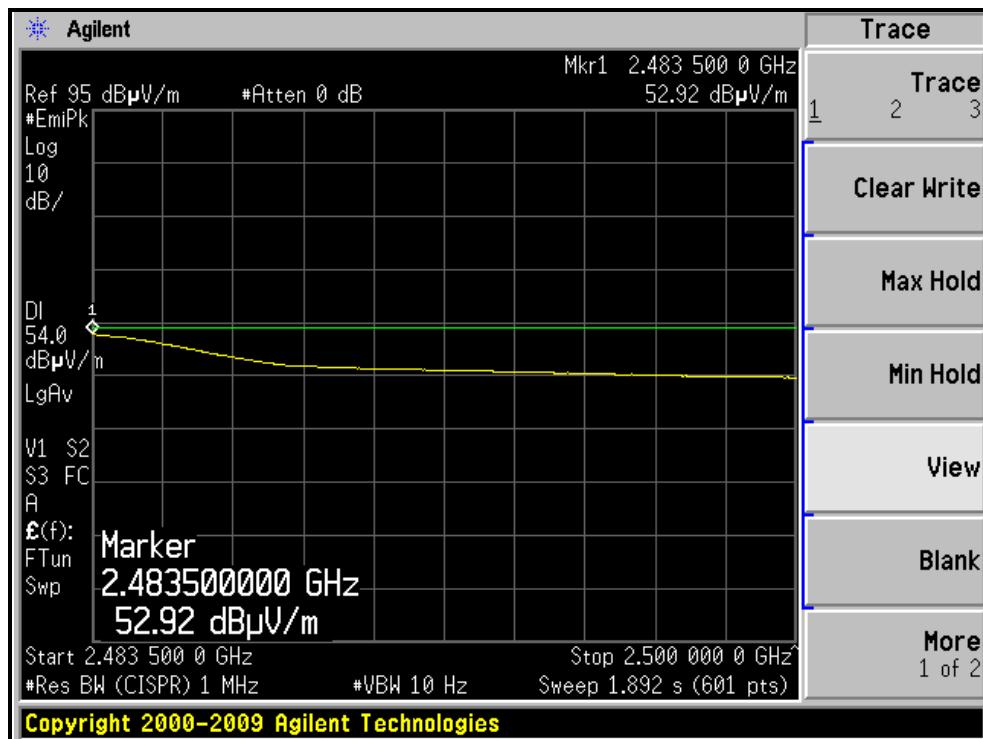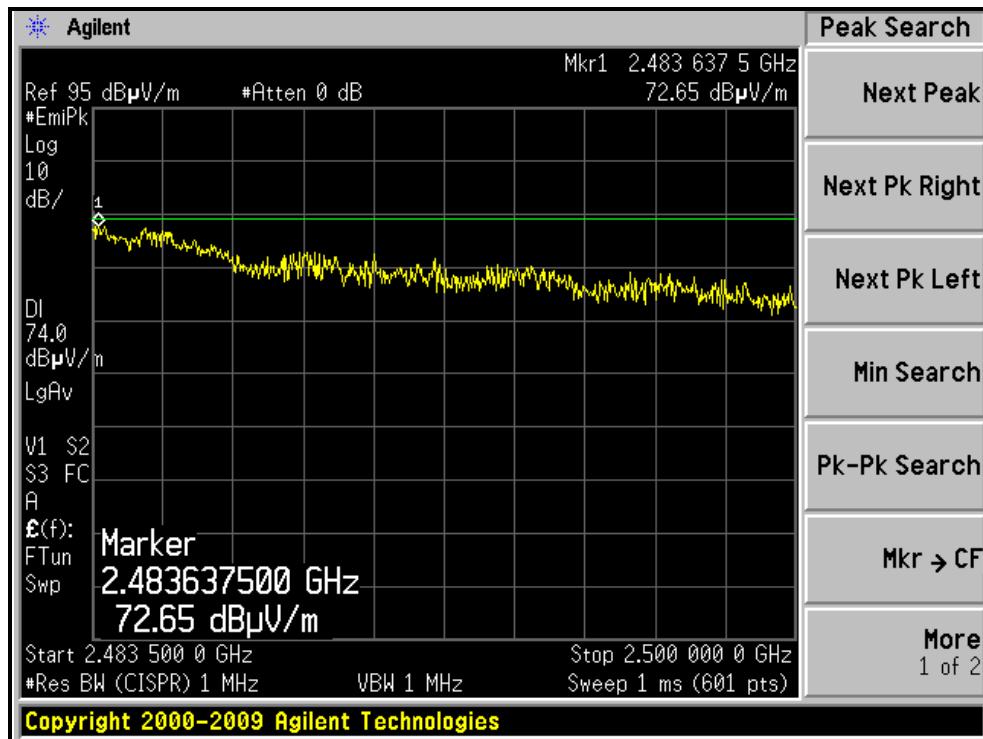



A D T

RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH11, VERTICAL)

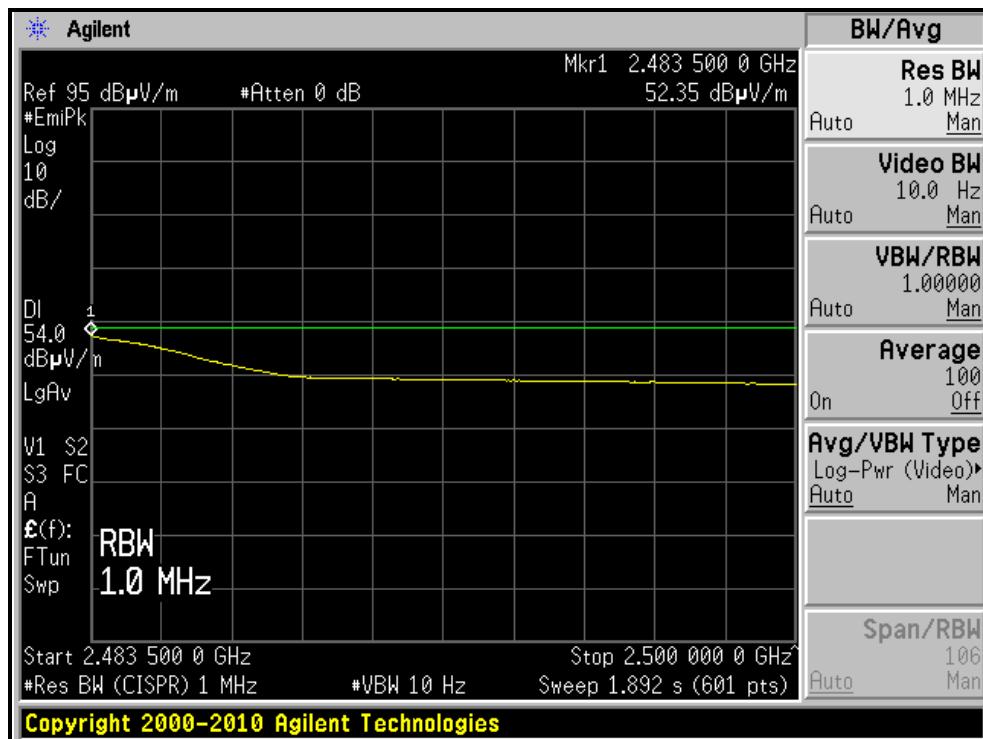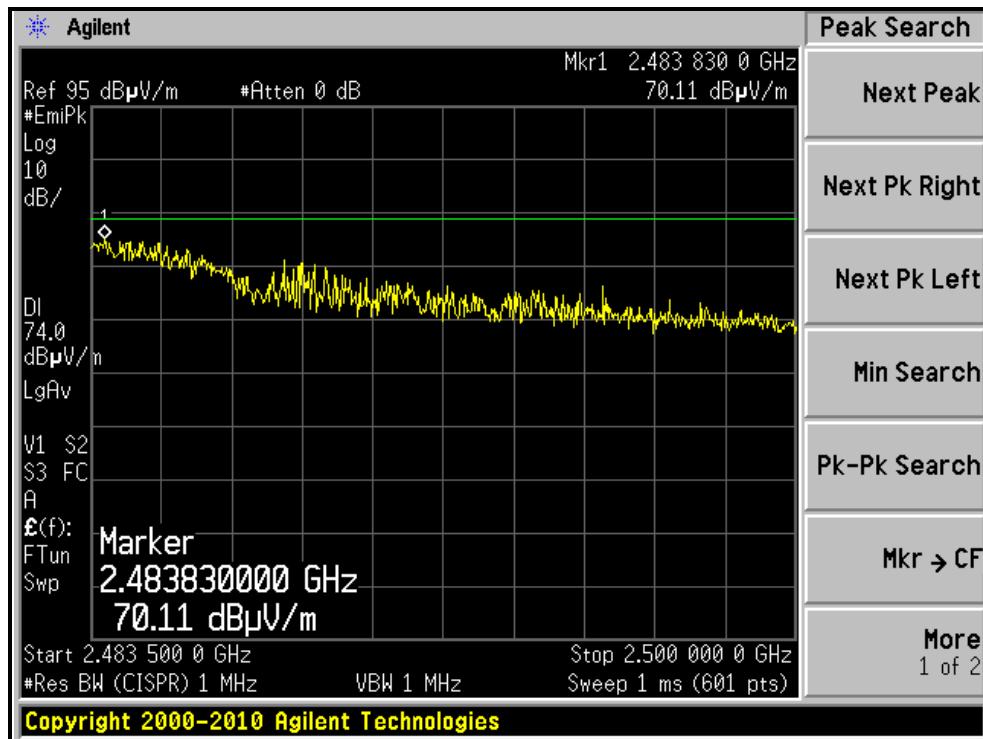



A D T

802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 3		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		26deg. C, 69%RH		TESTED BY Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.7 PK	74.0	-3.3	1.89 H	142	38.82	31.88
2	2390.00	52.9 AV	54.0	-1.1	1.89 H	142	21.02	31.88
3	*2422.00	100.4 PK			1.89 H	142	68.42	31.98
4	*2422.00	84.7 AV			1.89 H	142	52.72	31.98
5	4844.00	51.0 PK	74.0	-23.0	1.25 H	328	9.72	41.28
6	4844.00	37.1 AV	54.0	-16.9	1.25 H	328	-4.18	41.28
7	7266.00	53.0 PK	74.0	-21.0	1.14 H	245	7.45	45.55
8	7266.00	44.8 AV	54.0	-9.2	1.14 H	245	-0.75	45.55

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	2.00 V	6	36.22	31.88
2	2390.00	50.4 AV	54.0	-3.6	2.00 V	6	18.52	31.88
3	*2422.00	97.8 PK			1.09 V	124	65.82	31.98
4	*2422.00	82.9 AV			1.09 V	124	50.92	31.98
5	4844.00	50.4 PK	74.0	-23.6	1.28 V	271	9.12	41.28
6	4844.00	37.6 AV	54.0	-16.4	1.28 V	271	-3.68	41.28
7	7266.00	52.9 PK	74.0	-21.1	1.20 V	195	7.35	45.55
8	7266.00	42.9 AV	54.0	-11.1	1.20 V	195	-2.65	45.55

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).

2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

3. The other emission levels were very low against the limit.

4. Margin value = Emission level – Limit value.

5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 6		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		26deg. C, 69%RH		TESTED BY Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.6 PK	74.0	-8.4	1.56 H	138	33.72	31.88
2	2390.00	49.8 AV	54.0	-4.2	1.56 H	138	17.92	31.88
3	*2437.00	103.5 PK			1.82 H	145	71.46	32.04
4	*2437.00	87.7 AV			1.82 H	145	55.66	32.04
5	2483.50	73.1 PK	74.0	-0.9	1.77 H	142	40.91	32.19
6	2483.50	53.4 AV	54.0	-0.6	1.77 H	142	21.21	32.19
7	4874.00	51.4 PK	74.0	-22.6	1.27 H	324	10.04	41.36
8	4874.00	37.5 AV	54.0	-16.5	1.27 H	324	-3.86	41.36
9	7311.00	52.9 PK	74.0	-21.1	1.18 H	248	7.23	45.67
10	7311.00	44.4 AV	54.0	-9.6	1.18 H	248	-1.27	45.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.5 PK			1.00 V	154	68.46	32.04
2	*2437.00	85.7 AV			1.00 V	154	53.66	32.04
3	4874.00	50.7 PK	74.0	-23.3	1.27 V	272	9.34	41.36
4	4874.00	37.8 AV	54.0	-16.2	1.27 V	272	-3.56	41.36
5	7311.00	53.1 PK	74.0	-20.9	1.17 V	198	7.43	45.67
6	7311.00	43.1 AV	54.0	-10.9	1.17 V	198	-2.57	45.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 9		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		26deg. C, 69%RH		TESTED BY Rex Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	99.3 PK			1.79 H	141	67.21	32.09
2	*2452.00	84.0 AV			1.79 H	141	51.91	32.09
3	2483.50	73.2 PK	74.0	-0.8	1.79 H	142	41.01	32.19
4	2483.50	52.3 AV	54.0	-1.7	1.79 H	142	20.11	32.19
5	4904.00	50.9 PK	74.0	-23.1	1.21 H	337	9.46	41.44
6	4904.00	37.3 AV	54.0	-16.7	1.21 H	337	-4.14	41.44
7	7356.00	52.4 PK	74.0	-21.6	1.21 H	250	6.59	45.81
8	7356.00	44.0 AV	54.0	-10.0	1.21 H	250	-1.81	45.81


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	97.2 PK			1.42 V	192	65.11	32.09
2	*2452.00	82.2 AV			1.42 V	192	50.11	32.09
3	2483.50	71.9 PK	74.0	-2.1	1.40 V	192	39.71	32.19
4	2483.50	51.0 AV	54.0	-3.0	1.40 V	192	18.81	32.19
5	4904.00	51.1 PK	74.0	-22.9	1.25 V	263	9.66	41.44
6	4904.00	38.2 AV	54.0	-15.8	1.25 V	263	-3.24	41.44
7	7356.00	62.8 PK	74.0	-11.2	1.12 V	194	16.99	45.81
8	7356.00	42.6 AV	54.0	-11.4	1.12 V	194	-3.21	45.81

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH3, HORIZONTAL)

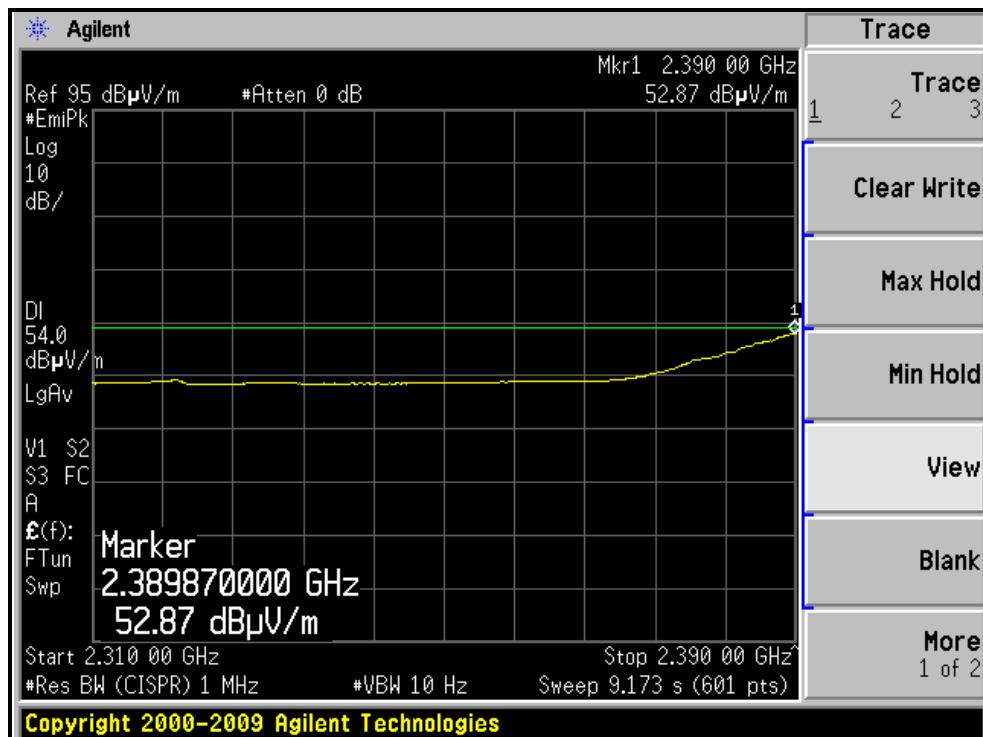



A D T


RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH3, VERTICAL)

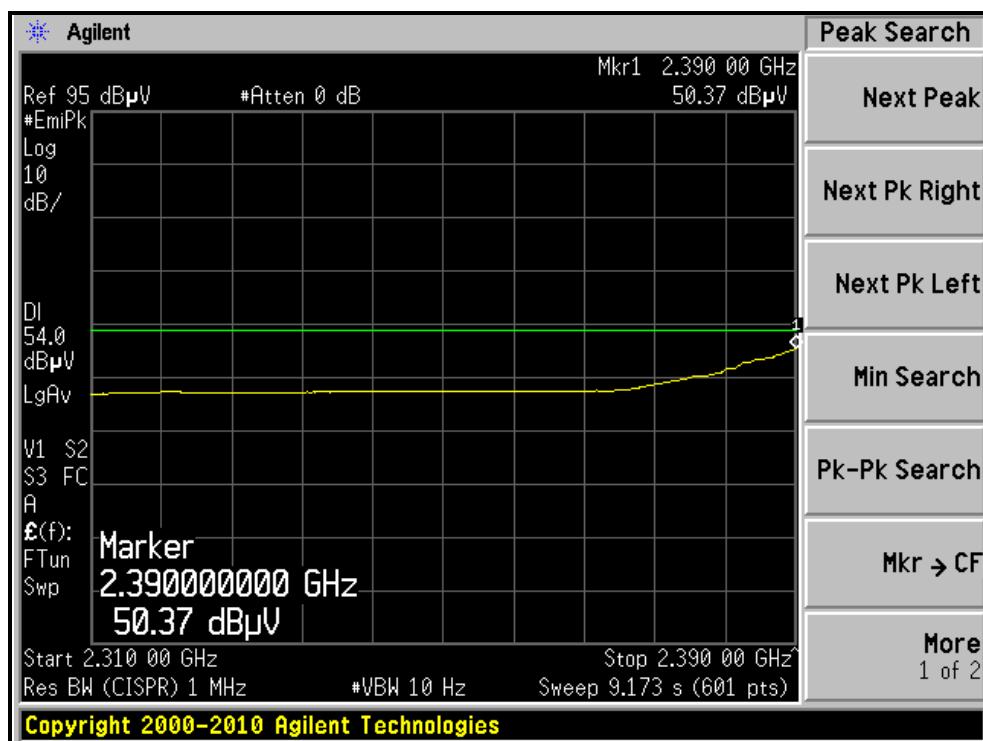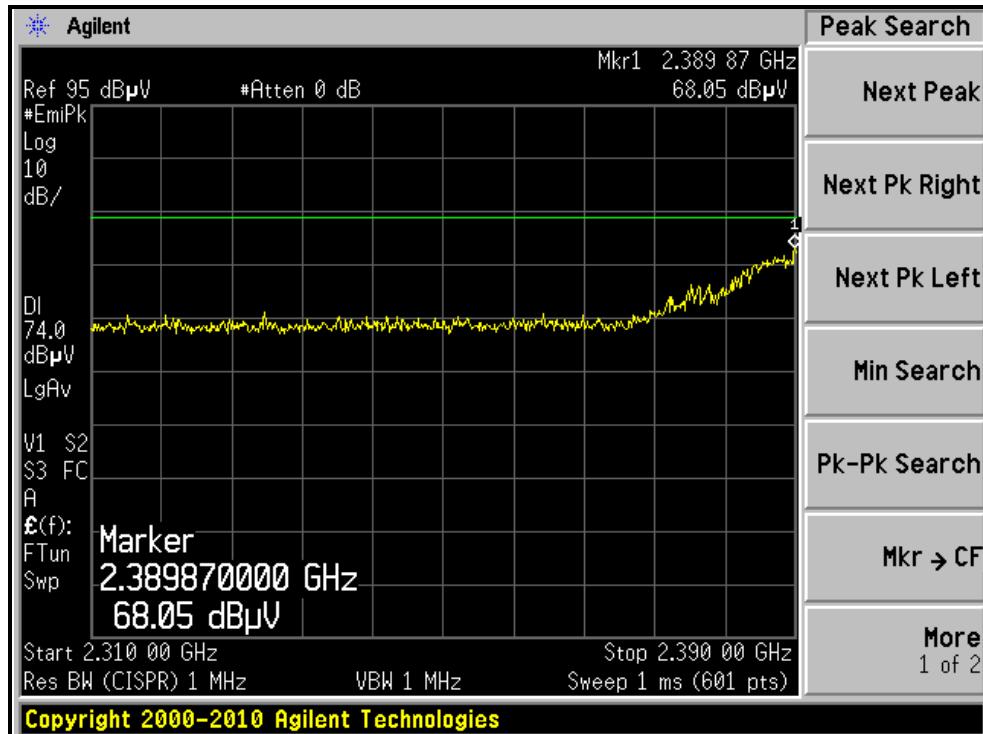



A D T



RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH9, HORIZONTAL)

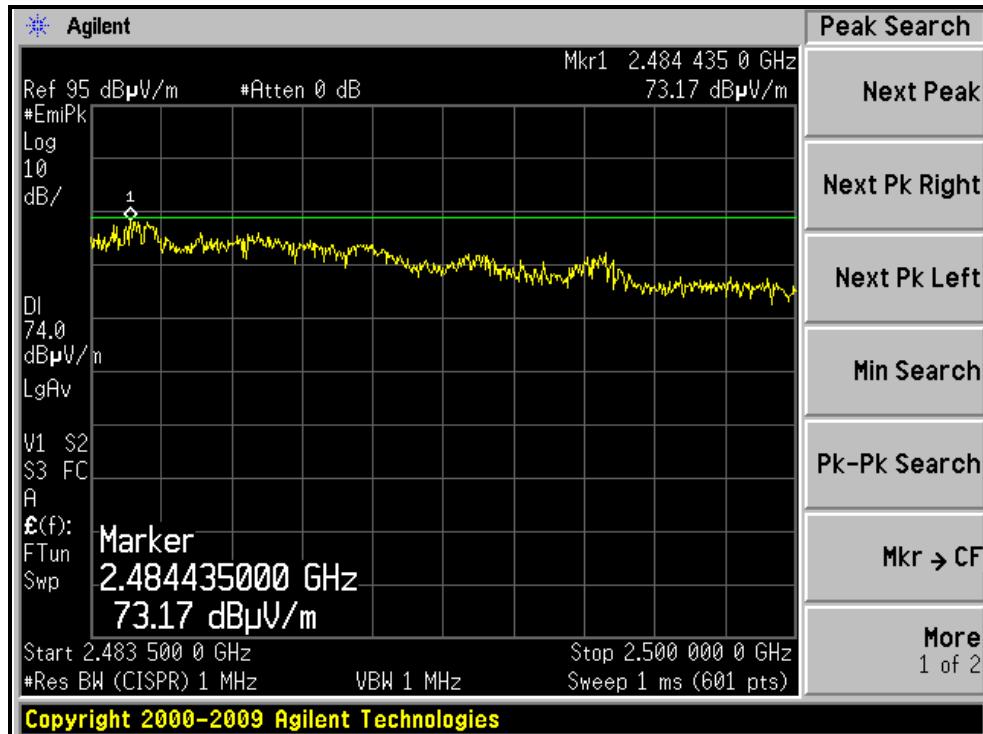



A D T

RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH9, VERTICAL)

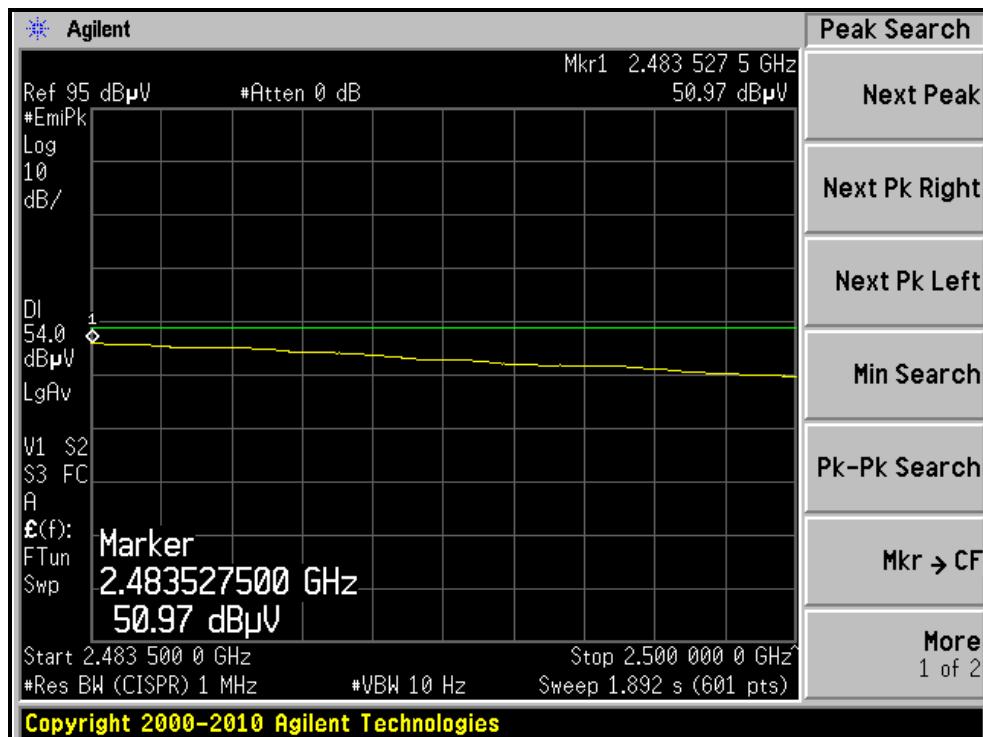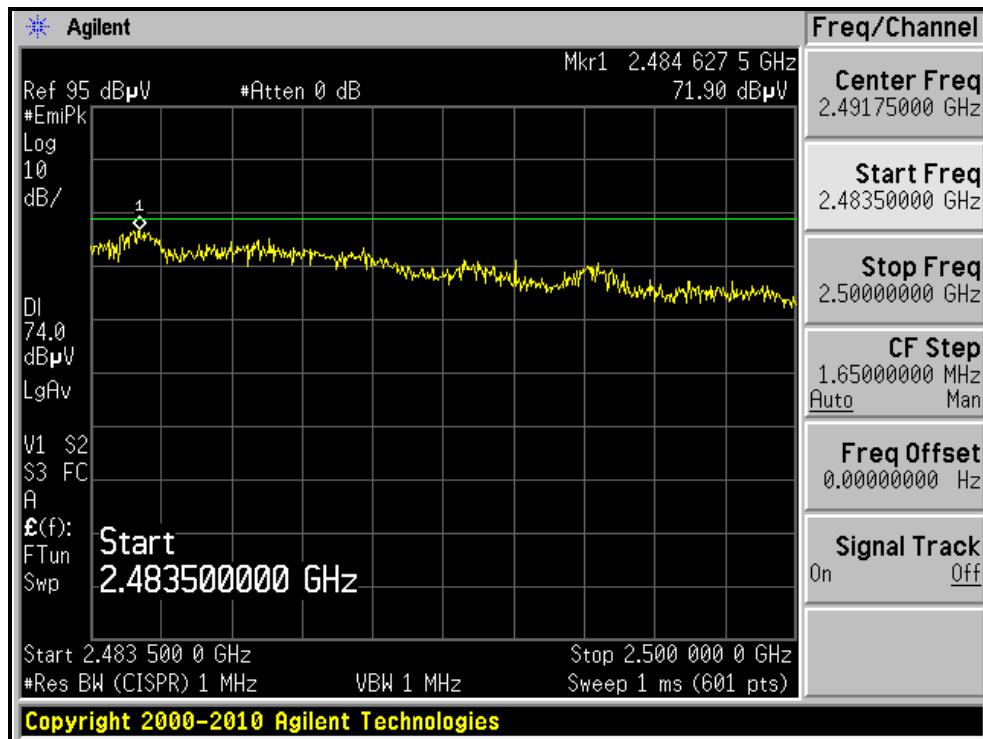



A D T

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Test date: Sep. 16, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

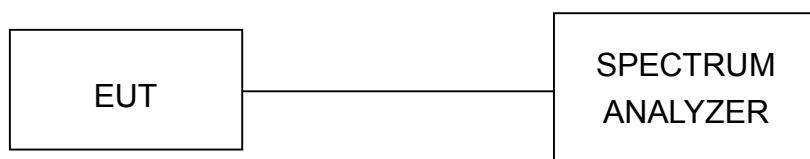

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




A D T

4.3.7 TEST RESULTS

802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	10.16	0.5	PASS
6	2437	11.43	0.5	PASS
11	2462	10.63	0.5	PASS

CH6

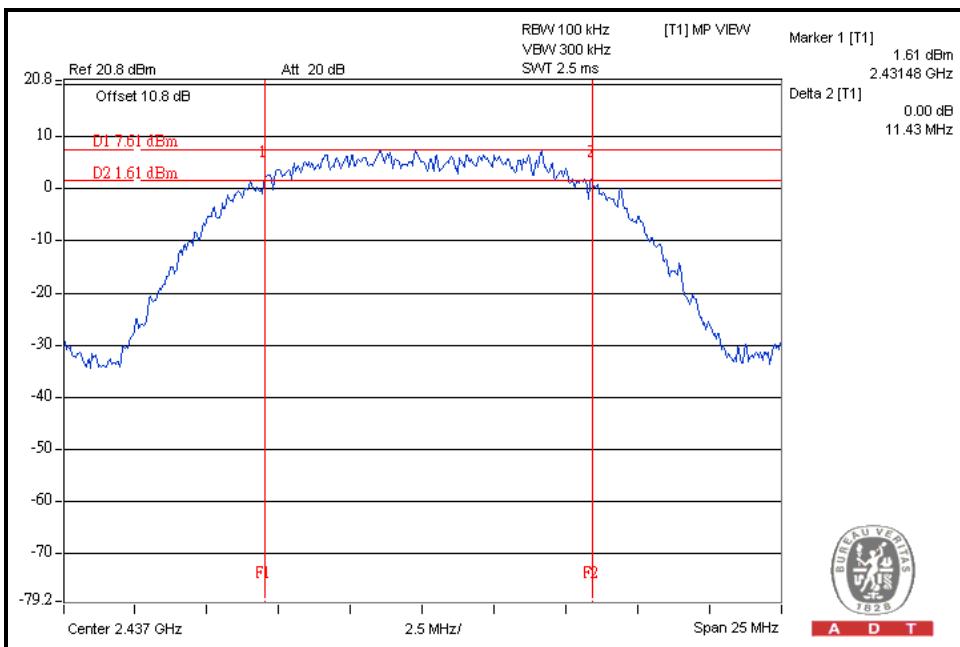




A D T

802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.33	0.5	PASS
6	2437	16.39	0.5	PASS
11	2462	16.41	0.5	PASS

CH11

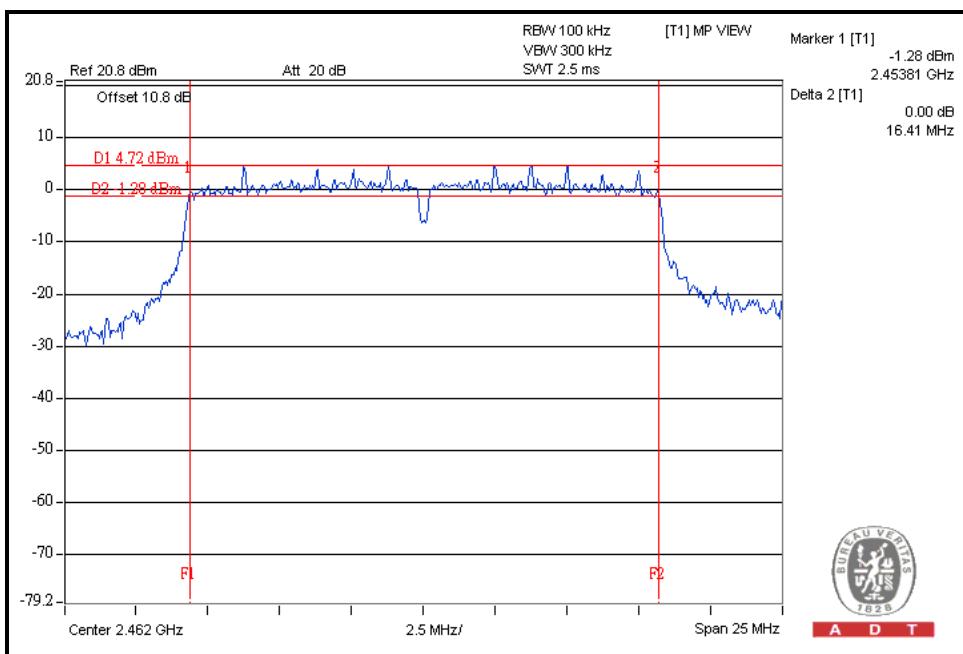




A D T

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.42	0.5	PASS
6	2437	17.07	0.5	PASS
11	2462	16.96	0.5	PASS

CH6

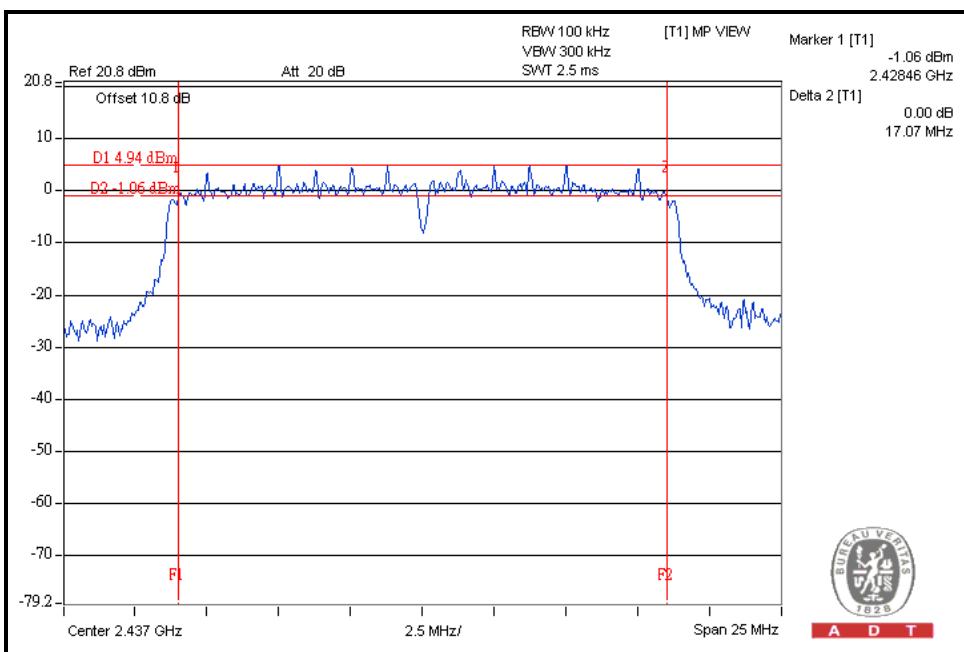




A D T

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	35.28	0.5	PASS
6	2437	35.27	0.5	PASS
9	2452	35.31	0.5	PASS

CH9

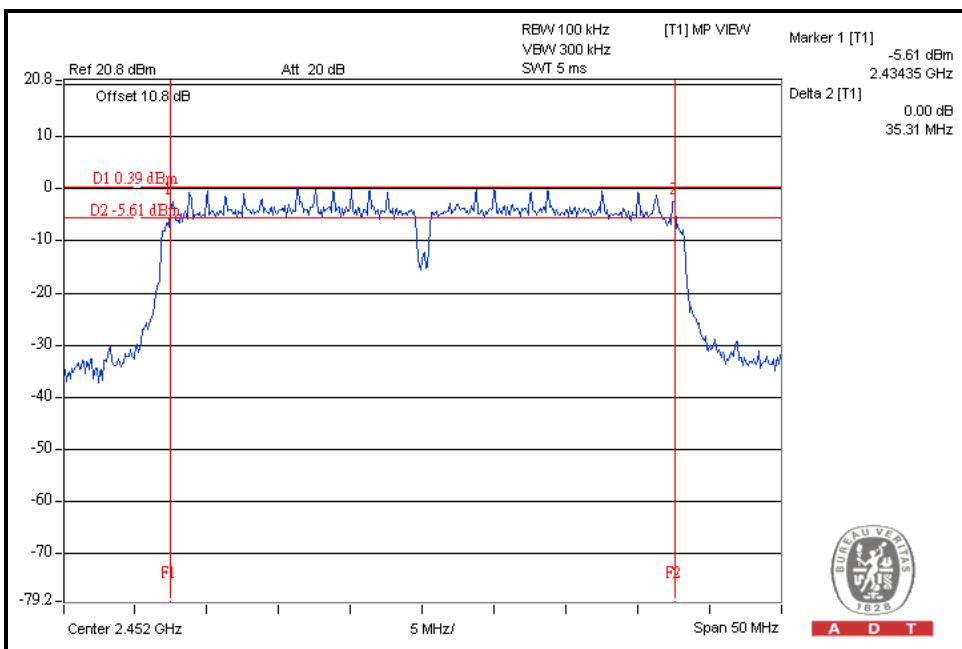



A D T

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Test date: Sep. 16, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Anritsu Power Meter	ML2495A	0824006	May 04, 2011	May 03, 2012
Pulse Power Sensor	MA2411B	0738172	May 03, 2011	May 02, 2012

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator; the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

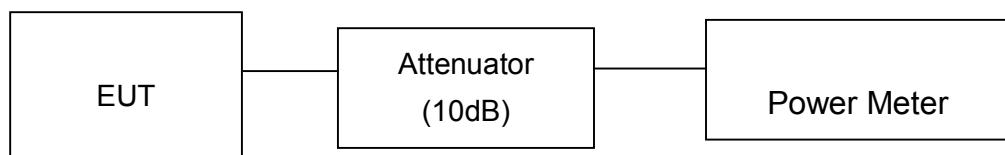



A D T

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	102.3	20.1	30	PASS
6	2437	97.7	19.9	30	PASS
11	2462	97.7	19.9	30	PASS

802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	354.8	25.5	30	PASS
6	2437	331.1	25.2	30	PASS
11	2462	302.0	24.8	30	PASS

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	331.1	25.2	30	PASS
6	2437	302.0	24.8	30	PASS
11	2462	338.8	25.3	30	PASS



A D T

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	223.9	23.5	30	PASS
6	2437	234.4	23.7	30	PASS
11	2462	239.9	23.8	30	PASS



A D T

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Test date: Sep. 16, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

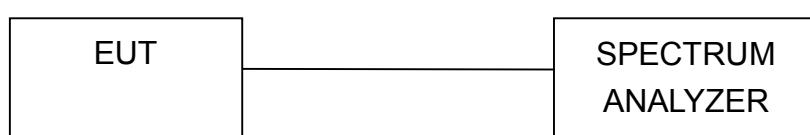



A D T

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6




A D T

4.5.7 TEST RESULTS

802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-5.2	8	PASS
6	2437	-6.2	8	PASS
11	2462	-8.6	8	PASS

CH1

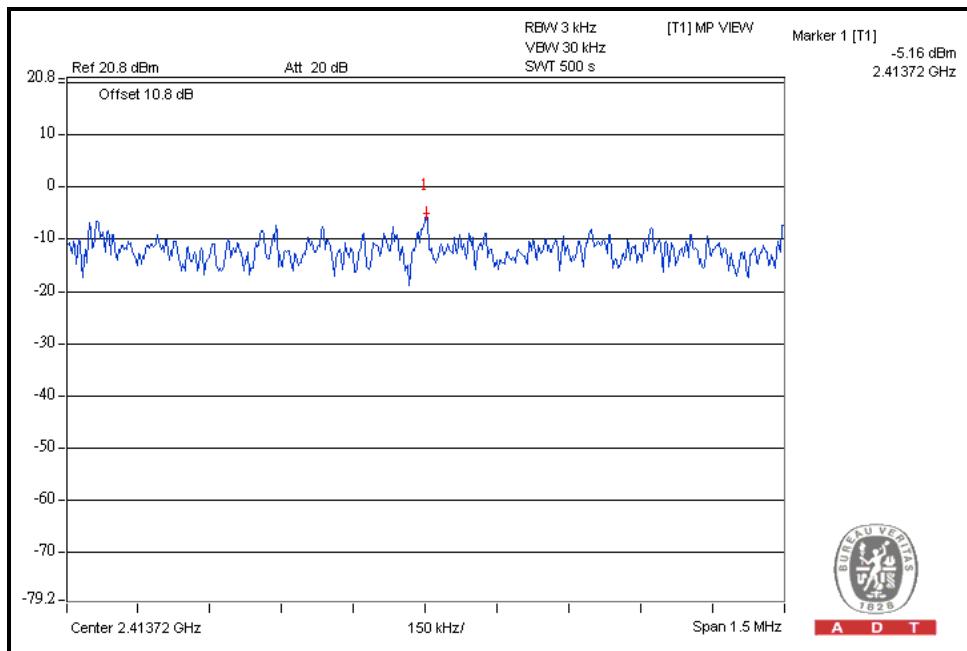




A D T

802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-10.4	8	PASS
6	2437	-9.9	8	PASS
11	2462	-10.1	8	PASS

CH6

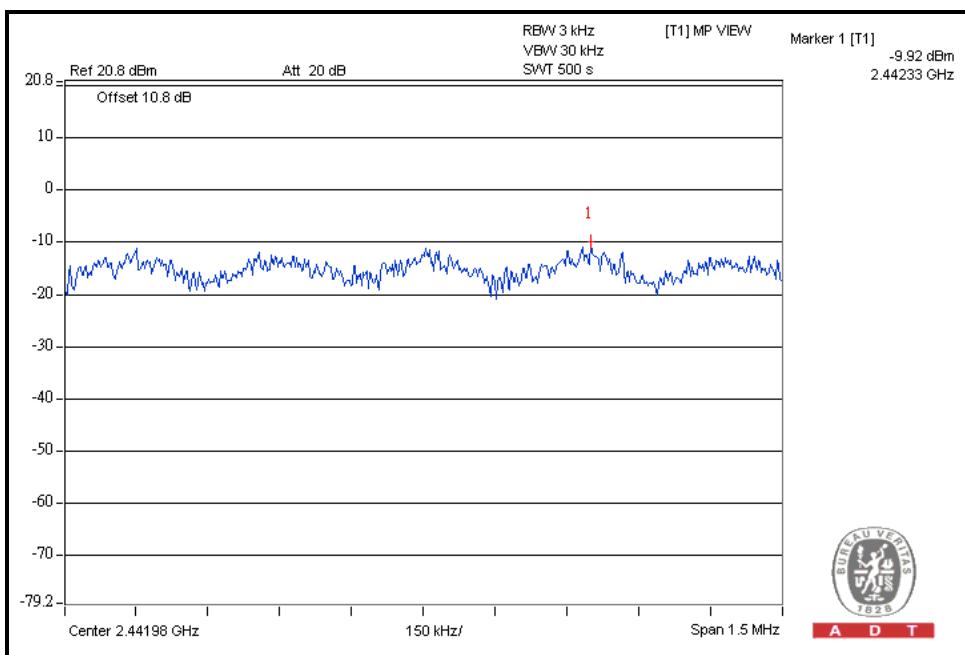




A D T

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-10.6	8	PASS
6	2437	-9.3	8	PASS
11	2462	-11.1	8	PASS

CH6

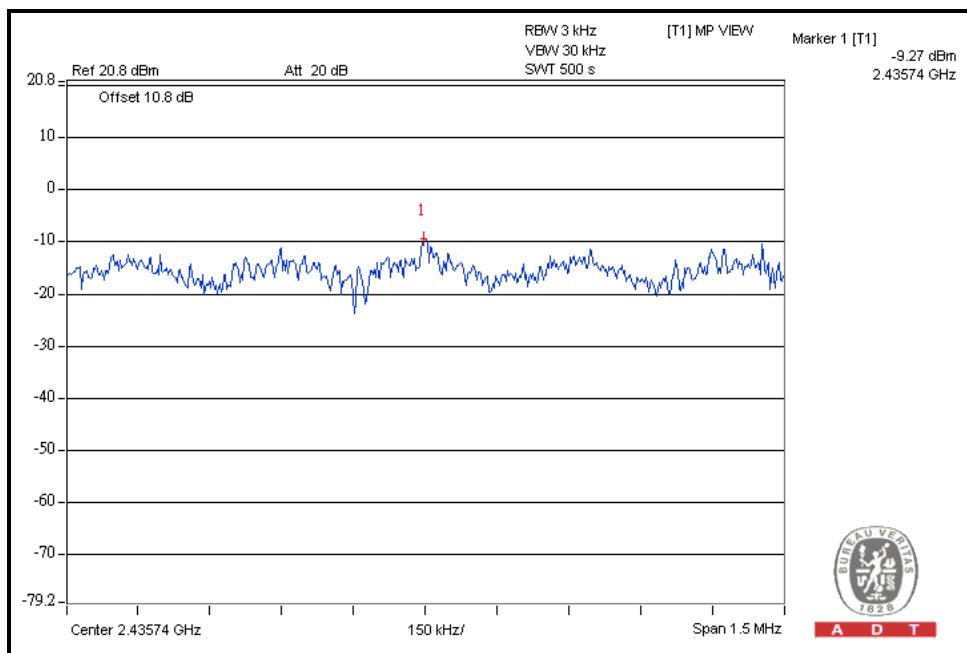




A D T

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
3	2422	-16.2	8	PASS
6	2437	-14.9	8	PASS
9	2452	-15.2	8	PASS

CH6

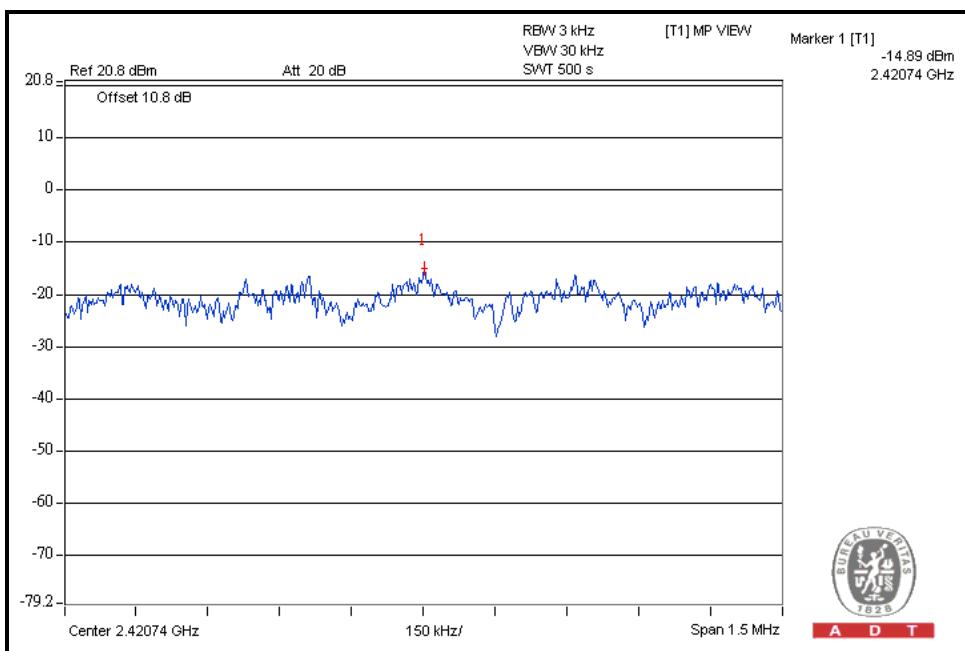



A D T

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Test date: Sep. 16,2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 100kHz and VBW of spectrum analyzer to 300kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges were measured and recorded.

The spectrum plots (RBW = 100kHz, VBW = 300kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the



A D T



highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).



A D T

802.11b DSSS MODULATION:



CH1

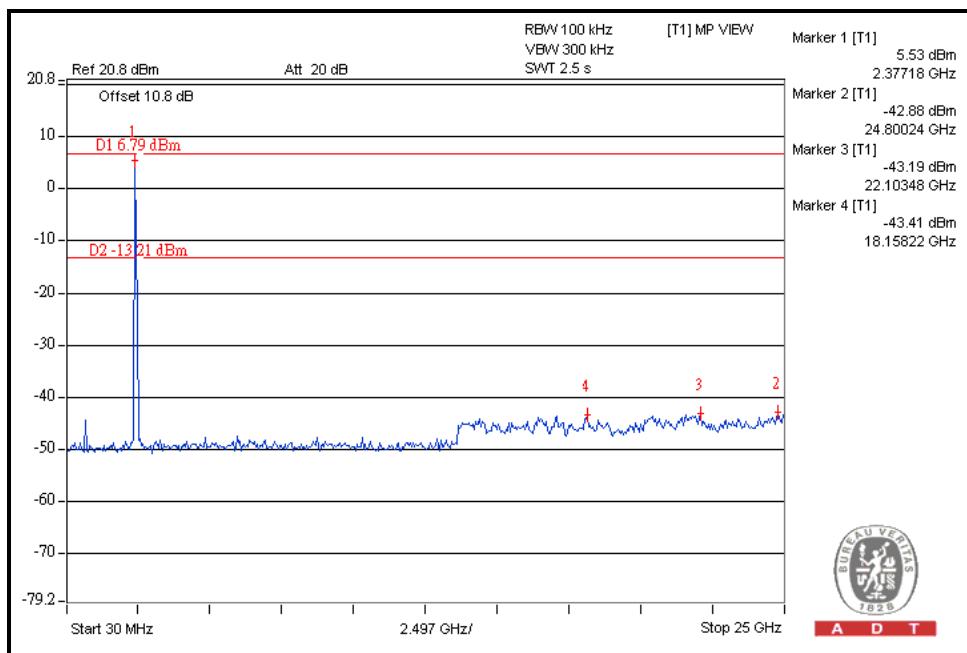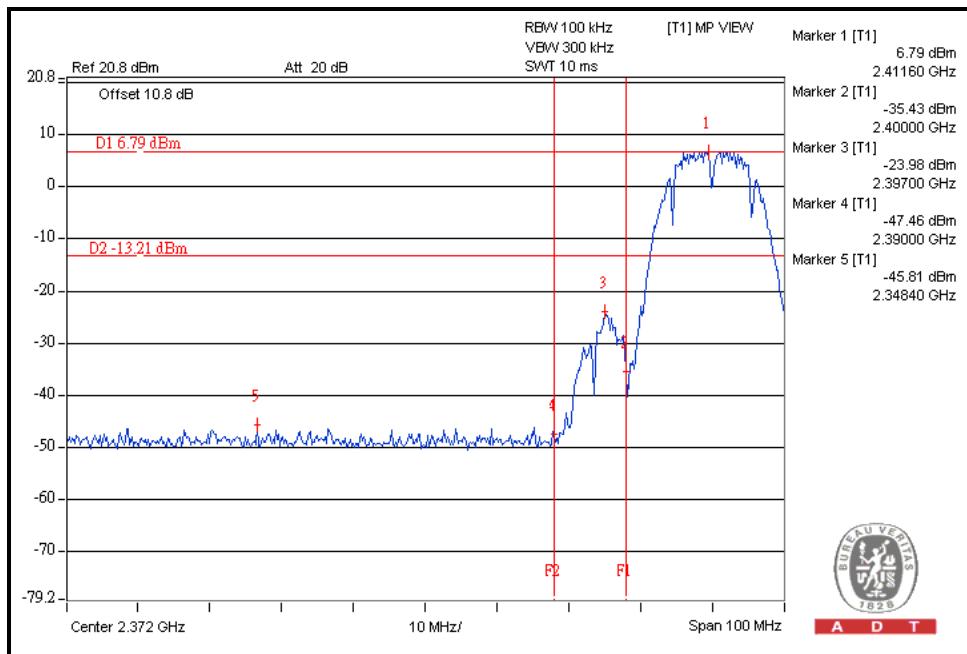



A D T

CH11

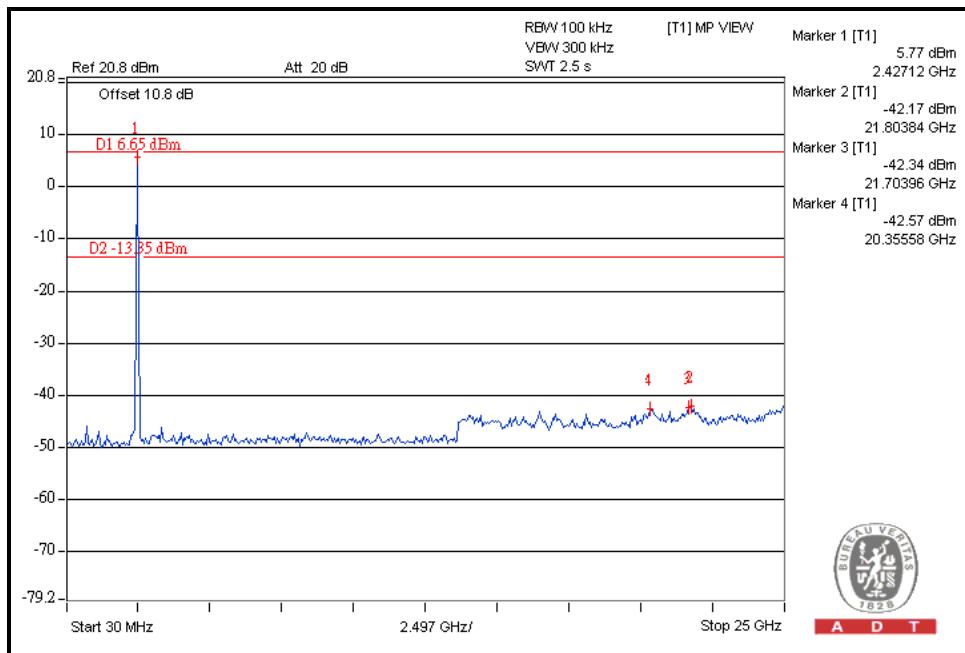
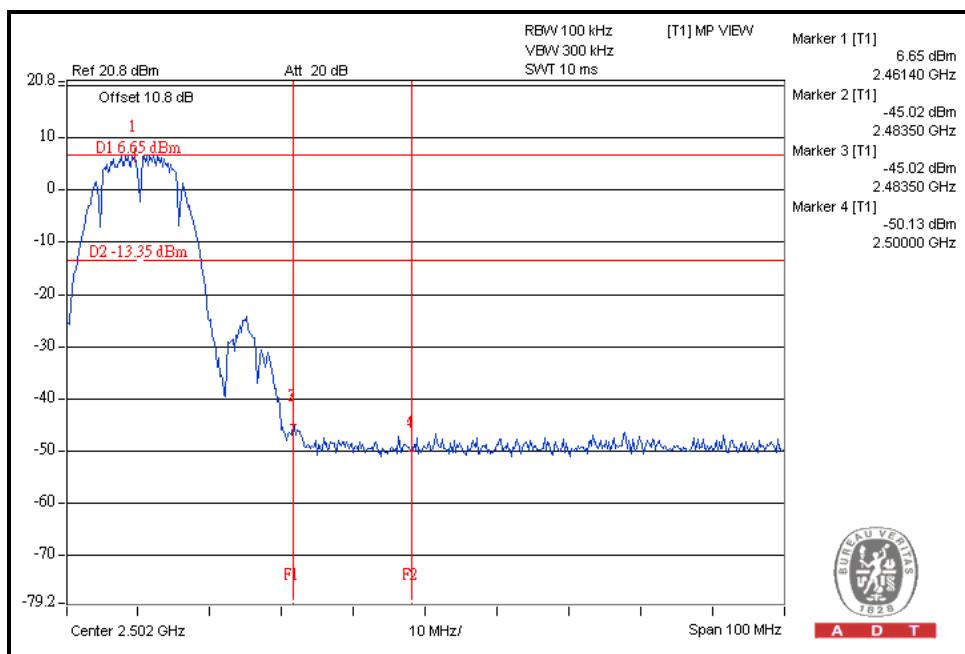




A D T

802.11g OFDM MODULATION:



CH1

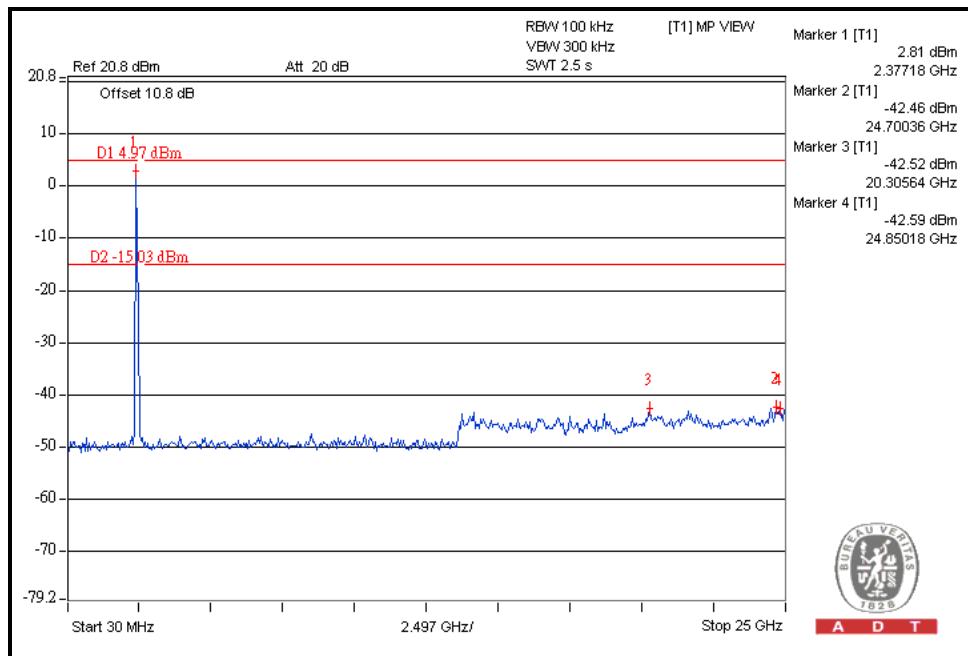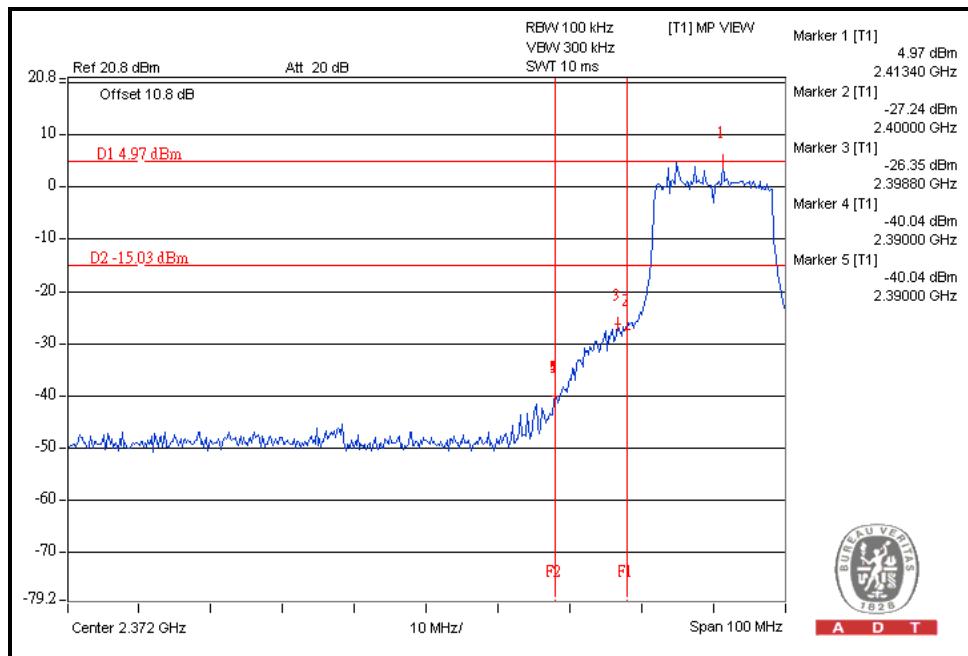



A D T

CH11

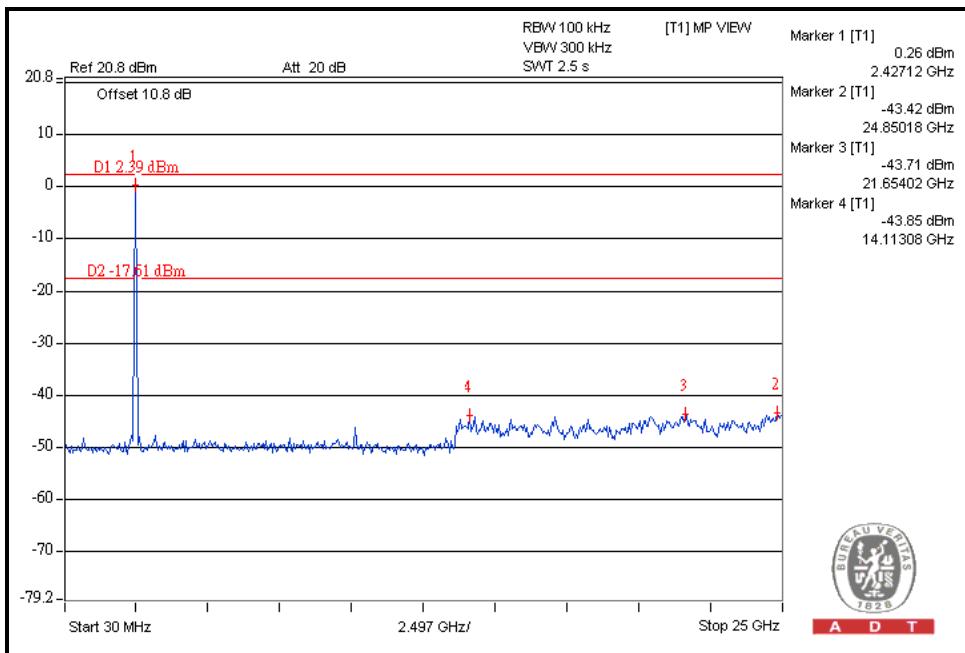
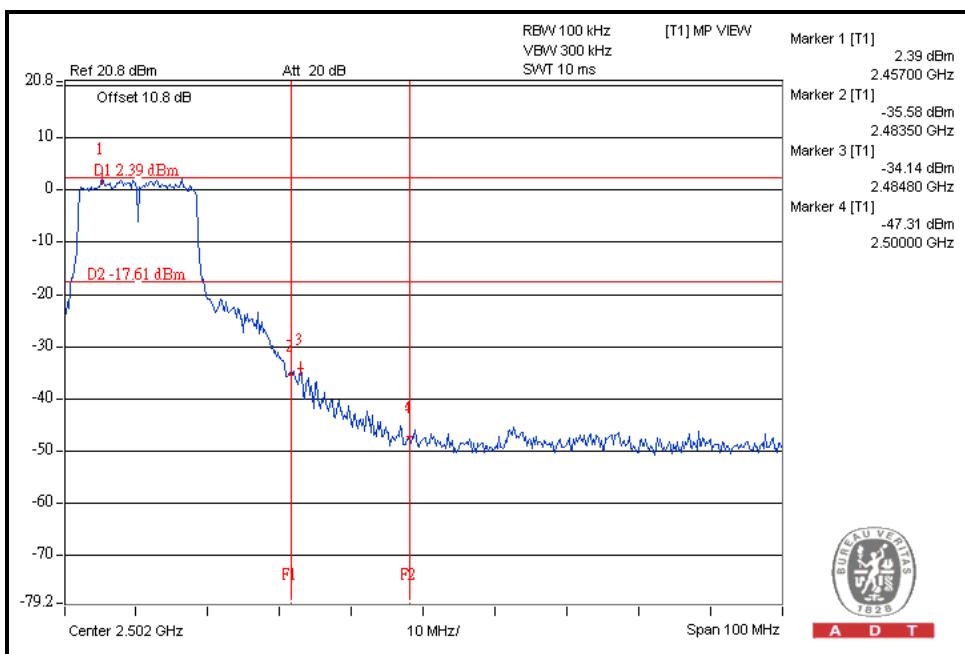




A D T

802.11n (20MHz) OFDM MODULATION:



CH1

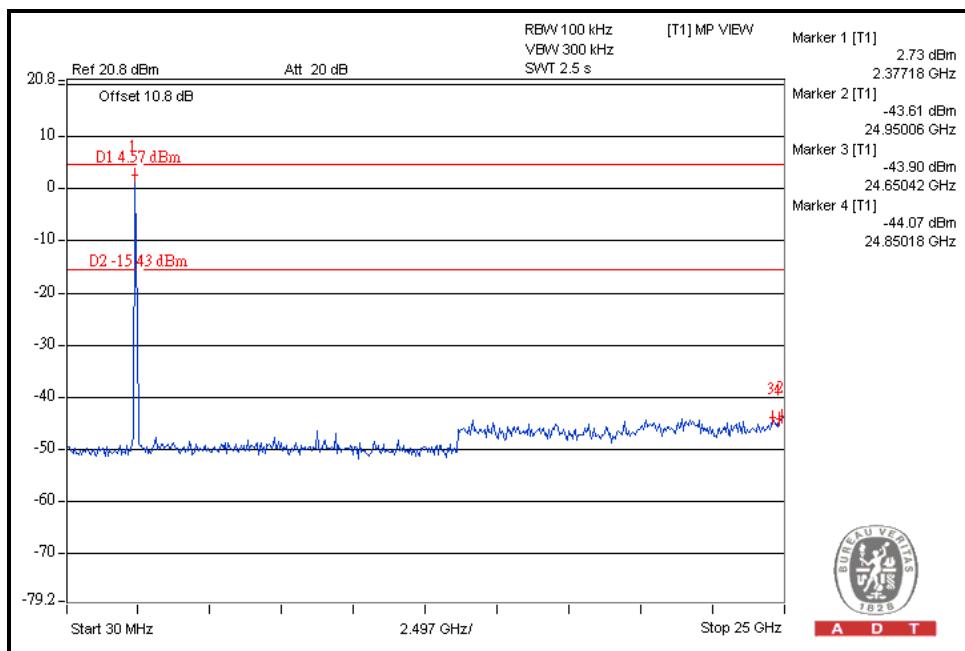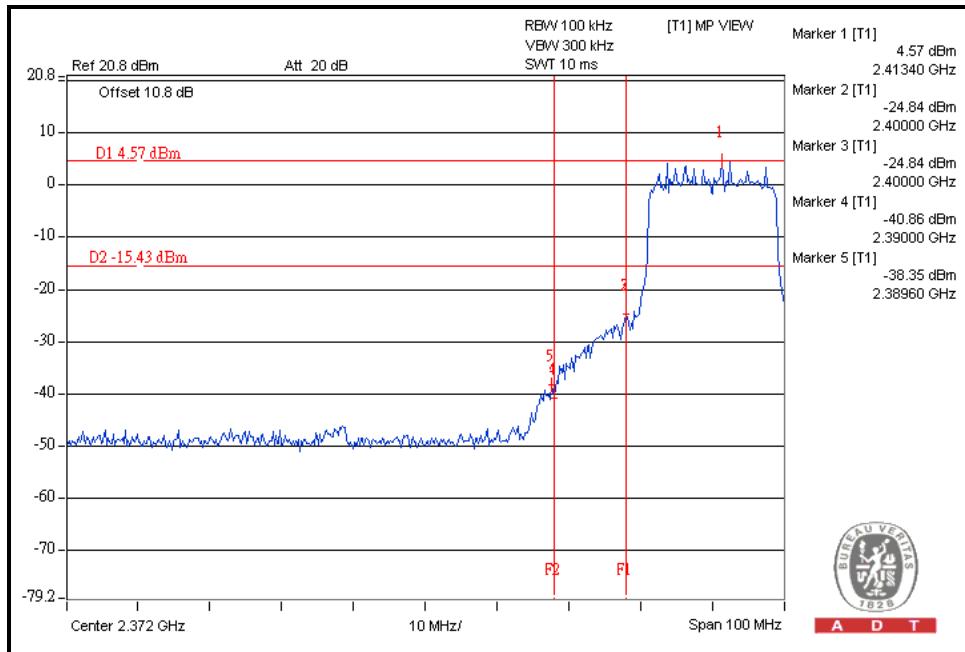



A D T

CH11

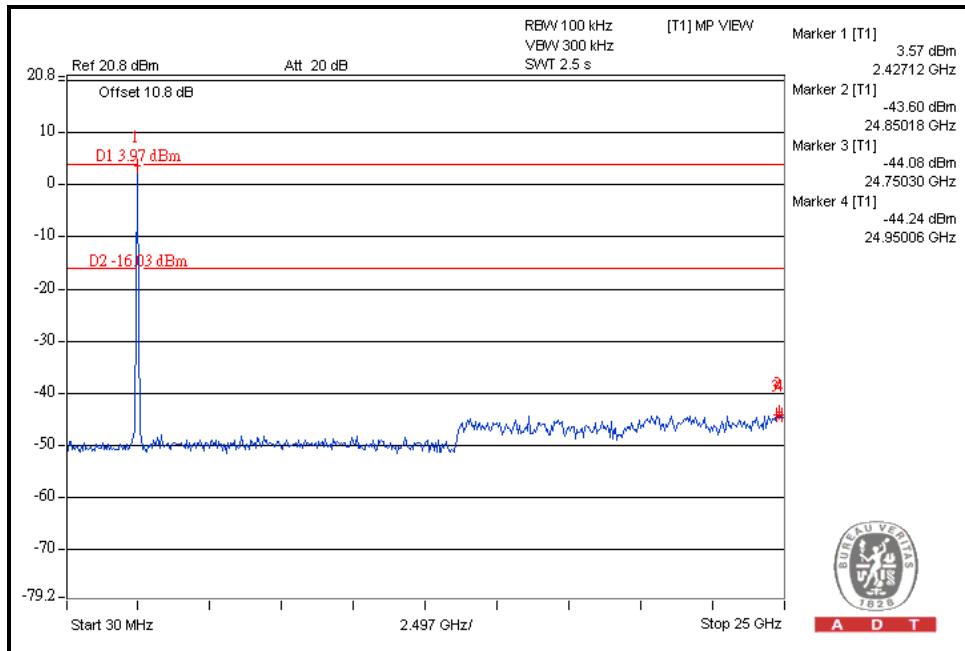
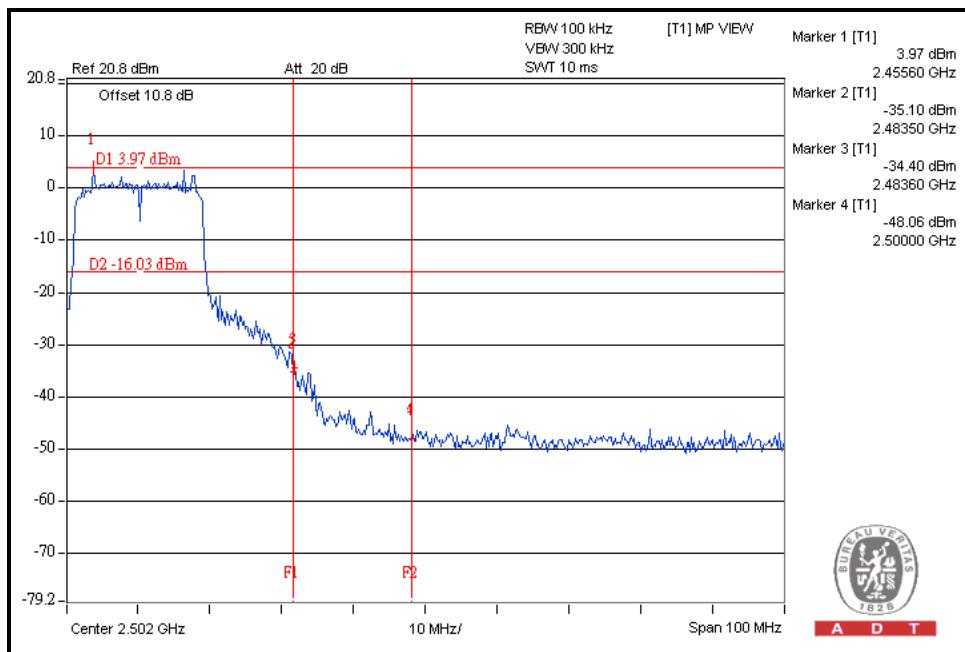




A D T

802.11n (40MHz) OFDM MODULATION:



CH3

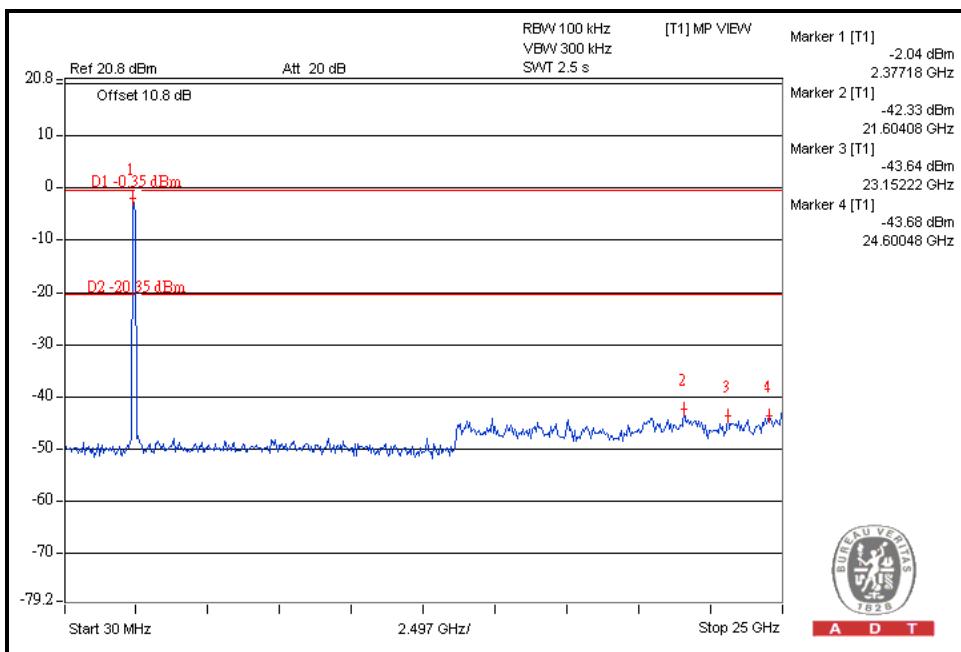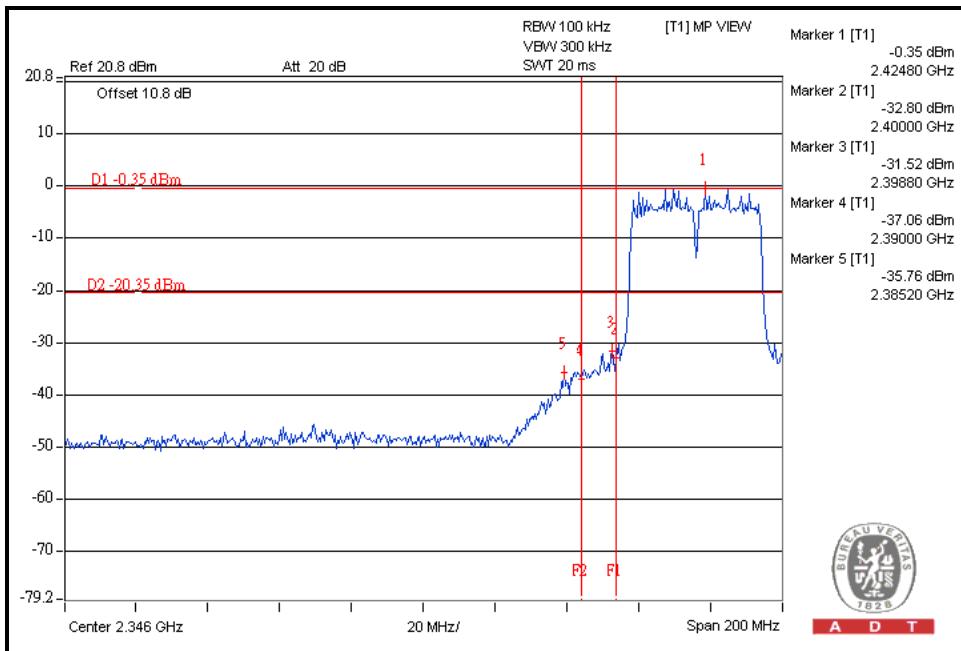



A D T

CH9

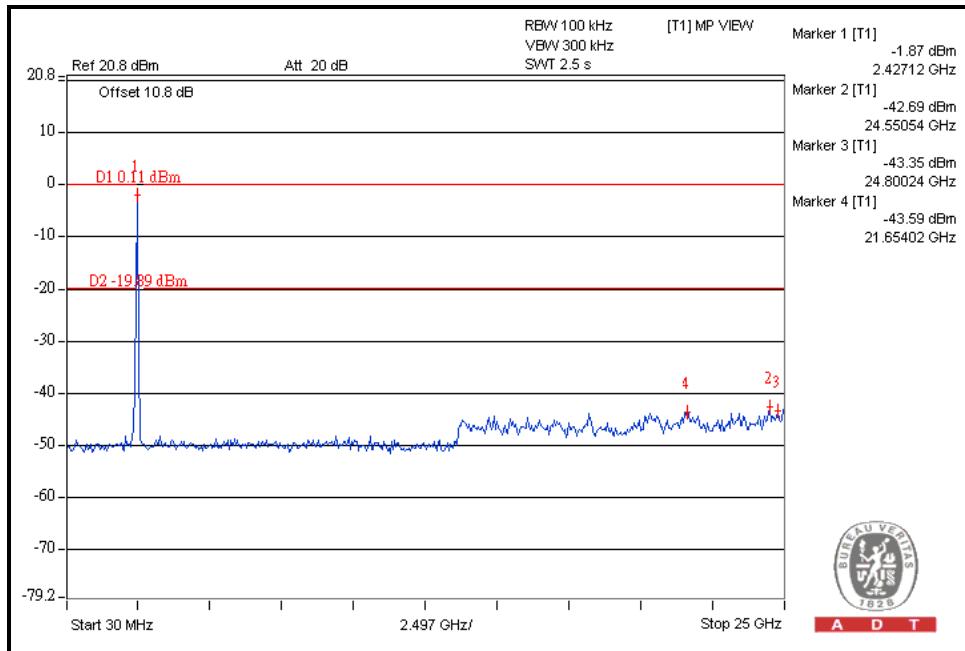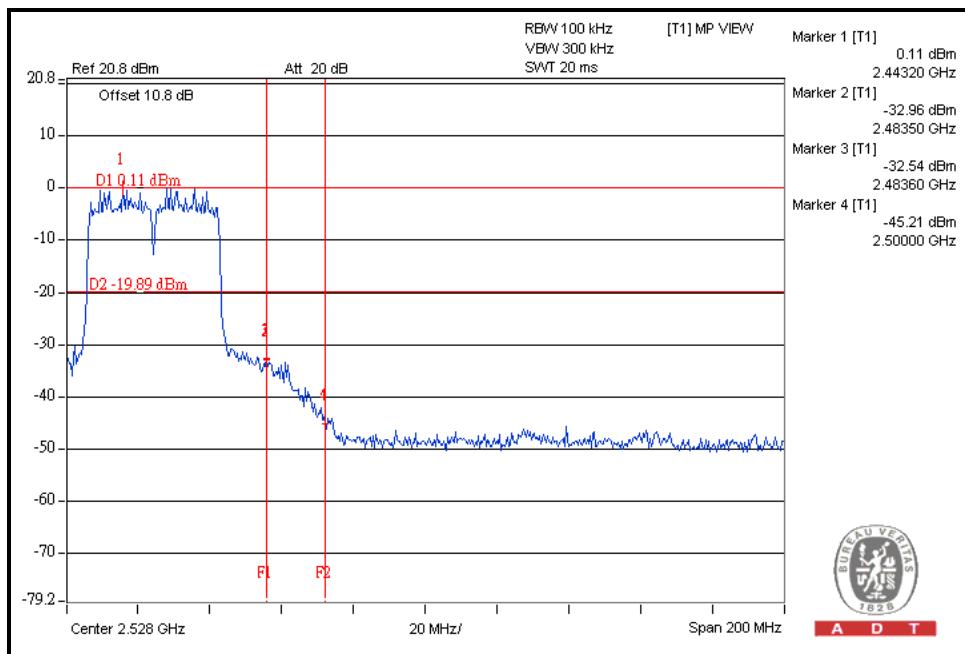



A D T

5. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5.phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3185050

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

6.APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---