

*FCC PART 15, SUBPART B and C
TEST REPORT**for***TIVO SERIES 5 REMOTE CONTROL 2014
MODEL: URC-7020BC0-XXXX-R**

Prepared for

**UNIVERSAL ELECTRONICS, INC.
201 EAST SANDPOINTE AVE., 8TH FLOOR
SANTA ANA, CA 92707**

Prepared by: _____

KENNETH LEE

Approved by: _____

JAMES ROSS**COMPATIBLE ELECTRONICS INC.
114 OLINDA DRIVE
BREA, CALIFORNIA 92823
(714) 579-0500**

DATE: MARCH 30, 2015

	REPORT BODY	APPENDICES					TOTAL
		<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>	<i>E</i>	
PAGES	16	2	2	2	13	28	63

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	5
1. PURPOSE	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
3. APPLICABLE DOCUMENTS	8
4. DESCRIPTION OF TEST CONFIGURATION	9
4.1 Description of Test Configuration - Emissions	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1 EUT and Accessory List	10
6. TEST SITE DESCRIPTION	11
6.1 Test Facility Description	11
6.2 EUT Mounting, Bonding and Grounding	11
7. TEST PROCEDURES	12
7.1 RF Emissions	12
7.1.1 Radiated Emissions (Spurious and Harmonics) Test – Lab B	12
7.1.2 Radiated Emissions (Spurious and Harmonics) Test – Lab D	14
7.1.3 RF Emissions Test Results	15
8. CONCLUSIONS	16

LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams and Charts <ul style="list-style-type: none">• Test Setup Diagrams• Antenna and Effective Gain Factors
E	Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Plot Map And Layout of Radiated Site
2	Layout of the Semi-Anechoic Test Chamber

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST or any agency of the federal government.

Device Tested: TiVo Series 5 Remote Control 2014
Model: URC-7020BC0-XXXX-R
S/N: N/A

Product Description: See Expository Statement.

Modifications: The EUT was modified in order to meet the specifications. Please see the modification list located in appendix B of this test report.

Customer: Universal Electronics, Inc.
201 East Sandpointe Ave., 8TH Floor
Santa Ana California, 92707

Test Dates: March 17 and 30, 2015

Test Specifications: Emissions requirements
CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.249

Test Procedure: ANSI C63.4

Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Spurious Radiated RF Emissions, 10 kHz – 25,000 MHz (Transmitter and Digital portion)	Complies with the Class B limits of CFR Title 47, Part 15 Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.249
2	Conducted RF Emissions, 150 kHz to 30 MHz	This test was not performed because the EUT operates on battery power and does not connect to the AC mains.

1. PURPOSE

This document is a qualification test report based on the emissions tests performed on the TiVo Series 5 Remote Control 2014, Model: URC-7020BC0-XXXX-R. The emissions measurements were performed according to the measurement procedure described in ANSI C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the Class B specification limits defined by CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.249.



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The emissions tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Universal Electronics, Inc.

Jesse Mendez Senior Electrical Core Engineer

Compatible Electronics Inc.

James Ross Test Engineer
Kenneth Lee Test Technician

2.4 Date Test Sample was Received

The test sample was received on March 17, 2015.

2.5 Disposition of the Test Sample

The test sample has not been returned to Universal Electronics, Inc. as of the date of this test report.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
N/A	Not Applicable
DNF	Do Not Fit
URC	Universal Remote Control

3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this emissions Test Report.

SPEC	TITLE
FCC Title 47, Part 15 Subpart C	FCC Rules - Radio frequency devices (including digital devices) – Intentional Radiators
FCC Title 47, Part 15 Subpart B	FCC Rules - Radio frequency devices (including digital devices) – Unintentional Radiators
ANSI C63.4 2009	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz
EN 50147-2: 1997	Anechoic chambers. Alternative test site suitability with respect to site attenuation
CISPR 22: 2008	Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement


4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration - Emissions

The TiVo Series 5 Remote Control 2014, Model: URC-7020BC0-XXXX-R (EUT) is a remote control that is powered by two AA 1.5 VDC batteries.

The EUT was tested for emissions at the low, middle, and high channels while in the X, Y and Z axis. The EUT was continuously transmitting.

The final radiated data for the EUT as was taken in the mode described above. Please see Appendix E for the data sheets.

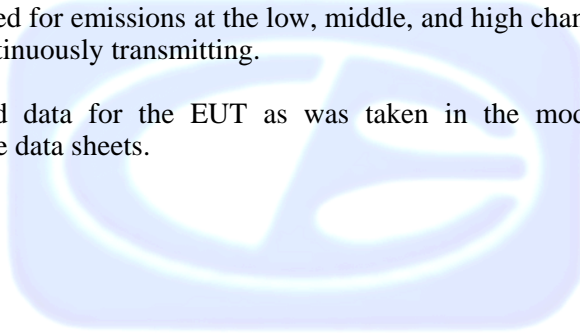

5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

5.1 EUT and Accessory List

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID
TIVO SERIES 5 REMOTE CONTROL 2014	UNIVERSAL ELECTRONICS, INC.	URC-7020BC0-XXXX-R	N/A	MG3-7020

5.2 Emissions Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CALIBRATION DATE	CAL. CYCLE
GENERAL TEST EQUIPMENT USED IN LAB B					
Computer	Compaq	CQ5210F	CNX9360CF9	N/A	N/A
Monitor	Hewlett Packard	HPs2031a	3CQ046N3MD	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESIB40	100194	December 4, 2014	1 Year
GENERAL TEST EQUIPMENT USED IN LAB D					
Computer	Hewlett Packard	p6716f	MXX1030PX0	N/A	N/A
LCD Monitor	Hewlett Packard	52031a	3CQ046N3MG	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESIB40	100194	December 4, 2014	1 Year
RF RADIATED EMISSIONS TEST EQUIPMENT					
CombiLog Antenna	Com-Power	AC-220	61060	May 20, 2014	1 Year
Preamplifier	Com-Power	PA-118	551024	March 6, 2015	1 Year
Preamplifier	Com-Power	PA-840	711013	May 13, 2014	2 Year
Loop Antenna	Com-Power	AL-130	17089	February 6, 2015	2 Year
Horn Antenna	Com-Power	AH-118	071175	February 26, 2014	2 Year
Horn Antenna	Com-Power	AH-826	0071957	N/A	N/A
Antenna Mast	Com Power	AM-100	N/A	N/A	N/A
System Controller	Sunol Sciences Corporation	SC110V	112213-1	N/A	N/A
Turntable	Sunol Sciences Corporation	2011VS	N/A	N/A	N/A
Antenna-Mast	Sunol Sciences Corporation	TWR95-4	112213-3	N/A	N/A


6. TEST SITE DESCRIPTION**6.1 Test Facility Description**

Please refer to section 2.1 and 7.1 of this report for emissions test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was not grounded.

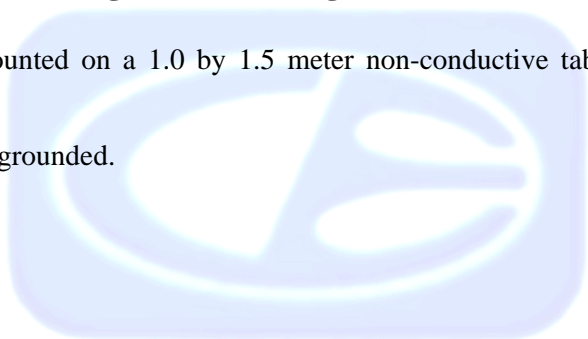

7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

7.1 RF Emissions

7.1.1 Radiated Emissions (Spurious and Harmonics) Test – Lab B

The EMI Receiver was used as a measuring meter. A preamplifier was used to increase the sensitivity of the instrument. The Com Power Microwave Preamplifier Model: PA-118 was used for frequencies above 1 GHz and the PA 840 for frequencies above 18 GHz. The EMI Receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the EMI Receiver records the highest measured reading over all the sweeps.

For frequencies above 1 GHz, the readings were averaged by a "duty cycle correction factor", derived from 20 log (dwell time / pulse train). This duty cycle correction factor was then subtracted from the peak reading.

The measurement bandwidth and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
1 GHz to 18 GHz	1 MHz	Horn Antenna
18 GHz to 25 GHz	1 MHz	Horn Antenna

The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4: 2009. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT by the Radiated Emission Manual Test software. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results.

Radiated Emissions (Spurious and Harmonics) Test -- Lab B (con't)

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 3 meter test distance from 1 GHz to 25 GHz to obtain the final test data.

The EUT was tested at a 3 meter test distance. The six highest emissions are listed in Table 1.0.

Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, Sections 15.209 and 15.249 for radiated emissions. Please see Appendix E for the data sheets.

7.1.2 Radiated Emissions (Spurious and Harmonics) Test – Lab D

The EMI Receiver was used as the measuring meter. A built-in, internal preamplifier was used to increase the sensitivity of the instrument. The EMI Receiver was initially used with the Analyzer mode feature activated. In this mode, the EMI receiver can then record the actual frequency to be measured. This final reading is then taken accurately in the EMI Receiver mode, which takes into account the cable loss, amplifier gain and antenna factors, so that a true reading is compared to the true limit. A quasi-peak reading was taken only for those readings, which are marked accordingly on the data sheets.

The EMI test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is set up according to ANSI C63.4, EN 50147-2 and CISPR 22. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT.

The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength).

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE	EFFECTIVE MEASUREMENT BANDWIDTH	TRANSDUCER
10 kHz to 150 kHz	200 Hz	Active Loop Antenna
150 kHz to 30 MHz	9 kHz	Active Loop Antenna
30 MHz to 1 GHz	120 kHz	CombiLog Antenna

Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, Sections 15.209 and 15.249 (d) for radiated emissions. Please see Appendix E for the data sheets.

7.1.3 RF Emissions Test Results

Table 1.0 RADIATED EMISSION RESULTS
 TiVo Series 5 Remote Control 2014, Model: URC-7020BC0-XXXX-R

Frequency MHz	Average Corrected Reading* dBuV	Specification Limit dBuV	Delta (Cor. Reading – Spec. Limit) dB
4900 (V) (Y-Axis) (Middle Channel)	46.86 (Avg)	54.00	-7.14
7275 (H) (X-Axis) (Low Channel)	46.53 (Avg)	54.00	-7.47
7275 (H) (Z-Axis) (Low Channel)	46.41 (Avg)	54.00	-7.59
4900 (H) (X-Axis) (Middle Channel)	45.75 (Avg)	54.00	-8.25
7275 (V) (Y-Axis) (Low Channel)	45.24 (Avg)	54.00	-8.76
7350 (H) (X-Axis) (Middle Channel)	44.83 (Avg)	54.00	-9.17

Notes:

- (H) Horizontal
- (V) Vertical
- (Avg) Averaged Reading
- * The complete emissions data is given in Appendix E of this report.

8. CONCLUSIONS

The TiVo Series 5 Remote Control 2014, Model: URC-7020BC0-XXXX-R, as tested, meets all of the specification limits defined in FCC Title 47, Part 15, Subpart B and Subpart C, sections 15.205, 15.209, and 15.249.





APPENDIX A

LABORATORY ACCREDITATIONS AND RECOGNITIONS

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025. Please follow the link to the NIST/NVLAP site for each of our facilities' NVLAP certificate and scope of accreditation
NVLAP listing links

[Agoura Division](#) / [Brea Division](#) / [Silverado/Lake Forest Division](#)

.Quote from ISO-ILAC-IAF Communiqué on 17025:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025:2005 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025:2005 (Section 4) are written in language relevant to laboratory operations and meet the principles of ISO 9001:2008 Quality Management Systems — Requirements."



ANSI listing [CETCB](#)



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for EMC under the US/EU Mutual Recognition Agreement (MRA).

US/EU MRA list [NIST MRA site](#)



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for Taiwan/BSMI under the US/APEC (Asia-Pacific Economic Cooperation) Mutual Recognition Agreement (MRA).

APEC MRA list [NIST MRA site](#)

We are also listed for IT products by the following country/agency:



VCCI Support member: Please visit http://www.vcci.jp/vcci_e/



FCC Listing, from FCC OET site

[FCC test lab search](https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm) <https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm>



Compatible Electronics IC listing can be found at:

<http://www.ic.gc.ca/eic/site/ic1.nsf/eng/home>

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



APPENDIX B

MODIFICATIONS TO THE EUT

MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC Subpart B and FCC 15.249 specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

- Added a 0.6 pF capacitor on the L7 (DNF) contact pad.




APPENDIX C***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

TiVo Series 5 Remote Control 2014
Model: URC-7020BC0-XXXX-R
S/N: N/A

There were no additional models covered under this report.




APPENDIX D

DIAGRAMS AND CHARTS

FIGURE 1: PLOT MAP AND LAYOUT OF RADIATED SITE


OPEN LAND > 15 METERS

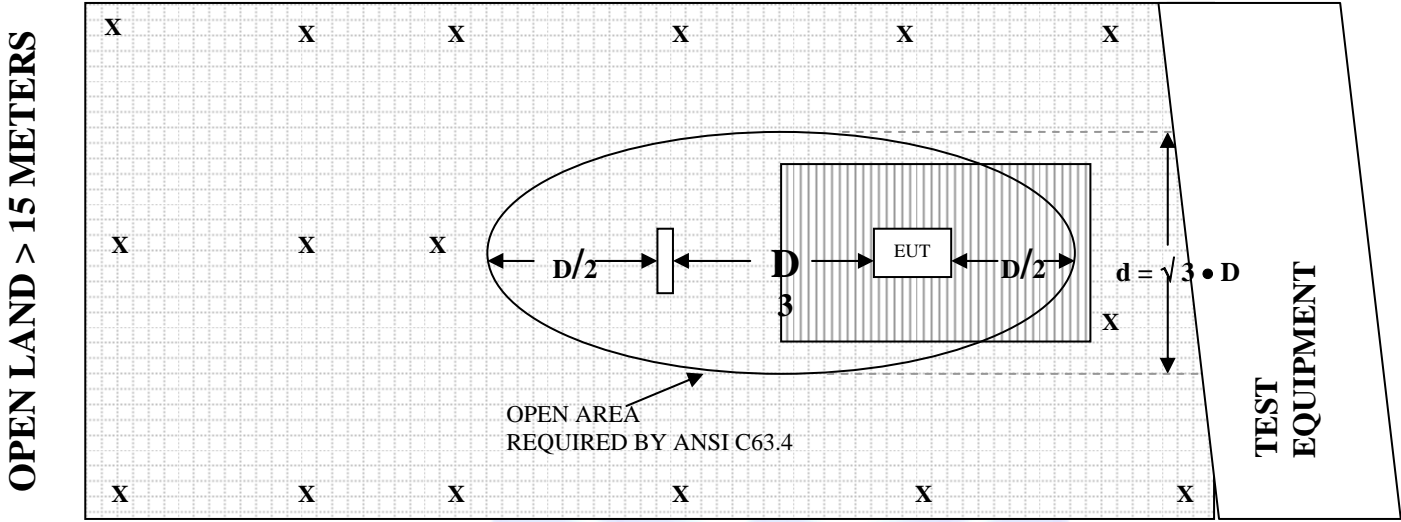

OPEN LAND > 15 METERS

- | | | | |
|----------|--------------------------|--|-----------------|
| X | = GROUND RODS | | = GROUND SCREEN |
| D | = TEST DISTANCE (meters) | | = WOOD COVER |

FIGURE 2: LAYOUT OF THE SEMI-ANECHOIC TEST CHAMBER

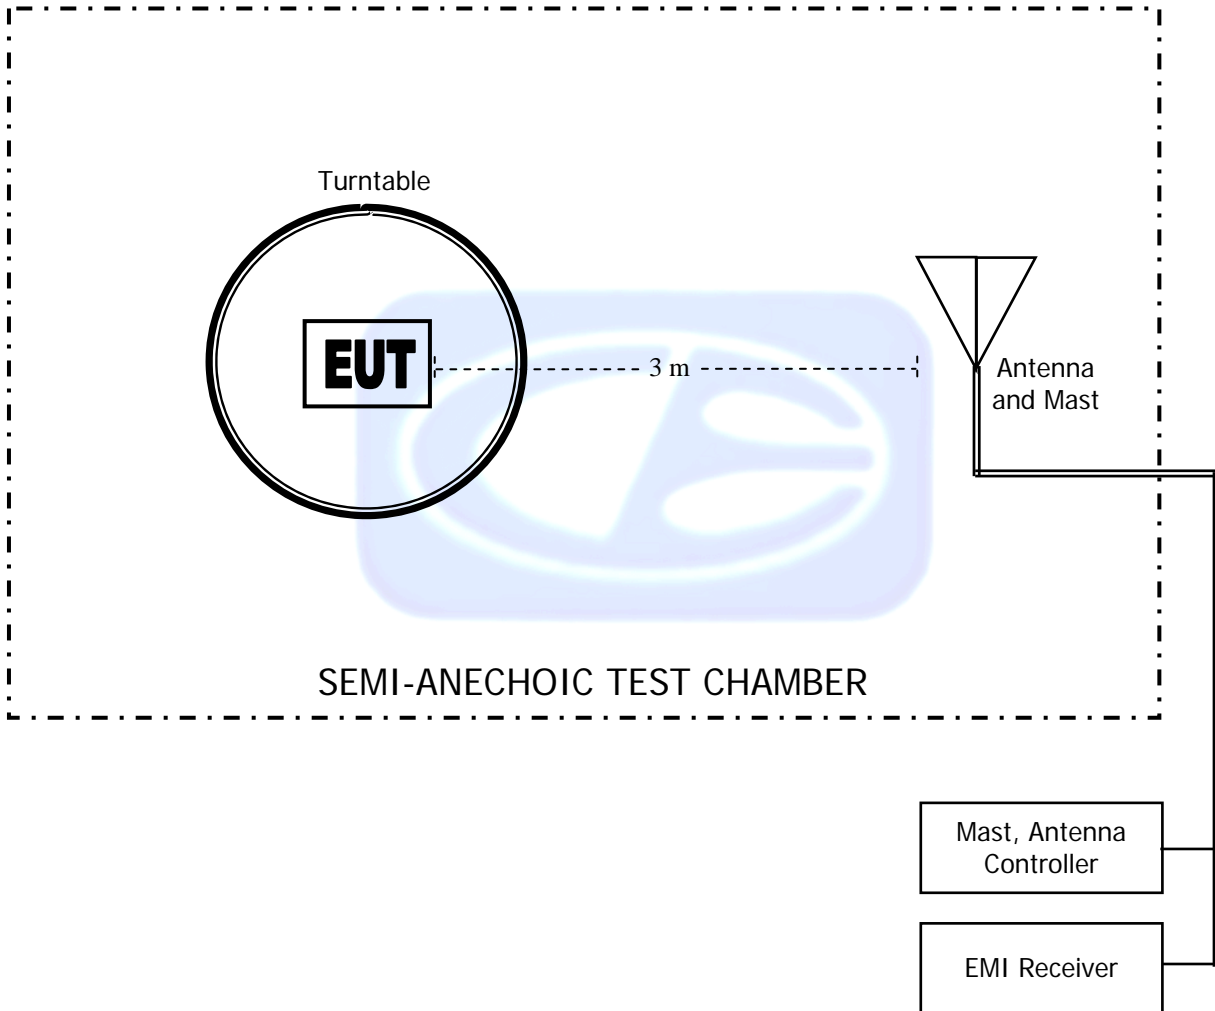

COM-POWER AL-130**LOOP ANTENNA**

S/N: 17089

CALIBRATION DATE: FEBRUARY 6, 2015

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	-33.18	18.32
0.01	-34.10	17.40
0.02	-38.65	12.85
0.03	-39.28	12.22
0.04	-40.09	11.41
0.05	-40.85	10.65
0.06	-40.88	10.62
0.07	-41.07	10.43
0.08	-41.04	10.46
0.09	-41.19	10.31
0.1	-41.20	10.30
0.2	-41.52	9.98
0.3	-41.53	9.97
0.4	-41.42	10.08
0.5	-41.53	9.97
0.6	-41.53	9.97
0.7	-41.43	10.07
0.8	-41.23	10.27
0.9	-41.13	10.37
1	-41.14	10.36
2	-40.80	10.70
3	-40.66	10.84
4	-40.61	10.89
5	-40.33	11.17
6	-40.53	10.97
7	-40.47	11.03
8	-40.48	11.02
9	-39.93	11.57
10	-39.81	11.69
15	-43.35	8.15
20	-39.16	12.34
25	-40.24	11.26
30	-43.18	8.32

COM-POWER AC-220

COMBILOG ANTENNA

S/N: 61060

CALIBRATION DATE: MAY 20, 2014

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	23.40	200	14.40
35	23.70	250	16.40
40	24.20	300	17.90
45	22.60	350	15.60
50	22.10	400	19.90
60	17.90	450	20.40
70	12.70	500	21.60
80	11.60	550	21.50
90	12.20	600	22.30
100	13.20	650	23.50
120	15.70	700	23.70
125	15.80	750	25.90
140	13.60	800	25.90
150	16.90	850	26.40
160	14.20	900	27.00
175	14.90	950	27.70
180	15.00	1000	27.50

COM POWER AH-118**HORN ANTENNA**

S/N: 071175

CALIBRATION DATE: FEBRUARY 26, 2014

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	24.23	10.0	38.43
1.5	25.84	10.5	40.19
2.0	28.14	11.0	40.49
2.5	29.51	11.5	41.39
3.0	31.20	12.0	42.02
3.5	32.17	12.5	43.30
4.0	31.40	13.0	42.77
4.5	31.86	13.5	40.18
5.0	34.82	14.0	42.59
5.5	34.38	14.5	41.74
6.0	36.31	15.0	41.84
6.5	34.81	15.5	38.48
7.0	37.48	16.0	39.52
7.5	36.98	16.5	37.85
8.0	36.66	17.0	41.33
8.5	38.47	17.5	44.96
9.0	37.22	18.0	48.50
9.5	37.86		

COM-POWER PA-118**PREAMPLIFIER**

S/N: 551024

CALIBRATION DATE: MARCH 6, 2015

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
1.0	39.76	6.0	38.77
1.1	40.46	6.5	38.46
1.2	40.05	7.0	38.27
1.3	40.58	7.5	38.77
1.4	39.50	8.0	39.25
1.5	39.92	8.5	38.63
1.6	40.40	9.0	39.58
1.7	40.10	9.5	42.12
1.8	40.49	10.0	38.53
1.9	38.86	11.0	40.21
2.0	41.53	12.0	41.15
2.5	41.05	13.0	40.51
3.0	40.29	14.0	40.32
3.5	40.82	15.0	39.47
4.0	40.88	16.0	39.88
4.5	41.37	17.0	39.79
5.0	40.73	18.0	40.61
5.5	39.05		

COM-POWER AH-826**HORN ANTENNA**

S/N: 71957

FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
18.0	33.5	22.5	35.5
18.5	33.5	23.0	35.9
19.0	34.0	23.5	35.7
19.5	34.0	24.0	35.6
20.0	34.3	24.5	36.0
20.5	34.9	25.0	36.2
21.0	34.7	25.5	36.1
21.5	35.0	26.0	36.2
22.0	35.0	26.5	35.7

COM-POWER PA-840**MICROWAVE PREAMPLIFIER**

S/N: 711013

CALIBRATION DATE: MAY 13, 2014


FREQUENCY (GHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
18.0	25.19	31.0	25.69
19.0	24.48	31.5	25.74
20.0	24.39	32.0	26.35
21.0	24.73	32.5	26.64
22.0	23.49	33.0	25.98
23.0	24.23	33.5	24.68
24.0	24.59	34.0	24.61
25.0	25.32	34.5	23.78
26.0	25.66	35.0	24.74
26.5	25.99	35.5	24.39
27.0	26.26	36.0	23.46
27.5	25.33	36.5	23.71
28.0	24.49	37.0	26.35
28.5	24.74	37.5	23.49
29.0	25.93	38.0	25.42
29.5	26.28	38.5	24.87
30.0	26.17	39.0	22.60
30.5	26.11	39.5	20.57
		40.0	19.15



FRONT VIEW

UNIVERSAL ELECTRONICS, INC.
TIVO SERIES 5 REMOTE CONTROL 2014
MODEL: URC-7020BC0-XXXX-R
FCC SUBPART B AND C – RADIATED EMISSIONS – BELOW 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

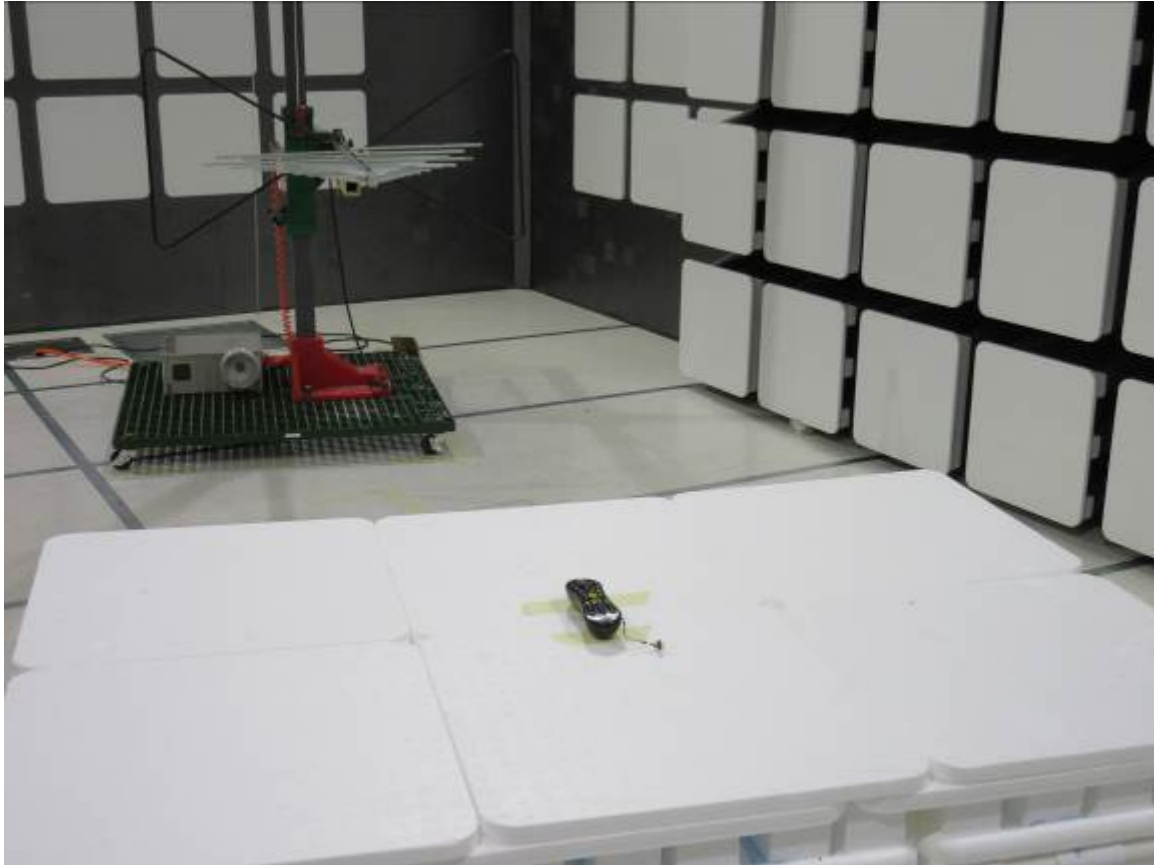

REAR VIEW

UNIVERSAL ELECTRONICS, INC.
TIVO SERIES 5 REMOTE CONTROL 2014
MODEL: URC-7020BC0-XXXX-R
FCC SUBPART B AND C – RADIATED EMISSIONS – BELOW 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



FRONT VIEW

UNIVERSAL ELECTRONICS, INC.
TIVO SERIES 5 REMOTE CONTROL 2014
MODEL: URC-7020BC0-XXXX-R
FCC SUBPART B AND C – RADIATED EMISSIONS – ABOVE 1 GHz


**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



REAR VIEW

UNIVERSAL ELECTRONICS, INC.
TIVO SERIES 5 REMOTE CONTROL 2014
MODEL: URC-7020BC0-XXXX-R
FCC SUBPART B AND C – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**

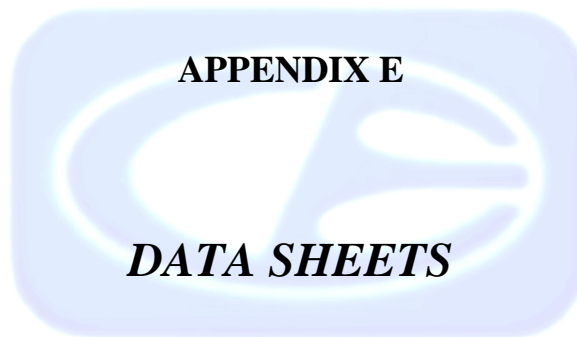

RADIATED EMISSIONS


DATA SHEETS

Title: Radiated Pre-Scan 30 - 1000 MHz - FCC Class B
 File: Radiated Pre-Scan 30-1000Mhz - FCC Class B.set
 Operator: Kenneth Lee
 EUT Type: Tivo Series 5 Remote Control 2014
 EUT Condition: Continuously Transmitting - X-Axis - Worst Case
 Comments: Customer: Universal Electronics, Inc.

3/30/2015 9:07:59 AM
 Sequence: Preliminary Scan

Pre-Scan - FCC B

Electric Field Strength (dBµV/m)

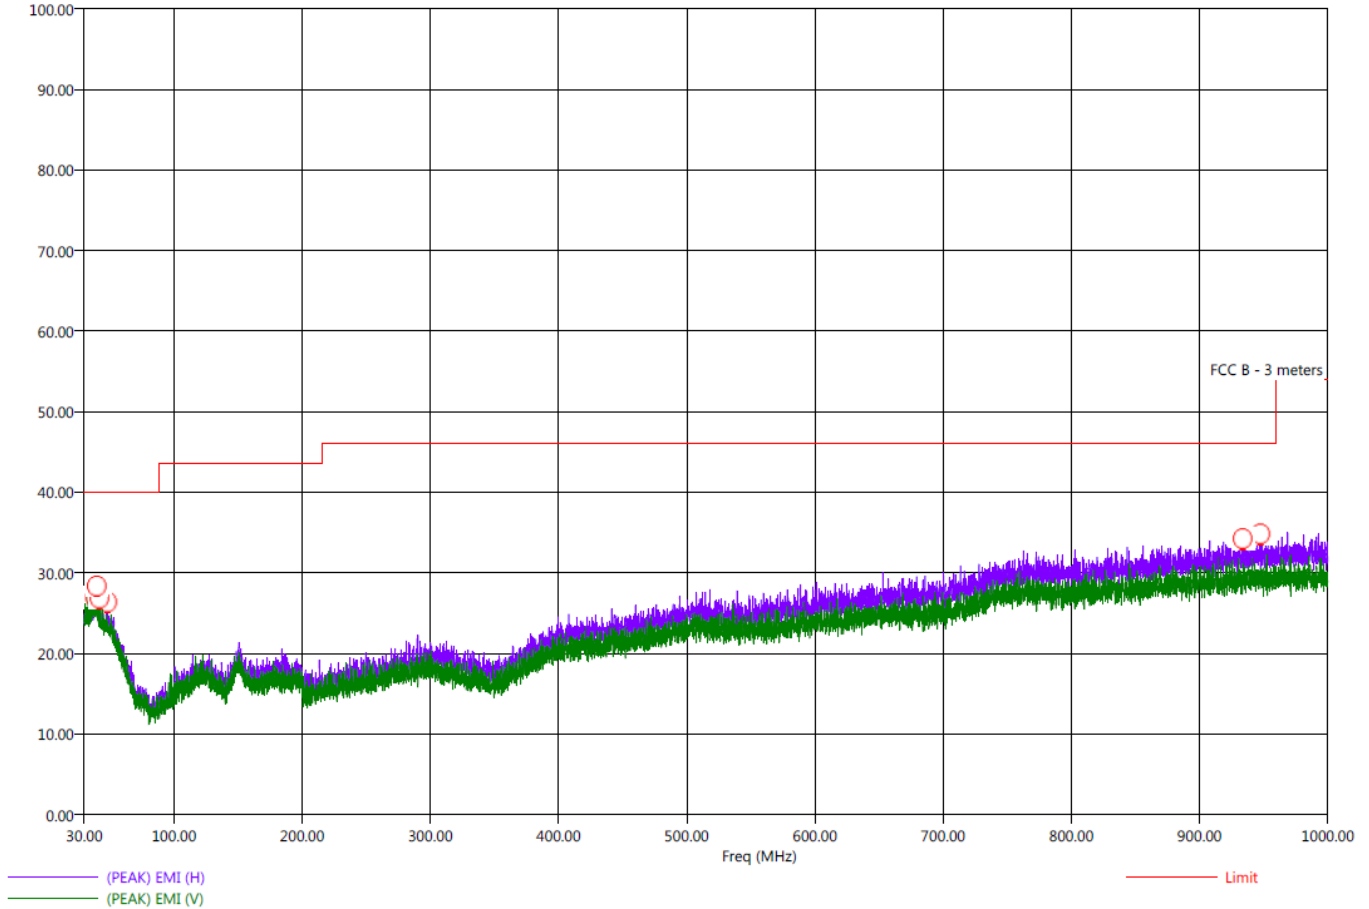

Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

Title: Final Scan - FCC Class B
 File: Radiated Final 30-1000Mhz - FCC Class B.set
 Operator: Kenneth Lee
 EUT Type: Tive Series 5 Remote Control 2014
 EUT Condition: Continuously Transmitting - X-Axis - Worst Case
 Comments: Customer: Universal Electronics, Inc.

3/30/2015 9:35:59 AM
 Sequence: Final Measurements

Final-Scan - FCC Class B

Freq (MHz)	Pol	(PEAK) EMI (dB μ V/m)	(QP) EMI (dB μ V/m)	(PEAK) Margin (dB)	(QP) Margin (dB)	Limit (dB μ V/m)	Transducer (dB)	Cable (dB)	Ttbl Aql (dea)	Twr Ht (cm)
38.50	H	26.20	20.99	-13.80	-19.01	40.00	24.06	0.42	147.50	275.55
39.90	V	26.48	21.11	-13.52	-18.89	40.00	24.17	0.43	110.25	194.11
41.90	V	25.50	20.47	-14.50	-19.53	40.00	23.58	0.44	253.50	111.73
48.10	H	24.45	19.51	-15.55	-20.49	40.00	22.31	0.49	85.75	111.49
933.70	H	34.37	28.57	-11.63	-17.43	46.00	27.48	2.69	60.00	325.76
947.50	H	34.20	28.84	-11.80	-17.16	46.00	27.67	2.71	210.50	342.77

FCC 15.249

Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R
Power Level: +7 dBm
Low Channel
X-Axis - Vertical

Date: 03/17/2015
 Lab: B
 Tested By: Kenneth Lee

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2425	96.8	V	114	-17.2	Peak	1.65	0	
2425	76.8	V	94	-17.2	Avg	1.65	0	
4850	58.85	V	74	-15.15	Peak	1.15	0	
4850	38.85	V	54	-15.15	Avg	1.15	0	
7275	62.41	V	74	-11.59	Peak	1.5	65	
7275	42.41	V	54	-11.59	Avg	1.5	65	
9700	52.83	V	74	-21.17	Peak	1	350	
9700	32.83	V	54	-21.17	Avg	1	350	
12125	58.26	V	74	-15.74	Peak	1.1	15	
12125	38.26	V	54	-15.74	Avg	1.1	15	
14550								No Emissions Detected
14550								
16975								No Emissions Detected
16975								
19400								No Emissions Detected
19400								
21825								No Emissions Detected
21825								
24250								No Emissions Detected
24250								

FCC 15.249

Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R
Power Level: +7 dBm
Low Channel
X-Axis - Horizontal

Date: 03/17/2015
 Lab: B
 Tested By: Kenneth Lee

Freq. (MHz)	Level (dBUV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2425	99.14	H	114	-14.86	Peak	1	25	
2425	79.14	H	94	-14.86	Avg	1	25	
4850	59.41	H	74	-14.59	Peak	1	335	
4850	39.41	H	54	-14.59	Avg	1	335	
7275	66.53	H	74	-7.47	Peak	1	35	
7275	46.53	H	54	-7.47	Avg	1	35	
9700	53.72	H	74	-20.28	Peak	1	25	
9700	33.72	H	54	-20.28	Avg	1	25	
12125	57.74	H	74	-16.26	Peak	1.15	45	
12125	37.74	H	54	-16.26	Avg	1.15	45	
14550								No Emissions Detected
16975								No Emissions Detected
19400								No Emissions Detected
21825								No Emissions Detected
24250								No Emissions Detected

FCC 15.249

Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R

Date: 03/17/2015
 Lab: B
 Tested By: Kenneth Lee

Power Level: +7 dBm
Low Channel
Y-Axis - Vertical

Freq. (MHz)	Level (dBUV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2425	99.91	V	114	-14.09	Peak	1.1	190	
2425	79.91	V	94	-14.09	Avg	1.1	190	
4850	57.27	V	74	-16.73	Peak	1	15	
4850	37.27	V	54	-16.73	Avg	1	15	
7275	65.24	V	74	-8.76	Peak	1	235	
7275	45.24	V	54	-8.76	Avg	1	235	
9700	52.64	V	74	-21.36	Peak	1	170	
9700	32.64	V	54	-21.36	Avg	1	170	
12125	56.5	V	74	-17.5	Peak	1.1	335	
12125	36.5	V	54	-17.5	Avg	1.1	335	
14550								No Emissions Detected
16975								No Emissions Detected
19400								No Emissions Detected
21825								No Emissions Detected
24250								No Emissions Detected

FCC 15.249

Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R
Power Level: +7 dBm
Low Channel
Y-Axis - Horizontal

Date: 03/17/2015
 Lab: B
 Tested By: Kenneth Lee

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2425	91.76	H	114	-22.24	Peak	1	45	
2425	71.76	H	94	-22.24	Avg	1	45	
4850	55.52	H	74	-18.48	Peak	1	335	
4850	35.52	H	54	-18.48	Avg	1	335	
7275	63.76	H	74	-10.24	Peak	1	345	
7275	43.76	H	54	-10.24	Avg	1	345	
9700	52.69	H	74	-21.31	Peak	1	180	
9700	32.69	H	54	-21.31	Avg	1	180	
12125	57.73	H	74	-16.27	Peak	1	135	
12125	37.73	H	54	-16.27	Avg	1	135	
14550								No Emissions Detected
16975								No Emissions Detected
19400								No Emissions Detected
21825								No Emissions Detected
24250								No Emissions Detected

FCC 15.249

 Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R

 Date: 03/17/2015
 Lab: B
 Tested By: Kenneth Lee

Power Level: +7 dBm
Low Channel
Z-Axis - Vertical

Freq. (MHz)	Level (dBUV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2425	95.72	V	114	-18.28	Peak	1.00	165	
2425	75.72	V	94	-18.28	Avg	1.00	165	
4850	54.94	V	74	-19.06	Peak	1.00	210	
4850	34.94	V	54	-19.06	Avg	1.00	210	
7275	64.48	V	74	-9.52	Peak	1.50	90	
7275	44.48	V	54	-9.52	Avg	1.50	90	
9700	64.15	V	74	-9.85	Peak	1.00	65	
9700	44.15	V	54	-9.85	Avg	1.00	65	
12125	60.23	V	74	-13.77	Peak	1.25	90	
12125	40.23	V	54	-13.77	Avg	1.25	90	
14550								No Emissions Detected
16975								No Emissions Detected
19400								No Emissions Detected
21825								No Emissions Detected
24250								No Emissions Detected

FCC 15.249

Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R

Date: 03/17/2015
 Lab: B
 Tested By: Kenneth Lee

Power Level: +7 dBm
Low Channel
Z-Axis - Horizontal

Freq. (MHz)	Level (dBUV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2425	97.86	H	114	-16.14	Peak	1.1	280	
2425	77.86	H	94	-16.14	Avg	1.1	280	
4850	61.44	H	74	-12.56	Peak	1.1	270	
4850	41.44	H	54	-12.56	Avg	1.1	270	
7275	66.41	H	74	-7.59	Peak	1.15	280	
7275	46.41	H	54	-7.59	Avg	1.15	280	
9700	54.97	H	74	-19.03	Peak	1.35	90	
9700	34.97	H	54	-19.03	Avg	1.35	90	
12125	58.4	H	74	-15.6	Peak	1.25	335	
12125	38.4	H	54	-15.6	Avg	1.25	335	
14550								No Emissions Detected
16975								No Emissions Detected
19400								No Emissions Detected
21825								No Emissions Detected
24250								No Emissions Detected

FCC 15.249

Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R

Date: 03/17/2015
 Lab: B
 Tested By: Kenneth Lee

Power Level: +7 dBm
Middle Channel
X-Axis - Vertical

Freq. (MHz)	Level (dBUV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2450	96.93	V	114	-17.07	Peak	1.65	355	
2450	76.93	V	94	-17.07	Avg	1.65	355	
4900	54.64	V	74	-19.36	Peak	1	10	
4900	34.64	V	54	-19.36	Avg	1	10	
7350	57.15	V	74	-16.85	Peak	1	210	
7350	37.15	V	54	-16.85	Avg	1	210	
9800	54.26	V	74	-19.74	Peak	1.5	30	
9800	34.26	V	54	-19.74	Avg	1.5	30	
12250								No Emissions Detected
12250								
14700								No Emissions Detected
14700								
17150								No Emissions Detected
17150								
19600								No Emissions Detected
19600								
22050								No Emissions Detected
22050								
24500								No Emissions Detected
24500								

FCC 15.249

Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R
Power Level: +7 dBm
Middle Channel
X-Axis - Horizontal

Date: 03/17/2015
 Lab: B
 Tested By: Kenneth Lee

Freq. (MHz)	Level (dBUV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2450	100.44	H	114	-13.56	Peak	1	15	
2450	80.44	H	94	-13.56	Avg	1	15	
4900	65.75	H	74	-8.25	Peak	1	60	
4900	45.75	H	54	-8.25	Avg	1	60	
7350	64.83	H	74	-9.17	Peak	1.15	90	
7350	44.83	H	54	-9.17	Avg	1.15	90	
9800	53.58	H	74	-20.42	Peak	1.5	345	
9800	33.58	H	54	-20.42	Avg	1.5	345	
12250	57.65	H	74	-16.35	Peak	1.25	45	
12250	37.65	H	54	-16.35	Avg	1.25	45	
14700								No Emissions Detected
17150								No Emissions Detected
19600								No Emissions Detected
22050								No Emissions Detected
24500								No Emissions Detected

FCC 15.249

Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R

Date: 03/17/2015
 Lab: B
 Tested By: Kenneth Lee

Power Level: +7 dBm
Middle Channel
Y-Axis - Vertical

Freq. (MHz)	Level (dBUV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2450	100.57	V	114	-13.43	Peak	1	190	
2450	80.57	V	94	-13.43	Avg	1	190	
4900	66.86	V	74	-7.14	Peak	1	200	
4900	46.86	V	54	-7.14	Avg	1	200	
7350	63.67	V	74	-10.33	Peak	1	250	
7350	43.67	V	54	-10.33	Avg	1	250	
9800	54.04	V	74	-19.96	Peak	1.35	270	
9800	34.04	V	54	-19.96	Avg	1.35	270	
12250	57.39	V	74	-16.61	Peak	1	250	
12250	37.39	V	54	-16.61	Avg	1	250	
14700								No Emissions Detected
17150								No Emissions Detected
19600								No Emissions Detected
22050								No Emissions Detected
24500								No Emissions Detected

FCC 15.249

Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R

Date: 03/17/2015
 Lab: B
 Tested By: Kenneth Lee

Power Level: +7 dBm
Middle Channel
Y-Axis - Horizontal

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2450	91.78	H	114	-22.22	Peak	1.75	170	
2450	71.78	H	94	-22.22	Avg	1.75	170	
4900	56.09	H	74	-17.91	Peak	1	320	
4900	36.09	H	54	-17.91	Avg	1	320	
7350	60.26	H	74	-13.74	Peak	1	160	
7350	40.26	H	54	-13.74	Avg	1	160	
9800	53.95	H	74	-20.05	Peak	1	190	
9800	33.95	H	54	-20.05	Avg	1	190	
12250	57.32	H	74	-16.68	Peak	1.5	45	
12250	37.32	H	54	-16.68	Avg	1.5	45	
14700								No Emissions Detected
17150								No Emissions Detected
19600								No Emissions Detected
22050								No Emissions Detected
24500								No Emissions Detected

FCC 15.249

Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R

Date: 03/17/2015
 Lab: B
 Tested By: Kenneth Lee

Power Level: +7 dBm
Middle Channel
Z-Axis - Vertical

Freq. (MHz)	Level (dBUV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2450	95.26	V	114	-18.74	Peak	1.35	180	
2450	75.26	V	94	-18.74	Avg	1.35	180	
4900	54.41	V	74	-19.59	Peak	1	45	
4900	34.41	V	54	-19.59	Avg	1	45	
7350	59.38	V	74	-14.62	Peak	1.15	340	
7350	39.38	V	54	-14.62	Avg	1.15	340	
9800	53.44	V	74	-20.56	Peak	1.5	80	
9800	33.44	V	54	-20.56	Avg	1.5	80	
12250	58.57	V	74	-15.43	Peak	1.5	45	
12250	38.57	V	54	-15.43	Avg	1.5	45	
14700								No Emissions Detected
17150								No Emissions Detected
19600								No Emissions Detected
22050								No Emissions Detected
24500								No Emissions Detected

FCC 15.249

Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R

Date: 03/17/2015
 Lab: B
 Tested By: Kenneth Lee

Power Level: +7 dBm
Middle Channel
Z-Axis - Horizontal

Freq. (MHz)	Level (dBUV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2450	99.83	H	114	-14.17	Peak	1	270	
2450	79.83	H	94	-14.17	Avg	1	270	
4900	60.12	H	74	-13.88	Peak	1	280	
4900	40.12	H	54	-13.88	Avg	1	280	
7350	62.99	H	74	-11.01	Peak	1.1	270	
7350	42.99	H	54	-11.01	Avg	1.1	270	
9800	53.65	H	74	-20.35	Peak	1	65	
9800	33.65	H	54	-20.35	Avg	1	65	
12250	57.66	H	74	-16.34	Peak	1.25	90	
12250	37.66	H	54	-16.34	Avg	1.25	90	
14700								No Emissions Detected
17150								No Emissions Detected
19600								No Emissions Detected
22050								No Emissions Detected
24500								No Emissions Detected

FCC 15.249

Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R

Date: 03/17/2015
 Lab: B
 Tested By: Kenneth Lee

Power Level: +7 dBm
High Channel
X-Axis - Vertical

Freq. (MHz)	Level (dBUV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2475	95.96	V	114	-18.04	Peak	2	0	
2475	75.96	V	94	-18.04	Avg	2	0	
4950	54.54	V	74	-19.46	Peak	1.85	110	
4950	34.54	V	54	-19.46	Avg	1.85	110	
7425	58.9	V	74	-15.1	Peak	1.5	110	
7425	38.9	V	54	-15.1	Avg	1.5	110	
9900	54.79	V	74	-19.21	Peak	1.5	340	
9900	34.79	V	54	-19.21	Avg	1.5	340	
12375	58.33	V	74	-15.67	Peak	1.5	355	
12375	38.33	V	54	-15.67	Avg	1.5	355	
14850								No Emissions Detected
17325								No Emissions Detected
19800								No Emissions Detected
22275								No Emissions Detected
24750								No Emissions Detected

FCC 15.249

 Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R

Date: 03/17/2015

Lab: B

Tested By: Kenneth Lee

Power Level: +7 dBm
High Channel
X-Axis - Horizontal

Freq. (MHz)	Level (dBUV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2475	98.34	H	114	-15.66	Peak	1	30	
2475	78.34	H	94	-15.66	Avg	1	30	
4950	55.62	H	74	-18.38	Peak	1	30	
4950	35.62	H	54	-18.38	Avg	1	30	
7425	58.53	H	74	-15.47	Peak	1	15	
7425	38.53	H	54	-15.47	Avg	1	15	
9900	53.59	H	74	-20.41	Peak	1.25	340	
9900	33.59	H	54	-20.41	Avg	1.25	340	
12375	58.3	H	74	-15.7	Peak	1	45	
12375	38.3	H	54	-15.7	Avg	1	45	
14850								No Emissions Detected
17325								No Emissions Detected
19800								No Emissions Detected
22275								No Emissions Detected
24750								No Emissions Detected

FCC 15.249

Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R

Date: 03/17/2015
 Lab: B
 Tested By: Kenneth Lee

Power Level: +7 dBm
High Channel
Y-Axis - Vertical

Freq. (MHz)	Level (dBUV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2475	99.39	V	114	-14.61	Peak	1	190	
2475	79.39	V	94	-14.61	Avg	1	190	
4950	60.39	V	74	-13.61	Peak	1	235	
4950	40.39	V	54	-13.61	Avg	1	235	
7425	61.79	V	74	-12.21	Peak	1	235	
7425	41.79	V	54	-12.21	Avg	1	235	
9900	53.13	V	74	-20.87	Peak	1.15	270	
9900	33.13	V	54	-20.87	Avg	1.15	270	
12375	57.78	V	74	-16.22	Peak	1.65	45	
12375	37.78	V	54	-16.22	Avg	1.65	45	
14850								No Emissions Detected
17325								No Emissions Detected
19800								No Emissions Detected
22275								No Emissions Detected
24750								No Emissions Detected

FCC 15.249

Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R

Date: 03/17/2015
 Lab: B
 Tested By: Kenneth Lee

Power Level: +7 dBm
High Channel
Y-Axis - Horizontal

Freq. (MHz)	Level (dBUV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2475	89.53	H	114	-24.47	Peak	1	90	
2475	69.53	H	94	-24.47	Avg	1	90	
4950	55.1	H	74	-18.9	Peak	1	335	
4950	35.1	H	54	-18.9	Avg	1	335	
7425	59.13	H	74	-14.87	Peak	1	0	
7425	39.13	H	54	-14.87	Avg	1	0	
9900	53.68	H	74	-20.32	Peak	1	355	
9900	33.68	H	54	-20.32	Avg	1	355	
12375	57.21	H	74	-16.79	Peak	1.1	340	
12375	37.21	H	54	-16.79	Avg	1.1	340	
14850								No Emissions Detected
17325								No Emissions Detected
19800								No Emissions Detected
22275								No Emissions Detected
24750								No Emissions Detected

FCC 15.249

Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R

Date: 03/17/2015
 Lab: B
 Tested By: Kenneth Lee

Power Level: +7 dBm
High Channel
Z-Axis - Vertical

Freq. (MHz)	Level (dBUV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2475	96.9	V	114	-17.1	Peak	1	170	
2475	76.9	V	94	-17.1	Avg	1	170	
4950	54.34	V	74	-19.66	Peak	1	170	
4950	34.34	V	54	-19.66	Avg	1	170	
7425	58.1	V	74	-15.9	Peak	1	180	
7425	38.1	V	54	-15.9	Avg	1	180	
9900	53.87	V	74	-20.13	Peak	1.25	45	
9900	33.87	V	54	-20.13	Avg	1.25	45	
12375	58.27	V	74	-15.73	Peak	1.35	45	
12375	38.27	V	54	-15.73	Avg	1.35	45	
14850								No Emissions Detected
17325								No Emissions Detected
19800								No Emissions Detected
22275								No Emissions Detected
24750								No Emissions Detected

FCC 15.249

Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R
Power Level: +7 dBm
High Channel
Z-Axis - Horizontal

Date: 03/17/2015
 Lab: B
 Tested By: Kenneth Lee


Freq. (MHz)	Level (dBUV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2475	99.96	H	114	-14.04	Peak	1.1	280	
2475	79.96	H	94	-14.04	Avg	1.1	280	
4950	59.35	H	74	-14.65	Peak	1	280	
4950	39.35	H	54	-14.65	Avg	1	280	
7425	58.25	H	74	-15.75	Peak	1.15	300	
7425	38.25	H	54	-15.75	Avg	1.15	300	
9900	55.54	H	74	-18.46	Peak	1.5	135	
9900	35.54	H	54	-18.46	Avg	1.5	135	
12375	57.8	H	74	-16.2	Peak	1.1	120	
12375	37.8	H	54	-16.2	Avg	1.1	120	
14850								No Emissions Detected
17325								No Emissions Detected
19800								No Emissions Detected
22275								No Emissions Detected
24750								No Emissions Detected

FCC 15.249

Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R
Power Level: +7 dBm
Band Edges


Date: 03/17/2015
 Lab: B
 Tested By: Kenneth Lee

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
2425	99.91	V	114	-14.09	Peak	1.1	190	Fundamental
2425	79.91	V	94	-14.09	Avg	1.1	190	of Low Channel
2342	39.55	V	74	-34.45	Peak	1.1	190	Band Edge of Low Channel
2342	19.55	V	54	-34.45	Avg	1.1	190	Y-Axis Worst Case
2425	99.14	H	114	-14.86	Peak	1	25	Fundamental of
2425	79.14	H	94	-14.86	Avg	1	25	Low Channel
2322	42.3	H	74	-31.7	Peak	1	25	Band Edge of Low Channel
2322	22.3	H	54	-31.7	Avg	1	25	X-Axis Worst Case
2475	99.96	H	114	-14.04	Peak	1.1	280	Fundamental of
2475	79.96	H	94	-14.04	Avg	1.1	280	High Channel
2483.5	42.28	H	74	-31.72	Peak	1.1	280	Band Edge of High Channel
2483.5	22.28	H	54	-31.72	Avg	1.1	280	Z-Axis Worst Case
2475	99.39	V	114	-14.61	Peak	1	190	Fundamental of
2475	79.39	V	94	-14.61	Avg	1	190	High Channel
2483.5	43.5	V	74	-30.5	Peak	1	190	Band Edge of High Channel
2483.5	23.5	V	54	-30.5	Avg	1	190	Y-Axis Worst Case

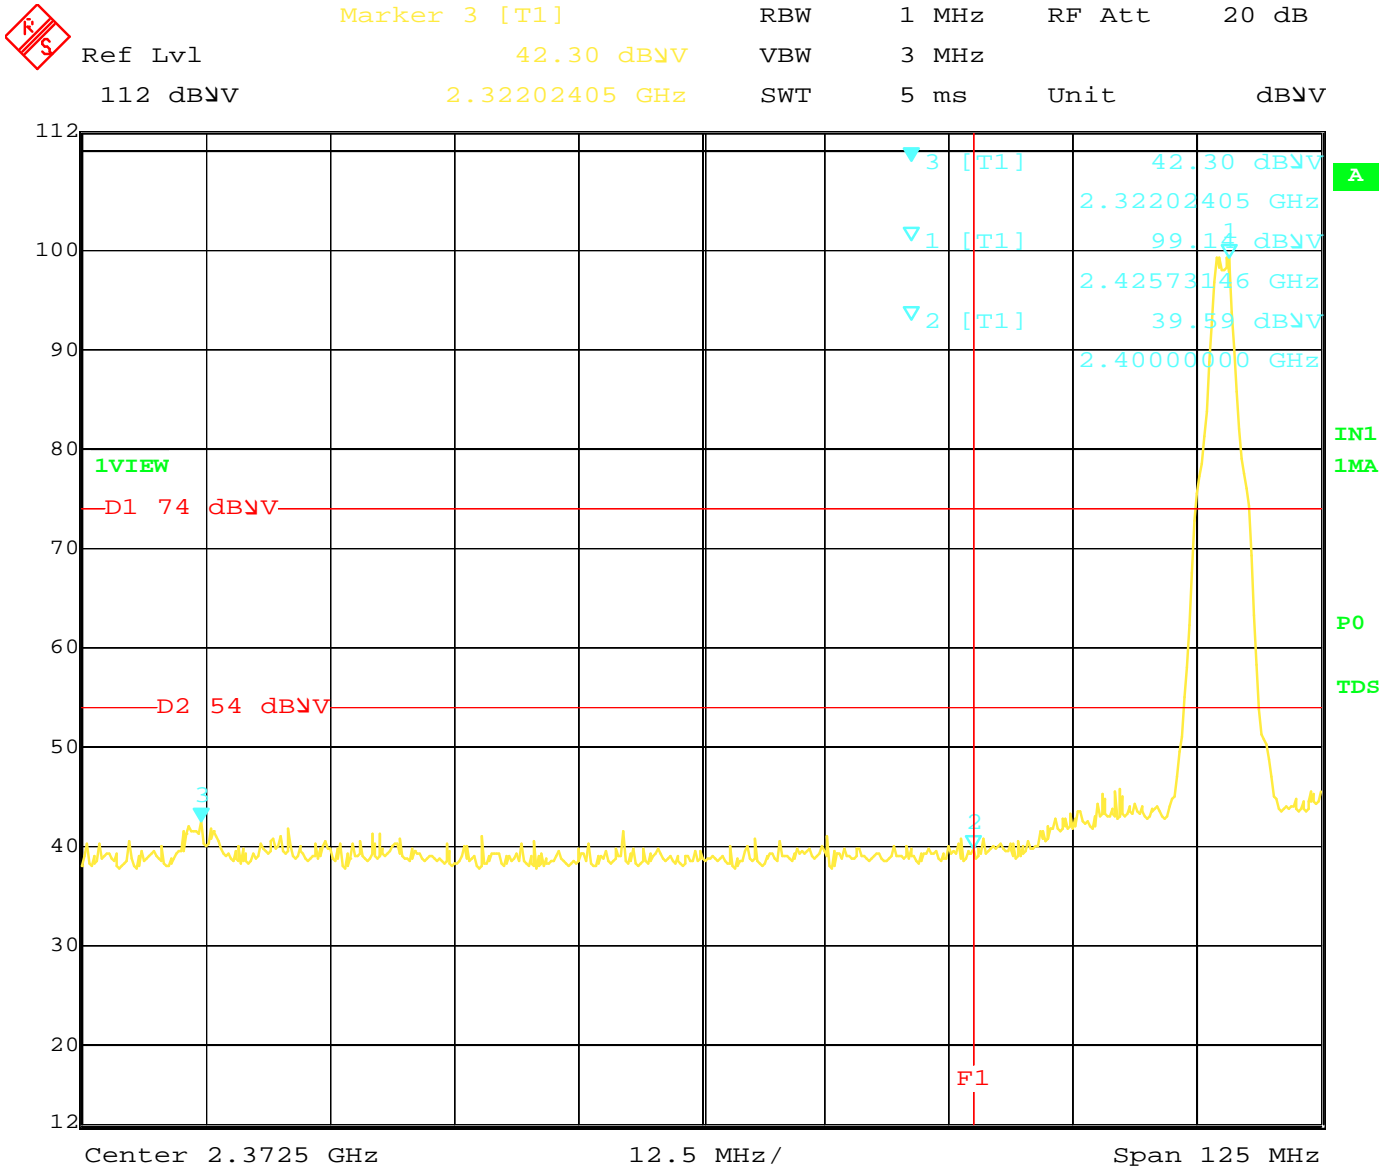

Date: 17.MAR.2015 13:20:54

Band Edge – Horizontal – Low Channel – X-Axis – Worst Case

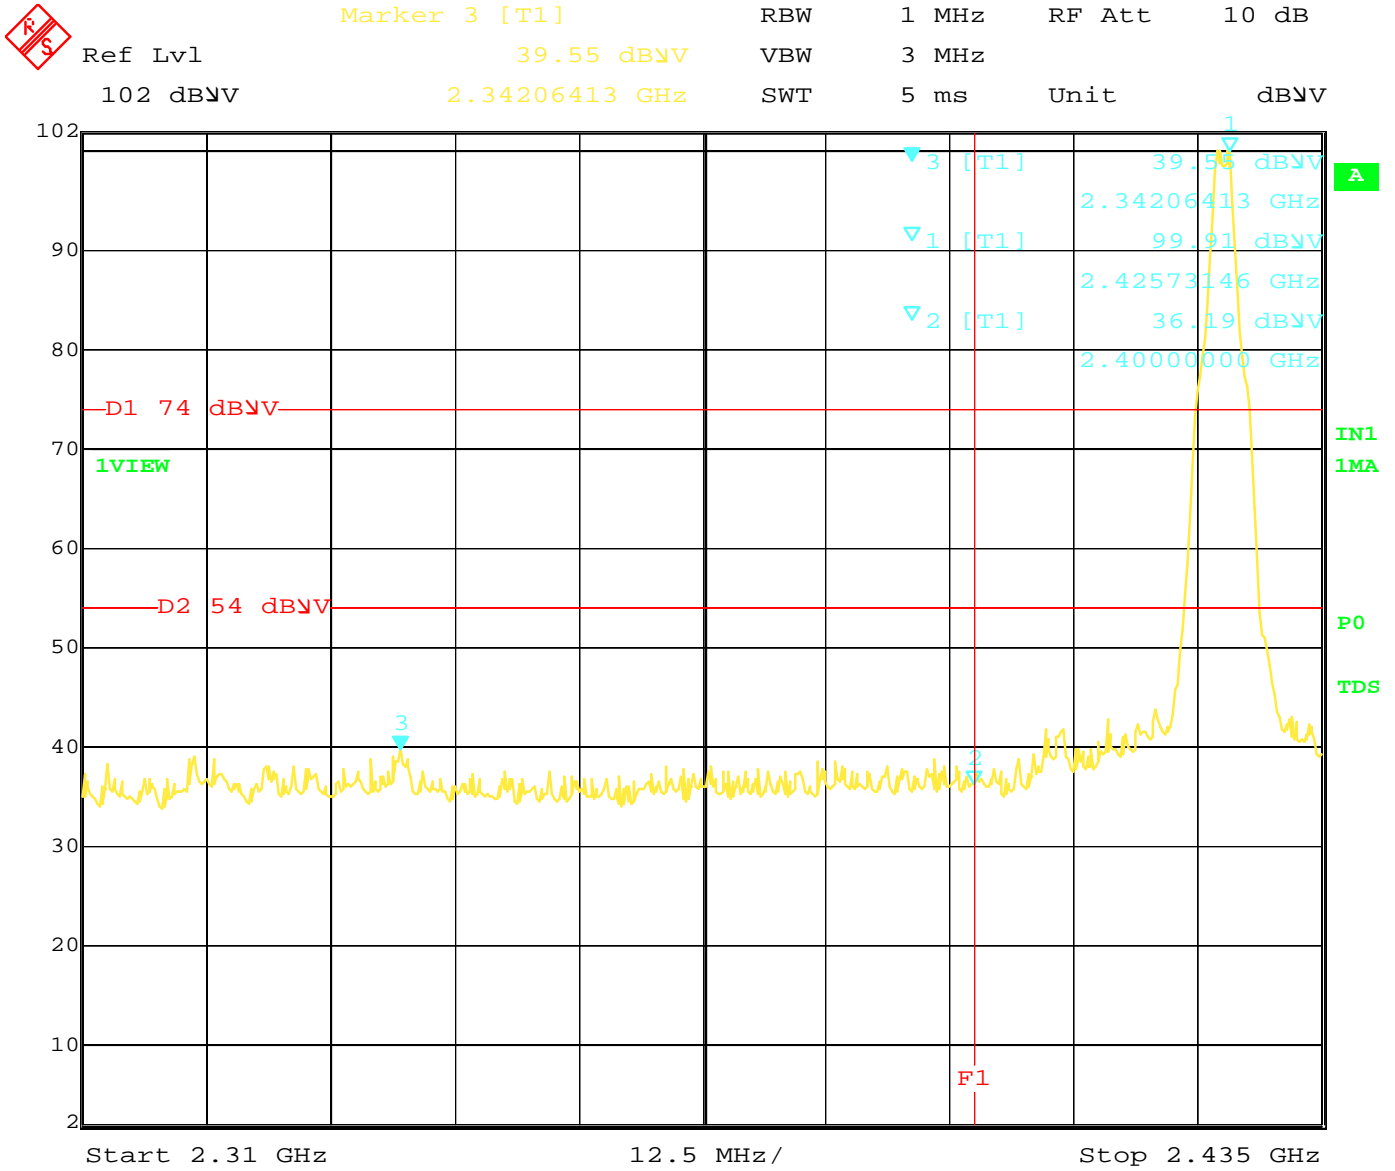


Date: 17.MAR.2015 13:11:37

Band Edge – Vertical – Low Channel – Y-Axis – Worst Case



Ref Lvl	102 dBV	Marker 2 [T1]	42.28 dBV	RBW	1 MHz	RF Att	10 dB
			2.48350000 GHz	VBW	3 MHz		
				SWT	5 ms	Unit	dBV

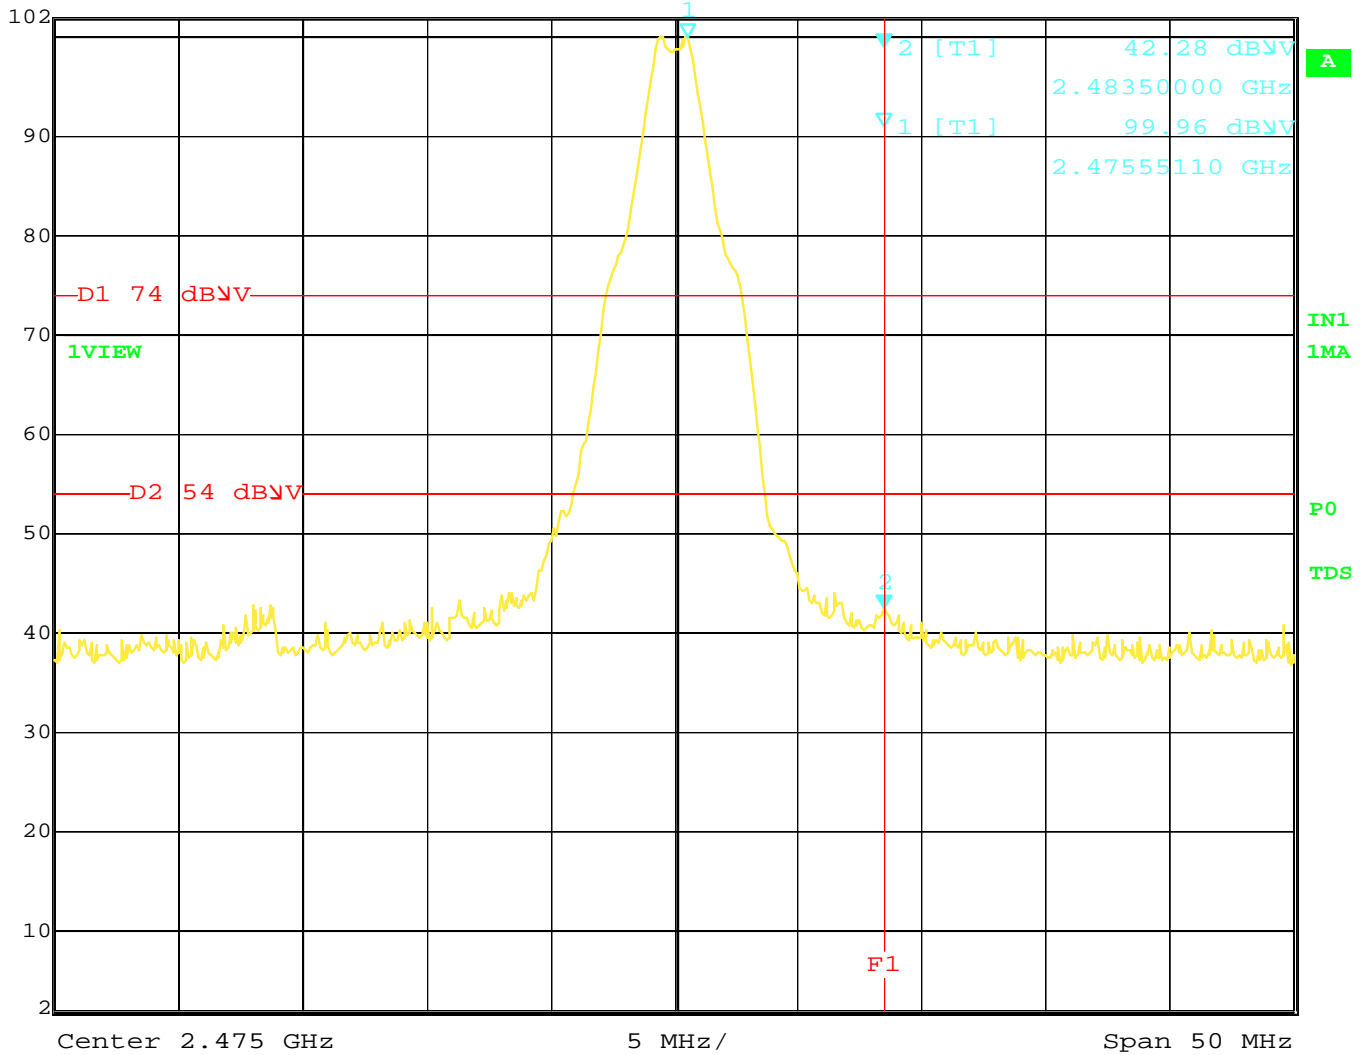


Date: 17.MAR.2015 12:34:36

Band Edge – Horizontal – High Channel – Z-Axis – Worst Case



Marker 2 [T1] RBW 1 MHz RF Att 10 dB
 Ref Lvl 43.50 dBμV VBW 3 MHz
 102 dBμV 2.48350000 GHz SWT 5 ms Unit dBμV

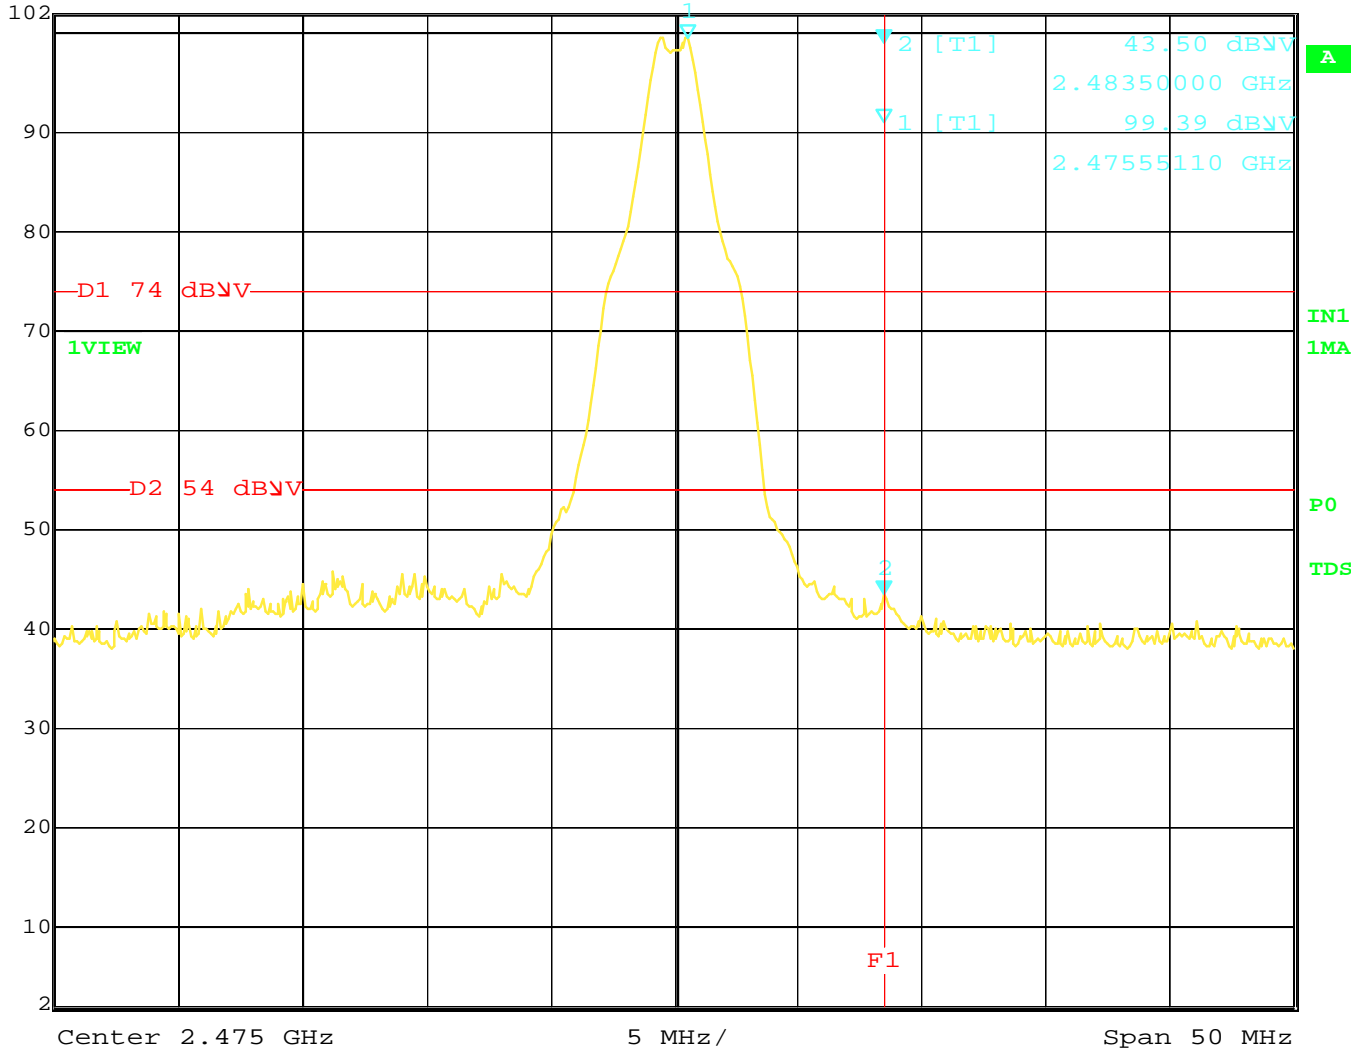

Date: 17.MAR.2015 13:03:40

Band Edge – Vertical – High Channel – Y-Axis – Worst Case

FCC 15.249

 Universal Electronics, Inc.
 TiVo Series 5 Remote Control 2014
 Model: URC-7020BC0-XXXX-R

Date: 03/17/2015

Lab: B

Tested By: Kenneth Lee

Power Level: +7 dBm
Diital Portion and Non-Harmonic Emissions from the Transmitter
10 kHz to 30 MHz and 1 GHz to 25 GHz

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
								No Emissions Detected from 10 kHz to 30 MHz for the Digital Portion for both the Vertical and Horizontal Polarizations.
								No Emissions Detected from 10 kHz to 30 MHz for the Non-Harmonic Emissions from the Tx for the EUT for both the Vertical and Horizontal Polarizations.
								Investigated in the X, Y, and Z-Axis
								No Emissions Detected from 1 GHz to 25 GHz for the Digital Portion for both the Vertical and Horizontal Polarizations.
								No Emissions Detected from 1 GHz to 25 GHz for the Non-Harmonic Emissions from the Tx for the EUT for both the Vertical and Horizontal Polarizations.
								Investigated in the X, Y, and Z-Axis