

MPE EVALUATION REPORT

FOR THE
M64780D25

**FCC OET BULLETIN 65, EDITION 97-01, ANSI / IEEE C95.1-1992,
AND ANSI / IEEE C95.3-1992**

RF EXPOSURE COMPLIANCE

PREPARED FOR:

IP MobileNet
16842 Von Karman Avenue Ste 200
Irvine CA 92606

W.O. No.: 85421

DATE OF ISSUE: 9/5/06

DRAFT

PREPARED BY:

Eddie Wong
110 N. Olinda Place
Brea, CA 9283

Date of
test: 9/5/06

This report contains a total of 19 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc. The results in this report apply only to the items tested, as identified herein.

TABLE OF CONTENTS

Administrative Information	3
Summary of Results	3
Approvals	4
Equipment Under Test	5
Peripheral Devices	5
Specifications and Requirements	6
Summary of RF Exposure Conditions	7
Report of Measurements	8
Test Configuration	10
Test Procedure	10
Reference Documents	15
Appendix A: Photographs of the Test Setup Used	16
Appendix B: Test Equipment List	17

DRAFT

ADMINISTRATIVE INFORMATION

PURPOSE OF TEST:

To demonstrate the compliance of M64780D25 with the RF Exposure Requirements for mobile devices.

REPRESENTATIVE:

Eric Tanner

SUMMARY OF RESULTS

VEHICLE MOUNTED ANTENNA

For General Population / Uncontrolled Exposure, the Maximum Permissible Exposure (MPE) limit for the operating frequency range 1 (794 to 806 MHz) is 0.537 mW/cm². The data in this report demonstrates that this device complies with the Maximum Permissible Exposure (MPE) requirements set forth in 47 CFR §2.1091, §1.1310, and OET Bulletin 65, Edition 97-01 for General Population / Uncontrolled Exposure environment at a minimum distance of 10 cm through a ground plane from the vehicle mounted antenna (operator requirement), and for General Population / Uncontrolled Exposure environment at a minimum distance of 50 cm (at 50% duty cycle) laterally from the vehicle mounted antenna (bystander requirement).

APPROVALS

Steve Behm, Director of Engineering Services

QUALITY ASSURANCE:



Joyce Walker, Quality Assurance
Administrative Manager

TEST PERSONNEL:

Eddie Wong

Eddie Wong



EQUIPMENT UNDER TEST
M64780D25

PERIPHERAL DEVICES

The EUT was tested with the following peripheral device(s):

High Power Termination	Weinschel Corporation	45-40-43	MN216
Laptop Computer	Dell Corporation	PP01L Inspiron 4100	05D481
GPS Antenna	San Jose Navigation, Inc.	SM-25	2533961
DC Power Supply	HP	6652A SEC 1223	3235A-00835

DRAFT

SPECIFICATIONS AND REQUIREMENTS

The following summarizes the specifications and requirements for Maximum Permissible Exposure for mobile devices applied during RF exposure evaluation.

Excerpt from 47 CFR §1.1310 Radio Frequency radiation exposure limits

Table 1. - Limits for Maximum Permissible Exposure (MPE)

(A) Limits for Occupational/Controlled Exposures

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1	6
300-1500	---	---	f/300	6
1500-100,000	---	---	5	6

(B) Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	---	---	f/1500	30
1500-100,000	---	---	1	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 to Table 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 to Table 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

SUMMARY OF RF EXPOSURE CONDITIONS

Operating Frequency Range (MHz)	794 to 806
Rated Power Output (Watts)	23.7 (805.9MHz Conducted)

MPE Limit =	f/1500 (mW/cm ²)
=	0.537 (mW/cm ²)

All Frequency Ranges

Operator Exposure Condition

	Occupational / Controlled Exposure
X	General Population / Uncontrolled Exposure

Bystander Exposure Condition

	Occupational / Controlled Exposure
X	General Population / Uncontrolled Exposure

Device and Antenna Operating Configuration

Vehicle Mounted Antenna

Antenna used for test is a magnetically mounted vehicle antenna with gain of 3 dBi in the frequency range of 794 to 806 MHz. The antenna is connected to the RF output port of the EUT.

DRAFT

REPORT OF MEASUREMENTS

VEHICLE MOUNTED ANTENNA

The following tables show the measurements performed to determine conformity with the applicable limits for RF exposure. Measurements are performed at the center of the equipment's operating band; this allows the maximum power output through the device.

Operator Exposure Measurements

Measurement of the operator made directly under the ground plane at a separation of 10cm beneath and 10cm forward of the base of the transmitting antenna

d (m)	mW/cm ²	Limit	Result
0.1	0.08318	0.54	Pass

DRAFT

Bystander Exposure Measurements

Measurements on point grid in mW/cm^2 .

The measured power density was recorded at 100% duty cycle, at a measurement distance of 0.5 meter. Reported spatially averaged power density is corrected using 50% duty cycle correction with the following rational:

Following the intended use of the equipment under normal installation conditions the duty cycle of this equipment is expected to be less than 1%. For the purposes of evaluating the worst case of RF Exposure, a higher duty cycle is imposed on the equipment. Since this equipment is similar to keyed radio systems, the maximum duty cycle used for RF Exposure Evaluation is 50%. Only the worst case of all measurements are reported. All other recorded measurements were below those shown in the tables that follow.

**Point Grid mW/cm^2
(Calculated)**

<i>A</i>	<i>B</i>	<i>C</i>	<i>Height</i>
0.079	0.100	0.061	1.75
0.812	0.859	0.812	1.00
0.064	0.073	0.066	0.50

<i>X (m)</i>	mW/cm^2	Limit	Result
0.5	0.32527	0.54	Pass

DRAFT

Evaluation was performed at the following measurement distances: 0.50m, 0.90m, 1.2 m, 1.5 m, 1.80m, 2.00m At 0.5 meter away from the antenna the measured permissible Bystander Exposure power density limit is 0.32 mW/cm^2 at 50% duty cycle.

TEST CONFIGURATION

The EUT antenna is placed in a configuration typical of normal installation. For a magnetically mounted vehicle antennas, a reference ground plane is used to simulate actual installation. In order to limit external interference effects, the test is performed in a semi-anechoic chamber. The EUT equipment is setup in a configuration representative of normal use. Support equipment for the measurement instruments are located outside of the chamber.

TEST PROCEDURE

The method for performing spatially averaged measurements is as follows:

1. Determine the location of the maximum field.
2. Establish around the location of the maximum field a grid of points within approximately 0.35 m (width) x 1.25 m (height) surface area, at a reasonable distance (e.g., 0.5 m) above the floor or ground and perpendicular to it. These points should be uniformly spaced within the grid with the point of the maximum field included.
3. Measure the field strength in all points of the grid.
4. Calculate the average field.

To determine the location of the maximum field, the detector is moved throughout the RF field generated by the transmit antenna. The detector is positioned at a minimum of 12 radials and at varying distances from the antenna along each radial. The area of maximum RF energy determined during preliminary investigation shall be used for the remainder of the tests

To determine the spatially averaged value, local values including the maximum value are measured over a surface area of 0.35 m (width) x 1.25 m (height) perpendicular to the ground beginning at 0.50m from the ground reference plane. Preliminary investigation is performed in order to determine the orientation and height which yields the highest power density or field strength measurements. The height of the center row of local points is determined during preliminary investigation and corresponds to a location at which a local maximum exists. Where the field is reasonably uniform (within +20%), e.g., in the far-field, measurements will suffice in one location, representative of the space that is occupied by a person. Where the field is not uniform, measurements are made at a series of locations. The measurement points are uniformly spaced within the sampling area. Local values are measured at nine points within the sampling grid.

Since the applicable limits exist in several different measurement units, the following outlines the most common calculations used for determining the spatially averaged field.

Case 1: Where limits are applied in electric field strength (V/m), the spatially averaged electric field strength along a grid of n points is calculated using:

$$E = \left[\frac{1}{n} \sum_{i=1}^n E_i^2 \right]^{\frac{1}{2}}$$

Case 2: Where limits are applied in units of power density (mW/cm²), assuming measurements are made in the far field, where the E and H vectors are mutually orthogonal, power density is first calculated using:


$$S = \frac{E^2}{377}$$

And the spatially averaged power density along a grid of n points is calculated using:

$$S = \frac{1}{n} \sum_{i=1}^n S_i$$

DRAFT


The following diagram is an example of the grid used to perform local measurements for RF exposure evaluation over a whole-body spatial average.

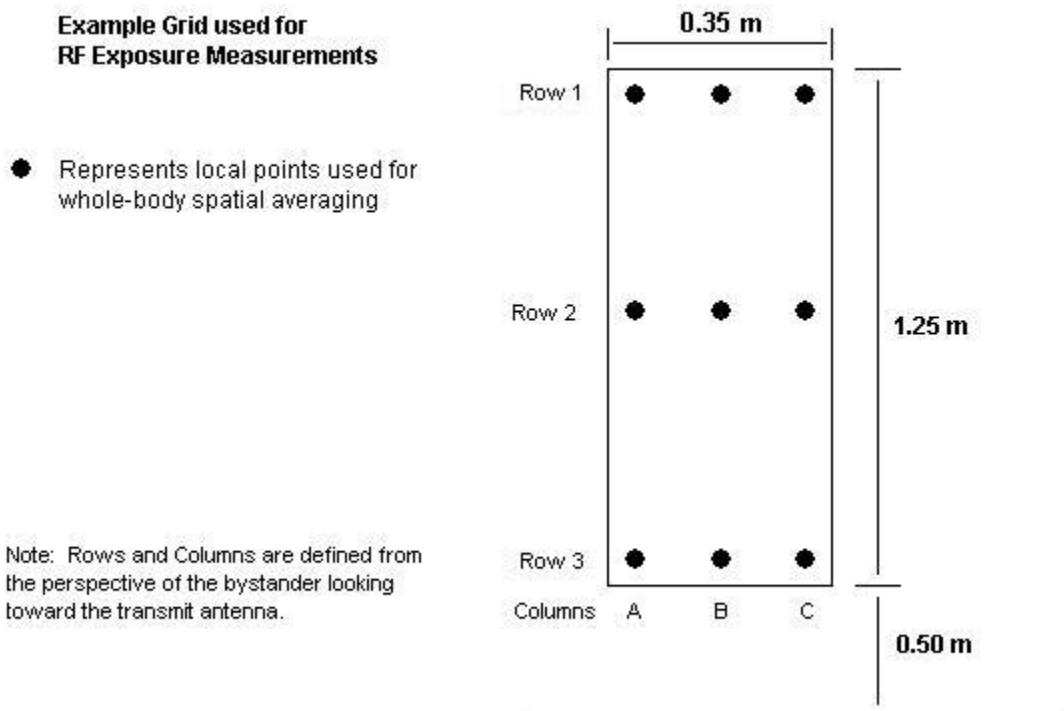

The following diagram is an example of the setup used for most tests, excluding magnetically mounted vehicle antennas.

Setup Used for RF Evaluation Measurements


(excluding magnetically mounted vehicle antennas)

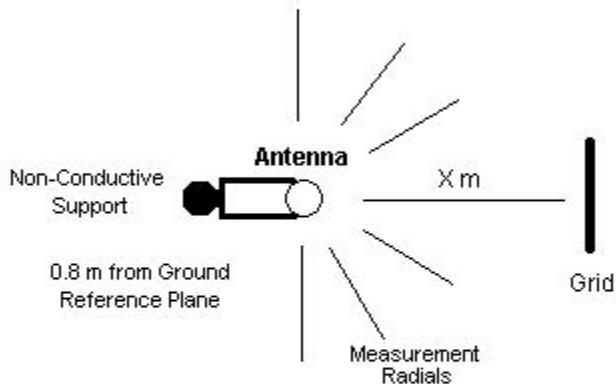

Top View

The following diagram is an example of the setup used for vehicle-mounted antennas. The letter X represents the test distance used for RF exposure measurements. The distance X is measured from the phase center of the transmitting antenna to the volumetric center of the measurement instrument. In order to more accurately simulate normal installation, the antenna ground plane is not bonded to the ground reference plane. The transmitting antenna is placed in the center of the antenna ground plane.

Setup Used for Vehicle-Mounted Antennas

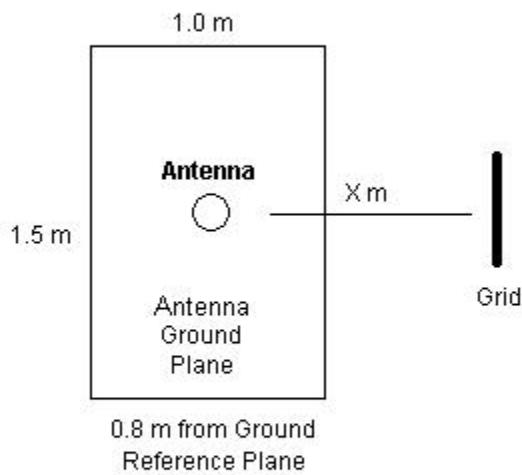

Top View

REFERENCE DOCUMENTS

ANSI IEEE C95.1-1991. IEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300GHz.


ANSI IEEE C95.3-1991. IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave

FCC OET Bulletin 65 Supplement C. Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields

Health Canada Safety Code 6. Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz.

DRAFT

APPENDIX A
PHOTOGRAPH OF THE TEST SETUP USED

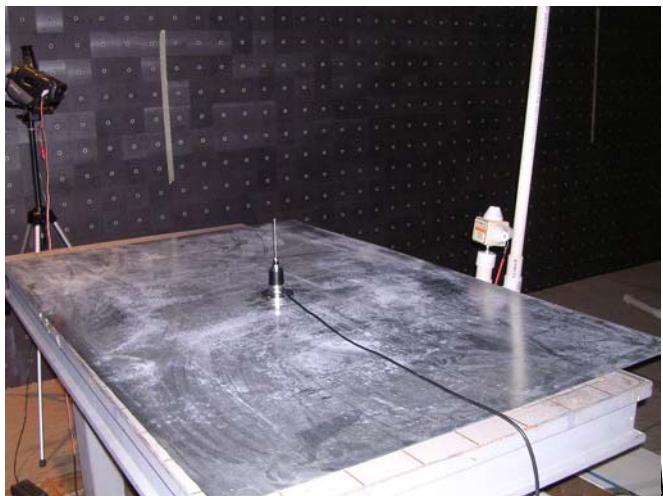

FT



Vehicle Mounted Antenna

APPENDIX B

Equipment	Asset #	Manufacturer	Model #	Serial #	Cal Date	Cal Due
Field Monitor	00636	AR	FM2 000	14294	6/24/05	6/24/07
Field Probe	00638	AR	FP2 000	14318	05/27/05	05/27/07

DRAFT