



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313
33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372
3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372
13501 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

November 4, 2015

General Dynamics
77 A Street
Needham, MA 02494

Dear Ramin Taraz,

Enclosed is the EMC Wireless test report for compliance testing of the General Dynamics, ES520 as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Title 47 of the CFR, Part 15.407, Subpart E (UNII 3).

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Warnell
Documentation Department

Reference: (\General Dynamics\ EMC86277B-FCC407 UNII 3 Rev. 1)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13501 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

**Electromagnetic Compatibility Criteria
Test Report**

for the

**General Dynamics
Model ES520**

Tested under
The FCC Certification Rules
contained in
Title 47 of the CFR
15.407 Subpart E

MET Report: EMC86277B-FCC407 UNII 3 Rev. 1

November 4, 2015

Prepared For:

**General Dynamics
77 A Street
Needham, MA 02494**

Prepared By:
MET Laboratories, Inc.
914 W. Patapsco Ave.
Baltimore, MD 21230

Electromagnetic Compatibility Criteria Test Report


for the

**General Dynamics
Model ES520**

Tested under
The FCC Certification Rules
contained in
Title 47 of the CFR
15.407 Subpart E



Surinder Singh, Project Engineer
Electromagnetic Compatibility Lab



Jennifer Warnell
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Parts 15B, 15.407, of the FCC Rules under normal use and maintenance.



Asad Bajwa,
Director, Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
∅	October 6, 2015	Initial Issue.
1	November 4, 2015	Engineer corrections.

Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview.....	4
	B. References.....	4
	C. Test Site	5
	D. Description of Test Sample.....	5
	E. Support Equipment	6
	F. Mode of Operation.....	7
	G. Method of Monitoring EUT Operation.....	7
	H. Modifications.....	7
	a) Modifications to EUT	7
	b) Modifications to Test Standard	7
	I. Disposition of EUT	7
III.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	8
	§ 15.203 Antenna Requirement	9
	§ 15.403(i) 26 dB Bandwidth	10
	§ 15.407(a)(3) Maximum Conducted Output Power	12
	§ 15.407(a)(3) Maximum Power Spectral Density	14
	§ 15.407(b)(4) & (6 - 7) Undesirable Emissions	16
	§ 15.407(b)(6) Conducted Emissions	24
	§ 15.407(c) Automatic Discontinue of Transmission	29
	§ 15.407(e) 6 dB Bandwidth.....	30
	§ 15.407(f) RF Exposure	32
IV.	Test Equipment	33
V.	Certification & User’s Manual Information.....	35
	A. Certification Information	36
	B. Label and User’s Manual Information	40

List of Tables

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing	2
Table 2. EUT Summary.....	4
Table 3. References	4
Table 4. Support Equipment.....	6
Table 5. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)	24
Table 6. Conducted Emissions, Test Results, Phase Line	25
Table 7. Conducted Emissions, Test Results, Neutral Line.....	25
Table 8. Test Equipment List	34

List of Figures

Figure 1. Block Diagram of Equipment Configuration	6
--	---

List of Photographs

Photograph 1. General Dynamics, ES520	5
Photograph 2. Radiated Spurious Emissions, Test Setup, 30 MHz – 1 GHz.....	23
Photograph 3. Radiated Spurious Emissions, Test Setup, 1 GHz – 18 GHz	23
Photograph 4. Conducted Emissions, Test Setup	28

List of Plots

Plot 1. 26 dB Occupied Bandwidth, Low Channel.....	11
Plot 2. 26 dB Occupied Bandwidth, Mid Channel	11
Plot 3. 26 dB Occupied Bandwidth, High Channel	11
Plot 4. Maximum Conducted Output Power, Low Channel	13
Plot 5. Maximum Conducted Output Power, Mid Channel.....	13
Plot 6. Maximum Conducted Output Power, High Channel	13
Plot 7. Maximum Power Spectral Density, Low Channel	15
Plot 8. Maximum Power Spectral Density, Mid Channel.....	15
Plot 9. Maximum Power Spectral Density, High Channel	15
Plot 10. Radiated Spurious Emissions, 30 MHz – 1 GHz, Radio Off	17
Plot 11. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz.....	18
Plot 12. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz	18
Plot 13. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz	19
Plot 14. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz	19
Plot 15. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz	20
Plot 16. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz.....	20
Plot 17. Radiated Band Edge, Low Channel	21
Plot 18. Radiated Band Edge, Integration Method, Low Channel, 5715 MHz	21
Plot 19. Radiated Band Edge, High Channel.....	22
Plot 20. Radiated Band Edge, Integration Method, High Channel, 5725 MHz	22
Plot 21. Conducted Emissions, Phase Line, Low Channel	26
Plot 22. Conducted Emissions, Phase Line, Mid Channel.....	26
Plot 23. Conducted Emissions, Phase Line, High Channel	26
Plot 24. Conducted Emissions, Neutral Line, Low Channel	27
Plot 25. Conducted Emissions, Neutral Line, Mid Channel.....	27
Plot 26. Conducted Emissions, Neutral Line, High Channel.....	27
Plot 27. 6 dB Occupied Bandwidth, Low Channel.....	31
Plot 28. 6 dB Occupied Bandwidth, Mid Channel	31
Plot 29. 6 dB Occupied Bandwidth, High Channel	31

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB μ A	Decibels above one microamp
dB μ V	Decibels above one microvolt
dB μ A/m	Decibels above one microamp per meter
dB μ V/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	Kilohertz
kPa	Kilopascal
kV	Kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μ H	Microhenry
μ	Microfarad
μ s	Microseconds
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the General Dynamics ES520, with the requirements of Part 15, §15.407. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the ES520. General Dynamics should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the ES520, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.407, in accordance with General Dynamics, purchase order number 01ESM798728. All tests were conducted using measurement procedure ANSI C63.4-2014.

FCC Reference	Description	Results
§15.203	Antenna Requirement	Compliant
§15.403(i)	26 dB Bandwidth	Compliant
§15.407 (a)(3)	Maximum Conducted Output Power	Compliant
§15.407 (a)(3)	Maximum Power Spectral Density	Compliant
§15.407 (b)(4)& (6 - 7)	Undesirable Emissions	Compliant
§15.407(b)(6)	Conducted Emission Limits	Compliant
§15.407(c)	Automatic Discontinue of Transmitter	Customer Declaration
§15.407(e)	6 dB Bandwidth	Compliant
§15.407(f)	RF Exposure	Compliant

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing

II. Equipment Configuration

A. Overview

MET Laboratories, Inc. was contracted by General Dynamics to perform testing on the ES520, under General Dynamics's purchase order number 01ESM798728.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the General Dynamics ES520.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	ES520	
Model(s) Covered:	ES520	
EUT Specifications:	Primary Power: 120 VAC, 60 Hz	
	FCC ID: MIJ-ES520P	
	Type of Modulations:	OFDM
	Equipment Code:	NII
	Max. RF Output Power:	14.26
	EUT Frequency Ranges:	5745-5825 MHz
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Surinder Singh	
Report Date(s):	November 4, 2015	

Table 2. EUT Summary

References

CFR 47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices (UNII)
ANSI C63.4:2014	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2005	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
KDB 789033 D02	General UNII Test Procedures New Rules v01

Table 3. References

B. Test Site

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Ave., Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

C. Description of Test Sample

The General Dynamics Fortress Deployable Mesh Point Model ES520 (with Senao and Dbii Modular Approved Radios), Equipment Under Test (EUT), is a dual radio access point/bridge. It embeds two COTS high power radios and multiple Ethernet ports in a ruggedized enclosure. The radio operates in accordance to 802.11a and 802.11g standards.

The ES520 is intended to provide outdoor mobile or fixed connectivity in a secure manner both wired and wirelessly.



Photograph 1. General Dynamics, ES520

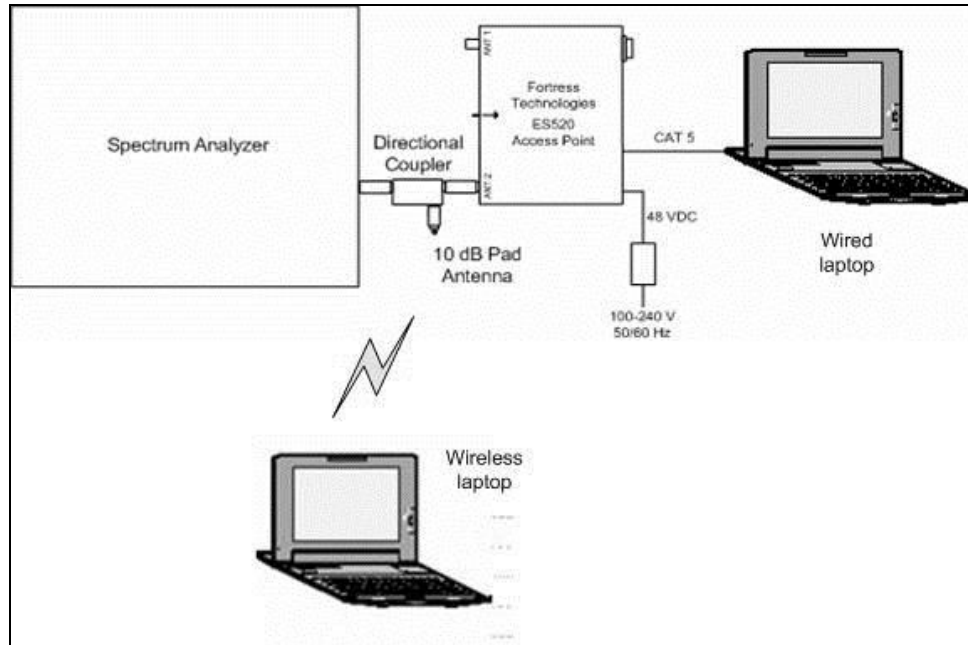


Figure 1. Block Diagram of Equipment Configuration

D. Support Equipment

Ref. ID	Name / Description	Manufacturer	Model Number
--	Laptop for wired connection to EUT	--	--
--	Laptop for wireless connection to EUT	--	--
--	4 GHz – 6 GHz directional coupler	--	--

Table 4. Support Equipment

E. Mode of Operation

When performing conducted tests, the radios were set to transmit and were monitored through a directional coupler that was connected to a wireless access card and a spectrum analyzer. During radiated tests, the radios were paired with a wireless access card and its transmissions were observed. In either case, the EUT was observed for any cessation of transmission.

F. Method of Monitoring EUT Operation

1. If the Status 1 LED is solid green, the EUT is functioning properly.
If the upper Radio 1/Radio2 LED is flashing, the radio is transmitting data.
If the upper Radio 1/Radio2 LED is solid on, the radio is on but not transmitting data.
2. If the Status 1 LED is OFF, the EUT is not functioning properly.
If the upper Radio 1/Radio2 LED is off, the radio is not transmitting data and is either off or disabled.

G. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

H. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to General Dynamics upon completion of testing.

III. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant the criteria of §15.203. The EUT is professionally installed.

Test Engineer(s): Surinder Singh

Test Date(s): 07/20/15

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.403(i) 26 dB Bandwidth


Test Requirements: § 15.403(i): For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.


Test Procedure: The transmitter was set to low, mid, and high operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, VBW > RBW. The 26 dB Bandwidth was measured and recorded.

Test Results The 26 dB Bandwidth was compliant with the requirements of this section.


Test Engineer(s): Surinder Singh

Test Date(s): 07/23/15




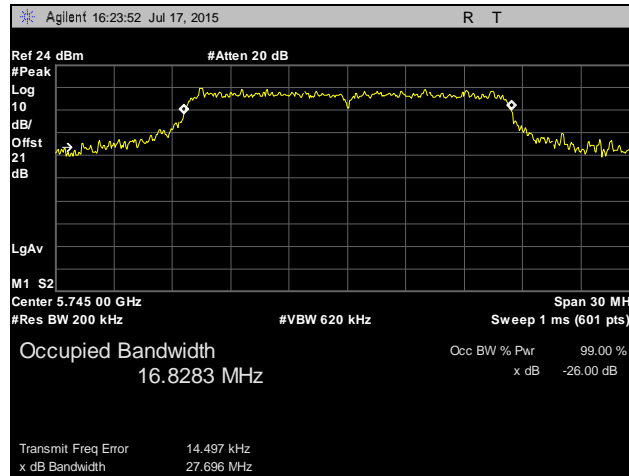

Plot 1. 26 dB Occupied Bandwidth, Low Channel

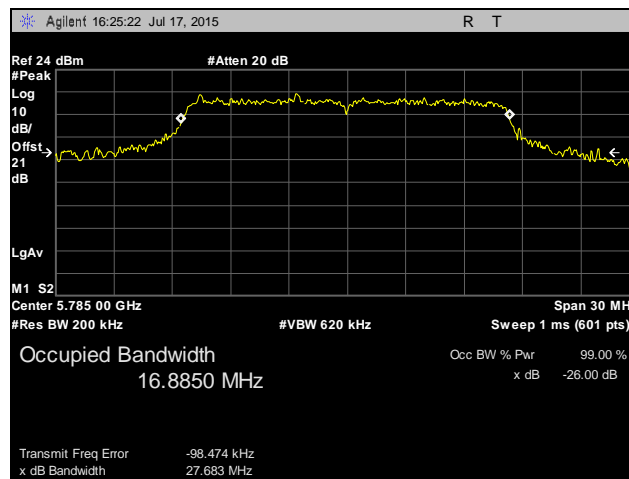

Plot 2. 26 dB Occupied Bandwidth, Mid Channel

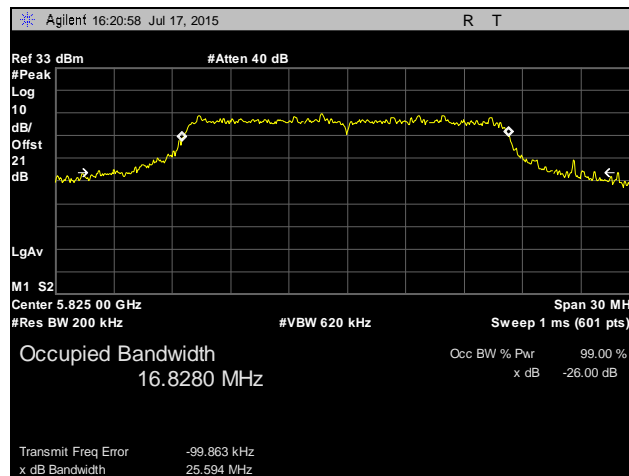

Plot 3. 26 dB Occupied Bandwidth, High Channel

Electromagnetic Compatibility Criteria for Intentional Radiators

§15.407(a)(3) Maximum Conducted Output Power

Test Requirements: §15.407(a)(3): For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.


If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.


Test Procedure: The EUT was connected to a spectrum analyzer through a cable and attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. Its power was measured according to measurement method SA-1, as described in 789033 D02 General UNII Test Procedures v01.

Test Results: The EUT as tested is compliant with the requirements of this section.


Test Engineer(s): Surinder Singh

Test Date(s): 07/23/15




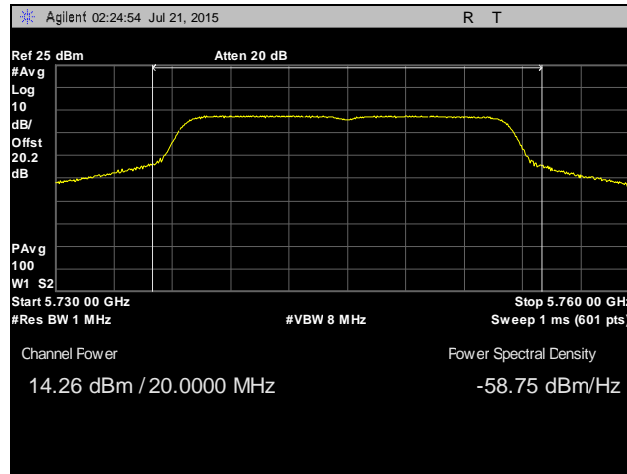

Plot 4. Maximum Conducted Output Power, Low Channel

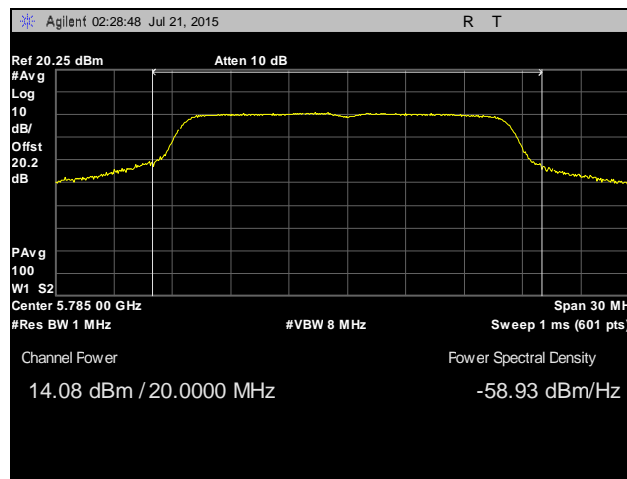

Plot 5. Maximum Conducted Output Power, Mid Channel

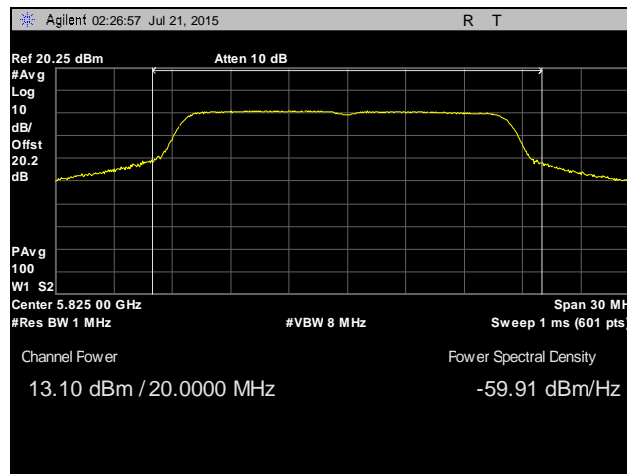

Plot 6. Maximum Conducted Output Power, High Channel

Electromagnetic Compatibility Criteria for Intentional Radiators

§15.407(a)(3) Maximum Power Spectral Density

Test Requirements: §15.407(a)(3): In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.


If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.


Test Procedure: The EUT was connected to a spectrum analyzer through a cable and attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. Its power was measured according KDB 789033 D02 General UNII Test Procedures v01.

Test Results: The EUT as tested is compliant with the requirements of this section.


Test Engineer(s): Surinder Singh

Test Date(s): 07/23/15




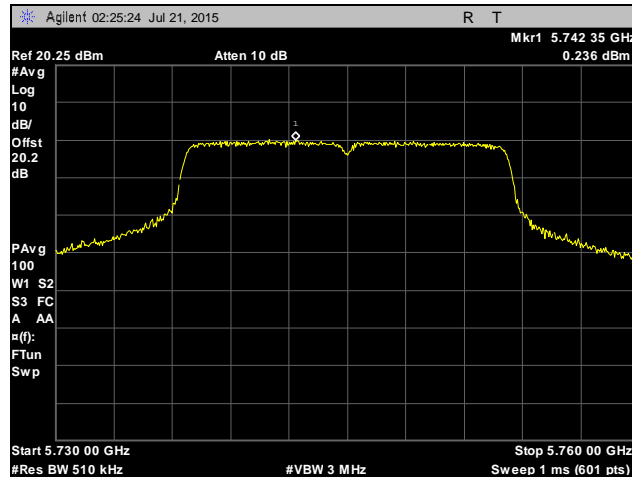

Plot 7. Maximum Power Spectral Density, Low Channel

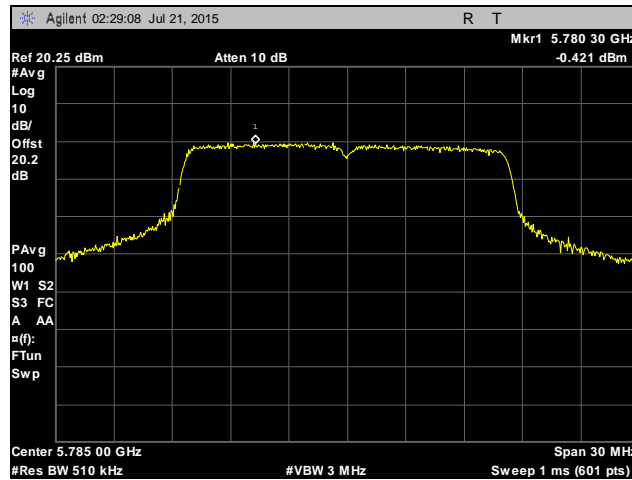

Plot 8. Maximum Power Spectral Density, Mid Channel

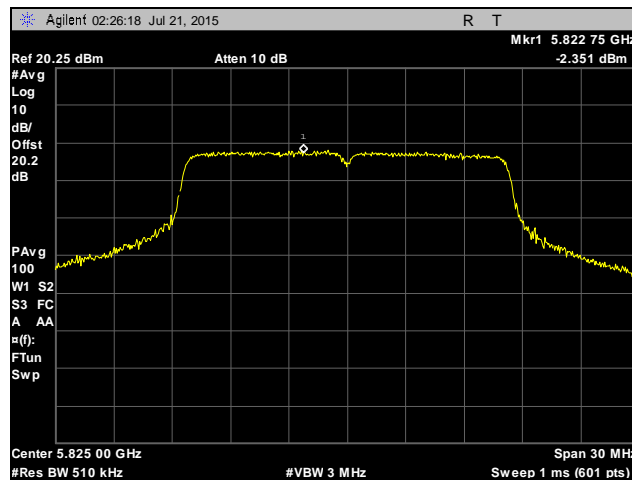

Plot 9. Maximum Power Spectral Density, High Channel

Electromagnetic Compatibility Criteria for Intentional Radiators

§15.407(b)(4) & (6 – 7) Undesirable Emissions

Test Requirements: § 15.407(b)(4): For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

§ 15.407(b)(6): Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

§ 15.407(b)(7): The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Test Procedure: The EUT was placed on a non-conducting stand on a turntable in a chamber. To find the maximum emission the EUT was set to transmit on low, mid, and high channels. Additionally, the turntable was rotated 360 degrees, the EUT was oriented through its three orthogonal axes, and the receive antenna height was varied in order to maximize emissions.

For frequencies from 30 MHz to 1 GHz, measurements were first made using a peak detector with a 100 kHz resolution bandwidth. Emissions which exceeded the limits were re-measured using a quasi-peak detector with a 120 kHz resolution bandwidth.

Above 1 GHz, measurements were made pursuant the method described in FCC KDB 789033 D02 General UNII Test Procedure New Rules v01. The equation, $EIRP = E + 20 \log D - 104.8$ was used to convert field strength to EIRP (E = field strength (dB μ V/m) and D = Reference measurement distance).

For emissions above 1 GHz and in restricted bands, measurements of the field strength were made with a peak detector and an average detector and compared with the limits of 15.209.


Note: Below 1GHz EUT has emission which exceed the FCC 15.209 limit. However, these emissions still present even with radio OFF with same emission profile as with radio ON. The radio is also compliant with digital emission requirement under section 15.109.

Test Results: For below 1 GHz, the EUT was compliant with the requirements of this section based on the fact that source of failing emission came from digital circuit instead of radio itself.


For above 1 GHz, the EUT was compliant with the requirements of this section.

Test Engineer(s): Surinder Singh


Test Date(s): 07/29/15

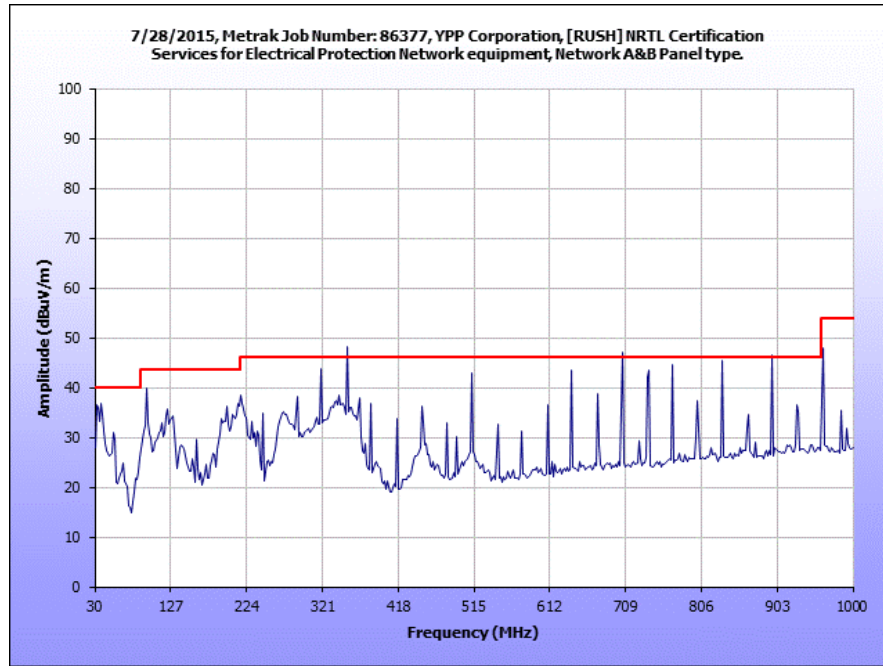


Plot 10. Radiated Spurious Emissions, 30 MHz – 1 GHz, Radio Off

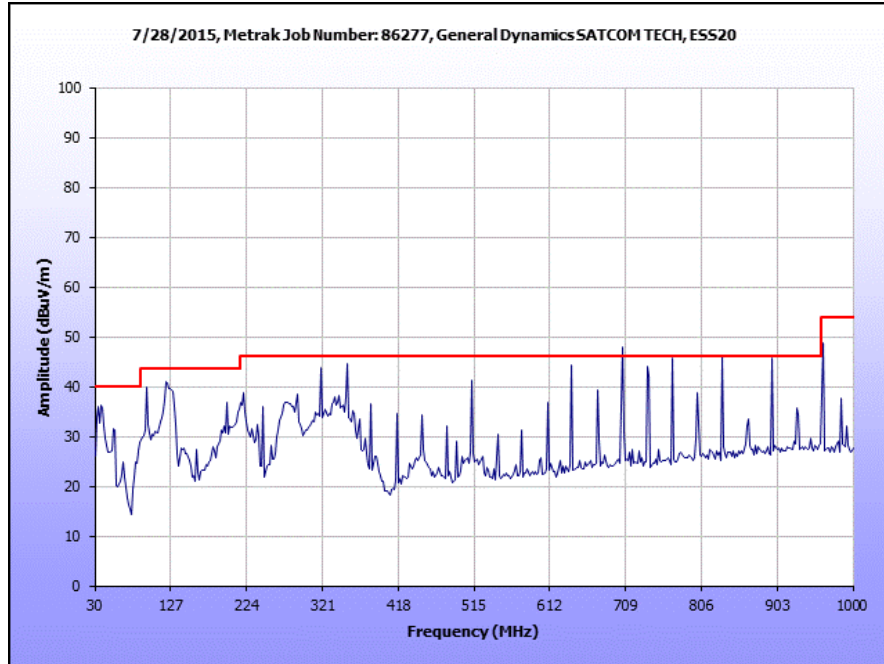


Plot 11. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz

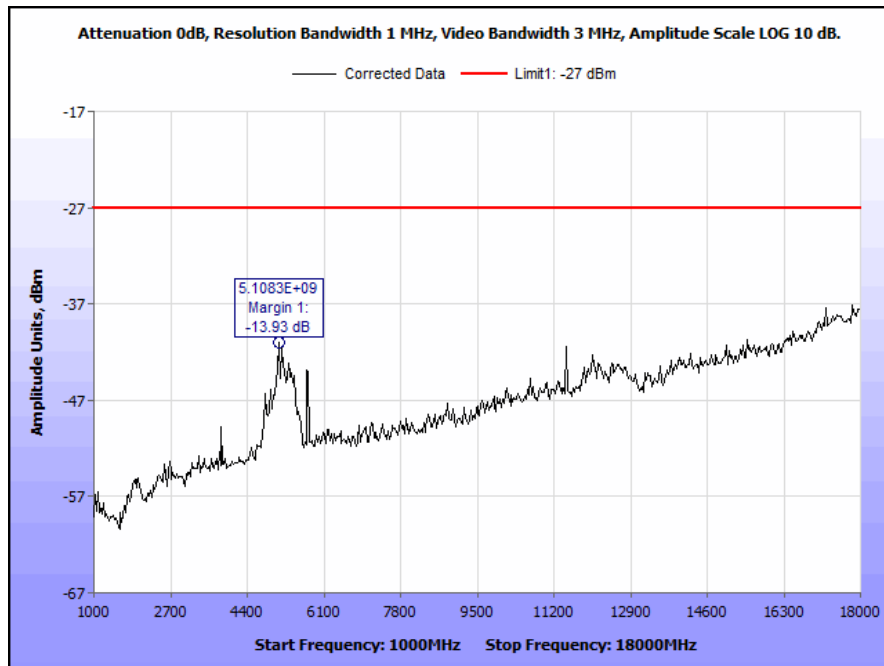


Plot 12. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz

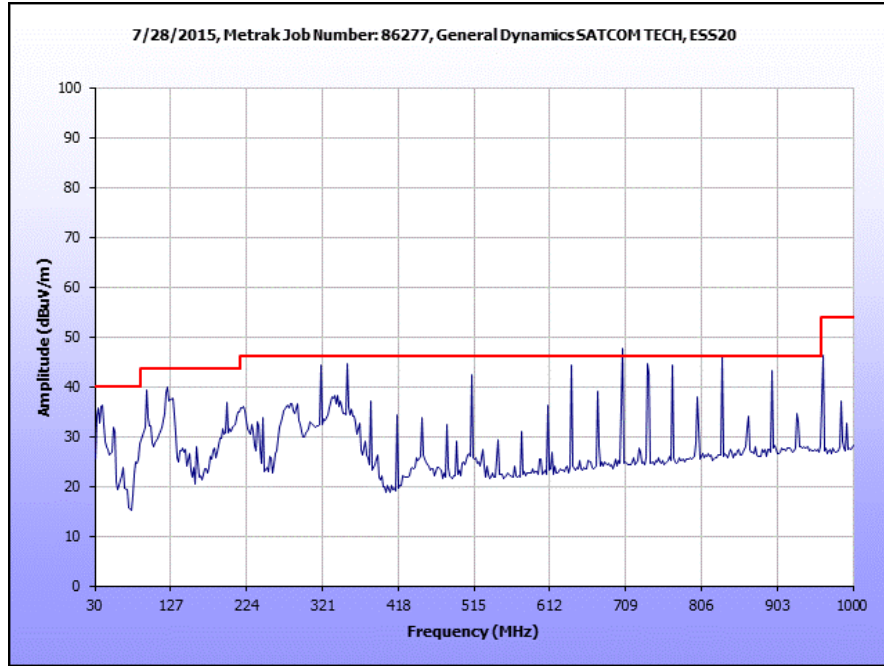


Plot 13. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz

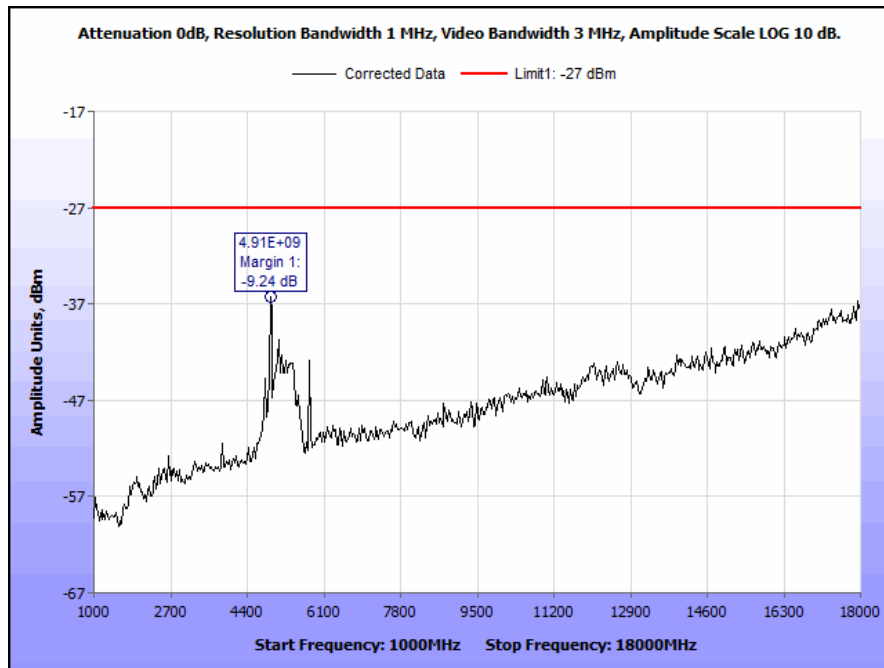


Plot 14. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz

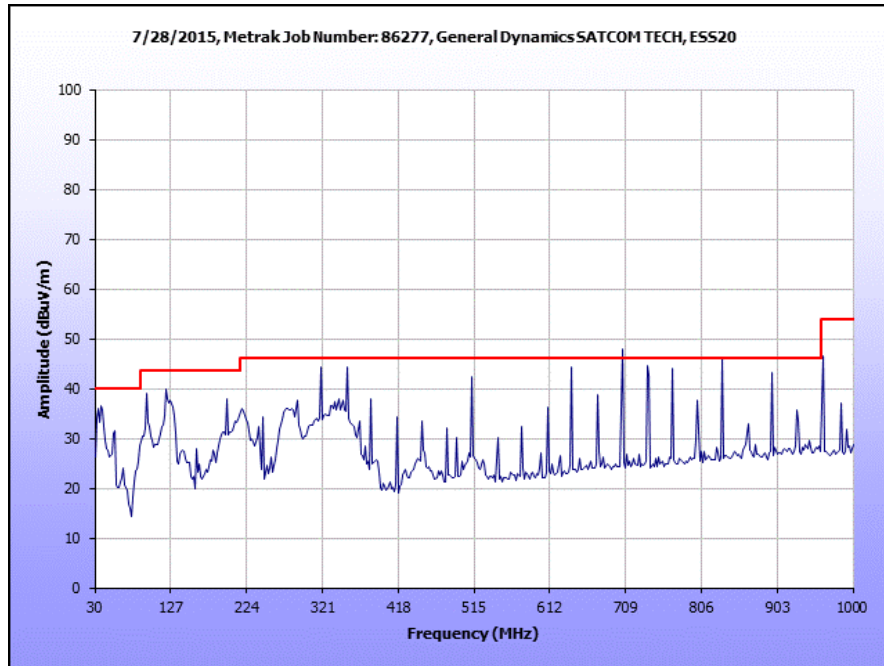


Plot 15. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz

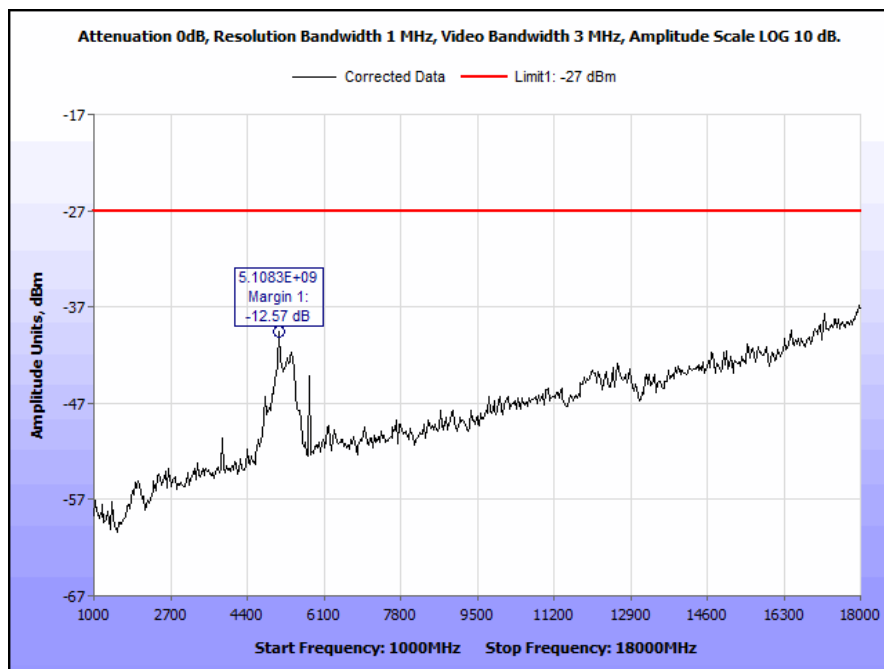


Plot 16. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz

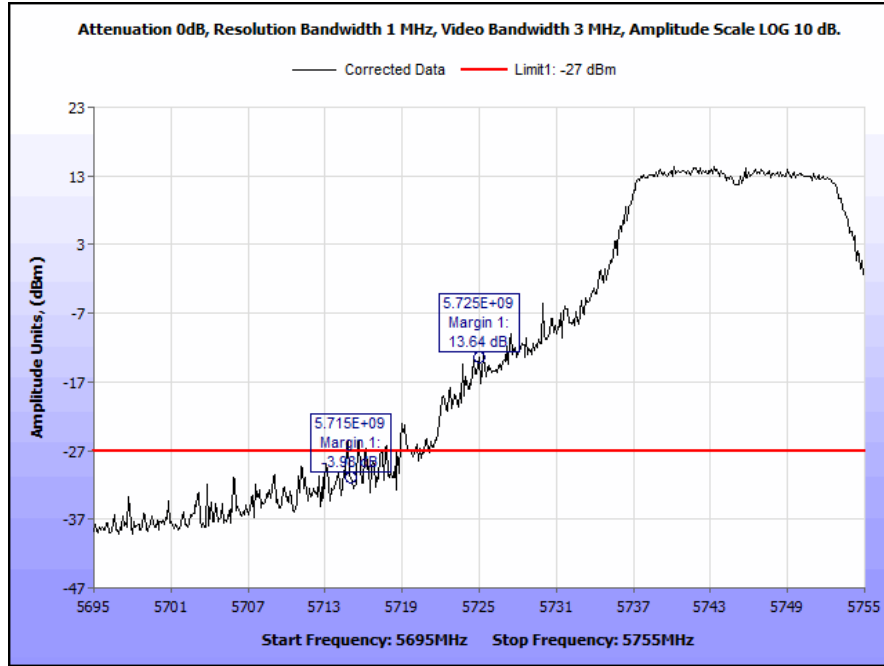


Plot 17. Radiated Band Edge, Low Channel

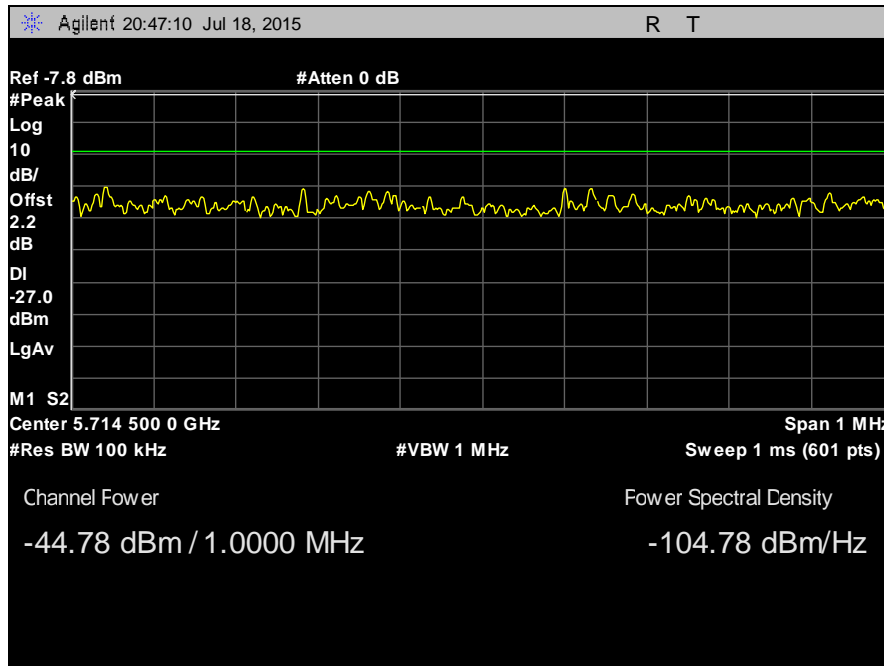


Plot 18. Radiated Band Edge, Integration Method, Low Channel, 5715 MHz

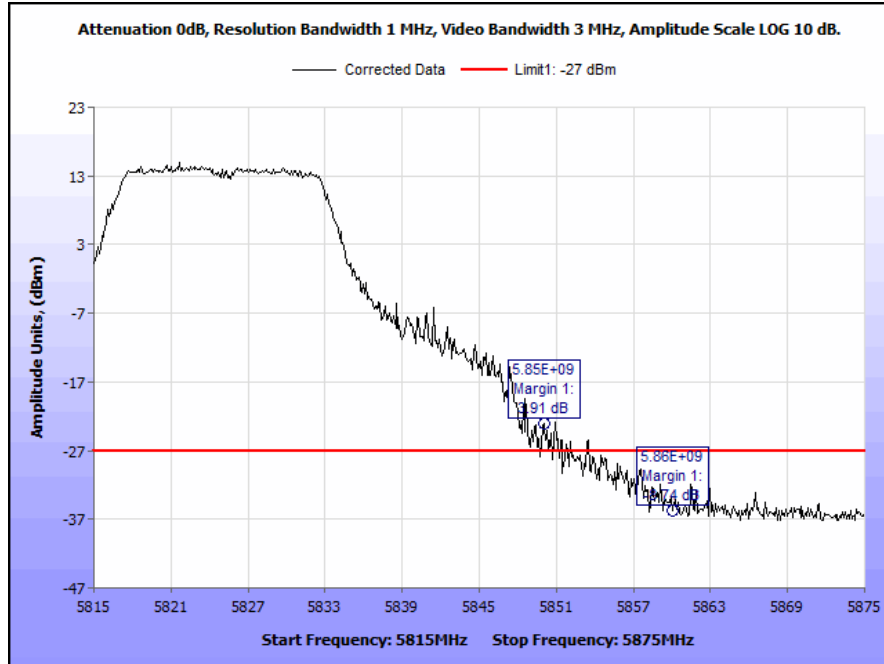

Plot 19. Radiated Band Edge, High Channel

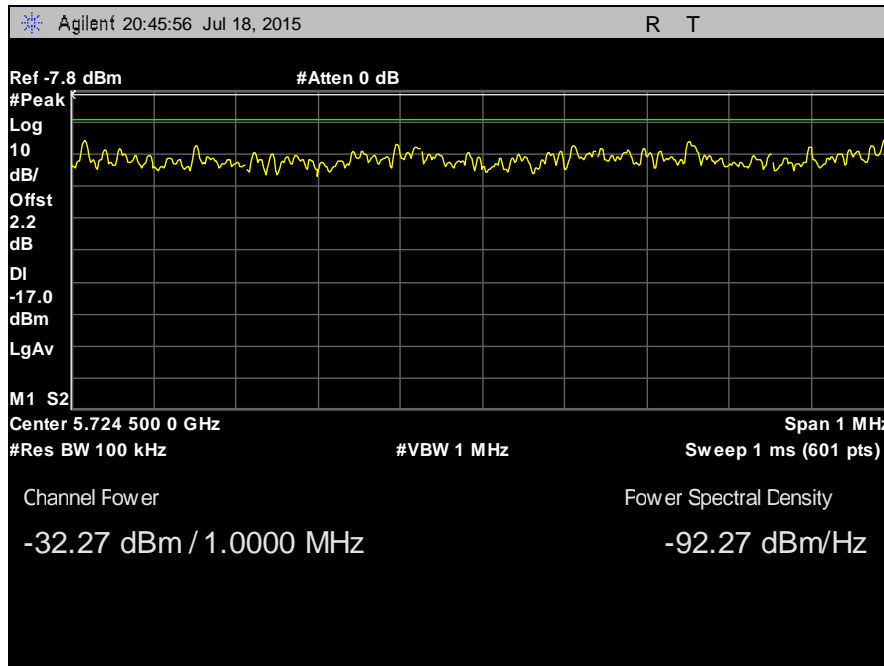

Plot 20. Radiated Band Edge, Integration Method, High Channel, 5725 MHz

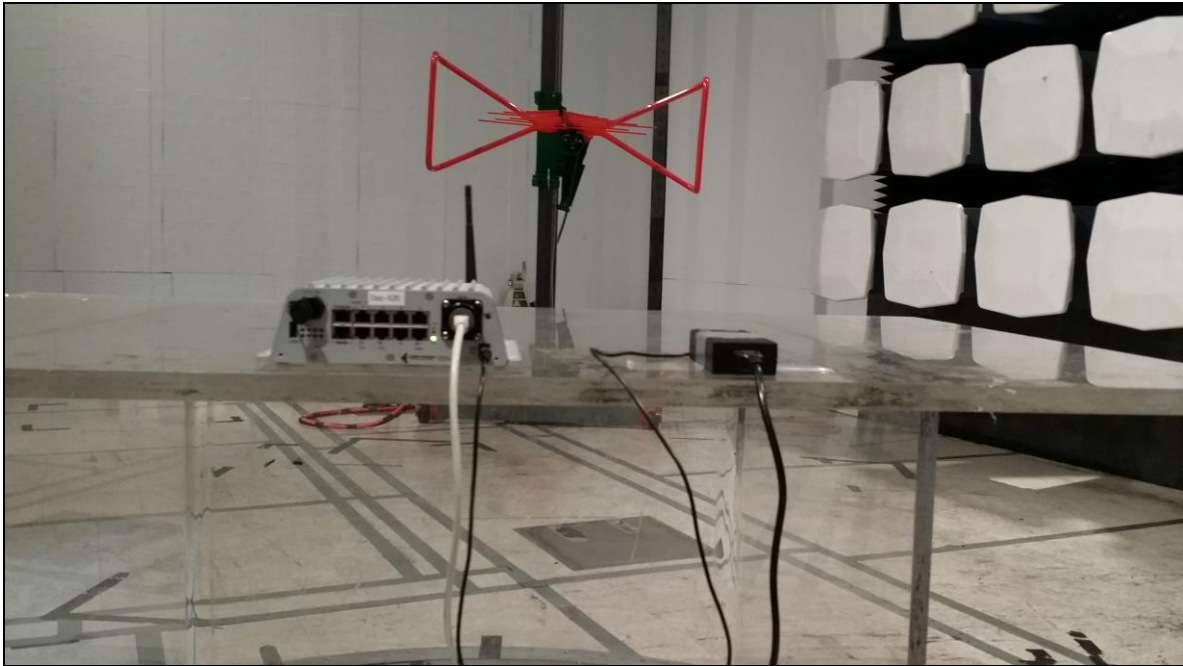

Photograph 2. Radiated Spurious Emissions, Test Setup, 30 MHz – 1 GHz



Photograph 3. Radiated Spurious Emissions, Test Setup, 1 GHz – 18 GHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(b)(6) Conducted Emissions

Test Requirement(s): § 15.407 (b)(6): Any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

§ 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Σ line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 – 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Table 5. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure: The EUT was placed on a non-metallic table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with ANSI C63.4-2014 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz". Scans were performed with the transmitter on.

Test Results: The EUT was compliant with requirements of this section.

Test Engineer(s): Surinder Singh


Test Date(s): 07/29/15

Frequency (MHz)	Uncorrected Meter Reading (dB μ V) QP	Cable Loss (dB)	Corrected Measurement (dB μ V) QP	Limit (dB μ V) QP	Margin (dB) QP	Uncorrected Meter Reading (dB μ V) Avg.	Cable Loss (dB)	Corrected Measurement (dB μ V) AVG	Limit (dB μ V) AVG	Margin (dB) AVG
0.16	49.51	0	49.51	65.46	-15.95	21.65	0	21.65	55.46	-33.81
0.3	44.61	0	44.61	60.24	-15.63	20.17	0	20.17	50.24	-30.07
3.16	35.16	0	35.16	56	-20.84	21.43	0	21.43	46	-24.57
4.64	39.65	0.17	39.82	56	-16.18	18.75	0.17	18.92	46	-27.08
8.94	32.64	0.17	32.81	60	-27.19	19.38	0.17	19.55	50	-30.45


Table 6. Conducted Emissions, Test Results, Phase Line

Frequency (MHz)	Uncorrected Meter Reading (dB μ V) QP	Cable Loss (dB)	Corrected Measurement (dB μ V) QP	Limit (dB μ V) QP	Margin (dB) QP	Uncorrected Meter Reading (dB μ V) Avg.	Cable Loss (dB)	Corrected Measurement (dB μ V) AVG	Limit (dB μ V) AVG	Margin (dB) AVG
0.16	48.91	0	48.91	65.46	-16.55	19.82	0	19.82	55.46	-35.64
0.35	41.16	0	41.16	58.96	-17.8	16.54	0	16.54	48.96	-32.42
3.49	32.94	0	32.94	56	-23.06	18.94	0	18.94	46	-27.06
4.94	38.75	0.05	38.8	56	-17.2	17.64	0.05	17.69	46	-28.31
8.94	30.12	0.17	30.29	60	-29.71	18.93	0.17	19.1	50	-30.9


Table 7. Conducted Emissions, Test Results, Neutral Line

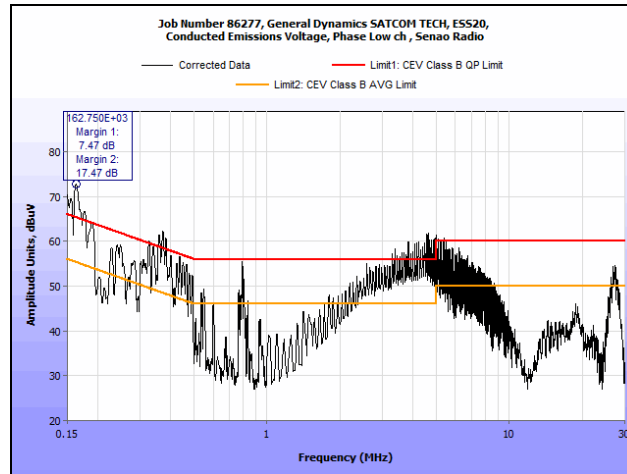


Plot 21. Conducted Emissions, Phase Line, Low Channel

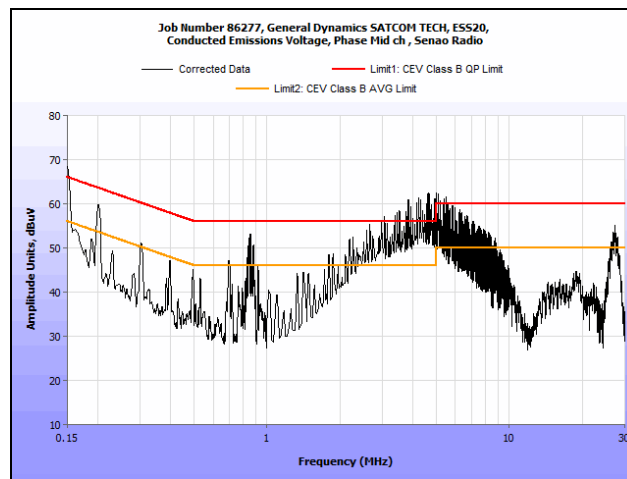


Plot 22. Conducted Emissions, Phase Line, Mid Channel

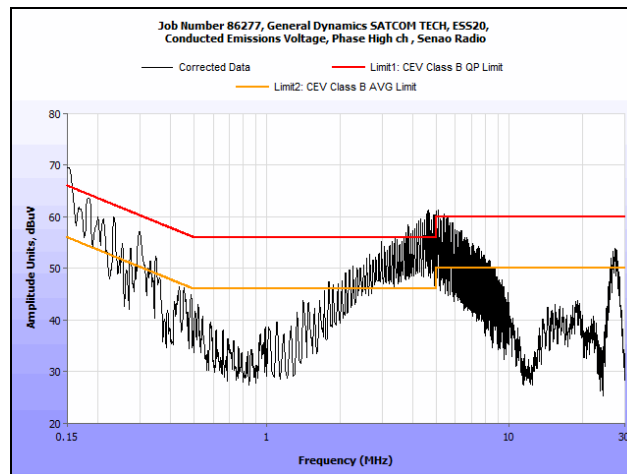


Plot 23. Conducted Emissions, Phase Line, High Channel

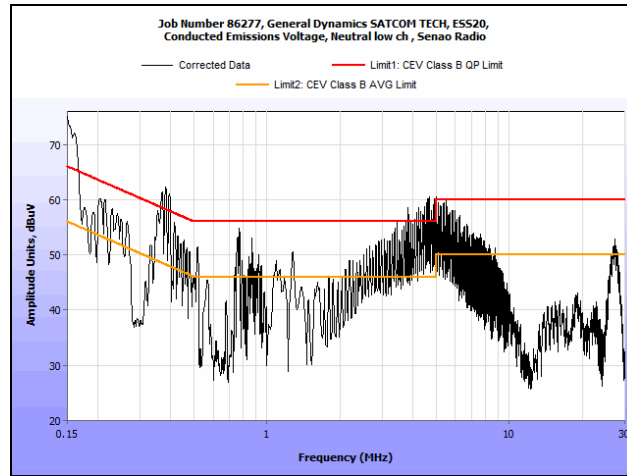

Plot 24. Conducted Emissions, Neutral Line, Low Channel

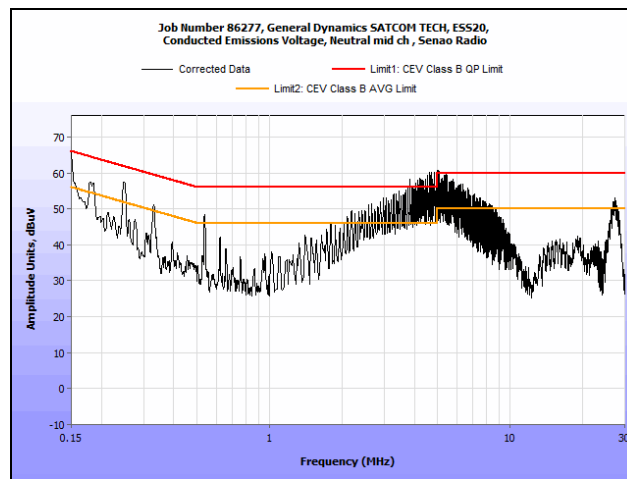

Plot 25. Conducted Emissions, Neutral Line, Mid Channel

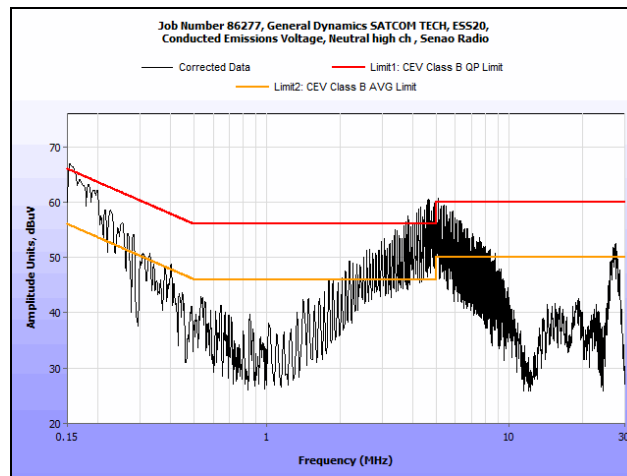

Plot 26. Conducted Emissions, Neutral Line, High Channel



Photograph 4. Conducted Emissions, Test Setup

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(c) Automatic Discontinue of Transmission

Test Requirement(s): § 15.207 (c): The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Test Results: The EUT was compliant with the requirement of this section per customer declaration.

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(e) 6 dB Bandwidth

Test Requirements: § 15.407(e): Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.


Test Procedure: The transmitter was set to low, mid, and high operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, VBW > RBW. The 6 dB Bandwidth was measured and recorded.

Test Results The 6 dB Bandwidth was compliant with the requirements of this section.


Test Engineer(s): Surinder Singh

Test Date(s): 07/23/15




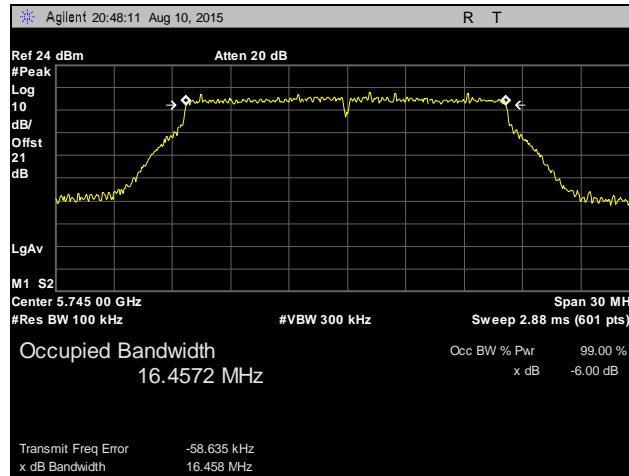

Plot 27. 6 dB Occupied Bandwidth, Low Channel

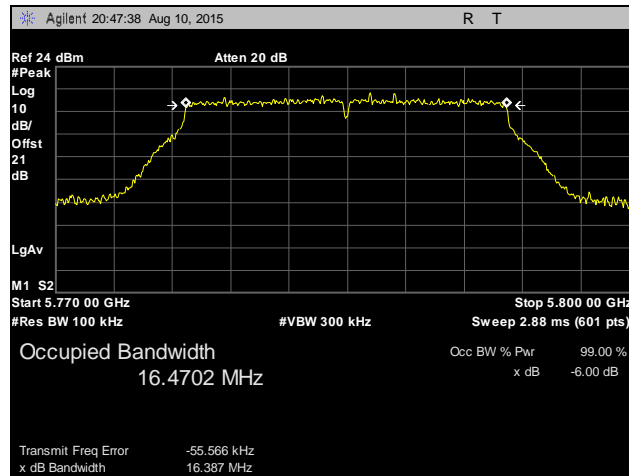

Plot 28. 6 dB Occupied Bandwidth, Mid Channel

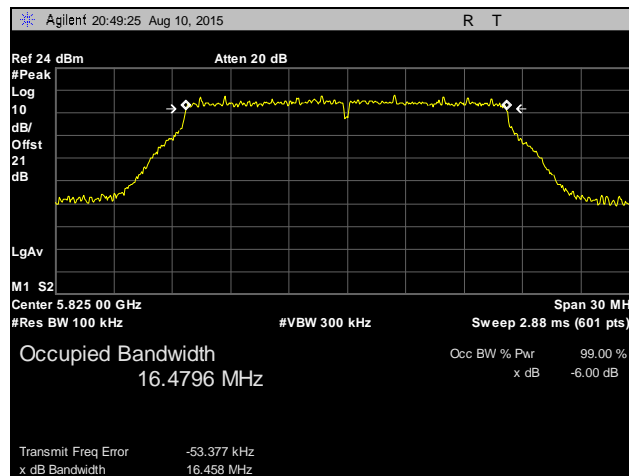

Plot 29. 6 dB Occupied Bandwidth, High Channel

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(f) RF Exposure

Test Requirement(s): §15.407(f): U-NII devices are subject to the radio frequency radiation exposure requirements specified in §1.1307(b), §2.1091 and §2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a “general population/uncontrolled” environment.

RF Exposure Requirements: §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission’s guidelines.

RF Radiation Exposure Limit: §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT’s operating frequencies @ 5745-5825 MHz; **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density

P = Power Input to antenna = 14.26

G = Antenna Gain = 9dBi

R = Minimum Distance between User and Antenna (20 cm)

Output Power = 14.26 dBm

Antenna Gain = 9 dBi

Power density is equal to 0.042 mW/cm².

At a distance of 20 cm.

Since $S < 1 \text{ mW/cm}^2$, the minimum distance (R) is 20cm

IV. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4870	THERM./CLOCK/HUMIDITY MONITOR	CONTROL COMPANY	06-662-4, FB70258	3/14/2014	3/14/2016
1T4829	SPECTRUM ANALYZER	AGILENT	E4407B	9/30/2014	3/30/2016
1T4818	COMB GENERATOR	COM-POWER	CGO-520	SEE NOTE	
1T4751	ANTENNA - BILOG	SUNOL SCIENCES	JB6	7/29/2014	1/29/2016
1T4564	LISN (24 AMP)	Solar Electronics	9252-50-R-24-BNC	7/1/2015	7/1/2016
1T4505	TEMPERATURE CHAMBER	TEST EQUITY	115	2/11/2015	2/11/2016
1T4483	ANTENNA; HORN	ETS-LINDGREN	3117	2/28/2014	8/28/2015
1T4442	PRE-AMPLIFIER, MICROWAVE	MITEQ	AFS42-01001800-30-10P	SEE NOTE	
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	7/18/2014	7/18/2016
1T4300A	SEMI-ANECHOIC CHAMBER # 1 (FCC)	EMC TEST SYSTEMS	NONE	1/31/2014	1/31/2017
1T4149	HIGH-FREQUENCY ANECHOIC CHAMBER	RAY-PROOF	81	NOT REQUIRED	
1T2665	ANTENNA; HORN	EMCO	3115	4/3/2014	10/3/2015

Table 8. Test Equipment List

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

V. Certification & User's Manual Information

Certification & User's Manual Information

I. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
- (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
- (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
- (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
- (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

End of Report