

# SAR TEST REPORT

Equipment Under Test	:	FM Transceiver
Model No.	:	LXT600
Applicant	:	Midland Radio Corporation
Address of Applicant	:	5900 Parretta Drive Kansas City Missouri United States 64120
FCC ID	:	MMALXT600
IC ID	:	3690A-LXT600
Device Category	:	Portable Device
Exposure Category	:	General Population /Uncontrolled Exposure
Date of Receipt	:	2012-01-18
Date of Test(s)	:	2012-04-09, 2012-04-10
Date of Issue	:	2012-04-25
Max. SAR	:	0.2805 W/kg (Head 50 % Duty Cycle) 0.8700 W/kg (Body 50 % Duty Cycle)

**Standards:**                    **FCC OET Bulletin 65 supplement C**  
                                       **RSS-102 (Issue 4)**  
                                       **IEEE 1528, 2003**  
                                       **ANSI/IEEE C95.1, C95.3**

In the configuration tested, the EUT complied with the standards specified above.

**Remarks:**

---

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Testing Korea Co., Ltd. or testing done by SGS Testing Korea Co., Ltd. in connection with distribution or use of the product described in this report must be approved by SGS Testing Korea Co., Ltd. in writing.

---

<b>Tested by</b>	:	<b>Fred Jeong</b> 	<b>2012-04-25</b>
<b>Approved by</b>	:	<b>Charles Kim</b> 	<b>2012-04-25</b>

## **Contents**

### **1. General Information**

1.1	Testing Laboratory.....	3
1.2	Details of Applicant.....	3
1.3	Version of Report.....	3
1.4	Description of EUT(s).....	3
1.5	Test Environment.....	4
1.6	Operation description.....	4
1.7	Evaluation procedures.....	5
1.8	The SAR Measurement System.....	6
1.9	System Components.....	8
1.10	SAR System Verification.....	9
1.11	Tissue Simulant Fluid for the Frequency Band.....	11
1.12	Tissue Parameters Check Results .....	12
1.13	Test Standards and Limits.....	12
<b>2. Instruments List.....</b>		<b>14</b>
<b>3. Summary of Results.....</b>		<b>16</b>

## **APPENDIX**

- A. DASY4 SAR Report
- B. Uncertainty Analysis
- C. Calibration certificate

# 1. General Information

## 1.1 Testing Laboratory

SGS Korea Co., Ltd.  
 Wireless Div. 2FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea 435-040  
 Telephone : +82 +31 428 5700  
 FAX : +82 +31 427 2371  
 Homepage : [www.ee.sgs.com/Korea](http://www.ee.sgs.com/Korea)

## 1.2 Details of Applicant

Manufacturer : Midland Radio Corporation  
 Address : 5900 Parretta Drive Kansas City Missouri United States 64120  
 Contact Person : David Kingsolver  
 Phone No. : 816-241-8500  
 Fax No. : 816-241-8500  
 E-mail : davidk@midlandradio.com

## 1.3 Version of Report

Version Number	Date	Revision
00	2012-04-25	Initial issue

## 1.4 Description of EUT(s)

<b>EUT Type</b>	: FM Transceiver
<b>Model</b>	: LXT600
<b>Serial Number</b>	: N/A
<b>Mode of Operation</b>	: GMRS, FRS
<b>Body worn Accessory</b>	: Belt Clip
<b>Tx Frequency Range</b>	: GMRS (462.5500 MHz ~ 462.7250 MHz) FRS (467.5625 MHz ~ 467.7125 MHz)
<b>Antenna</b>	: Fixed Type
<b>E.R.P</b>	: GMRS : <b>0.101 4 W</b> (High power) GMRS : <b>0.081 7 W</b> (Low power) FRS : <b>0.077 8 W</b>
<b>Battery Type</b>	: 3 × AAA Alkaline(4.5 V) / Rechargeable Ni-MH battery pack (3.6 V)

### 1.5 Test Environment

Ambient temperature	: (22 ± 2) ° C
Tissue Simulating Liquid	: (22 ± 2) ° C
Relative Humidity	: (55 ± 5) % R.H.

### 1.6 Operation Configuration

#### Reference Positions for Handheld Radio Transmitters

In general handheld radio transmitters like GMRS/FRS/LMR devices are used in held to face position or with a speaker/microphone combination as body-worn configuration.

#### Held to face position

For held to face position the flat section of a SAM Phantom or a flat phantom is used.

The center of the radiating structure is to set on the middle position of the flat phantom. The distance between sample and flat phantom is 2.5 cm.

For the measurement head tissue simulating liquid is used.

#### Belt Clip/Holster Configuration

Test configurations for body-worn operated EUTs are carried out while the belt-clip and/or holster is attached to the EUT and placed against a flat phantom in a regular configuration. An EUT with a headset output it tested with a headset connected to the device.

Body dielectric parameters are used.

There are two categories for accessories for body-worn operation configurations:

1. accessories not containing metallic components
2. accessories containing metallic components.

When the EUT is equipped with accessories not containing metallic components the tests are done with the accessory that dictates the closest spacing to the body. For accessories containing metallic parts a test with each one is implemented. If the multiple accessories share an identical metallic component (e.g. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that has the closest spacing to the body is tested.

In case that a EUT authorized to be body-worn is not supplied or has no options to be operated with any accessories, a test configuration where a separation distance between the back of the device and the flat phantom is used. All test position spacings are documented.

Transmitters operating in front of a person's face (e.g. push-to-talk configurations) are tested for SAR compliance with the front of the device positioned to face the flat platform. SAR Compliance tests for shoulder, waist or chest-worn transmitters are carried out with the accessories including headsets and microphones attached to the device and placed against a flat phantom in a regular configuration.

The SAR measurements are performed to investigate the worst-case positioning. This is documented and used to perform Body SAR testing. [2]. Body tissue simulating liquid is used.

## 1.7 EVALUATION PROCEDURES

### - Power Reference Measurement Procedures

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 4 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties (for example, 2.7 mm for an ET3DV6 probe type).

- The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan.
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7 mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in

two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30x30x30 mm contains about 30g of tissue. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

### 1.8 The SAR Measurement System

A photograph of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system ( Speag Dasy 4 professional system ). A Model ET3DV6 1782 E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation  $SAR = \sigma (|E_i|^2) / \rho$  where  $\sigma$  and  $\rho$  are the conductivity and mass density of the tissue-simulant. The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimeter probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

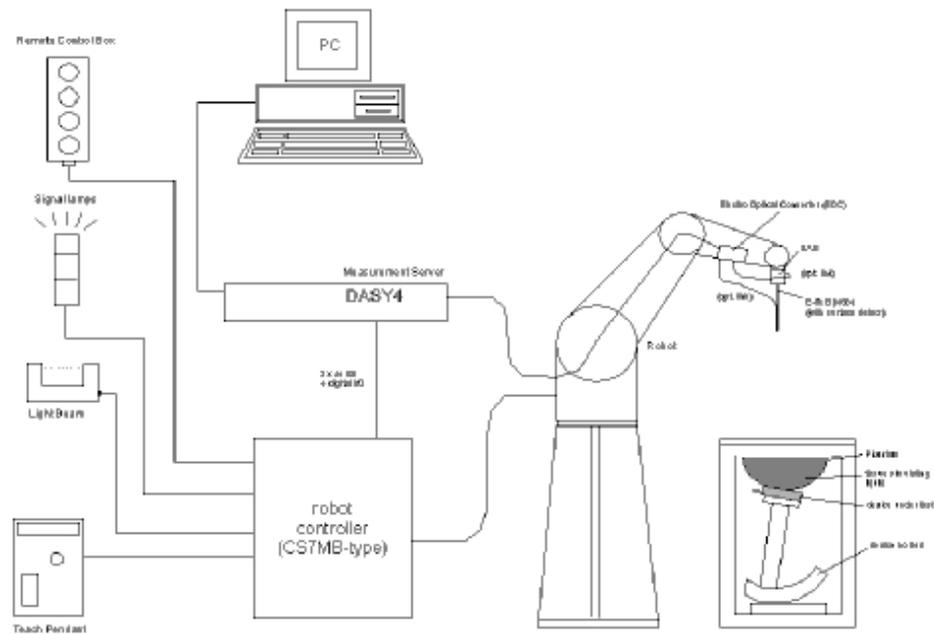



Fig a. The microwave circuit arrangement used for SAR system verification

- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

## 1.9 System Components

### ET3DV6 E-Field Probe

<b>Construction</b>	: Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g. glycol).
<b>Calibration</b>	: In air from 10 MHz to 2.5 GHz In brain simulating tissue (accuracy $\pm 8\%$ )
<b>Frequency</b>	: 10 MHz to >6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 3 GHz)
<b>Directivity</b>	: $\pm 0.2$ dB in brain tissue (rotation around probe axis) $\pm 0.4$ dB in brain tissue (rotation normal to probe axis)
<b>Dynamic Range</b>	: $5 \mu\text{W/g}$ to $>100 \text{ mW/g}$ ; Linearity: $\pm 0.2$ dB
<b>Srfce. Detect</b>	: $\pm 0.2$ mm repeatability in air and clear liquids over diffuse reflecting surfaces
<b>Dimensions</b>	: Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
<b>Application</b>	: General dosimetry up to 3 GHz Compliance tests of mobile phone

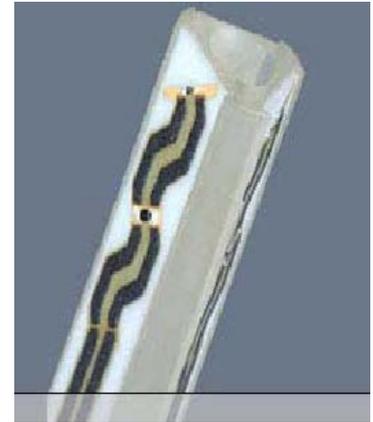

ET3DV6 E-Field Probe

#### NOTE:

1. The Probe parameters have been calibrated by the SPEAG. Please reference "APPENDIX C" for the Calibration Certification Report.

## SAM Phantom

**Construction:** The SAM Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot

**Shell Thickness:**  $2.0 \pm 0.1$  mm  
**Filling Volume:** Approx. 25 liters



SAM Phantom

## DEVICE HOLDER

**Construction** In combination with the Twin SAM Phantom V4.0/V4.0C or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Device Holder

### 1.10 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within  $\pm 10\%$  from the target SAR values. This test was done at 450 MHz. The test for EUT was conducted within 24 hours after each validation. The obtained result from the system accuracy verification is displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the test, the ambient temperature of the laboratory was in the range  $(22 \pm 2)^\circ\text{C}$ , the relative humidity was in the range  $(55 \pm 5)\%$  R.H. and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the result is within acceptable tolerance of the reference value.

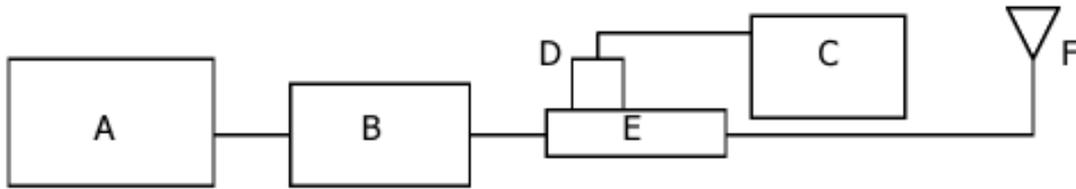


Fig b. The microwave circuit arrangement used for SAR system verification

- A. Agilent Model E4421B Signal Generator
- B. EMPOWER Model 2001-BBS3Q7ECK Amplifier
- C. Agilent Model E4419B Power Meter
- D. Agilent Model 9300H Power Sensor
- E. Agilent Model 777D/778D Dual directional coupling
- F. Reference dipole Antenna



Photo of the dipole Antenna

### System Validation Results

Validation Kit	Tissue	Target SAR 1g from Calibration Certificate (398 mW)	Measured SAR 1 g (398 mW)	Deviation (%)	Date	Liquid Temp. (°C)
D450V2 S/N: 1015	450 MHz Head	1.95 mW/g	1.93 mW/g	<b>-1.03</b>	2012-04-10	22.3
D450V2 S/N: 1015	450 MHz Body	1.89 mW/g	1.89 mW/g	<b>0.00</b>	2012-04-09	22.3

Table 1. Results system validation

### 1.11 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this simulant fluid were measured by using the Agilent Model 85070D Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Agilent E5070B Network Analyzer(300 KHz-3000 MHz ) by using a procedure detailed in Section V.

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			Permittivity	Conductivity	Simulated Tissue Temp( °C)
450	Head	Measured, 2012-04-10	<b>43.8</b>	<b>0.84</b>	<b>22.3</b>
		Recommended Limits	43.5	0.87	21.0 ~ 23.0
		Deviation(%)	0.69	-3.45	-
	Body	Measured, 2012-04-09	<b>54.2</b>	<b>0.93</b>	<b>22.3</b>
		Recommended Limits	56.7	0.94	21.0 ~ 23.0
		Deviation(%)	4.41	-1.06	-

The composition of the brain tissue simulating liquid

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.5	56.7	41.5	55.2	42.0	56.8	40.0	53.3	39.2	52.7
Conductivity (S/m)	0.87	0.94	0.90	0.97	1.0	1.07	1.40	1.52	1.80	1.95

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ<sup>+</sup> resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

### 1.12 Tissue Parameters Check Results

450 MHz Head Parameters					450 MHz Body Parameters				
Limits	43.50		0.87		Limits	56.70		0.94	
Frequency	e'	(%)	e''	(%)	Frequency	e'	(%)	e''	(%)
450.000	43.80	0.690	0.841	-3.333	450.000	54.20	-4.409	0.927	-1.383
460.000	43.61	0.253	0.849	-2.414	460.000	54.04	-4.691	0.935	-0.532
462.550	43.50	0.000	0.851	-2.184	462.550	54.00	-4.762	0.938	-0.213
462.637	43.50	0.000	0.851	-2.184	462.637	54.00	-4.762	0.938	-0.213
462.725	43.50	0.000	0.851	-2.184	462.725	54.00	-4.762	0.938	-0.213
463.000	43.53	0.069	0.851	-2.184	463.000	53.99	-4.780	0.938	-0.213
464.000	43.51	0.023	0.852	-2.069	464.000	53.97	-4.815	0.939	-0.106
465.000	43.49	-0.023	0.853	-1.954	465.000	53.94	-4.868	0.940	0.000
466.000	43.47	-0.069	0.854	-1.839	466.000	53.93	-4.885	0.941	0.106
467.000	43.44	-0.138	0.855	-1.724	467.000	53.91	-4.921	0.942	0.213
467.562	43.40	-0.230	0.855	-1.724	467.562	53.90	-4.938	0.942	0.213
467.637	43.40	-0.230	0.855	-1.724	467.637	53.90	-4.938	0.942	0.213
467.712	43.40	-0.230	0.855	-1.724	467.712	53.90	-4.938	0.942	0.213
468.000	43.42	-0.184	0.855	-1.724	468.000	53.88	-4.974	0.943	0.319
469.000	43.39	-0.253	0.856	-1.609	469.000	53.88	-4.974	0.943	0.319

### 1.13 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (“SAR”) in Section 4.2 of “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz,” ANSI/IEEE C95.3–2003, Copyright 2003 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in “Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields,” NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

(1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not

exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube). Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

(2) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.(Table .4)

<b>Human Exposure</b>	<b>Uncontrolled Environment General Population</b>	<b>Controlled Environment Occupational</b>
<b>Partial Peak SAR</b> (Partial)	1.60 m W/g	8.00 m W/g
<b>Partial Average SAR</b> (Whole Body)	0.08 m W/g	0.40 m W/g
<b>Partial Peak SAR</b> (Hands/Feet/Ankle/Wrist)	4.00 m W/g	20.00 m W/g

Table .4 RF exposure limits

## 2. Instruments List

Manufacturer	Device	Type	Serial Number	Last Calibration	Due date of Calibration
Stäubli	Robot	RX90BL	F03/5W05A1/A/01	N/A	N/A
Schmid & Partner Engineering AG	Dosimetric E-Field Probe	ET3DV6	1782	April 14, 2011	April 14, 2012
Schmid & Partner Engineering AG	450 MHz System Validation Dipole	D450V2	1015	August 22, 2011	August 22, 2013
Schmid & Partner Engineering AG	Data acquisition Electronics	DAE3	567	January 20, 2012	January 20, 2013
Schmid & Partner Engineering AG	Software	DASY 4 V4.7	-	N/A	N/A
Schmid & Partner Engineering AG	Mounting Device	Mounting Device V4.0	0307171	N/A	N/A
Schmid & Partner Engineering AG	Phantom	SAM Phantom V4.0	TP-1645 TP-1300	N/A	N/A
Agilent	Network Analyzer	E5070B	MY42100282	January 03, 2012	January 03, 2013
Agilent	Dielectric Probe Kit	85070D	2184	N/A	N/A
Agilent	Power Meter	E4419B	GB43311125	July 05, 2011	July 05, 2012
Agilent	Power Sensor	E9300H	MY41495307	September 29, 2011	September 29, 2012
			MY41495308	September 29, 2011	September 29, 2012
Agilent	Signal Generator	E4421B	MY43350132	July 05, 2011	July 05, 2012
Empower RF Systems	Power Amplifier	2001-BBS3Q7ECK	1029 D/C 0341	April 03, 2012	April 03, 2013
Empower RF Systems	Power Amplifier	2092-BBS5K8CAJ	1010	September 06, 2011	September 06, 2012
R & S	Spectrum Analyzer	FSV30	100768	March 29, 2012	March 29, 2013
Agilent	Dual Directional Coupler	778D	50454	July 07, 2011	July 07, 2012
Agilent	Directional RF Bridges	86205A	MY31402302	July 12, 2011	July 12, 2012

Microlab	LP Filter	LA-07N	N/A	September 01, 2011	September 01, 2012
Agilent	Attenuator	8491B	50566	September 29. 2011	September 29. 2012
Jump	Hygro Thermometer	RT-811E	N/A	April 02, 2012	April 02, 2013
SGS Korea	Head/Muscle 450 MHz	H/M 450 MHz	N/A	N/A	N/A

### 3.Summary of Results

\* Conducted Power Table

Mode	Channel	Frequency(MHz)	High /Low	Output Power(dB m)	
				DC 4.5 V	DC 3.6 V
GMRS	1	462.5625	High	29.13	27.23
			Low	25.66	24.50
	2	462.5875	High	29.17	27.19
			Low	25.58	24.42
	3	462.6125	High	29.16	27.04
			Low	25.82	24.69
	4	462.6375	High	29.12	27.11
			Low	25.73	24.66
	5	462.6625	High	29.06	27.00
			Low	26.02	24.80
	6	462.6875	High	29.16	27.22
			Low	25.76	24.83
	7	462.7125	High	29.21	27.11
			Low	26.02	24.77
FRS	8	467.5625	N/A	<b>25.28</b>	24.07
	9	467.5875		24.31	23.37
	10	467.6125		24.66	23.60
	11	467.6375		24.62	23.78
	12	467.6625		25.01	23.90
	13	467.6875		25.02	24.03
	14	467.7125		25.05	24.03
GMRS	15	462.5500	High	29.10	27.09
			Low	26.00	24.87
	16	462.5750	High	29.18	27.14
			Low	26.24	24.79
	17	462.6000	High	29.14	27.13
			Low	25.99	24.80
	18	462.6250	High	29.28	27.34
			Low	26.15	24.83
	19	462.6500	High	29.42	27.43
			Low	26.10	24.84
	20	462.6750	High	<b>29.43</b>	27.37
			Low	26.16	24.90
21	462.7000	High	29.40	27.39	
		Low	26.27	24.90	
22	462.7250	High	29.39	27.38	
		Low	26.31	24.96	

\* DC input into the final amplifier

Mode	Voltage(V)	Current(A)	Power(W)
GMRS(High power)	4.5	0.887	2.727
GMRS(Low power)	4.5	0.482	2.169
FRS	4.5	0.472	2.124
GMRS(High power)	3.6	0.482	1.735
GMRS(Low power)	3.6	0.452	1.627
FRS	3.6	0.443	1.559

Ambient Temperature (°C)	22 ± 2
Liquid Temperature (°C)	22 ± 2
Date	2012-04-09 ~ 2012-04-10

### Head & Body SAR

Mode	Position	EUT Side	Distance from Phantom ( cm )	Battery DC	Traffic Channel		Power Drift (dB)	1g SAR (100 % Duty Cycle)	1g SAR (50% Duty Cycle)	1 g SAR Limits (W/kg)	
					Frequency (MHz)	Channel					
GMRS	Head	Face Up	2.5	DC 3.6	462.637	4	-0.146	0.403	0.2015	1.6	
				DC 3.6	462.550	15	-0.272	0.314	0.1570		
				DC 3.6	462.725	22	-0.174	0.316	0.1580		
	Body	Face Down	0 Horizontal (Belt clip)	DC 3.6	462.637	4	-0.057	1.24	0.6200		
				DC 3.6	462.550	15	0.072	1.53	0.7650		
				DC 3.6	462.725	22	-0.057	1.40	0.7000		
			0 Tilt (Belt clip)	DC 3.6	462.550	15	0.320	1.43	0.7150		
				0 Horizontal (Belt clip)	DC 4.5	462.550	15	-0.063	1.74		<b>0.8700</b>
	FRS	Head	Face Up	2.5	DC 3.6	467.562	8	-0.326	0.498		0.2490
					DC 3.6	467.637	11	-0.313	0.521		0.2605
DC 3.6					467.712	14	-0.184	0.422	0.2110		
DC 4.5					467.637	11	-0.300	0.561	0.2805		
Body		Face Down	0 Horizontal (Belt clip)	DC 3.6	467.562	8	-0.211	1.43	0.7150		
				DC 3.6	467.637	11	-0.222	1.36	0.6800		
				DC 3.6	467.712	14	-0.102	1.35	0.6750		
Audio Accessory											
GMRS	Body	Face Down	0 Horizontal (Belt clip)	DC 3.6	462.550	15	-0.002	1.46	0.7300		

- \* The EUT is fitted with Belt Clip accessory and placed directly against a phantom (no gap) in case of Face Down side.
- \* The EUT was tested in Low, Middle and High channel at each mode as the general case. Please refer to the above conducted power table for verifying the channels.
- \* This test was conducted in reference to KDB447498 D01 and KDB643646 D01.

## Appendix

### List

Appendix A	DASY4 Report (Plots of the SAR Measurements)	- 450 MHz Validation Test - Head/Body Test
Appendix B	Uncertainty Analysis	
Appendix C	Calibration Certificate	- PROBE - DAE3 - DIPOLE



Report File No. : F690501/RF-SAR001999  
Date of Issue : 2012-04-25  
Page : 19 / 67

## **Appendix A**

### **Test Plot - DASY4 Report**

## 450 MHz Head Validation Test

Date: 2012-04-10

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [Validation450Mhz\\_Head.da4](#)

**DUT: Dipole 450 MHz; Type: D450V2; Serial: D450V2 - SN:1015**  
**Program Name: Validation\_450MHz**

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.841$  mho/m;  $\epsilon_r = 43.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.89, 6.89, 6.89); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2012-01-20
- Phantom: SAM MIC #2000-93 with CRP\_Right; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Validation\_450MHz/Area Scan (61x121x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 2.05 mW/g


**Validation\_450MHz/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.4 V/m; Power Drift = -0.020 dB


Peak SAR (extrapolated) = 3.14 W/kg

SAR(1 g) = 1.93 mW/g; SAR(10 g) = 1.26 mW/g

Maximum value of SAR (measured) = 2.06 mW/g

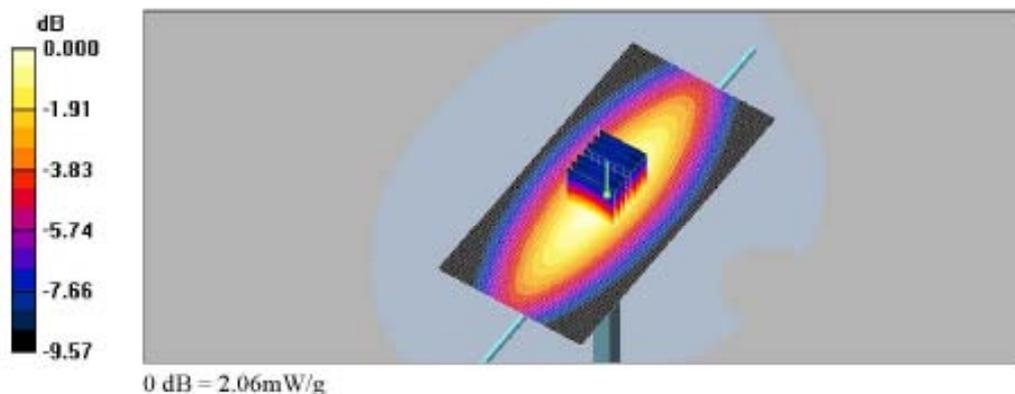

### Z Scan

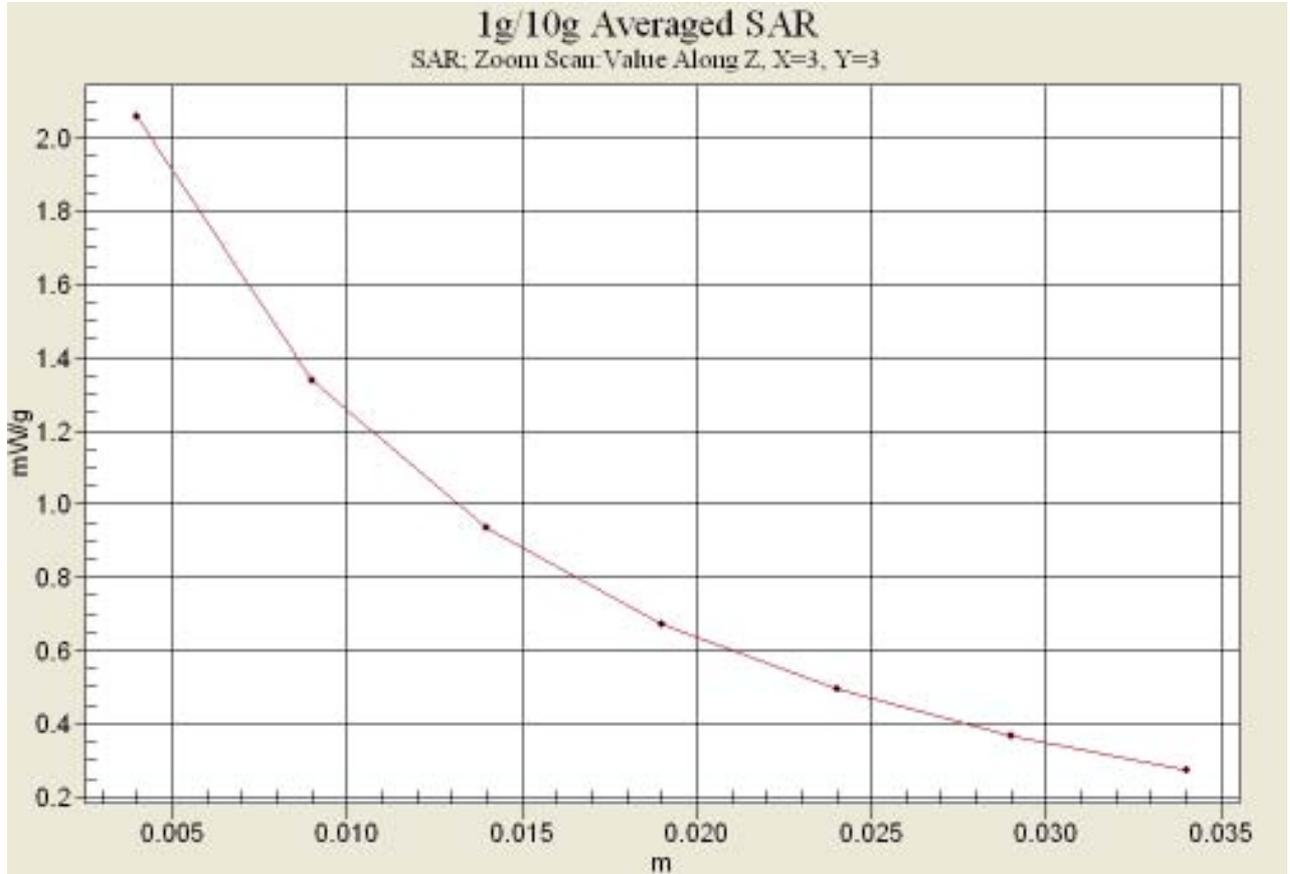

## 450 MHz Body Validation Test

Date: 2012-04-09

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [Validation450Mhz\\_Body.da4](#)

Input Power : 398 mW

**DUT: Dipole 450 MHz; Type: D450V2; Serial: D450V2 - SN:1015**  
**Program Name: Validation\_450MHz**

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.927$  mho/m;  $\epsilon_r = 54.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(7.49, 7.49, 7.49); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2012-01-20
- Phantom: SAM MIC #2000-93 with CRP\_Right; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Validation\_450MHz/Area Scan (61x121x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 2.03 mW/g


**Validation\_450MHz/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm,  
 dz=5mm

Reference Value = 47.6 V/m; Power Drift = -0.040 dB


Peak SAR (extrapolated) = 3.13 W/kg

**SAR(1 g) = 1.89 mW/g; SAR(10 g) = 1.24 mW/g**

Maximum value of SAR (measured) = 2.02 mW/g

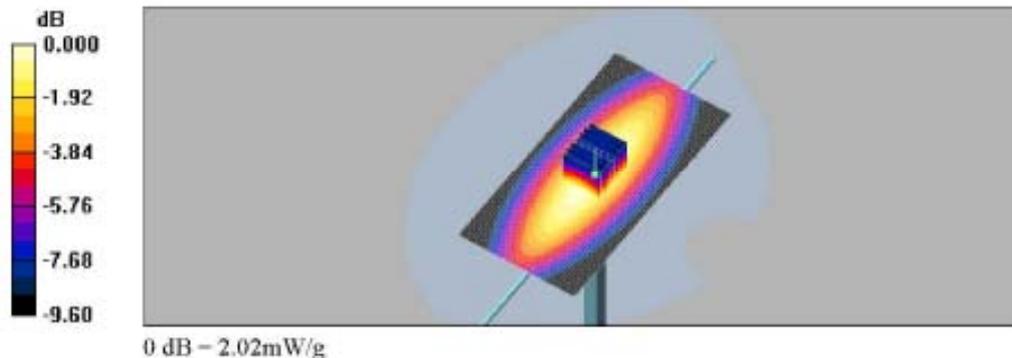

### Z Scan

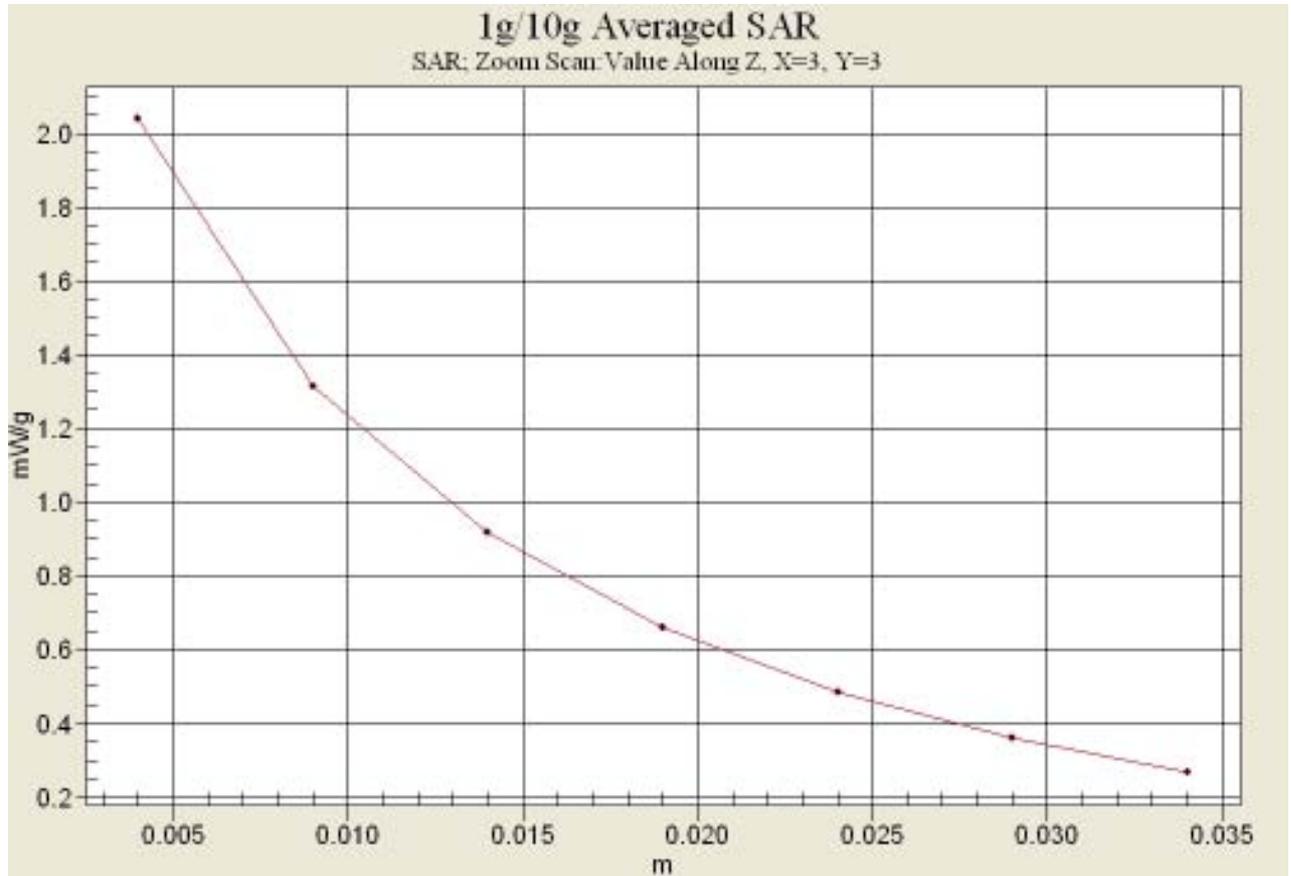

## SAR Test Plot

Date: 2012-04-10

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [450Mhz\\_Head\(GMRS\)\\_CH4.da4](#)

**DUT: LXT600; Type: FRS/GMRS; Serial: N/A**  
**Program Name: Head**

Communication System: GMRS; Frequency: 462.637 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 462.637$  MHz;  $\sigma = 0.851$  mho/m;  $\epsilon_r = 43.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.89, 6.89, 6.89); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2012-01-20
- Phantom: SAM MIC #2000-93 with CRP Right; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


**Head\_Front\_Ch.4\_25mm gap/Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 0.447 mW/g

**Head\_Front\_Ch.4\_25mm gap/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.0 V/m; Power Drift = -0.146 dB  
 Peak SAR (extrapolated) = 0.582 W/kg  
**SAR(1 g) = 0.403 mW/g; SAR(10 g) = 0.292 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 0.422 mW/g

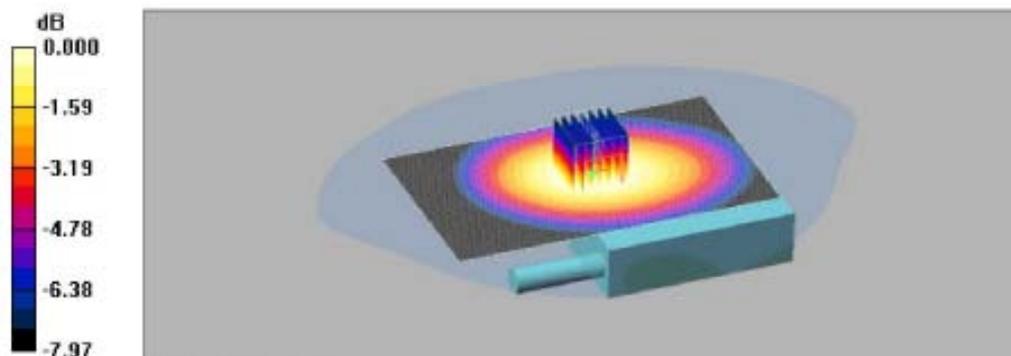

0 dB = 0.422mW/g

Date: 2012-04-10

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [450Mhz\\_Head\(GMRS\)\\_CH15.da4](#)

**DUT: LXT600; Type: FRS/GMRS; Serial: N/A**  
**Program Name: Head**

Communication System: GMRS; Frequency: 462.55 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 462.55$  MHz;  $\sigma = 0.851$  mho/m;  $\epsilon_r = 43.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.89, 6.89, 6.89); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2012-01-20
- Phantom: SAM MIC #2000-93 with CRP\_Right; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


**Head\_Front\_Ch.15\_25mm gap/Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 0.339 mW/g

**Head\_Front\_Ch.15\_25mm gap/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.6 V/m; Power Drift = -0.272 dB  
 Peak SAR (extrapolated) = 0.441 W/kg  
**SAR(1 g) = 0.314 mW/g; SAR(10 g) = 0.230 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 0.329 mW/g

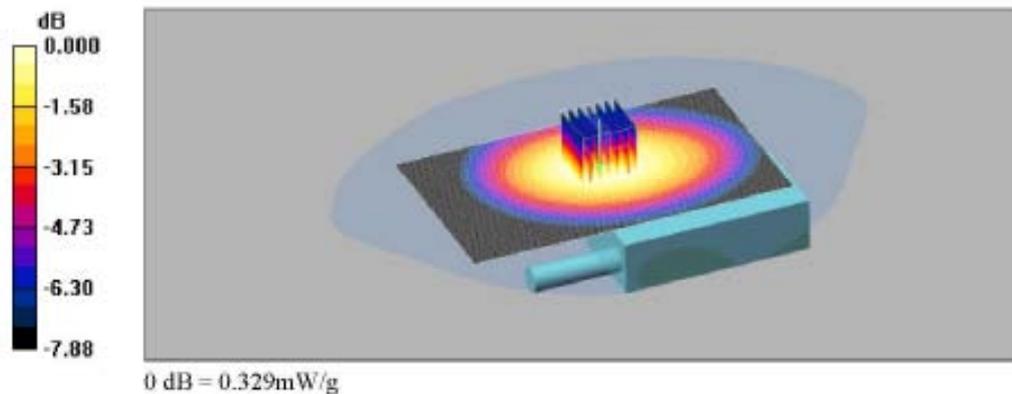

Date: 2012-04-10

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [450Mhz\\_Head\(GMRS\)\\_CH22.da4](#)

**DUT: LXT600; Type: FRS/GMRS; Serial: N/A**  
**Program Name: Head**

Communication System: GMRS; Frequency: 462.725 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 462.725$  MHz;  $\sigma = 0.851$  mho/m;  $\epsilon_r = 43.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.89, 6.89, 6.89); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2012-01-20
- Phantom: SAM MIC #2000-93 with CRP\_Right; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


**Head\_Front\_Ch.22\_25mm gap/Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 0.359 mW/g

**Head\_Front\_Ch.22\_25mm gap/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.4 V/m; Power Drift = -0.174 dB  
 Peak SAR (extrapolated) = 0.444 W/kg  
**SAR(1 g) = 0.316 mW/g; SAR(10 g) = 0.230 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 0.330 mW/g

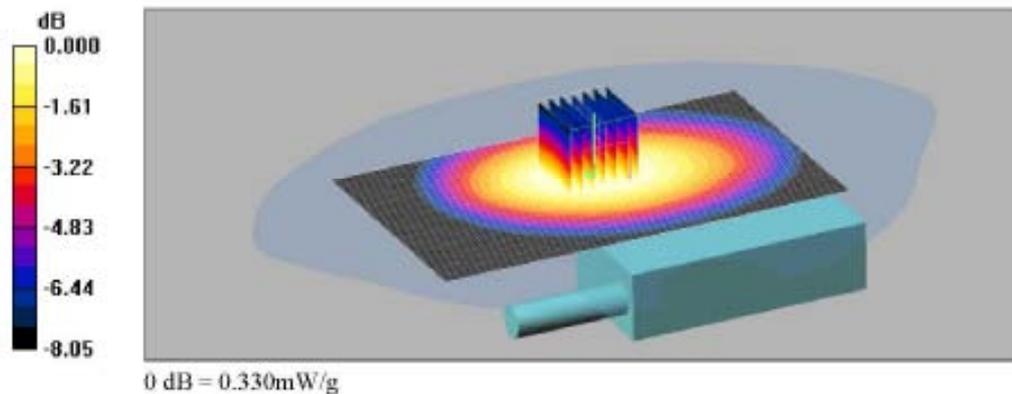

Date: 2012-04-09

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [450Mhz\\_Body\(GMRS\)\\_CH4.da4](#)

**DUT: LXT600; Type: FRS/GMRS; Serial: N/A**  
**Program Name: Body**

Communication System: GMRS; Frequency: 462.637 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 462.637$  MHz;  $\sigma = 0.938$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(7.49, 7.49, 7.49); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2012-01-20
- Phantom: SAM MIC #2000-93 with CRP\_Right; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Body\_Back\_Ch.4\_0mm gap/Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 1.28 mW/g


**Body\_Back\_Ch.4\_0mm gap/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.4 V/m; Power Drift = 0.057 dB

Peak SAR (extrapolated) = 1.80 W/kg

**SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.883 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 1.29 mW/g

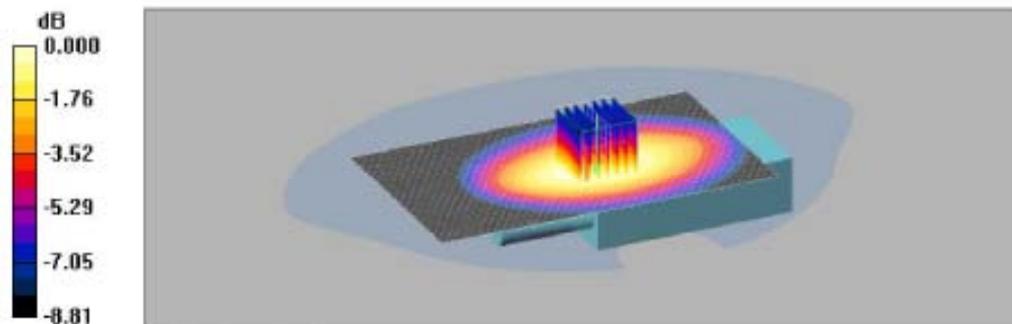

0 dB = 1.29mW/g

Date: 2012-04-09

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [450Mhz\\_Body\(GMRS\)\\_CH15.da4](#)

**DUT: LXT600; Type: FRS/GMRS; Serial: N/A**  
**Program Name: Body**

Communication System: GMRS; Frequency: 462.55 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 462.55$  MHz;  $\sigma = 0.938$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(7.49, 7.49, 7.49); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2012-01-20
- Phantom: SAM MIC #2000-93 with CRP Right; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Body\_Back\_Ch.15\_0mm gap/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 1.60 mW/g

**Body\_Back\_Ch.15\_0mm gap/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 39.4 V/m; Power Drift = 0.072 dB  
 Peak SAR (extrapolated) = 2.23 W/kg  
**SAR(1 g) = 1.53 mW/g; SAR(10 g) = 1.1 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 1.61 mW/g

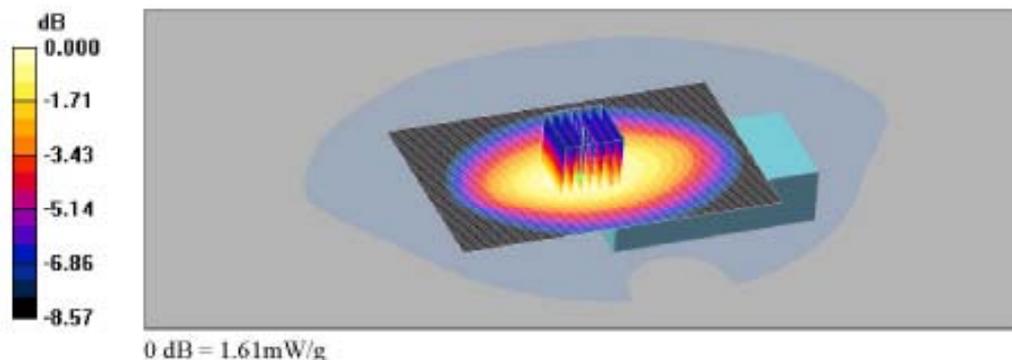

Date: 2012-04-09

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [450Mhz\\_Body\(GMRS\)\\_CH22.da4](#)

**DUT: LXT600; Type: FRS/GMRS; Serial: N/A**  
**Program Name: Body**

Communication System: GMRS; Frequency: 462.725 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 462.725$  MHz;  $\sigma = 0.938$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(7.49, 7.49, 7.49); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2012-01-20
- Phantom: SAM MIC #2000-93 with CRP\_Right; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Body\_Back\_Ch.22\_0mm gap/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 1.21 mW/g


**Body\_Back\_Ch.22\_0mm gap/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.4 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 2.04 W/kg

**SAR(1 g) = 1.4 mW/g; SAR(10 g) = 1 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 1.47 mW/g

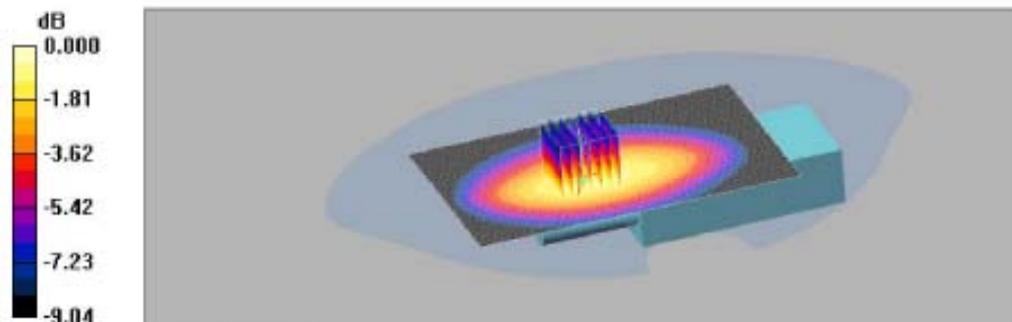

0 dB = 1.47mW/g

Date: 2012-04-09

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [450Mhz\\_Body Tilt\(GMRS\)\\_CH15.da4](#)

**DUT: LXT600; Type: FRS/GMRS; Serial: N/A**  
**Program Name: Body**

Communication System: GMRS; Frequency: 462.55 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 462.55$  MHz;  $\sigma = 0.938$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(7.49, 7.49, 7.49); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2012-01-20
- Phantom: SAM MIC #2000-93 with CRP Right; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Body\_Back Tilt\_Ch.15\_0mm gap/Area Scan (71x111x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 1.45 mW/g

**Body\_Back Tilt\_Ch.15\_0mm gap/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 37.6 V/m; Power Drift = 0.320 dB  
 Peak SAR (extrapolated) = 2.09 W/kg  
**SAR(1 g) = 1.43 mW/g; SAR(10 g) = 1.02 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 1.50 mW/g

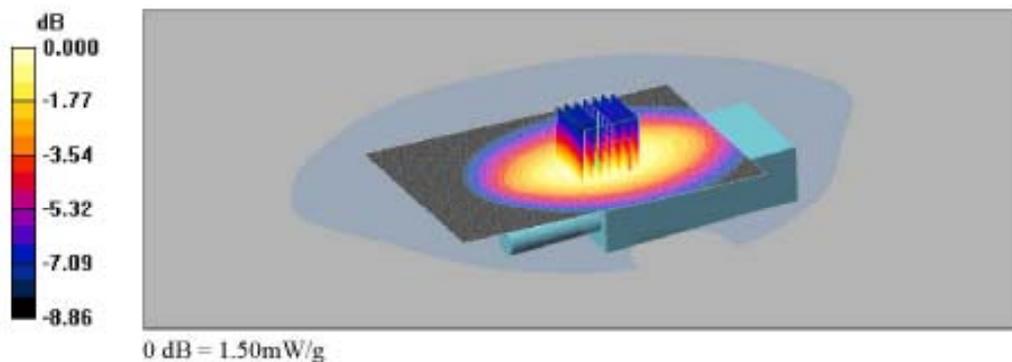

Date: 2012-04-09

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [450Mhz\\_Body\(GMRS\) 4.5V\\_CH15.d4](#)

**DUT: LXT600; Type: FRS/GMRS; Serial: N/A**  
**Program Name: Body**

Communication System: GMRS; Frequency: 462.55 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 462.55$  MHz;  $\sigma = 0.938$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(7.49, 7.49, 7.49); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2012-01-20
- Phantom: SAM MIC #2000-93 with CRP\_Right; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Body\_Back\_4.5V\_Ch.15\_0mm gap/Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm


Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 1.90 mW/g

**Body\_Back\_4.5V\_Ch.15\_0mm gap/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 40.5 V/m; Power Drift = -0.063 dB  
 Peak SAR (extrapolated) = 2.62 W/kg  
**SAR(1 g) = 1.74 mW/g; SAR(10 g) = 1.22 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 1.84 mW/g

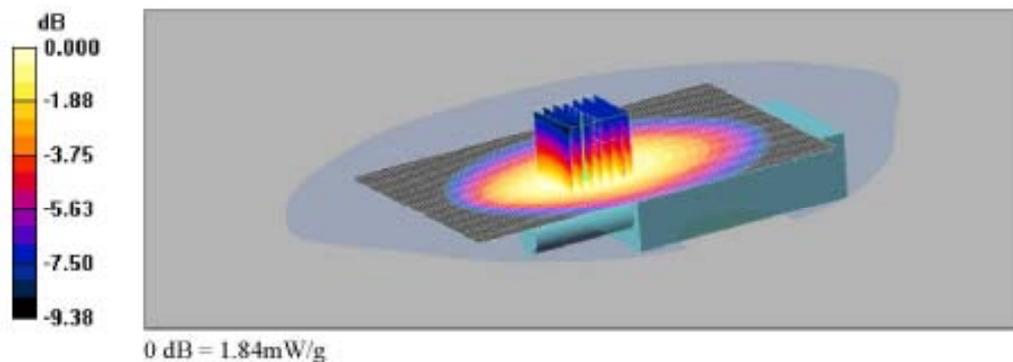

### Z Scan

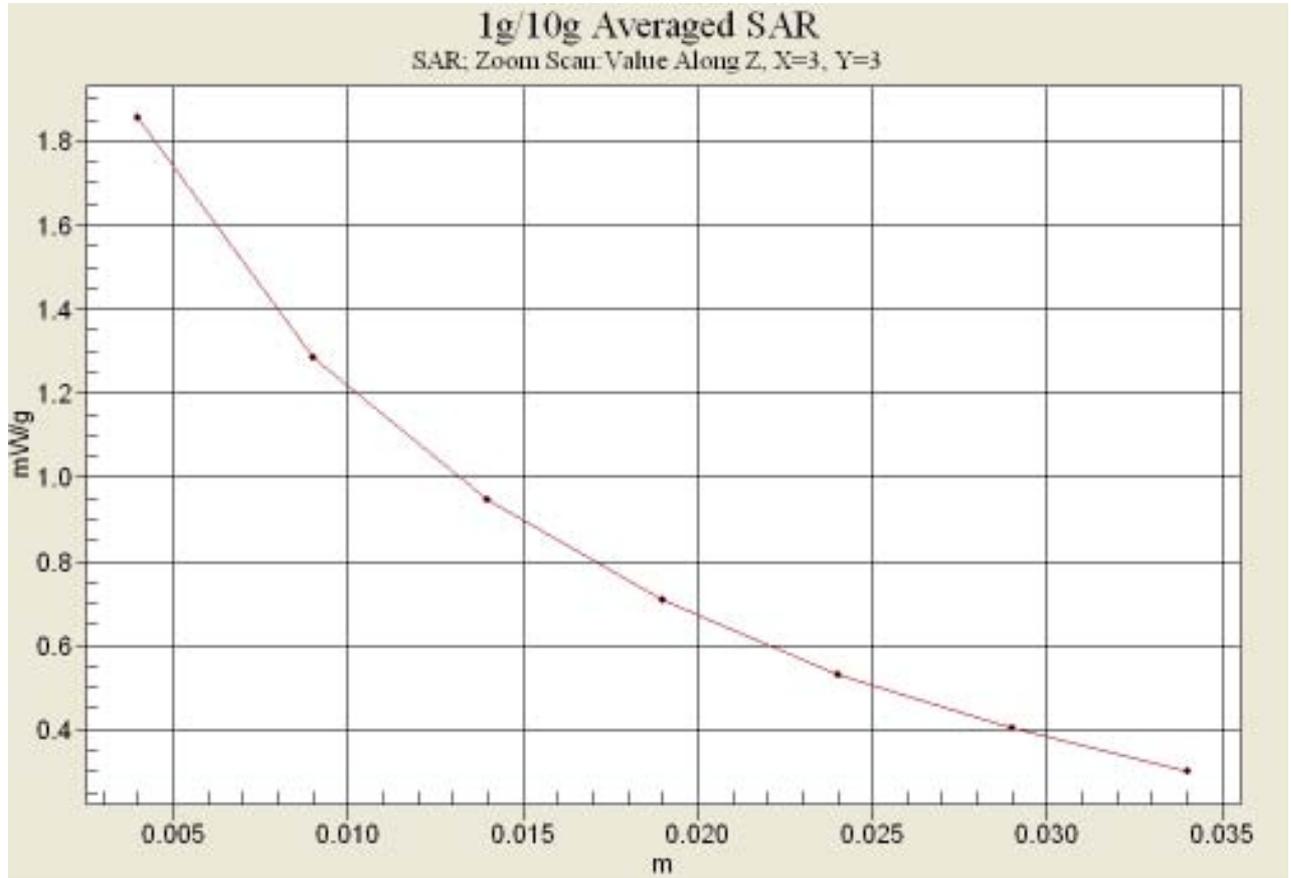

Date: 2012-04-10

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [450Mhz\\_Head\(FRS\)\\_CH8.da4](#)

**DUT: LXT600; Type: FRS/GMRS; Serial: N/A**  
**Program Name: Head**


Communication System: FRS; Frequency: 467.562 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 467.6 \text{ MHz}$ ;  $\sigma = 0.855 \text{ mho/m}$ ;  $\epsilon_r = 43.4$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.89, 6.89, 6.89); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2012-01-20
- Phantom: SAM MIC #2000-93 with CRP Right; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Head\_Front\_Ch.8\_25mm gap/Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 0.537 mW/g

**Head\_Front\_Ch.8\_25mm gap/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value - 25.5 V/m; Power Drift - -0.326 dB  
 Peak SAR (extrapolated) = 0.717 W/kg  
**SAR(1 g) = 0.498 mW/g; SAR(10 g) = 0.360 mW/g**  
 Maximum value of SAR (measured) - 0.523 mW/g

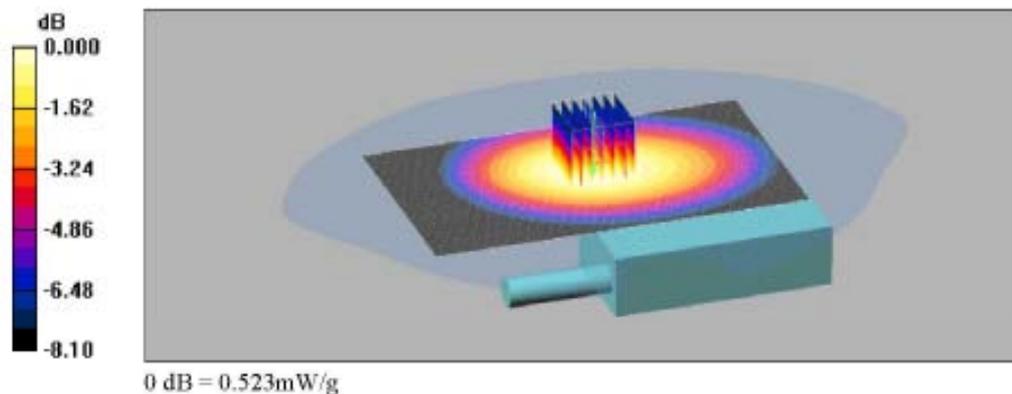

Date: 2012-04-10

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [450Mhz\\_Head\(FRS\)\\_CH11.da4](#)

**DUT: LXT600; Type: FRS/GMRS; Serial: N/A**  
**Program Name: Head**

Communication System: FRS; Frequency: 467.637 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 467.637$  MHz;  $\sigma = 0.855$  mho/m;  $\epsilon_r = 43.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.89, 6.89, 6.89); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2012-01-20
- Phantom: SAM MIC #2000-93 with CRP\_Right; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


**Head\_Front\_Ch.11\_25mm gap/Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 0.565 mW/g

**Head\_Front\_Ch.11\_25mm gap/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.0 V/m; Power Drift = -0.313 dB  
 Peak SAR (extrapolated) = 0.745 W/kg  
**SAR(1 g) = 0.521 mW/g; SAR(10 g) = 0.378 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 0.543 mW/g

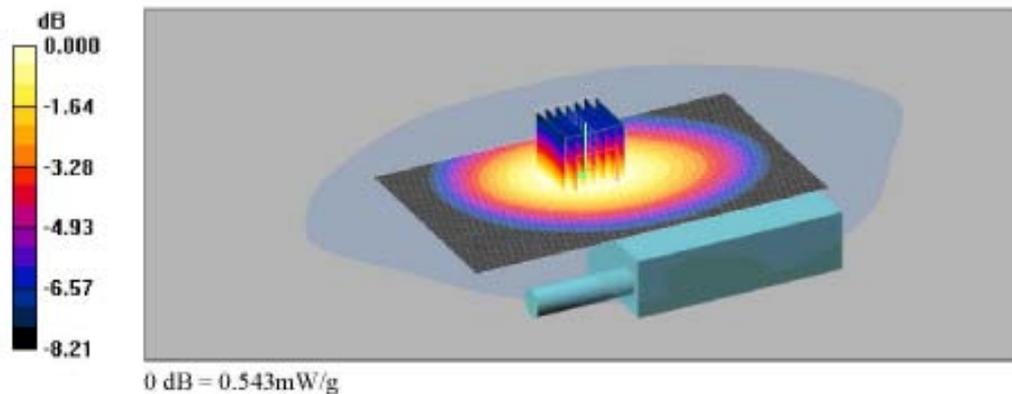

Date: 2012-04-10

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [450Mhz\\_Head\(FRS\)\\_CH14.da4](#)

**DUT: LXT600; Type: FRS/GMRS; Serial: N/A**  
**Program Name: Head**

Communication System: FRS; Frequency: 467.712 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 467.712$  MHz;  $\sigma = 0.855$  mho/m;  $\epsilon_r = 43.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(6.89, 6.89, 6.89); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2012-01-20
- Phantom: SAM MIC #2000-93 with CRP\_Right; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


**Head\_Front\_Ch.14\_25mm gap/Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 0.469 mW/g

**Head\_Front\_Ch.14\_25mm gap/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.4 V/m; Power Drift = 0.184 dB  
 Peak SAR (extrapolated) = 0.606 W/kg  
**SAR(1 g) = 0.422 mW/g; SAR(10 g) = 0.306 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 0.443 mW/g

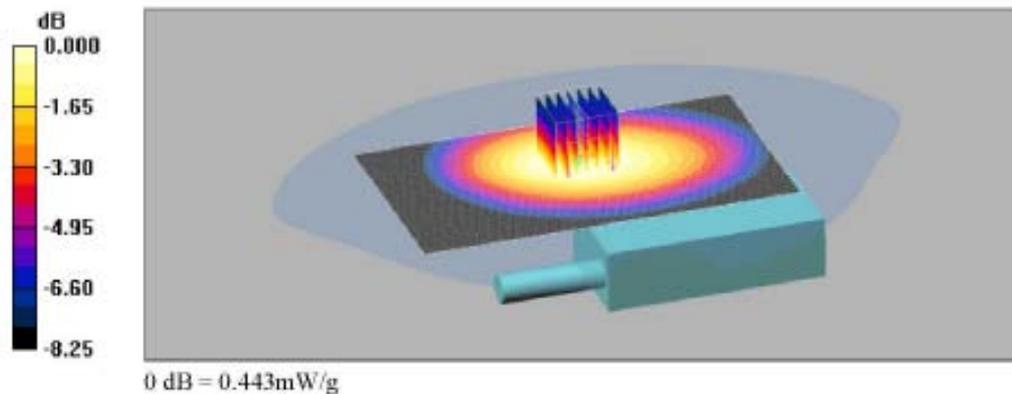

Date: 2012-04-10

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [450Mhz\\_Head\(FRS\)\\_4.5V\\_CH11.da4](#)

**DUT: LXT600; Type: FRS/GMRS; Serial: N/A**  
**Program Name: Head**

Communication System: FRS; Frequency: 467.637 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 467.637$  MHz;  $\sigma = 0.855$  mho/m;  $\epsilon_r = 43.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(6.89, 6.89, 6.89); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2012-01-20
- Phantom: SAM MIC #2000-93 with CRP\_Right; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Head\_Front\_Ch.11\_4.5V\_25mm gap/Area Scan (71x121x1):** Measurement grid:  
 dx=15mm, dy=15mm


Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 0.629 mW/g

**Head\_Front\_Ch.11\_4.5V\_25mm gap/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  
 dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 25.7 V/m; Power Drift = -0.300 dB  
 Peak SAR (extrapolated) = 0.809 W/kg  
**SAR(1 g) = 0.561 mW/g; SAR(10 g) = 0.406 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 0.587 mW/g

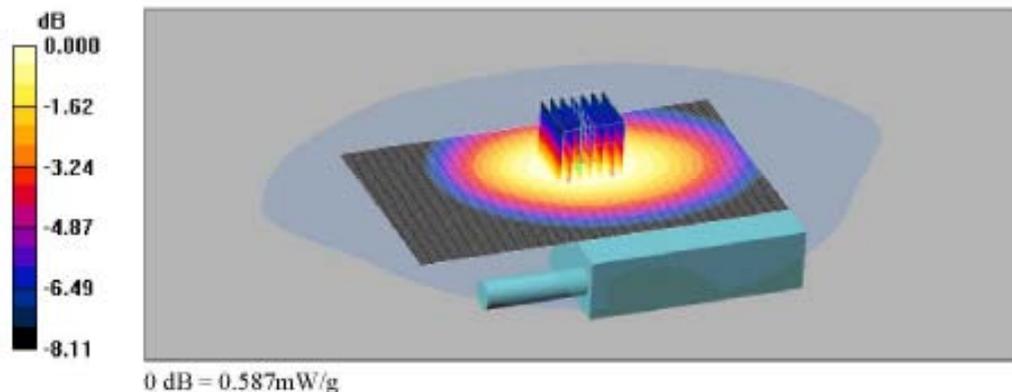

### Z Scan

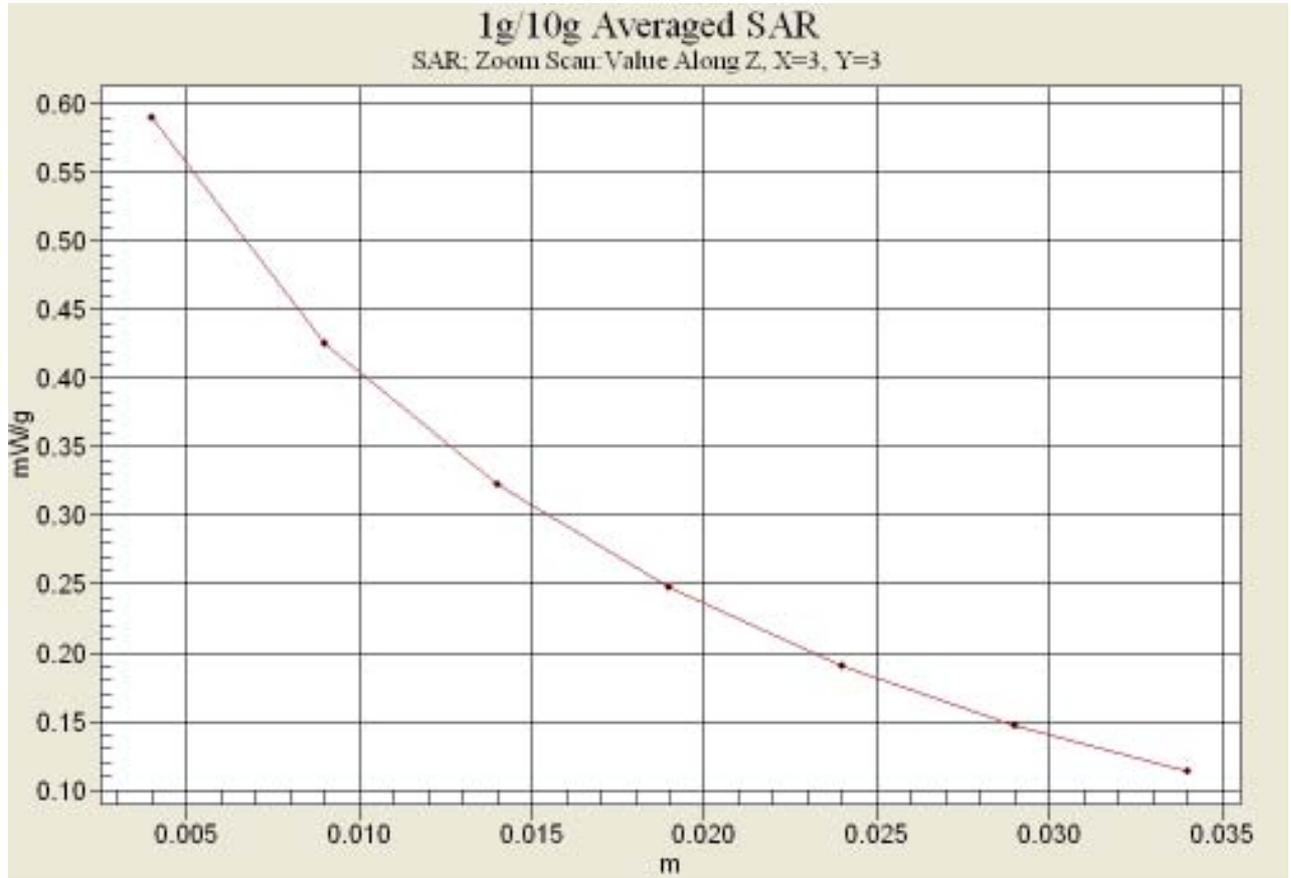

Date: 2012-04-09

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [450Mhz\\_Body\(FRS\)\\_CH8.da4](#)


**DUT: LXT600; Type: FRS/GMRS; Serial: N/A**  
**Program Name: Body**

Communication System: FRS; Frequency: 467.562 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 467.6$  MHz;  $\sigma = 0.942$  mho/m;  $\epsilon_r = 53.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:  
 - Probe: ET3DV6 - SN1782; ConvF(7.49, 7.49, 7.49); Calibrated: 2011-04-14  
 - Sensor-Surface: 4mm (Mechanical Surface Detection)  
 - Electronics: DAE3 Sn567; Calibrated: 2012-01-20  
 - Phantom: SAM MIC #2000-93 with CRP Right; Type: SAM MIC #2000-93; Serial: TP-1300  
 - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Body\_Back\_Ch.8\_0mm gap/Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 1.53 mW/g

**Body\_Back\_Ch.8\_0mm gap/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value - 39.3 V/m; Power Drift - -0.211 dB  
 Peak SAR (extrapolated) = 2.09 W/kg  
**SAR(1 g) = 1.43 mW/g; SAR(10 g) = 1.02 mW/g**  
 Maximum value of SAR (measured) - 1.50 mW/g

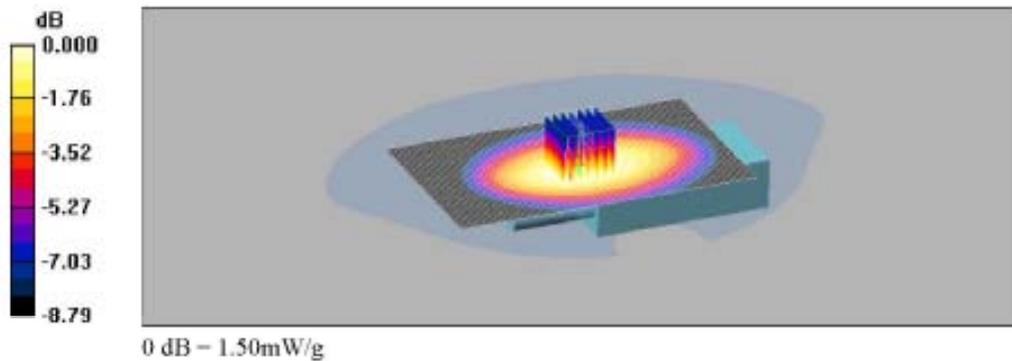

Date: 2012-04-09

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [450Mhz\\_Body\(FRS\)\\_CH11.da4](#)

**DUT: LXT600; Type: FRS/GMRS; Serial: N/A**  
**Program Name: Body**

Communication System: FRS; Frequency: 467.637 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 467.637$  MHz;  $\sigma = 0.942$  mho/m;  $\epsilon_r = 53.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(7.49, 7.49, 7.49); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2012-01-20
- Phantom: SAM MIC #2000-93 with CRP\_Right; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


**Body\_Back\_Ch.11\_0mm gap/Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 1.46 mW/g

**Body\_Back\_Ch.11\_0mm gap/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 38.8 V/m; Power Drift = -0.222 dB  
 Peak SAR (extrapolated) = 1.98 W/kg  
**SAR(1 g) = 1.36 mW/g; SAR(10 g) = 0.971 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 1.43 mW/g

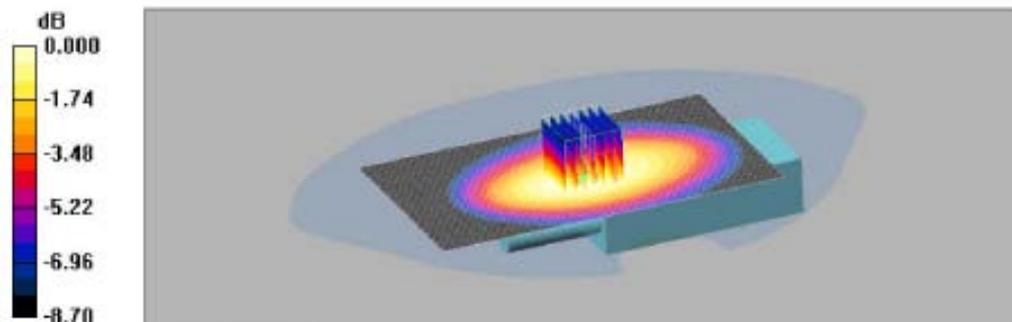

0 dB = 1.43mW/g

Date: 2012-04-09

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [450Mhz\\_Body\(FRS\)\\_CH14.da4](#)

**DUT: LXT600; Type: FRS/GMRS; Serial: N/A**  
**Program Name: Body**

Communication System: FRS; Frequency: 467.712 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 467.712$  MHz;  $\sigma = 0.942$  mho/m;  $\epsilon_r = 53.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1782; ConvF(7.49, 7.49, 7.49); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2012-01-20
- Phantom: SAM MIC #2000-93 with CRP\_Right; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


**Body\_Back\_Ch.14\_0mm gap/Area Scan (71x121x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 1.45 mW/g

**Body\_Back\_Ch.14\_0mm gap/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 37.6 V/m; Power Drift = -0.102 dB  
 Peak SAR (extrapolated) = 1.96 W/kg  
**SAR(1 g) = 1.35 mW/g; SAR(10 g) = 0.961 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 1.41 mW/g

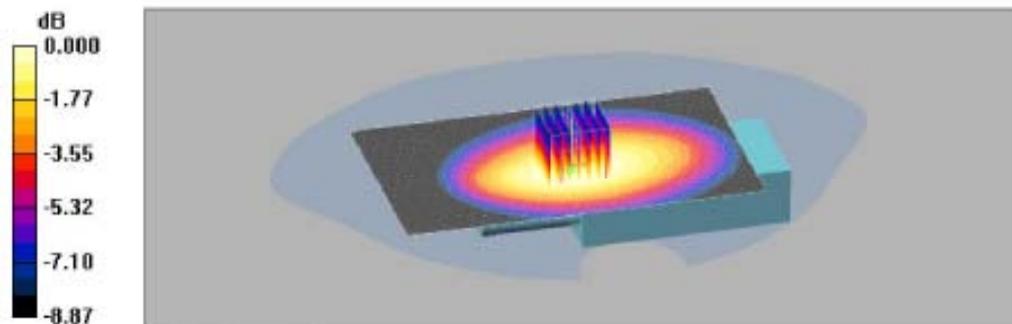

0 dB = 1.41mW/g

Date: 2012-04-09

Test Laboratory: SGS Korea (Gunpo Laboratory)  
 File Name: [450Mhz\\_Body\(GMRS\)\\_Audio\\_CH15.da4](#)

**DUT: LXT600; Type: FRS/GMRS; Serial: N/A**  
**Program Name: Body**

Communication System: GMRS; Frequency: 462.55 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 462.55$  MHz;  $\sigma = 0.938$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY4 Configuration:


- Probe: ET3DV6 - SN1782; ConvF(7.49, 7.49, 7.49); Calibrated: 2011-04-14
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn567; Calibrated: 2012-01-20
- Phantom: SAM MIC #2000-93 with CRP Right; Type: SAM MIC #2000-93; Serial: TP-1300
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Body\_Back\_Audio\_Ch.15\_0mm gap/Area Scan (71x121x1):** Measurement grid:  
 dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (interpolated) = 1.58 mW/g

**Body\_Back\_Audio\_Ch.15\_0mm gap/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  
 dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 37.6 V/m; Power Drift = -0.002 dB  
 Peak SAR (extrapolated) = 2.13 W/kg  
**SAR(1 g) = 1.46 mW/g; SAR(10 g) = 1.05 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.  
 Maximum value of SAR (measured) = 1.53 mW/g

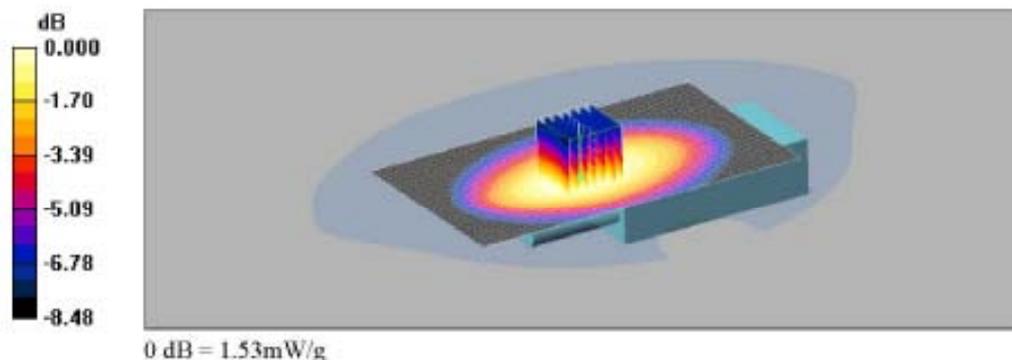

## Appendix B

### Uncertainty Analysis

UNCERTAINTY BUDGE ACCORDING TO IEEE P1528							
a	b	c	d	e = f(d,k)	g	i = cxg/e	k
Uncertainty Component	Section in P1528	Tol (%)	Prob. Dist.	Div.	Ci (1g)	1g ui (%)	Vi (Veff)
Probe calibration	E.2.1	6.7	N	1	1	6.70	∞
Axial isotropy	E.2.2	0.5	R	1.73	0.71	0.20	∞
hemispherical isotropy	E.2.2	2.6	R	1.73	0.71	1.06	∞
Boundary effect	E.2.3	0.8	R	1.73	1	0.46	∞
Linearity	E.2.4	0.6	R	1.73	1	0.35	∞
System detection limit	E.2.5	0.25	R	1.73	1	0.14	∞
Readout electronics	E.2.6	0.3	N	1	1	0.30	∞
Response time	E.2.7	0	R	1.73	1	0.00	∞
Integration time	E.2.8	2.6	R	1.73	1	1.50	∞
RF ambient Condition –Noise	E.6.1	3	R	1.73	1	1.73	∞
RF ambient Condition – reflections	E.6.1	3	R	1.73	1	1.73	∞
Probe positioning– mechanical tolerance	E.6.2	1.5	R	1.73	1	0.87	∞
Probe positioning– with respect to phantom	E.6.3	2.9	R	1.73	1	1.67	∞
Max. SAR evaluation	E.5.2	1	R	1.73	1	0.58	∞
Test sample positioning	E.4.2	2.3	N	1	1	2.30	9
Device holder uncertainty	E.4.1	3.6	N	1	1	3.60	∞
Output power variation–SAR drift measurement	6.62	5	R	1.73	1	2.89	∞
Phantom uncertainty (shape and thickness tolerances)	E.3.1	4	R	1.73	1	2.31	∞
Liquid conductivity – deviation from target values	E.3.2	5	R	1.73	0.64	1.85	∞
Liquid conductivity – measurement uncertainty	E.3.2	1.2	N	1	0.64	0.77	5
Liquid permittivity – deviation from target values	E.3.3	5	R	1.73	0.6	1.73	∞
Liquid permittivity – measurement uncertainty	E.3.3	1.1	N	1	0.6	0.66	5
Combined standard uncertainty				RSS		9.90	2754
Expanded uncertainty (95% CONFIDENCE INTERVAL)				K=2		19.80	

Table: Worst-case uncertainty for DASY4 assessed according to IEEE P1528.

The budge is valid for the frequency range 300 MHz to 3 GHz and represents a worst-case analysis

## **Appendix C**

### **Calibration Certificate**

**- PROBE**

**- DAE3**

**- 450 MHz Dipole**

**- PROBE Calibration Certificate**

**Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS (Dymstec)**

Certificate No: **ET3-1782\_Apr11**

**CALIBRATION CERTIFICATE**

Object: **ET3DV6 - SN:1782**

Calibration procedure(s): **QA CAL-01.v7, QA CAL-12.v6, QA CAL-23.v4, QA CAL-25.v3  
 Calibration procedure for dosimetric E-field probes**

Calibration date: **April 14, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41495277	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01368)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
D4E4	SN: 654	23-Apr-10 (No. D4E4-654_Apr10)	Apr-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8649C	US3642U01700	4-Aug-09 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37300585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Jeton Kasrafi	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: April 14, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

#### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\theta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>**: A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub> are numerical linearization parameters in dB assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media.
- VR**: VR is the validity range of the calibration related to the average diode voltage or DAE voltage in mV.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ET3DV6 – SN:1782

April 14, 2011

# Probe ET3DV6

## SN:1782

Manufactured: April 15, 2003  
Calibrated: April 14, 2011

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

ET3DV6- SN:1782

April 14, 2011

## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1782

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V/m})^2$ ) <sup>A</sup>	2.07	1.66	1.92	$\pm 10.1 \%$
DGP (mV) <sup>B</sup>	96.4	96.6	97.6	

### Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc <sup>E</sup> (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	111.1	$\pm 1.9 \%$
			Y	0.00	0.00	1.00	141.0	
			Z	0.00	0.00	1.00	145.1	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

ET3DV6- SN:1782

April 14, 2011

## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1782

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>c</sup>	Relative Permittivity <sup>f</sup>	Conductivity (S/m) <sup>f</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unc. (k=2)
450	43.5	0.87	6.89	6.89	6.89	0.21	2.29	± 13.4 %
835	41.5	0.90	6.22	6.22	6.22	0.88	1.63	± 12.0 %
1750	40.1	1.37	5.14	5.14	5.14	0.57	2.53	± 12.0 %
1900	40.0	1.40	4.95	4.95	4.95	0.58	2.54	± 12.0 %
2450	39.2	1.80	4.37	4.37	4.37	0.80	1.93	± 12.0 %

<sup>c</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>f</sup> At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

ET3DV6-SN:1782

April 14, 2011

## DASY/EASY - Parameters of Probe: ET3DV6- SN:1782

### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	UncL (k=2)
450	56.7	0.94	7.49	7.49	7.49	0.16	2.34	± 13.4 %
835	55.2	0.97	6.03	6.03	6.03	0.85	1.72	± 12.0 %
1750	53.4	1.49	4.54	4.54	4.54	0.64	2.70	± 12.0 %
1900	53.3	1.52	4.34	4.34	4.34	0.63	2.57	± 12.0 %
2450	52.7	1.95	3.94	3.94	3.94	0.99	1.21	± 12.0 %


<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

ET3DV6-SN:1782

April 14, 2011

### Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)


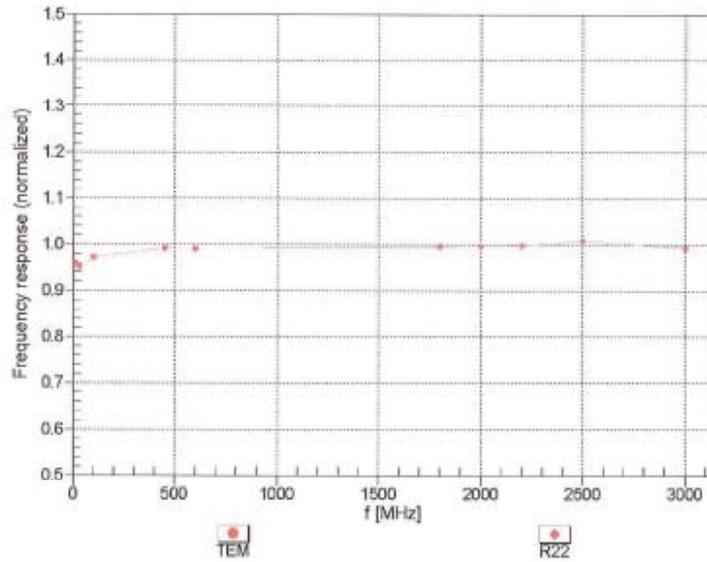


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

ET3DV6-SN:1782

April 14, 2011

## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

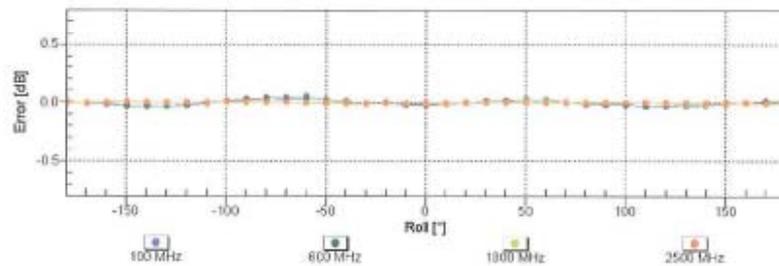
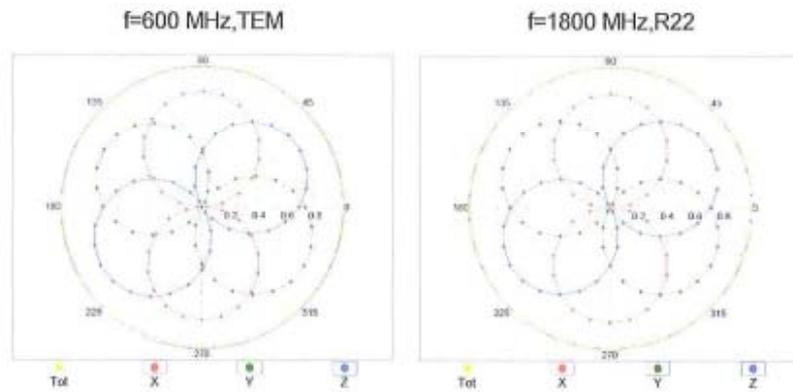


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

ET3DV6-SN:1782

April 14, 2011

## Dynamic Range f(SAR<sub>head</sub>) (TEM cell, f = 900 MHz)

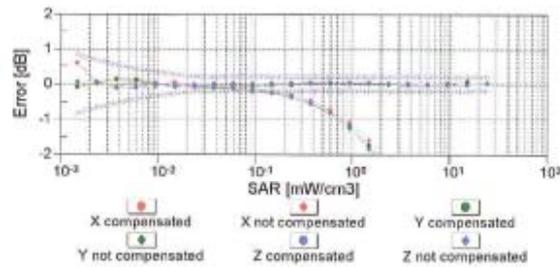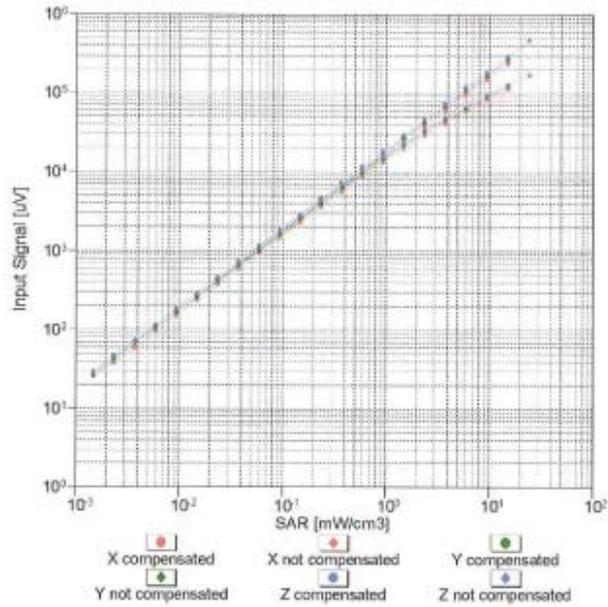


Uncertainty of Linearity Assessment: ± 0.6% (k=2)



ET3DV6- SN:1782

April 14, 2011

### Conversion Factor Assessment

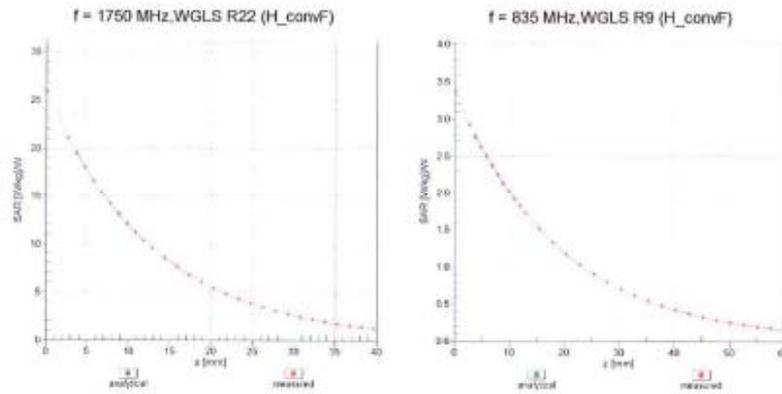

### Deviation from Isotropy in Liquid Error ( $\phi, \theta$ ), f = 900 MHz

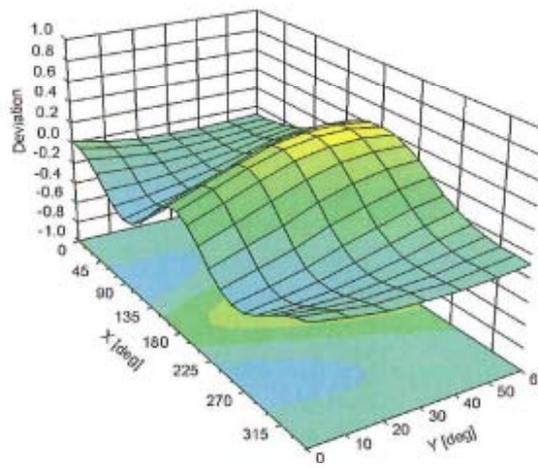

ET3DV6- SN:1782

April 14, 2011

### DASY/EASY - Parameters of Probe: ET3DV6 - SN:1782

#### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

**Annex B.2 DAE Calibration certification**

**Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
 Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS (Dymstec)**

Certificate No: **DAE3-567\_Jan12**

**CALIBRATION CERTIFICATE**

Object: **DAE3 - SD 000 D03 AA - SN: 567**

Calibration procedure(s): **QA CAL-06.v24  
 Calibration procedure for the data acquisition electronics (DAE)**


Calibration date: **January 20, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	28-Sep-11 (No:11450)	Sep-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V2.1	SE UWS 063 AA 1001	05-Jan-12 (in house check)	in house check: Jan-13

	Name	Function	Signature
Calibrated by:	Dominique Steffen	Technician	
Approved by:	Fin Bomholt	R&D Director	

Issued: January 20, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary

**DAE** data acquisition electronics  
**Connector angle** information used in DASY system to align probe sensor X to the robot coordinate system.

### Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement*: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - *DC Voltage Measurement Linearity*: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - *Common mode sensitivity*: Influence of a positive or negative common mode voltage on the differential measurement.
  - *Channel separation*: Influence of a voltage on the neighbor channels not subject to an input voltage.
  - *AD Converter Values with inputs shorted*: Values on the internal AD converter corresponding to zero input voltage
  - *Input Offset Measurement*: Output voltage and statistical results over a large number of zero voltage measurements.
  - *Input Offset Current*: Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - *Input resistance*: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - *Low Battery Alarm Voltage*: Typical value for information. Below this voltage, a battery alarm signal is generated.
  - *Power consumption*: Typical value for information. Supply currents in various operating modes.

**DC Voltage Measurement**

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1µV , full range = -100...+300 mV

Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.763 ± 0.1% (k=2)	404.411 ± 0.1% (k=2)	404.499 ± 0.1% (k=2)
Low Range	3.95035 ± 0.7% (k=2)	3.97119 ± 0.7% (k=2)	3.95014 ± 0.7% (k=2)

**Connector Angle**

Connector Angle to be used in DASY system	7.5 ° ± 1 °
---	-------------

## Appendix

### 1. DC Voltage Linearity

High Range	Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X + Input	199998.82	3.53	0.00
Channel X + Input	20005.03	4.17	0.02
Channel X - Input	-19996.67	3.44	-0.02
Channel Y + Input	199997.37	2.30	0.00
Channel Y + Input	19999.48	-1.11	-0.01
Channel Y - Input	-19998.88	1.52	-0.01
Channel Z + Input	199994.27	-0.68	-0.00
Channel Z + Input	20001.19	0.52	0.00
Channel Z - Input	-19995.78	4.48	-0.02

Low Range	Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X + Input	1999.73	-1.35	-0.07
Channel X + Input	200.29	-1.35	-0.67
Channel X - Input	-197.22	0.97	-0.49
Channel Y + Input	1999.97	-1.02	-0.05
Channel Y + Input	200.82	-0.73	-0.36
Channel Y - Input	-198.58	-0.24	0.12
Channel Z + Input	2000.13	-0.92	-0.05
Channel Z + Input	200.68	-0.79	-0.39
Channel Z - Input	-199.26	-0.95	0.48

### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading ( $\mu\text{V}$ )	Low Range Average Reading ( $\mu\text{V}$ )
Channel X	200	6.01	1.84
	-200	-13.55	-1.50
Channel Y	200	-1.13	-2.69
	-200	1.36	1.24
Channel Z	200	4.36	4.11
	-200	-5.92	-6.33

### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X ( $\mu\text{V}$ )	Channel Y ( $\mu\text{V}$ )	Channel Z ( $\mu\text{V}$ )
Channel X	200	-	-2.44	-2.08
Channel Y	200	7.42	-	-1.51
Channel Z	200	5.84	8.06	-

#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16326	15742
Channel Y	16161	15582
Channel Z	15953	16228

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M $\Omega$

	Average ( $\mu$ V)	min. Offset ( $\mu$ V)	max. Offset ( $\mu$ V)	Std. Deviation ( $\mu$ V)
Channel X	0.24	-1.71	1.46	0.53
Channel Y	-0.13	-2.46	1.09	0.49
Channel Z	-0.85	-2.00	0.31	0.42

#### 6. Input Offset Current

Nominal input circuitry offset current on all channels: <25fA

#### 7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

#### 8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

#### 9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

## - 450 MHz Dipole Calibration Certificate

**Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **SGS (Dymstec)**

Certificate No: **D450V2-1015\_Aug11**

### CALIBRATION CERTIFICATE

Object: **D450V2 - SN: 1015**

Calibration procedure(s): **QA CAL-15.v6  
 Calibration procedure for dipole validation kits below 700 MHz**


Calibration date: **August 22, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&E critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Type-N mismatch combination	SN: 6047.3 / 06327	29-Mar-11 (No. 217-01168)	Apr-12
Reference Probe ET3DV6	SN: 1507	30-Apr-10 (No. ET3-1507_Apr10)	Apr-11
DAE4	SN: 654	3-May-11 (No. DAE4-654_May11)	May-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Jeton Kastrali	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: August 24, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of**  
 Schmid & Partner  
 Engineering AG  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL tissue simulating liquid  
 ConvF sensitivity in TSL / NORM x,y,z  
 N/A not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6.2
Extrapolation	Advanced Extrapolation	
Phantom	Flat Phantom V4.4	Shell thickness: $6 \pm 0.2$ mm
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	450 MHz $\pm$ 1 MHz	

### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	43.5	0.87 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	44.5 $\pm$ 6 %	0.86 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	398 mW input power	1.95 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>4.97 mW / g <math>\pm</math> 18.1 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	398 mW input power	1.30 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>3.30 mW / g <math>\pm</math> 17.6 % (k=2)</b>

### Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	56.7	0.94 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	55.5 $\pm$ 6 %	0.94 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

### SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	398 mW input power	1.89 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>4.73 mW / g <math>\pm</math> 18.1 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	398 mW input power	1.26 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>3.16 mW / g <math>\pm</math> 17.6 % (k=2)</b>

**Appendix**

**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	53.9 $\Omega$ - 9.1 j $\Omega$
Return Loss	- 20.4 dB

**Antenna Parameters with Body TSL**

Impedance, transformed to feed point	51.1 $\Omega$ - 10.1 j $\Omega$
Return Loss	- 20.0 dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.356 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	May 30, 2003

**DASY5 Validation Report for Head TSL**

Date: 22.08.2011

Test Laboratory: SPEAG

**DUT: Dipole 450 MHz; Type: D450V2; Serial: D450V2 - SN: 1015**


Communication System: CW; Frequency: 450 MHz  
 Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.94$  mho/m;  $\epsilon_r = 55.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section  
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:


- Probe: ET3DV6 - SN1507; ConvF(7.05, 7.05, 7.05); Calibrated: 29.04.2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 03.05.2011
- Phantom: Flat Phantom 4.4 ; Type: Flat Phantom 4.4; Serial: 1002
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

**Dipole Calibration for Body Tissue/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 46.322 V/m; Power Drift = -0.0035 dB  
 Peak SAR (extrapolated) = 2.964 W/kg  
**SAR(1 g) = 1.89 mW/g; SAR(10 g) = 1.26 mW/g**  
 Maximum value of SAR (measured) = 2.026 mW/g

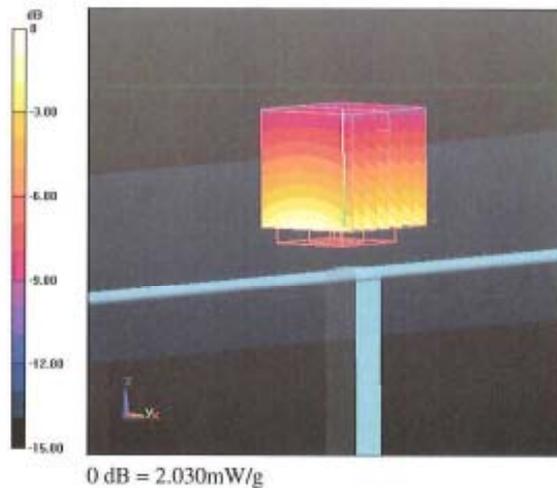

### Impedance Measurement Plot for Head TSL

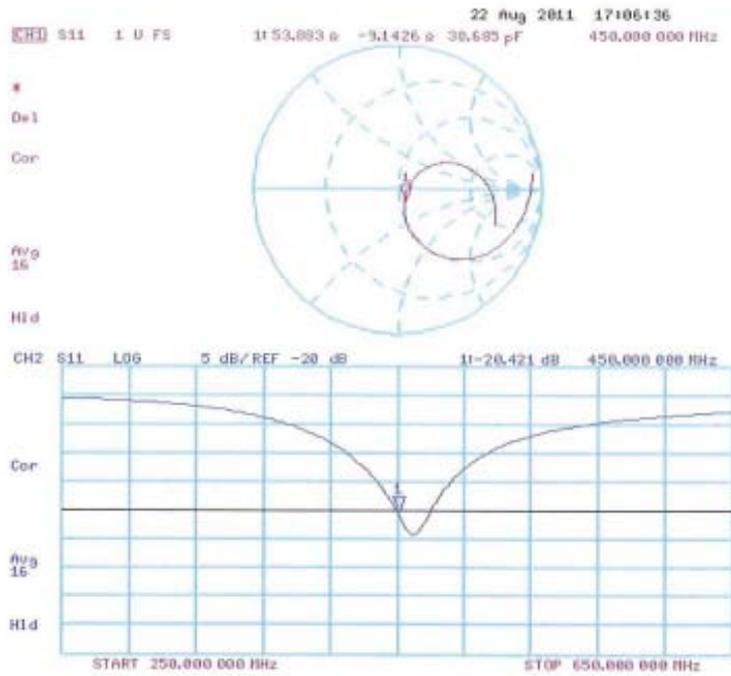

**DASY5 Validation Report for Body TSL**

Date: 22.08.2011

Test Laboratory: SPEAG

**DUT: Dipole 450 MHz; Type: D450V2; Serial: D450V2 - SN: 1015**


Communication System: CW; Frequency: 450 MHz  
 Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.94 \text{ mho/m}$ ;  $\epsilon_r = 55.5$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section  
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(7.05, 7.05, 7.05); Calibrated: 29.04.2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 03.05.2011
- Phantom: Flat Phantom 4.4 ; Type: Flat Phantom 4.4; Serial: 1002
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

**Dipole Calibration for Body Tissue/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 46.322 V/m; Power Drift = -0.0035 dB  
 Peak SAR (extrapolated) = 2.964 W/kg  
**SAR(1 g) = 1.89 mW/g; SAR(10 g) = 1.26 mW/g**  
 Maximum value of SAR (measured) = 2.026 mW/g

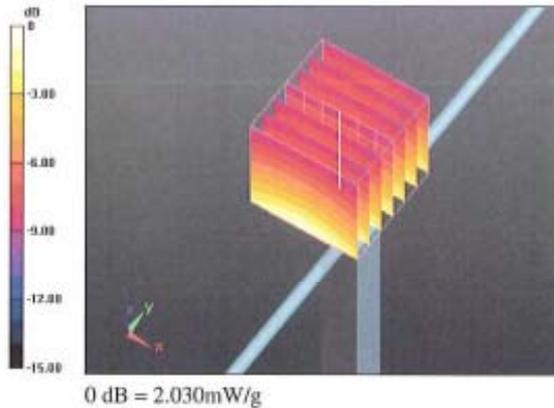

### Impedance Measurement Plot for Body TSL

