




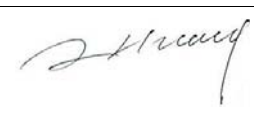
FCC PART 15 B, CLASS B
TEST REPORT

For

Dorel Juvenile Group

2525 State Street, Columbus, Indiana 47201-7494, United States

FCC ID: MNJ-MO126RX

Report Type: Original Report	Product Type: LumiSound 900MHz Audio Monitor (Receiver Unit)
Test Engineer: Haiguo Li	
Report Number: RSZ131018810-00RX	
Report Date: 2013-11-26	
Reviewed By: RF Leader	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION	4
DESCRIPTION OF TEST CONFIGURATION	4
EUT EXERCISE SOFTWARE	4
SPECIAL ACCESSORIES.....	4
EQUIPMENT MODIFICATIONS	4
EXTERNAL I/O CABLE.....	4
BLOCK DIAGRAM OF TEST SETUP	4
SUMMARY OF TEST RESULTS	5
FCC §15.107 – AC LINE CONDUCTED EMISSIONS	6
APPLICABLE STANDARD	6
MEASUREMENT UNCERTAINTY.....	6
EUT SETUP	6
EMI TEST RECEIVER SETUP.....	7
TEST PROCEDURE	7
TEST EQUIPMENT LIST AND DETAILS.....	7
CORRECTED FACTOR & MARGIN CALCULATION	7
TEST RESULTS SUMMARY	8
TEST DATA	8
FCC §15.109 - RADIATED SPURIOUS EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY.....	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST RESULTS SUMMARY	13
TEST DATA	13
PRODUCT SIMILARITY DECLARATION LETTER	15

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Dorel Juvenile Group*'s product, model number: *MO126RX* (FCC ID: *MNJ-MO126RX*) or the "EUT" in this report was a receiver unit of *LumiSound 900MHz Audio Monitor*, which was measured approximately: 7.0 cm (L) × 4.5 cm (W) × 10.4 cm (H), rated input voltage: DC 3.6 V battery or DC 6V from adapter. The highest operating frequency is 914.8 MHz.

Adapter information:

Model: JT-H060030

Input: AC 100-240V, 50/60Hz, 125mA

Output: DC 6V, 300mA

Note: The product, series model MO126RX and MO142RX are electrically identical, they are just different in model number due to market purposes, the model MO126RX was selected for fully testing, which was explained in the attached declaration letter provided and guaranteed by applicant.

**All measurement and test data in this report was gathered from production sample serial number: 1310281 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2013-10-18.*

Objective

This test report is prepared on behalf of *Dorel Juvenile Group* in accordance with Part 2-Subpart J, Part 15-Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15 B.

Related Submittal(s)/Grant(s)

Submitted with the transmitter part with FCC ID: MNJ-MO126TX

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a manufacturer testing fashion.

EUT Exercise Software

No exercise software.

Special Accessories

No special accessory.


Equipment Modifications

No modification was made to the EUT tested.

External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded Undetachable DC Cable	1.5	EUT	Adapter

Block Diagram of Test Setup

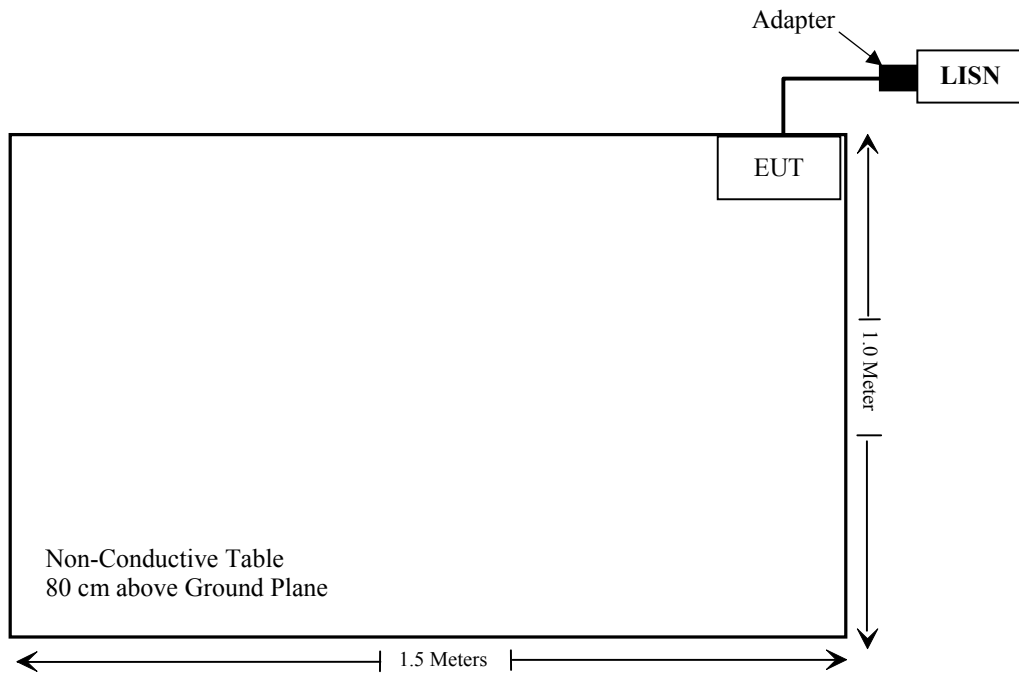

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Spurious Emissions	Compliance

FCC §15.107 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC §15.107


Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between AMN/ISN and receiver, AMN/ISN voltage division factor, AMN/ISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report

Port	Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

EUT Setup

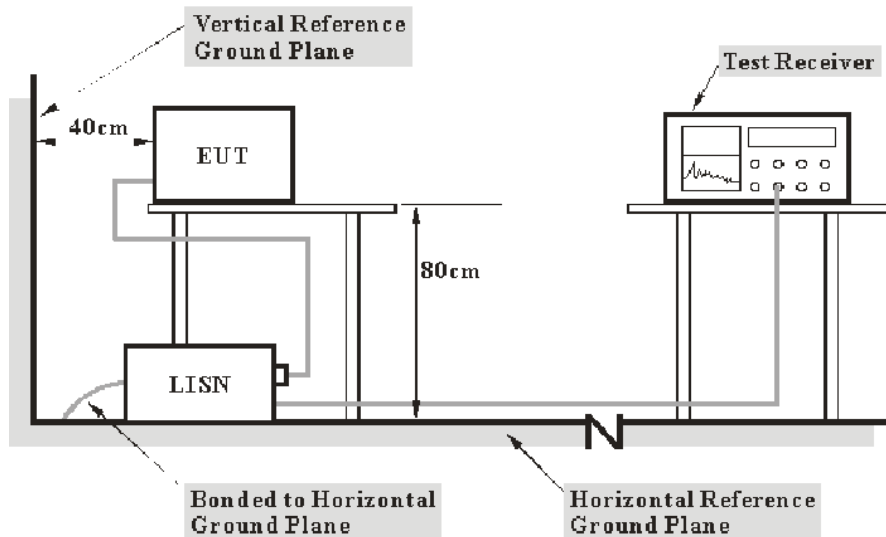

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with per ANSI C63.4-2009. The related limit was specified in FCC Part 15.107 Class B.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2013-06-17	2014-06-17
Rohde & Schwarz	1st LISN	ENV216	3560.6650.12-101613-Yb	2013-05-07	2014-05-07
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2013-10-15	2014-10-15
Rohde & Schwarz	CE Test software	EMC 32	8.95	-	-

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.107, with the worst margin reading of:

10.6 dB at 0.274000MHz in the Neutral conducted mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

in BA CL., $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	100.1 kPa

The testing was performed by Haiguo Li on 2013-11-06.

EUT Operation Mode: Receive

AC 120V/60 Hz, Line


EMI Auto Test L

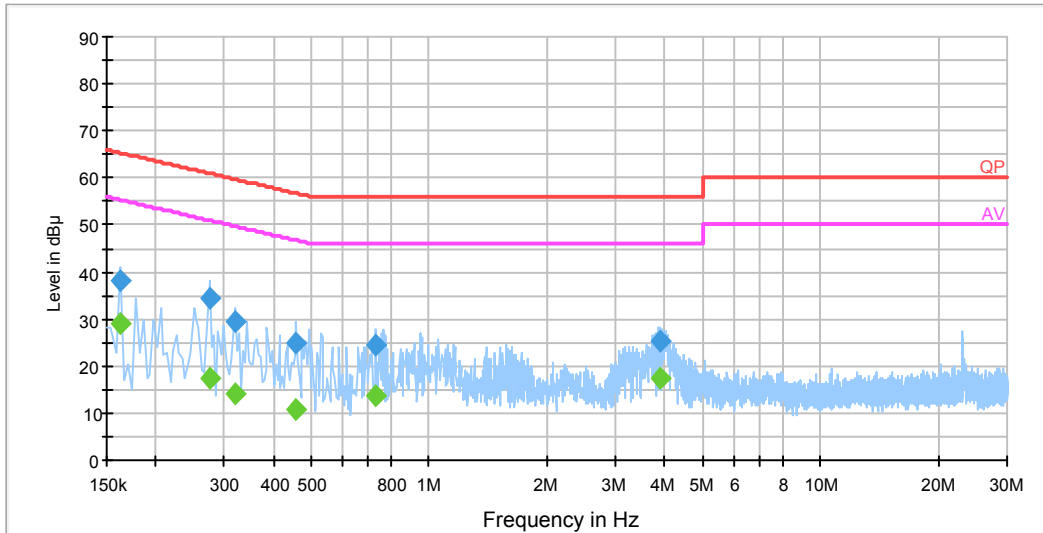

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.162000	38.0	19.5	65.4	27.4	QP
0.162000	28.9	19.5	55.4	26.5	Ave.
0.274000	34.5	19.5	61.0	26.5	QP
0.274000	17.4	19.5	51.0	33.6	Ave.
0.318000	29.5	19.5	59.8	30.3	QP
0.318000	14.0	19.5	49.8	35.8	Ave.
0.458000	24.8	19.5	56.7	31.9	QP
0.458000	11.0	19.5	46.7	35.7	Ave.
0.730000	24.5	19.5	56.0	31.5	QP
0.730000	13.5	19.5	46.0	32.5	Ave.
3.886000	25.3	19.6	56.0	30.7	QP
3.886000	17.2	19.6	46.0	28.8	Ave.

AC 120V/60 Hz, Neutral

EMI Auto Test N

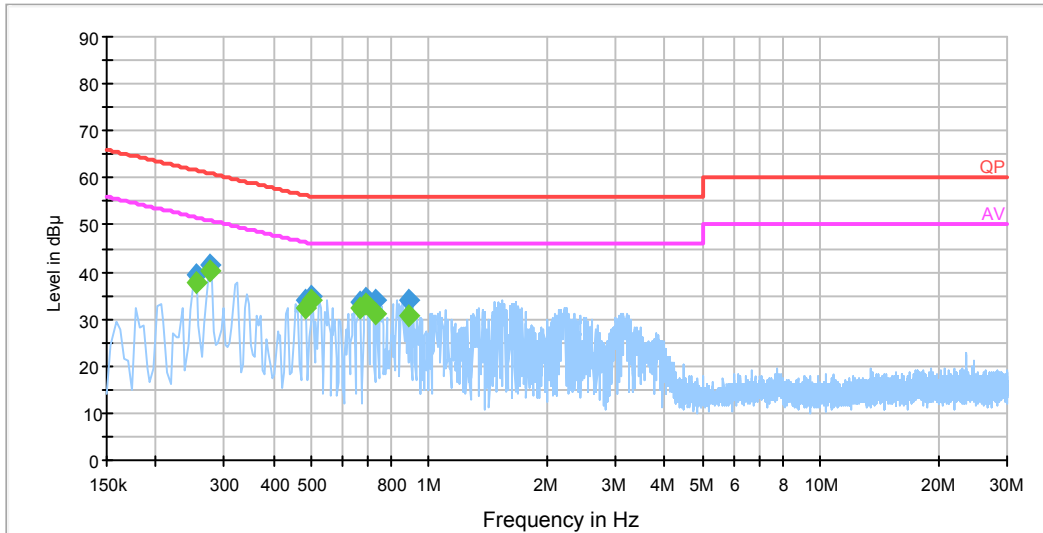

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.254000	39.5	19.5	61.6	22.1	QP
0.254000	37.5	19.5	51.6	14.1	Ave.
0.274000	41.3	19.5	61.0	19.7	QP
0.274000	40.4	19.5	51.0	10.6	Ave.
0.482000	34.0	19.5	56.3	22.3	QP
0.482000	32.4	19.5	46.3	13.9	Ave.
0.502000	34.7	19.5	56.0	21.3	QP
0.502000	33.8	19.5	46.0	12.2	Ave.
0.666000	33.8	19.5	56.0	22.2	QP
0.666000	32.2	19.5	46.0	13.8	Ave.
0.686000	34.6	19.5	56.0	21.4	QP
0.686000	33.1	19.5	46.0	12.9	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
The corrected factor has been input into the transducer of the test software.
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit - Corrected Amplitude

FCC §15.109 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §15.109


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown in below table. And the uncertainty will not be taken into consideration for the test data recorded in the report

Frequency	Polarity	Measurement uncertainty
30 MHz~200 MHz	Horizontal	4.62 dB (k=2, 95% level of confidence)
	Vertical	4.54 dB (k=2, 95% level of confidence)
200 MHz~1 GHz	Horizontal	4.84 dB (k=2, 95% level of confidence)
	Vertical	5.91 dB (k=2, 95% level of confidence)
1 GHz~6 GHz	Horizontal/Vertical	4.68 dB (k=2, 95% level of confidence)

EUT Setup

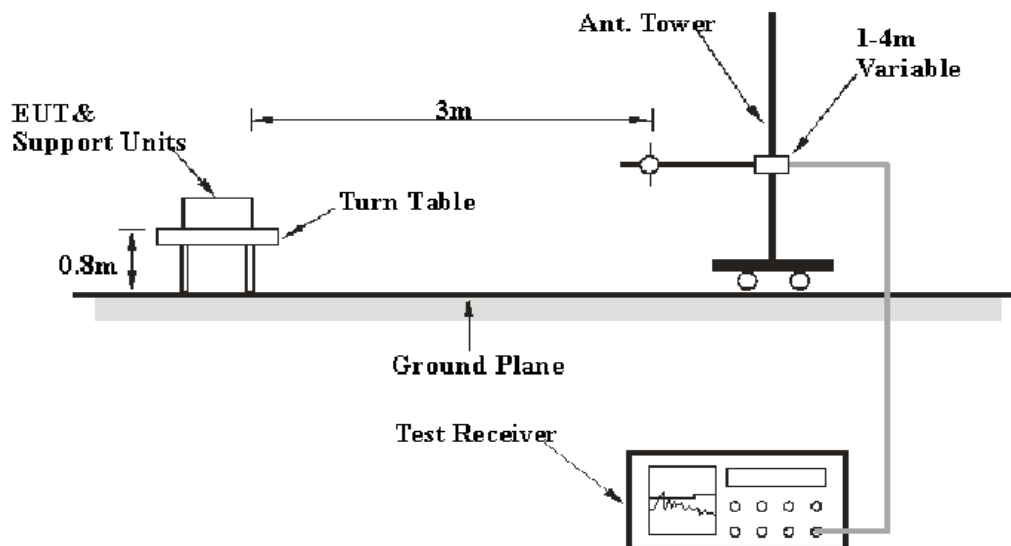

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

For the radiated emissions test, the host PC and relevant equipments were connected to AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2013-09-30	2014-09-30
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-09-17	2014-09-17
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
A.H. System	Horn Antenna	SAS-200/571	135	2012-02-11	2015-02-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2013-11-12	2014-11-12
Mini	Amplifier	ZVA-183-S+	5969001149	2013-04-03	2014-04-03
Rohde & Schwarz	CE Test software	EMC 32	8.95	-	-

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109 Class B, with the worst margin reading of:

6.24 dB at 4989.9 MHz in the Horizontal polarization

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BAEL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54 %
ATM Pressure:	100.1 kPa

The testing was performed by Haiguo Li on 2013-11-22.

EUT Operation Mode: Receive

30 MHz ~ 5 GHz

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	FCC Part 15B	
	Reading (dB μ V)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
Channel A									
43.458	45.33	QP	130	1.2	H	-17.6	27.73	40	12.27
76.165	41.93	QP	244	1.1	H	-15.7	26.23	40	13.77
170.12	38.20	QP	220	1.1	H	-15.7	22.50	43.5	21.00
2406.8	36.23	PK	277	1.2	V	6.13	42.36	74	31.64
2406.8	29.95	Ave.	277	1.2	V	6.13	36.08	54	17.92
4989.9	35.26	PK	289	1.4	H	12.5	47.76	54	6.24
4989.9	29.67	Ave.	289	1.4	H	12.5	42.17	74	31.83
Channel B									
45.035	40.89	QP	128	1.3	H	-17.6	23.29	40	16.71
140.05	36.35	QP	210	1.2	H	-14.3	22.05	43.5	21.45
158.040	41.57	QP	244	1.1	H	-14.3	27.27	43.5	16.23
1928.7	36.59	PK	46	1.4	V	3.07	39.66	74	34.34
1928.7	31.04	Ave.	46	1.4	V	3.07	34.11	54	19.89

Note:

- 1) Correction Factor=Antenna factor (RX) + cable loss – amplifier factor
- 2) Corrected Amplitude = Correction Factor + Reading
- 3) Margin = Limit - Corrected Amplitude

PRODUCT SIMILARITY DECLARATION LETTER



Dorel Juvenile Group

Address: 2525 State Street, Columbus, Indiana, 47201-7494, United States

Tel: 508-216-1850

Fax: 508-216-1812

DECLARATION OF SIMILARITY

Date: 11/6/2013

To
Bay Area Compliance Labs Corp.(Shenzhen)
6/F, the 3rd Phase of Wan Li Industrial Bldg., Shihua Rd., FuTian Free Trade Zone,
Shenzhen, China

Dear Sir or Madam:

We Dorel Juvenile Group hereby declare that our product: LumiSound 900 MHz Audio monitor, model number: MO142RX is the same with MO126RX which was tested by BACL.They are different in model number due to market purposes.

Please contact me if you have any question.

Best Regards

Signature: Tony Fernandes

A handwritten signature in black ink, appearing to read "Tony Fernandes", written over a light blue horizontal line.

Title: Director, Regulatory Affairs & Compliance

******* END OF REPORT *******