



Test Report

For

Applicant : AboCom Systems, Inc.
Equipment Type : 10/100M Fast Ethernet 1M PhoneLine
Home Network PC Card
Model : HF1000B
FCC ID : MQ4HF1000B

Report No. : 005H074FI



Test Report Certification

Quietek Corporation

No.75-1, Wang-Yeh Valley, Yung-Hsing, Chiung-Lin,
Hsin-Chu County, Taiwan, R.O.C.
Tel : 886-3-592-8858, Fax: 886-3-592-8859
E-Mail : quietek@ms24.hinet.net

Accredited by NIST(NVLAP), VCCI, BSMI, DNV, TUV

Applicant : AboCom Systems, Inc.
Address : 1F, No.21, R&D Road II, Science-Based Industrial Park,
Hsin-Chu, Taiwan, R.O.C.
Equipment Type : 10/100M Fast Ethernet 1M PhoneLine Home Network PC Card
Model : HF1000B
FCC ID. : MQ4HF1000B
Measurement Standard : CISPR 22/1994
Measurement Procedure : ANSI C63.4 /1992
Operation Voltage : DC 5V
Classification : Class B
Test Result : Complied
Test Date : May 23, 2000
Report No. : 005H074FI



The Test Results relate only to the samples tested.
The test report shall not be reproduced except in full without the written approval of Quietek Corporation.
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented by: Shelly Fan	Test Engineer: Calien Kang	Approved: Kevin Wang
---------------------------	----------------------------	----------------------



TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1 EUT Description.....	4
1.2 Tested System Details.....	5
1.3 EUT Configuration.....	5
1.4 EUT Exercise Software.....	10
1.5 Test performed.....	10
1.6 Test Facility.....	11
2. CONDUCTED EMISSION.....	12
2.1 Test Equipment List.....	12
2.2 Test Setup.....	12
2.3 Limits.....	12
2.4 Test Procedure.....	13
2.5 Test Results.....	13
3. RADIATED EMISSION.....	14
3.1 Test Equipment.....	14
3.2 Test Setup.....	14
3.3 Limits.....	15
3.4 Test Procedure.....	15
3.5 Test Results.....	15
4. EMI REDUCTION METHOD DURING COMPLIANCE TESTING.....	16
5. ATTACHMENT.....	17
ATTACHMENT 1: SUMMARY OF TEST RESULTS	
ATTACHMENT 2: EUT TEST PHOTOGRAPHS	
ATTACHMENT 3: EUT DETAILED PHOTOGRAPHS	



1. General Information

1.1 EUT Description

Applicant : AboCom Systems, Inc.

Address : 1F, No.21, R&D Road II, Science-Based Industrial Park,
Hsin-Chu, Taiwan, R.O.C.

Equipment Type : 10/100M Fast Ethernet 1M PhoneLine Home Network PC
Card

Model : HF1000B

FCC ID : MQ4HF1000B

Operation Voltage : DC 5V

MAU : Non-Shielded, 0.15m

Remark :

1. The EUT is an 10/100M Fast Ethernet 1M PhoneLine Home Network PC Card.
2. The EUT have one PCMCIA port, one LAN port and two HomePNA ports.
3. QuieTek had verified the construction and function in typical operation, then shown in this test report.



1.2 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

1.2.1 Notebook

Model Number : Think Pad 570
Manufacturer : IBM
Serial Number : 27L8835
FCC ID : DoC
Ethernet PC Card (EUT) : AboCom, HF1000B
MAU: Non-Shielded, 0.15m
Power Adapter : IBM, 02K6543
Cable In: Non-Shielded, 1.5m
Cable Output : Non-Shielded, 1.8m

1.2.2 Monitor

Model Number : CM752ET-311
Serial Number : T8E004443
FCC ID : DoC
Manufacturer : HITACHI
Data Cable : Shielded, 1.5m
Power Cord : Shielded, 1.8m

1.2.3 Modem

Model Number : 1414
Serial Number : 980033035
FCC ID : IFAXDM1414
Manufacturer : ACEEX
Data Cable : Shielded, 1.5m
Power Adapter : ACCEX, SCP41-91000A
Cable Output : Shielded, 1.5m



1.2.4 Printer

Model Number : C2642A
Serial Number : MY75N1D2BC
FCC ID : B94C2642X
Manufacturer : HP
Data Cable : Shielded, 1.2m
Power Adapter : NMB, C2175A
Cable for AC IN: Non-Shielded, 0.7m
Cable for AC Out: Non-Shielded, 1.5m

1.2.5 Mouse

Model Number : M-S35
Serial Number : LZA75102600
FCC ID : DZL211029
Manufacturer : Logitech
Data Cable : Shielded, 1.8m

1.2.6 Mouse

Model Number : M-UE55
Serial Number : DVT-318
FCC ID : DoC
Manufacturer : Logitech
Data Cable : Shielded, 1.8m

1.2.7 Mouse

Model Number : M-UE55
Serial Number : DVT-325
FCC ID : DoC
Manufacturer : Logitech
Data Cable : Shielded, 1.8m

1.2.8 Microphone

Model Number : CD-8000
Serial Number : N/A
FCC ID : DoC
Manufacturer : AIWA
Data Cable : Non-Shielded, 1m



1.2.9 Earphone

Model Number : PH136
Serial Number : N/A
Manufacturer : BSD
Data Cable : Shielded, 1.2m

1.2.10 Speaker

Model Number : J-008
Serial Number : 99-D-235399-C
FCC ID : DoC
Manufacturer : JS
Data Cable : Non-Shielded, 1.2m

1.2.11 Telephone

Model Number : ST-206
Serial Number : N/A
Manufacturer : SENAO
Data Cable : Non-Shielded, 2m

1.2.12 PORTABLE COMPACT DISC PLAYER

Model Number : CD-11
Serial Number : N/A
FCC ID : DoC
Manufacturer : MIZDA
Data Cable : Non-Shielded, 2m

Partner PC System

1.2.13 Host Personal Computer

Model Number : P2L97
Serial Number : AS10233
FCC ID : DoC
Manufacturer : ASUS
Lan Card : D-Link, DFE-500TX
HomePNA Card : AboCom, PH 100
Power Cord : Non-Shielded, 1.8m




1.2.14 Monitor

Model Number : CM752ET-311
Serial Number : T8E004439
FCC ID : DoC
Manufacturer : HITACHI
Data Cable : Shielded, 1.5m
Power Cord : Shielded, 1.7m

1.2.15 Keyboard

Model Number : 6311-TW4C
Serial Number : 916590704C91F25613
FCC ID : DoC
Manufacturer : ACER
Data Cable : Shielded, 1.8m

1.3 EUT Configuration

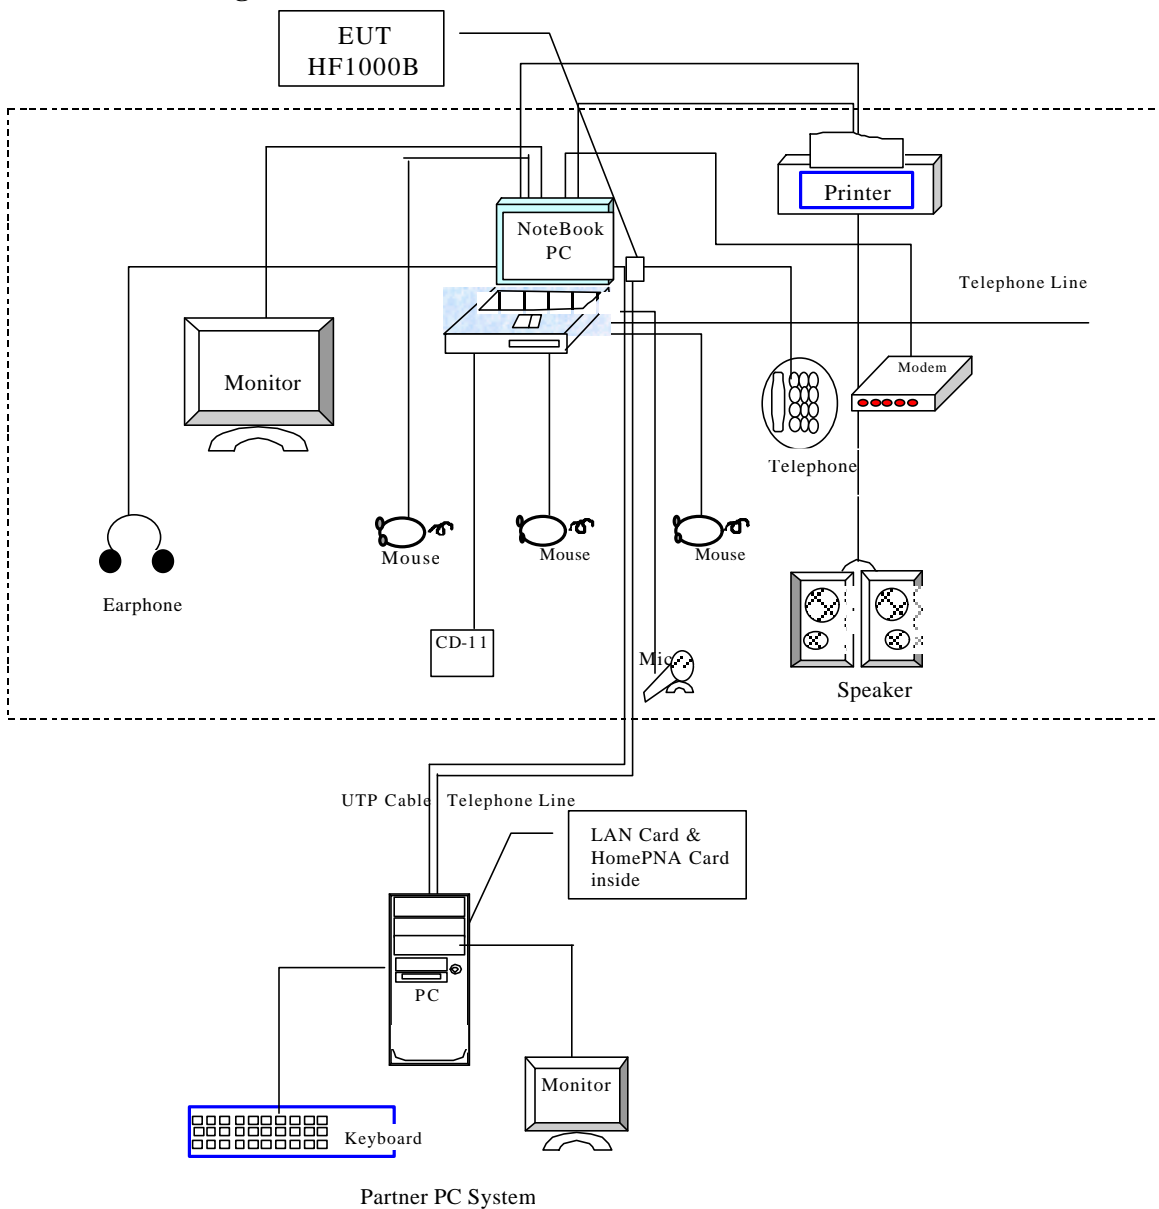

1.4 EUT Exercise Software

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

- 1.4.1 Setup the EUT and simulators as shown on 1.3.
- 1.4.2 Turn on the power of all equipment.
- 1.4.3 Boot the PC from Hard Disk .
- 1.4.4 Data will communicate between notebook personal computer and partner personal computer through EUT within Notebook PC.
- 1.4.5 The notebook personal computer's and partner computer's monitor will show the transmitting and receiving characteristics when the communication is success.
- 1.4.6 Printer and modem will keep at standby mode during EUT operation.
- 1.4.7 Repeat the above procedure 1.4.4 to 1.4.6

1.5 Test performed

Conducted emissions were invested over the frequency range from **0.15MHz to 30MHz** using a receiver bandwidth of 9kHz.

Radiated emissions were invested over the frequency range from **30MHz to 1000MHz** using a receiver bandwidth of 120kHz. Radiated testing was performed at an antenna to EUT distance of 10 meters.



1.6 Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on

Federal Communications Commission
 FCC Engineering Laboratory
 7435 Oakland Mills Road
 Columbia, MD 21046
 Reference 31040/SIT1300F2



September 30, 1998 Accreditation on NVLAP

NVLAP Lab Code: 200347-0

February 23, 1999 Accreditation on DNV
 Statement No. : 413-99-LAB11



December 8, 1998 Registration on VCCI

Registration No. for No.2 Shielded Room C-858
 Registration No. for No.1 Open Area Test Site R-823
 Registration No. for No.2 Open Area Test Site R-835



January 04, 1999 Accreditation on TÜV Rheinland
 Certificate No.: I9865712-9901



Name of firm : QuieTek Corporation

Site location : No.75-1, Wang-Yeh Valley, Yung-Hsing Tsuen,
 Chiung-Lin, Hsin-Chu County, Taiwan, R.O.C.



2. Conducted Emission


2.1 Test Equipment List

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal..	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 2000	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 2000	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 2000	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	N/A	
5	N0.2 Shielded Room			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.2 Test Setup

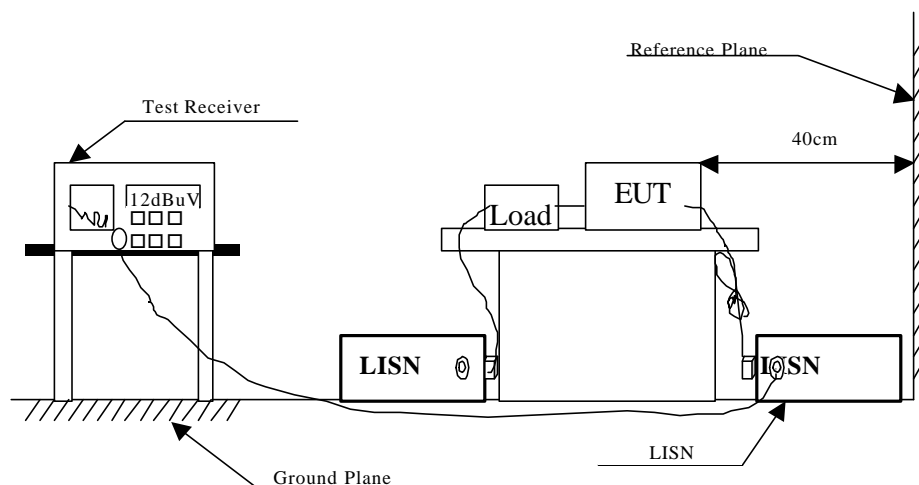

2.3 Limits

CISPR 22 Limits (dBuV)					FCC Part 15 Subpart B (dBuV)				
Frequency MHz	Class A		Class B		Frequency MHz	Class A		Class B	
	QP	AV	QP	AV		uV	dBuV	uV	dBuV
0.15 - 0.50	79	66	66-56	56-46	0.45-1.705	1000	60.0	250	48.0
0.50-5.0	73	60	56	46	1.705-30	3000	69.5	250	48.0
5.0 - 30	73	60	60	50					

Remarks : In the above table, the tighter limit applies at the band edges.

2.4 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 /1992 on conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9kHz.

2.5 Test Results

The conducted emission from the EUT is measured and shown in attachment 1 of test report. The acceptance criterion was met and the EUT passed the test.



3. Radiated Emission


3.1 Test Equipment

The following test equipment are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 1	X Test Receiver	R & S	ESCS 30 / 825442/14	May, 2000
	Spectrum Analyzer	Advantest	R3261C / 71720140	May, 2000
	Pre-Amplifier	HP	8447D/3307A01812	May, 2000
	X Bilog Antenna	Chase	CBL6112B / 12452	Sep., 1999
	X Horn Antenna	EM	EM6917 / 103325	May, 2000
Site # 2	X Test Receiver	R & S	ESCS 30 / 825442/17	May, 2000
	Spectrum Analyzer	Advantest	R3261C / 71720609	May, 2000
	Pre-Amplifier	HP	8447D/3307A01814	May, 2000
	X Bilog Antenna	Chase	CBL6112B / 2455	Sep., 1999
	X Horn Antenna	EM	EM6917 / 103325	May, 2000

- Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
2.. Mark "X" test instruments are used to measure the final test results.

3.2 Test Setup

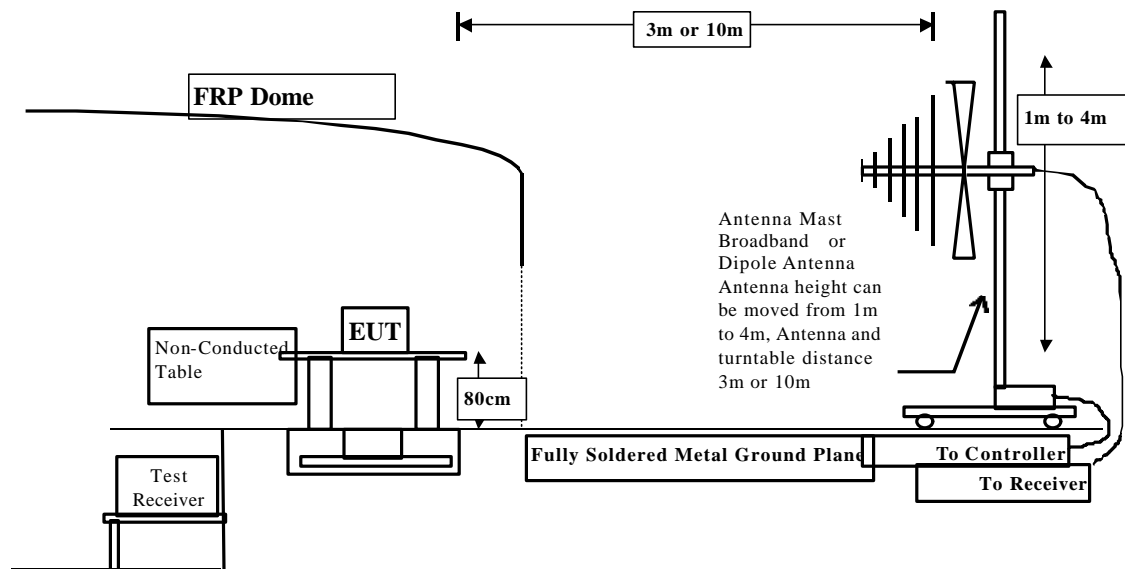

3.3 Limits

CISPR 22 Limits					FCC Part 15 Subpart B				
Frequency	Class A		Class B		Frequency	Class A		Class B	
MHz	Distance (m)	dBuV/m	Distance (m)	dBuV/m		uV/m	dBuV/m	uV/m	dBuV/m
30 – 230	10	40	10	30	30 – 88	90	39	100	40.0
230 – 1000	10	47	10	37	88 – 216	150	43.5	150	43.5
					216 – 960	210	46.5	200	46.0
					960 - 2000	300	49.5	500	54.0

Remark: 1. The tighter limit shall apply at the edge between two frequency bands.

2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3. RF Line Voltage (dBuV/m) = 20 log RF Line Voltage (uV/m)

3.4 Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 10 meters . The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4 /1992 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30) is 120 kHz.

3.5 Test Results

The radiated emission from the EUT is measured and shown in attachment 1 of test report. The acceptance criterion was met and the EUT passed the test.

4. EMI Reduction Method During Compliance Testing

No modification was made during testing.



5. Attachment

Attachment 1: Summary of Test Results	Number of Pages: 13
Attachment 2: EUT Test Photographs	Number of Pages: 6
Attachment 3: EUT Detailed Photographs	Number of Pages: 9



Attachment 1 : Summary of Test Results

The test results in the emission were performed according to the requirements of measurement standard and process. Quietek Corporation is assumed full responsibility for the accuracy and completeness of these measurements. The test data of the emission are listed as the attached data.

All the tests were carried out with the EUT in normal operation, which was defined as:

Mode 1: 1Mbps

Mode 2: 10Mbps

Mode 3: 100Mbps

The EUT passed all the tests.

The uncertainty is calculated in accordance with NAMAS NIS 81, The total uncertainty for this test is as follows:

➤ **Emission Test**

- Uncertainty in the Conducted Emission Test: < ± 2.0 dB
- Uncertainty in the field strength measured: < ± 4.0 dB

CONDUCTED EMISSION DATA

Date of Test : May 25, 2000 EUT : HF1000B
 Test Mde : Mde 1 Detect Mde : Quasi-Peak & Average

Frequency	Cable	LISN	Reading Level	Measurement Level	Limits
MHz	Loss	Factor	Line1	Line1	
	dB	dB	dBuV	dBuV	dBuV
* 0.199	0.02	0.10	45.94	46.06	63.63
0.263	0.03	0.10	37.77	37.90	61.33
0.331	0.04	0.10	36.29	36.43	59.43
0.463	0.06	0.10	30.63	30.79	56.64
4.432	0.19	0.16	35.13	35.49	56.00
20.002	0.35	0.45	36.82	37.63	60.00
Average:					
0.199	0.02	0.10	36.80	36.92	53.63
0.263	0.03	0.10	29.10	29.23	51.33
0.331	0.04	0.10	32.70	32.84	49.43
0.463	0.06	0.10	28.20	28.36	46.64
4.432	0.19	0.16	27.90	28.26	46.00
20.002	0.35	0.45	26.89	27.70	50.00

Remarks :

1. “ * ” means that this data is the worst emission level.



CONDUCTED EMISSION DATA

Date of Test : May 25, 2000 EUT : HF1000B
 Test Mode : Mode 1 Detect Mode : Quasi-Peak & Average

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level Line2 dBuV	Measurement Level Line2 dBuV	Limits dBuV
* 0.201	0.02	0.10	46.59	46.71	63.58
0.263	0.03	0.10	43.14	43.27	61.33
0.331	0.04	0.10	37.75	37.89	59.42
0.396	0.05	0.10	30.01	30.16	57.93
4.232	0.19	0.16	34.13	34.48	56.00
15.479	0.33	0.36	30.92	31.60	60.00

Average:

0.201	0.02	0.10	37.40	37.52	53.58
0.263	0.03	0.10	32.90	33.03	51.33
0.331	0.04	0.10	30.90	31.04	49.42
0.396	0.05	0.10	23.90	24.05	47.93
4.232	0.19	0.16	26.60	26.95	46.00
15.479	0.33	0.36	25.30	25.98	50.00

Remarks :

1. " * " means that this data is the worst emission level.



CONDUCTED EMISSION DATA

Date of Test : May 25, 2000 EUT : HF1000B

Test Mde : Mde 2 Detect Mde : Quasi-Peak & Average

Frequency	Cable	LISN	Reading Level	Measurement Level	Limits
MHz	Loss	Factor	Line1	Line1	
	dB	dB	dBuV	dBuV	dBuV
* 0.199	0.02	0.10	45.76	45.88	63.64
0.263	0.03	0.10	37.67	37.80	61.33
0.330	0.04	0.10	36.17	36.31	59.46
0.396	0.05	0.10	30.13	30.28	57.93
4.363	0.19	0.16	35.92	36.28	56.00
20.000	0.35	0.45	38.07	38.88	60.00
Average:					
0.199	0.02	0.10	36.90	37.02	53.64
0.263	0.03	0.10	29.20	29.33	51.33
0.330	0.04	0.10	32.60	32.74	49.46
0.396	0.05	0.10	26.00	26.15	47.93
4.363	0.19	0.16	27.80	28.16	46.00
20.000	0.35	0.45	27.90	28.71	50.00

Remarks :

1. “ * ” means that this data is the worst emission level.



CONDUCTED EMSSION DATA

Date of Test : May 25, 2000 EUT : HF1000B
 Test Mde : Mde 2 Detect Mde : Quasi-Peak & Average

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level Line2 dBuV	Measurement Level Line2 dBuV	Limits dBuV
* 0.198	0.01	0.10	47.36	47.47	63.68
0.265	0.03	0.10	38.98	39.11	61.28
0.330	0.04	0.10	37.49	37.63	59.45
0.396	0.05	0.10	29.95	30.10	57.93
4.366	0.19	0.16	36.22	36.58	56.00
19.999	0.35	0.45	37.62	38.43	60.00

Average:

0.198	0.01	0.10	36.40	36.51	53.68
0.265	0.03	0.10	29.90	30.03	51.28
0.330	0.04	0.10	30.70	30.84	49.45
0.396	0.05	0.10	23.70	23.85	47.93
4.366	0.19	0.16	27.80	28.16	46.00
19.999	0.35	0.45	27.60	28.41	50.00

Remarks :

1. “ * ” means that this data is the worst emission level.



CONDUCTED EMISSION DATA

Date of Test : May 25, 2000 EUT : HF1000B
 Test Mde : Mde 3 Detect Mde : Quasi-Peak & Average

Frequency	Cable	LISN	Reading Level	Measurement Level	Limits
MHz	Loss	Factor	Line1	Line1	
	dB	dB	dBuV	dBuV	dBuV
* 0.198	0.01	0.10	45.94	46.05	63.69
0.265	0.03	0.10	38.06	38.19	61.29
0.331	0.04	0.10	36.31	36.45	59.43
0.396	0.05	0.10	30.07	30.22	57.93
4.563	0.19	0.17	32.69	33.05	56.00
18.244	0.34	0.42	35.10	35.86	60.00
Average:					
0.198	0.01	0.10	36.90	37.01	53.69
0.265	0.03	0.10	29.50	29.63	51.29
0.331	0.04	0.10	32.70	32.84	49.43
0.396	0.05	0.10	26.00	26.15	47.93
4.563	0.19	0.17	26.60	26.96	46.00
18.244	0.34	0.42	31.10	31.86	50.00

Remarks :

1. " * " means that this data is the worst emission level.



CONDUCTED EMSSION DATA

Date of Test : May 25, 2000 EUT : HF1000B
 Test Mde : Mde 3 Detect Mde : Quasi-Peak & Average

Frequency	Cable	LISN	Reading Level	Measurement Level	Limits
MHz	Loss	Factor	Line2	Line2	
	dB	dB	dBuV	dBuV	dBuV
* 0.199	0.01	0.10	47.55	47.66	63.65
0.265	0.03	0.10	39.02	39.15	61.28
0.331	0.04	0.10	37.75	37.89	59.42
0.462	0.06	0.10	31.61	31.77	56.65
4.166	0.19	0.16	34.74	35.09	56.00
18.244	0.34	0.42	34.68	35.44	60.00
Average:					
0.199	0.01	0.10	36.40	36.51	53.65
0.265	0.03	0.10	29.90	30.03	51.28
0.331	0.04	0.10	30.80	30.94	49.42
0.462	0.06	0.10	28.50	28.66	46.65
4.166	0.19	0.16	26.40	26.75	46.00
18.244	0.34	0.42	31.00	31.76	50.00

Remarks :

1. “ * ” means that this data is the worst emission level.



RADIATED EMISSION DATA

Date of Test : May 25, 2000 EUT : HF1000B
 Test Mode : Mode 1 Test Site : No.1 Open Test Site

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Measurement Horizontal	Margin	Limit	Ant	Turn
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
125.000	2.07	11.84	0.00	7.18	21.09	8.91	30.00	100	140
200.000	2.78	9.30	0.00	9.21	21.29	8.71	30.00	100	203
* 225.000	3.03	9.83	0.00	14.05	26.91	3.09	30.00	100	126
240.038	3.17	11.32	0.00	8.66	23.15	13.85	37.00	100	28
550.000	5.06	19.16	0.00	3.18	27.40	9.60	37.00	100	19
600.000	5.31	18.85	0.00	8.52	32.68	4.32	37.00	100	8
650.000	5.58	19.15	0.00	7.16	31.89	5.11	37.00	100	118
700.000	5.83	19.19	0.00	2.26	27.28	9.72	37.00	100	65

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss



RADIATED EMISSION DATA

Date of Test : May 25, 2000 EUT : HF1000B
 Test Mode : Mode 1 Test Site : No.1 Open Test Site

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Measurement Vertical	Margin	Limit	Ant	Turn
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
125.000	2.07	11.49	0.00	6.08	19.64	10.36	30.00	100	99
200.000	2.78	9.07	0.00	14.15	26.01	3.99	30.00	100	203
* 225.000	3.03	9.68	0.00	15.51	28.21	1.79	30.00	100	116
240.035	3.17	11.22	0.00	9.78	24.17	12.83	37.00	100	103
299.997	3.76	13.56	0.00	3.59	20.90	16.10	37.00	100	59
600.000	5.31	18.42	0.00	4.98	28.72	8.28	37.00	100	18
650.000	5.58	18.50	0.00	6.86	30.94	6.06	37.00	100	90

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss



RADIATED EMISSION DATA

Date of Test : May 25, 2000 EUT : HF1000B
 Test Mode : Mode 2 Test Site : No.1 Open Test Site

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Measurement Horizontal	Margin	Limit	Ant	Turn
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
120.000	2.02	12.02	0.00	12.02	26.06	3.94	30.00	100	178
200.000	2.78	9.30	0.00	10.45	22.53	7.47	30.00	100	203
220.000	2.98	9.38	0.00	13.56	25.93	4.07	30.00	100	34
225.000	3.03	9.83	0.00	14.01	26.87	3.13	30.00	100	147
* 320.000	3.86	13.59	0.00	17.14	34.59	2.41	37.00	100	103
400.000	4.28	15.85	0.00	8.61	28.74	8.26	37.00	100	147
600.000	5.31	18.85	0.00	8.08	32.24	4.76	37.00	100	16
650.000	5.58	19.15	0.00	7.54	32.27	4.73	37.00	100	116

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss



RADIATED EMISSION DATA

Date of Test : May 25, 2000 EUT : HF1000B
 Test Mode : Mode 2 Test Site : No.1 Open Test Site

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Measurement Vertical	Margin	Limit	Ant	Turn
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
114.813	1.97	11.45	0.00	13.00	26.42	3.58	30.00	100	92
175.000	2.55	9.32	0.00	7.02	18.89	11.11	30.00	100	203
200.000	2.78	9.07	0.00	15.29	27.15	2.85	30.00	100	203
212.015	2.91	9.17	0.00	9.02	21.10	8.90	30.00	100	31
* 219.997	2.98	9.29	0.00	16.48	28.75	1.25	30.00	100	45
240.000	3.17	11.22	0.00	15.14	29.53	7.47	37.00	100	82
250.000	3.27	12.26	0.00	11.63	27.16	9.84	37.00	100	82
340.000	3.96	14.58	0.00	10.90	29.44	7.56	37.00	100	19

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss



RADIATED EMISSION DATA

Date of Test : May 25, 2000 EUT : HF1000B
 Test Mode : Mode 3 Test Site : No.1 Open Test Site

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Measurement Horizontal	Margin	Limit	Ant	Turn
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
125.000	2.07	11.84	0.00	12.04	25.95	4.05	30.00	100	203
139.523	2.21	11.28	0.00	14.15	27.64	2.36	30.00	100	93
* 150.000	2.31	10.72	0.00	15.40	28.43	1.57	30.00	100	95
175.000	2.55	9.76	0.00	9.32	21.63	8.37	30.00	100	151
200.000	2.78	9.30	0.00	15.81	27.89	2.11	30.00	100	162
250.000	3.27	12.61	0.00	7.49	23.37	13.63	37.00	100	53

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss



RADIATED EMISSION DATA

Date of Test : May 25, 2000 EUT : HF1000B
 Test Mode : Mode 3 Test Site : No.1 Open Test Site

Freq.	Cable Loss	Probe Factor	PreAMP	Reading Level	Measurement Vertical	Margin	Limit	Ant	Turn
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
75.000	1.58	6.83	0.00	7.03	15.44	14.56	30.00	100	203
* 109.500	1.92	11.55	0.00	15.29	28.75	1.25	30.00	100	31
118.400	2.00	11.49	0.00	13.34	26.83	3.17	30.00	100	101
175.000	2.55	9.32	0.00	11.86	23.73	6.27	30.00	100	23
200.000	2.78	9.07	0.00	16.57	28.43	1.57	30.00	100	180
225.000	3.03	9.68	0.00	12.41	25.11	4.89	30.00	100	19
240.000	3.17	11.22	0.00	9.32	23.71	13.29	37.00	100	34

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss

