

# TEST REPORT

**Equipment Under Test** : 802.11b/g Wireless LAN USB 2.0 Adapter  
**Model No.** : WUG2650,WUG2654  
**FCC ID** : MQ4WUG2650-4  
**Applicant** : AboCom Systems, Inc.  
**Address of Applicant** : 1F, No.21, Yanfa 2nd Rd.,SBIP, Hsinchu city 300,  
Taiwan( R.O.C.)  
**Date of Receipt** : 2004.06.11  
**Date of Test(s)** : 2004.06.16-2004.06.17  
**Date of Issue** : 2004.07.29

Standards:

**FCC OET Bulletin 65 supplement C,  
ANSI/IEEE C95.1 , C95.3**

In the configuration tested, the EUT complied with the standards specified above.

**Remarks:**

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan E&E Services or testing done by SGS Taiwan E&E Services in connection with distribution or use of the product described in this report must be approved by SGS Taiwan E&E Services in writing.

**Tested by** : Dikin Yang **Date** : 2004.06.17

**Approved by** : Robert Chang **Date** : 2004.07.29

# Contents

<b>1. General Information</b>	
1.1 Testing Laboratory .....	3
1.2 Details of Applicant .....	3
1.3 Description of EUT(s) .....	3
1.4 Test Environment .....	4
1.5 Operation description .....	4
1.6 Evaluation procedures .....	5
1.7 The SAR Measurement System .....	6
1.8 System Components .....	7
1.9 SAR System Verification .....	8
1.10 Tissue Simulant Fluid for the Frequency Band 2.4 to 2.5 GHz .....	9
1.11 Test Standards and Limits .....	10
<b>2. Instruments List</b> .....	12
<b>3. Summary of Results</b> .....	13
<b>4. Measurements</b> .....	14
<b>802.11b</b>	
<b>Configuration 1</b>	
4.1.1 Vertical position, lowest channel .....	14
4.1.2 Vertical position, middle channel .....	15
4.1.3 Vertical position, highest channel .....	16
<b>Configuration 2</b>	
4.1.4 Horizontal position, lowest channel .....	17
4.1.5 Horizontal position, middle channel .....	18
4.1.6 Horizontal position, highest channel .....	19
<b>802.11g</b>	
<b>Configuration 1</b>	
4.2.1 Vertical position, lowest channel .....	20
4.2.2 Vertical position, middle channel .....	21
4.2.3 Vertical position, highest channel .....	22
<b>Configuration 2</b>	
4.2.4 Horizontal position, lowest channel .....	23
4.2.5 Horizontal position, middle channel .....	24
4.2.6 Horizontal position, highest channel .....	25
4.3 System Performance Validation .....	26
<b>APPENDIX</b>	
1. Photographs of Test Setup .....	27
2. Photographs of EUT .....	31
3. Probe Calibration certificate .....	33
4. Uncertainty Analysis .....	37
5. Phantom description .....	38
6. System Validation from Original equipment supplier .....	39
7. Z-axis Plot for .....	40

# 1. General Information

## 1.1 Testing Laboratory

SGS Taiwan Ltd.  
 1F, No. 134, Wukung Road, Wuku industrial zone  
 Taipei county , Taiwan , R.O.C.  
 Telephone : +886-2-2299-3279  
 Fax : +886-2-2298-2698  
 Internet : <http://www.sgs.com.tw>

## 1.2 Details of Applicant

Applicant : AboCom Systems, Inc.  
 Address : 1F, No.21, Yanfa 2nd Rd.,SBIP, Hsinchu city  
 300,Taiwan( R.O.C.)

## 1.3 Description of EUT(s)

Equipment Type	802.11b/g Wireless LAN USB 2.0 Adapter	
Test Procedure	FCC OET Bulletin 65, Supplement C	
TX Frequency range	2412-2462 MHz	
FCC ID	MQ4WUG2650-4	
Model No.	WUG2650, WUG2654	
Number Of Channel	11	
Modulation	Direct Sequence Spread Spectrum (DSSS)	
Transfer Rate	802.11b	802.11g
	11 Mbps	6 Mbps
Max. SAR Measured	802.11b	802.11g
	0.575 W/kg	0.382 W/kg
Antenna Gain	2 dBi	
Antenna Type	Broad Band LTCC Multi Layer Ceramic Chip Antenna	

I/O Port	USB
Power Supply	From USB slot 5 V


#### 1.4 Test Environment

Ambient temperature : 22.5° C

Tissue Simulating Liquid : 21.2° C

Relative Humidity : 60 %

#### 1.5 Operation Configuration

	802.11b	802.11g
Channel Frequency Under Test And Its Conducted Output Power (Peak)	16.87 dBm (2412MHz)	14.70 dBm (2412MHz)
	16.35 dBm (2437MHz)	15.19 dBm (2437MHz)
	16.26 dBm (2462MHz)	15.35 dBm (2462MHz)
Antenna Configuration	Broad Band LTCC Multi Layer Ceramic Chip Antenna	
Antenna Position		
EUT Power Source	From USB slot 5 V	

The EUT is USB Adapter, which is installed inside a Notebook. Since the Notebook is placed on the top of the leg, when it operates, it is to be defined as a portable device. SAR measurement is mandatory. In order to measure SAR value, we used continuous transmission mode. The test set up mode was prepared by manufacturer. Value of Crest Factor = 1 was used for SAR testing according to the nature of the EUT. The test configuration tested at the low, middle and high frequency channels (2412MHz, 2437MHz and 2462MHz).By using the program subordinated in the computer, and change into the written channel, and then set in highest power. Finally, we will test it by dividing into 2 ways.

Configuration 1: Vertical of the PC at 90° and at a distance of 0.0 cm from the base of the phantom, and the antenna tip upward.(Fig.3 & Fig.4)

Configuration 2: Bottom of the PC is paralleled and at a distance of 0.0 cm from the base

of the phantom, but 0.4 cm Spacing between EUT & Planar Phantom.(Fig.5 & Fig.6 & Fig.7)

**NOTE:**

1. Please reference "APPENDIX 1" for the photos of test configuration.
2. All test Configuration have been complied with the body worn configuration.
3. The Notebook has been installed the controlling software that could control the EUT transmitted channel and power. But that software is just for test software, not for normal user.

**1.6 EVALUATION PROCEDURES**

The evaluation was performed with the following procedure:

- (1). Measurement of the SAR value at a fixed location above the ear point or central position of flat phantom was used as a reference value for assessing the power drop.
- (2). The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension of the head or EUT and the horizontal grid spacing was 15 mm x 15 mm. Based on these data, the area of the maximum absorption was determined by splint interpolation.
- (3). Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7 x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:
  1. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm [1]. A polynomial of the fourth order was calculated through the points in z-axis. This polynomial was then used to evaluate the points between the surface and the probe tip.
  2. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splints with the "Not a knot"-condition (in x, y and z-directions) [1], [2]. The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
  3. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
  4. Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

## 1.7 The SAR Measurement System

A photograph of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system ( Speag Dasy 4 professional system ). A Model ET3DV6 1760 E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation  $SAR = \sigma (|E_i|^2) / \rho$  where  $\sigma$  and  $\rho$  are the conductivity and mass density of the tissue-simulant.

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

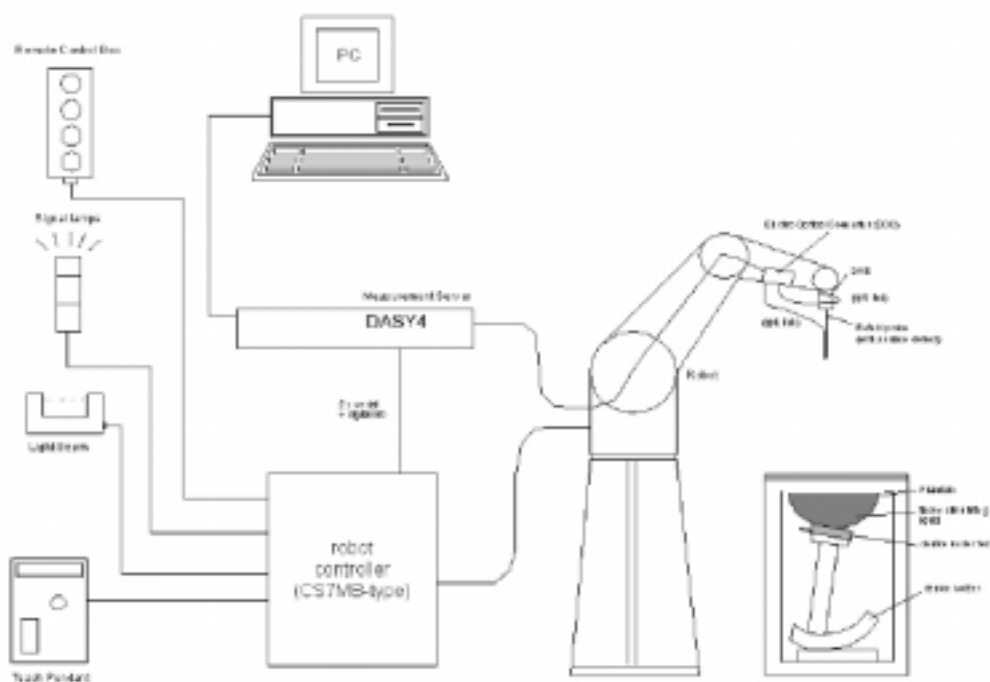


Fig. a The microwave circuit arrangement used for SAR system verification

- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog


signal from the optical surface detection. The EOC is connected to the measurement server.

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

## 1.8 System Components

### ET3DV6 E-Field Probe

Construction:	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g. glycol)
Calibration:	In air from 10 MHz to 2.5 GHz In brain simulating tissue at frequencies of 2450 MHz (accuracy $\pm 8\%$ )
Frequency:	10 MHz to >6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 3 GHz)

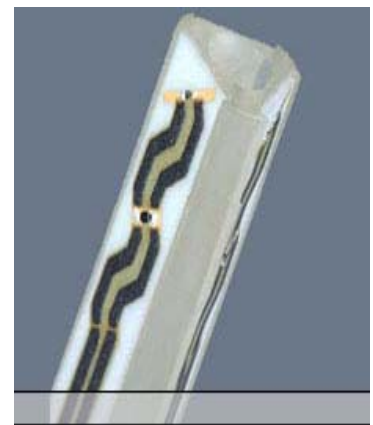

ET3DV6 E-Field Probe

Directivity:	$\pm 0.2$ dB in brain tissue (rotation around probe axis) $\pm 0.4$ dB in brain tissue (rotation normal to probe axis)
Dynamic Rnge:	5 $\mu$ W/g to >100 mW/g; Linearity: $\pm 0.2$ dB
Srfce. Detect:	$\pm 0.2$ mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions:	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm

Distance from probe tip to dipole centers: 2.7 mm

Application: General dosimetry up to 3 GHz  
Compliance tests of mobile phone

### **SAM PHANTOM V4.0C**

Construction: The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

Shell Thickness:  $2 \pm 0.2$  mm

Filling Volume: Approx. 25 liters

Dimensions: Height: 810 mm;  
Length: 1000 mm;  
Width: 500 mm



PHANTOM v4.0C

### **DEVICE HOLDER**

Construction In combination with the Twin SAM Phantom V4.0/V4.0C or Twin SAM, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Device Holder

## **1.9 SAR System Verification**



The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 2450MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was in the range 22.5 °C, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

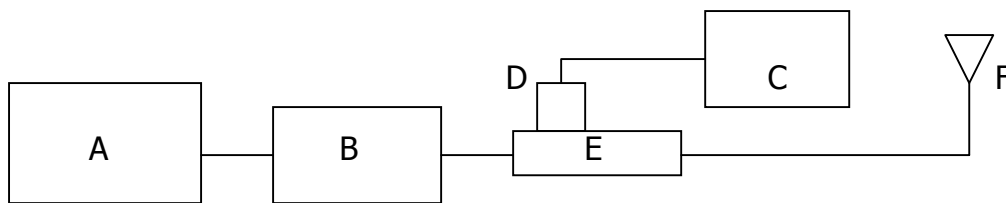


Fig. b The microwave circuit arrangement used for SAR system verification

- A. Agilent Model 8648D Signal Generator
- B. Mini circuits Model ZHL-42 Amplifier
- C. Agilent Model E4416A Power Meter
- D. Agilent Model 8482H Power Sensor
- E. Agilent Model 777D Dual directional coupling
- F. Reference dipole antenna



Photograph of the 2450MHz System Check

Validation Kit	Frequency	Target SAR 1g (250mW)	Target SAR 10g (250mW)	Measured SAR 1g	Measured SAR 10g	Measured date
DT3DV6 S/N :1760	2450 MHz	14.2 m W/g	6.62 m W/g	13.9 m W/g	6.25 m W/g	2004-06-16

Table 1. Results system validation

### 1.10 Tissue Simulant Fluid for the Frequency Band 2.4 to 2.5 GHz

The dielectric properties for this body-simulant fluid were measured by using the HP Model 85070D Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with HP 8735D Network Analyzer(30 KHz-6000 MHz ) by using a procedure

detailed in Section V.

F (Mhz)	Tissue type	Limits/ Measured	Dielectric Parameters		
			Permittivity	Conductivity	Simulated Tissue Temp( $^{\circ}$ C)
2450	Body	Measured, 2004.06.16	53.22	1.985	21.2
		Measured, 2004.06.17	53.1	1.981	21.2
		Recommended Limits	50.1-55.3	1.85-2.05	20-24

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The depth of the tissue simulant in the ear reference point of the phantom was  $15\text{cm}\pm 5\text{mm}$  during all tests. (Fig .2)

The composition of the brain tissue simulating liquid for 2450 MHz is:

Ingredient	2450Mhz (Head)	2450Mhz (Body)
DGMBE	550.0 g	301.7 ml
Water	450.0 g	698.3 ml
Total amount	1 L (1.0kg)	1 L (1.0kg)

### 1.11 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1-1992, Copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with

MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

(1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube). Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

(2) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.(Table .4)

<b>Human Exposure</b>	<b>Uncontrolled Environment General Population</b>	<b>Controlled Environment Occupational</b>
<b>Spatial Peak SAR (Brain)</b>	1.60 m W/g	8.00 m W/g
<b>Spatial Average SAR (Whole Body)</b>	0.08 m W/g	0.40 m W/g
<b>Spatial Peak SAR (Hands/Feet/Ankle/Wrist)</b>	4.00 m W/g	20.00 m W/g

Table .4 RF exposure limits

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

## 2. Instruments List

Manufacturer	Device	Type	Serial number	Date of last calibration
Schmid & Partner Engineering AG	Dosimetric E-Field Probe	ET3DV6	1760	Feb.17.2004
Schmid & Partner Engineering AG	2450 MHz System Validation Dipole	D2450V2	727	Mar.23.2004
Schmid & Partner Engineering AG	Data acquisition Electronics	DAE3	547	Feb.10.2004
Schmid & Partner Engineering AG	Software	DASY 4 V4.1c Build 47	---	Calibration isn't necessary
Schmid & Partner Engineering AG	Phantom	SAM	---	Calibration isn't necessary
Agilent	Network Analyzer	8753D	3410A05547	Jun.03.2004
Agilent	Dielectric Probe Kit	85070D	US01440168	Calibration isn't necessary
Agilent	Dual-directional coupler	777D 778D	50114 50313	Jun.27.2003 Jun.27.2003
Agilent	RF Signal Generator	8648D	3847M00432	Feb.09.2004
Agilent	Power Sensor	8482H	MY41091011	Nov.05.2003

## 3. Summary of Results

### 802.11b Mode

SAR MEASUREMENT							
Crest factor : 1 (Duty cycle: 100%)							
Laptop PC : IBM ThinkPad T30 , S/N: 99AMZM5				Depth of Liquid : 15.0 cm			
EUT Configuration 1							
EUT Set-up conditions		Frequency		Conducted Power [dBm] (Peak)	Liquid Temp[°C]	SAR (W/kg)	Limit (W/kg)
Sep. [cm]	Antenna	Channel	MHz				
0.0	Printed	1	2412	16.87 dBm	21.2	0.109	1.6
		6	2437	16.35 dBm	21.2	0.0833	
		11	2462	16.26 dBm	21.2	0.0981	
EUT Configuration 2							
EUT Set-up conditions		Frequency		Conducted Power [dBm] (Peak)	Liquid Temp[°C]	SAR (W/kg)	Limit (W/kg)
Sep. [cm]	Antenna	Channel	MHz				
0.0	Printed	1	2412	16.87 dBm	21.2	0.353	1.6
		6	2437	16.35 dBm	21.2	0.342	
		11	2462	16.26 dBm	21.2	0.575	

### 802.11g Mode

EUT Configuration 1							
EUT Set-up conditions		Frequency		Conducted Power [dBm] (Peak)	Liquid Temp[°C]	SAR (W/kg)	Limit (W/kg)
Sep. [cm]	Antenna	Channel	MHz				
0.0	Printed	1	2412	14.70 dBm	21.4	0.0855	1.6
		6	2437	15.19 dBm	21.2	0.0701	
		11	2462	15.35 dBm	21.4	0.077	
EUT Configuration 2							
EUT Set-up conditions		Frequency		Conducted Power [dBm] (Peak)	Liquid Temp[°C]	SAR (W/kg)	Limit (W/kg)
Sep. [cm]	Antenna	Channel	MHz				
0.0	Printed	1	2412	14.70 dBm	21.5	0.261	1.6
		6	2437	15.19 dBm	21.5	0.207	
		11	2462	15.35 dBm	21.5	0.382	

Measured Mixture Type	Body	Relative Humidity	60%
Ambient Temperature	22.5 °C	Fluid Temperature	21.2°C

## 4. Measurements

### 802.11b

#### Vertical position, lowest channel

Date/Time: 06/16/04 18:10:08

DUT: 802.11b/g Wireless LAN USB 2.0 Adapter ; Type: WUG2650;

Program: 802.11b+g WLAN Adaptor

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: M2450 (  $\sigma = 1.93862$  mho/m,  $\mu_r = 53.3132$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

#### DASY4 Configuration:

- Probe: ET3DV6 - SN1760; ConvF(4.18, 4.18, 4.18); Calibrated: 2004/2/17
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2004/2/10
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

#### Vertical/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 7.28 V/m

Power Drift = -0.2 dB

Maximum value of SAR = 0.093 mW/g

#### Vertical/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.53 W/kg

SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.0382 mW/g

Reference Value = 7.28 V/m

Power Drift = -0.2 dB

Maximum value of SAR = 0.109 mW/g

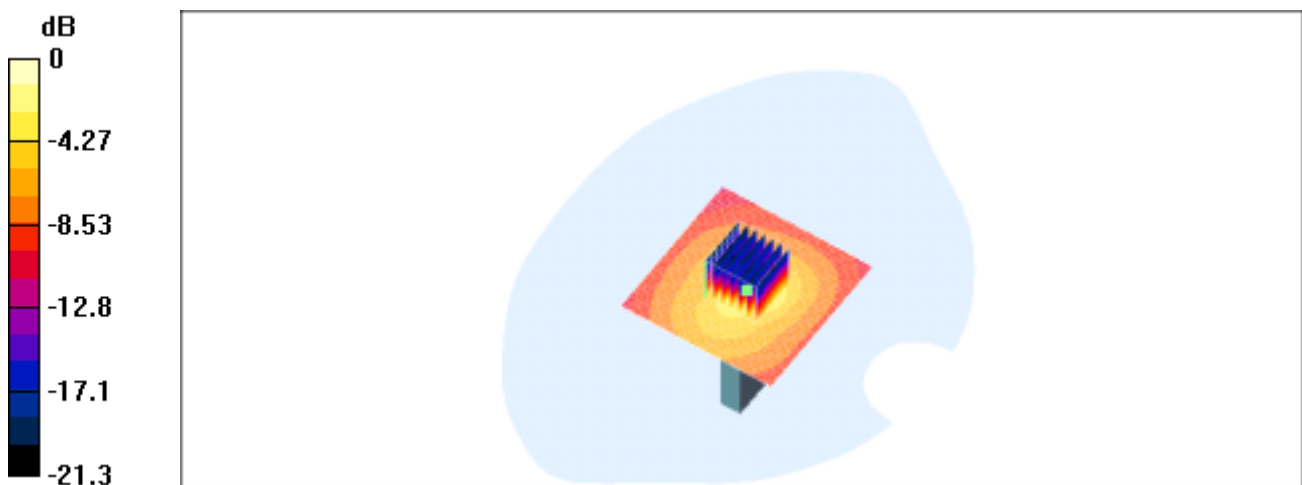

0 dB = 0.109mW/g

## 802.11b

### Vertical position, middle channel

Date/Time: 06/16/04 17:08:17

DUT: 802.11b/g Wireless LAN USB 2.0 Adapter ; Type: WUG2650;

Program: 802.11b WLAN Adapter

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 (  $\rho = 1.97667$  mho/m,  $r = 53.3192$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1760; ConvF(4.18, 4.18, 4.18); Calibrated: 2004/2/17
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2004/2/10
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Vertical/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 6.15 V/m

Power Drift = -0.06 dB

Maximum value of SAR = 0.0695 mW/g

**Vertical/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.391 W/kg

SAR(1 g) = 0.0833 mW/g; SAR(10 g) = 0.0294 mW/g

Reference Value = 6.15 V/m

Power Drift = -0.06 dB

Maximum value of SAR = 0.0902 mW/g

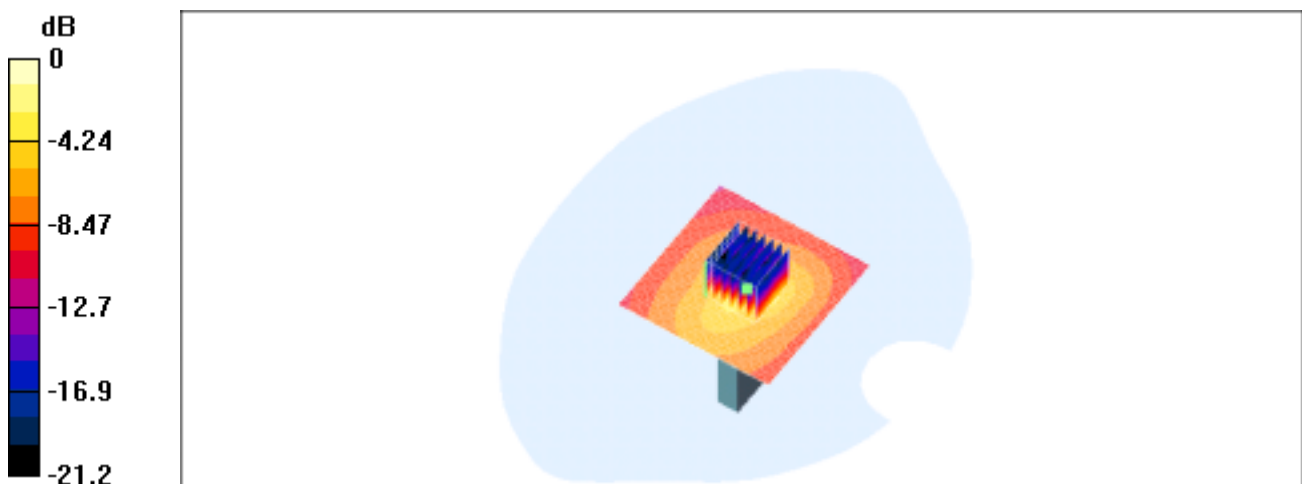

0 dB = 0.0902mW/g

## 802.11b

### Vertical position, highest channel

Date/Time: 06/16/04 19:42:16

DUT: 802.11b/g Wireless LAN USB 2.0 Adapter ; Type: WUG2650;  
Program: 802.11b WLAN Adapter

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1  
Medium: M2450 (  $\rho = 1.99161$  mho/m,  $r = 53.0924$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1760; ConvF(4.18, 4.18, 4.18); Calibrated: 2004/2/17
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2004/2/10
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Vertical/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 6.8 V/m

Power Drift = -0.09 dB

Maximum value of SAR = 0.0821 mW/g

**Vertical/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.459 W/kg

SAR(1 g) = 0.0981 mW/g; SAR(10 g) = 0.034 mW/g

Reference Value = 6.8 V/m

Power Drift = -0.09 dB

Maximum value of SAR = 0.105 mW/g

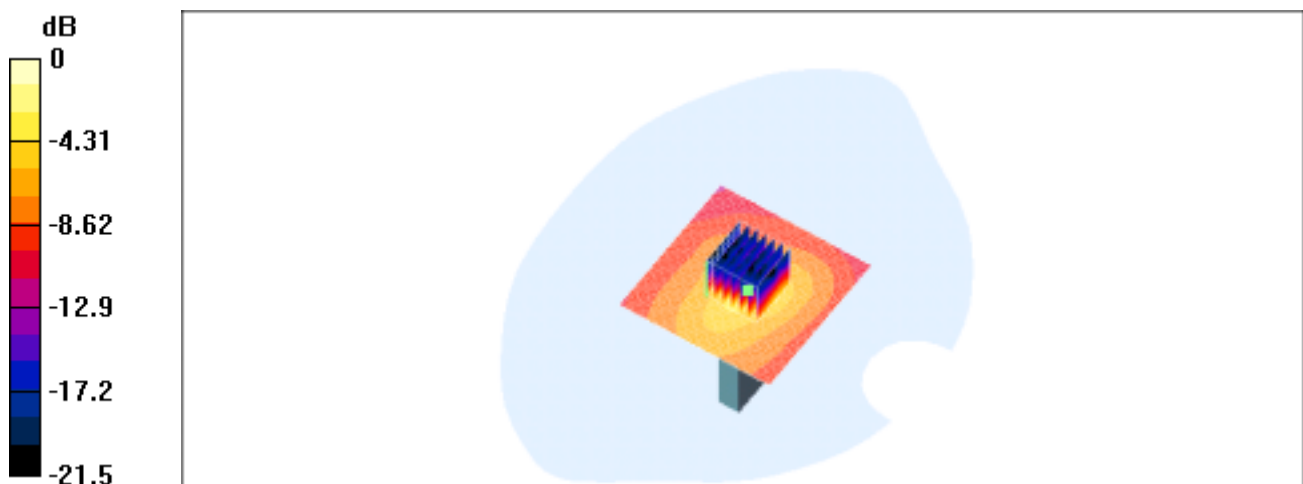

0 dB = 0.105mW/g



## 802.11b

### Horizontal position, lowest channel

Date/Time: 06/17/04 18:47:36

DUT: 802.11b/g Wireless LAN USB 2.0 Adapter ; Type: WUG2650;  
Program: 802.11b WLAN Adapter

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium: M2450 (  $\sigma = 1.93862$  mho/m,  $\epsilon_r = 53.3132$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

#### DASY4 Configuration:

- Probe: ET3DV6 - SN1760; ConvF(4.18, 4.18, 4.18); Calibrated: 2004/2/17
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2004/2/10
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

#### Horizontal/Area Scan (61x71x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 7.21 V/m

Power Drift = 0.08 dB

Maximum value of SAR = 0.405 mW/g

#### Horizontal/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.684 W/kg

SAR(1 g) = 0.353 mW/g; SAR(10 g) = 0.18 mW/g

Reference Value = 7.21 V/m

Power Drift = 0.08 dB

Maximum value of SAR = 0.376 mW/g

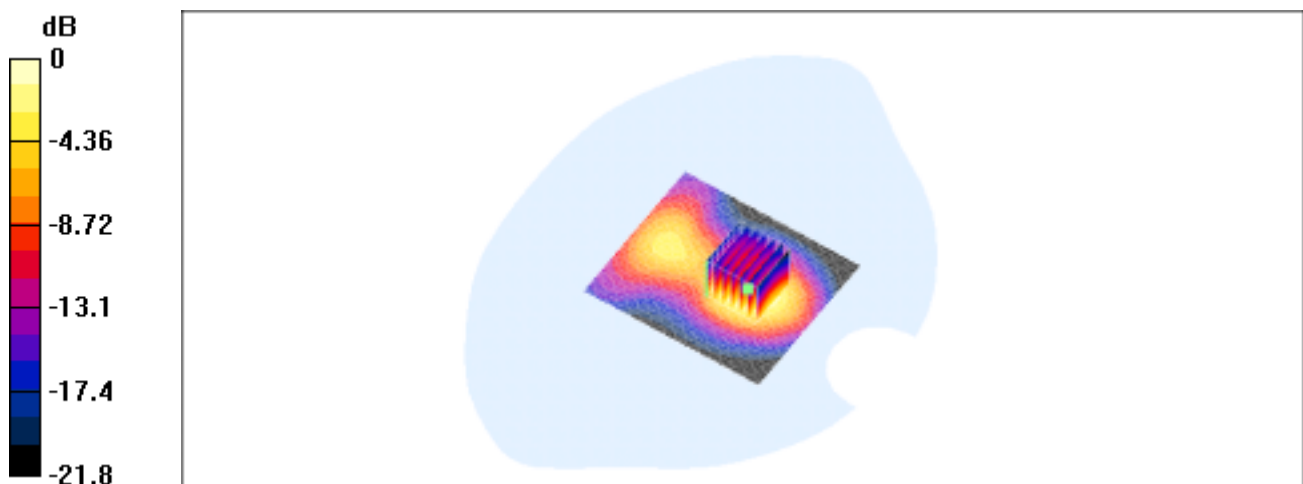

0 dB = 0.376mW/g

## 802.11b

### Horizontal position, middle channel

Date/Time: 06/17/04 19:47:00

DUT: 802.11b/g Wireless LAN USB 2.0 Adapter ; Type: WUG2650;  
Program: 802.11b WLAN Adapter

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: M2450 (  $\rho = 1.97667$  mho/m,  $r = 53.3192$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

#### DASY4 Configuration:

- Probe: ET3DV6 - SN1760; ConvF(4.18, 4.18, 4.18); Calibrated: 2004/2/17
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2004/2/10
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

#### Horizontal/Area Scan (61x71x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 7.24 V/m

Power Drift = 0.06 dB

Maximum value of SAR = 0.393 mW/g

#### Horizontal/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.675 W/kg

SAR(1 g) = 0.342 mW/g; SAR(10 g) = 0.172 mW/g

Reference Value = 7.24 V/m

Power Drift = 0.06 dB

Maximum value of SAR = 0.365 mW/g

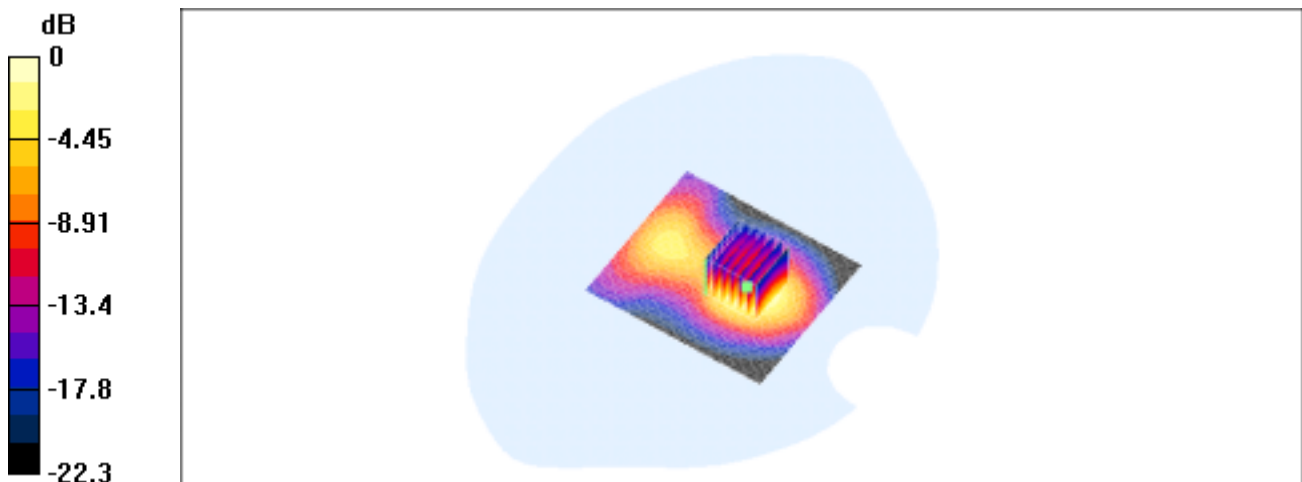

0 dB = 0.365mW/g

## 802.11b

### Horizontal position, highest channel

Date/Time: 06/16/04 20:34:09

DUT: 802.11b/g Wireless LAN USB 2.0 Adapter ; Type: WUG2650;

Program: 802.11b WLAN Adapter

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 (  $\rho = 1.99161$  mho/m,  $r = 53.0924$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1760; ConvF(4.18, 4.18, 4.18); Calibrated: 2004/2/17
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2004/2/10
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Horizontal/Area Scan (61x71x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 11.5 V/m

Power Drift = 0.2 dB

Maximum value of SAR = 0.624 mW/g

**Horizontal/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.575 mW/g; SAR(10 g) = 0.289 mW/g

Reference Value = 11.5 V/m

Power Drift = 0.2 dB

Maximum value of SAR = 0.617 mW/g

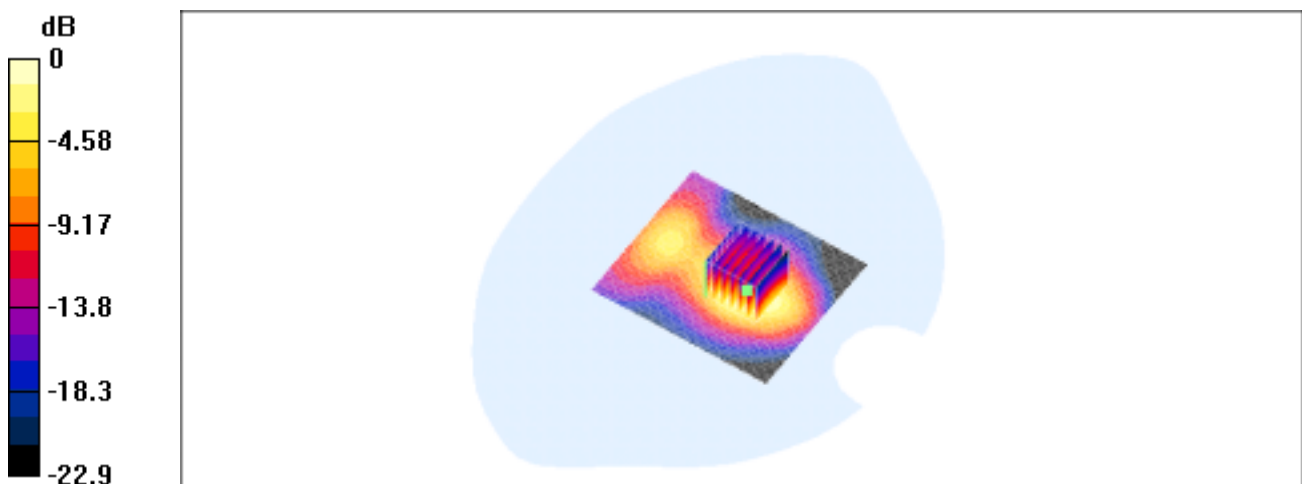

0 dB = 0.617mW/g

## 802.11g

### Vertical position, lowest channel

Date/Time: 06/16/04 15:03:15

DUT: 802.11b/g Wireless LAN USB 2.0 Adapter ; Type: WUG2650;  
Program: 802.11g WLAN Adapter

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium: M2450 (  $\sigma = 1.93862$  mho/m,  $\epsilon_r = 53.3132$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

#### DASY4 Configuration:

- Probe: ET3DV6 - SN1760; ConvF(4.18, 4.18, 4.18); Calibrated: 2004/2/17
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2004/2/10
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Vertical/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 7.13 V/m

Power Drift = -0.3 dB

Maximum value of SAR = 0.0886 mW/g

**Vertical/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.425 W/kg

SAR(1 g) = 0.0855 mW/g; SAR(10 g) = 0.0302 mW/g

Reference Value = 7.13 V/m

Power Drift = -0.3 dB

Maximum value of SAR = 0.0939 mW/g

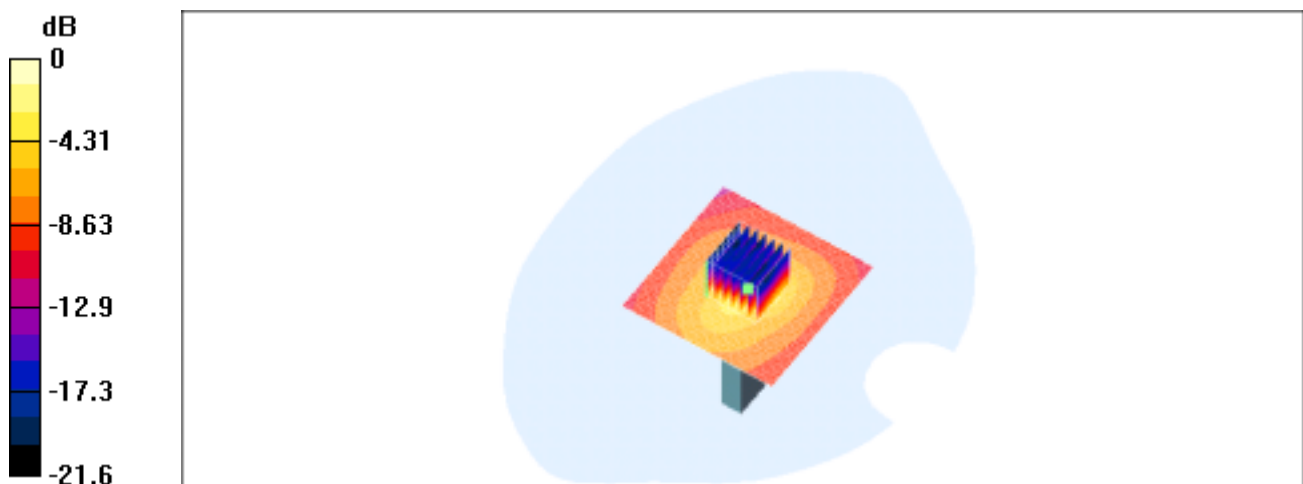

0 dB = 0.0939mW/g

## 802.11g

### Vertical position, middle channel

Date/Time: 06/16/04 15:27:02

DUT: 802.11b/g Wireless LAN USB 2.0 Adapter ; Type: WUG2650;

Program: 802.11g WLAN Adapter

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 (  $\sigma = 1.97667$  mho/m,  $\epsilon_r = 53.3192$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1760; ConvF(4.18, 4.18, 4.18); Calibrated: 2004/2/17
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2004/2/10
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Vertical/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 6.21 V/m

Power Drift = 0.06 dB

Maximum value of SAR = 0.069 mW/g

**Vertical/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.356 W/kg

SAR(1 g) = 0.0701 mW/g; SAR(10 g) = 0.024 mW/g

Reference Value = 6.21 V/m

Power Drift = 0.06 dB

Maximum value of SAR = 0.0777 mW/g

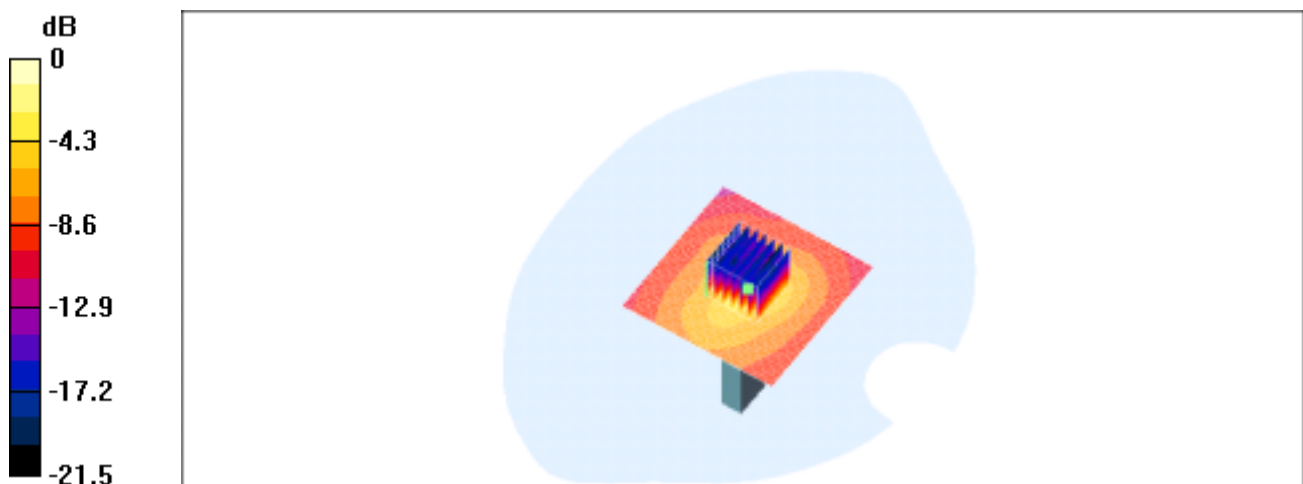

0 dB = 0.0777mW/g

## 802.11g

### Vertical position, highest channel

Date/Time: 06/16/04 16:18:14

DUT: 802.11b/g Wireless LAN USB 2.0 Adapter ; Type: WUG2650;

Program: 802.11g WLAN Adapter

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 (  $\sigma = 1.99161$  mho/m,  $\epsilon_r = 53.0924$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1760; ConvF(4.18, 4.18, 4.18); Calibrated: 2004/2/17
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2004/2/10
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Vertical/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 6.06 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.0656 mW/g

**Vertical/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.372 W/kg

SAR(1 g) = 0.077 mW/g; SAR(10 g) = 0.0264 mW/g

Reference Value = 6.06 V/m

Power Drift = -0.1 dB

Maximum value of SAR = 0.0763 mW/g

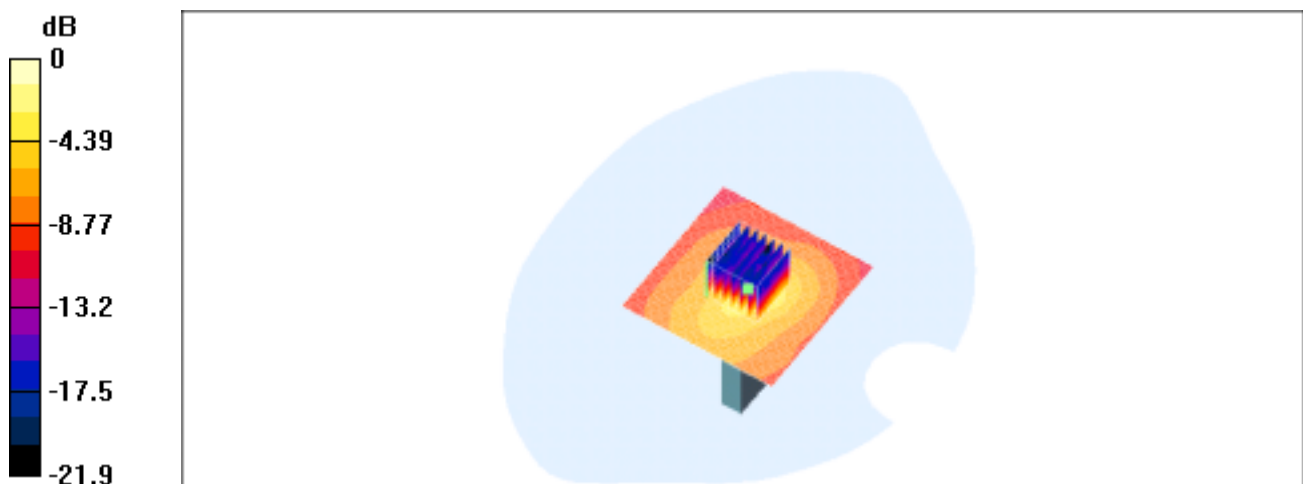

0 dB = 0.0763mW/g

## 802.11g

### Horizontal position, lowest channel

Date/Time: 06/17/04 21:58:09

DUT: 802.11b/g Wireless LAN USB 2.0 Adapter ; Type: WUG2650;

Program: 802.11g WLAN Adapter

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: M2450 (  $\sigma = 1.93862$  mho/m,  $\epsilon_r = 53.3132$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1760; ConvF(4.18, 4.18, 4.18); Calibrated: 2004/2/17
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2004/2/10
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Horizontal/Area Scan (61x71x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 6.46 V/m

Power Drift = -0.2 dB

Maximum value of SAR = 0.33 mW/g

**Horizontal/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.505 W/kg

SAR(1 g) = 0.261 mW/g; SAR(10 g) = 0.133 mW/g

Reference Value = 6.46 V/m

Power Drift = -0.2 dB

Maximum value of SAR = 0.279 mW/g

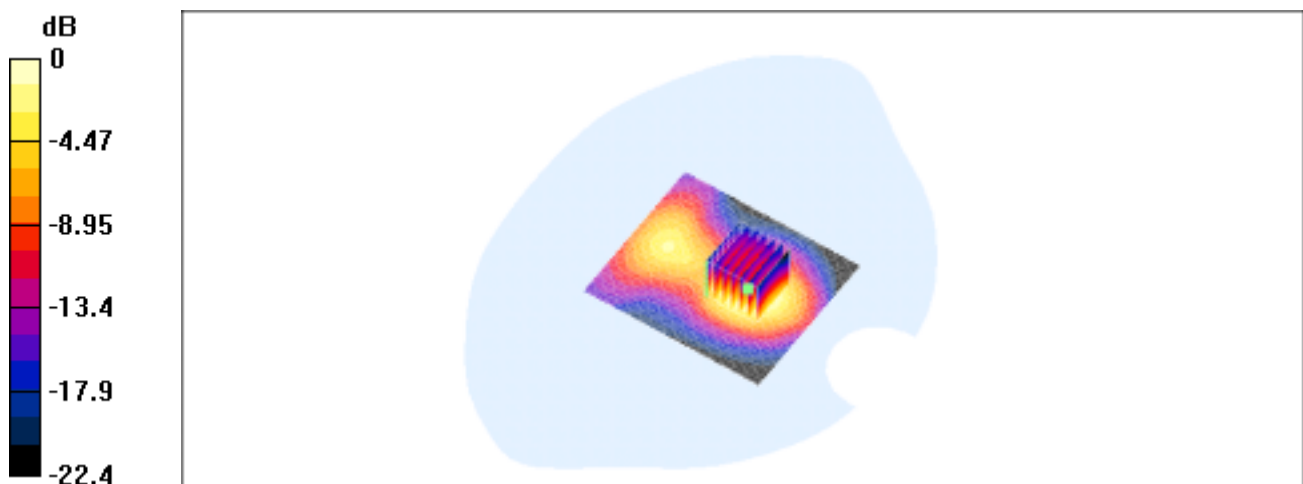

0 dB = 0.279mW/g

## 802.11g

### Horizontal position, middle channel

Date/Time: 06/17/04 23:07:19

DUT: 802.11b/g Wireless LAN USB 2.0 Adapter ; Type: WUG2650;

Program: 802.11g WLAN Adapter

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 (  $\sigma = 1.97667$  mho/m,  $\epsilon_r = 53.3192$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1760; ConvF(4.18, 4.18, 4.18); Calibrated: 2004/2/17
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2004/2/10
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Horizontal/Area Scan (61x71x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 7.23 V/m

Power Drift = 0.1 dB

Maximum value of SAR = 0.226 mW/g

**Horizontal/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.41 W/kg

SAR(1 g) = 0.207 mW/g; SAR(10 g) = 0.104 mW/g

Reference Value = 7.23 V/m

Power Drift = 0.1 dB

Maximum value of SAR = 0.221 mW/g

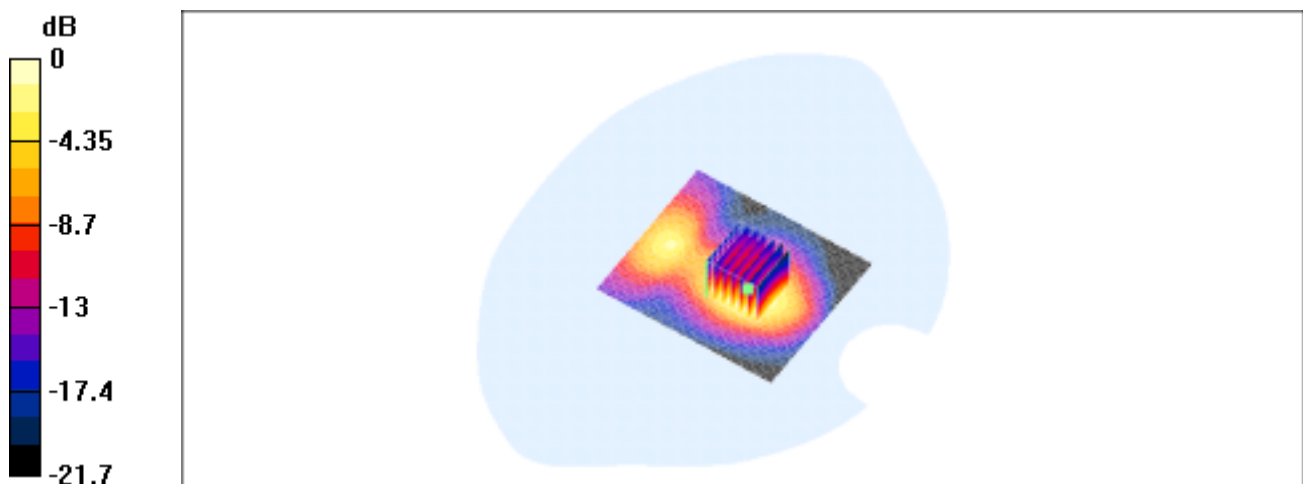

0 dB = 0.221mW/g



## 802.11g

### Horizontal position, highest channel

Date/Time: 06/17/04 20:14:39

DUT: 802.11b/g Wireless LAN USB 2.0 Adapter ; Type: WUG2650;

Program: 802.11g WLAN Adapter

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 (  $\sigma = 1.99161$  mho/m,  $\mu_r = 53.0924$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1760; ConvF(4.18, 4.18, 4.18); Calibrated: 2004/2/17
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2004/2/10
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

**Horizontal/Area Scan (61x71x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 8.42 V/m

Power Drift = -0.7 dB

Maximum value of SAR = 0.49 mW/g

**Horizontal/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.782 W/kg

SAR(1 g) = 0.382 mW/g; SAR(10 g) = 0.191 mW/g

Reference Value = 8.42 V/m

Power Drift = -0.7 dB

Maximum value of SAR = 0.407 mW/g

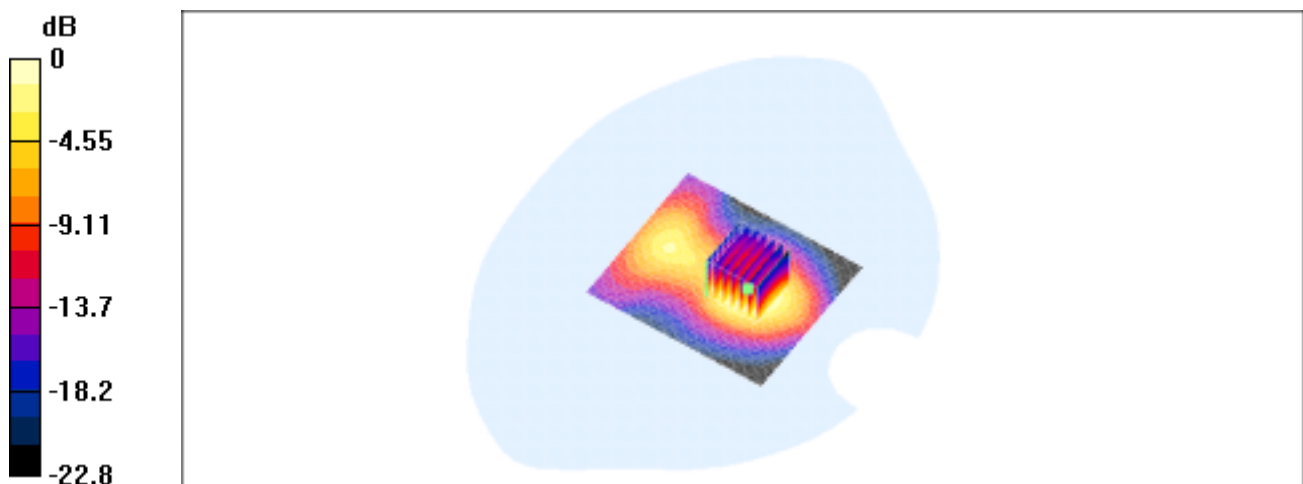

0 dB = 0.407mW/g

## SAR System Performance Verification

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:727  
Program: 2004-06-16

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium: M2450 ( $\epsilon = 1.98454$  mho/m,  $\mu_r = 53.2154$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section

### DASY4 Configuration:

- Probe: ET3DV6 - SN1760; ConvF(4.18, 4.18, 4.18); Calibrated: 2004/2/17
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2004/2/10
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Pin = 250 mw/Area Scan (101x101x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 91.7 V/m

Power Drift = -0.02 dB

Maximum value of SAR = 15.2 mW/g

Pin = 250 mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 31.1 W/kg

SAR(1 g) = 13.9 mW/g; SAR(10 g) = 6.25 mW/g

Reference Value = 91.7 V/m

Power Drift = -0.02 dB

Maximum value of SAR = 15.2 mW/g

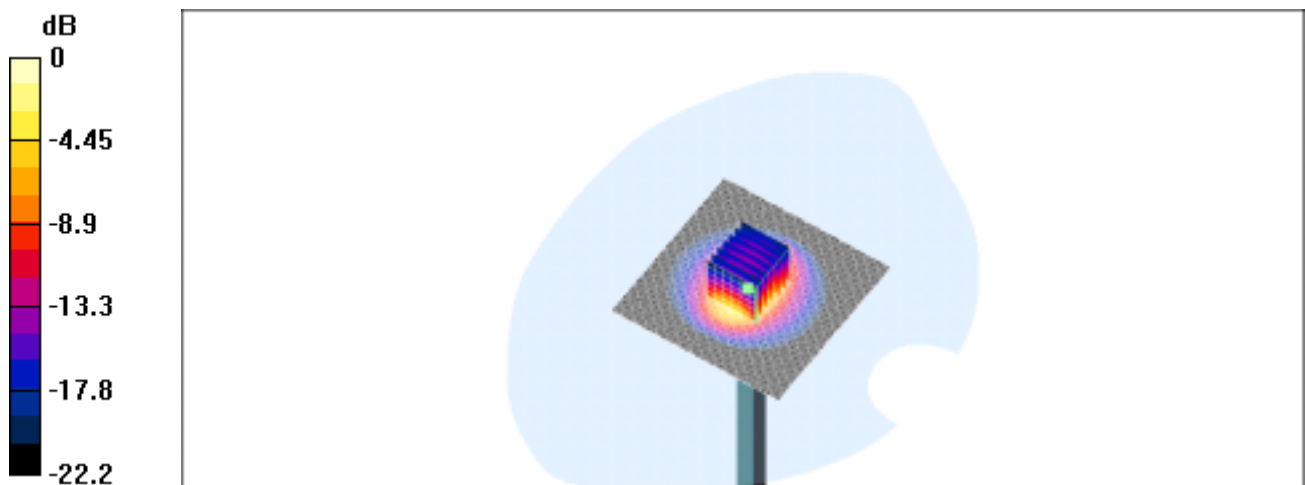

0 dB = 15.2mW/g

## Appendix Photographs of Test Setup



Fig.1 Photograph of the SAR measurement System

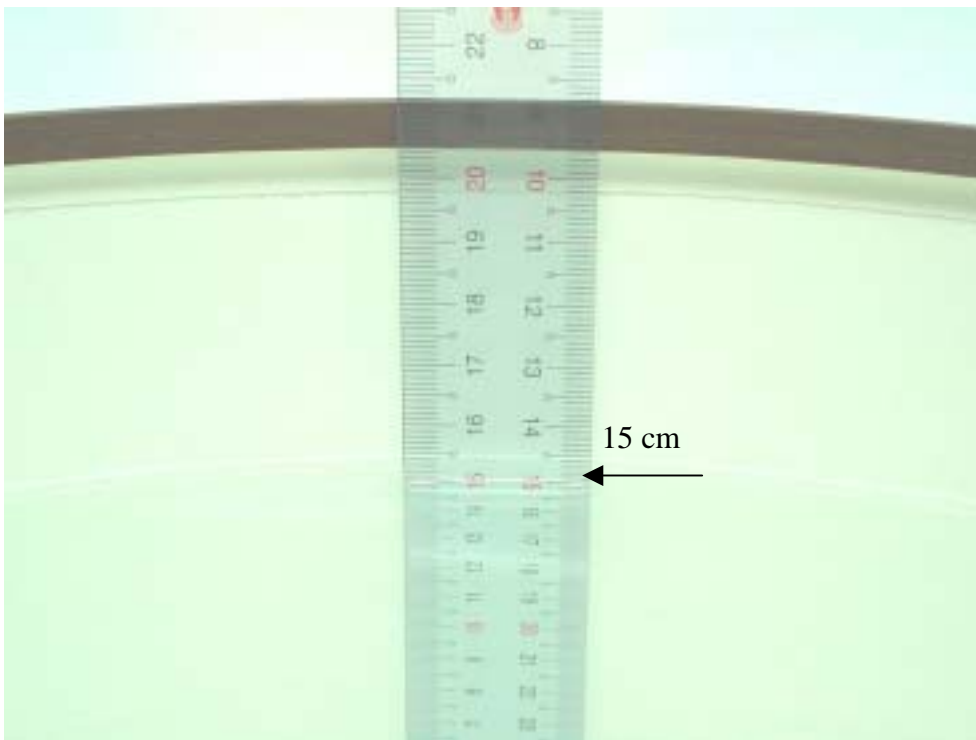


Fig.2 Photograph of the Tissue Simulant Fluid liquid depth 15cm

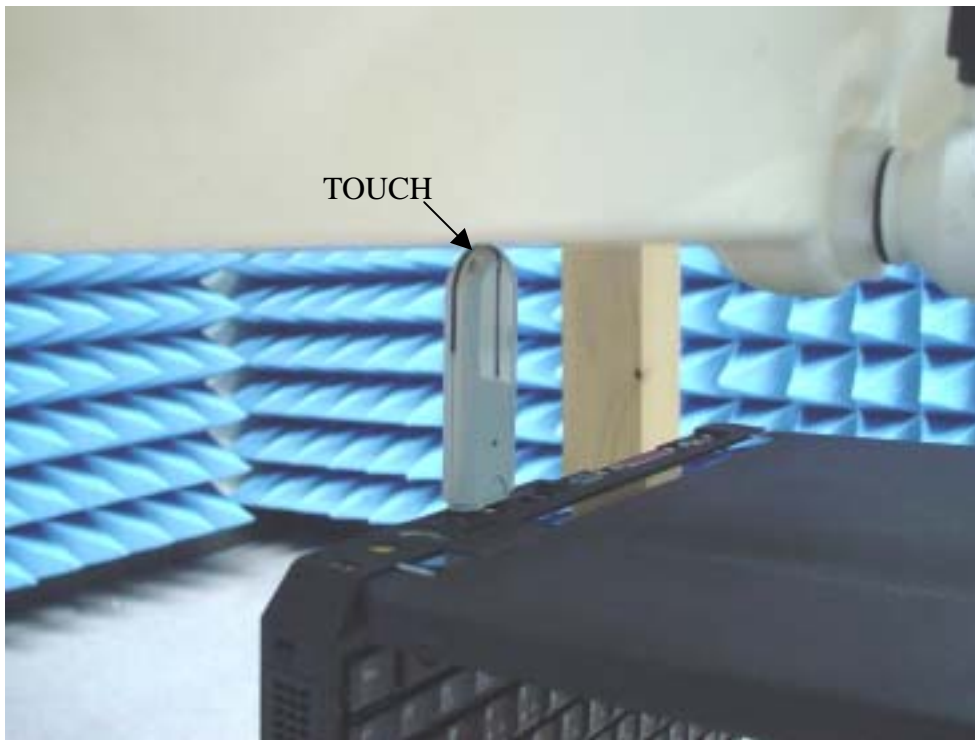


Fig.3 Photograph of the antenna tip is upward and at a distance of 0.0 cm from the base of the phantom.

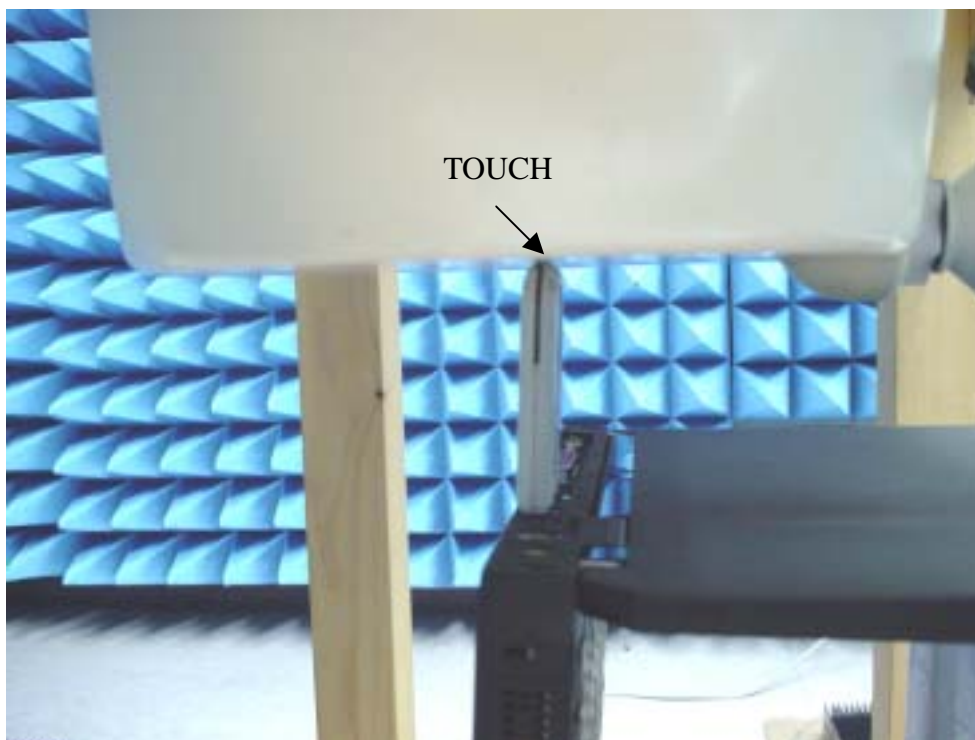


Fig.4 Photograph of the antenna tip is upward and at a distance of 0.0 cm from the base of the phantom.



Fig.5 Photograph of the Bottom of the Pc is paralleled and at a distance of 0.0 cm from the base of the phantom.



Fig.6 Photograph of the Bottom of the Pc is paralleled and at a distance of 0.0 cm from the base of the phantom.

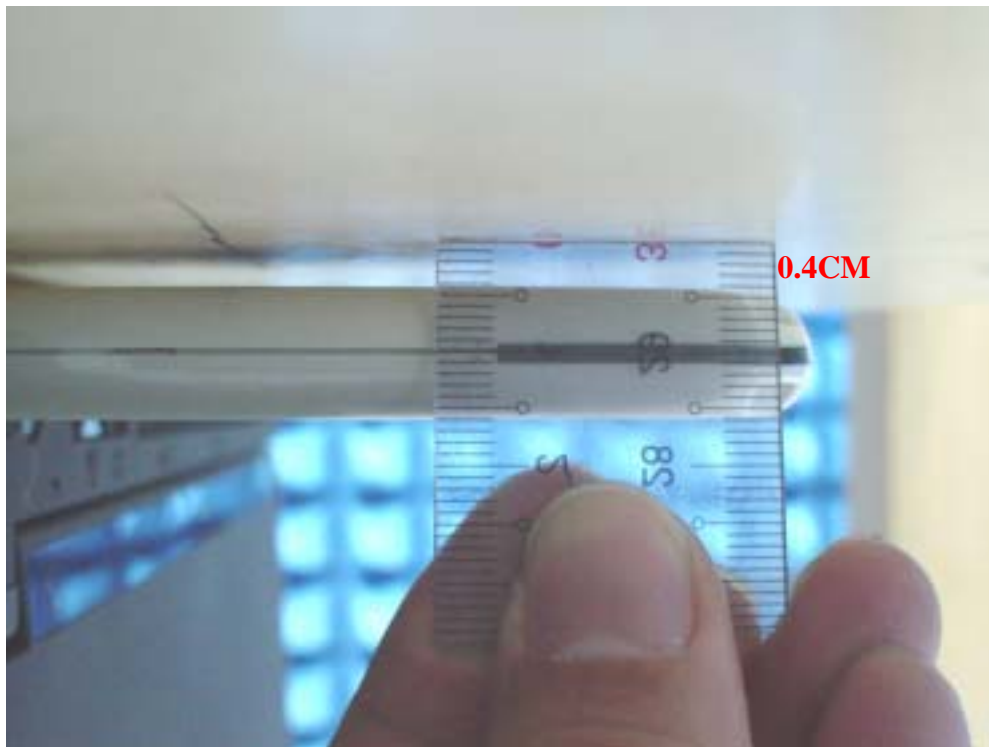


Fig.7 Photograph of the Bottom of the Pc is paralleled and at a distance of 0.0 cm from the base of the phantom, but **0.4 cm** Spacing between EUT & Planar Phantom.

## Photographs of the EUT



Fig.8 Front view of device



Fig.9 Back view of device



Fig.10 With IBM ThinkPad T30 USB slot



Fig.11 With IBM ThinkPad T30 USB slot



# Probe Calibration certificate

Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG  
 Zeughausstrasse 43, 8004 Zurich, Switzerland

Client **SGS Taiwan (Auden)**

CALIBRATION CERTIFICATE																																			
Object(s)	ET3DV6 - SN:1760																																		
Calibration procedure(s)	QA CAL-01.v2 Calibration procedure for dosimetric E-field probes																																		
Calibration date	February 17, 2004																																		
Condition of the calibrated item	In Tolerance (according to the specific calibration document)																																		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).                      The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility, environment temperature 22 +/- 2 degrees Celsius and humidity &lt; 75%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration):</p> <table border="1"> <thead> <tr> <th>Model Type</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter EPM E4410B</td> <td>GB41293874</td> <td>2-Apr-03 (METAS, No 252-0250)</td> <td>Apr-04</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41495277</td> <td>2-Apr-03 (METAS, No 252-0250)</td> <td>Apr-04</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: 9086 (20b)</td> <td>3-Apr-03 (METAS, No 251-0340)</td> <td>Apr-04</td> </tr> <tr> <td>Fluke Process Calibrator Type 702</td> <td>SN: 0295803</td> <td>8-Sep-03 (Sinteri SCS No. E-030020)</td> <td>Sep-04</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>MY41092180</td> <td>18-Sep-02 (SPEAG, in house check Oct-03)</td> <td>In house check: Oct 05</td> </tr> <tr> <td>RF generator HP 8664C</td> <td>US3642U01700</td> <td>4-Aug-00 (SPEAG, in house check Aug-02)</td> <td>In house check: Aug 05</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390695</td> <td>18-Oct-01 (SPEAG, in house check Oct-03)</td> <td>In house check: Oct 05</td> </tr> </tbody> </table>				Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power meter EPM E4410B	GB41293874	2-Apr-03 (METAS, No 252-0250)	Apr-04	Power sensor E4412A	MY41495277	2-Apr-03 (METAS, No 252-0250)	Apr-04	Reference 20 dB Attenuator	SN: 9086 (20b)	3-Apr-03 (METAS, No 251-0340)	Apr-04	Fluke Process Calibrator Type 702	SN: 0295803	8-Sep-03 (Sinteri SCS No. E-030020)	Sep-04	Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05	RF generator HP 8664C	US3642U01700	4-Aug-00 (SPEAG, in house check Aug-02)	In house check: Aug 05	Network Analyzer HP 8753E	US37390695	18-Oct-01 (SPEAG, in house check Oct-03)	In house check: Oct 05
Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																
Power meter EPM E4410B	GB41293874	2-Apr-03 (METAS, No 252-0250)	Apr-04																																
Power sensor E4412A	MY41495277	2-Apr-03 (METAS, No 252-0250)	Apr-04																																
Reference 20 dB Attenuator	SN: 9086 (20b)	3-Apr-03 (METAS, No 251-0340)	Apr-04																																
Fluke Process Calibrator Type 702	SN: 0295803	8-Sep-03 (Sinteri SCS No. E-030020)	Sep-04																																
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05																																
RF generator HP 8664C	US3642U01700	4-Aug-00 (SPEAG, in house check Aug-02)	In house check: Aug 05																																
Network Analyzer HP 8753E	US37390695	18-Oct-01 (SPEAG, in house check Oct-03)	In house check: Oct 05																																
Calibrated by:	Name Keja Paskvic	Function Laboratory Director	Signature 																																
Approved by:	Name Niels Kuster	Function Quality Manager																																	
Date issued: February 17, 2004																																			
<p>This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid &amp; Partner Engineering AG is completed.</p>																																			

# Probe ET3DV6

SN:1760

Manufactured:	November 12, 2002
Last calibrated:	March 7, 2003
Recalibrated:	February 17, 2004




Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ET3DV6 SN:1760

February 17, 2004

### Receiving Pattern ( $\phi$ ) , $\theta = 0^\circ$

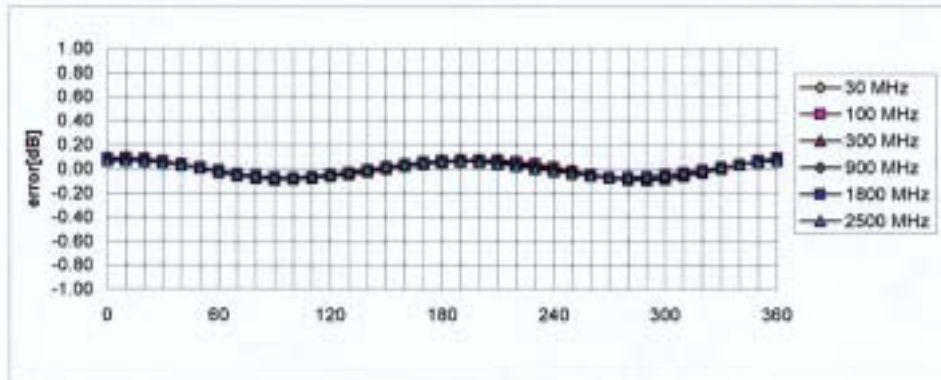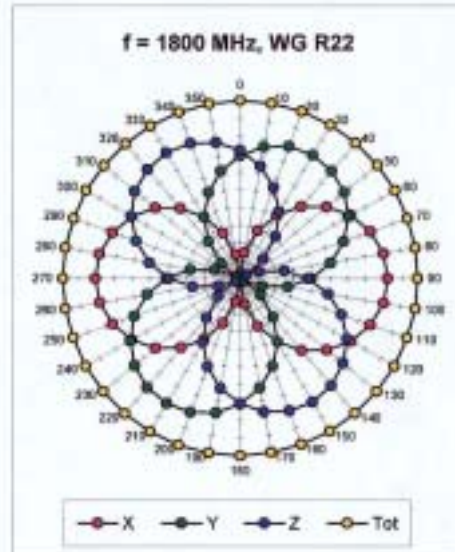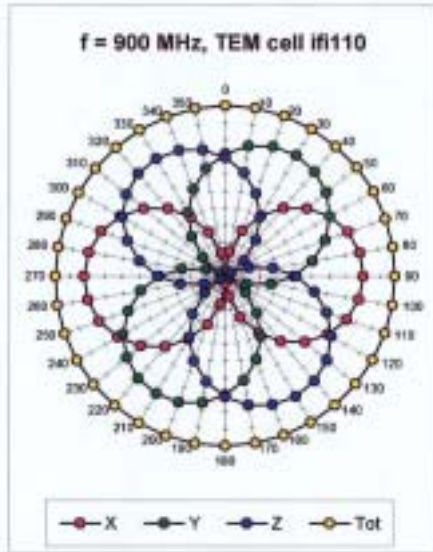


**Axial Isotropy Error  $< \pm 0.2$  dB**

ET3DV6 SN:1760

February 17, 2004

### Conversion Factor Assessment

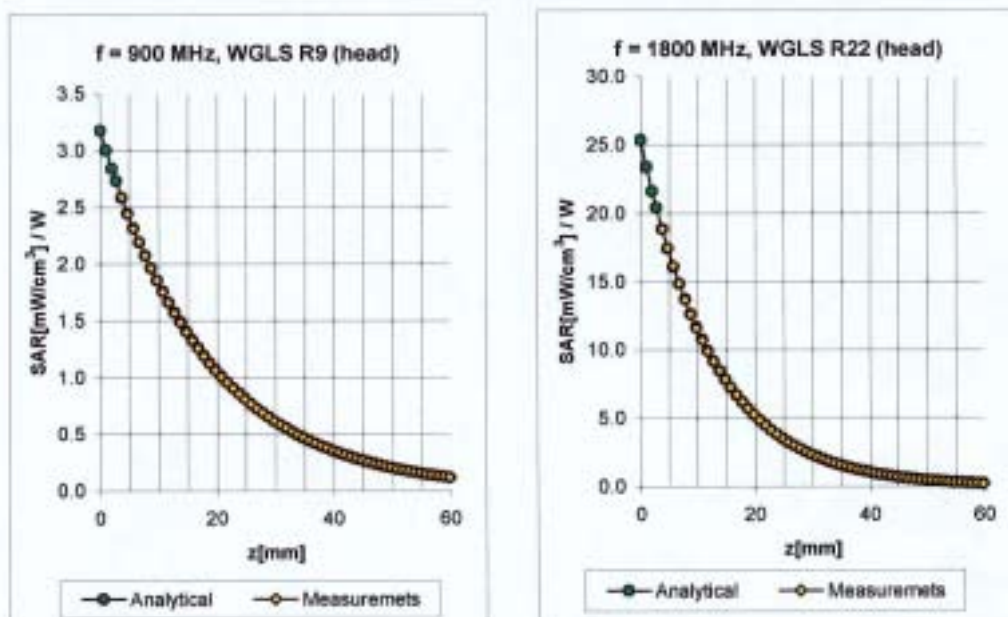

f [MHz]	Validity [MHz] <sup>2</sup>	Tissue	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	800-1000	Head	41.5 ± 5%	0.97 ± 5%	0.51	1.96	6.34 ± 11.3% (k=2)
1800	1710-1890	Head	40.0 ± 5%	1.40 ± 5%	0.52	2.36	5.13 ± 10.9% (k=2)
1900	1805-1995	Head	40.0 ± 5%	1.40 ± 5%	0.54	2.42	5.10 ± 11.1% (k=2)
900	800-1000	Body	55.0 ± 5%	1.05 ± 5%	0.43	2.21	6.04 ± 11.3% (k=2)
1800	1710-1890	Body	53.3 ± 5%	1.52 ± 5%	0.60	2.56	4.56 ± 10.9% (k=2)
1900	1805-1995	Body	53.3 ± 5%	1.52 ± 5%	0.59	2.76	4.43 ± 11.1% (k=2)
2450	2400-2500	Body	52.7 ± 5%	1.95 ± 5%	1.47	1.45	4.18 ± 9.7% (k=2)

<sup>2</sup> The total standard uncertainty is calculated as root-sum-square of standard uncertainty of the Conversion Factor at calibration frequency and the standard uncertainty for the indicated frequency band.

## Uncertainty Analysis

<b>DASY4 Uncertainty Budget</b> According to IEEE P1528 [1]								
Error Description	Uncertainty value	Prob. Dist.	Div.	( $c_i$ ) 1g	( $c_i$ ) 10g	Std. Unc. (1g)	Std. Unc. (10g)	( $v_i$ ) $v_{eff}$
<b>Measurement System</b>								
Probe Calibration	±4.8%	N	1	1	1	±4.8%	±4.8%	∞
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%	∞
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
Readout Electronics	±1.0%	N	1	1	1	±1.0%	±1.0%	∞
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%	∞
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%	∞
RF Ambient Conditions	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Probe Positioner	±0.4%	R	$\sqrt{3}$	1	1	±0.2%	±0.2%	∞
Probe Positioning	±2.9%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%	∞
Max. SAR Eval.	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%	∞
<b>Test Sample Related</b>								
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	875
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%	∞
<b>Phantom and Setup</b>								
Phantom Uncertainty	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%	∞
Liquid Conductivity (target)	±5.0%	R	$\sqrt{3}$	0.64	0.43	±1.8%	±1.2%	∞
Liquid Conductivity (meas.)	±2.5%	N	1	0.64	0.43	±1.6%	±1.1%	∞
Liquid Permittivity (target)	±5.0%	R	$\sqrt{3}$	0.6	0.49	±1.7%	±1.4%	∞
Liquid Permittivity (meas.)	±2.5%	N	1	0.6	0.49	±1.5%	±1.2%	∞
Combined Std. Uncertainty						±10.3%	±10.0%	331
<b>Expanded STD Uncertainty</b>						<b>±20.6%</b>	<b>±20.1%</b>	

Phantom description

**Schmid & Partner  
 Engineering AG**

**Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79**

**Certificate of conformity / First Article Inspection**

Item	SAM Twin Phantom V4.0
Type No	QD 000 P40 CA
Series No	TP-1150 and higher
Manufacturer / Origin	Unterse Composites Hauptstr. 69 CH-8559 Fruthwilen Switzerland

**Tests**

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT1S CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz - 3 GHz Relative permittivity < 5 Loss tangent < 0.05.	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

**Standards**

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9
- (\*) The IT1S CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

**Conformity**

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date 28.02.2002

Signature / Stamp

*F. Rombult*

**Schmid & Partner  
 Engineering AG**

Zeughausstrasse 43, CH-8004 Zurich  
 Tel. +41 1 245 97 00, Fax +41 1 245 97 79

*Johannes Kappeler*

## System Validation from Original equipment supplier SPEAG Schmid & Partner

Page 1 of 1

Date/Time: 03/23/04 10:56:55

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN727**

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: Muscle 2450 MHz;

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2$  mho/m;  $\epsilon_r = 52$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3013; ConvF(4.02, 4.02, 4.02); Calibrated: 1/23/2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn411; Calibrated: 11/6/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006;
- Measurement SW: DASY4, V4.2 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 112

**Pin = 250 mW; d = 10 mm/Area Scan (81x81x1):** Measurement grid: dx=15mm, dy=15mm

Reference Value = 89.7 V/m; Power Drift = 0.0 dB

Maximum value of SAR (interpolated) = 17 mW/g


**Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.7 V/m; Power Drift = 0.0 dB

Maximum value of SAR (measured) = 16.1 mW/g


Peak SAR (extrapolated) = 28.5 W/kg

SAR(1 g) = 14.2 mW/g; SAR(10 g) = 6.62 mW/g

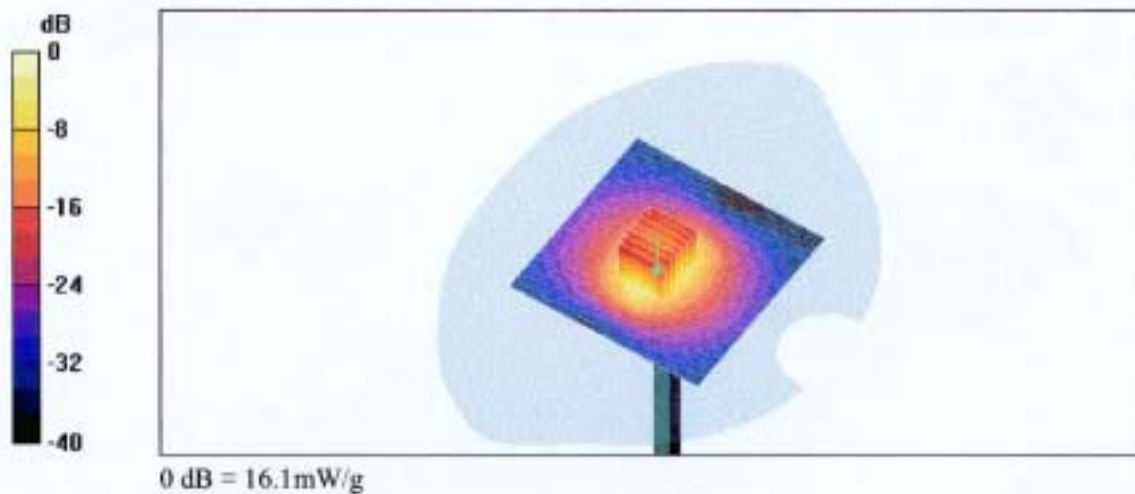


Z-axis Plot

802.11b

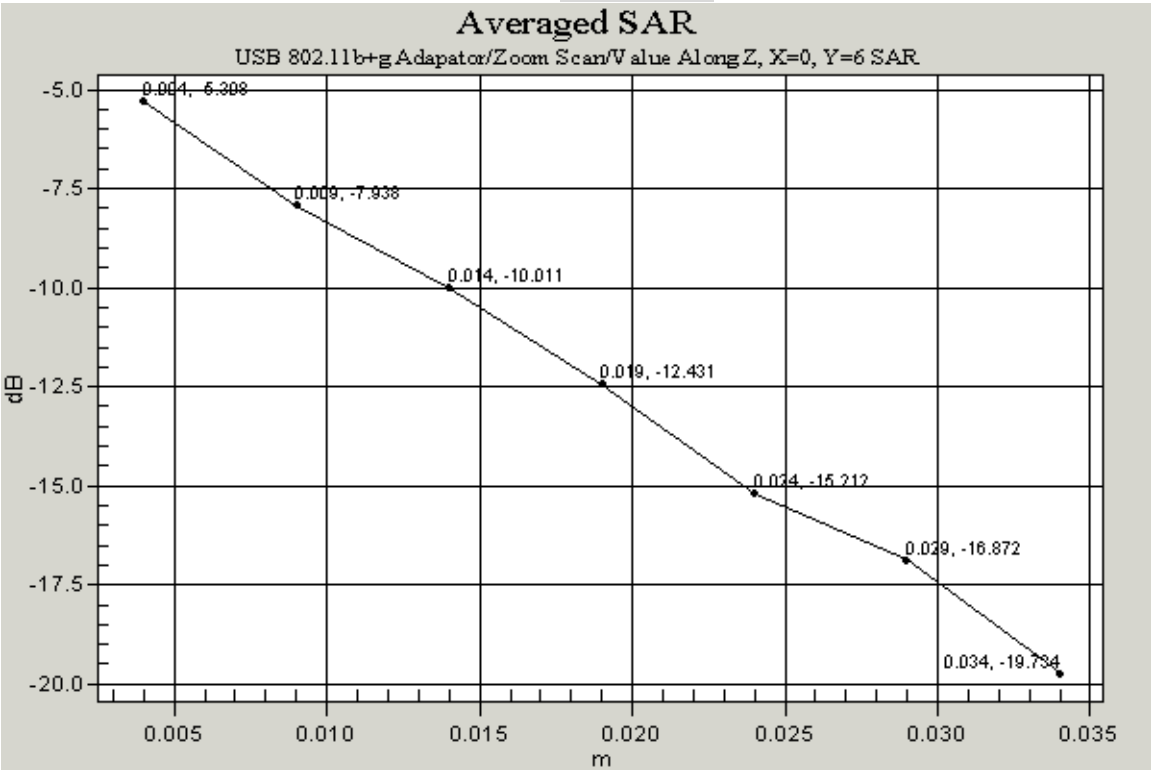


4.1.1 Vertical position, lowest channel

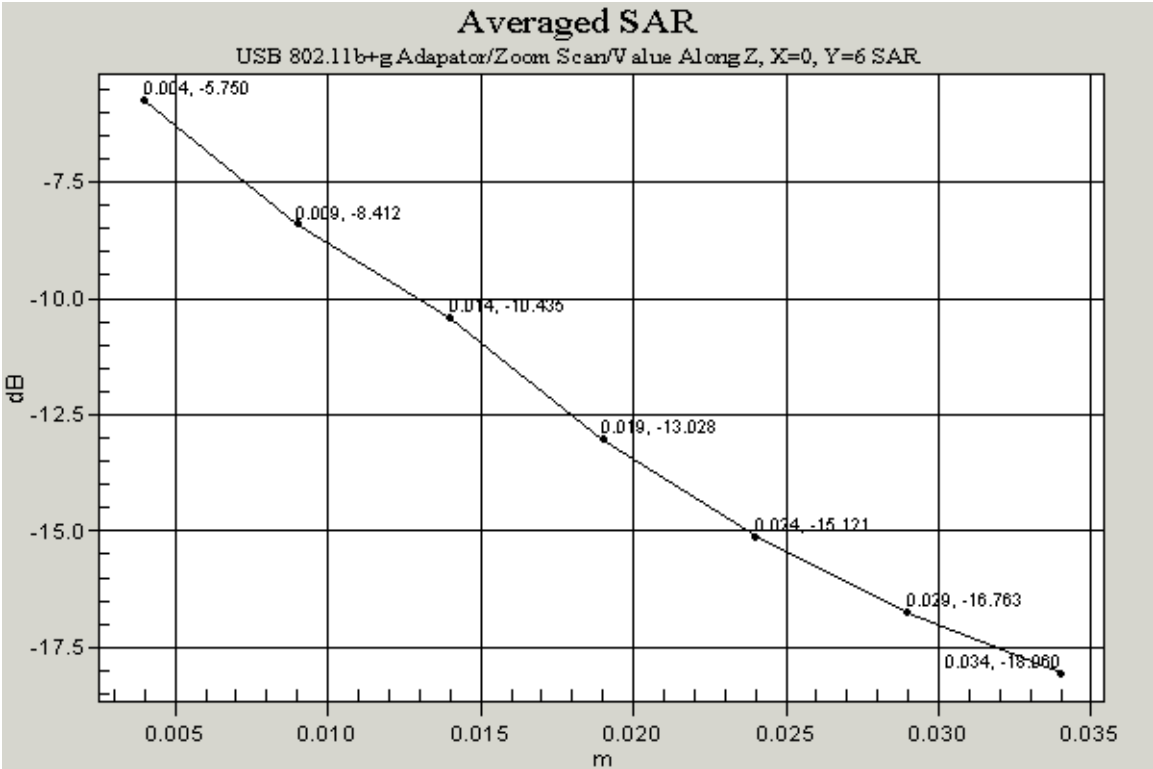


4.1.2 Vertical position, middle channel




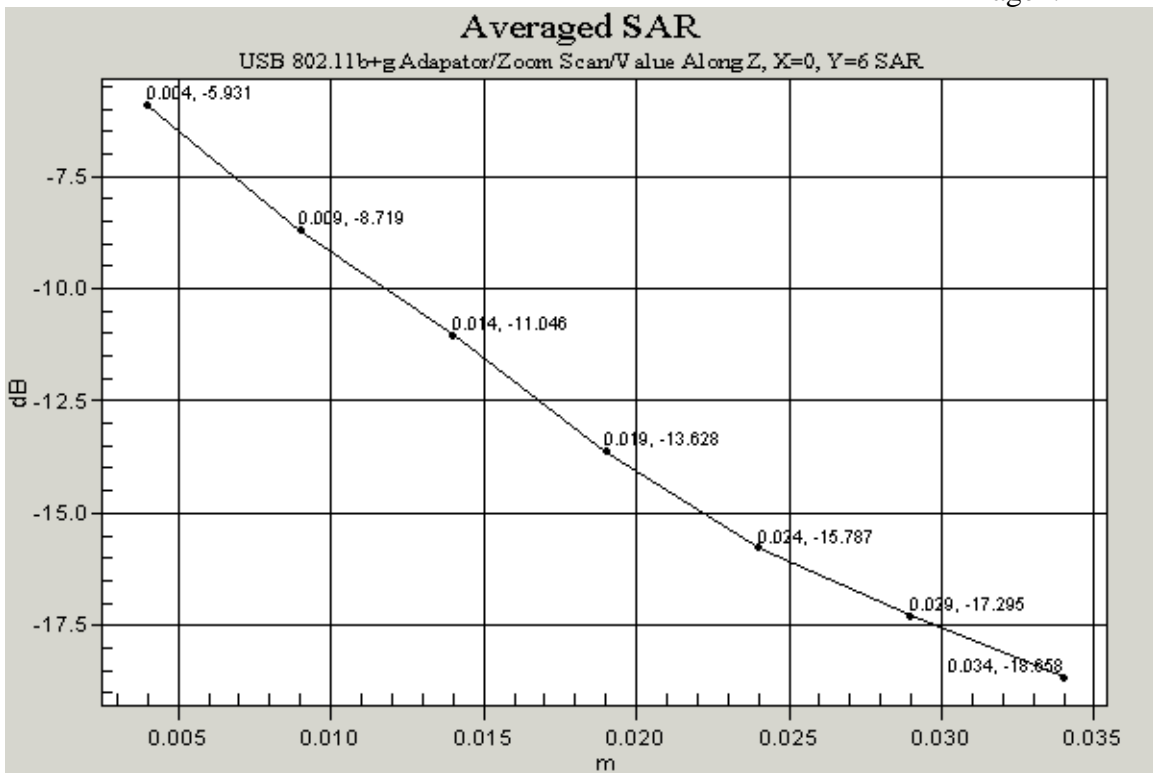


4.1.3 Vertical position, highest channel

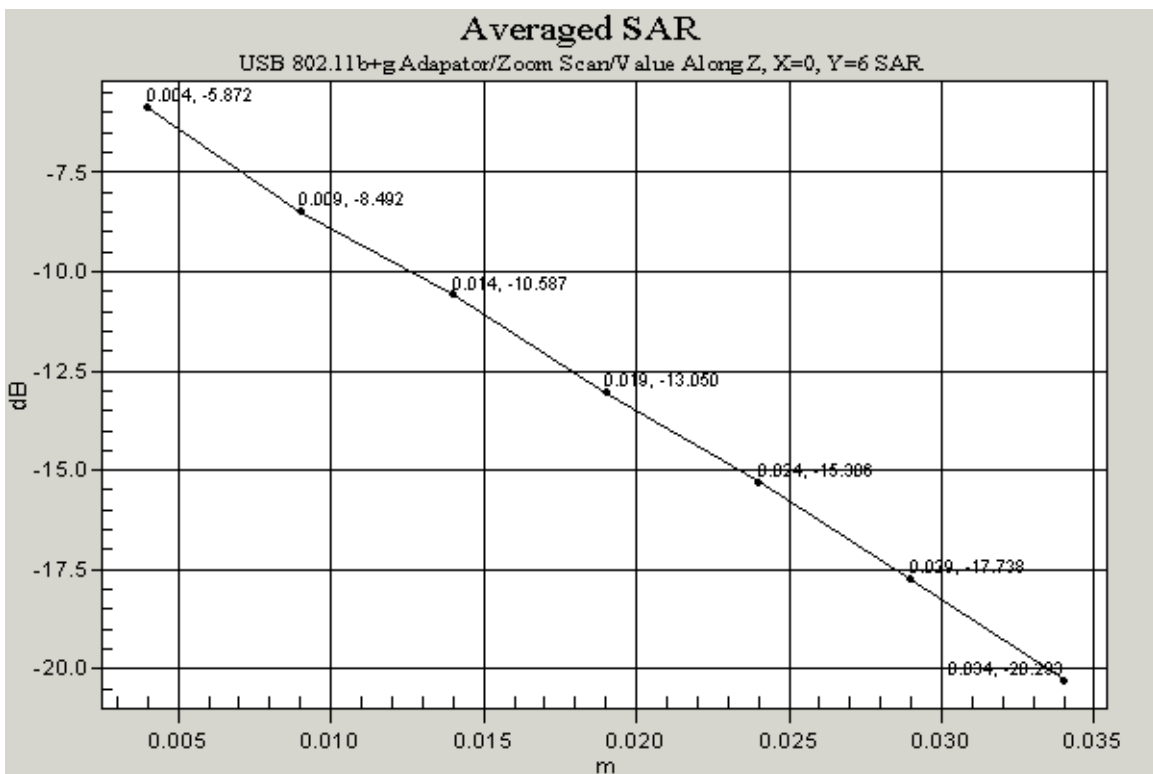

4.1.4 Horizontal position, lowest channel

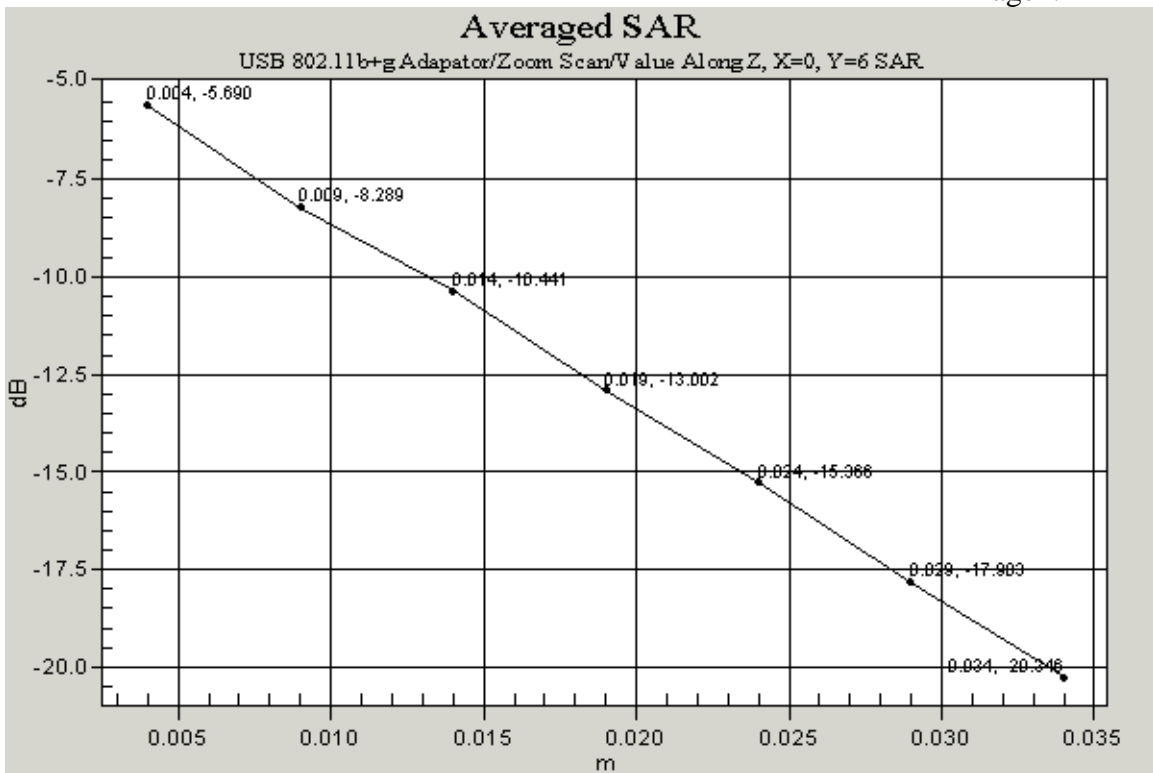

4.1.5 Horizontal position, middle channel

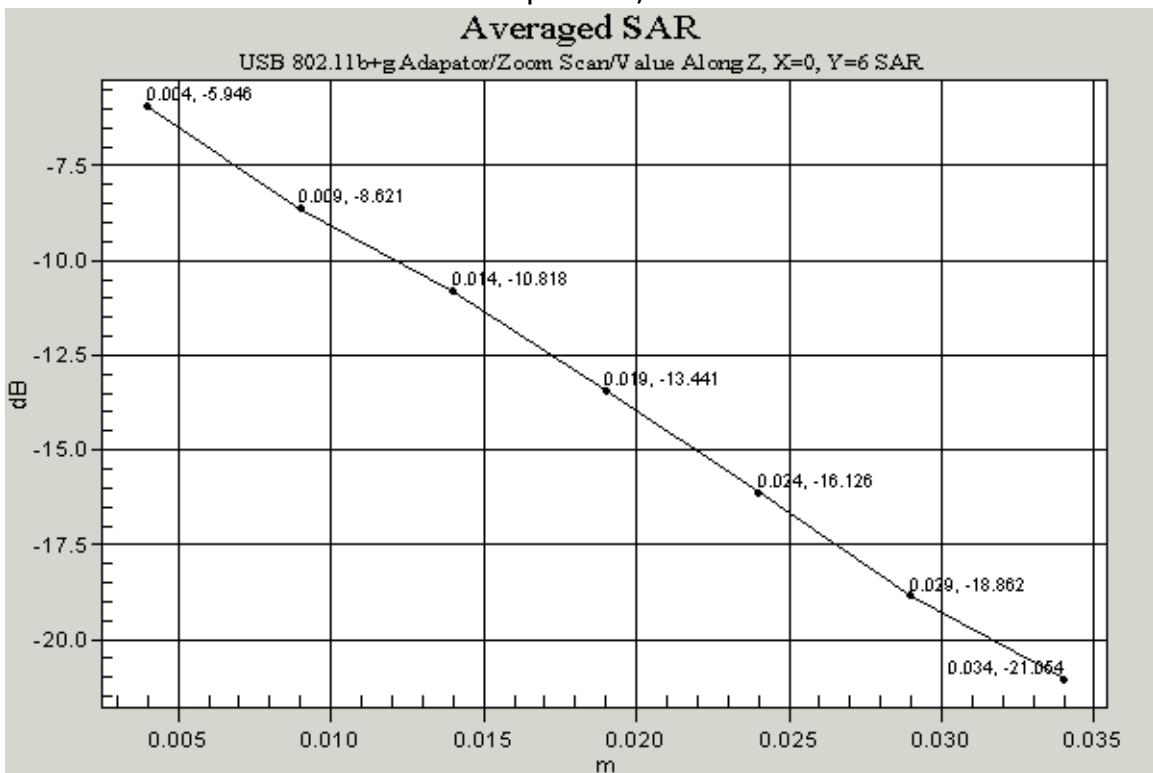


4.1.6 Horizontal position, highest channel

### 802.11g

#### Averaged SAR


USB 802.11b+g Adaptor/Zoom Scan/Value Along Z, X=0, Y=6 SAR.

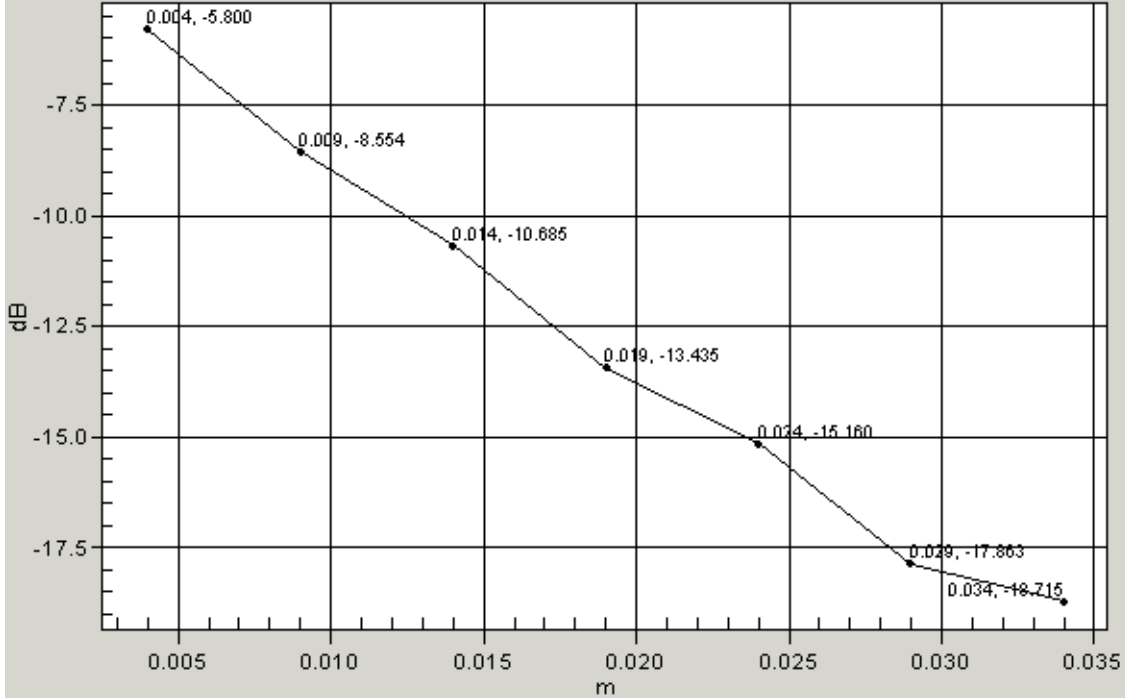


4.2.1 Vertical position, lowest channel

#### Averaged SAR


USB 802.11b+g Adaptor/Zoom Scan/Value Along Z, X=0, Y=6 SAR.

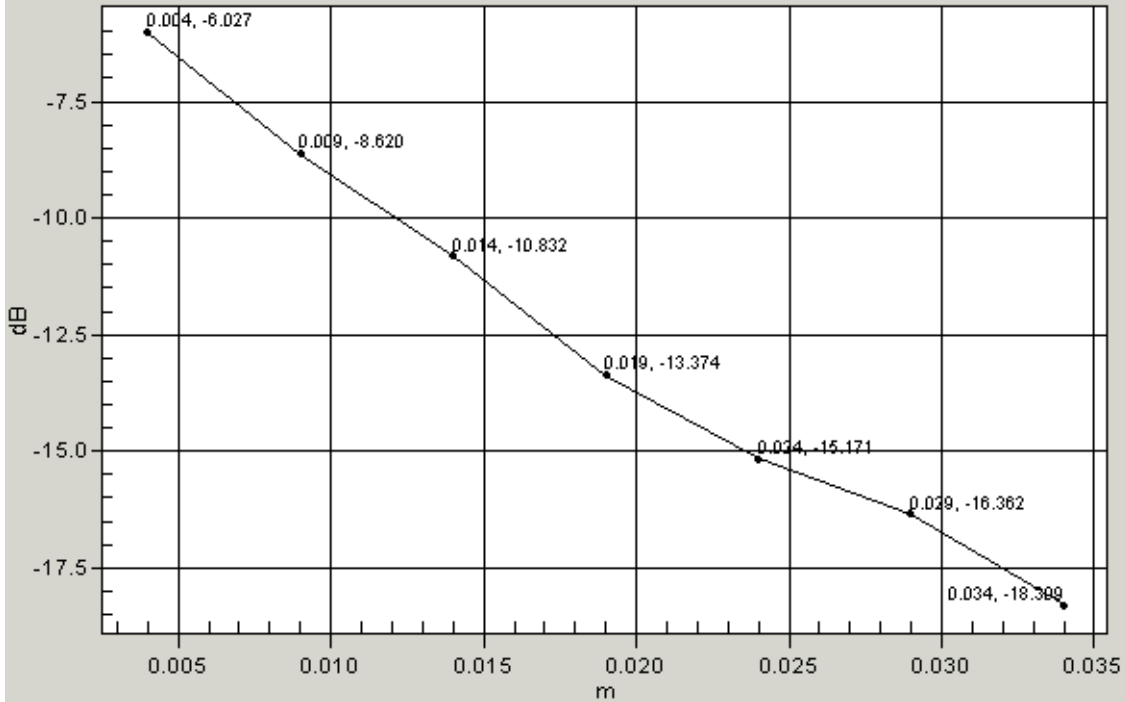


4.2.2 Vertical position, middle channel

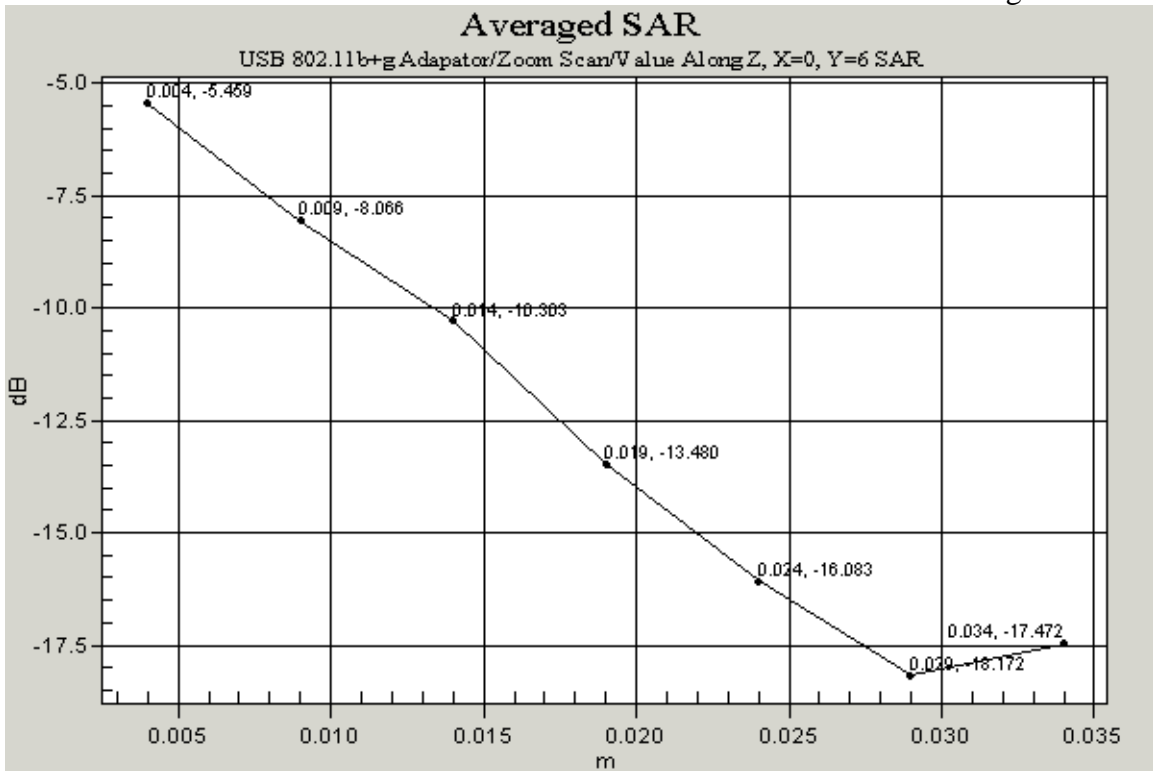


4.2.3 Vertical position, highest channel

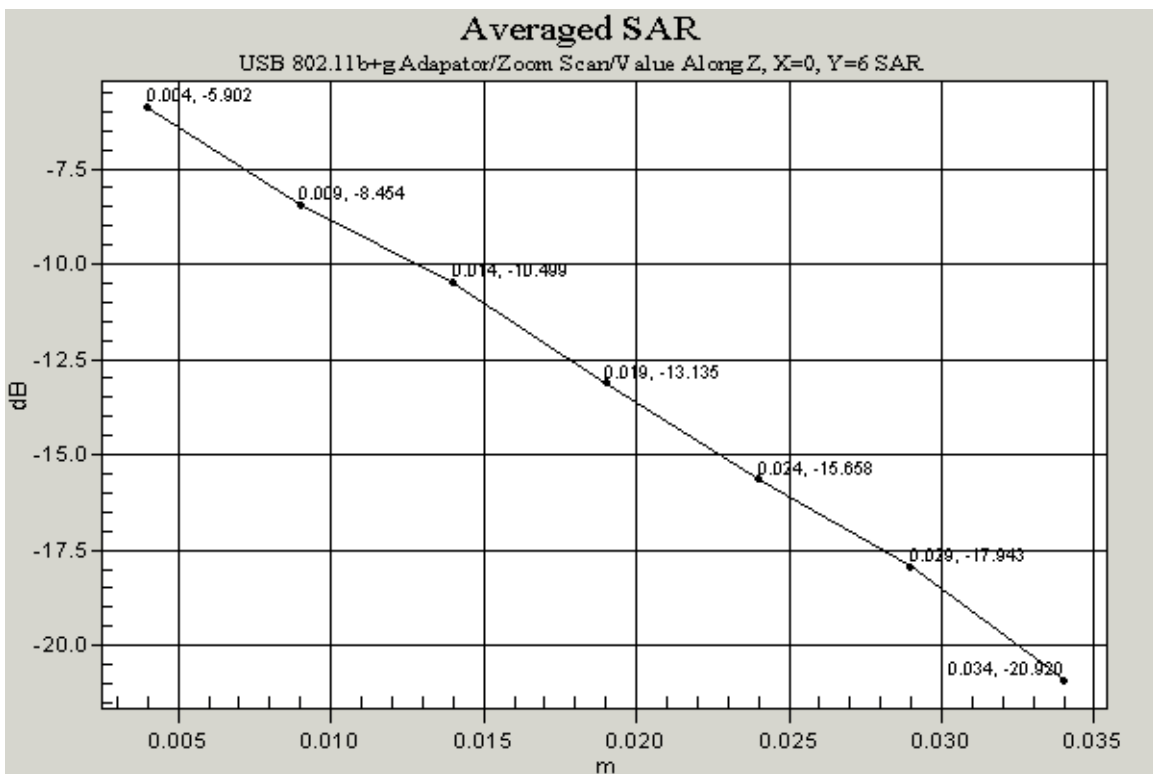

4.2.4 Horizontal position, lowest channel

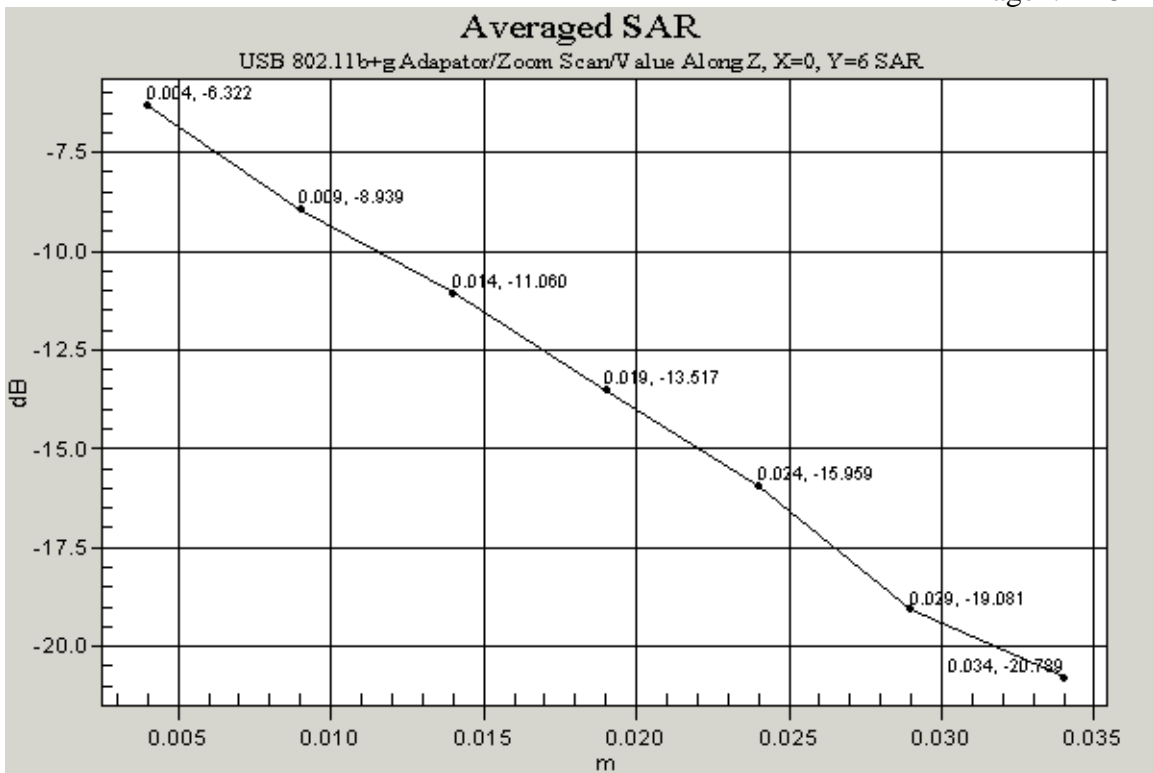

4.2.5 Horizontal position, middle channel

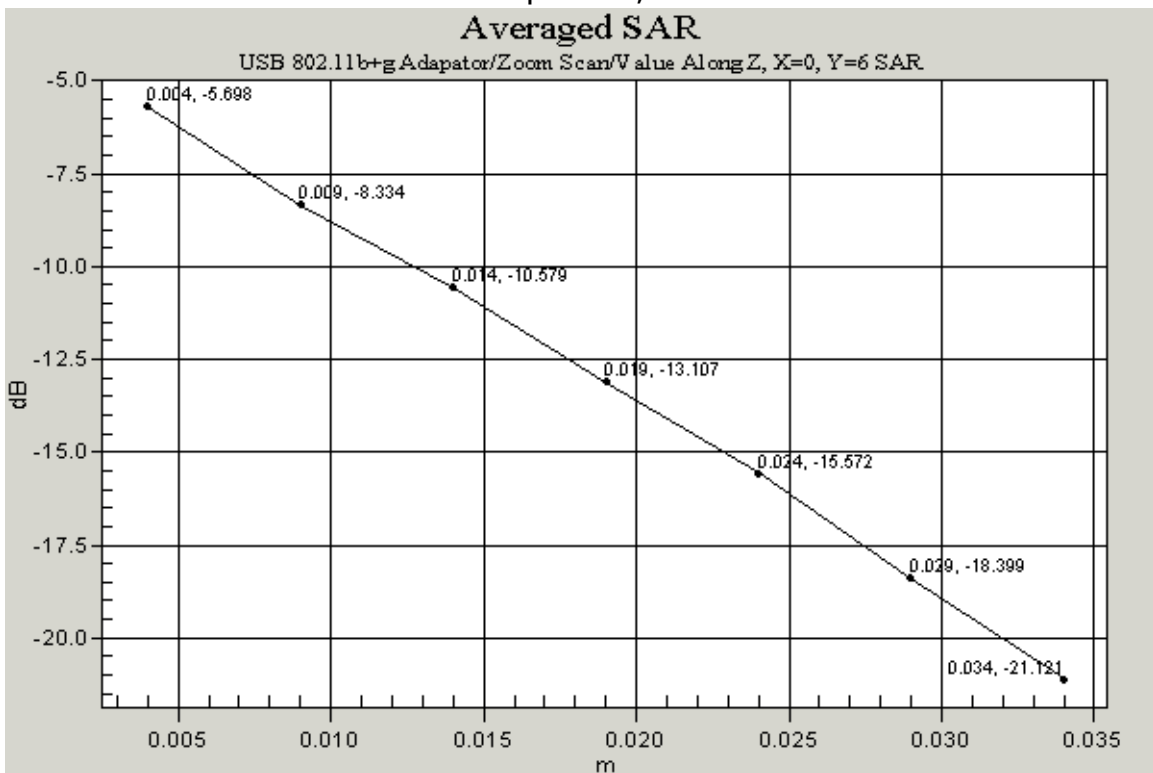

4.2.6 Horizontal position, highest channel