



FCC TEST REPORT

REPORT NO.: RF111122E03

MODEL NO.: T100-SE

FCC ID: MQT-T100SE

RECEIVED: Nov. 22, 2011

TESTED: Nov. 25 to Dec. 16, 2011

ISSUED: Dec. 23, 2011

APPLICANT: XAC AUTOMATION CORP.

ADDRESS: 4F, No. 30, INDUSTRY E. RD. IX, SCIENCE-BASED INDUSTRIAL PARK,HSINCHU,TAIWAN

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 77 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

Table of Contents

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	10
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	12
3.4 DESCRIPTION OF SUPPORT UNITS.....	13
3.5 CONFIGURATION OF SYSTEM UNDER TEST	14
4. TEST TYPES AND RESULTS	15
4.1 CONDUCTED EMISSION MEASUREMENT	15
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	15
4.1.2 TEST INSTRUMENTS.....	15
4.1.3 TEST PROCEDURES	16
4.1.4 DEVIATION FROM TEST STANDARD	16
4.1.5 TEST SETUP	17
4.1.6 EUT OPERATING CONDITIONS	17
4.1.7 TEST RESULTS	18
4.2 RADIATED EMISSION MEASUREMENT	20
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	20
4.2.2 TEST INSTRUMENTS.....	21
4.2.3 TEST PROCEDURES	22
4.2.4 DEVIATION FROM TEST STANDARD	22
4.2.5 TEST SETUP	23
4.2.6 EUT OPERATING CONDITIONS	24
4.2.7 TEST RESULTS	25
4.3 6dB BANDWIDTH MEASUREMENT	54
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	54
4.3.2 TEST INSTRUMENTS.....	54
4.3.3 TEST PROCEDURE.....	54
4.3.4 DEVIATION FROM TEST STANDARD	54
4.3.5 TEST SETUP	54
4.3.6 EUT OPERATING CONDITIONS	54
4.3.7 TEST RESULTS	55
4.4 MAXIMUM PEAK OUTPUT POWER.....	59
4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	59
4.4.2 INSTRUMENTS.....	59
4.4.3 TEST PROCEDURES	59



A D T

4.4.4	DEVIATION FROM TEST STANDARD	59
4.4.5	TEST SETUP	59
4.4.6	EUT OPERATING CONDITIONS	59
4.4.7	TEST RESULTS	60
4.5	POWER SPECTRAL DENSITY MEASUREMENT	61
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	61
4.5.2	TEST INSTRUMENTS.....	61
4.5.3	TEST PROCEDURE.....	61
4.5.4	DEVIATION FROM TEST STANDARD	61
4.5.5	TEST SETUP	61
4.5.6	EUT OPERATING CONDITION.....	61
4.5.7	TEST RESULTS	62
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT	66
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	66
4.6.2	TEST INSTRUMENTS.....	66
4.6.3	TEST PROCEDURE.....	66
4.6.4	DEVIATION FROM TEST STANDARD	66
4.6.5	EUT OPERATING CONDITION	66
4.6.6	TEST RESULTS	67
5.	INFORMATION ON THE TESTING LABORATORIES	76
6.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	77



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF111122E03	Original release	Dec. 23, 2011



1. CERTIFICATION

PRODUCT: Terminal
BRAND NAME: XAC
MODEL NO.: T100-SE
TEST SAMPLE: MASS-PRODUCTION
TESTED: Nov. 25 to Dec. 16, 2011
APPLICANT: XAC AUTOMATION CORP.
STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003
ANSI C63.10-2009

The above equipment (Model: T100-SE) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Phoenix Huang , **DATE:** Dec. 23, 2011
(Phoenix Huang, Specialist)

APPROVED BY : May Chen , **DATE:** Dec. 23, 2011
(May Chen, Deputy Manager)



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.71dB at 24.000MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -0.6dB at 2483.50MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Conducted Out-Band Emission Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is I-PEX not a standard connector.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.81dB
Radiated emissions (1GHz -18GHz)	2.19 dB
Radiated emissions (18GHz -40GHz)	2.56 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Terminal
MODEL NO.	T100-SE
FCC ID	MQT-T100SE
POWER SUPPLY	DC 12V from power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: Up to 11Mbps 802.11g: Up to 54Mbps HT20 MCS0~7 (800ns GI): Up to 65Mbps, HT40 MCS0~7 (800ns GI): Up to 135Mbps. HT20 MCS0~7 (400ns GI): Up to 72.2Mbps, HT40 MCS0~7 (400ns GI): Up to 150.0Mbps,
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz)
MAXIMUM OUTPUT POWER	802.11b: 37.2mW 802.11g: 239.9mW 802.11n (20MHz): 245.5mW 802.11n (40MHz): 208.9mW
ANTENNA TYPE	Please see NOTE
DATA CABLE	RJ11 cable x 1 (unshielded, 2.0m)
I/O PORTS	RJ45 port x 1 (Ethernet 10/100 Mbps) RJ11 port x 1 (Modem) USB port x 2 (USB 1.1/ USB 2.0) COM port x 1 (RS232) Micro USB port x 1 (connect to PC)
ASSOCIATED DEVICES	Adapter x 1



A D T

NOTE:

1. There is one antenna provided to this EUT, please refer to the following table:

Antenna Type	Antenna Connector	Antenna Gain (Included cable loss)	Frequency range (MHz to MHz)
PCB (FR-4)	U.FL (I-PEX)	2.6 dBi	2400~2500

2. The EUT could be supplied with a power adapter as the following table:

Brand	Model No.	Spec.
LI SHIN	LSE0107A1240	AC Input: 100-240V, 50-60MHz, 1A DC Output: 12V, 3.33A (1.5m with one core)

3. The EUT is 1 * 1 spatial SISO (1Tx & 1Rx) without beam forming function.

4. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 7.

5. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



A D T

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided for 802.11b, 802.11g, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
-	√	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (20MHz)	1 to 11	6	OFDM	BPSK	6.5



A D T

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (20MHz)	1 to 11	6	OFDM	BPSK	6.5

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 11	OFDM	BPSK	6
802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5
802.11n (40MHz)	3 to 9	3, 9	OFDM	BPSK	13.5



A D T

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE ³ 1G	25deg. C, 69%RH	120Vac, 60Hz	Nick Chang
RE<1G	22deg. C, 70%RH	120Vac, 60Hz	Evan Huang
PLC	25deg. C, 70%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang
OB	25deg. C, 60%RH	120Vac, 60Hz	Rex Huang

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	Dell	PP11L	NA	CXSMM01BRD02D110
2	AP Router	PNY	WRT160NV3	NA	NA
3	PROGRAM-CONTROL TELEPHONE EXCHANGE	TELTONE	TC-104H	TC003	N/A
4	iPod shuffle	Apple	MC749TA/A	CC4DN25WDFDM	NA
5	iPod shuffle	Apple	MC749TA/A	CC4DMFJUDFDM	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	Mini USB cable, 1.8m with one core/ Console cable, 1.8m
2	UTP cable, 10m
3	RJ11 cable, 10m
4	USB Cable, 0.1m
5	USB Cable, 0.1m

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

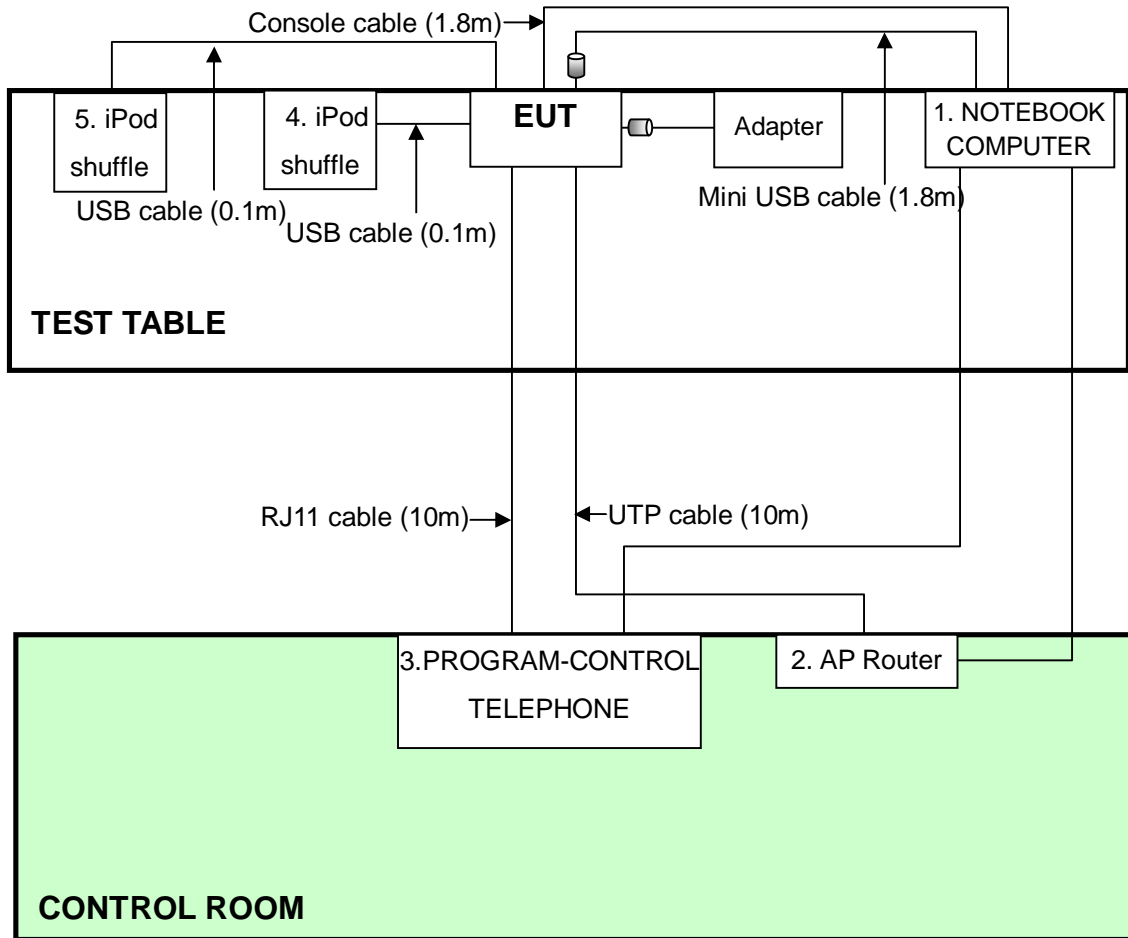



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Test date: Nov. 25, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 09, 2011	Mar. 08, 2012
Line-Impedance Stabilization Network (for EUT)	NSLK8127	8127-522	Sep. 07, 2011	Sep. 06, 2012
Line-Impedance Stabilization Network (for Peripheral)	ESH3-Z5	848773/004	Nov. 01, 2011	Oct. 31, 2012
RF Cable (JYEBAO)	5DFB	COCCAB-002	Aug. 29, 2011	Aug. 28, 2012
50 ohms Terminator	50	3	Nov. 02, 2011	Nov. 01, 2012
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

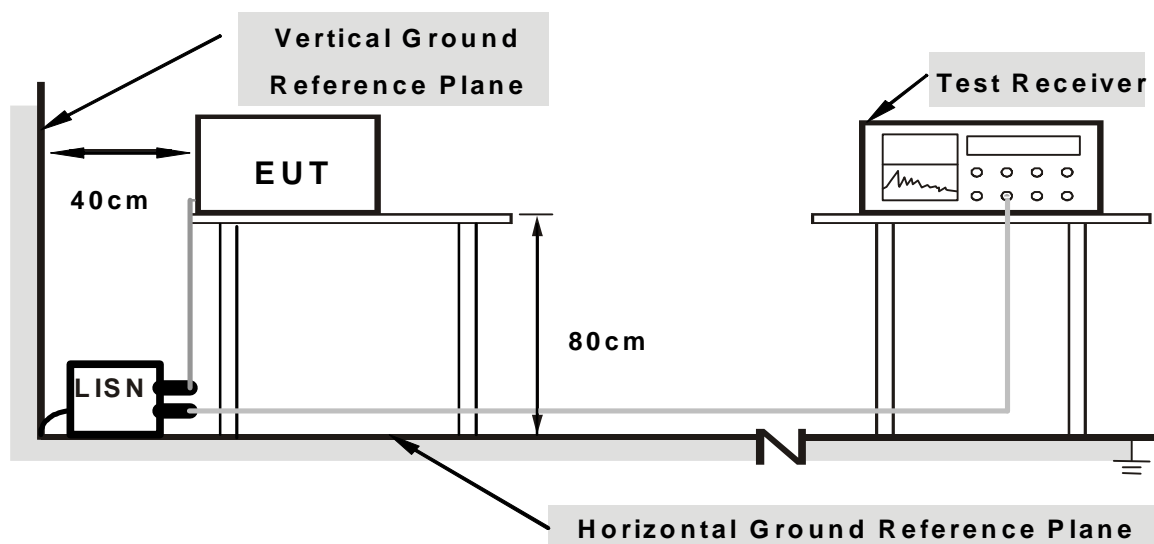

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


1. Turned on the power of all equipment.
2. Support unit 1 (Notebook Computer) ran a test program “RT3x7xQA.exe” to enable EUT under transmission/receiving condition continuously via wireless transmission.

4.1.7 TEST RESULTS

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
--------------	----------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.161	0.09	47.48	37.11	47.57	37.20	65.42	55.42	-17.85
2	0.193	0.10	43.25	34.46	43.35	34.56	63.91	53.91	-20.56	-19.35
3	0.287	0.10	32.22	24.25	32.32	24.35	60.62	50.62	-28.30	-26.27
4	0.355	0.11	27.43	20.38	27.54	20.49	58.84	48.84	-31.30	-28.35
5	0.513	0.12	36.07	32.53	36.19	32.65	56.00	46.00	-19.81	-13.35
6	15.361	0.67	34.35	31.14	35.02	31.81	60.00	50.00	-24.98	-18.19
7	24.000	0.86	38.76	38.43	39.62	39.29	60.00	50.00	-20.38	-10.71
8	28.000	0.94	33.35	32.45	34.29	33.39	60.00	50.00	-25.71	-16.61


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

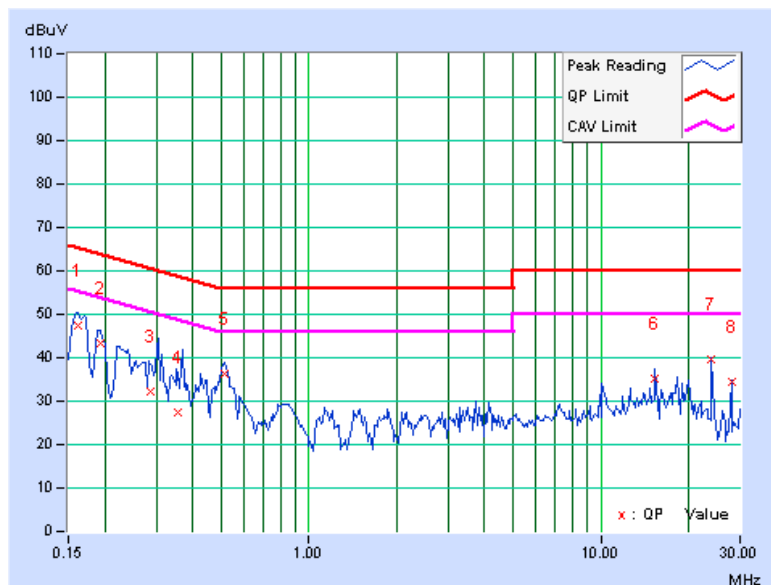

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
--------------	-------------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.162	0.08	47.53	36.53	47.61	36.61	65.38	55.38	-17.77
2	0.193	0.09	42.91	34.86	43.00	34.95	63.90	53.90	-20.91	-18.96
3	0.227	0.09	39.45	29.63	39.54	29.72	62.57	52.57	-23.03	-22.85
4	0.513	0.11	35.72	32.64	35.83	32.75	56.00	46.00	-20.17	-13.25
5	17.695	0.60	32.08	30.37	32.68	30.97	60.00	50.00	-27.32	-19.03
6	20.000	0.66	35.45	34.86	36.11	35.52	60.00	50.00	-23.89	-14.48
7	24.000	0.75	38.77	38.41	39.52	39.16	60.00	50.00	-20.48	-10.84

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

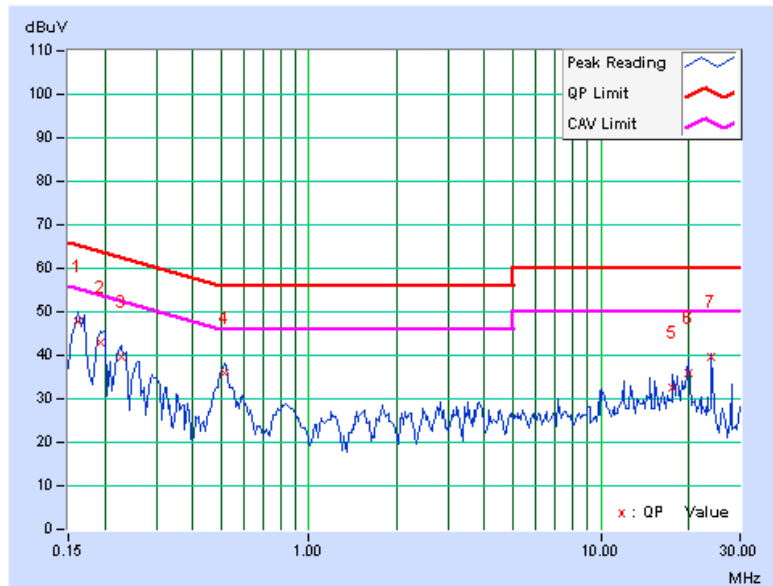

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. Section 15.205 restricted bands of operation shall compliance with the limits in Section 15.209.



A D T

4.2.2 TEST INSTRUMENTS

Test date: Dec. 15 to 16, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012
Agilent Pre-Selector	N9039A	MY46520311	July 12, 2011	July 11, 2012
Agilent Signal Generator	N5181A	MY49060517	July 12, 2011	July 11, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02578	July 04, 2011	July 03, 2012
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Apr. 14, 2011	Apr. 13, 2012
AISI Horn_Antenna	AIH.8018	0000320091110	Nov. 14, 2011	Nov. 13, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 27, 2010	Dec. 26, 2011
RF Cable	NA	CHGCAB_001	Oct. 07, 2011	Oct. 06, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in 966 Chamber No. G.

4. The FCC Site Registration No. is 966073.

5. The VCCI Site Registration No. is G-137.

6. The CANADA Site Registration No. is IC 7450H-2.



A D T

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

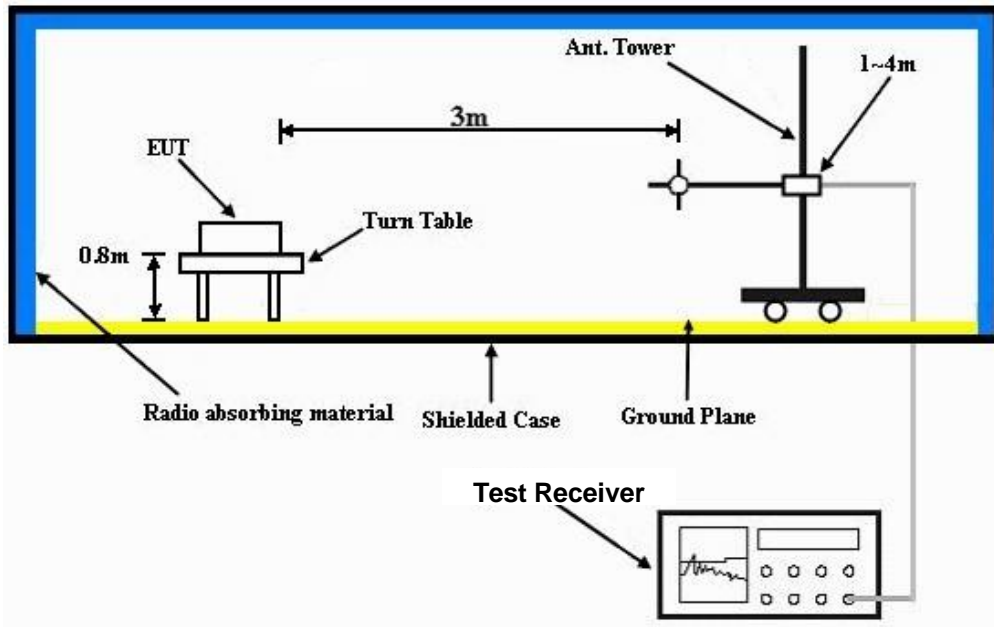

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

1. Turned on the power of all equipment.
2. Prepared computer system support unit 1 (Notebook Computer) to act as communication partner and placed it outside of testing area.
3. The communication partner ran test program “RT3x7xQA.exe” to enable EUT under transmission/receiving condition continuously.

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac / 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	22deg. C, 70%RH	TESTED BY	Evan Huang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	124.99	42.4 QP	43.5	-1.1	2.00 H	63	29.45	12.99
2	132.23	38.3 QP	43.5	-5.2	1.25 H	75	24.70	13.60
3	167.96	24.1 QP	43.5	-19.4	1.00 H	0	10.02	14.08
4	250.03	41.2 QP	46.0	-4.8	1.25 H	82	27.83	13.35
5	400.07	43.0 QP	46.0	-3.0	1.00 H	299	25.04	17.93
6	500.02	42.3 QP	46.0	-3.7	2.00 H	60	21.97	20.31

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.02	36.7 QP	40.0	-3.4	1.00 V	82	22.87	13.78
2	73.97	30.9 QP	40.0	-9.1	1.00 V	360	19.38	11.49
3	125.01	41.1 QP	43.5	-2.4	1.50 V	27	28.10	13.00
4	132.60	38.5 QP	43.5	-5.0	1.00 V	73	24.83	13.63
5	194.13	39.1 QP	43.5	-4.5	1.25 V	360	27.17	11.88
6	500.02	42.4 QP	46.0	-3.7	1.00 V	230	22.04	20.31

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz WORST-CASE DATA

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac / 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Nick Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.20	57.2 PK	74.0	-16.8	1.51 H	294	25.62	31.58
2	2386.20	45.2 AV	54.0	-8.8	1.51 H	294	13.62	31.58
3	*2412.00	103.1 PK			1.51 H	294	71.44	31.66
4	*2412.00	100.9 AV			1.51 H	294	69.24	31.66
5	4824.00	54.0 PK	74.0	-20.0	1.09 H	262	14.93	39.07
6	4824.00	50.5 AV	54.0	-3.5	1.09 H	262	11.43	39.07
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.20	57.1 PK	74.0	-16.9	1.67 V	318	25.52	31.58
2	2386.20	44.1 AV	54.0	-9.9	1.67 V	318	12.52	31.58
3	*2412.00	99.2 PK			1.67 V	313	67.54	31.66
4	*2412.00	97.0 AV			1.67 V	313	65.34	31.66
5	4824.00	54.9 PK	74.0	-19.1	1.00 V	50	15.83	39.07
6	4824.00	50.9 AV	54.0	-3.1	1.00 V	50	11.83	39.07

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac / 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Nick Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.9 PK			1.49 H	298	73.15	31.75
2	*2437.00	103.0 AV			1.49 H	298	71.25	31.75
3	4874.00	54.1 PK	74.0	-19.9	1.07 H	263	14.87	39.23
4	4874.00	50.6 AV	54.0	-3.4	1.07 H	263	11.37	39.23
5	7311.00	52.3 PK	74.0	-21.7	1.30 H	152	5.73	46.57
6	7311.00	41.6 AV	54.0	-12.4	1.30 H	152	-4.97	46.57
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	99.3 PK			1.69 V	301	67.55	31.75
2	*2437.00	97.1 AV			1.69 V	301	65.35	31.75
3	4874.00	55.1 PK	74.0	-18.9	1.03 V	62	15.87	39.23
4	4874.00	51.1 AV	54.0	-2.9	1.03 V	62	11.87	39.23
5	7311.00	52.2 PK	74.0	-21.8	1.22 V	351	5.63	46.57
6	7311.00	40.5 AV	54.0	-13.5	1.22 V	351	-6.07	46.57

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac / 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Nick Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.5 PK			1.41 H	295	74.67	31.83
2	*2462.00	104.3 AV			1.41 H	295	72.47	31.83
3	2487.70	59.3 PK	74.0	-14.7	1.41 H	295	27.38	31.92
4	2487.70	47.0 AV	54.0	-7.0	1.41 H	295	15.08	31.92
5	4924.00	54.4 PK	74.0	-19.6	1.08 H	246	15.01	39.39
6	4924.00	50.8 AV	54.0	-3.2	1.08 H	246	11.41	39.39
7	7386.00	52.2 PK	74.0	-21.8	1.33 H	162	5.73	46.47
8	7386.00	41.2 AV	54.0	-12.8	1.33 H	162	-5.27	46.47

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.2 PK			1.66 V	299	67.37	31.83
2	*2462.00	97.2 AV			1.66 V	299	65.37	31.83
3	2486.20	56.5 PK	74.0	-17.5	1.61 V	292	24.59	31.91
4	2486.20	43.2 AV	54.0	-10.8	1.61 V	292	11.29	31.91
5	4924.00	54.7 PK	74.0	-19.3	1.06 V	77	15.31	39.39
6	4924.00	50.6 AV	54.0	-3.4	1.06 V	77	11.21	39.39
7	7386.00	51.7 PK	74.0	-22.3	1.23 V	360	5.23	46.47
8	7386.00	40.2 AV	54.0	-13.8	1.23 V	360	-6.27	46.47

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.





A D T



RESTRICTED BANDEDGE (802.11b MODE, CH1, HORIZONTAL)

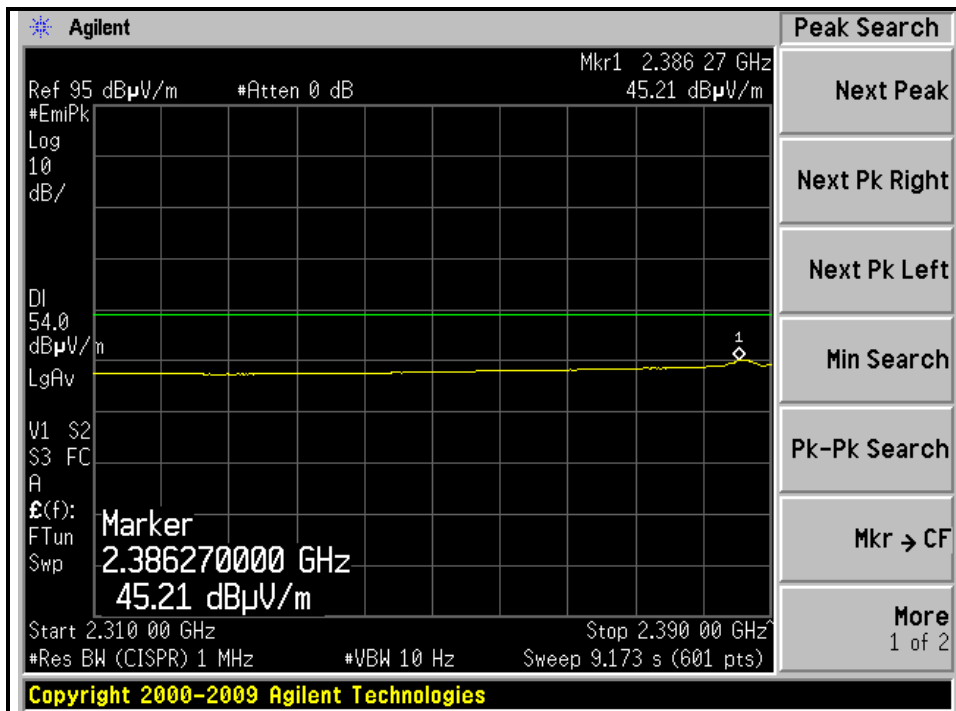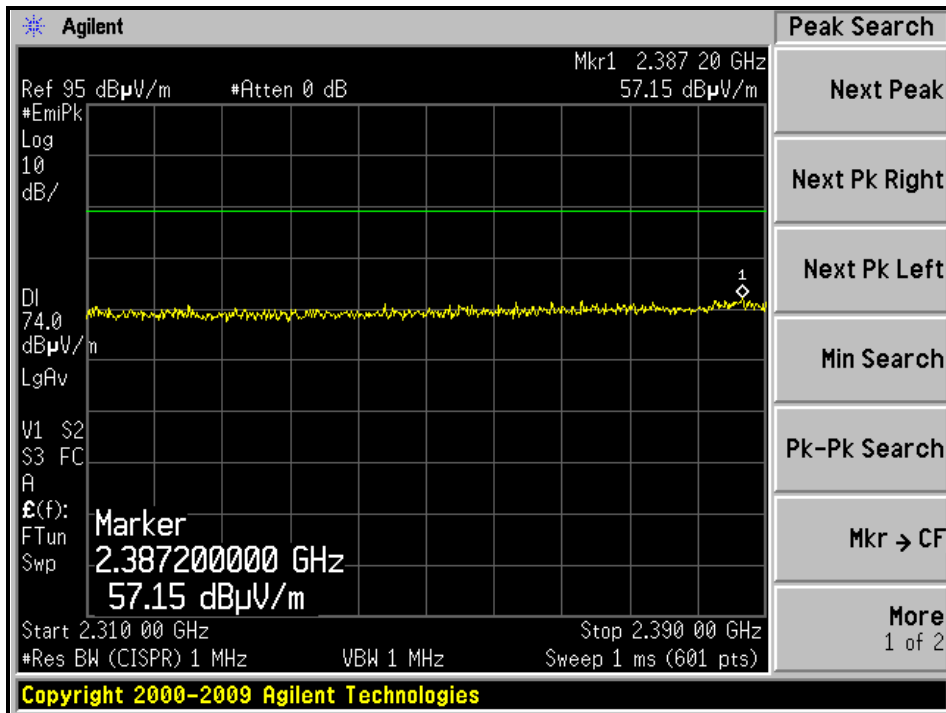

RESTRICTED BANDEDGE (802.11b MODE, CH1, VERTICAL)

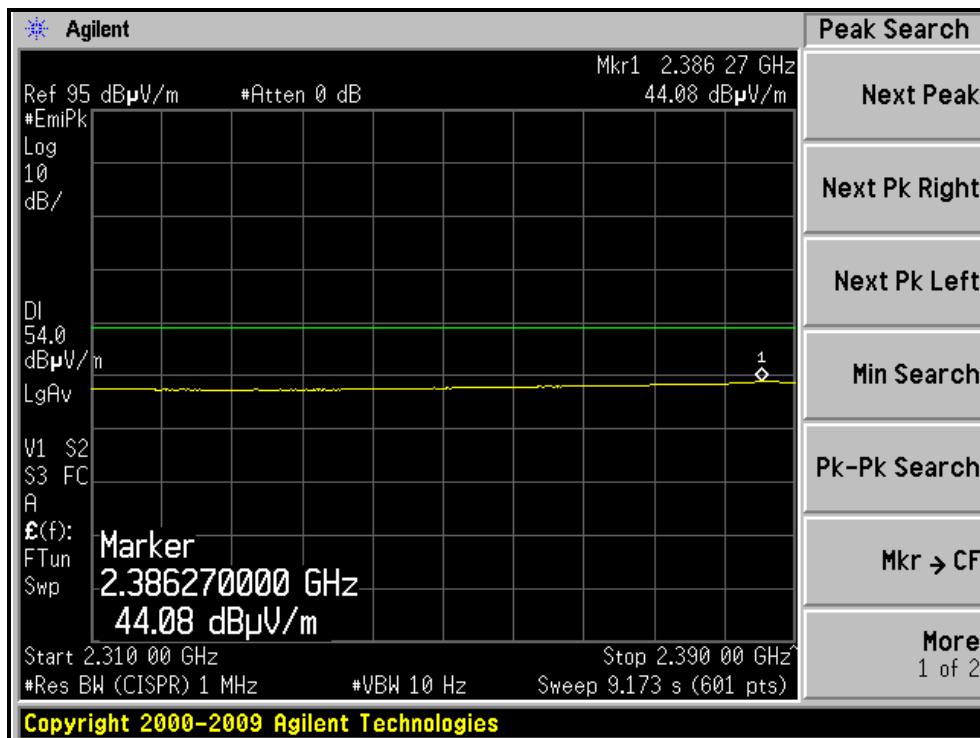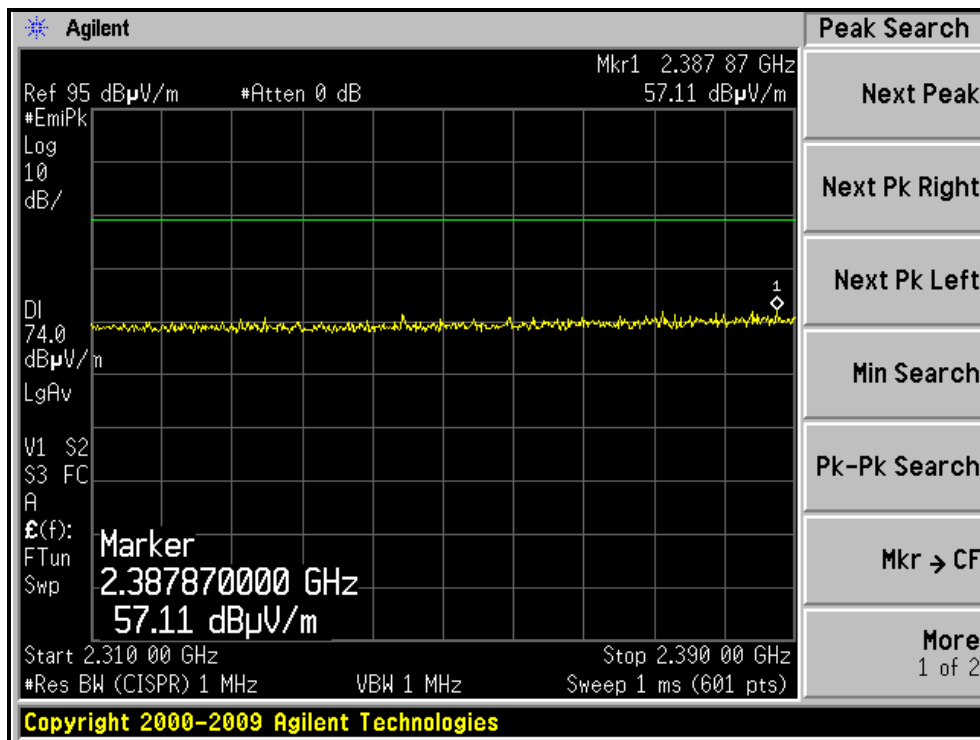



RESTRICTED BANDEDGE (802.11b MODE, CH11, HORIZONTAL)

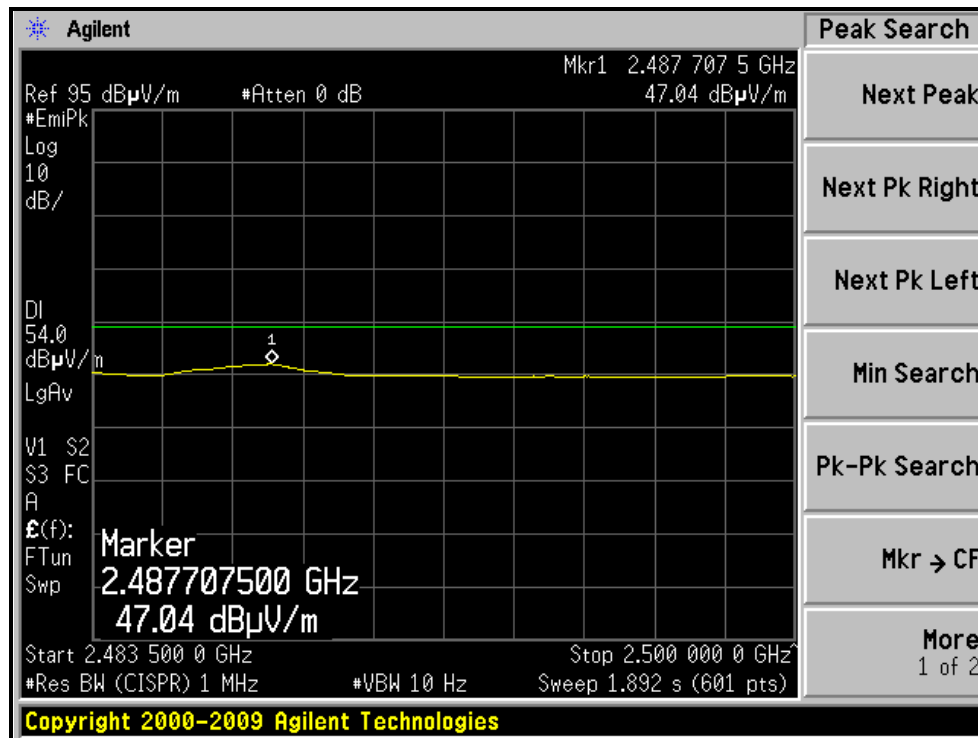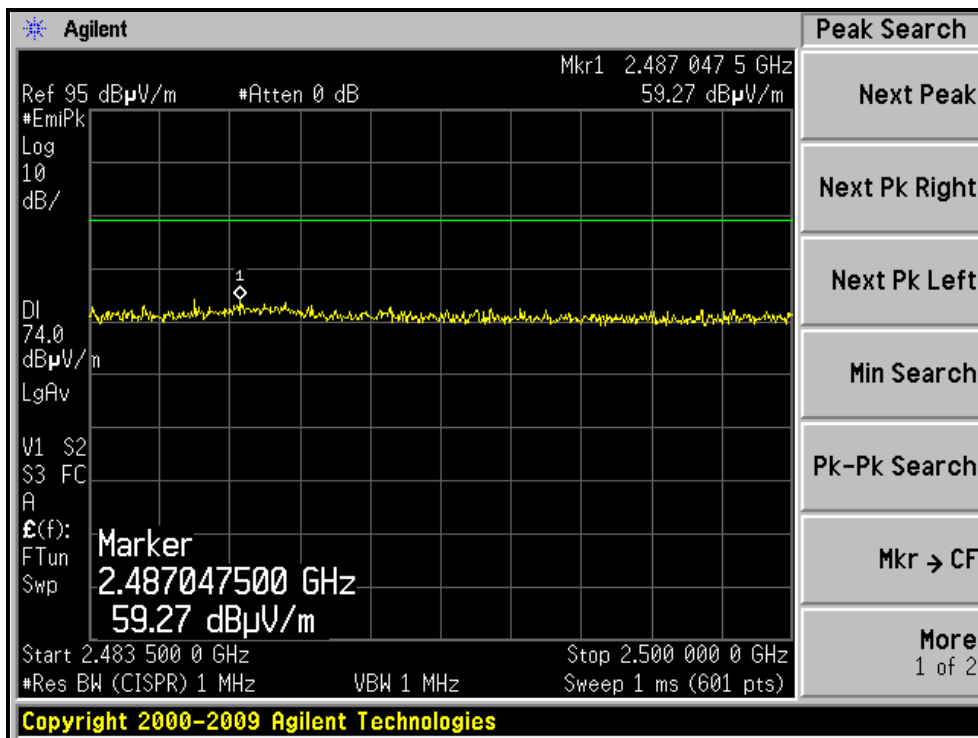



A D T

RESTRICTED BANDEDGE (802.11b MODE, CH11, VERTICAL)

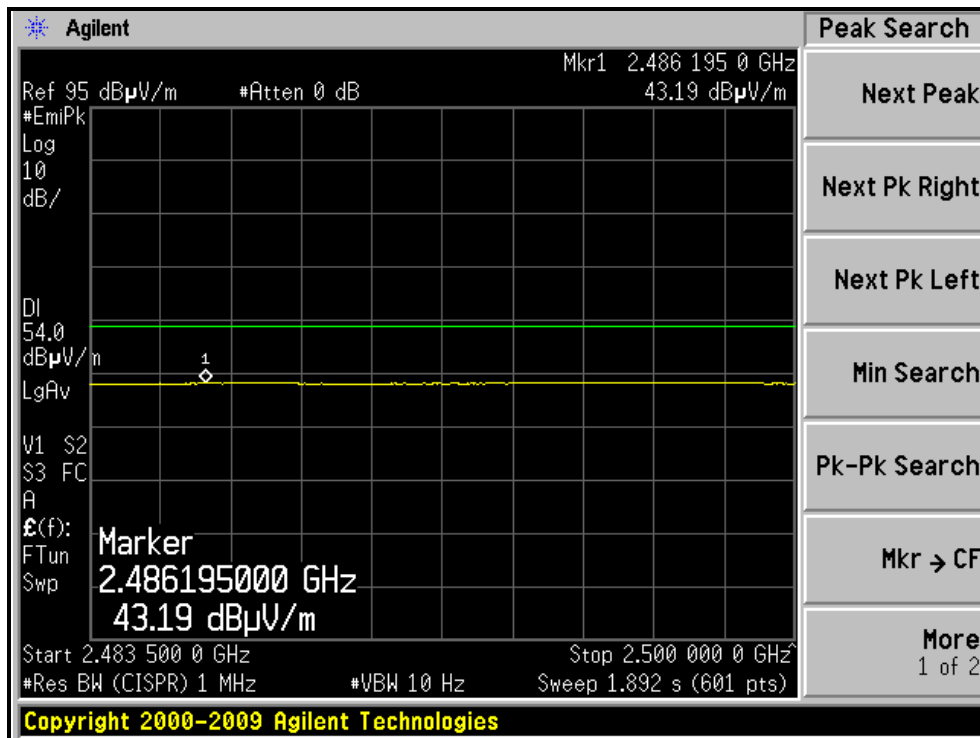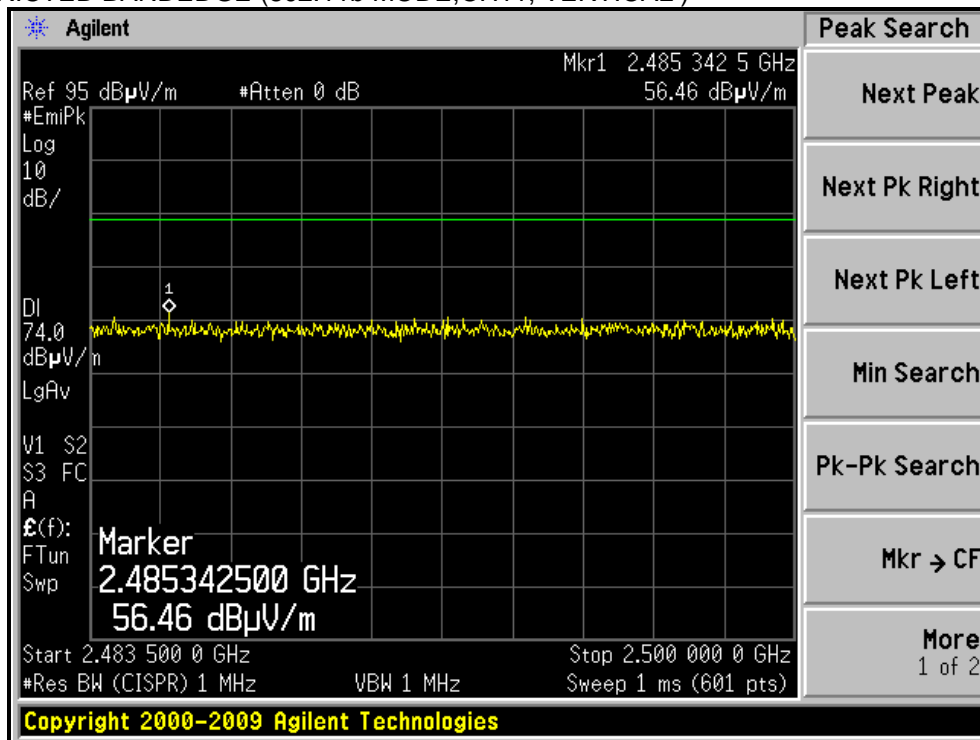



A D T

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac / 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Nick Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.5 PK	74.0	-5.5	1.51 H	295	36.91	31.59
2	2390.00	50.8 AV	54.0	-3.2	1.51 H	295	19.21	31.59
3	*2412.00	106.6 PK			1.51 H	296	74.94	31.66
4	*2412.00	97.0 AV			1.51 H	296	65.34	31.66
5	4824.00	57.8 PK	74.0	-16.2	1.08 H	273	18.73	39.07
6	4824.00	46.5 AV	54.0	-7.5	1.08 H	273	7.43	39.07
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.9 PK	74.0	-8.1	1.00 V	92	34.31	31.59
2	2390.00	49.3 AV	54.0	-4.7	1.00 V	92	17.71	31.59
3	*2412.00	102.9 PK			1.00 V	92	71.24	31.66
4	*2412.00	93.3 AV			1.00 V	92	61.64	31.66
5	4824.00	59.2 PK	74.0	-14.8	1.11 V	248	20.13	39.07
6	4824.00	46.4 AV	54.0	-7.6	1.11 V	248	7.33	39.07

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac / 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Nick Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.6 PK			1.42 H	296	75.85	31.75
2	*2437.00	98.8 AV			1.42 H	296	67.05	31.75
3	4874.00	58.1 PK	74.0	-15.9	1.09 H	264	18.87	39.23
4	4874.00	47.0 AV	54.0	-7.0	1.09 H	264	7.77	39.23
5	7311.00	51.8 PK	74.0	-22.2	1.31 H	147	5.23	46.57
6	7311.00	40.5 AV	54.0	-13.5	1.31 H	147	-6.07	46.57
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.2 PK			1.02 V	76	71.45	31.75
2	*2437.00	93.3 AV			1.02 V	76	61.55	31.75
3	4874.00	59.2 PK	74.0	-14.8	1.07 V	249	19.97	39.23
4	4874.00	46.5 AV	54.0	-7.5	1.07 V	249	7.27	39.23
5	7311.00	54.2 PK	74.0	-19.8	1.25 V	13	7.63	46.57
6	7311.00	42.1 AV	54.0	-11.9	1.25 V	13	-4.47	46.57

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac / 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Nick Chang



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.2 PK			1.43 H	297	76.37	31.83
2	*2462.00	98.6 AV			1.43 H	297	66.77	31.83
3	2483.50	71.4 PK	74.0	-2.6	1.43 H	297	39.50	31.90
4	2483.50	52.9 AV	54.0	-1.1	1.43 H	297	21.00	31.90
5	4924.00	57.0 PK	74.0	-17.0	1.13 H	256	17.61	39.39
6	4924.00	45.1 AV	54.0	-8.9	1.13 H	256	5.71	39.39
7	7386.00	52.0 PK	74.0	-22.0	1.37 H	148	5.53	46.47
8	7386.00	40.8 AV	54.0	-13.2	1.37 H	148	-5.67	46.47
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.1 PK			1.00 V	88	70.27	31.83
2	*2462.00	93.5 AV			1.00 V	88	61.67	31.83
3	2483.50	66.4 PK	74.0	-7.6	1.00 V	89	34.50	31.90
4	2483.50	47.5 AV	54.0	-6.5	1.00 V	89	15.60	31.90
5	4924.00	56.3 PK	74.0	-17.7	1.12 V	251	16.91	39.39
6	4924.00	44.2 AV	54.0	-9.8	1.12 V	251	4.81	39.39
7	7386.00	53.9 PK	74.0	-20.1	1.21 V	18	7.43	46.47
8	7386.00	41.8 AV	54.0	-12.2	1.21 V	18	-4.67	46.47

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (802.11g MODE, CH1, HORIZONTAL)

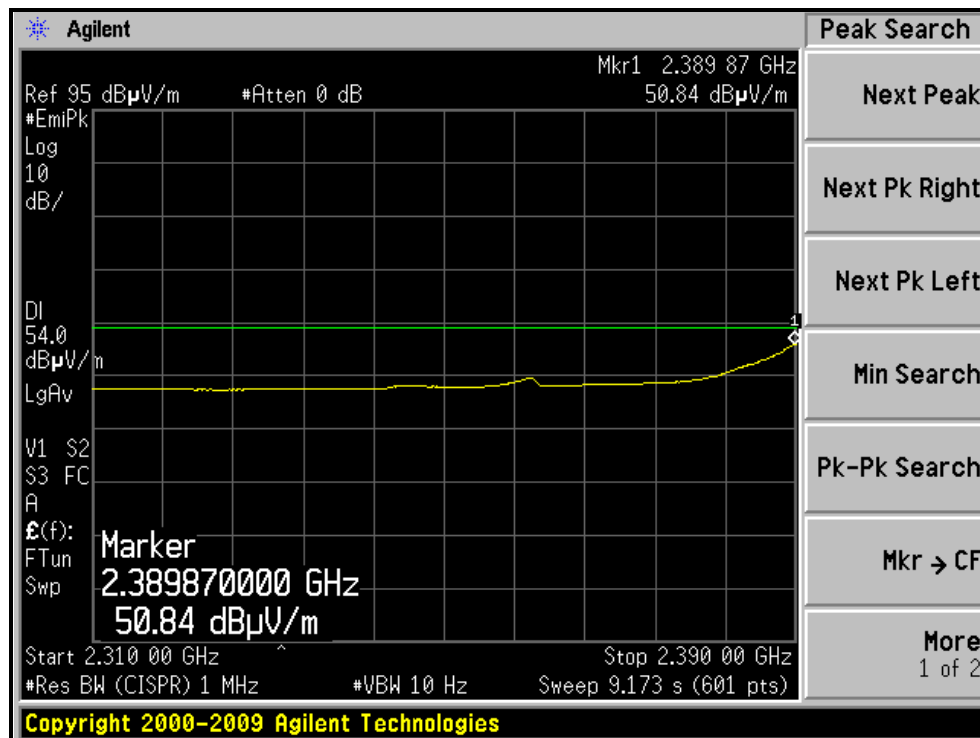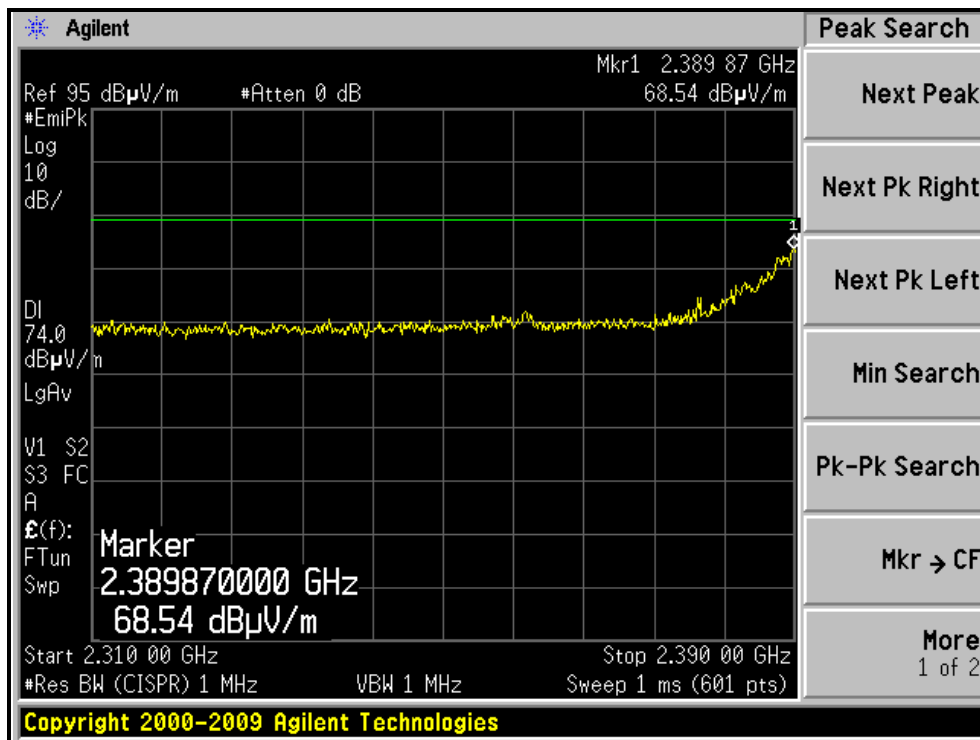



A D T



RESTRICTED BANDEDGE (802.11g MODE,CH1, VERTICAL)

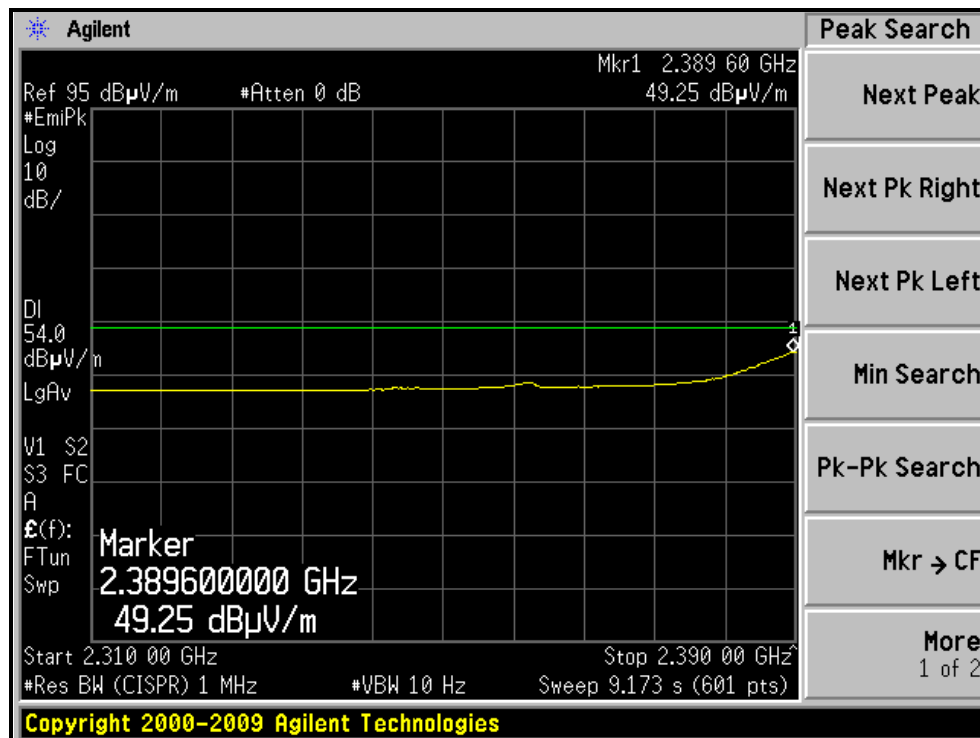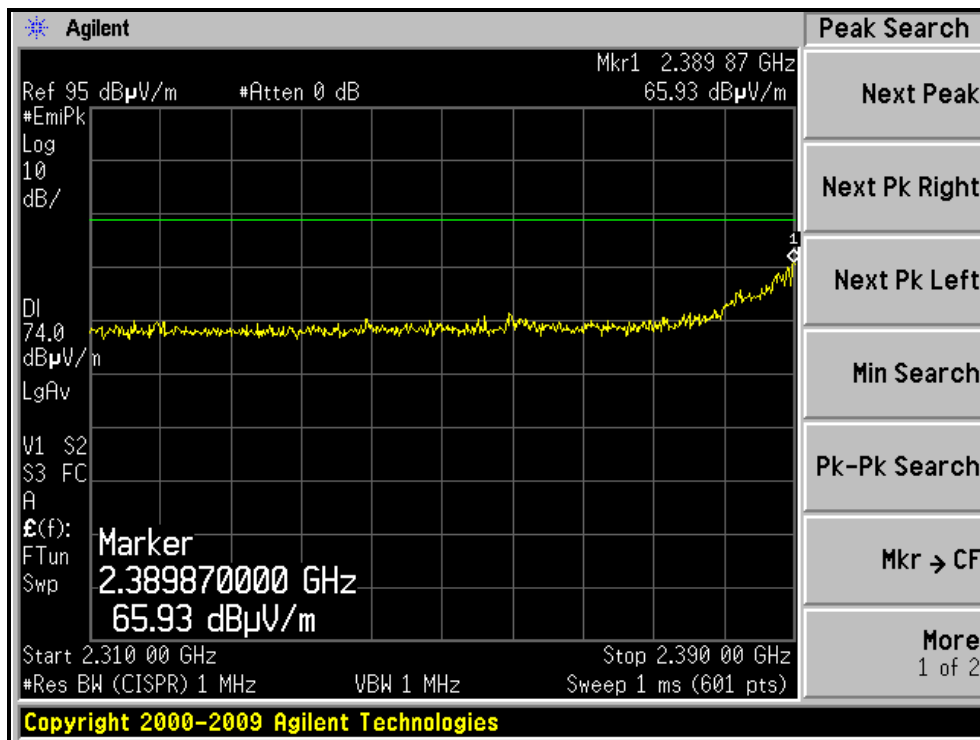



A D T



RESTRICTED BANDEDGE (802.11g MODE, CH11, HORIZONTAL)

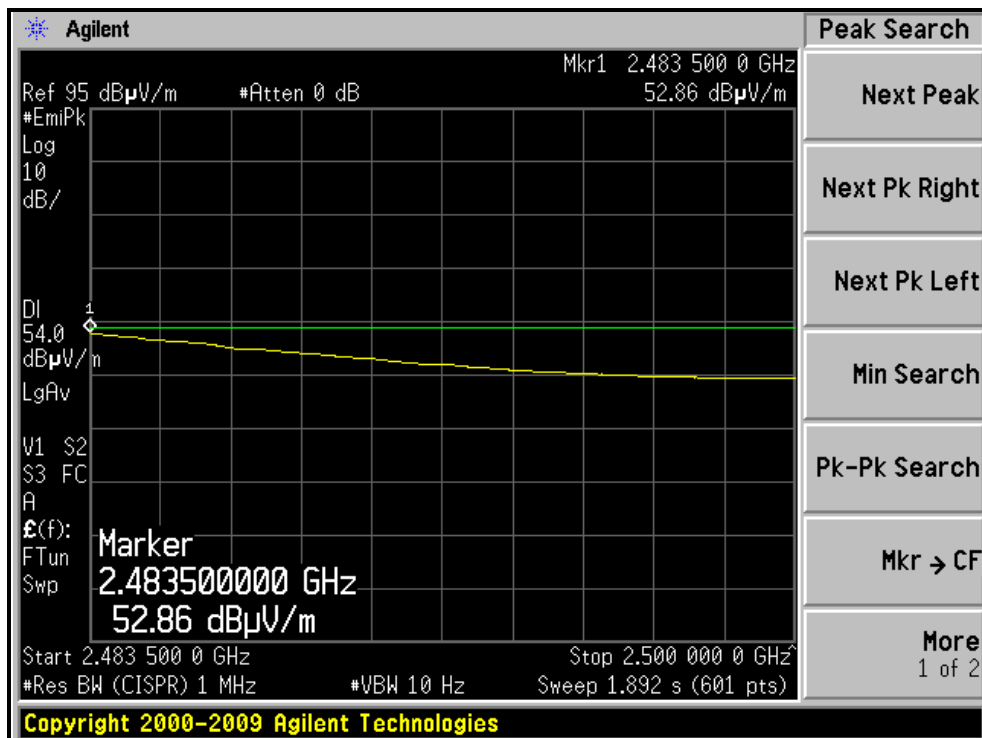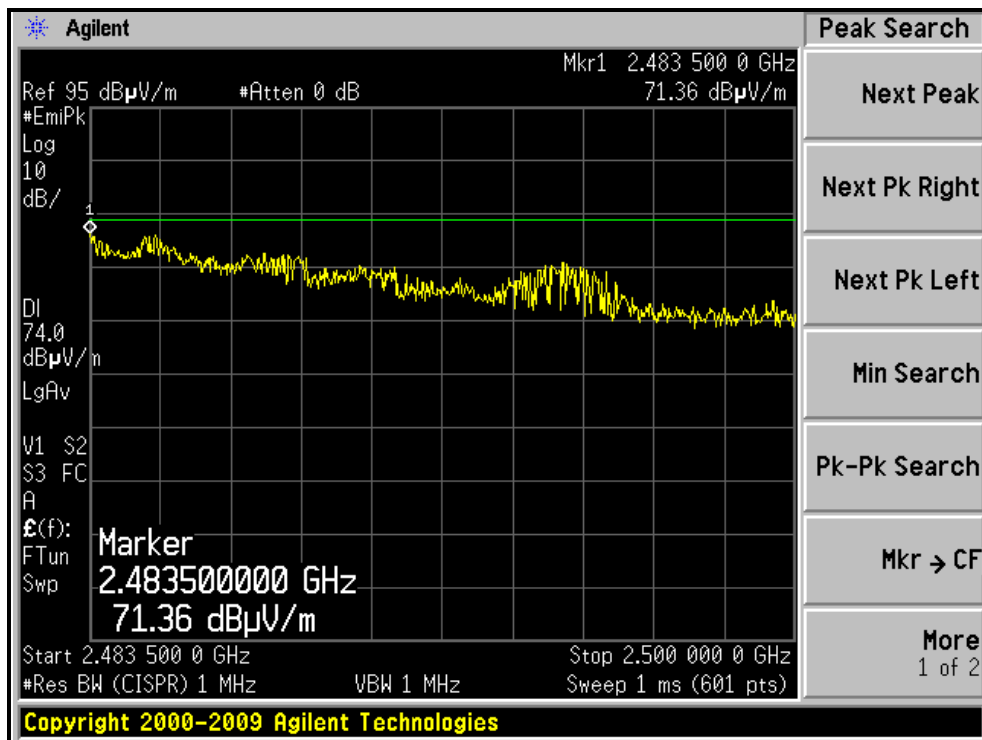



A D T

RESTRICTED BANDEDGE (802.11g MODE, CH11, VERTICAL)

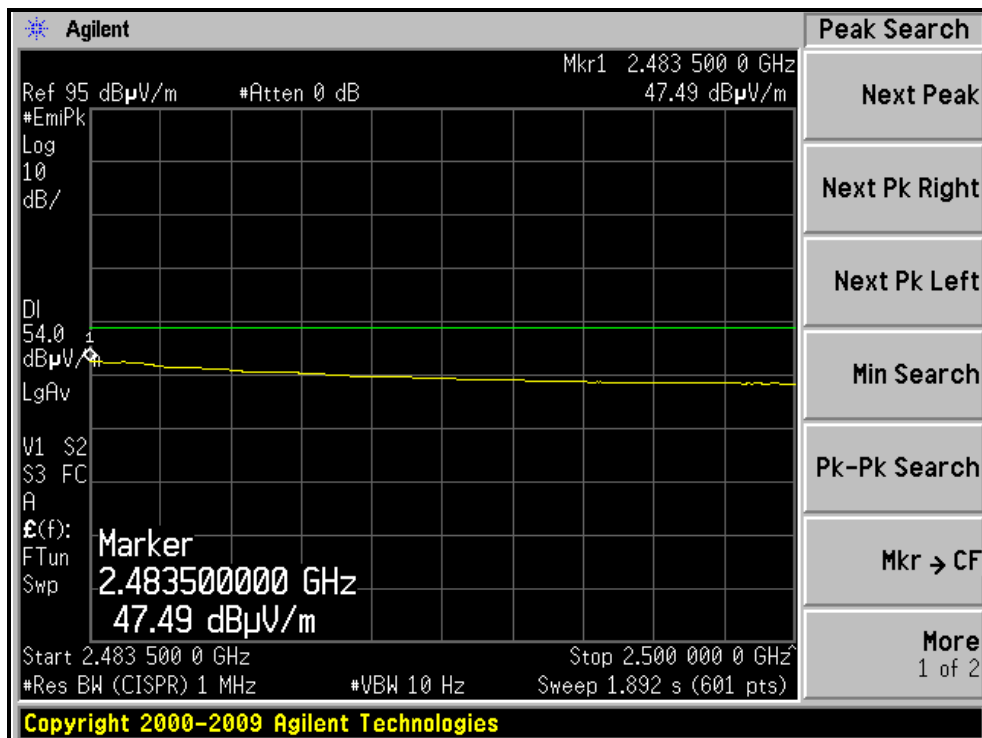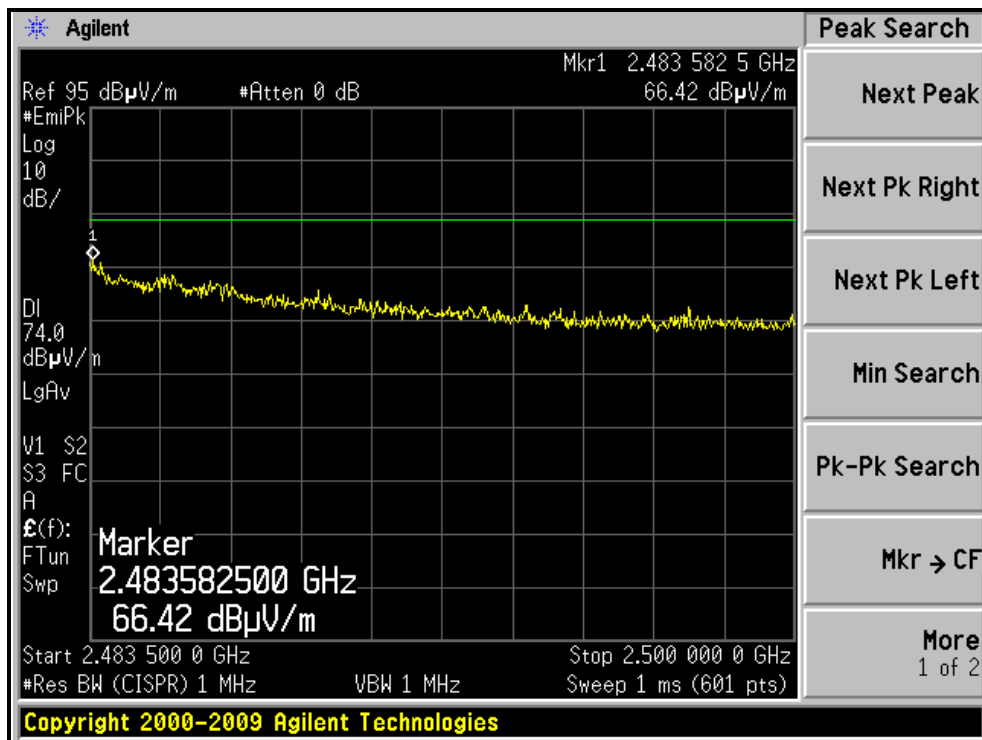



A D T

802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac / 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Nick Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.2 PK	74.0	-6.8	1.49 H	294	35.61	31.59
2	2390.00	52.5 AV	54.0	-1.5	1.49 H	294	20.91	31.59
3	*2412.00	105.2 PK			1.49 H	294	73.54	31.66
4	*2412.00	96.4 AV			1.49 H	294	64.74	31.66
5	4824.00	57.3 PK	74.0	-16.7	1.17 H	261	18.23	39.07
6	4824.00	46.2 AV	54.0	-7.8	1.17 H	261	7.13	39.07

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.9 PK	74.0	-11.1	1.00 V	95	31.31	31.59
2	2390.00	47.9 AV	54.0	-6.1	1.00 V	95	16.31	31.59
3	*2412.00	101.7 PK			1.00 V	94	70.04	31.66
4	*2412.00	92.4 AV			1.00 V	94	60.74	31.66
5	4824.00	58.6 PK	74.0	-15.4	1.02 V	233	19.53	39.07
6	4824.00	46.2 AV	54.0	-7.8	1.02 V	233	7.13	39.07

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac / 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Nick Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.7 PK			1.45 H	299	74.95	31.75
2	*2437.00	97.7 AV			1.45 H	299	65.95	31.75
3	2488.70	67.2 PK	74.0	-6.8	1.41 H	298	35.28	31.92
4	2488.70	50.9 AV	54.0	-3.1	1.41 H	298	18.98	31.92
5	4874.00	57.8 PK	74.0	-16.2	1.15 H	271	18.57	39.23
6	4874.00	46.7 AV	54.0	-7.3	1.15 H	271	7.47	39.23
7	7311.00	52.5 PK	74.0	-21.5	1.27 H	143	5.93	46.57
8	7311.00	41.0 AV	54.0	-13.0	1.27 H	143	-5.57	46.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.2 PK			1.00 V	92	70.45	31.75
2	*2437.00	92.9 AV			1.00 V	92	61.15	31.75
3	4874.00	58.9 PK	74.0	-15.1	1.06 V	263	19.67	39.23
4	4874.00	46.3 AV	54.0	-7.7	1.06 V	263	7.07	39.23
5	7311.00	54.7 PK	74.0	-19.3	1.20 V	23	8.13	46.57
6	7311.00	42.5 AV	54.0	-11.5	1.20 V	23	-4.07	46.57

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac / 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Nick Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.8 PK			1.41 H	297	74.97	31.83
2	*2462.00	97.7 AV			1.41 H	297	65.87	31.83
3	2483.50	72.9 PK	74.0	-1.1	1.41 H	297	41.00	31.90
4	2483.50	53.4 AV	54.0	-0.6	1.41 H	297	21.50	31.90
5	4924.00	56.5 PK	74.0	-17.5	1.18 H	263	17.11	39.39
6	4924.00	44.9 AV	54.0	-9.1	1.18 H	263	5.51	39.39
7	7386.00	51.8 PK	74.0	-22.2	1.34 H	159	5.33	46.47
8	7386.00	40.7 AV	54.0	-13.3	1.34 H	159	-5.77	46.47

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.6 PK			1.01 V	85	69.77	31.83
2	*2462.00	92.7 AV			1.01 V	85	60.87	31.83
3	2483.50	67.3 PK	74.0	-6.7	1.00 V	87	35.40	31.90
4	2483.50	46.9 AV	54.0	-7.1	1.00 V	87	15.00	31.90
5	4924.00	56.9 PK	74.0	-17.1	1.17 V	248	17.51	39.39
6	4924.00	44.6 AV	54.0	-9.4	1.17 V	248	5.21	39.39
7	7386.00	53.9 PK	74.0	-20.1	1.17 V	21	7.43	46.47
8	7386.00	42.0 AV	54.0	-12.0	1.17 V	21	-4.47	46.47

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH1, HORIZONTAL)

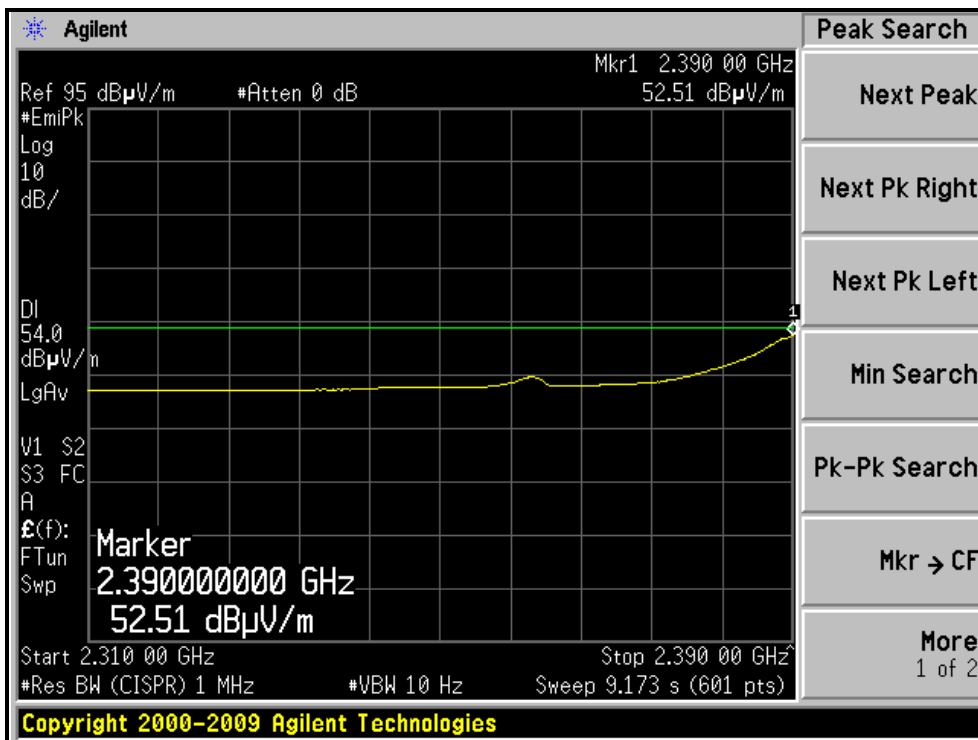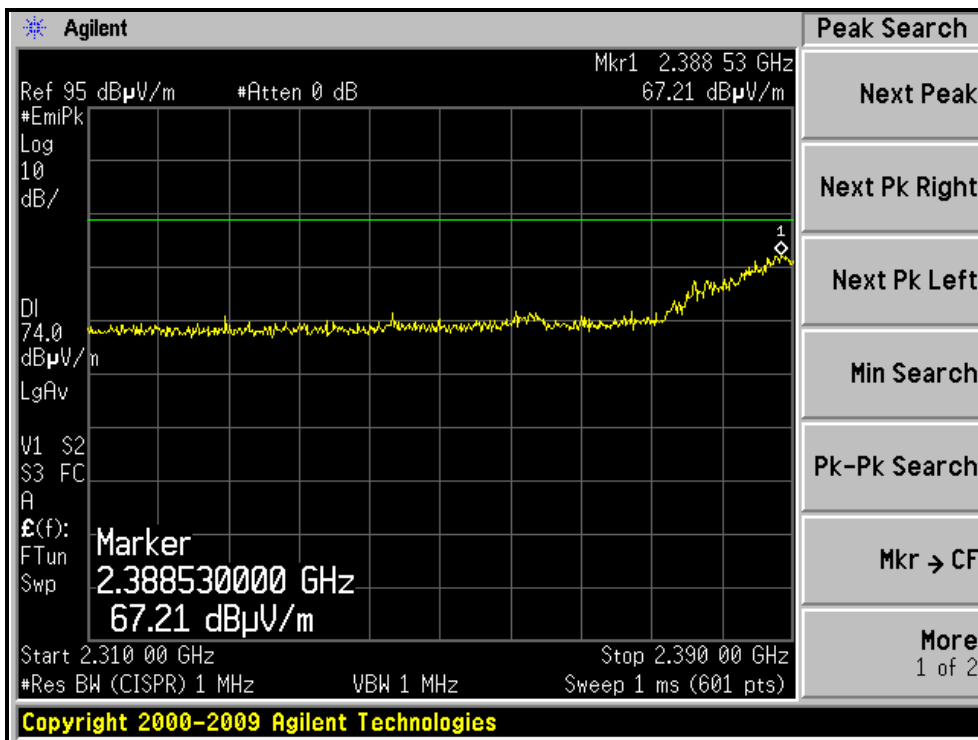



A D T



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH1, VERTICAL)

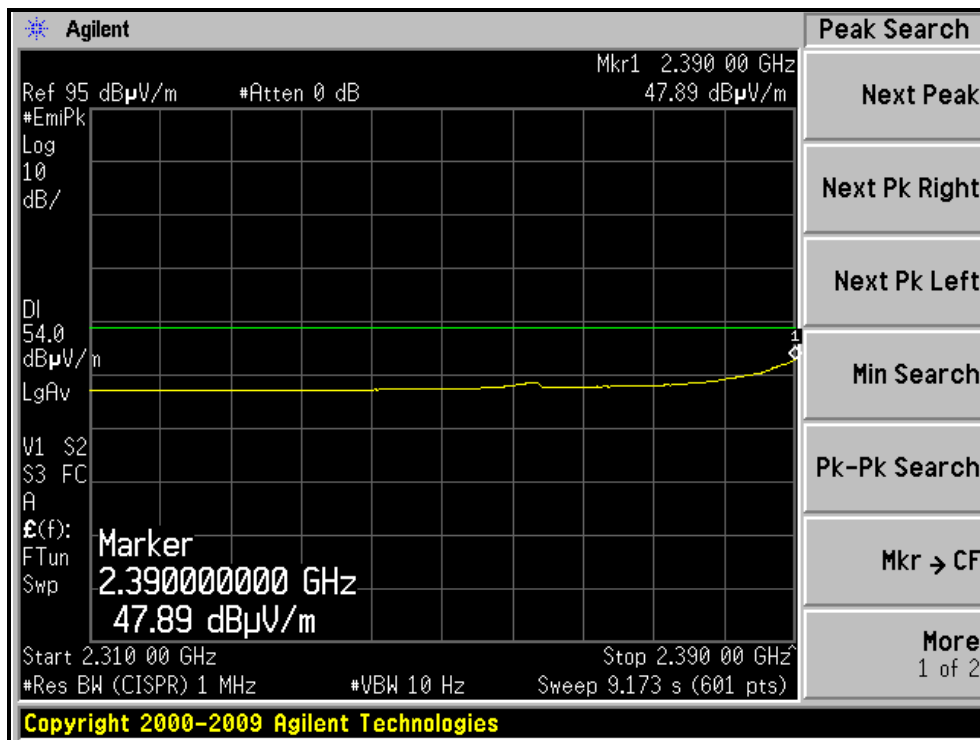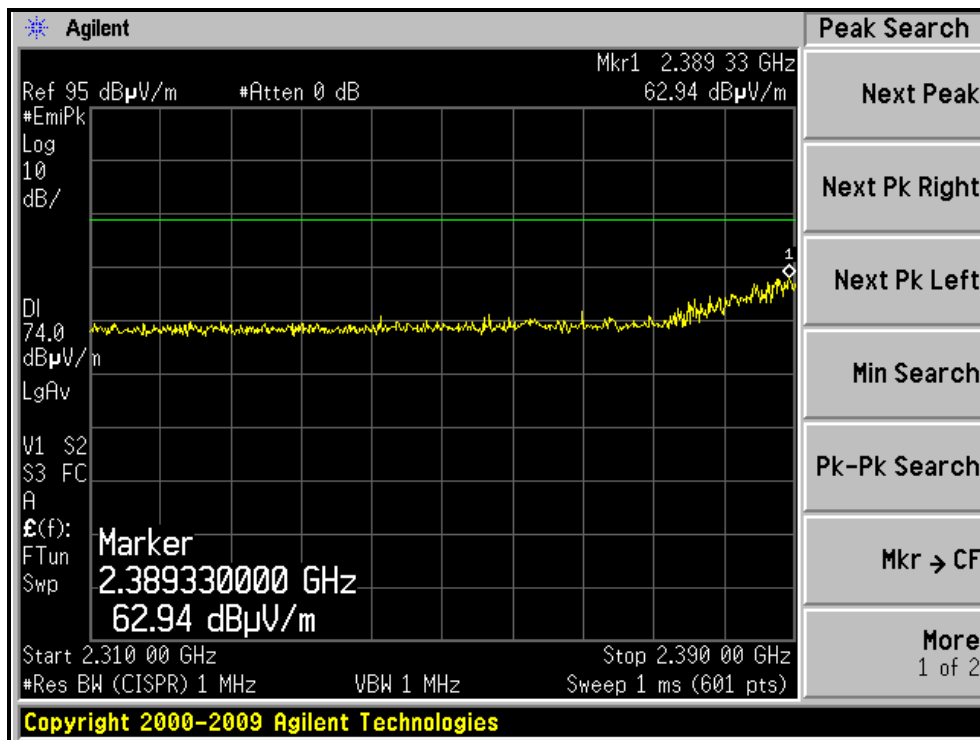



A D T



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH11, HORIZONTAL)

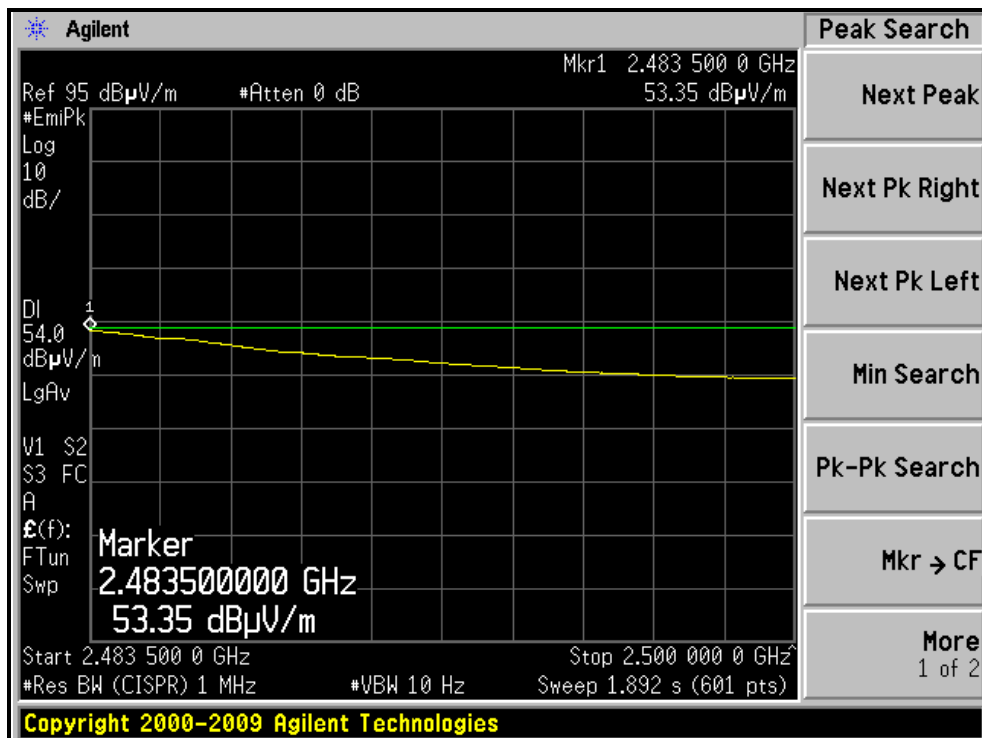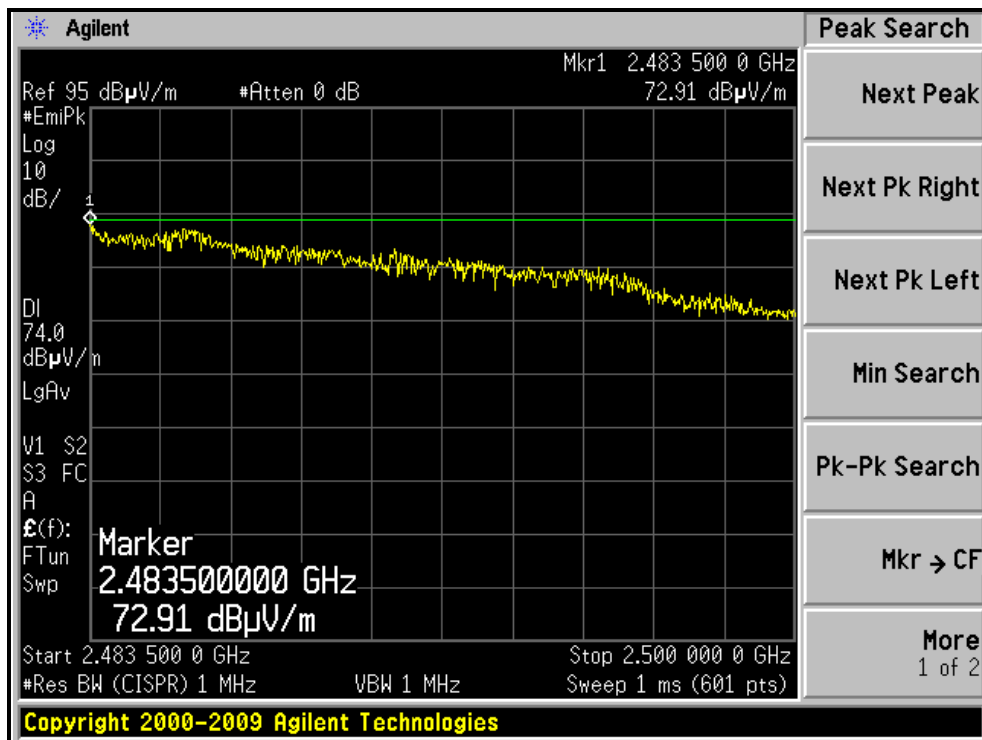



A D T

RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH11, VERTICAL)

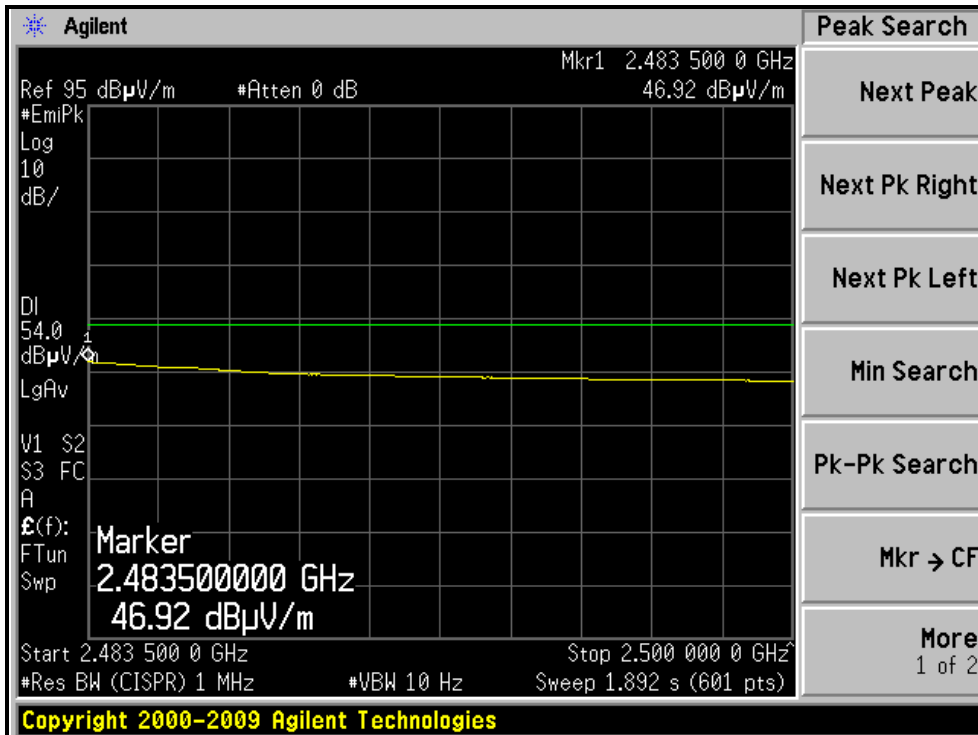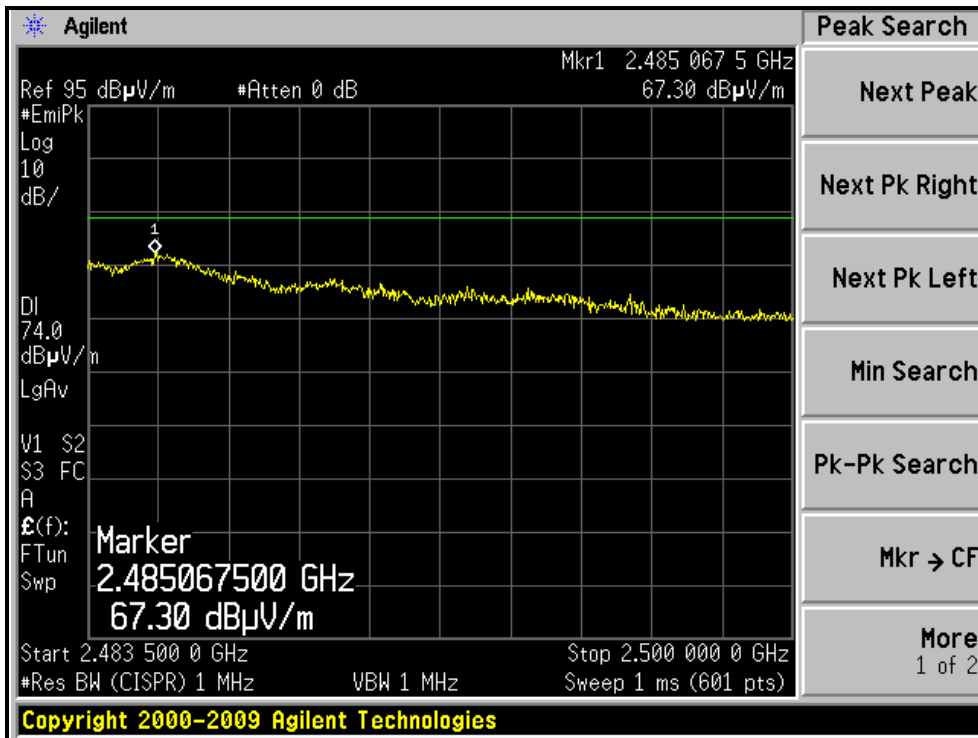



A D T

802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 3	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac / 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Nick Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.5 PK	74.0	-8.5	1.48 H	295	33.91	31.59
2	2390.00	53.1 AV	54.0	-0.9	1.48 H	295	21.51	31.59
3	*2422.00	100.9 PK			1.48 H	296	69.21	31.69
4	*2422.00	92.2 AV			1.48 H	296	60.51	31.69
5	4844.00	57.0 PK	74.0	-17.0	1.20 H	269	17.87	39.13
6	4844.00	45.1 AV	54.0	-8.9	1.20 H	269	5.97	39.13
7	7266.00	51.5 PK	74.0	-22.5	1.29 H	170	4.90	46.60
8	7266.00	40.6 AV	54.0	-13.4	1.29 H	170	-6.00	46.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.8 PK	74.0	-14.2	1.00 V	91	28.21	31.59
2	2390.00	48.7 AV	54.0	-5.3	1.00 V	91	17.11	31.59
3	*2422.00	97.6 PK			1.00 V	91	65.91	31.69
4	*2422.00	88.5 AV			1.00 V	91	56.81	31.69
5	4844.00	55.0 PK	74.0	-19.0	1.09 V	245	15.87	39.13
6	4844.00	43.2 AV	54.0	-10.8	1.09 V	245	4.07	39.13
7	7266.00	52.9 PK	74.0	-21.1	1.22 V	0	6.30	46.60
8	7266.00	40.9 AV	54.0	-13.1	1.22 V	0	-5.70	46.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac / 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Nick Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.7 PK			1.43 H	300	71.95	31.75
2	*2437.00	94.4 AV			1.43 H	300	62.65	31.75
3	2483.50	68.3 PK	74.0	-5.7	1.40 H	297	36.40	31.90
4	2483.50	52.1 AV	54.0	-1.9	1.40 H	297	20.20	31.90
5	4874.00	56.2 PK	74.0	-17.8	1.19 H	255	16.97	39.23
6	4874.00	44.6 AV	54.0	-9.4	1.19 H	255	5.37	39.23
7	7311.00	51.8 PK	74.0	-22.2	1.29 H	164	5.23	46.57
8	7311.00	40.9 AV	54.0	-13.1	1.29 H	164	-5.67	46.57
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	98.7 PK			1.02 V	95	66.95	31.75
2	*2437.00	89.2 AV			1.02 V	95	57.45	31.75
3	4874.00	55.7 PK	74.0	-18.3	1.13 V	252	16.47	39.23
4	4874.00	43.7 AV	54.0	-10.3	1.13 V	252	4.47	39.23
5	7311.00	53.5 PK	74.0	-20.5	1.21 V	12	6.93	46.57
6	7311.00	41.2 AV	54.0	-12.8	1.21 V	12	-5.37	46.57

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 9	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac / 60Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH	TESTED BY	Nick Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	103.5 PK			1.42 H	302	71.70	31.80
2	*2452.00	94.5 AV			1.42 H	302	62.70	31.80
3	2484.30	66.9 PK	74.0	-7.1	1.42 H	296	34.99	31.91
4	2484.30	49.3 AV	54.0	-4.7	1.42 H	296	17.39	31.91
5	4904.00	56.7 PK	74.0	-17.3	1.23 H	263	17.38	39.32
6	4904.00	45.0 AV	54.0	-9.0	1.23 H	263	5.68	39.32
7	7356.00	51.5 PK	74.0	-22.5	1.32 H	162	4.99	46.51
8	7356.00	40.5 AV	54.0	-13.5	1.32 H	162	-6.01	46.51

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M



NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	96.6 PK			1.00 V	89	64.80	31.80
2	*2452.00	87.6 AV			1.00 V	89	55.80	31.80
3	2484.40	59.6 PK	74.0	-14.4	1.00 V	89	27.69	31.91
4	2484.40	45.6 AV	54.0	-8.4	1.00 V	89	13.69	31.91
5	4904.00	56.1 PK	74.0	-17.9	1.13 V	242	16.78	39.32
6	4904.00	44.1 AV	54.0	-9.9	1.13 V	242	4.78	39.32
7	7356.00	53.6 PK	74.0	-20.4	1.16 V	10	7.09	46.51
8	7356.00	41.4 AV	54.0	-12.6	1.16 V	10	-5.11	46.51

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



A D T



RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH3, HORIZONTAL)

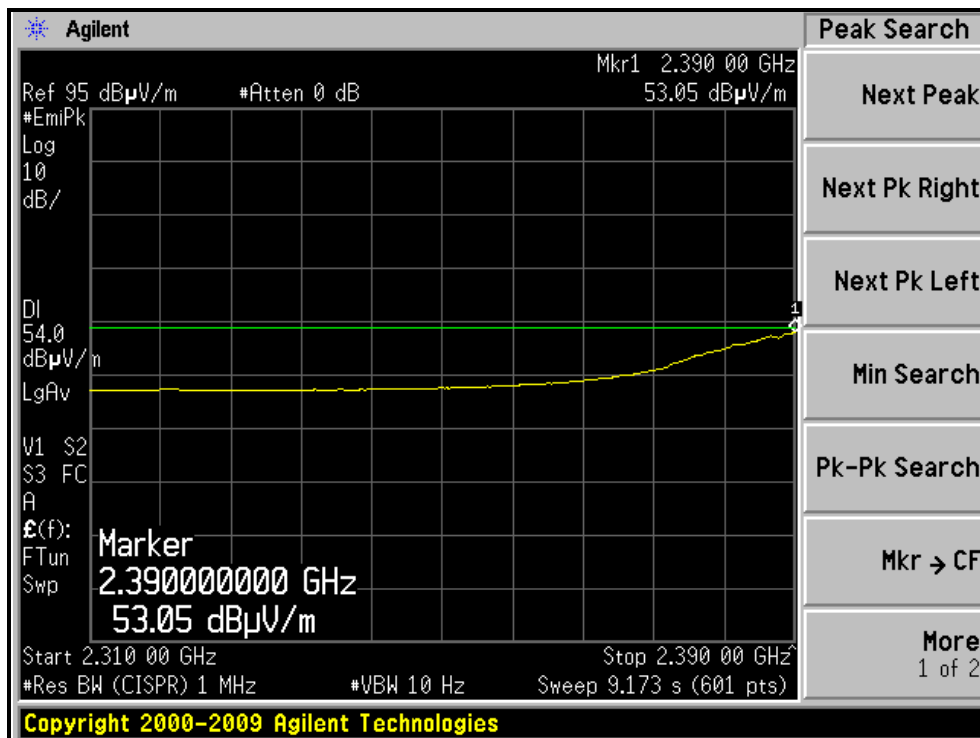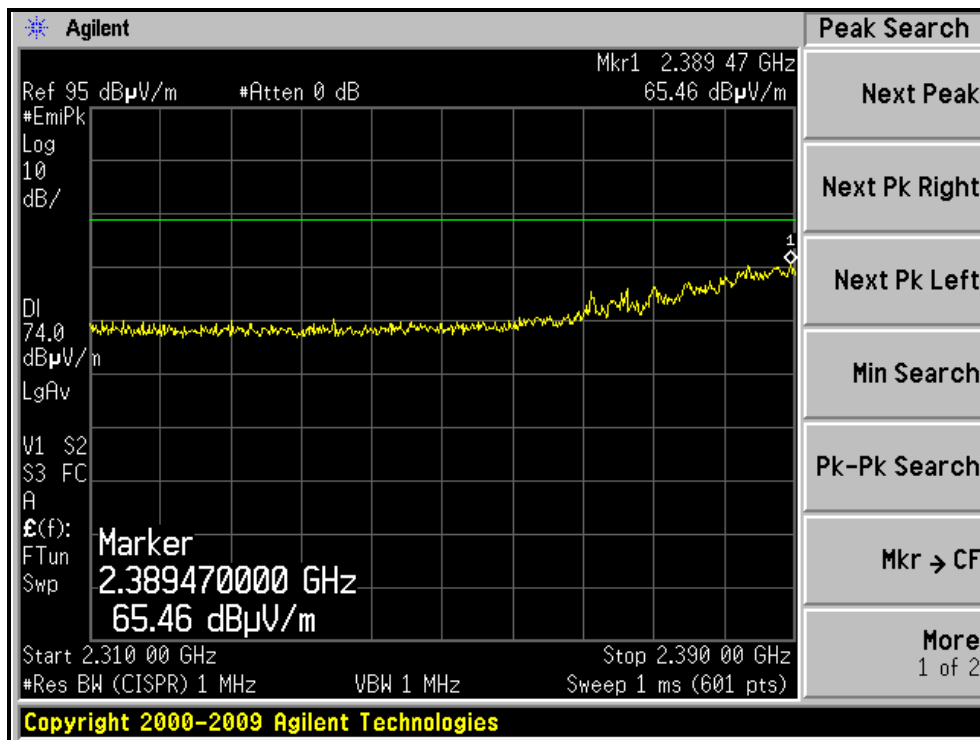



A D T



RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH3, VERTICAL)

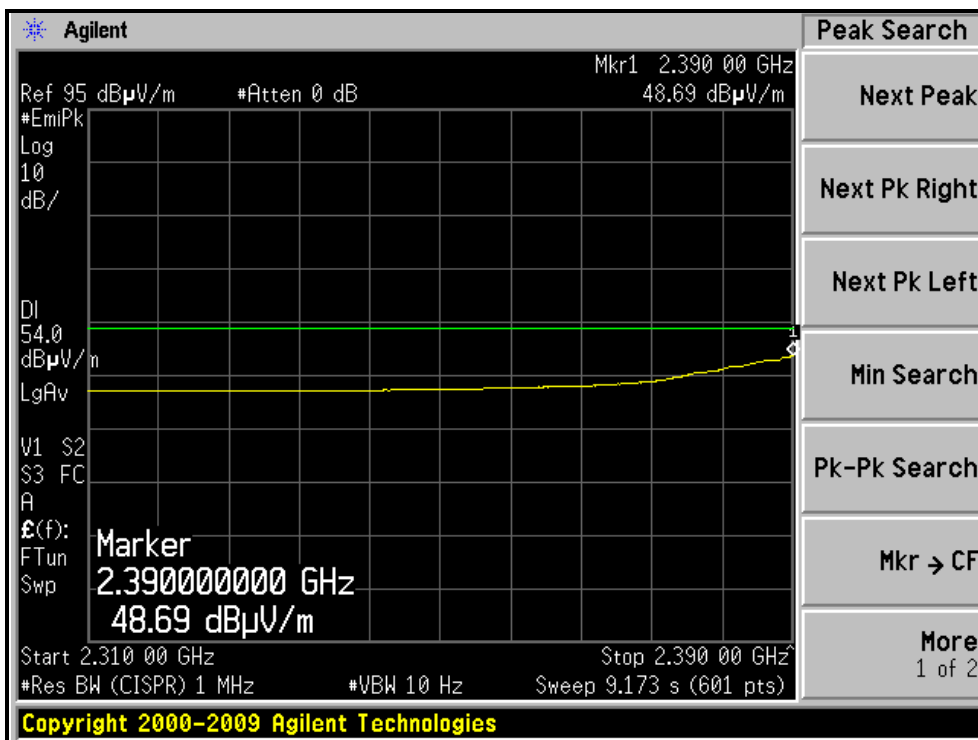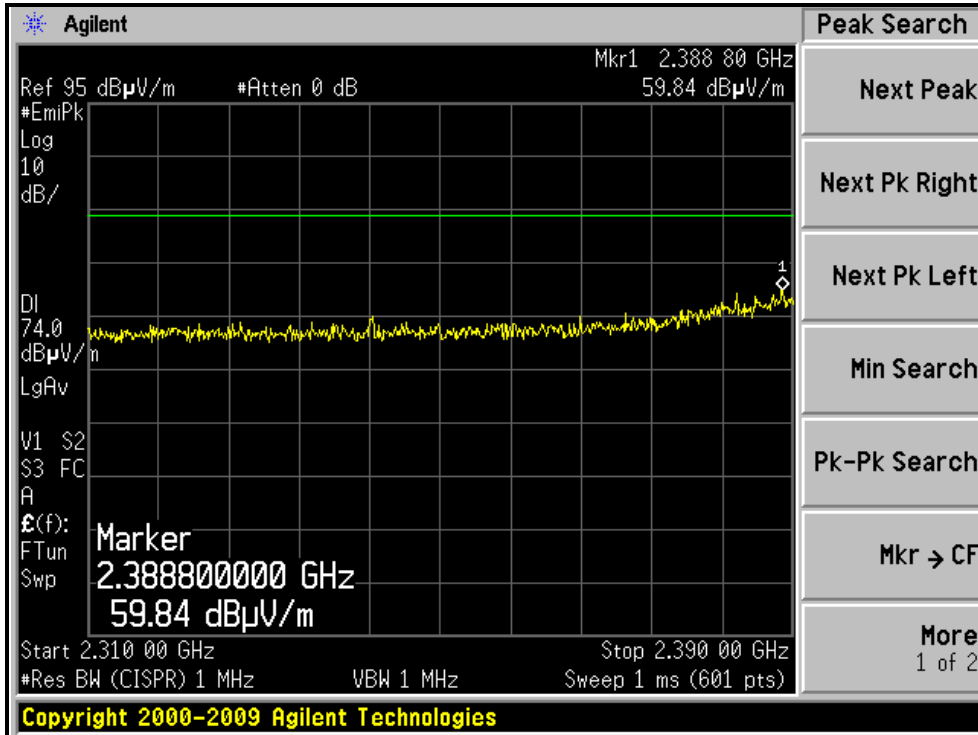





A D T

RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH9, HORIZONTAL)

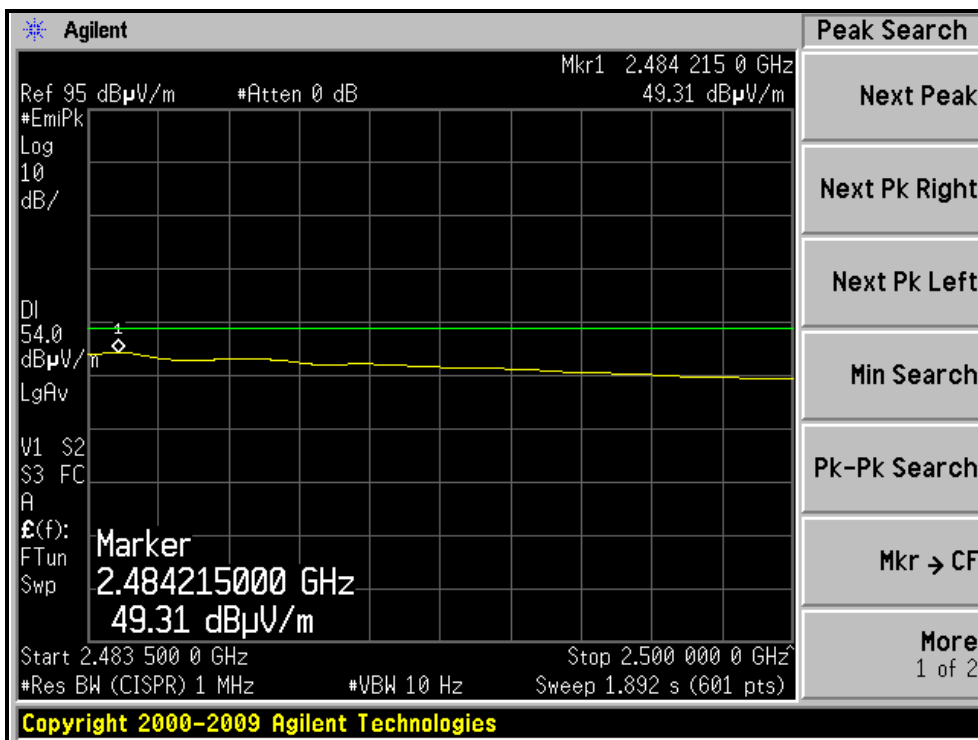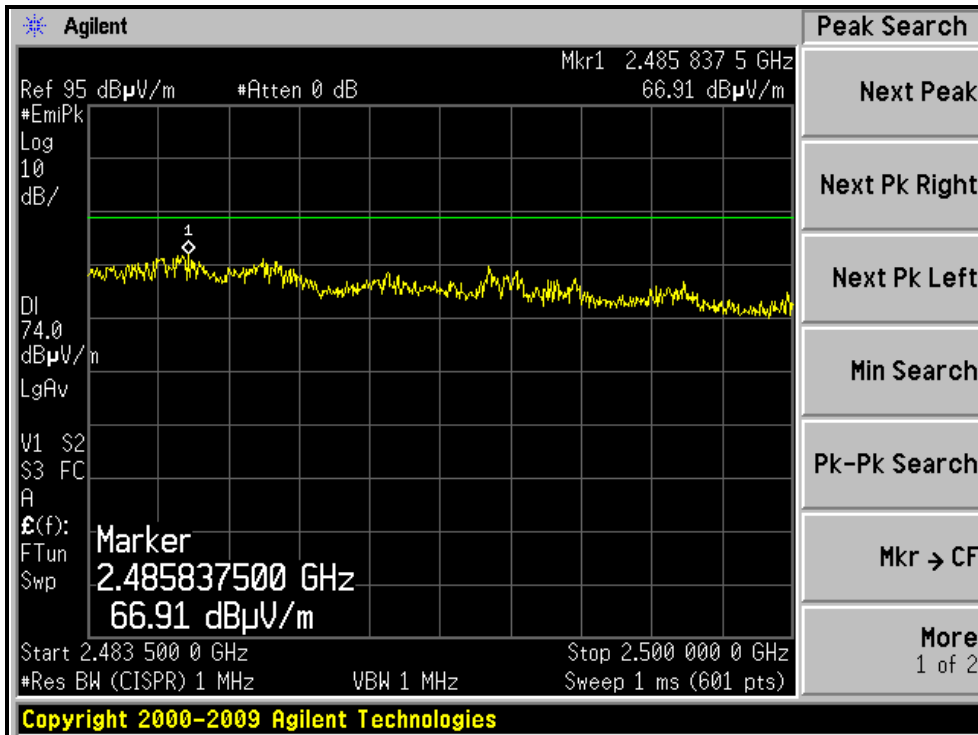

RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH9, VERTICAL)

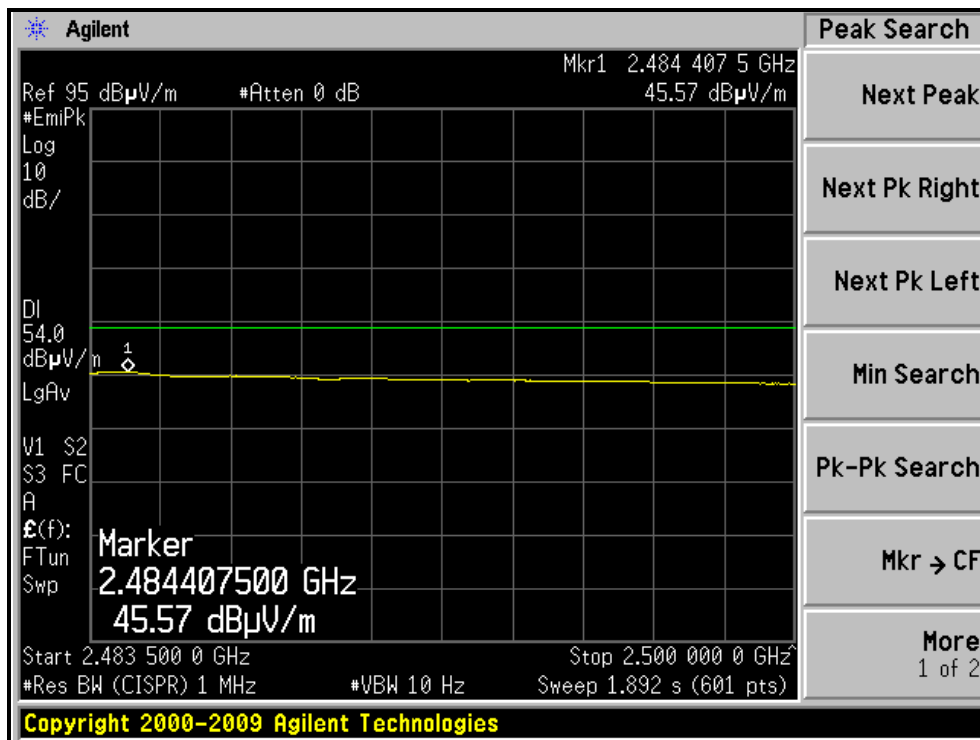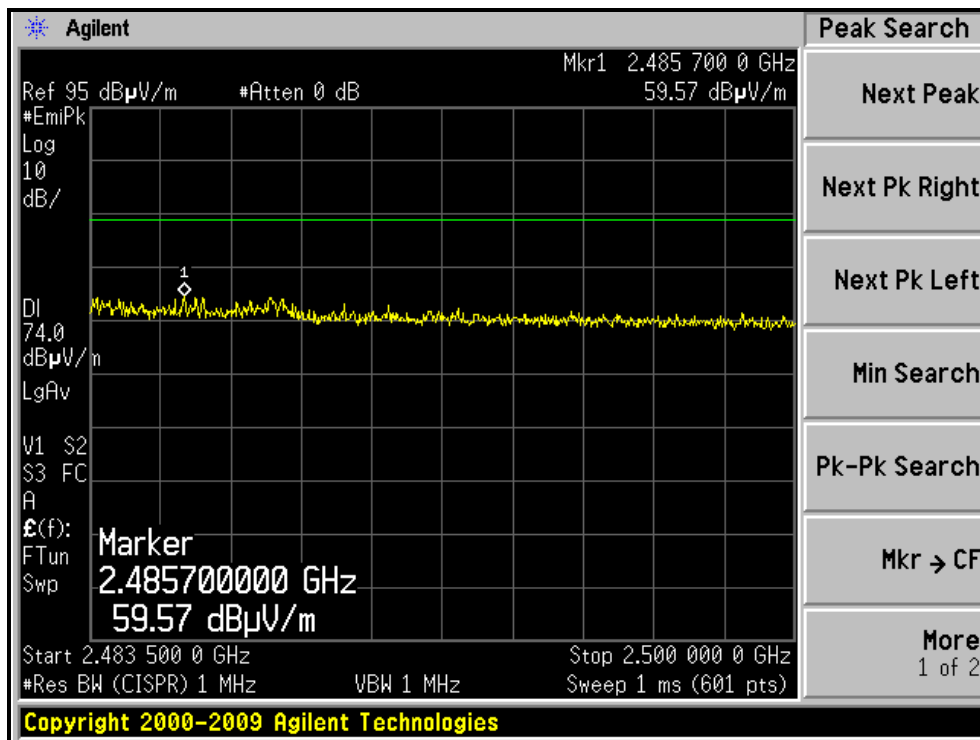

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Test date: Dec. 01, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSP 40	100060	May 11, 2011	May 10, 2012

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

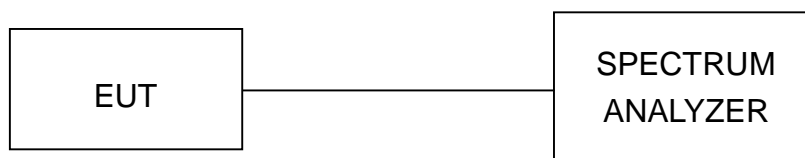

4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	11.23	0.5	PASS
6	2437	11.23	0.5	PASS
11	2462	11.25	0.5	PASS

CH11

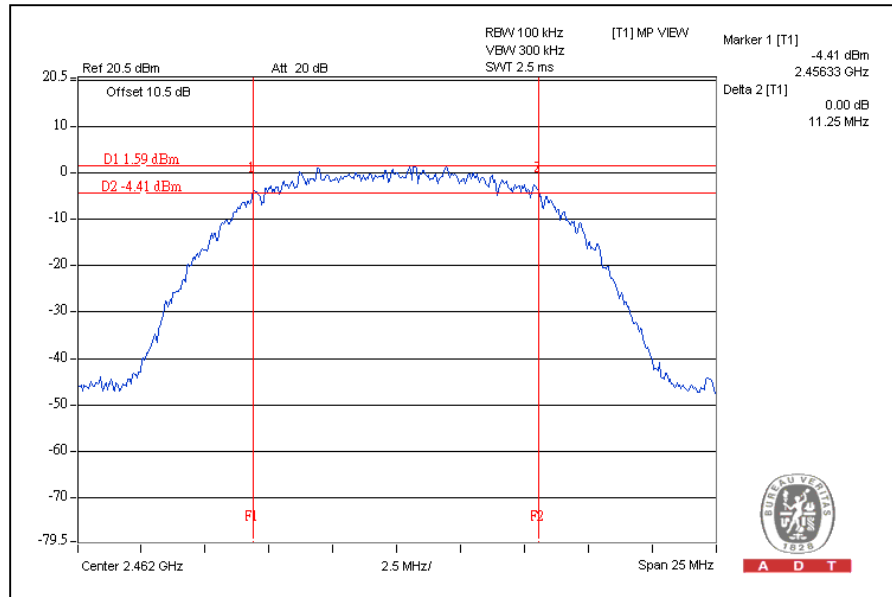




A D T

802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.55	0.5	PASS
6	2437	16.56	0.5	PASS
11	2462	16.55	0.5	PASS

CH6

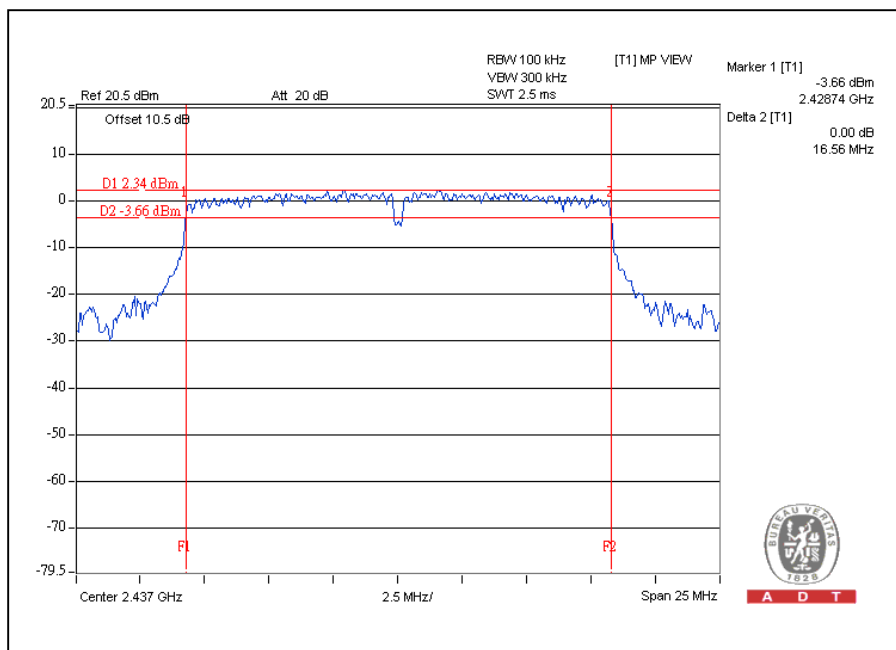




A D T

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.70	0.5	PASS
6	2437	17.71	0.5	PASS
11	2462	17.71	0.5	PASS


CH6

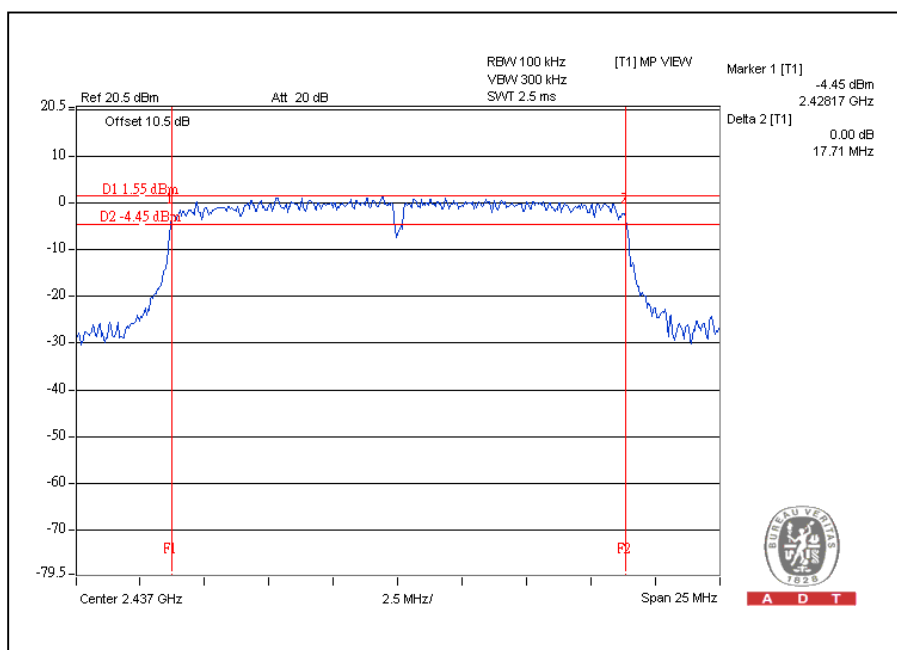

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	36.50	0.5	PASS
6	2437	36.49	0.5	PASS
9	2452	36.47	0.5	PASS

CH3

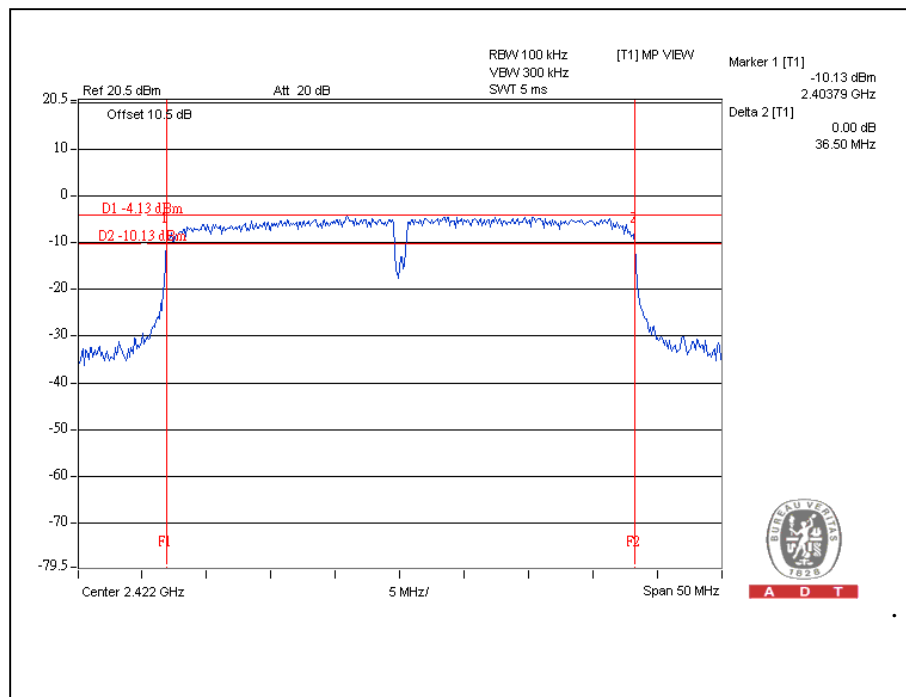

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Test date: Dec. 15, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Anritsu Power Meter	ML2495A	0824006	May 04, 2011	May 03, 2012
Pulse Power Sensor	MA2411B	0738172	May 03, 2011	May 02, 2012

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator; the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

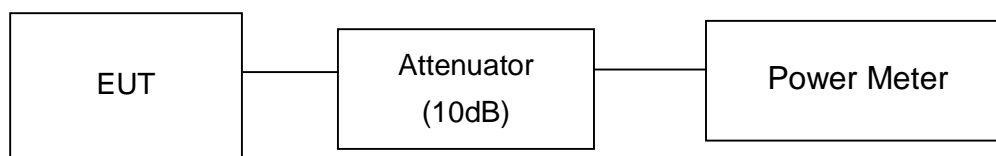

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



A D T

4.4.7 TEST RESULTS

802.11b DSSS MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	32.4	15.1	30	PASS
6	2437	35.5	15.5	30	PASS
11	2462	37.2	15.7	30	PASS

802.11g OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	223.9	23.5	30	PASS
6	2437	239.9	23.8	30	PASS
11	2462	229.1	23.6	30	PASS

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	223.9	23.5	30	PASS
6	2437	245.5	23.9	30	PASS
11	2462	213.8	23.3	30	PASS

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
3	2422	182.0	22.6	30	PASS
6	2437	208.9	23.2	30	PASS
9	2452	151.4	21.8	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Test date: Dec. 15, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSP 40	100060	May 11, 2011	May 10, 2012

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6




A D T

4.5.7 TEST RESULTS

802.11b DSSS MODULATION:

CHANNEL	FREQUENCY (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS / FAIL
1	2412	-12.1	8.00	PASS
6	2437	-11.7	8.00	PASS
11	2462	-11.5	8.00	PASS

CH11

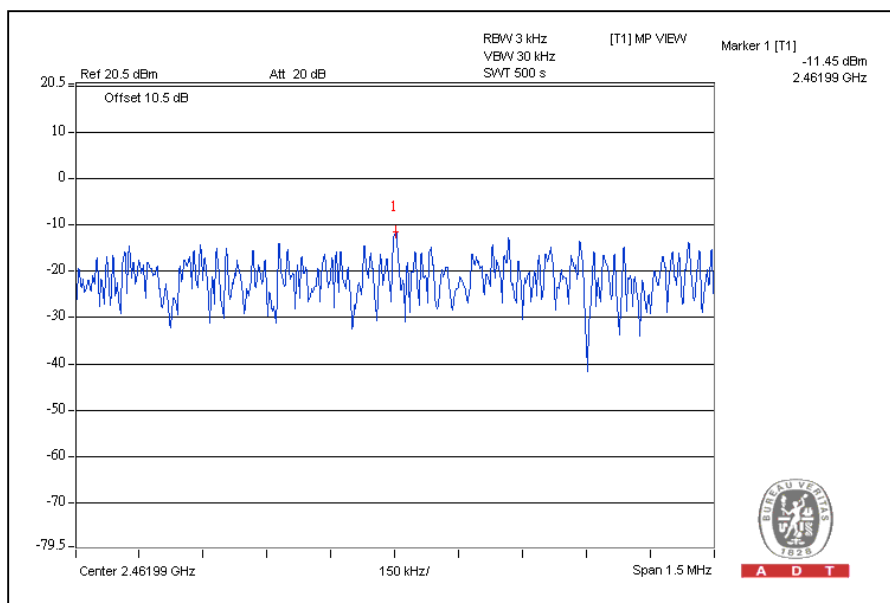




A D T

802.11g OFDM MODULATION:

CHANNEL	FREQUENCY (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS / FAIL
1	2412	-12.2	8.00	PASS
6	2437	-11.8	8.00	PASS
11	2462	-13.0	8.00	PASS

CH6

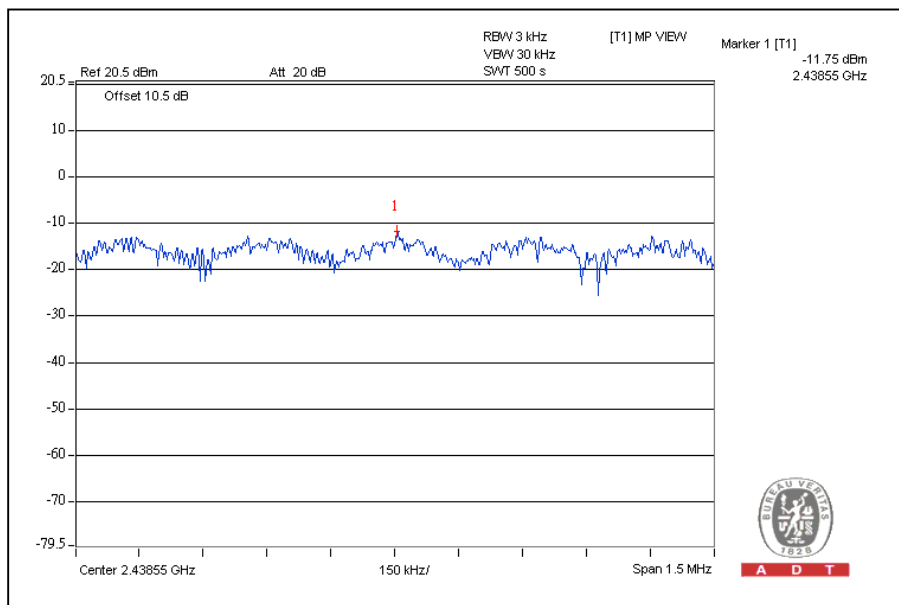




A D T

802.11n (20MHz) OFDM MODULATION:

CHANNEL	FREQUENCY (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS / FAIL
1	2412	-11.8	8.00	PASS
6	2437	-11.8	8.00	PASS
11	2462	-13.6	8.00	PASS


CH6

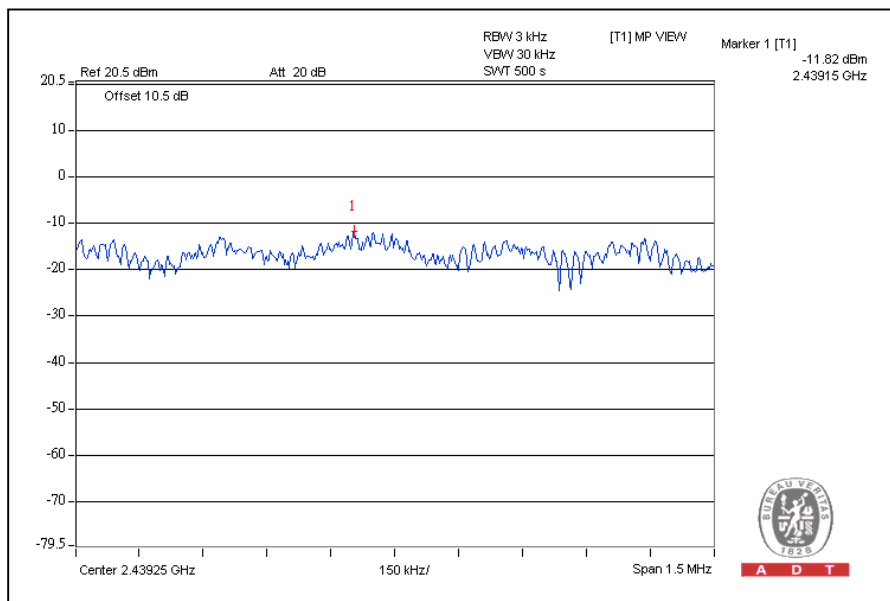

802.11n (40MHz) OFDM MODULATION:

CHANNEL	FREQUENCY (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS / FAIL
3	2422	-16.7	8.00	PASS
6	2437	-15.0	8.00	PASS
9	2452	-17.0	8.00	PASS

CH6

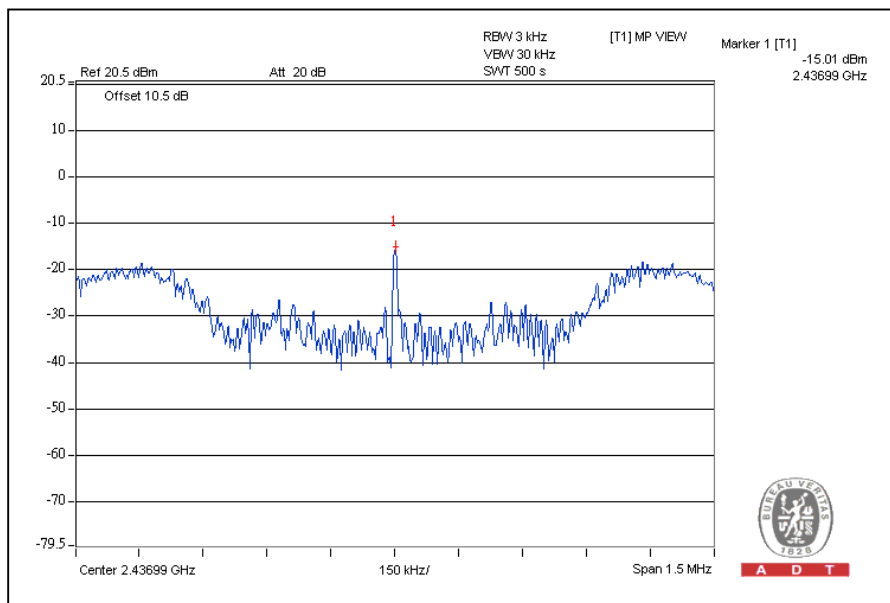

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Test date: Dec. 15, 2011

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSP 40	100060	May 11, 2011	May 10, 2012

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 100kHz and VBW of spectrum analyzer to 300kHz with suitable frequency span including 100 MHz or 200 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (RBW = 100kHz, VBW = 300kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6





A D T

4.6.6 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION:



CH1

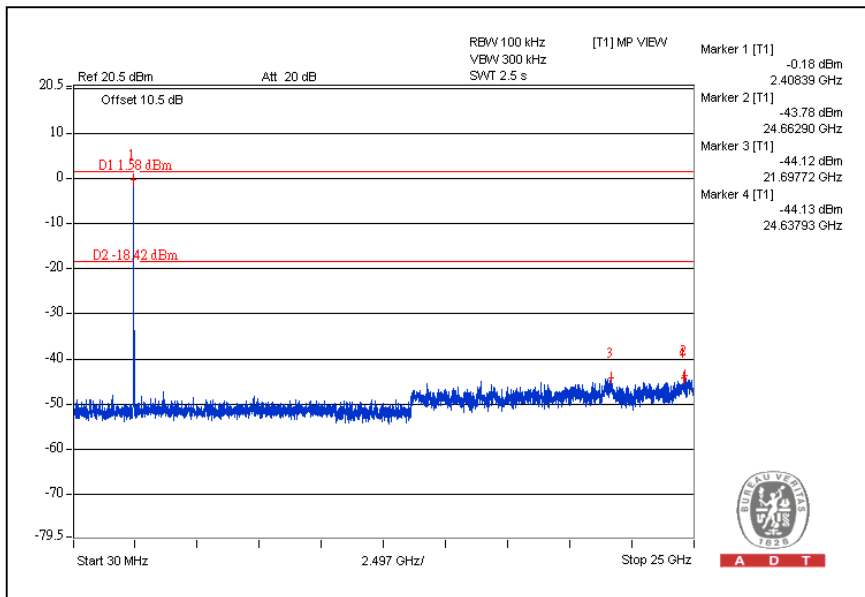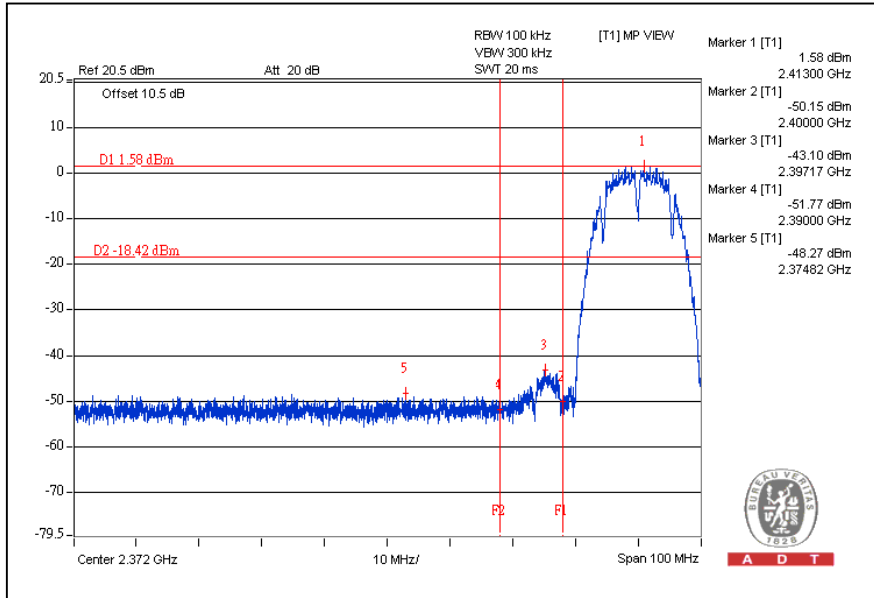





A D T

CH11

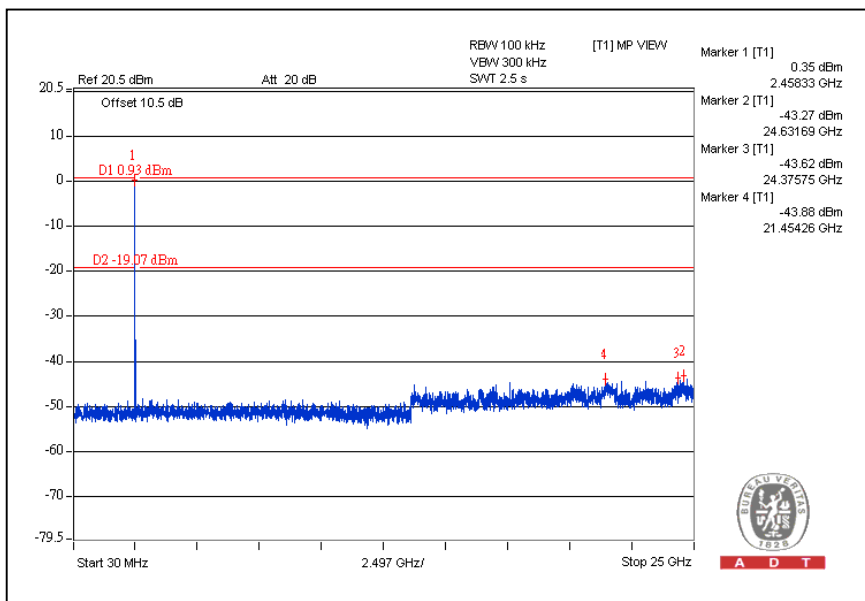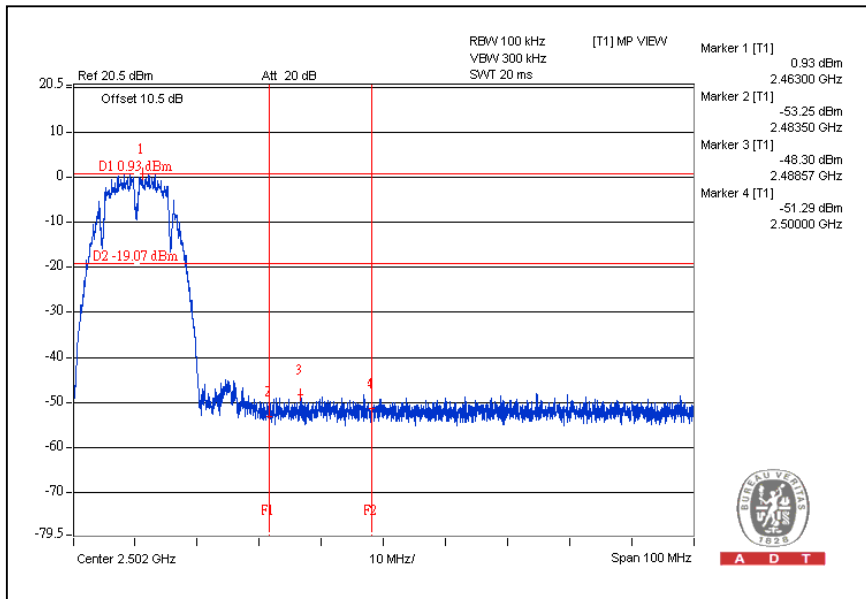

802.11g OFDM MODULATION:


CH1

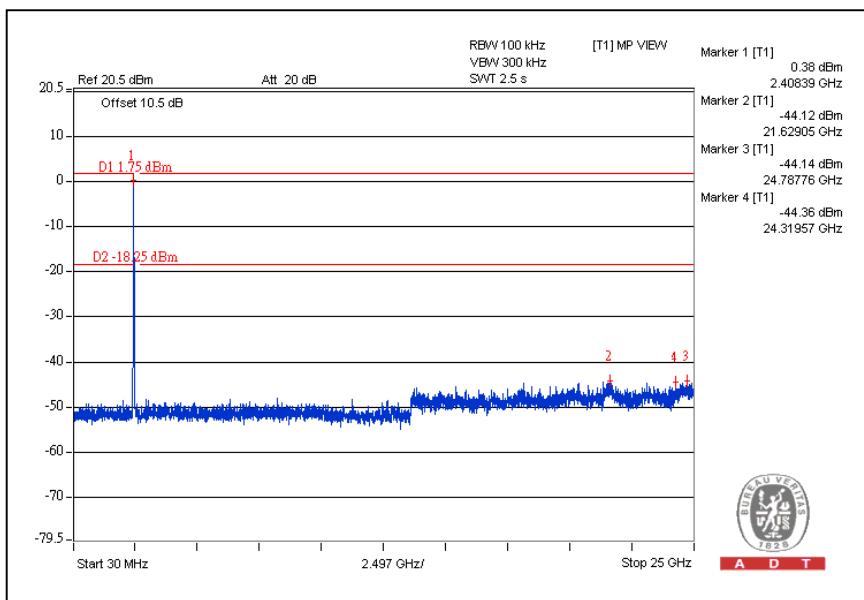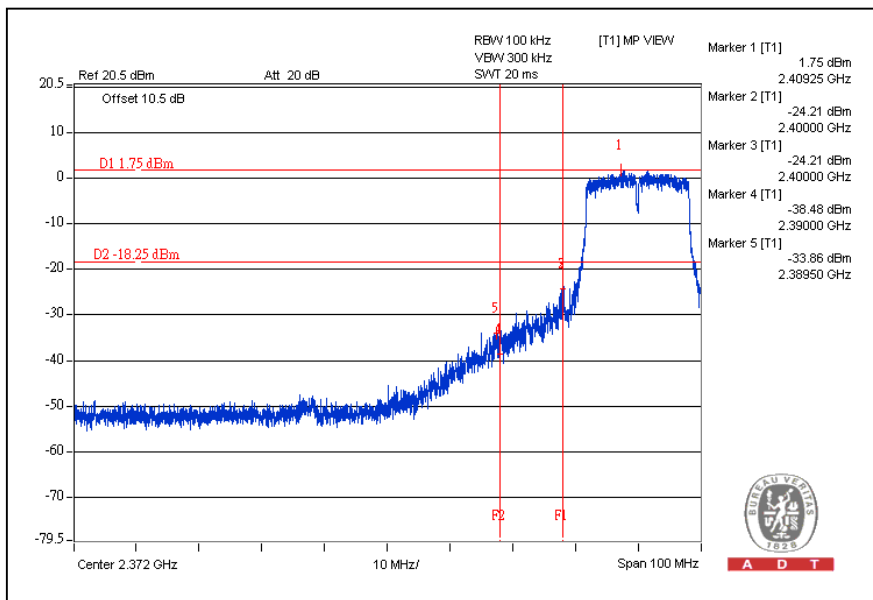




A D T

CH11

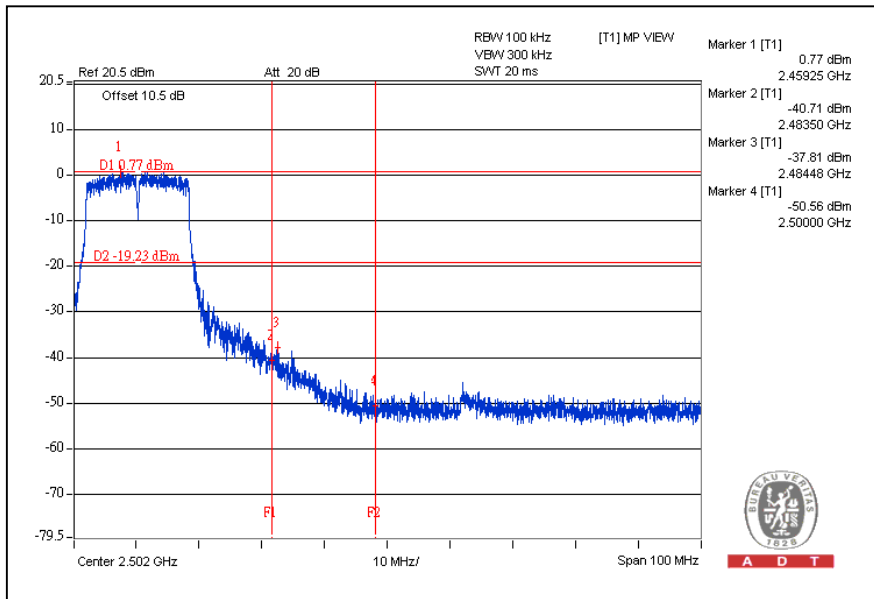



A D T

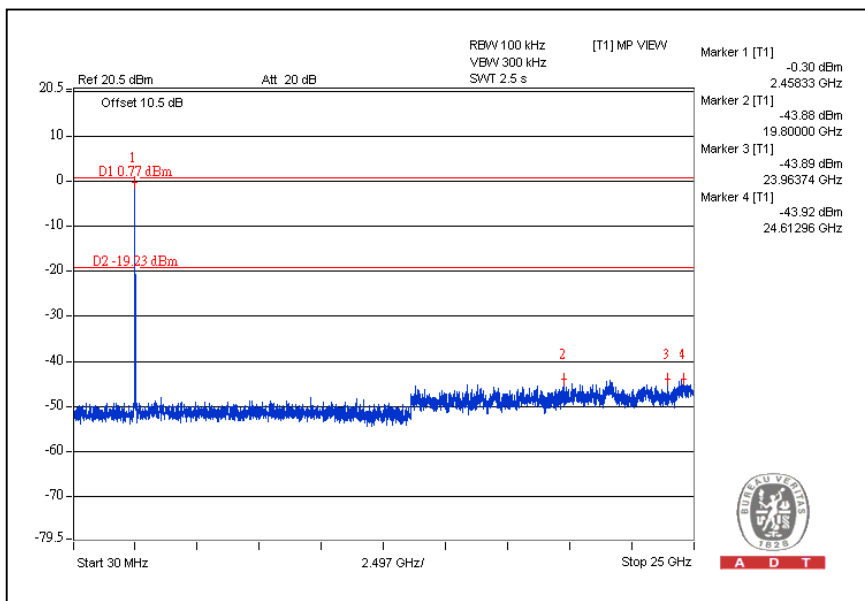

A D T

802.11n (20MHz) OFDM MODULATION:


CH1

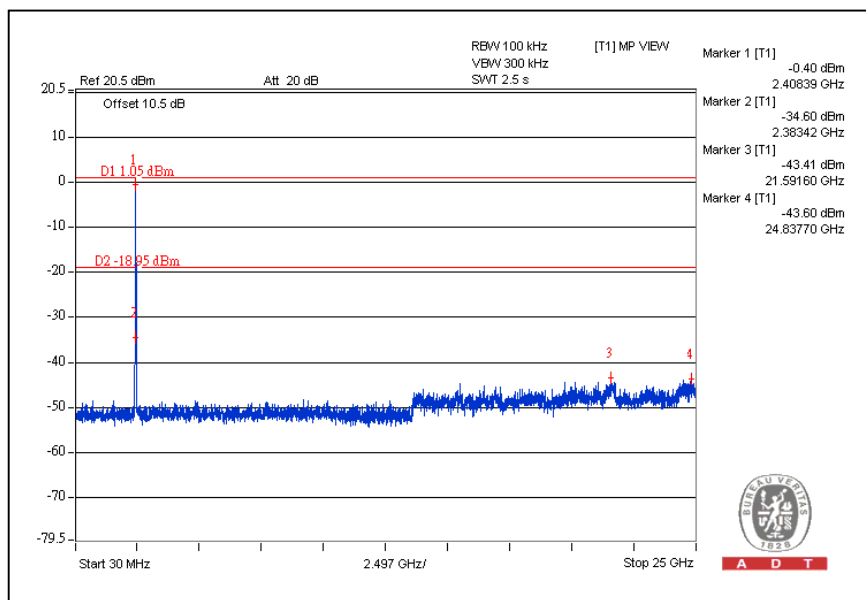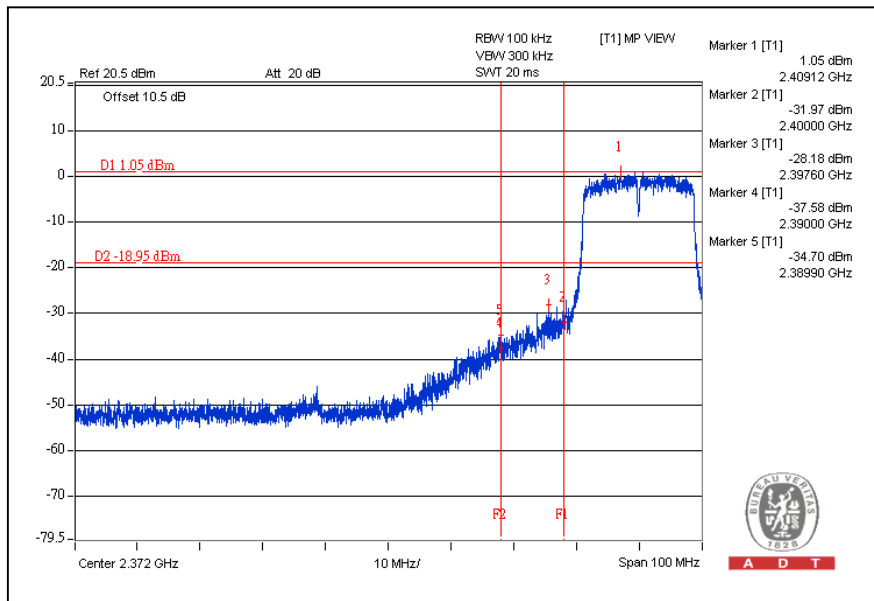




A D T

CH11

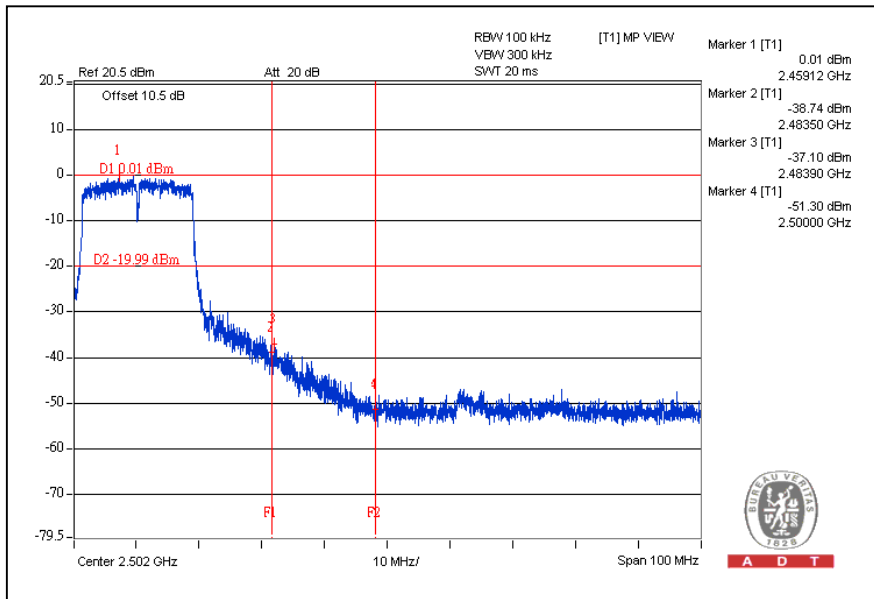



A D T

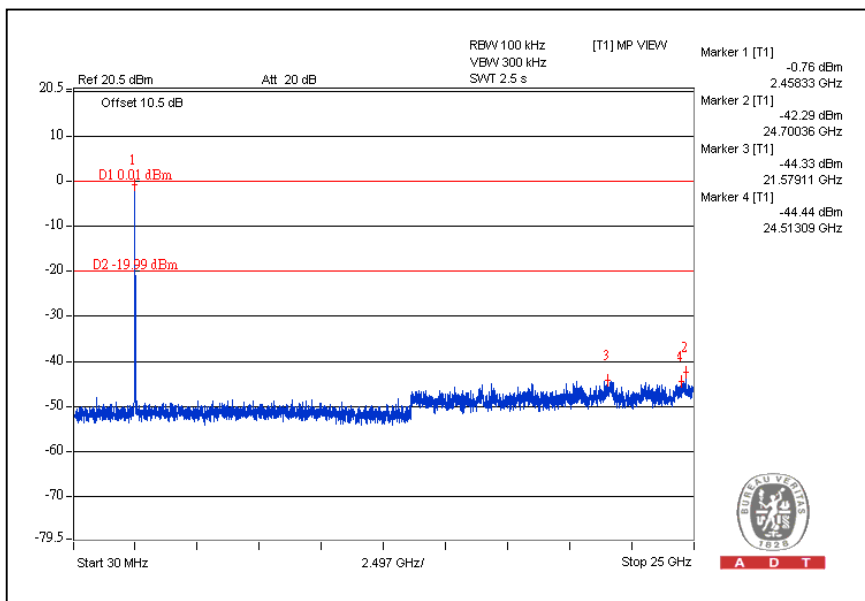

A D T

802.11n (40MHz) OFDM MODULATION:



CH3

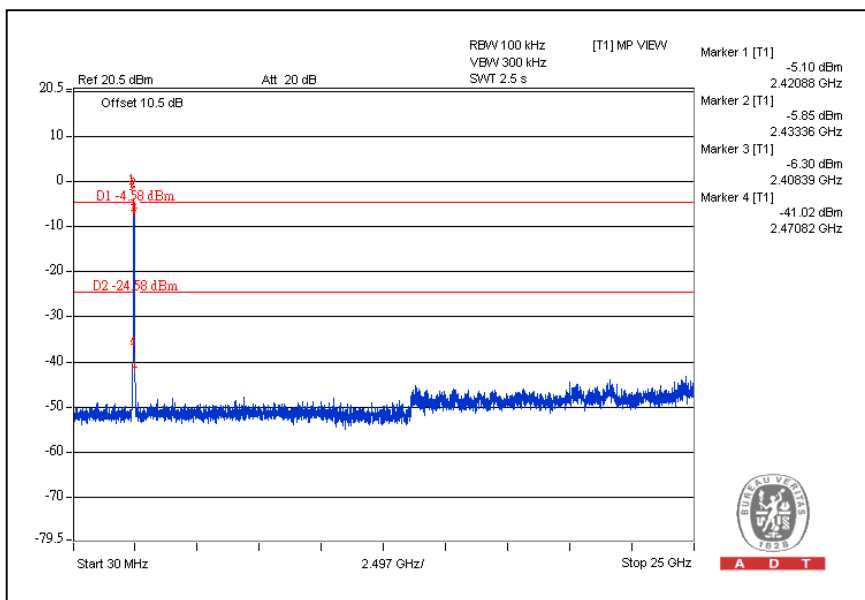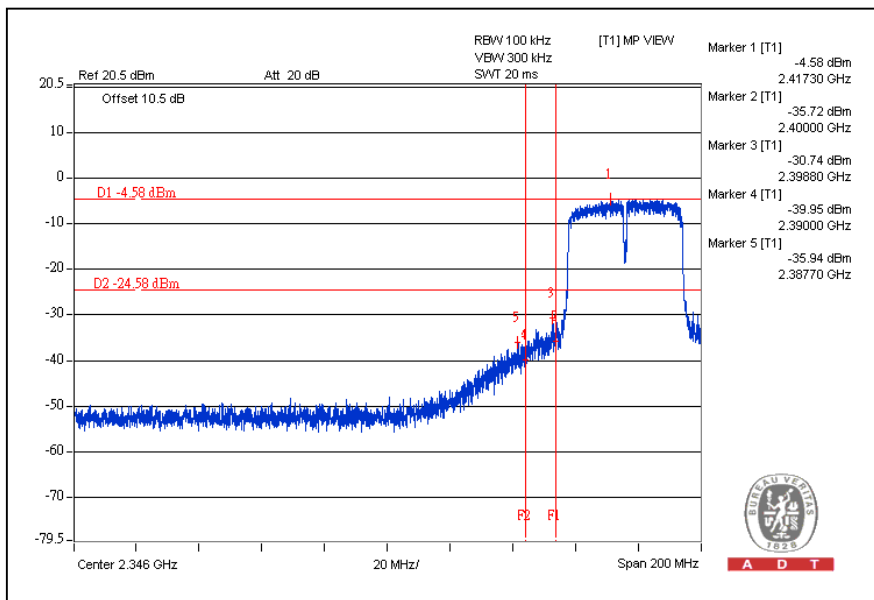



A D T

CH9

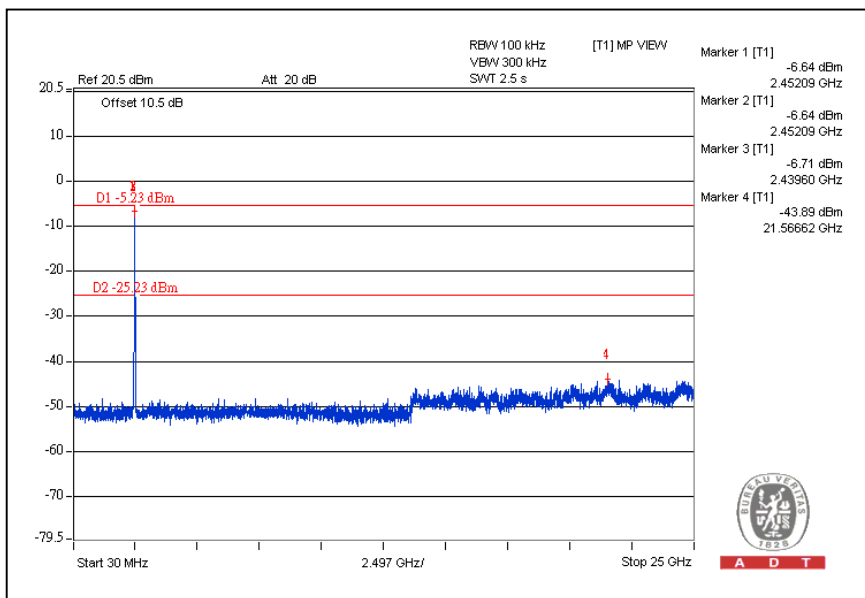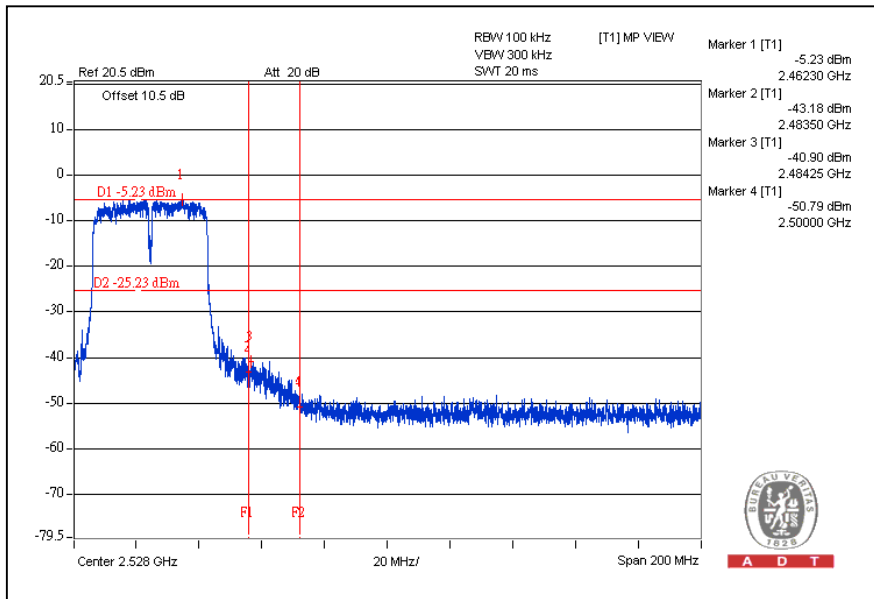



5. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025:

Copies of accreditation and authorization certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5.phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

6.APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---