

## RF Exposure Report

**Report No.:** SA130902E05F

**FCC ID:** MQT-XAPT103PUWT

**Test Model:** xAPT-103PUW

**Series Model:** FD410, xCE\_T103PUW

**Received Date:** Sep. 02, 2013

**Test Date:** Sep. 24 to Oct. 10, 2013 ; Aug. 25, 2016

**Issued Date:** Sep. 09, 2016

**Applicant:** XAC AUTOMATION CORP.

**Address:** 4F, No. 30, INDUSTRY E. RD. IX, SCIENCE-BASED INDUSTRIAL  
PARK,HSINCHU,TAIWAN

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan R.O.C.

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Evaluation Result</b> .....	<b>5</b>
<b>3 Antenna Gain</b> .....	<b>6</b>
<b>4 SAR Test Exclusion Thresholds</b> .....	<b>7</b>
<b>5 Conclusion</b> .....	<b>10</b>

### Release Control Record

Issue No.	Description	Date Issued
SA130902E05F	Original release	Sep. 09, 2016

## 1 Certificate of Conformity

**Product:** Terminal

**Brand:** XAC, First Data

**Test Model:** xAPT-103PUW

**Series Model:** FD410, xCE\_T103PUW

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** XAC AUTOMATION CORP.

**Test Date:** Sep. 24 to Oct. 10, 2013 ; Aug. 25, 2016


**Standards:** FCC Part 2 (Section 2.1093)

KDB 447498 D01 General RF Exposure Guidance v06

IEEE C95.1-1992


The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**

  
Midoli Peng / Specialist

**Date:** Sep. 09, 2016

**Approved by :**

  
May Chen / Manager

**Date:** Sep. 09, 2016

## 2 Evaluation Result

Following FCC KDB 447498 D01 “General SAR test exclusion guidance”

The corresponding SAR Exclusion Threshold condition, listed below:

- 1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:  
$$\frac{[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}]}{\leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}}$$
  - $f(\text{GHz})$  is the RF channel transmit frequency in GHz.
  - Power and distance are rounded to the nearest mW and mm before calculation.
  - The result is rounded to one decimal place for comparison. The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.
- 2) At 100 MHz to 6 GHz and for test separation distances  $> 50$  mm, the SAR test exclusion threshold is determined according to the following:
  - a) [Threshold at 50 mm in step 1) + (test separation distance - 50mm) · ( f(MHz)/150)] mW, at 100MHz to 1500 MHz
  - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at  $> 1500$  MHz and  $\leq 6$  GHz
- 3) At frequencies below 100 MHz, the following may be considered for SAR test exclusion.
  - a) The threshold at the corresponding test separation distance at 100 MHz in step 2) is multiplied by  $[1 + \log(100/f(\text{MHz}))]$  for test separation distances  $> 50$  mm and  $< 200$  mm.
  - b) The threshold determined by the equation in a) for 50 mm and 100 MHz is multiplied by  $\frac{1}{2}$  for test separation distances  $\leq 50$  mm.
  - c) SAR measurement procedures are not established below 100 MHz. When SAR test exclusion cannot be applied, a KDB inquiry is required to determine SAR evaluation requirements for any test results to be acceptable.

### 3 Antenna Gain

#### GPRS, EDGE, WCDMA, HSDPA and HSUPA Antenna Spec.

Brand	Model No.	Antenna Type	Antenna Connector	Gain(dBi)	Frequency range (MHz)
Ethertronics Inc.	T-000084-01	FPCB	IPEX	0.14	850
				2.57	1900

#### WLAN Antenna Spec.

Brand	Model No.	Antenna Type	Antenna Connector	Gain(dBi)	Frequency range (MHz)
ACX	AT3216-T2R4PAA	Chip	NA	1.5	2400-2500


#### RFID Antenna Spec.

Brand	Model No.	Antenna Type	Antenna Connector	Gain(dBi)	Frequency range (MHz)
XAC	PCB ENIG ANT BOARD (W/KEY) 8006(ROHS)	Loop	NA	13	13.56

#### 4 SAR Test Exclusion Thresholds

##### Smallest distance from the antenna and radiating structures or outer surface of the device

The minimum test separation distance is determined by the smallest distance from the antenna and radiating structures or outer surface of the device, according to the host form factor, exposure conditions and platform requirements, to any part of the body or extremity of a user or bystander. (See below figure)

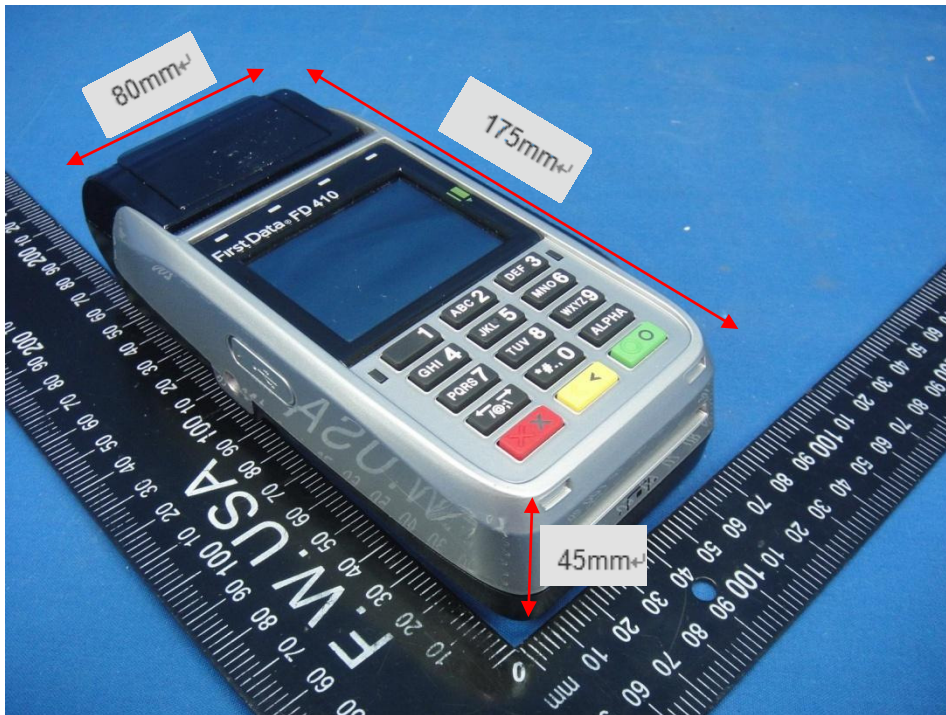

### GSM and WCDMA Source-base Time Average Power Table (Cellular mode)

GPRS Mode:

Frequency (MHz)	Conducted power (dBm)	Conducted power (mW)	Source-based time-averaged conducted output power (mW)
848.8	32.6	1819.7	455
1850.2	29	794.3	198.6

Note: Calculations for RF Exposure compliance in the cellular and PCS bands are base on the maximum source based time-average power obtained from 2-Slot GPRS operation. The resulting duty cycle factor is 2/8, or 6.02dB.

### SAR Test Exclusion Thresholds (Cellular mode)

Frequency	Max. Power (mW) <sup>*1</sup>	Min. test separation distance (mm)	SAR test exclusion power thresholds <sup>*2</sup> (mW)	Result
848.8	455	90	633.3786	Pass
1850.2	198.6	90	675.6905	Pass

<sup>\*1</sup> Max. power obtained from maximum source based time average power.

<sup>\*2</sup> Calculate SAR test exclusion thresholds from " 1) & 2) " formulas. (base on 10-g extremity SAR exclusion thresholds)



### WiFi Power Table

Mode	Frequency (MHz)	Peak Conducted power (dBm)	Average Conducted power (dBm)
11b	2412	19.41	17.53
	2437	19.53	17.64
	2462	19.49	17.56
11g	2412	21.80	16.56
	2437	21.81	16.57
	2462	21.72	16.43
11n-HT20	2412	21.02	15.30
	2437	21.10	15.42
	2462	21.07	15.40
11n-HT40	2412	21.15	15.36
	2437	21.17	15.40
	2462	21.10	15.33

Maximum Average power for WiFi Mode:

Mode	Frequency (MHz)	Average Conducted power (dBm)	Average Conducted power (mW)
11b	2437	17.64	58.076

Mode	Frequency(MHz)	Time Average Power(mW)
11b	2437	0.00194

Note: The device utilizes IEEE 802.11bgn (WiFi) for complete the payment authentication with the credit card center office. The typical processing time for each transaction is 30 seconds from the user touches or holds the device to the approval of transaction from the credit card company. The product transmits only shortly (maximum 0.001 sec during 30 seconds of authentication period with credit card companies) per transaction. Note: the Transmitter turn-on time 0.001 sec is based on the fact that the slowest air-interface speed for 11bgn is 1Mbps (802.11b) for WiFi technology and the EUT send only 1k bytes per transaction. Accordingly, the EUT uses  $1k/1Mbps=0.001$  sec to complete 1k data upload.

Time average power:

Average power experienced by the user = max power x radio-on duty cycle during the operation (30 sec typically, from user touch or hold the device to credit card companies approve or disapprove the transaction) equal to below:

$$58.076 \text{ mW} \times (0.001/30 \text{ sec}) = 0.00194 \text{ mW}$$

### SAR Test Exclusion Thresholds (WiFi Mode)

Frequency (GHz)	Time Average Power (mW)	Min. test separation distance (mm)	SAR test exclusion calculation value <sup>(NOTE 2)</sup>	10-g extremity SAR test exclusion thresholds	Result
2.412 ~ 2.462	0.00194	5	0.0006057	7.5	Pass

**NOTE:** 1. The antenna type is Chip antenna with 1.5dBi gain.  
 2. Calculate SAR test exclusion thresholds from condition "1" formulas.

### RFID Power Table

Mode	Frequency (MHz)	Electric field (dBuV/m) @10m	EIRP (dBm)
RFID	13.56	69.9	-25.33

Field strength is then converted to EIRP as follows:

(i)  $EIRP = (E \cdot d)^2 / 30$

where:

E is the field strength in V/m;

d is the measurement distance in meters;

EIRP is the equivalent isotropically radiated power in watts.

(ii) Working in dB units, the above equation is equivalent to:  $EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$

(iii) Or, if d is 3 meters:  $EIRP[dBm] = E[dB\mu V/m] - 95.23$

### SAR Test Exclusion Thresholds (RFID Mode)

Frequency (MHz)	Max. Power (mW) <sup>*1</sup>	Min. test separation distance (mm)	SAR test exclusion power thresholds <sup>*2</sup> (mW)	Result
13.56	0.002931	≤ 50 mm	592.927	Pass

<sup>\*1</sup> Max. power obtained from maximum EIRP.

<sup>\*2</sup> Calculate SAR test exclusion thresholds from “3)” formulas. (base on 10-g extremity SAR exclusion thresholds)

## 5 Conclusion

Since Source-base time average power is below SAR test exclusion power thresholds, the SAR evaluation is not required.

--- END ---