

FCC Test Report (WLAN)

Report No.: RF140522E04B

FCC ID: MQT-XCE200T3G

Test Model: xCE-200T.3G

Series Model: xCE_E200T.3G

Received Date: July 06, 2016

Test Date: July 26 to Aug. 15, 2016

Issued Date: Aug. 31, 2016

Applicant: XAC AUTOMATION CORP.

Address: 4F, No. 30, INDUSTRY E. RD. IX, SCIENCE-BASED INDUSTRIAL
PARK,HSINCHU,TAIWAN

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (1): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT (WLAN)	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	14
3.5 General Description of Applied Standards	15
4 Test Types and Results	16
4.1 Radiated Emission and Bandedge Measurement	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement	16
4.1.2 Test Instruments	17
4.1.3 Test Procedures	19
4.1.4 Deviation from Test Standard	19
4.1.5 Test Set Up	20
4.1.6 EUT Operating Conditions	20
4.1.7 Test Results	21
4.2 Conducted Emission Measurement	31
4.2.1 Limits of Conducted Emission Measurement	31
4.2.2 Test Instruments	31
4.2.3 Test Procedures	32
4.2.4 Deviation from Test Standard	32
4.2.5 Test Setup	32
4.2.6 EUT Operating Conditions	32
4.2.7 Test Results	33
4.3 6dB Bandwidth Measurement	35
4.3.1 Limits of 6dB Bandwidth Measurement	35
4.3.2 Test Setup	35
4.3.3 Test Instruments	35
4.3.4 Test Procedure	35
4.3.5 Deviation from Test Standard	35
4.3.6 EUT Operating Conditions	35
4.3.7 Test Result	36
4.4 Conducted Output Power Measurement	38
4.4.1 Limits of Conducted Output Power Measurement	38
4.4.2 Test Setup	38
4.4.3 Test Instruments	38
4.4.4 Test Procedures	38
4.4.5 Deviation from Test Standard	38
4.4.6 EUT Operating Conditions	38
4.4.7 Test Results	39
4.5 Power Spectral Density Measurement	41
4.5.1 Limits of Power Spectral Density Measurement	41
4.5.2 Test Setup	41
4.5.3 Test Instruments	41
4.5.4 Test Procedure	41
4.5.5 Deviation from Test Standard	41
4.5.6 EUT Operating Condition	41

4.5.7 Test Results	42
4.6 Conducted Out of Band Emission Measurement	44
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	44
4.6.2 Test Setup.....	44
4.6.3 Test Instruments	44
4.6.4 Test Procedure	44
4.6.5 Deviation from Test Standard	44
4.6.6 EUT Operating Condition	44
4.6.7 Test Results	44
5 Pictures of Test Arrangements.....	48
Appendix – Information on the Testing Laboratories	49

Release Control Record

Issue No.	Description	Date Issued
RF140522E04B	Original release.	Aug. 31, 2016

1 Certificate of Conformity

Product: Terminal

Brand: XAC

Test Model: xCE-200T.3G

Series Model: xCE_E200T.3G

Sample Status: ENGINEERING SAMPLE


Applicant: XAC AUTOMATION CORP.

Test Date: July 26 to Aug. 15, 2016

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :



Date:

Aug. 31, 2016

Midoli Peng / Specialist

Approved by :



Date:

Aug. 31, 2016

May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -18.75dB at 0.15000MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -4.4dB at 300.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.37 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.65 dB
	6GHz ~ 18GHz	3.88 dB
	18GHz ~ 40GHz	4.11 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (WLAN)

Product	Terminal
Brand	XAC
Test Model	xCE-200T.3G
Series Model	xCE_E200T.3G
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 12V from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n: up to 72.2Mbps
Operating Frequency	2.412 ~ 2.462GHz
Number of Channel	11 for 802.11b, 802.11g, 802.11n (HT20)
Output Power	178.649mW
Antenna Type	Please see Note
Antenna Connector	Please see Note
Accessory Device	Adapter (Optional) x 1
Data Cable Supplied	NA

Note:

1. All models are listed as below.

Brand Name	Model No.	Description
XAC	xCE-200T.3G	For marketing requirement
XAC	xCE_E200T.3G	

From the above models, model: **xCE-200T.3G** was selected as representative model for the test and its data was recorded in this report.

2. The EUT could be supplied with power adapter as the following table:

Brand	Model No.	Spec.
FSP GROUP INC	FSP040-RHAN2	AC I/P: 100-240V, 50-60Hz, 1.5A AC input cable (Unshielded, 1.8m) DC O/P: 12V, 3.33A DC output cable (Unshielded, 1.5m with 1 core)

3. There are WLAN, Bluetooth and WWAN technology used for the EUT.

4. Simultaneously transmission condition.

Condition	Technology		
1	WLAN	Bluetooth	WWAN

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

5. The antenna provided to the EUT, please refer to the following table:

WLAN, Bluetooth					
Brand	Model	Antenna Gain (dBi)	Frequency range (GHz to GHz)	Antenna Type	Connector Type
ACX	AT3216-T2R4PAA	1.5	2.4~2.4835	Chip	NA
WWAN					
Brand	Model	Antenna Gain (dBi)	Frequency range	Antenna Type	Connector Type
INPAQ	WA-F-P5-02-011	FDD I :4.2 FDD II: 3.9 FDD V: 0.82 FDD VIII: 0.23 GSM1800: 3.68	GSM850 / FDD V (824-849 MHz) FDD I (1920-1980 MHz) GSM1800 (1710~1785 MHz) GSM1900 / FDD II (1850-1910 MHz) GSM900 / FDD VIII (880-915 MHz)	PCB	RFI-PEX MHF

6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE \geq 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	25deg. C, 69%RH	120Vac, 60Hz	Weiwei Lo
RE $<$ 1G	24deg. C, 67%RH	120Vac, 60Hz	Weiwei Lo
PLC	25deg. C, 68%RH	120Vac, 60Hz	Andy Ho
APCM	26deg. C, 66%RH	120Vac, 60Hz	Anderson Chen


3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.
 If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $8.413/8.443 = 0.996$

802.11g: Duty cycle = $1.393/1.428 = 0.975$, Duty factor = $10 * \log(1/0.975) = 0.1$

802.11n (HT20): Duty cycle = $1.307/1.339 = 0.976$, Duty factor = $10 * \log(1/0.976) = 0.1$

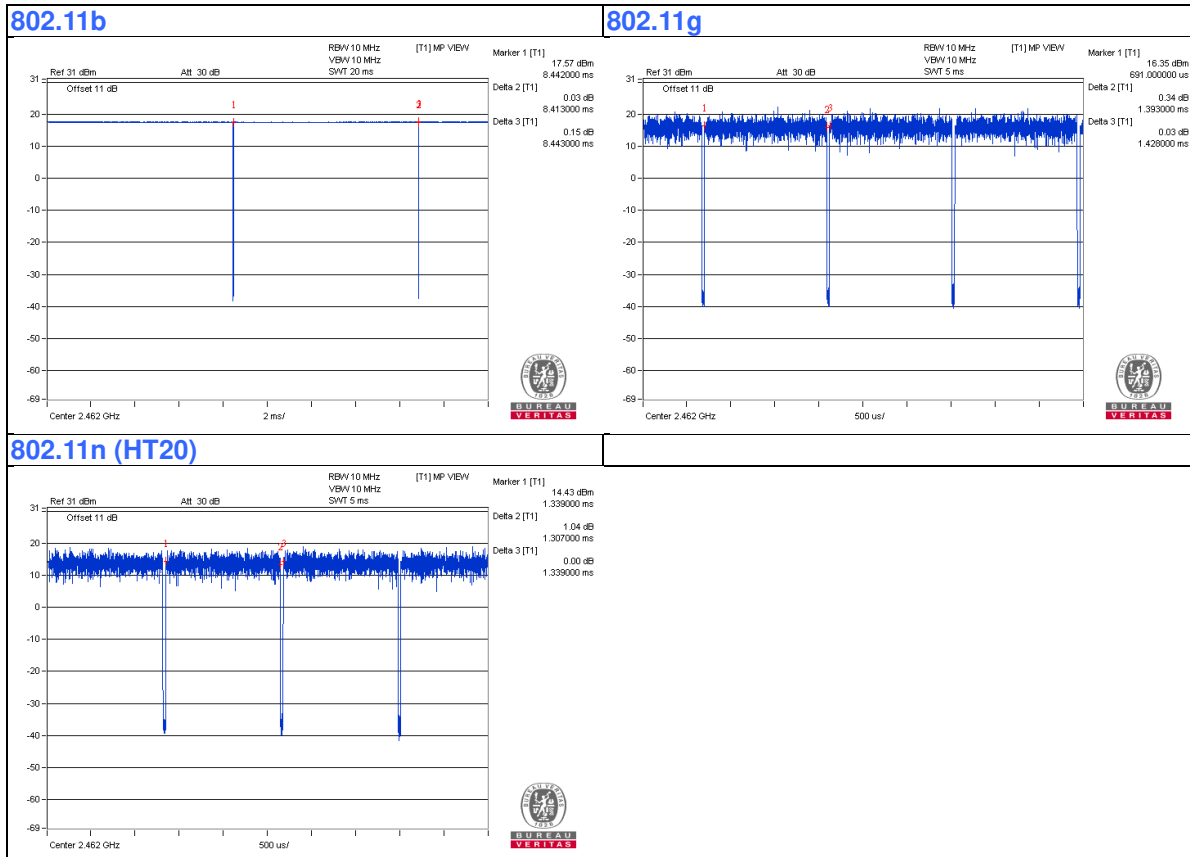

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID	Remark
A	iPod	Apple	MC749TA/A	CC4DMFJUDFDM	NA	Provided by Lab
B	iPod	Apple	MC749TA/A	CC4DN25WDFDM	NA	Provided by Lab
C	iPod	Apple	MC749TA/A	CC4DN29UDFDM	NA	Provided by Lab
D	iPod	Apple	MD778TA/A	CC4JMFL0F4T1	NA	Provided by Lab
E	Notebook Computer	DELL	PP32LA	GSLB32S	FCC DoC	Provided by Lab
F	Adapter	FSP GROUP INC.	FSP040-RHAN2	NA	NA	Supplied by client
G	Sim Card	R&S	CRT-Z3	NA	NA	Provided by Lab


NOTE:

1. All power cords of the above support units are non-shielded (1.8 m).

No.	Cable	Qty.	Length (m)	Shielded (Yes/ No)	Cores (Number)	Remark
1	DC Cable	1	1.5	No	1	Supplied by client
2	AC Cable	1	1.8	No	0	Supplied by client
3	USB Cable	4	0.1	Yes	0	Provided by Lab
4	RJ45 Cable	1	10	No	0	Provided by Lab
5	RS-232 to RJ11	1	1.3	No	0	Supplied by client

NOTE: 1. The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

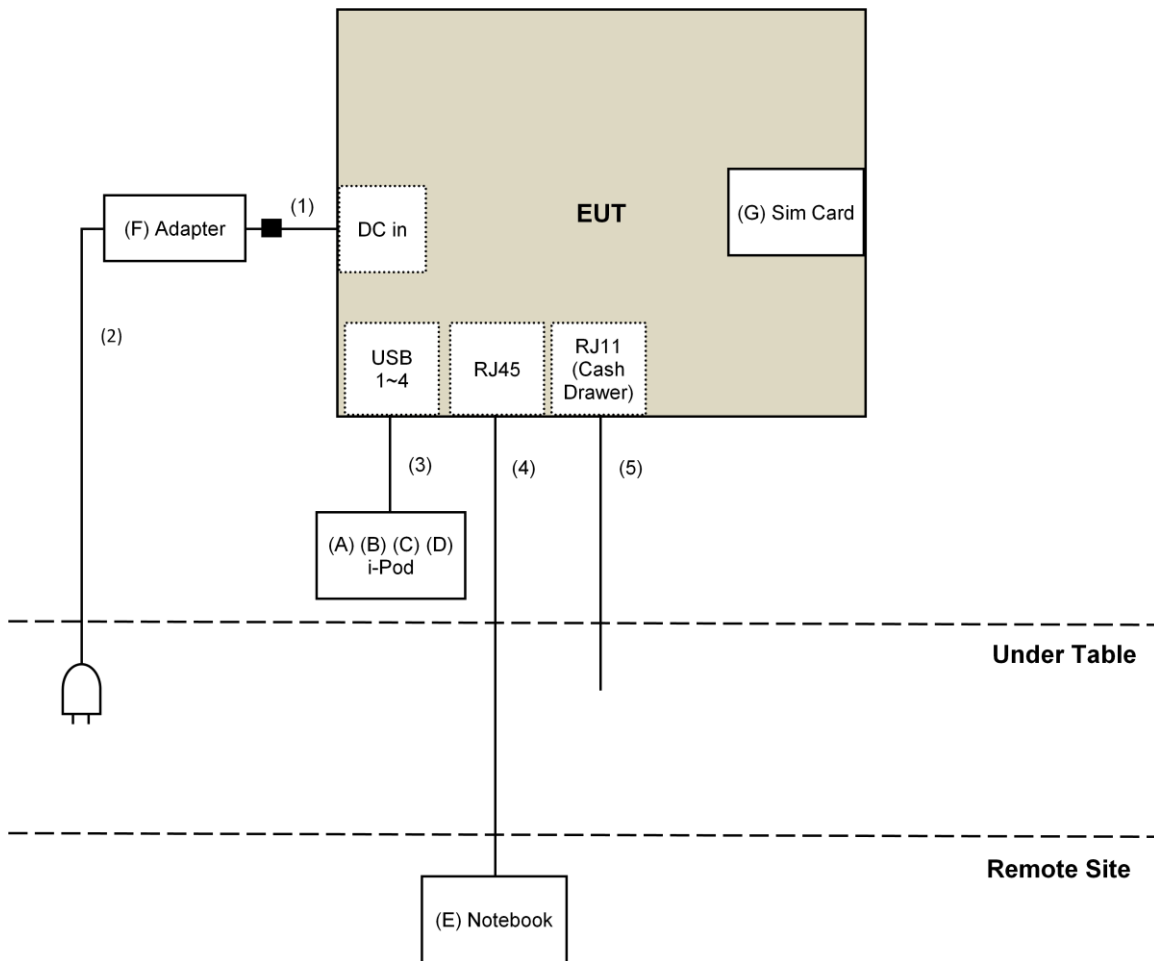

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 DTS Meas Guidance v03r05
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210105	July 06, 2016	July 05, 2017
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2014	Dec. 15, 2016
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 18, 2016	Jan. 17, 2017
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 11, 2015	Nov. 10, 2016
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Jan. 04, 2016	Jan. 03, 2017
RF Cable	8D-FB	CHGCAB-001 -1 CHGCAB-001 -2	Oct. 03, 2015	Oct. 02, 2016
	RF-141	CHGCAB-004	Oct. 03, 2015	Oct. 02, 2016
Horn_Antenna FT-RF	HA-07M18G-N F	000032009111 0	Jan. 19, 2016	Jan. 18, 2017
Pre-Amplifier Agilent	8449B	3008A02578	June 22, 2016	June 21, 2017
RF Cable	NA	131205 131216 131217 SNMY23684/ 4	Jan. 15, 2016	Jan. 14, 2017
Spectrum Analyzer Agilent	E4446A	MY48250254	Nov. 25, 2015	Nov. 24, 2016
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Dec. 11, 2015	Dec. 10, 2016
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Jan. 18, 2016	Jan. 17, 2017
RF Cable	SUCOFLEX 102	36442/2 36434/2	Dec. 10, 2015	Dec.09, 2016
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	CM100	NA	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-WD01	NA	NA
Spectrum Analyzer R&S	FSP40	100036	Jan. 27, 2016	Jan. 26, 2017
Power meter Anritsu	ML2495A	0824006	May 26, 2016	May 25, 2017
Power sensor Anritsu	MA2411B	0738172	May 26, 2016	May 25, 2017

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. Loop antenna was used for all emissions below 30 MHz.
4. The test was performed in 966 Chamber No. G.
- 5 The FCC Site Registration No. is 966073.
- 6 The VCCI Site Registration No. is G-137.
7. The CANADA Site Registration No. is IC 7450H-2.
8. Tested Date: July 26 to Aug. 15, 2016

4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

<Frequency Range below 1GHz>

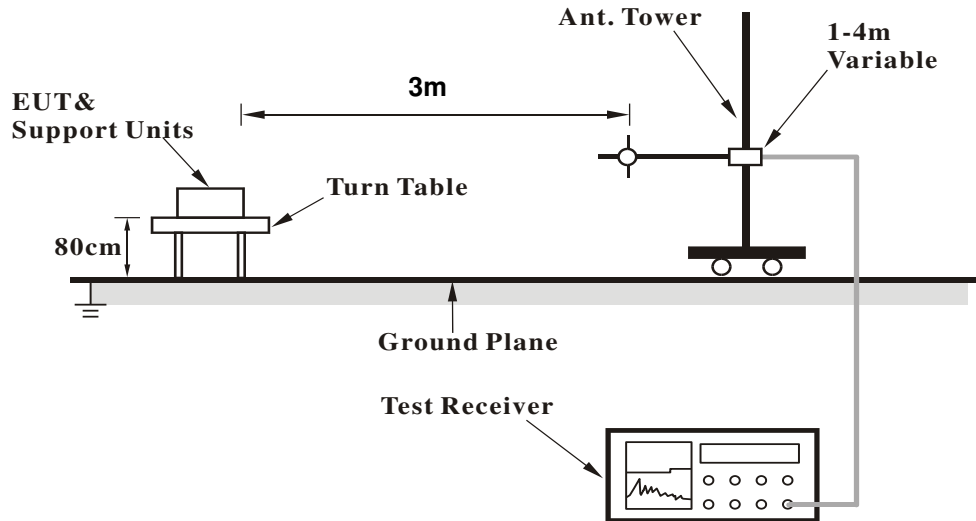

<Frequency Range above 1GHz>

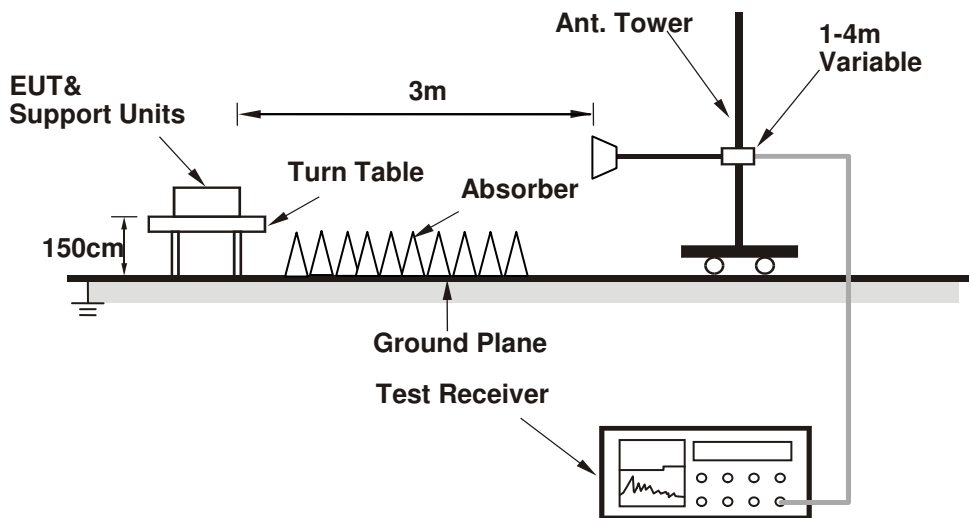

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connect the EUT with the support unit E (Notebook Computer) which is placed outside of testing area.
- The communication partner run test program “Hypter Terminal paste Command” to enable EUT under transmission/receiving condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data :

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.1 PK	74.0	-24.9	1.25 H	277	48.5	0.6
2	2390.00	39.7 AV	54.0	-14.3	1.25 H	277	39.1	0.6
3	*2412.00	101.2 PK			1.25 H	277	100.4	0.8
4	*2412.00	98.9 AV			1.25 H	277	98.1	0.8
5	4824.00	48.4 PK	74.0	-25.6	1.02 H	214	39.2	9.2
6	4824.00	36.0 AV	54.0	-18.0	1.02 H	214	26.8	9.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.0 PK	74.0	-27.0	1.30 V	96	46.4	0.6
2	2390.00	38.1 AV	54.0	-15.9	1.30 V	96	37.5	0.6
3	*2412.00	100.2 PK			1.30 V	96	99.4	0.8
4	*2412.00	97.7 AV			1.30 V	96	96.9	0.8
5	4824.00	47.4 PK	74.0	-26.6	1.10 V	84	38.2	9.2
6	4824.00	34.9 AV	54.0	-19.1	1.10 V	84	25.7	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.6 PK			1.20 H	263	100.8	0.8
2	*2437.00	99.0 AV			1.20 H	263	98.2	0.8
3	4874.00	48.5 PK	74.0	-25.5	1.06 H	198	39.2	9.3
4	4874.00	36.1 AV	54.0	-17.9	1.06 H	198	26.8	9.3
5	7311.00	52.6 PK	74.0	-21.4	1.52 H	287	36.1	16.5
6	7311.00	39.3 AV	54.0	-14.7	1.52 H	287	22.8	16.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.1 PK			1.31 V	103	99.3	0.8
2	*2437.00	97.9 AV			1.31 V	103	97.1	0.8
3	4874.00	46.9 PK	74.0	-27.1	1.09 V	78	37.6	9.3
4	4874.00	35.0 AV	54.0	-19.0	1.09 V	78	25.7	9.3
5	7311.00	52.0 PK	74.0	-22.0	1.04 V	296	35.5	16.5
6	7311.00	39.7 AV	54.0	-14.3	1.04 V	296	23.2	16.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.2 PK			1.09 H	274	101.3	0.9
2	*2462.00	99.9 AV			1.09 H	274	99.0	0.9
3	2483.50	49.4 PK	74.0	-24.6	1.15 H	283	48.5	0.9
4	2483.50	39.0 AV	54.0	-15.0	1.15 H	283	38.1	0.9
5	4924.00	48.4 PK	74.0	-25.6	1.05 H	203	39.0	9.4
6	4924.00	36.2 AV	54.0	-17.8	1.05 H	203	26.8	9.4
7	7386.00	53.2 PK	74.0	-20.8	1.49 H	291	37.2	16.0
8	7386.00	39.7 AV	54.0	-14.3	1.49 H	291	23.7	16.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.8 PK			1.37 V	121	100.9	0.9
2	*2462.00	99.1 AV			1.37 V	121	98.2	0.9
3	2483.50	48.0 PK	74.0	-26.0	1.37 V	121	47.1	0.9
4	2483.50	39.1 AV	54.0	-14.9	1.37 V	121	38.2	0.9
5	4924.00	47.1 PK	74.0	-26.9	1.10 V	71	37.7	9.4
6	4924.00	34.8 AV	54.0	-19.2	1.10 V	71	25.4	9.4
7	7386.00	52.8 PK	74.0	-21.2	1.02 V	305	36.8	16.0
8	7386.00	40.9 AV	54.0	-13.1	1.02 V	305	24.9	16.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.9 PK	74.0	-8.1	1.31 H	126	65.3	0.6
2	2390.00	42.7 AV	54.0	-11.3	1.31 H	126	42.1	0.6
3	*2412.00	104.6 PK			1.31 H	126	103.8	0.8
4	*2412.00	93.3 AV			1.31 H	126	92.5	0.8
5	4824.00	46.8 PK	74.0	-27.2	1.03 H	72	37.6	9.2
6	4824.00	34.4 AV	54.0	-19.6	1.03 H	72	25.2	9.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.4 PK	74.0	-7.6	1.09 V	268	65.8	0.6
2	2390.00	43.7 AV	54.0	-10.3	1.09 V	268	43.1	0.6
3	*2412.00	104.2 PK			1.09 V	268	103.4	0.8
4	*2412.00	93.2 AV			1.09 V	268	92.4	0.8
5	4824.00	47.5 PK	74.0	-26.5	1.08 V	50	38.3	9.2
6	4824.00	35.2 AV	54.0	-18.8	1.08 V	50	26.0	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.1 PK			1.18 H	270	104.3	0.8
2	*2437.00	93.7 AV			1.18 H	270	92.9	0.8
3	4874.00	48.6 PK	74.0	-25.4	1.10 H	228	39.3	9.3
4	4874.00	36.6 AV	54.0	-17.4	1.10 H	228	27.3	9.3
5	7311.00	53.1 PK	74.0	-20.9	1.02 H	298	36.6	16.5
6	7311.00	39.6 AV	54.0	-14.4	1.02 H	298	23.1	16.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.4 PK			1.27 V	119	103.6	0.8
2	*2437.00	92.9 AV			1.27 V	119	92.1	0.8
3	4874.00	47.8 PK	74.0	-26.2	1.03 V	59	38.5	9.3
4	4874.00	35.5 AV	54.0	-18.5	1.03 V	59	26.2	9.3
5	7311.00	53.1 PK	74.0	-20.9	1.06 V	313	36.6	16.5
6	7311.00	40.3 AV	54.0	-13.7	1.06 V	313	23.8	16.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.8 PK			1.39 H	119	103.9	0.9
2	*2462.00	93.3 AV			1.39 H	119	92.4	0.9
3	2483.50	65.8 PK	74.0	-8.2	1.39 H	119	64.9	0.9
4	2483.50	42.8 AV	54.0	-11.2	1.39 H	119	41.9	0.9
5	4924.00	47.1 PK	74.0	-26.9	1.09 H	71	37.7	9.4
6	4924.00	35.2 AV	54.0	-18.8	1.09 H	71	25.8	9.4
7	7386.00	52.4 PK	74.0	-21.6	1.32 H	309	36.4	16.0
8	7386.00	39.6 AV	54.0	-14.4	1.32 H	309	23.6	16.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.5 PK			1.06 V	259	104.6	0.9
2	*2462.00	93.9 AV			1.06 V	259	93.0	0.9
3	2483.50	67.9 PK	74.0	-6.1	1.06 V	259	67.0	0.9
4	2483.50	43.7 AV	54.0	-10.3	1.06 V	259	42.8	0.9
5	4924.00	47.9 PK	74.0	-26.1	1.11 V	207	38.5	9.4
6	4924.00	35.7 AV	54.0	-18.3	1.11 V	207	26.3	9.4
7	7386.00	53.0 PK	74.0	-21.0	1.05 V	282	37.0	16.0
8	7386.00	39.1 AV	54.0	-14.9	1.05 V	282	23.1	16.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.7 PK	74.0	-7.3	1.16 H	279	66.1	0.6
2	2390.00	43.8 AV	54.0	-10.2	1.16 H	279	43.2	0.6
3	*2412.00	102.1 PK			1.16 H	279	101.3	0.8
4	*2412.00	90.9 AV			1.16 H	279	90.1	0.8
5	4824.00	47.9 PK	74.0	-26.1	1.05 H	223	38.7	9.2
6	4824.00	35.7 AV	54.0	-18.3	1.05 H	223	26.5	9.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	1.42 V	118	64.7	0.6
2	2390.00	42.5 AV	54.0	-11.5	1.42 V	118	41.9	0.6
3	*2412.00	102.9 PK			1.42 V	118	102.1	0.8
4	*2412.00	91.6 AV			1.42 V	118	90.8	0.8
5	4824.00	46.7 PK	74.0	-27.3	1.03 V	39	37.5	9.2
6	4824.00	34.9 AV	54.0	-19.1	1.03 V	39	25.7	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.0 PK			1.14 H	258	102.2	0.8
2	*2437.00	91.6 AV			1.14 H	258	90.8	0.8
3	4874.00	47.5 PK	74.0	-26.5	1.09 H	219	38.2	9.3
4	4874.00	35.3 AV	54.0	-18.7	1.09 H	219	26.0	9.3
5	7311.00	53.1 PK	74.0	-20.9	1.08 H	299	36.6	16.5
6	7311.00	40.0 AV	54.0	-14.0	1.08 H	299	23.5	16.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.6 PK			1.28 V	143	101.8	0.8
2	*2437.00	91.4 AV			1.28 V	143	90.6	0.8
3	4874.00	47.8 PK	74.0	-26.2	1.00 V	78	38.5	9.3
4	4874.00	35.7 AV	54.0	-18.3	1.00 V	78	26.4	9.3
5	7311.00	51.8 PK	74.0	-22.2	1.04 V	294	35.3	16.5
6	7311.00	40.2 AV	54.0	-13.8	1.04 V	294	23.7	16.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.9 PK			1.18 H	286	102.0	0.9
2	*2462.00	91.9 AV			1.18 H	286	91.0	0.9
3	2483.50	66.8 PK	74.0	-7.2	1.18 H	286	65.9	0.9
4	2483.50	43.8 AV	54.0	-10.2	1.18 H	286	42.9	0.9
5	4924.00	47.0 PK	74.0	-27.0	1.13 H	230	37.6	9.4
6	4924.00	35.0 AV	54.0	-19.0	1.13 H	230	25.6	9.4
7	7386.00	53.1 PK	74.0	-20.9	1.03 H	299	37.1	16.0
8	7386.00	39.8 AV	54.0	-14.2	1.03 H	299	23.8	16.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.7 PK			1.25 V	103	100.8	0.9
2	*2462.00	90.3 AV			1.25 V	103	89.4	0.9
3	2483.50	66.2 PK	74.0	-7.8	1.25 V	103	65.3	0.9
4	2483.50	42.9 AV	54.0	-11.1	1.25 V	103	42.0	0.9
5	4924.00	47.2 PK	74.0	-26.8	1.02 V	62	37.8	9.4
6	4924.00	35.2 AV	54.0	-18.8	1.02 V	62	25.8	9.4
7	7386.00	51.6 PK	74.0	-22.4	1.00 V	319	35.6	16.0
8	7386.00	40.2 AV	54.0	-13.8	1.00 V	319	24.2	16.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:

802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	182.02	34.6 QP	43.5	-8.9	1.50 H	82	44.2	-9.6
2	234.02	37.2 QP	46.0	-8.8	1.50 H	278	47.1	-9.9
3	276.02	38.9 QP	46.0	-7.1	1.00 H	291	46.5	-7.6
4	300.00	41.6 QP	46.0	-4.4	1.00 H	300	48.4	-6.8
5	312.00	40.3 QP	46.0	-5.7	1.00 H	298	46.6	-6.3
6	338.00	38.8 QP	46.0	-7.2	1.00 H	307	44.6	-5.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	40.04	31.3 QP	40.0	-8.7	1.00 V	115	39.7	-8.4
2	130.01	29.0 QP	43.5	-14.5	1.00 V	17	38.1	-9.1
3	182.00	28.7 QP	43.5	-14.8	1.50 V	33	38.3	-9.6
4	286.01	34.6 QP	46.0	-11.4	1.00 V	1	41.8	-7.2
5	338.00	35.1 QP	46.0	-10.9	1.50 V	359	40.9	-5.8
6	792.01	34.3 QP	46.0	-11.7	1.50 V	291	30.1	4.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	100375	May 09, 2016	May 08, 2017
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-522	Sep. 01, 2015	Aug. 31, 2016
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 13, 2016	June 12, 2017
RF Cable	5D-FB	COCCAB-001	Mar. 08, 2016	Mar. 07, 2017
10 dB PAD Mini-Circuits	HAT-10+	CONATT-003	Sep. 14, 2015	Sep. 13, 2016
50 ohms Terminator	N/A	EMC-03	Sep. 23, 2015	Sep. 22, 2016
50 ohms Terminator	N/A	EMC-02	Oct. 01, 2015	Sep. 30, 2016
Software BVADT	BVADT_Cond_ V7.3.7.3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date:Aug. 08, 2016

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

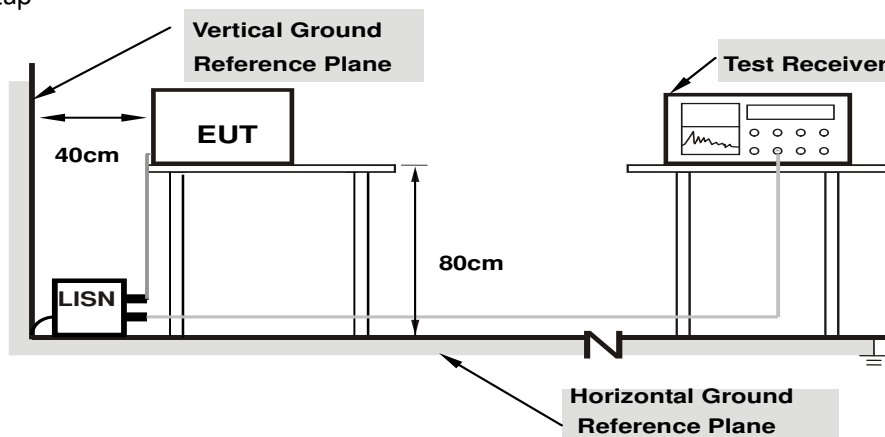

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.32	36.93	18.99	47.25	29.31	66.00	56.00	-18.75	-26.69
2	0.51719	10.29	20.43	12.76	30.72	23.05	56.00	46.00	-25.28	-22.95
3	2.82813	10.33	14.98	2.80	25.31	13.13	56.00	46.00	-30.69	-32.87
4	6.63281	10.48	9.08	3.87	19.56	14.35	60.00	50.00	-40.44	-35.65
5	15.77344	10.81	11.68	1.68	22.49	12.49	60.00	50.00	-37.51	-37.51
6	25.23047	11.11	15.33	13.08	26.44	24.19	60.00	50.00	-33.56	-25.81

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

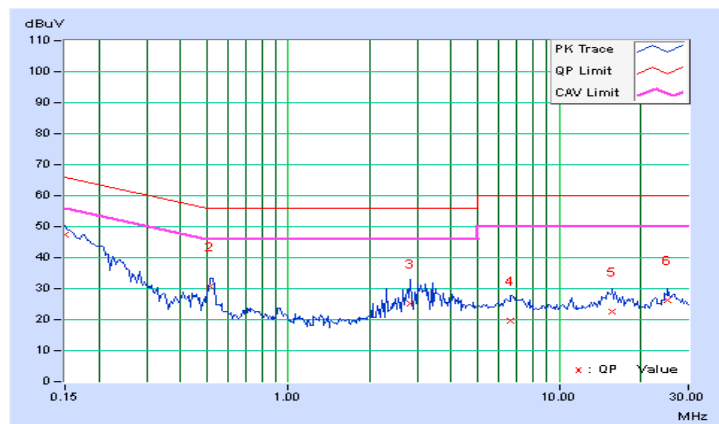


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.30	36.64	18.63	46.94	28.93	65.79	55.79	-18.85	-26.86
2	0.33359	10.27	14.19	2.60	24.46	12.87	59.36	49.36	-34.90	-36.49
3	0.52500	10.27	20.19	11.74	30.46	22.01	56.00	46.00	-25.54	-23.99
4	2.82813	10.33	14.66	2.26	24.99	12.59	56.00	46.00	-31.01	-33.41
5	15.73047	10.83	11.26	2.49	22.09	13.32	60.00	50.00	-37.91	-36.68
6	25.22656	11.12	14.55	11.78	25.67	22.90	60.00	50.00	-34.33	-27.10

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

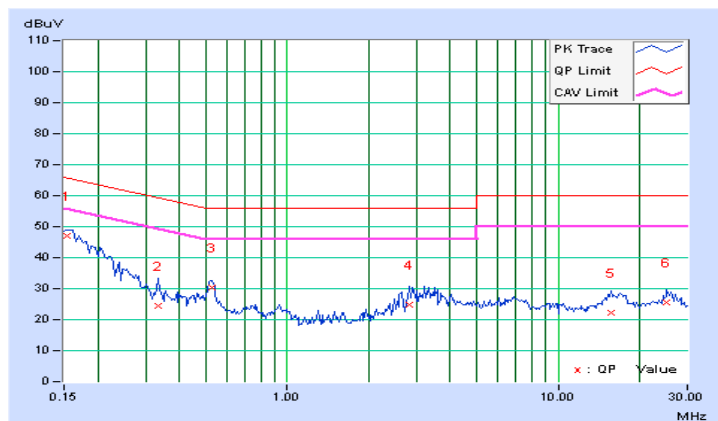


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	9.06	0.5	Pass
6	2437	9.12	0.5	Pass
11	2462	9.12	0.5	Pass

802.11g


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	15.68	0.5	Pass
6	2437	15.46	0.5	Pass
11	2462	15.51	0.5	Pass

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	15.41	0.5	Pass
6	2437	16.30	0.5	Pass
11	2462	15.35	0.5	Pass

Spectrum Plot of Worst Value


802.11b / CH1

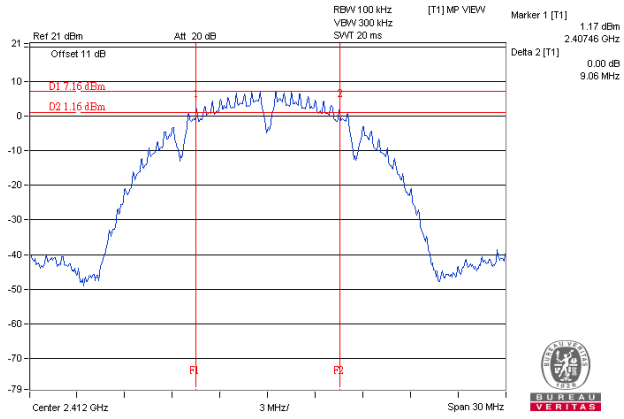

802.11g / CH6

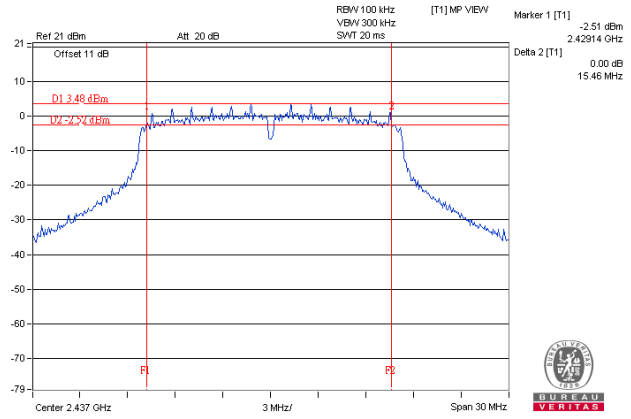

802.11n (HT20) / CH11

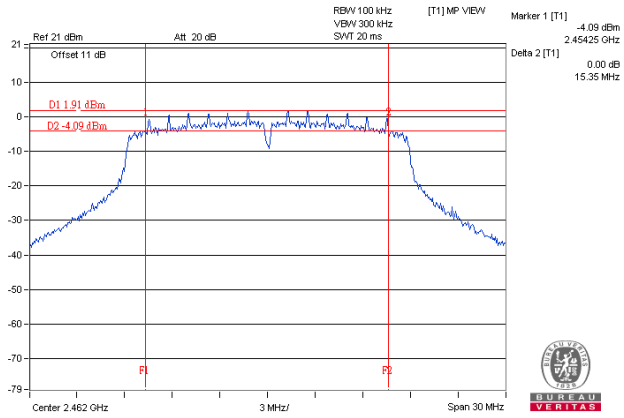


4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

FOR PEAK POWER

802.11b

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	66.374	18.22	30	Pass
6	2437	66.988	18.26	30	Pass
11	2462	66.834	18.25	30	Pass

802.11g

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	175.792	22.45	30	Pass
6	2437	178.649	22.52	30	Pass
11	2462	141.254	21.50	30	Pass

802.11n (HT20)

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	111.173	20.46	30	Pass
6	2437	106.414	20.27	30	Pass
11	2462	115.611	20.63	30	Pass

FOR AVERAGE POWER

802.11b

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	41.305	16.16
6	2437	40.644	16.09
11	2462	43.652	16.40

802.11g

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	28.84	14.60
6	2437	31.769	15.02
11	2462	33.497	15.25

802.11n (HT20)


Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	16.866	12.27
6	2437	19.231	12.84
11	2462	21.038	13.23

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-7.88	8	Pass
6	2437	-6.40	8	Pass
11	2462	-6.60	8	Pass

802.11g


Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-11.13	8	Pass
6	2437	-10.05	8	Pass
11	2462	-10.25	8	Pass

802.11n (HT20)


Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-12.68	8	Pass
6	2437	-13.42	8	Pass
11	2462	-13.08	8	Pass

Spectrum Plot of Worst Value


802.11b / CH6

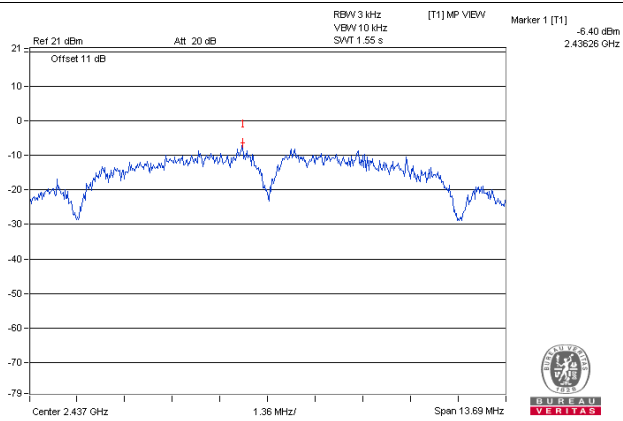

802.11g / CH6

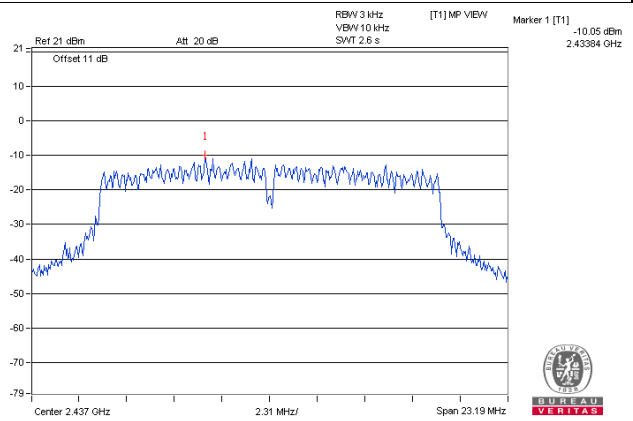

802.11n (HT20) / CH1

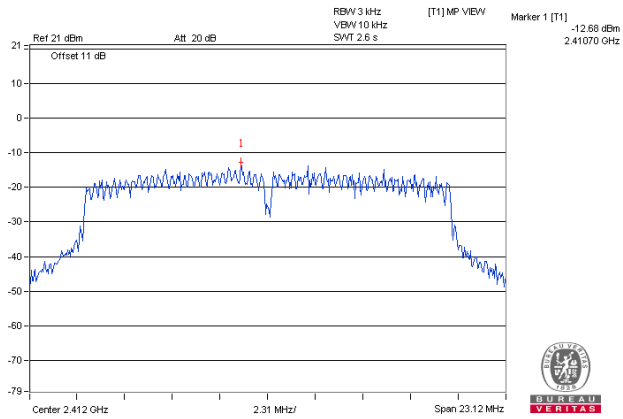


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition



Same as Item 4.3.6

4.6.7 Test Results



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b



CH 1

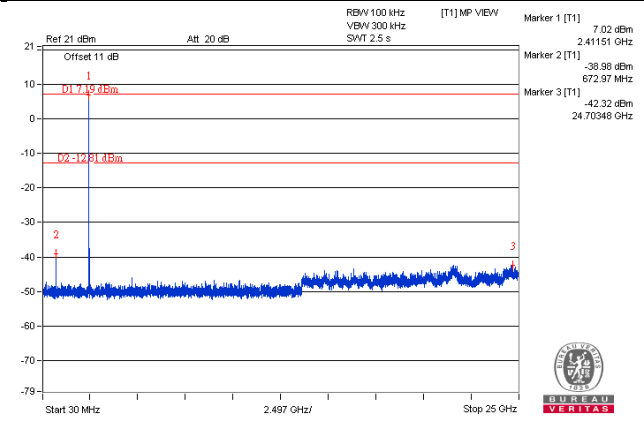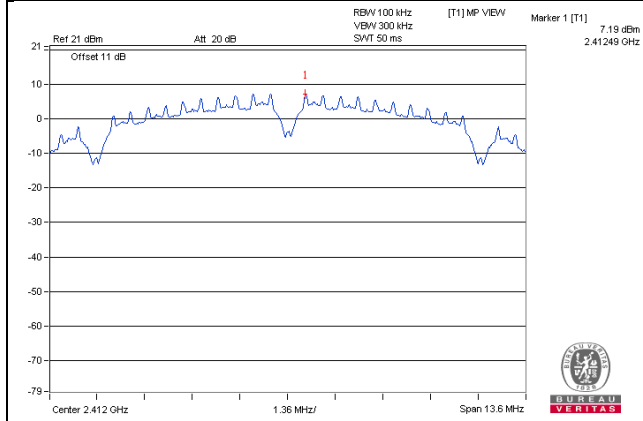


CH 6

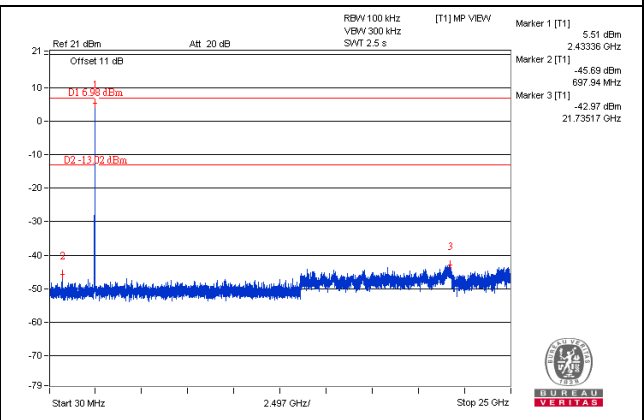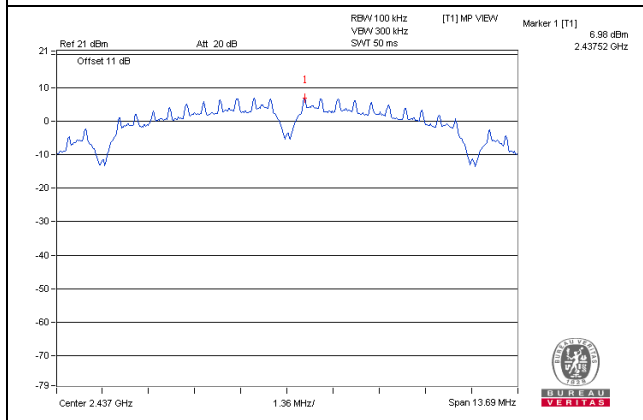


CH 11

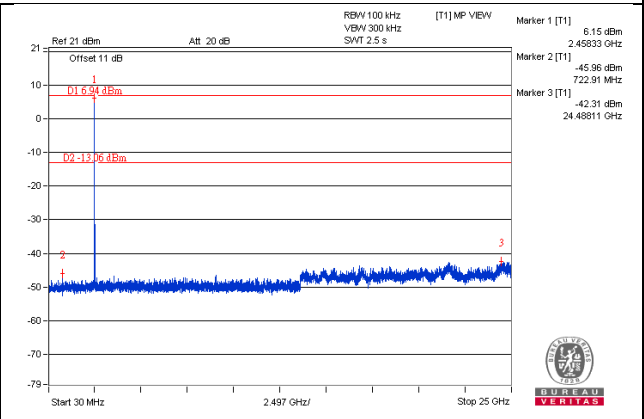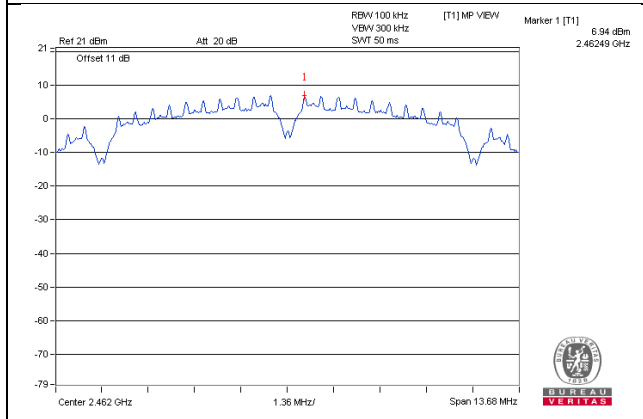

CH 1 Band edge


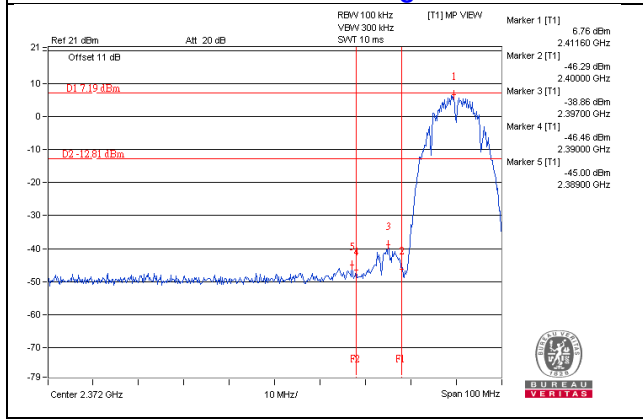


CH 11 Band edge


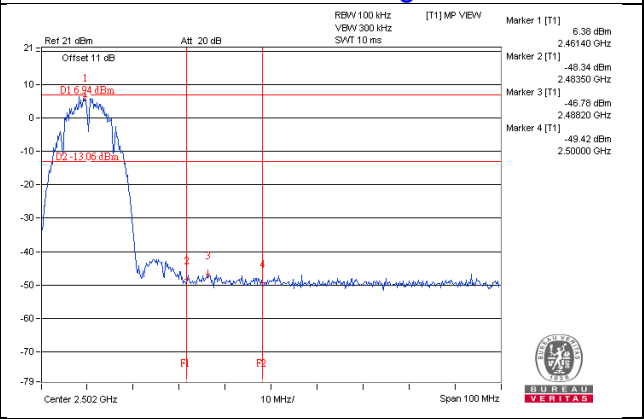


802.11g



CH 1

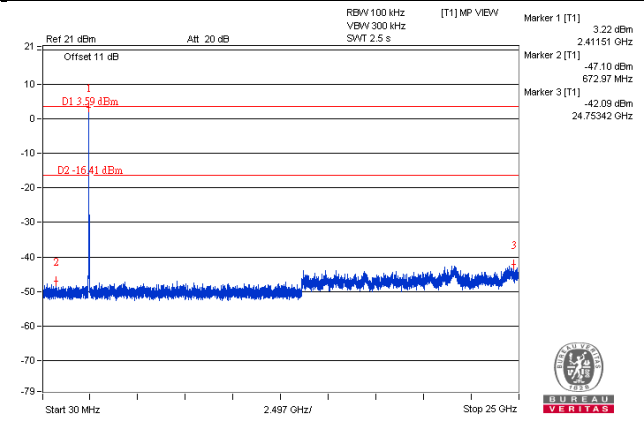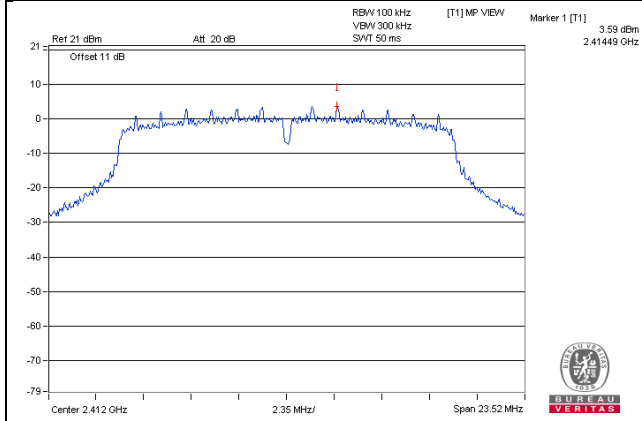


CH 6

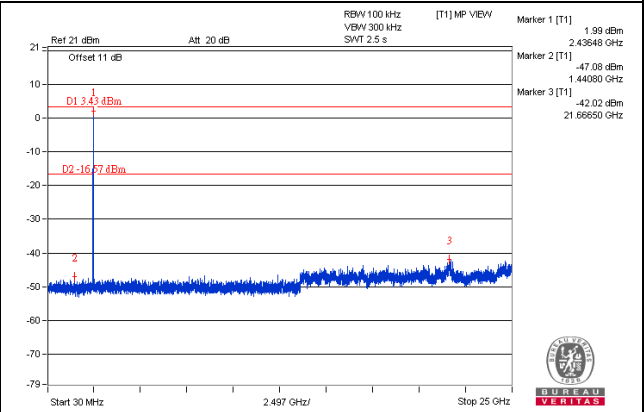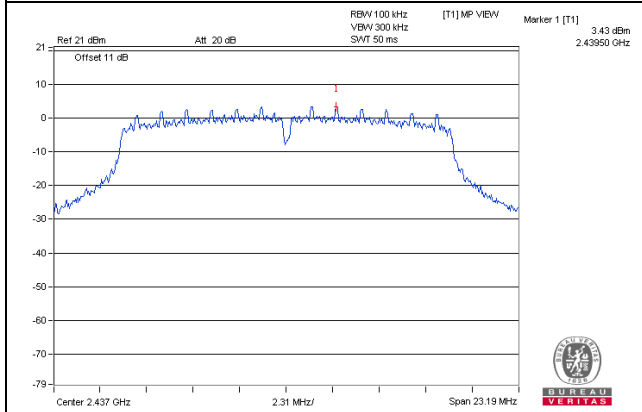


CH 11

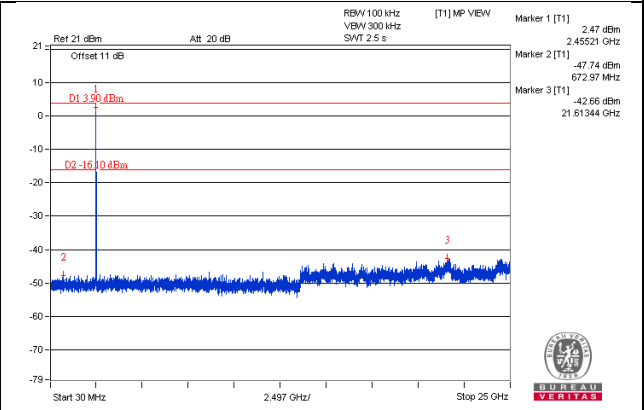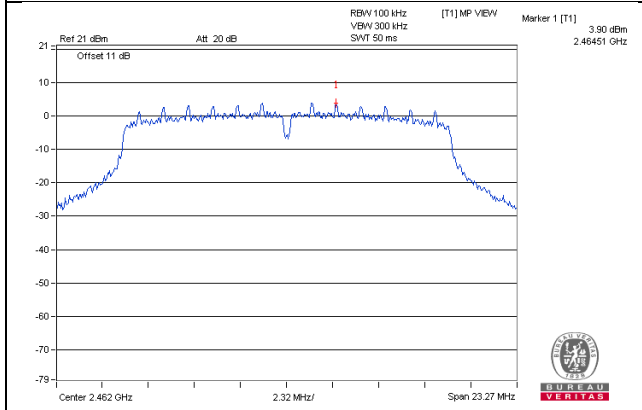

CH 1 Band edge

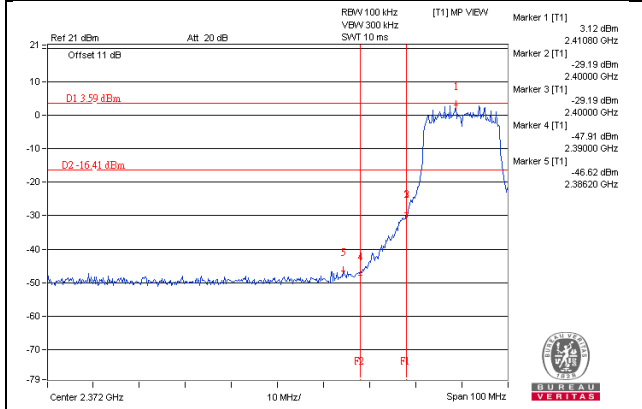


CH 11 Band edge

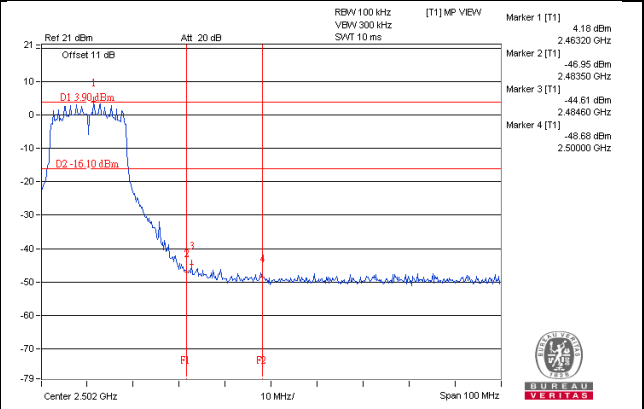


802.11n (HT20)


CH 1

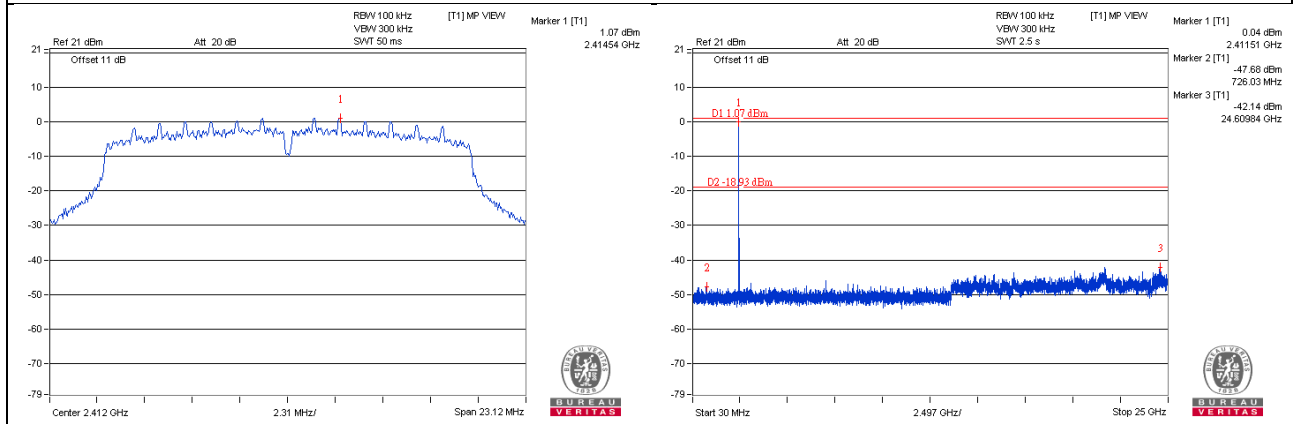


CH 6

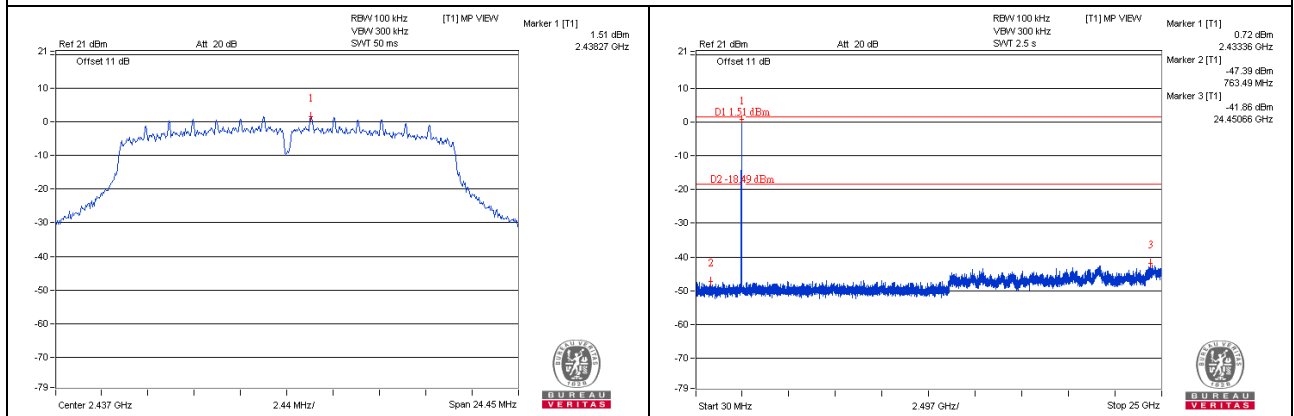


CH 11

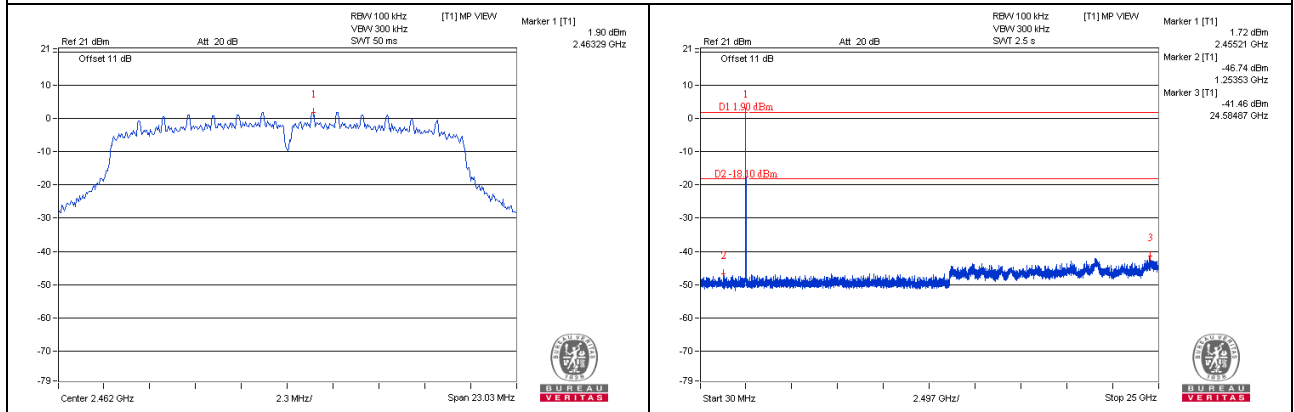

CH 1 Band edge

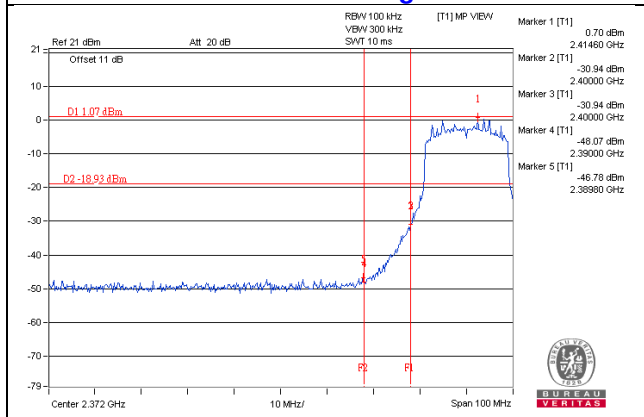

CH 11 Band edge

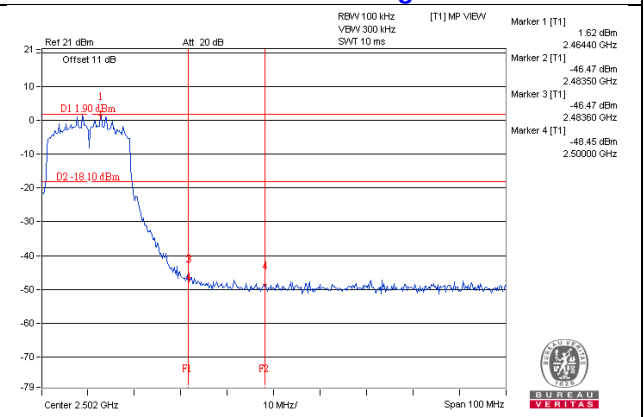

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---