

FCC Test Report

Report No.: RF150902E05

FCC ID: MQT-XCEC150S

Test Model: xCE_C150S

Received Date: Sep. 02, 2015

Test Date: Sep. 09 to 18 , 2015

Issued Date: Sep. 25, 2015

Applicant: XAC AUTOMATION CORP.

Address: 4F, No. 30, INDUSTRY E. RD. IX, SCIENCE-BASED INDUSTRIAL PARK,HSINCHU,TAIWAN

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

Lab Address: No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan R.O.C.

Test Location (1): No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty.....	5
2.2 Modification Record.....	5
3 General Information	6
3.1 General Description of EUT.....	6
3.2 Description of Test Modes.....	7
3.2.1 Test Mode Applicability and Tested Channel Detail.....	8
3.3 Description of Support Units.....	10
3.3.1 Configuration of System under Test.....	11
3.4 General Description of Applied Standards.....	13
4 Test Types and Results	14
4.1 Radiated Emission Measurement.....	14
4.1.1 Limits of Radiated Emission Measurement.....	14
4.1.2 Test Instruments.....	15
4.1.3 Test Procedures.....	16
4.1.4 Deviation from Test Standard.....	16
4.1.5 Test Setup.....	17
4.1.6 EUT Operating Conditions.....	17
4.1.7 Test Results.....	18
4.2 Conducted Emission Measurement.....	22
4.2.1 Limits of Conducted Emission Measurement.....	22
4.2.2 Test Instruments.....	22
4.2.3 Test Procedures.....	23
4.2.4 Deviation from Test Standard.....	23
4.2.5 Test Setup.....	23
4.2.6 EUT Operating Conditions.....	23
4.2.7 Test Results (Mdoe 1).....	24
4.2.8 Test Results (Mdoe 2).....	26
4.2.9 Test Results (Mdoe 3).....	28
4.3 Frequency Stability.....	30
4.3.1 Limits of Frequency Stability Measurement.....	30
4.3.2 Test Setup.....	30
4.3.3 Test Instruments.....	30
4.3.4 Test Procedure.....	31
4.3.5 Deviation from Test Standard.....	31
4.3.6 EUT Operating Conditions.....	31
4.3.7 Test Results.....	32
4.4 20dB bandwidth.....	33
4.4.1 Limits of 20dB bandwidth Measurement.....	33
4.4.2 Test Setup.....	33
4.4.3 Test Instruments.....	33
4.4.4 Test Procedures.....	33
4.4.5 Deviation from Test Standard.....	33
4.4.6 EUT Operating Conditions.....	33
4.4.7 Test Results.....	34
5 Pictures of Test Arrangements	35
Appendix – Information on the Testing Laboratories	36



A D T

Release Control Record

Issue No.	Description	Date Issued
RF150902E05	Original release.	Sep. 25, 2015

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.225, 15.215)			
FCC Clause	Test Item	Result	Remarks
15.207	Conducted emission test	PASS	Meet the requirement of limit. Minimum passing margin is -3.59dB at 3.68750MHz.
15.225 (a)	The field strength of any emissions within the band 13.553-13.567 MHz	PASS	Meet the requirement of limit. Minimum passing margin is -45.50dB at 13.56MHz.
15.225 (d)	The field strength of any emissions appearing outside of the 13.110-14.010 MHz band	PASS	Meet the requirement of limit. Minimum passing margin is -5.21dB at 203.44MHz.
15.225 (e)	The frequency tolerance	PASS	Meet the requirement of limit.
15.215 (c)	20dB Bandwidth	PASS	Meet the requirement of limit.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.86 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.37 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Contactless Reader
Brand	XAC
Test Model	xCE_C150S
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 5V
Modulation Type	ASK
Operating Frequency	13.56MHz
Number of Channel	1
Antenna Type	Please see NOTE
Antenna Connector	Please see NOTE
Accessory Device	NA
Data Cable Supplied	NA

Note:

- The EUT is a RFID device.
- The EUT has three types which RF circuit are identical to each other in all aspects except for the following table:

Type	Func.
RS232	RS232 cable 1.2m with 1 core
USB	USB cable 1.2m with 1 core
Wayne RS232	Wayne RS232 cable 0.4m with 1 core + Wayne RS232 port to RS232 0.3m with 1 core

From the above types, the worst spurious emission was found in **Type: USB**. Therefore only the test data of the type was recorded in this report.

- The EUT could be supplied with power adapter as the following table:

Adapter (test only not sale together)		
Brand	Model No.	Spec.
HON-KWANG	HK-UA-050A100-US	AC I/P: 100-240V, 50/60Hz, 0.2A DC O/P: 5V, 1.0A DC output cable (Unshielded, 1.5m with 1 core)

- The antennas provided to the EUT, please refer to the following table:

Brand	Model No.	Antenna Type	Antenna Connector	Gain(dBi)	Frequency (MHz)
XAC	PCB ENIG ANT BOARD (RFID) C150S (ROHS)	PCB (2 Layer)	NA	13	13.56

- The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

One channel was provided to this EUT:

Channel	FREQ. (MHz)
1	13.56

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE	PLC	FS	EB	
1	√	√	√	√	USB mode
2	-	√	-	-	RS232 mode
3	-	√	-	-	Wayne RS232 mode

Where **RE:** Radiated Emission below 1GHz **PLC:** Power Line Conducted Emission
FS: Frequency Stability **EB:** 20dB Bandwidth measurement

NOTE: The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **Y-plane**.

Radiated Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
1	1	ASK

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
1	1	ASK

Frequency Stability:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
1	1	ASK

20dB Bandwidth:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
1	1	ASK

Test Condition:

Applicable to	Environmental Conditions	Input Power (SYSTEM)	Tested by
RE	22deg. C, 64%RH	120Vac, 60Hz	Jyunchun.Lin
	27deg. C, 64%RH		Rex Huang
PLC	27deg. C, 60%RH	120Vac, 60Hz	Timmy Hu
FS	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng
EB	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	NOTEBOOK COMPUTER	DELL	PP32LA	DSL32S	FCC DoC	Provided by Lab
B.	iPod	Apple	MC749TA/A	CC4DN25WDFDM	NA	Provided by Lab

Note:


1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB	1	0.1	Yes	0	Provided by Lab
2.	USB to RS232	1	0.4	Yes	0	Provided by Lab
3.	USB	1	1.2	Yes	1	Supplied by Client
4.	DC & RS232	1	1.2	Yes	1	Supplied by Client
5.	DC	1	1.5	Yes	1	Supplied by Client
6.	DC & RS232 to Wayne RS232	1	0.3	Yes	1	Supplied by Client
7.	Wayne RS232	1	0.4	Yes	1	Supplied by Client


Note: The core(s) is(are) originally attached to the cable(s).

3.3.1 Configuration of System under Test


For USB mode

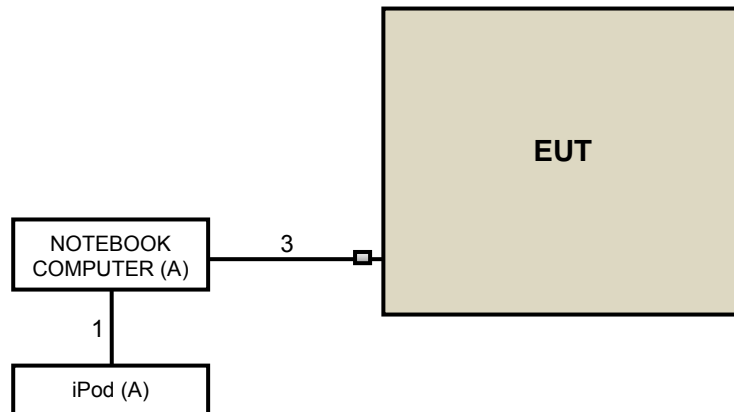

For RS232 mode

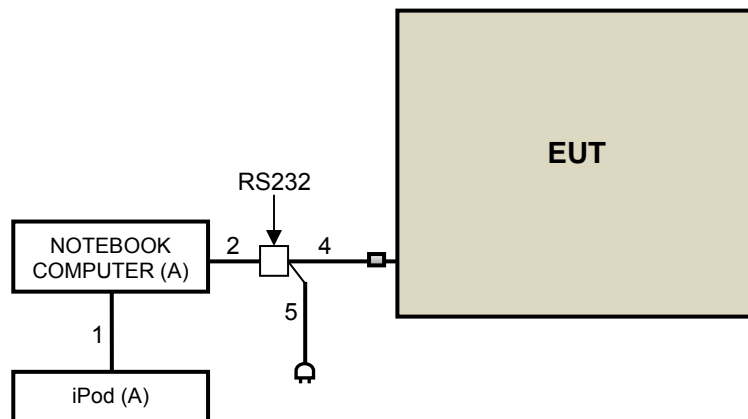

For Wayne RS232 mode

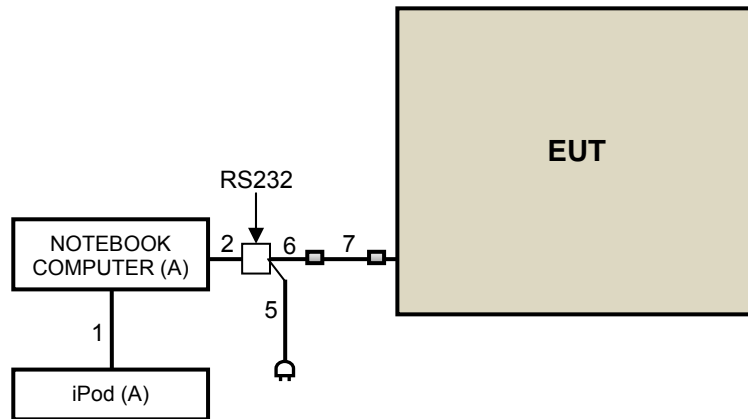

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.225)

FCC Part 15, Subpart C (15.215)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission Measurement

4.1.1 Limits of Radiated Emission Measurement

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210105	July 24, 2015	July 23, 2016
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 13, 2014	Jan. 12, 2016
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2014	Dec. 15, 2016
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 18, 2015	Jan. 17, 2016
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 12, 2014	Nov. 11, 2015
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 06, 2015	Feb. 05, 2016
RF Cable	8D-FB	CHGCAB-001 -1 CHGCAB-001 -2	Oct. 04, 2014	Oct. 03, 2015
	RF-141	CHGCAB-004	Oct. 04, 2014	Oct. 03, 2015
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. G.
3. The FCC Site Registration No. is 966073.
4. The CANADA Site Registration No. is IC 7450H-2.
5. Tested Date: Sep. 09 to 18, 2015

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission 30~1000MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency 30MHz ~ 1GHz.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup

For Radiated emission below 30MHz

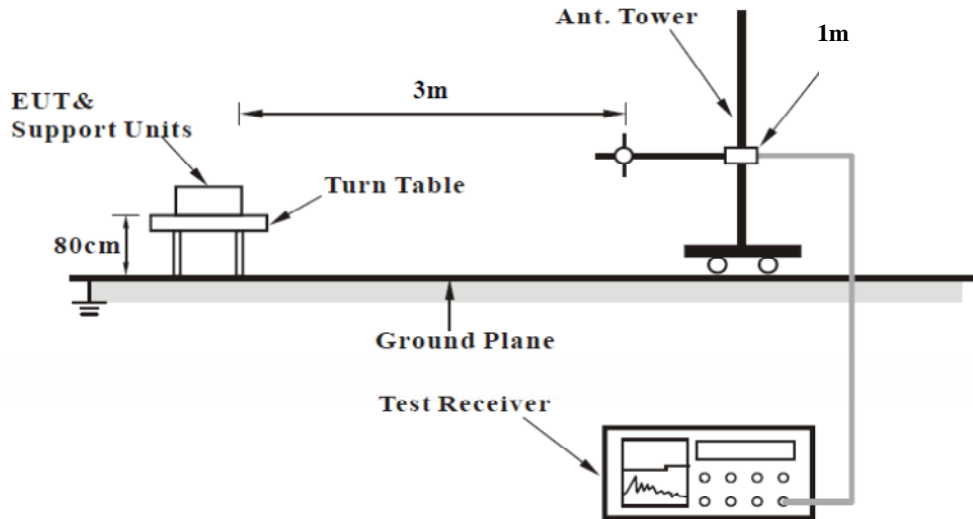

For Radiated emission 30~1000MHz

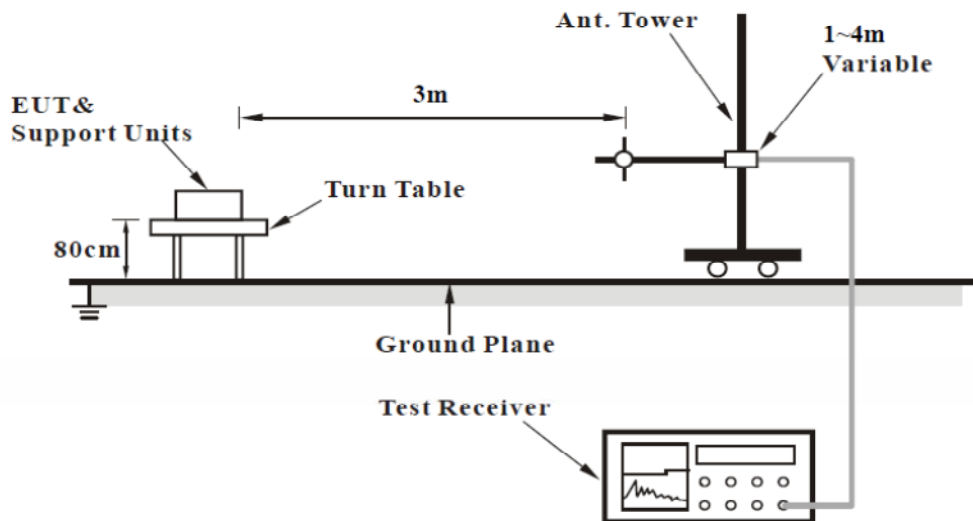

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

1. Turn on the power of all equipment.
2. The EUT runs a test program "Normal sample" to under transmission condition (RFID) continuously.

4.1.7 Test Results

Frequency Range	13.553 ~ 13.567MHz	Detector Function	Quasi-Peak
-----------------	--------------------	-------------------	------------


Antenna Polarity & Test Distance: Loop Antenna Open At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13.56	78.50	124.00	-45.50	1.0	117	40.71	37.79

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor(dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\mu\text{V/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m} \\
 &= 84+20\log(30/3)^2 && 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

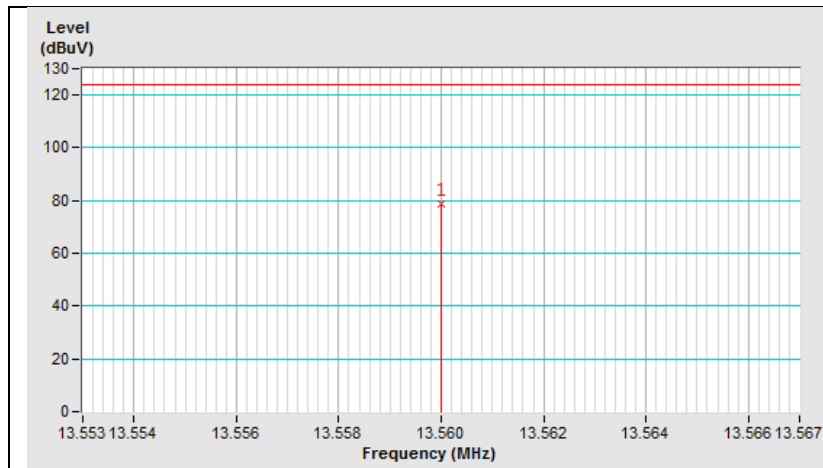

Frequency Range	13.553 ~ 13.567MHz	Detector Function	Quasi-Peak
-----------------	--------------------	-------------------	------------


Antenna Polarity & Test Distance: Loop Antenna Close At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13.56	75.46	124.00	-48.54	1.0	257	37.67	37.79

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor(dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} && 30\text{m} \\
 &= 84\text{dBuV/m} && 30\text{m} \\
 &= 84+20\log(30/3)^2 && 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

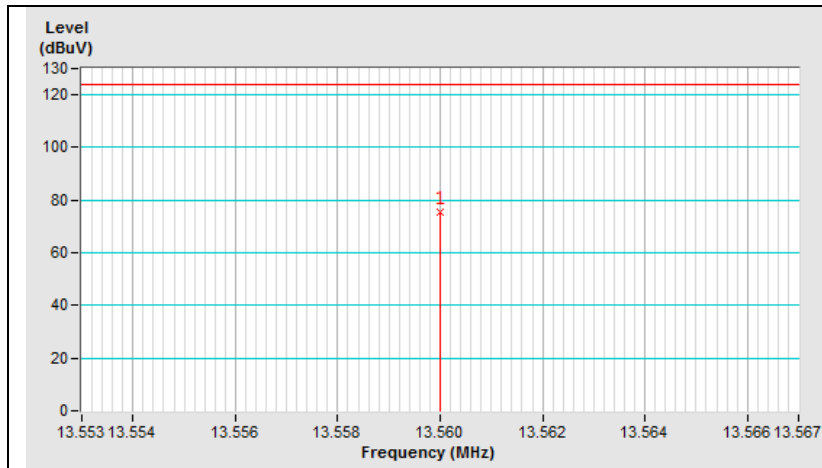

Frequency Range	Below 30MHz	Detector Function	Quasi-Peak
-----------------	-------------	-------------------	------------

Antenna Polarity & Test Distance: Loop Antenna Open At 3m								
-----------------------------------------------------------	--	--	--	--	--	--	--	--

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	0.07	60.0 QP	110.5	-50.4	1.00 V	259	-1.63	61.65
2	0.12	50.7 QP	105.9	-55.2	1.00 V	253	-6.45	57.14
3	0.18	64.3 QP	102.5	-38.2	1.00 V	327	9.72	54.55
4	3.79	46.3 QP	69.5	-23.3	1.00 V	326	8.31	37.97
5	25.31	48.8 QP	69.5	-20.7	1.00 V	27	10.90	37.94
6	27.14	45.6 QP	69.5	-23.9	1.00 V	196	7.25	38.35

Antenna Polarity & Test Distance: Loop Antenna Close At 3m								
------------------------------------------------------------	--	--	--	--	--	--	--	--

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	0.07	55.2 QP	110.6	-55.3	1.00 V	111	-6.53	61.77
2	0.12	49.9 QP	106.0	-56.1	1.00 V	164	-7.29	57.23
3	0.19	55.1 QP	102.1	-47.0	1.00 V	53	0.93	54.19
4	2.56	57.4 QP	69.5	-12.2	1.00 V	20	18.57	38.79
5	25.31	49.9 QP	69.5	-19.6	1.00 V	41	12.00	37.94
6	27.28	44.7 QP	69.5	-24.8	1.00 V	165	6.31	38.39

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

Frequency Range	Below 1000MHz	Detector Function	Quasi-Peak
-----------------	---------------	-------------------	------------

Antenna Polarity & Test Distance: Horizontal At 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	95.91	32.8 QP	43.5	-10.7	2.00 H	338	58.34	-25.51
2	176.32	37.8 QP	43.5	-5.7	2.00 H	193	59.21	-21.40
3	203.44	38.3 QP	43.5	-5.2	1.00 H	92	61.63	-23.34
4	666.42	28.8 QP	46.0	-17.2	1.50 H	280	39.75	-10.94
5	813.71	28.0 QP	46.0	-18.0	1.00 H	183	36.46	-8.43
6	840.82	28.5 QP	46.0	-17.5	1.00 H	167	36.61	-8.07

ANTENNA POLARITY & Test Distance: Vertical At 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.26	32.5 QP	40.0	-7.6	1.00 V	119	53.29	-20.84
2	155.91	30.2 QP	43.5	-13.3	1.00 V	357	50.23	-19.99
3	203.44	28.2 QP	43.5	-15.4	2.00 V	52	51.49	-23.34
4	233.22	29.1 QP	46.0	-16.9	1.00 V	339	51.26	-22.12
5	473.77	23.5 QP	46.0	-22.5	2.00 V	3	38.18	-14.71
6	663.85	32.2 QP	46.0	-13.8	1.50 V	269	43.14	-10.96

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	100375	May 06, 2015	May 05, 2016
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-522	Sep. 01, 2015	Aug. 31, 2016
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 11, 2015	June 10, 2016
RF Cable	5D-FB	COCCAB-001	Mar. 09, 2015	Mar. 08, 2016
50 ohms Terminator	E1-011311	09	Nov. 27, 2014	Nov. 26, 2015
50 ohms Terminator	N/A	EMC-02	Sep. 30, 2014	Sep. 29, 2015
Software BVADT	BVADT_Cond_ V7.3.7.3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Sep. 09, 2015

4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

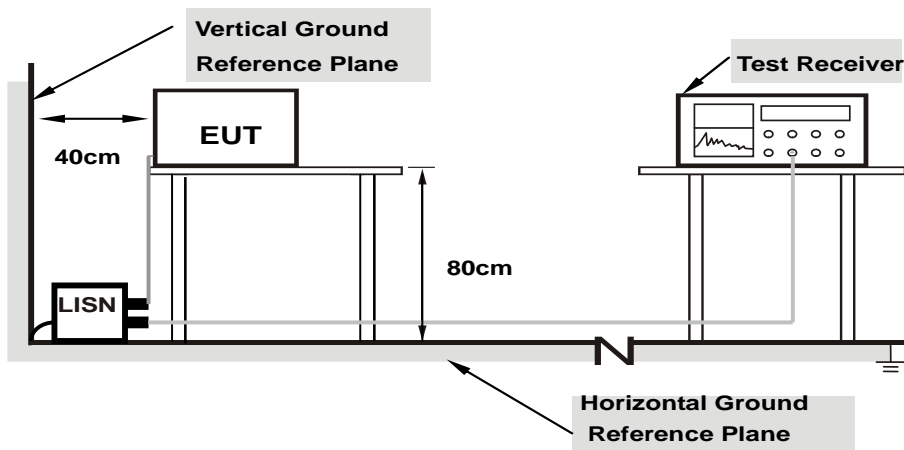

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mdoe 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15000	0.20	43.83	42.23	44.03	42.43	66.00	56.00	-21.97	-13.57
2	0.75156	0.26	34.97	34.19	35.23	34.45	56.00	46.00	-20.77	-11.55
3	2.03516	0.35	37.96	37.39	38.31	37.74	56.00	46.00	-17.69	-8.26
4	2.48438	0.37	37.51	36.90	37.88	37.27	56.00	46.00	-18.12	-8.73
5	3.16406	0.39	37.63	37.45	38.02	37.84	56.00	46.00	-17.98	-8.16
6	8.35938	0.72	38.40	38.22	39.12	38.94	60.00	50.00	-20.88	-11.06

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

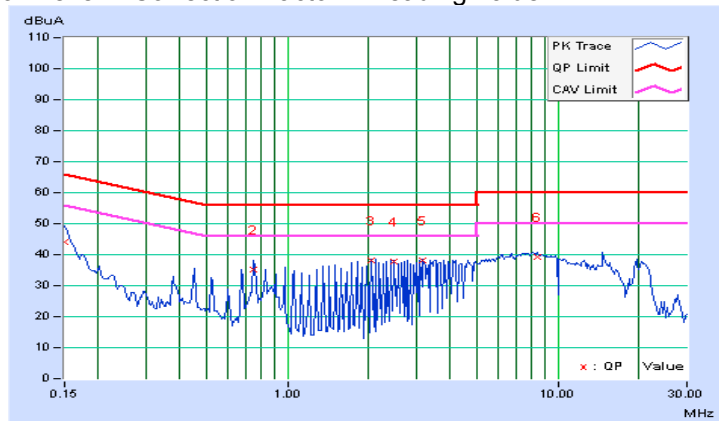


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15000	0.22	42.18	38.13	42.40	38.35	66.00	56.00	-23.60	-17.65
2	0.16953	0.24	33.47	27.75	33.71	27.99	64.98	54.98	-31.27	-26.99
3	2.10547	0.42	40.70	40.64	41.12	41.06	56.00	46.00	-14.88	-4.94
4	3.38672	0.49	42.48	41.91	42.97	42.40	56.00	46.00	-13.03	-3.60
5	3.68750	0.50	42.61	41.91	43.11	42.41	56.00	46.00	-12.89	-3.59
6	6.09375	0.64	42.22	41.84	42.86	42.48	60.00	50.00	-17.14	-7.52

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

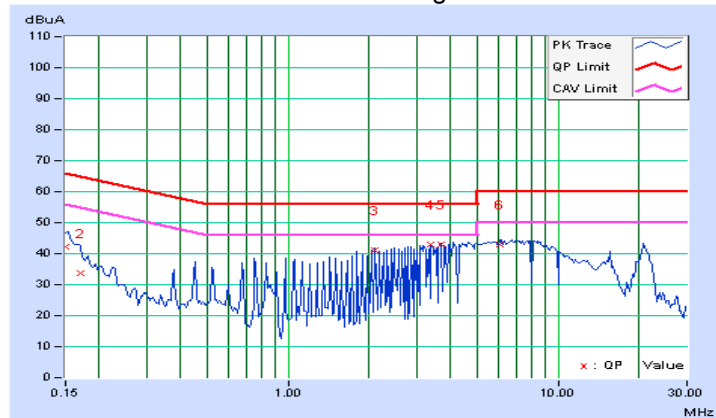


4.2.8 Test Results (Mdoe 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.18906	0.21	37.78	20.31	37.99	20.52	64.08	54.08	-26.09	-33.56
2	0.25938	0.22	34.03	19.03	34.25	19.25	61.45	51.45	-27.21	-32.21
3	0.54453	0.24	35.98	23.18	36.22	23.42	56.00	46.00	-19.78	-22.58
4	6.94922	0.62	43.70	29.52	44.32	30.14	60.00	50.00	-15.68	-19.86
5	7.37109	0.65	43.86	29.58	44.51	30.23	60.00	50.00	-15.49	-19.77
6	8.30859	0.71	39.44	24.54	40.15	25.25	60.00	50.00	-19.85	-24.75

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

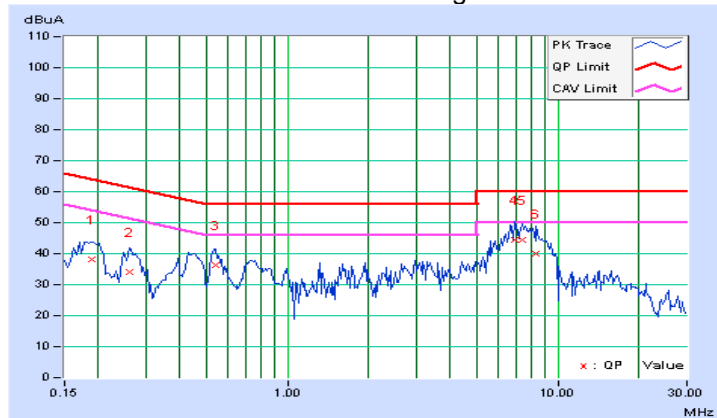


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.17734	0.25	35.97	19.39	36.22	19.64	64.61	54.61	-28.39	-34.97
2	0.53672	0.31	35.86	25.91	36.17	26.22	56.00	46.00	-19.83	-19.78
3	0.72422	0.32	29.58	14.17	29.90	14.49	56.00	46.00	-26.10	-31.51
4	6.65625	0.67	40.43	24.51	41.10	25.18	60.00	50.00	-18.90	-24.82
5	7.32422	0.70	41.96	26.80	42.66	27.50	60.00	50.00	-17.34	-22.50
6	8.01563	0.74	40.47	25.65	41.21	26.39	60.00	50.00	-18.79	-23.61

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

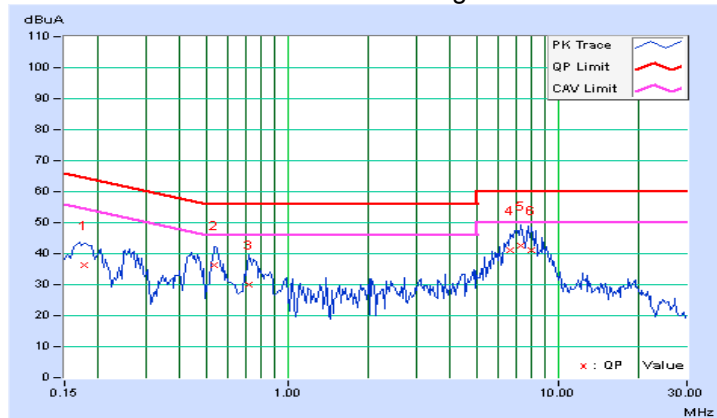


4.2.9 Test Results (Mdoe 3)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.18516	0.21	37.23	20.92	37.44	21.13	64.25	54.25	-26.81	-33.12
2	0.25938	0.22	34.49	18.57	34.71	18.79	61.45	51.45	-26.75	-32.67
3	0.54063	0.24	36.77	23.83	37.01	24.07	56.00	46.00	-18.99	-21.93
4	6.65234	0.60	42.08	28.01	42.68	28.61	60.00	50.00	-17.32	-21.39
5	7.39453	0.65	44.21	29.85	44.86	30.50	60.00	50.00	-15.14	-19.50
6	8.09375	0.70	42.01	27.64	42.71	28.34	60.00	50.00	-17.29	-21.66

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

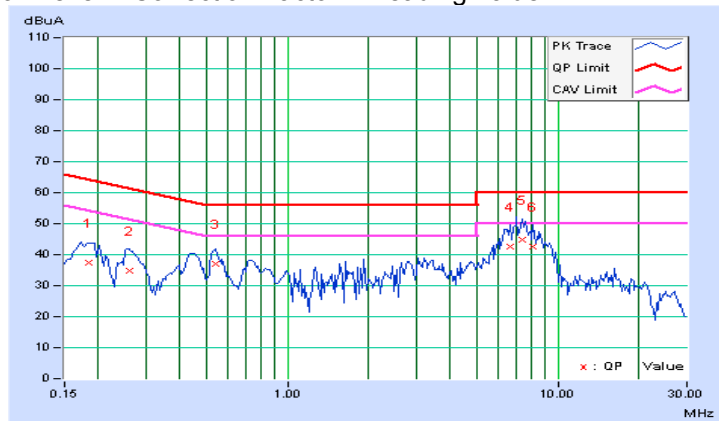


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.18125	0.25	35.97	19.47	36.22	19.72	64.43	54.43	-28.21	-34.71
2	0.25938	0.28	33.53	17.09	33.81	17.37	61.45	51.45	-27.64	-34.08
3	0.54063	0.31	36.06	25.87	36.37	26.18	56.00	46.00	-19.63	-19.82
4	6.91797	0.68	40.45	25.45	41.13	26.13	60.00	50.00	-18.87	-23.87
5	7.33984	0.70	41.63	26.71	42.33	27.41	60.00	50.00	-17.67	-22.59
6	7.85938	0.73	38.32	22.36	39.05	23.09	60.00	50.00	-20.95	-26.91

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

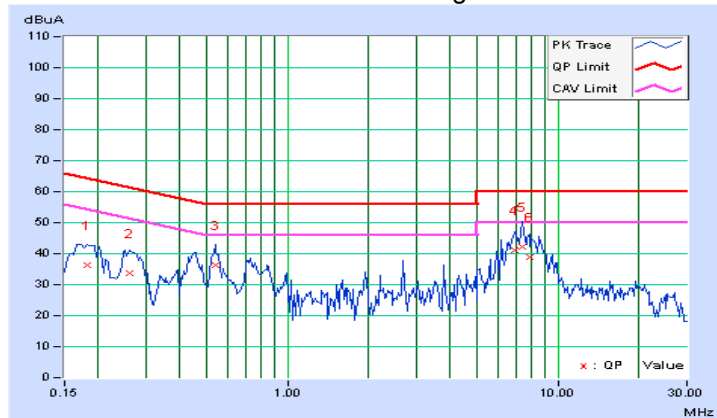


4.3 Frequency Stability

4.3.1 Limits of Frequency Stability Measurement

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.3.2 Test Setup

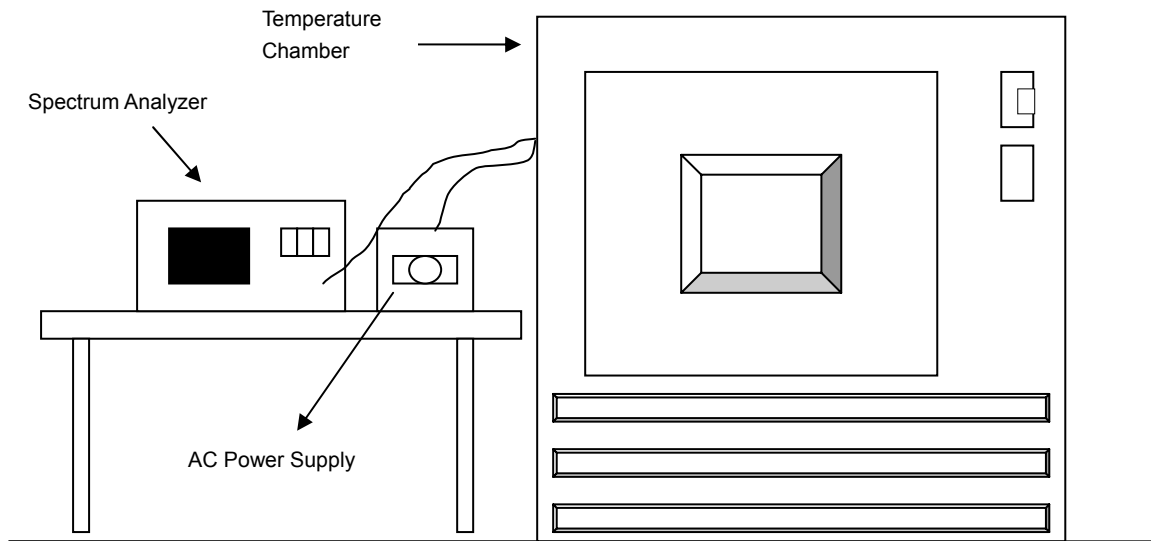

4.3.3 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2015	May 07, 2016
Temperature & Humidity Chamber GIANTFORCE	GTH-150-40-SP-AR	MAA0812-008	Jan. 12, 2015	Jan. 11, 2016

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Sep. 18, 2015

4.3.4 Test Procedure

- a. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- b. Turned the EUT on and coupled its output to a spectrum analyzer.
- c. Turned the EUT off and set the chamber to the highest temperature specified.
- d. Allowed sufficient time (approximately 30 min) for the temperature of the chamber to stabilize then turned the EUT on and measured the operating frequency after 2, 5, and 10 minutes.
- e. Repeated step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

Same as Item 4.1.6.

4.3.7 Test Results

Frequency Stability Versus Temp.									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	120	13.55997	-0.00022	13.55997	-0.00022	13.55998	-0.00015	13.55997	-0.00022
40	120	13.55997	-0.00022	13.55997	-0.00022	13.55997	-0.00022	13.55997	-0.00022
30	120	13.56005	0.00037	13.56005	0.00037	13.56004	0.00029	13.56005	0.00037
20	120	13.56	0.00000	13.55999	-0.00007	13.56	0.00000	13.56	0.00000
10	120	13.55996	-0.00029	13.55997	-0.00022	13.55998	-0.00015	13.55997	-0.00022
0	120	13.56003	0.00022	13.56005	0.00037	13.56004	0.00029	13.56004	0.00029
-10	120	13.56005	0.00037	13.56006	0.00044	13.56006	0.00044	13.56005	0.00037
-20	120	13.55993	-0.00052	13.55994	-0.00044	13.55994	-0.00044	13.55993	-0.00052


Frequency Stability Versus Voltage									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	138	13.56	0.00000	13.55999	-0.00007	13.56	0.00000	13.56	0.00000
	120	13.56	0.00000	13.55999	-0.00007	13.56	0.00000	13.56	0.00000
	102	13.56	0.00000	13.55999	-0.00007	13.56	0.00000	13.56	0.00000

4.4 20dB bandwidth

4.4.1 Limits of 20dB BANDWIDTH Measurement

The 20dB bandwidth shall be specified in operating frequency band.

4.4.2 Test Setup



4.4.3 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	June 26, 2015	June 25, 2016

- NOTE:**
1. The test was performed in Oven room B.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: Sep. 18, 2015

4.4.4 Test Procedures

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1kHz RBW and 3kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.4.5 Deviation from Test Standard


No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.1.6.

4.4.7 Test Results

20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	Pass/Fail
13.478529 MHz	13.71156 MHz	13.11 – 14.01	PASS

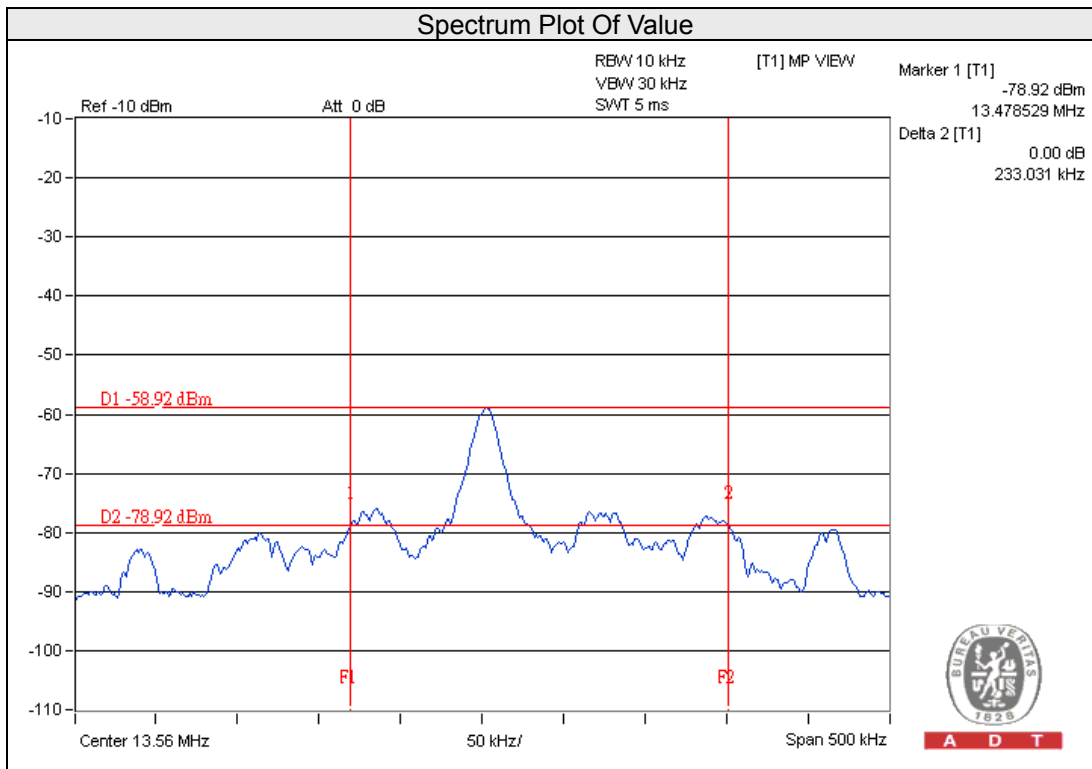

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).



Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---