

**F C C -****TEST REPORT****REPORT NO.: 48419B**

**FCC – Test Report**Date: 2007-09-17**No. 48419B**

Page 2 of 13

**FCC listed testlab  
acc. to Section 2.948 of the FCC - Rules****in compliance with the requirements of  
ANSI C63.4 - 2003****Product** : Wireless Head Phone**Product Class** : Low Power Communication  
Device Receiver**Brand Name** : -**Model** : 50117**Importer** : KIN SUN ELECTRONICS LTD.

## FCC – Test Report

Date: 2007-09-17

No. 48419B

Page 3 of 13

### TABLE OF CONTENTS

- 1. Cover sheet**
- 2. Introduction**
- 3. Table of Contents**
- 4. Laboratory Report**
- 5. Test Location and Summary of Testresults**
- 6. Test Equipment List**
- 7. Radiated Emission Test Setup**
- 8. Conducted Emission Test Setup**
- 9. Test Procedure**
- 10. Test Results**
- 11-12. Measurement Data**
- 13. Photo of sample**

## FCC – Test Report

Date: 2007-09-17

No. 48419B

Page 4 of 13

## LABORATORY - REPORT

**APPLICANT:** KIN SUN ELECTRONICS LIMITED  
**ADDRESS:** Unit P, 4/F., Haribest Ind. Building  
 45-47 Au Pui Wan Street  
 Fo Tan, Shatin, N.T.  
 Hong Kong

**DATE OF SAMPLE RECEIVED:** 2007-07-09

**DATE OF TESTING:** 2007-09-12 to 2007-09-17

**DESCRIPTION OF SAMPLE:**


Product: Wireless Head Phone  
 Product class: Low Power Communication Device Receiver  
 Model number: 50117  
 Rating: DC 3.7V (Rechargeable battery)

**CONDITION OF TEST SAMPLE:** The received sample was under good condition.

**INVESTIGATIONS REQUESTED:** Measurements to the relevant clauses of F.C.C. Rules and Regulations Part 15 Subpart B – ‘Unintentional Radiators’.

**RESULTS:** See the attached sheets.

**CONCLUSIONS** From the measurement data obtained, the tested sample was considered to have COMPLIED with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.



Authorized Signature

## FCC – Test Report

Date: 2007-09-17

No. 48419B

Page 5 of 13

### Test Location

International Electrical Certification Centre Ltd.  
Unit 602-605, 31 Lok Yip Road, On Lok Tsuen, Fanling, N.T., Hong Kong  
Tel : +852 23052570  
Fax : +852 27564480  
Email : [info@iecc.com.hk](mailto:info@iecc.com.hk)

### Summary of Test Results

#### Radiated Emission:

Test result: O.K.  
Test data: See attached data sheet

#### Conducted Emission:

Test result: Not Applicable  
Test data: Not Applicable

**FCC – Test Report**Date: 2007-09-17**No. 48419B**

Page 6 of 13

**TEST EQUIPMENT LIST**

Equipment	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Date
Test Receiver	Rohde & Schwarz	ESCS 30	100388	12/4/2007	11/4/2008
Antenna	Schaffner	CBL6111C	2791	25/05/2005	24/05/2008
Antenna Mast System	Schwarzbeck	AM9104	--	--	--
Turntable with Controller	Drehtisch	DT312	--	--	--
Spectrum Analyzer with Q. Peak	Advantest	R3132	140101852	16/11/2005	15/11/2007


## FCC – Test Report

Date: 2007-09-17

No. 48419B

Page 7 of 13

## Radiated Emission Test Setup (3 m diatance) (&gt; 30MHz)

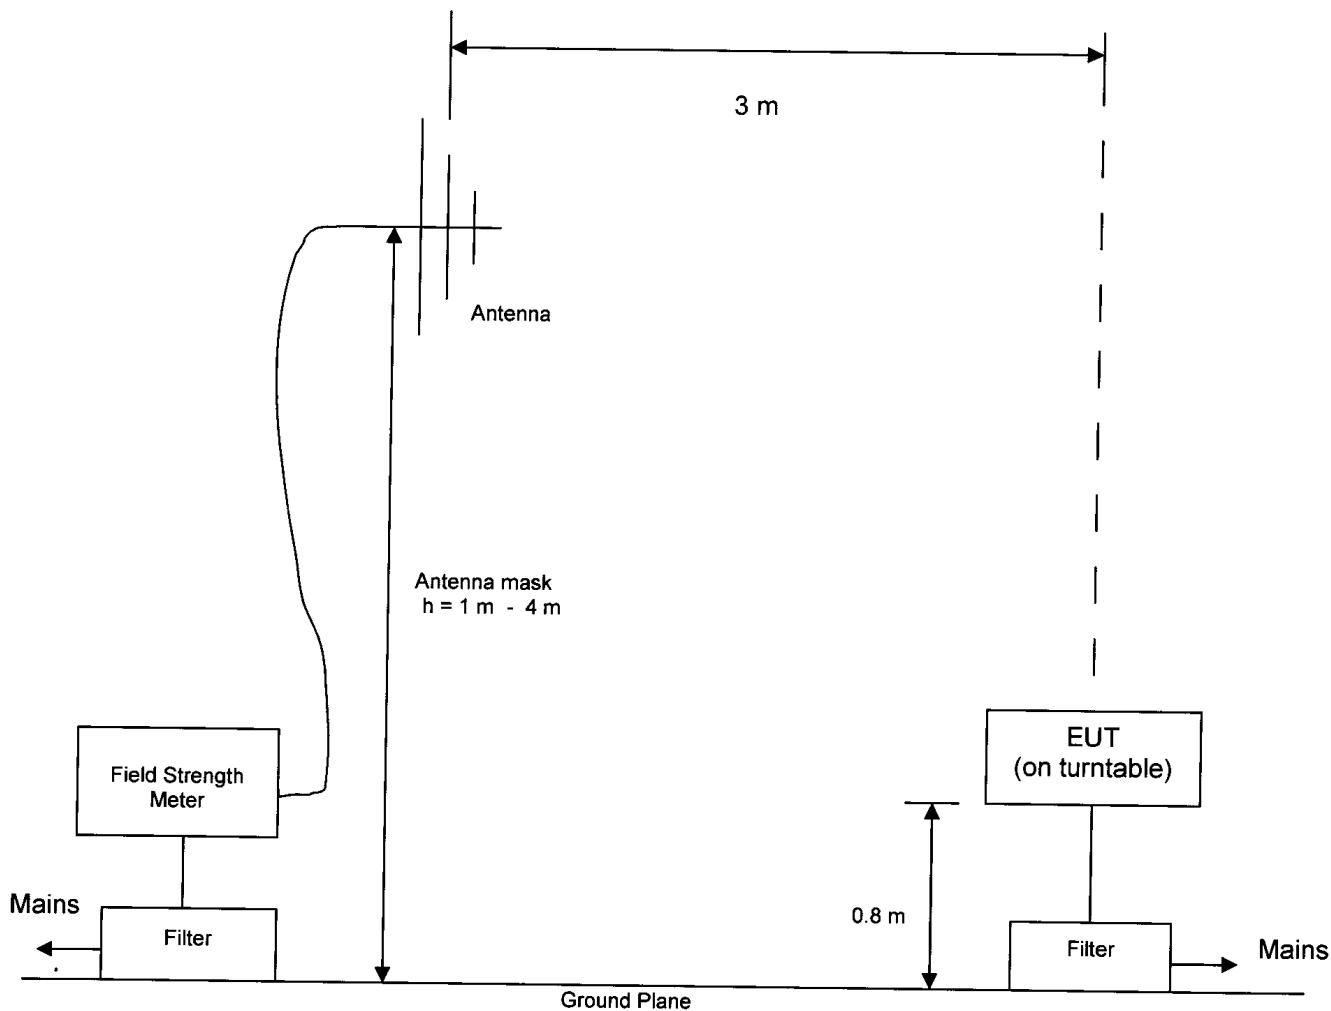


## FCC – Test Report

Date: 2007-09-17

No. 48419B

Page 8 of 13

## Conducted Emission Test Setup

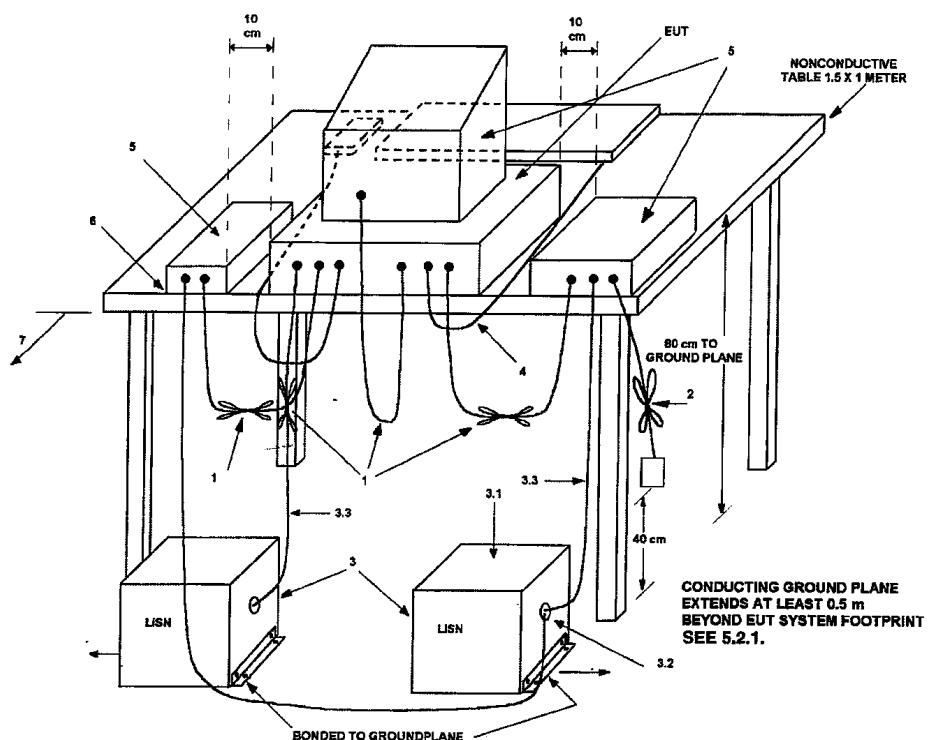

**LEGEND:**

- 1) Interconnecting cables that hang closer than 40 cm to the groundplane shall be folded back and forth in the center forming a bundle 30 to 40 cm long (see 6.1.4 and 11.2.4).
- 2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see 6.1.4).
- 3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50 \Omega$ . LISN can be placed on top of, or immediately beneath, reference groundplane (see 5.2.3 and 7.2.1).
  - 3.1) All other equipment powered from additional LISN(s).
  - 3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - 3.3) LISN at least 80 cm from nearest part of EUT chassis.
- 4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use (See 6.2.1.3 and 11.2.4).
- 5) Non-EUT components of EUT system being tested (see also Figure 13).
- 6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop (see 6.2.1.1 and 6.2.1.2).
- 7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the groundplane (see 5.2.2 for options).

## FCC – Test Report

Date: 2007-09-17

No. 48419B

Page 9 of 13

## Test Procedure

### Radiated Emission :

The EUT was tested according to ANSI 63.4-2003 for the requirements of FCC Part 15 Subpart C Section 15.209.

During the test, the sample was placed on a turn table and operated with the fully charged internal rechargeable battery. The table is 0.8 meter above the reference ground plane on the Open Aera Test Site and can rotate 360 degrees to determine the position of the maximum emission level. A broad-band antenna for the frequency range 30 - 1000 MHz, connected with 10 meters coaxial cable to the test receiver was used for measurement. The antenna is capable of measuring both horizontal and vertical polarizations. The antenna was raised from 1 to 4 meters to find out the maximum emission level from the EUT.

An initial pre-scan was performed to find out the maximum emission level of the sample placed at 3 orthogonal planes. Final measurement (30 MHz –1000 MHz) was then performed to record the data for the emissions under worst-case condition for combination of the antenna orientation / height and turn table position.

Note : The Open Aera Test Site located at IECC was placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules (FCC Registration No. : 97774).

### Conducted Emission :

Not Applicable

**FCC – Test Report**Date: 2007-09-17**No. 48419B**

Page 10 of 13

**Test Results****Radiated Emission :**

Test Requirement: FCC Part 15 Subpart B Section 15.209  
Test Method: ANSI C63.4 : 2003  
Deviations from Standard Test Method: Nil  
Frequency Range: 30MHz – 1000MHz  
Measurement Distance: 3 m  
Detector: Quasi-Peak

Refer to page 11 for measurement data.

**Conducted Emission :**

Not Applicable

# Interference Radiation

Date : 2007-09-17

Page 11 of 13

## Measurement of Radiated Emissions

Acc: FCC Part 15 Subpart B (15.109 Class B)

IECC Ref:	48419B
Model:	50117
Applicant:	KIN SUN ELECTRONICS LIMITED
Ser.Nr.:	--
Set under test:	Wireless Head Phone
Connected sets:	-
Operating mode:	Operate

Test Equipment  
 Receiver: Rohde & Schwarz ESCS 30  
 Antenna: Schaffner CBL61111C

Frequency (MHz)	Horz. Reading dB(µV)	Vert. Reading dB(µV)	Corr. Factor (dB)	Horiz. Test Result dB(µV/m)	Vert. Test Result dB(µV/m)	Limit dB(µV/m)
30	< 16	< 16	17.6	< 33.6	< 33.6	40.0
60	< 16	< 16	5.0	< 21.0	< 21.0	40.0
80	< 16	< 16	7.2	< 23.2	< 23.2	40.0
100	< 16	< 16	10.1	< 26.1	< 26.1	43.5
200	< 16	< 16	8.6	< 24.6	< 24.6	43.5
500	< 16	< 16	19.1	< 35.1	< 35.1	46.0
700	< 16	< 16	22.4	< 38.4	< 38.4	46.0
1000	< 16	< 16	27.3	< 43.3	< 43.3	54.0

Note : 1. All the recorded readings are in quasi-peak values.

2. No significant data were recorded with the sample positioned in all 3 axis during the test.

Operator : KS

## FCC – Test Report

Date: 2007-09-17

No. 48419B

Page 12 of 13


## Coherer Plot at fundamental frequency

**Superregenerative Receiver** : According to ANSI C63.4-2003 clause 12.1.1.1, a signal generator was set to the unit under test operating frequency. An un-modulated continuous wave (CW) signal was radiated at the super-regenerative receiver operating frequency to cohere the characteristic broadband emissions from the receiver.

**Sample location:** Less than 0.5m from the measuring antenna

**Applied signal:** - 60dBm (non-modulated, 49.86 MHz)

**Remark:** Self-cohere

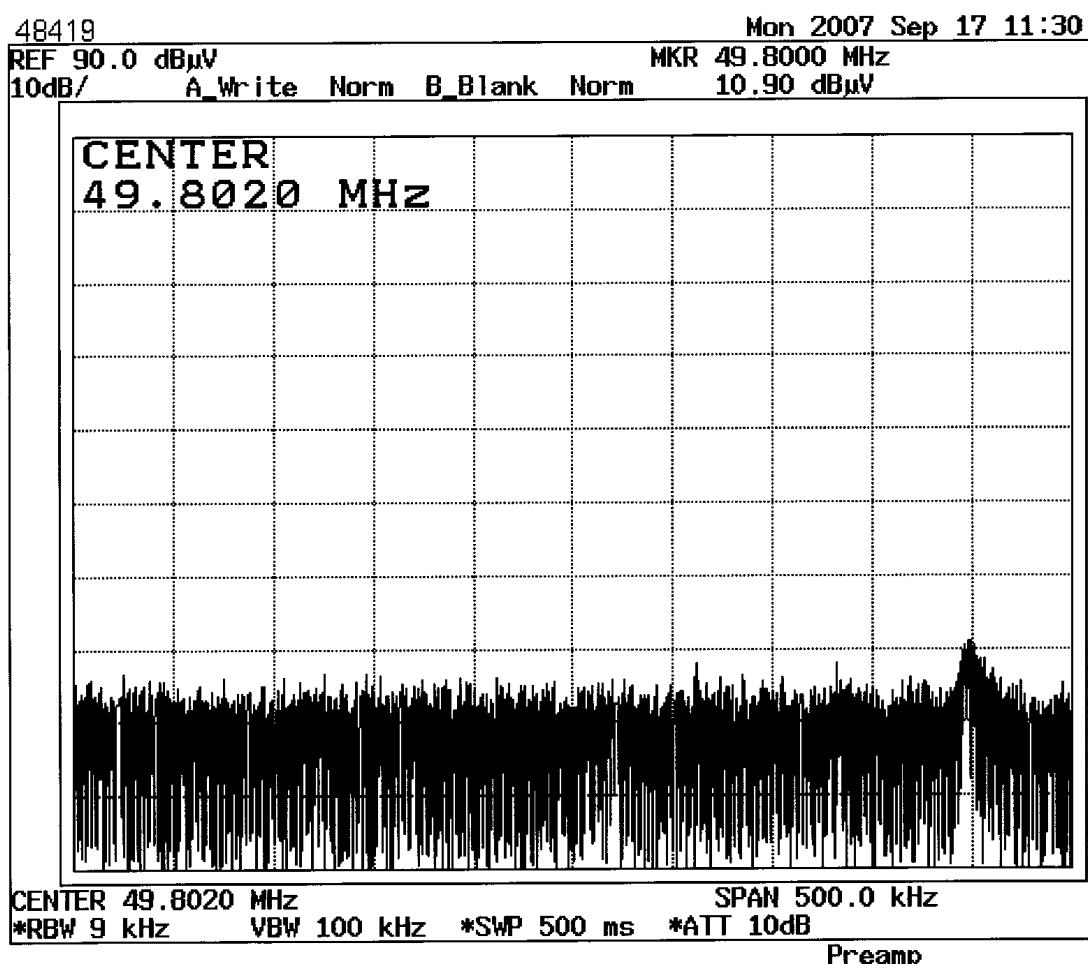

All emissions observed complies with FCC limits.

**FCC – Test Report**Date: 2007-09-17**No. 48419B**

Page 13 of 13

**Photo of Sample**