

## FCC Test Report

**Report No.:** RFBCWK-WTW-P20080468

**FCC ID:** MSQ-RTN5000

**Test Model:** RT-N19

**Series Model:** RT-N600P (refer to item 3.1 for more details)

**Received Date:** Aug. 24, 2020

**Test Date:** Sep. 03 ~ Sep. 11, 2020

**Issued Date:** Sep. 25, 2020

**Applicant:** ASUSTeK Computer Inc

**Address:** No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan (R.O.C.)

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan

**FCC Registration /**  
**Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record .....</b>	<b>4</b>
<b>1 Certificate of Conformity .....</b>	<b>5</b>
<b>2 Summary of Test Results.....</b>	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Modification Record .....	6
<b>3 General Information .....</b>	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal .....	11
3.4 Description of Support Units .....	12
3.4.1 Configuration of System under Test .....	12
3.5 General Description of Applied Standards and References .....	12
<b>4 Test Types and Results .....</b>	<b>13</b>
4.1 Radiated Emission and Bandedge Measurement .....	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	13
4.1.2 Test Instruments .....	14
4.1.3 Test Procedures.....	15
4.1.4 Deviation from Test Standard .....	16
4.1.5 Test Set Up .....	16
4.1.6 EUT Operating Conditions.....	17
4.1.7 Test Results .....	18
4.2 Conducted Emission Measurement.....	32
4.2.1 Limits of Conducted Emission Measurement .....	32
4.2.2 Test Instruments .....	32
4.2.3 Test Procedures.....	33
4.2.4 Deviation from Test Standard .....	33
4.2.5 Test Setup.....	33
4.2.6 EUT Operating Conditions.....	33
4.2.7 Test Results .....	34
4.3 6 dB Bandwidth Measurement.....	36
4.3.1 Limits of 6 dB Bandwidth Measurement.....	36
4.3.2 Test Setup.....	36
4.3.3 Test Instruments .....	36
4.3.4 Test Procedure .....	36
4.3.5 Deviation from Test Standard .....	36
4.3.6 EUT Operating Conditions.....	36
4.3.7 Test Results .....	37
4.4 Occupied Bandwidth Measurement.....	39
4.4.1 Test Setup.....	39
4.4.2 Test Instruments .....	39
4.4.3 Test Procedure .....	39
4.4.4 Deviation from Test Standard .....	39
4.4.5 EUT Operating Conditions.....	39
4.4.6 Test Results .....	40
4.5 Conducted Output Power Measurement .....	42
4.5.1 Limits of Conducted Output Power Measurement.....	42
4.5.2 Test Setup.....	42
4.5.3 Test Instruments .....	42
4.5.4 Test Procedures.....	42
4.5.5 Deviation from Test Standard .....	42
4.5.6 EUT Operating Conditions.....	42
4.5.7 Test Results .....	43

4.6 Power Spectral Density Measurement .....	44
4.6.1 Limits of Power Spectral Density Measurement.....	44
4.6.2 Test Setup.....	44
4.6.3 Test Instruments .....	44
4.6.4 Test Procedure .....	44
4.6.5 Deviation from Test Standard .....	44
4.6.6 EUT Operating Condition .....	44
4.6.7 Test Results .....	45
4.7 Conducted Out of Band Emission Measurement .....	50
4.7.1 Limits of Conducted Out of Band Emission Measurement.....	50
4.7.2 Test Setup.....	50
4.7.3 Test Instruments .....	50
4.7.4 Test Procedure .....	50
4.7.5 Deviation from Test Standard .....	50
4.7.6 EUT Operating Condition .....	50
4.7.7 Test Results .....	51
<b>5 Pictures of Test Arrangements.....</b>	<b>83</b>
<b>Annex A- Band Edge Measurement .....</b>	<b>84</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>89</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBCWK-WTW-P20080468	Original Release	Sep. 25, 2020

## 1 Certificate of Conformity

**Product:** wireless router

**Brand:** ASUS

**Test Model:** RT-N19

**Series Model:** RT-N600P

**Sample Status:** Mass product


**Applicant:** ASUSTeK Computer Inc

**Test Date:** Sep. 03 ~ Sep. 11, 2020

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.



**Prepared by :** \_\_\_\_\_, **Date:** Sep. 25, 2020  
Lena Wang / Specialist



**Approved by :** \_\_\_\_\_, **Date:** Sep. 25, 2020  
Dylan Chiou / Senior Project Engineer

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -15.53 dB at 0.15400 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -1.3 dB at 2390.00 MHz and 2483.50 MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note:

- For 2.4G band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.79 dB
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
	1 GHz ~ 18 GHz	2.26 dB
Radiated Emissions above 1 GHz	18 GHz ~ 40 GHz	1.94 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	wireless router
<b>Brand</b>	ASUS
<b>Test Model</b>	RT-N19
<b>Series Model</b>	RT-N600P
<b>Model Difference</b>	Refer to Note
<b>Status of EUT</b>	Mass product
<b>Power Supply Rating</b>	12.0 Vdc (adapter)
<b>Modulation Type</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>Modulation Technology</b>	DSSS, OFDM
<b>Transfer Rate</b>	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to 600.0 Mbps
<b>Operating Frequency</b>	2412 ~ 2462 MHz
<b>Number of Channel</b>	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
<b>Output Power</b>	342.244 mW
<b>Antenna Type</b>	Dipole antenna with 5 dBi gain
<b>Antenna Connector</b>	N/A
<b>Accessory Device</b>	Refer to Note as below
<b>Data Cable Supplied</b>	Refer to Note as below

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides four completed transmitters and four receivers.

Modulation Mode	Tx Function
802.11b	4TX
802.11g	4TX
802.11n (HT20)	4TX
802.11n (HT40)	4TX

2. All models are listed as below. The model of the RT-N19 was chosen for final test.

Brand	Model	Difference
ASUS	RT-N19	For marketing purpose.
	RT-N600P	

3. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter	ASIAN POWER DEVICES INC.	WB-12G12FU	I/P: 100-240 Vac, 50/60 Hz O/P: 12 Vdc, 1 A

4. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

7 channels are provided for 802.11n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	7	2442
4	2427	8	2447
5	2432	9	2452
6	2437		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where      RE≥1G: Radiated Emission above 1 GHz      RE<1G: Radiated Emission below 1 GHz  
               PLC: Power Line Conducted Emission      APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.  
 NOTE: “-”means no effect.

#### Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

#### Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11n (HT20)	1 to 11	1	OFDM	BPSK	6.5

#### Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11n (HT20)	1 to 11	1	OFDM	BPSK	6.5

### Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 11	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 9	3, 9	OFDM	BPSK	13.5

### Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

### Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested by
RE≥1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Greg Lin
RE<1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Greg Lin
PLC	25 deg. C, 65 % RH	120 Vac, 60 Hz	Greg Lin
APCM	25 deg. C, 65 % RH	120 Vac, 60 Hz	Ivan Tseng

### **3.3 Duty Cycle of Test Signal**


Duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.

**802.11b:** Duty cycle = 32.15/32.3 = 0.995

**802.11g:** Duty cycle = 5.335/5.42 = 0.984

**802.11n (HT20):** Duty cycle = 4.935/5.015 = 0.984

**802.11n (HT40):** Duty cycle = 2.407/2.457 = 0.98

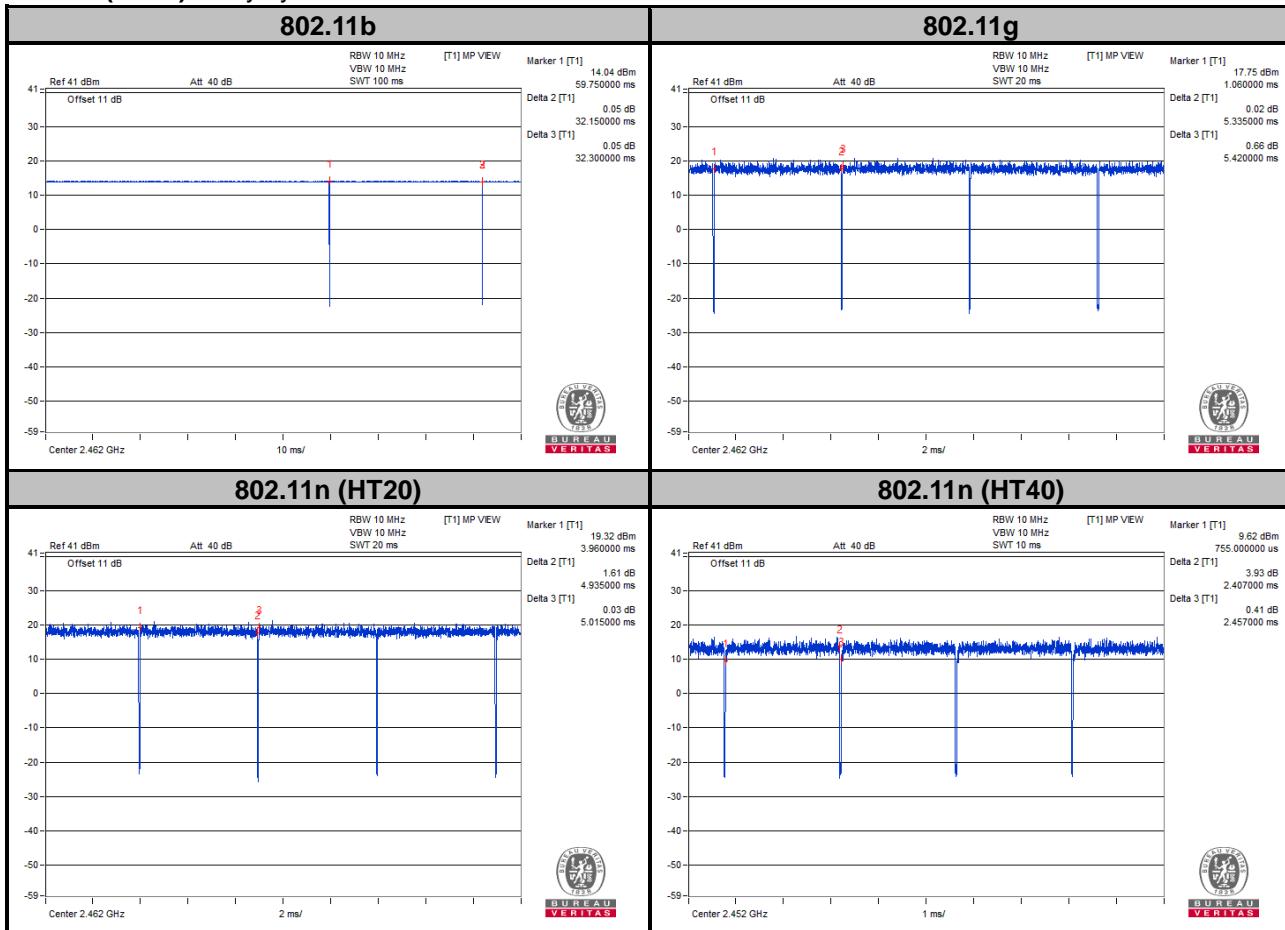

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


No.	Product	Brand	Model No.	Serial No.	FCC ID
A	Notebook	Lenovo	81A4	YD02TWF5	PPD-QCNFA435
B	Load	N/A	N/A	N/A	N/A

No.	Signal Cable Description of The Above Support Units
1.	LAN Cable: 10m
2.	LAN Cable*2: 1.5m

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Items A acted as communication partners to transfer data.

#### 3.4.1 Configuration of System under Test

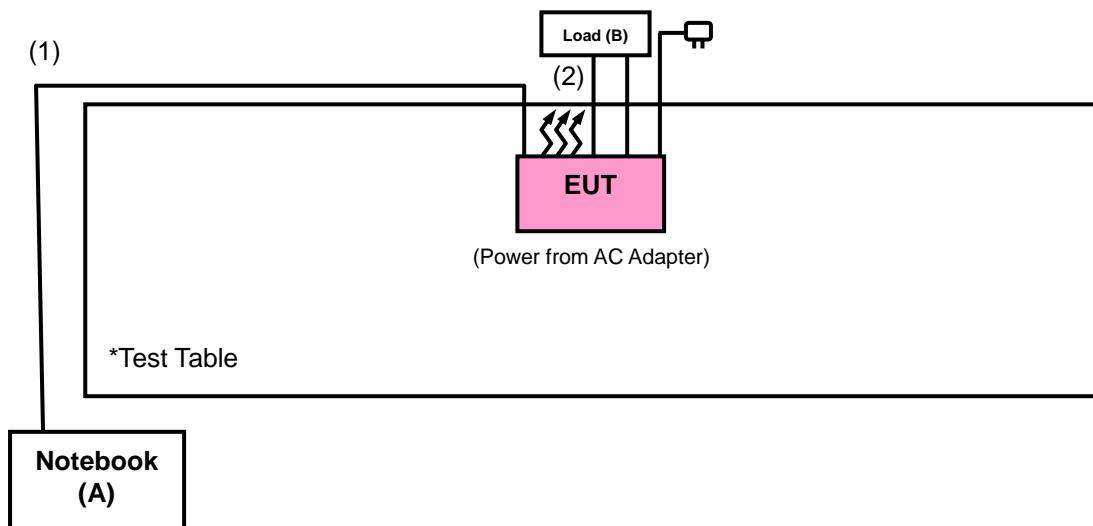

### 3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

#### Test Standard:

**FCC Part 15, Subpart C (15.247)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

#### References Test Guidance:

**KDB 558074 D01 Meas Guidance v05r02**

**KDB 662911 D01 Multiple Transmitter Output v02r01**

All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB<sub>B</sub>V/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 16, 2020	Apr. 15, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jun. 12, 2020	Jun. 11, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Nov. 07, 2019	Nov. 06, 2020
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Nov. 24, 2019	Nov. 23, 2020
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 24, 2019	Nov. 23, 2020
Loop Antenna TESEQ	HLA 6121	45745	Jul. 06, 2020	Jul. 05, 2021
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	Jun. 08, 2020	Jun. 07, 2021
Preamplifier Agilent (Above 1GHz)	8449B	3008A02367	Feb. 18, 2020	Feb. 17, 2021
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104 & EMC104-SM-SM8000	CABLE-CH9-02 (248780+171006)	Jan. 18, 2020	Jan. 17, 2021
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	Jan. 18, 2020	Jan. 17, 2021
RF signal cable WOKEN	8D-FB	Cable-CH9-01	Jun. 08, 2020	Jun. 07, 2021
Software BV ADT	ADT_Radiated_V7.6.15.9.5	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55190007/MY55210005	Jul. 13, 2020	Jul. 12, 2021

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Chamber 10.

#### 4.1.3 Test Procedures

##### For Radiated Emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

##### For Radiated Emission above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98 %) or 10 Hz (Duty cycle  $\geq 98 \%$ ) for Average detection (AV) at frequency above 1 GHz.  
(11b: RBW = 1 MHz, VBW = 10 Hz ; 11g: RBW = 1 MHz, VBW = 10 Hz ;  
11n (HT20): RBW = 1 MHz, VBW = 10 Hz ; 11n (HT40): RBW = 1 MHz, VBW = 1 kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Set Up


##### <Radiated Emission below 30 MHz>

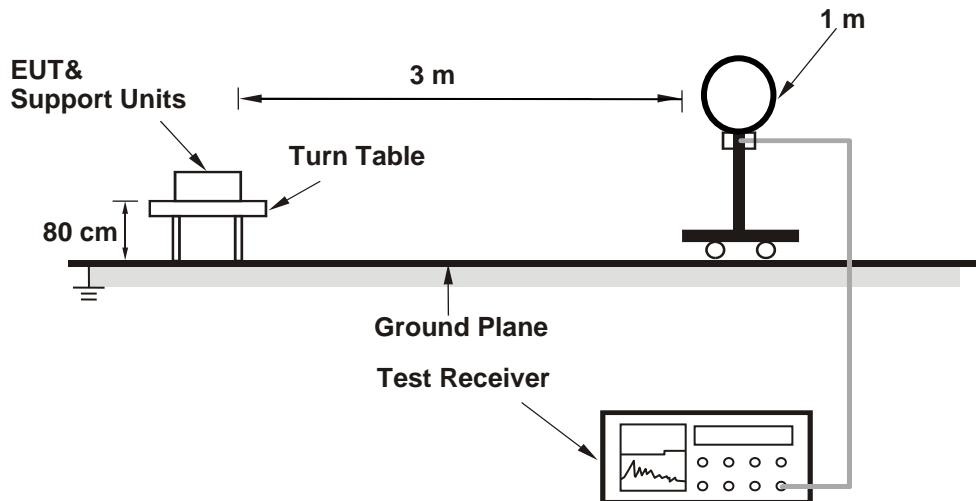

##### <Radiated Emission 30 MHz to 1 GHz>

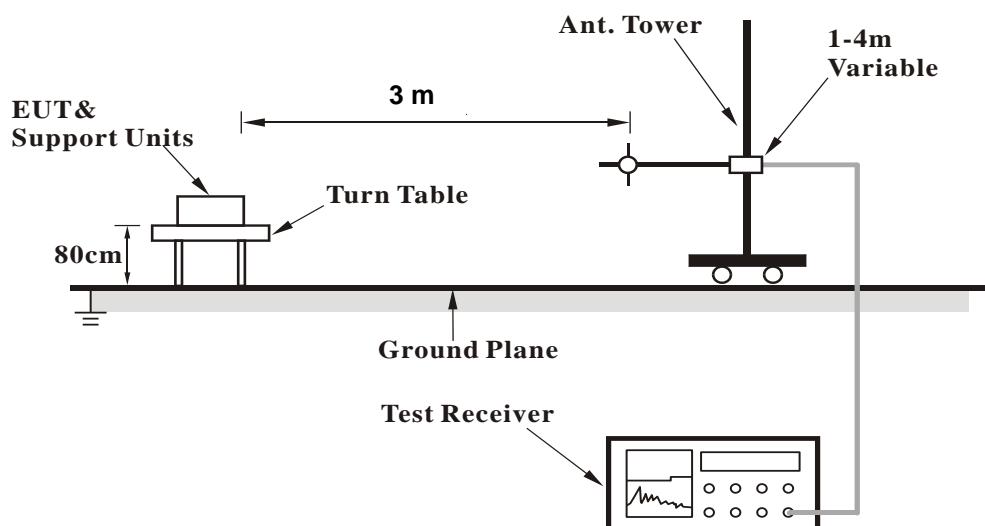

<Radiated Emission above 1 GHz>

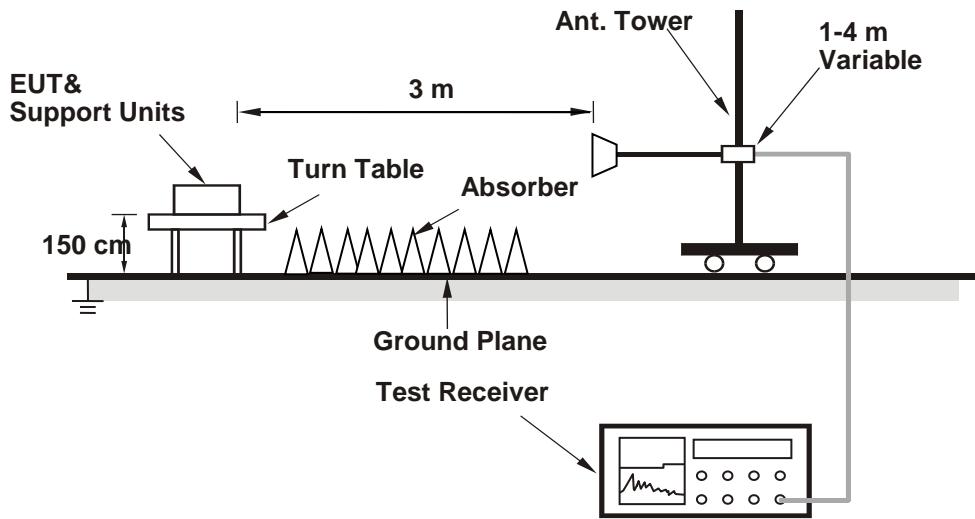

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.

## 4.1.7 Test Results

**802.11b**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.6 PK	74.0	-18.4	1.33 H	115	24.4	31.2
2	2390.00	43.4 AV	54.0	-10.6	1.33 H	115	12.2	31.2
3	*2412.00	98.3 PK			1.33 H	115	67.2	31.1
4	*2412.00	94.6 AV			1.33 H	115	63.5	31.1
5	4824.00	51.6 PK	74.0	-22.4	3.91 H	247	49.8	1.8
6	4824.00	46.8 AV	54.0	-7.2	3.91 H	247	45.0	1.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.5 PK	74.0	-17.5	1.76 V	48	25.3	31.2
2	2390.00	44.0 AV	54.0	-10.0	1.76 V	48	12.8	31.2
3	*2412.00	109.9 PK			1.76 V	48	78.8	31.1
4	*2412.00	106.4 AV			1.76 V	48	75.3	31.1
5	4824.00	53.9 PK	74.0	-20.1	3.55 V	3	52.1	1.8
6	4824.00	51.5 AV	54.0	-2.5	3.55 V	3	49.7	1.8

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>		Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz			Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	99.3 PK			1.42 H	108	68.2	31.1
2	*2437.00	95.5 AV			1.42 H	108	64.4	31.1
3	4874.00	51.7 PK	74.0	-22.3	3.87 H	236	49.7	2.0
4	4874.00	47.2 AV	54.0	-6.8	3.87 H	236	45.2	2.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.0 PK			1.60 V	21	79.9	31.1
2	*2437.00	107.3 AV			1.60 V	21	76.2	31.1
3	4874.00	54.0 PK	74.0	-20.0	3.70 V	10	52.0	2.0
4	4874.00	51.8 AV	54.0	-2.2	3.70 V	10	49.8	2.0

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>		Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz			Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.2 PK			1.38 H	116	69.1	31.1
2	*2462.00	96.5 AV			1.38 H	116	65.4	31.1
3	2483.50	56.0 PK	74.0	-18.0	1.38 H	116	24.8	31.2
4	2483.50	44.0 AV	54.0	-10.0	1.38 H	116	12.8	31.2
5	4924.00	51.5 PK	74.0	-22.5	3.92 H	236	49.4	2.1
6	4924.00	46.9 AV	54.0	-7.1	3.92 H	236	44.8	2.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.1 PK			1.89 V	52	81.0	31.1
2	*2462.00	108.4 AV			1.89 V	52	77.3	31.1
3	2483.50	57.9 PK	74.0	-16.1	1.89 V	52	26.7	31.2
4	2483.50	44.5 AV	54.0	-9.5	1.89 V	52	13.3	31.2
5	4924.00	53.9 PK	74.0	-20.1	3.41 V	12	51.8	2.1
6	4924.00	51.6 AV	54.0	-2.4	3.41 V	12	49.5	2.1

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

**802.11g**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.5 PK	74.0	-11.5	1.33 H	117	31.3	31.2
2	2390.00	45.2 AV	54.0	-8.8	1.33 H	117	14.0	31.2
3	*2412.00	106.6 PK			1.33 H	117	75.5	31.1
4	*2412.00	96.6 AV			1.33 H	117	65.5	31.1
5	4824.00	56.1 PK	74.0	-17.9	3.86 H	245	54.3	1.8
6	4824.00	44.0 AV	54.0	-10.0	3.86 H	245	42.2	1.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.7 PK	74.0	-4.3	1.77 V	42	38.5	31.2
2	2390.00	52.6 AV	54.0	-1.4	1.77 V	42	21.4	31.2
3	*2412.00	118.5 PK			1.77 V	42	87.4	31.1
4	*2412.00	108.5 AV			1.77 V	42	77.4	31.1
5	4824.00	61.4 PK	74.0	-12.6	3.49 V	7	59.6	1.8
6	4824.00	48.6 AV	54.0	-5.4	3.49 V	7	46.8	1.8

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>		Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz			Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.7 PK			1.46 H	127	78.6	31.1
2	*2437.00	99.7 AV			1.46 H	127	68.6	31.1
3	4874.00	58.5 PK	74.0	-15.5	3.85 H	253	56.5	2.0
4	4874.00	46.8 AV	54.0	-7.2	3.85 H	253	44.8	2.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	121.5 PK			1.94 V	39	90.4	31.1
2	*2437.00	111.5 AV			1.94 V	39	80.4	31.1
3	4874.00	62.3 PK	74.0	-11.7	3.62 V	8	60.3	2.0
4	4874.00	50.6 AV	54.0	-3.4	3.62 V	8	48.6	2.0

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>		Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz			Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.4 PK			1.31 H	119	72.3	31.1
2	*2462.00	93.3 AV			1.31 H	119	62.2	31.1
3	2483.50	60.4 PK	74.0	-13.6	1.31 H	119	29.2	31.2
4	2483.50	44.1 AV	54.0	-9.9	1.31 H	119	12.9	31.2
5	4924.00	56.0 PK	74.0	-18.0	3.85 H	239	53.9	2.1
6	4924.00	43.9 AV	54.0	-10.1	3.85 H	239	41.8	2.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.4 PK			1.70 V	58	84.3	31.1
2	*2462.00	105.4 AV			1.70 V	58	74.3	31.1
3	2483.50	68.4 PK	74.0	-5.6	1.70 V	58	37.2	31.2
4	2483.50	52.3 AV	54.0	-1.7	1.70 V	58	21.1	31.2
5	4924.00	60.9 PK	74.0	-13.1	3.57 V	7	58.8	2.1
6	4924.00	48.5 AV	54.0	-5.5	3.57 V	7	46.4	2.1

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

**802.11n (HT20)**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.0 PK	74.0	-17.0	1.53 H	117	25.8	31.2
2	2390.00	44.5 AV	54.0	-9.5	1.53 H	117	13.3	31.2
3	*2412.00	103.8 PK			1.53 H	117	72.7	31.1
4	*2412.00	93.7 AV			1.53 H	117	62.6	31.1
5	4824.00	56.2 PK	74.0	-17.8	3.73 H	251	54.4	1.8
6	4824.00	43.4 AV	54.0	-10.6	3.73 H	251	41.6	1.8

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.0 PK	74.0	-5.0	1.54 V	40	37.8	31.2
2	2390.00	52.7 AV	54.0	-1.3	1.54 V	40	21.5	31.2
3	*2412.00	115.5 PK			1.54 V	40	84.4	31.1
4	*2412.00	105.5 AV			1.54 V	40	74.4	31.1
5	4824.00	60.2 PK	74.0	-13.8	3.38 V	9	58.4	1.8
6	4824.00	47.5 AV	54.0	-6.5	3.38 V	9	45.7	1.8

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>		Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz			Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.2 PK			1.52 H	128	78.1	31.1
2	*2437.00	99.2 AV			1.52 H	128	68.1	31.1
3	4874.00	57.8 PK	74.0	-16.2	3.69 H	247	55.8	2.0
4	4874.00	45.2 AV	54.0	-8.8	3.69 H	247	43.2	2.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	121.0 PK			1.85 V	17	89.9	31.1
2	*2437.00	111.1 AV			1.85 V	17	80.0	31.1
3	4874.00	61.4 PK	74.0	-12.6	3.58 V	6	59.4	2.0
4	4874.00	48.6 AV	54.0	-5.4	3.58 V	6	46.6	2.0

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>		Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz			Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.1 PK			1.28 H	126	72.0	31.1
2	*2462.00	93.0 AV			1.28 H	126	61.9	31.1
3	2483.50	58.1 PK	74.0	-15.9	1.28 H	126	26.9	31.2
4	2483.50	44.2 AV	54.0	-9.8	1.28 H	126	13.0	31.2
5	4924.00	49.5 PK	74.0	-24.5	3.79 H	254	47.4	2.1
6	4924.00	37.7 AV	54.0	-16.3	3.79 H	254	35.6	2.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.9 PK			1.77 V	21	83.8	31.1
2	*2462.00	104.9 AV			1.77 V	21	73.8	31.1
3	2483.50	69.9 PK	74.0	-4.1	1.77 V	21	38.7	31.2
4	2483.50	52.4 AV	54.0	-1.6	1.77 V	21	21.2	31.2
5	4924.00	55.6 PK	74.0	-18.4	3.24 V	11	53.5	2.1
6	4924.00	41.4 AV	54.0	-12.6	3.24 V	11	39.3	2.1

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

**802.11n (HT40)**

<b>CHANNEL</b>	TX Channel 3	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.29 H	111	25.7	31.2
2	2390.00	44.8 AV	54.0	-9.2	1.29 H	111	13.6	31.2
3	*2422.00	97.3 PK			1.29 H	111	66.2	31.1
4	*2422.00	86.5 AV			1.29 H	111	55.4	31.1
5	4844.00	53.7 PK	74.0	-20.3	3.79 H	251	51.8	1.9
6	4844.00	42.3 AV	54.0	-11.7	3.79 H	251	40.4	1.9

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.8 PK	74.0	-9.2	1.86 V	26	33.6	31.2
2	2390.00	52.6 AV	54.0	-1.4	1.86 V	26	21.4	31.2
3	*2422.00	109.1 PK			1.86 V	26	78.0	31.1
4	*2422.00	98.3 AV			1.86 V	26	67.2	31.1
5	4844.00	57.7 PK	74.0	-16.3	3.47 V	6	55.8	1.9
6	4844.00	46.2 AV	54.0	-7.8	3.47 V	6	44.3	1.9

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>		Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz			Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.6 PK			1.55 H	113	70.5	31.1
2	*2437.00	91.7 AV			1.55 H	113	60.6	31.1
3	2483.50	56.8 PK	74.0	-17.2	1.55 H	113	25.6	31.2
4	2483.50	44.5 AV	54.0	-9.5	1.55 H	113	13.3	31.2
5	4874.00	55.4 PK	74.0	-18.6	3.76 H	243	53.4	2.0
6	4874.00	43.2 AV	54.0	-10.8	3.76 H	243	41.2	2.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.3 PK			2.37 V	7	82.2	31.1
2	*2437.00	103.5 AV			2.37 V	7	72.4	31.1
3	2483.50	68.6 PK	74.0	-5.4	2.37 V	7	37.4	31.2
4	2483.50	52.7 AV	54.0	-1.3	2.37 V	7	21.5	31.2
5	4874.00	58.9 PK	74.0	-15.1	3.63 V	11	56.9	2.0
6	4874.00	47.8 AV	54.0	-6.2	3.63 V	11	45.8	2.0

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

<b>CHANNEL</b>	TX Channel 9	<b>DETECTOR FUNCTION</b>		Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz			Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	100.8 PK			1.43 H	117	69.7	31.1
2	*2452.00	90.7 AV			1.43 H	117	59.6	31.1
3	2483.50	57.4 PK	74.0	-16.6	1.43 H	117	26.2	31.2
4	2483.50	44.6 AV	54.0	-9.4	1.43 H	117	13.4	31.2
5	4904.00	54.4 PK	74.0	-19.6	3.67 H	254	52.4	2.0
6	4904.00	42.3 AV	54.0	-11.7	3.67 H	254	40.3	2.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	112.3 PK			2.30 V	41	81.2	31.1
2	*2452.00	102.5 AV			2.30 V	41	71.4	31.1
3	2483.50	68.5 PK	74.0	-5.5	2.30 V	41	37.3	31.2
4	2483.50	52.6 AV	54.0	-1.4	2.30 V	41	21.4	31.2
5	4904.00	58.2 PK	74.0	-15.8	3.63 V	7	56.2	2.0
6	4904.00	46.6 AV	54.0	-7.4	3.63 V	7	44.6	2.0

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

**9 kHz ~ 30 MHz Data:**

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.


**30 MHz ~ 1 GHz Worst-Case Data:**
**802.11n (HT20)**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.97	31.2 QP	40.0	-8.8	1.25 H	116	42.2	-11.0
2	164.83	36.8 QP	43.5	-6.7	1.00 H	116	45.4	-8.6
3	224.97	39.5 QP	46.0	-6.5	1.25 H	1	50.6	-11.1
4	280.26	40.1 QP	46.0	-5.9	1.50 H	101	47.5	-7.4
5	649.83	35.6 QP	46.0	-10.4	1.00 H	1	35.6	0.0
6	936.95	36.3 QP	46.0	-9.7	1.25 H	56	30.9	5.4

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

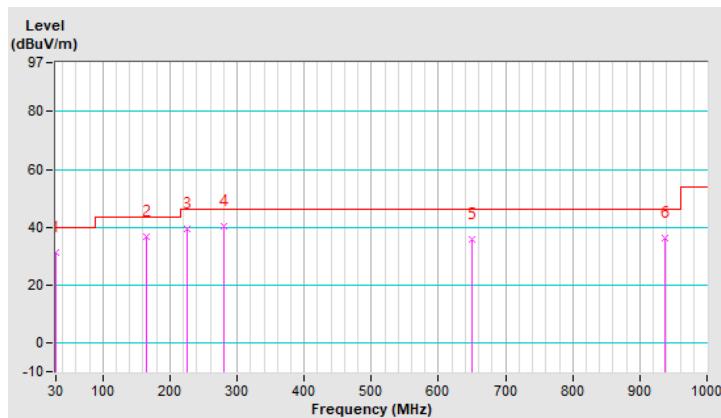


<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	35.2 QP	40.0	-4.8	1.25 V	166	45.7	-10.5
2	124.09	36.2 QP	43.5	-7.3	1.00 V	166	46.9	-10.7
3	225.94	38.0 QP	46.0	-8.0	1.25 V	173	49.1	-11.1
4	277.35	38.5 QP	46.0	-7.5	1.00 V	186	46.0	-7.5
5	526.64	32.1 QP	46.0	-13.9	1.50 V	233	34.7	-2.6
6	800.18	36.5 QP	46.0	-9.5	1.00 V	5	33.7	2.8

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

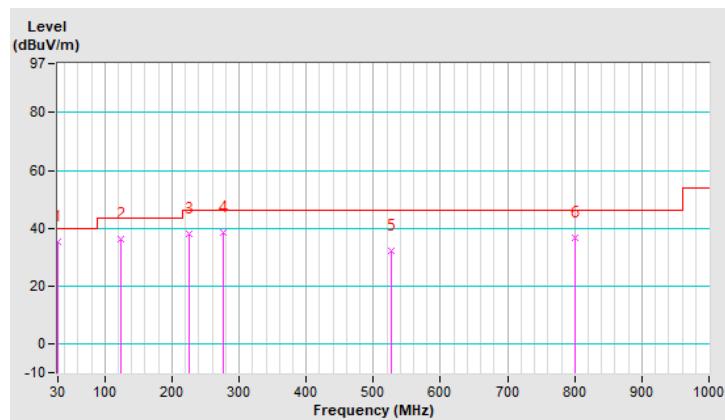

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 11, 2019	Dec. 10, 2020
RF signal cable Woken	5D-FB	Cable-cond1-01	Sep. 04, 2020	Sep. 03, 2021
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 20, 2020	Feb. 19, 2021
V-LISN SCHWARZBECK (Peripheral)	NNBL 8226-2	8226-142	Jul. 31, 2020	Jul. 30, 2021
Software ADT	BV ADT_Cond_V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Shielded Room 1 (Conduction 1).  
 3. The VCCI Site Registration No. is C-12040.

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

**Note:** The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

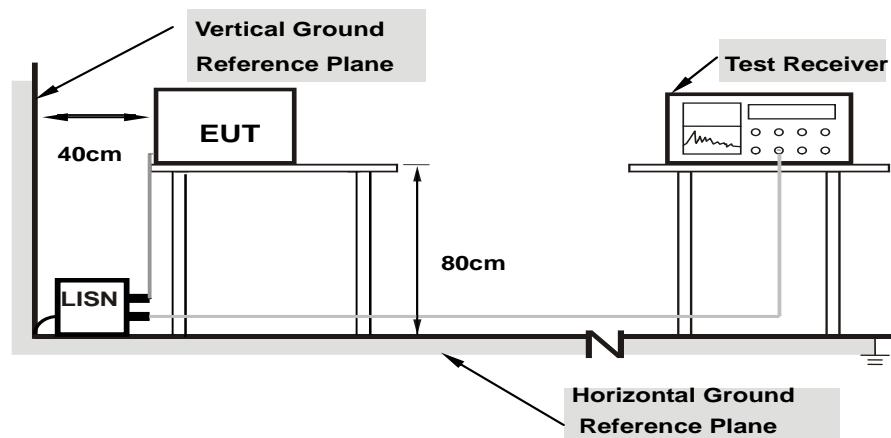

**Note: 1. Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.


#### 4.2.7 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 75%RH
Tested by	Greg Lin	Test Date	2020/9/5

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	<b>0.15400</b>	<b>9.65</b>	<b>40.60</b>	<b>25.91</b>	<b>50.25</b>	<b>35.56</b>	<b>65.78</b>	<b>55.78</b>	<b>-15.53</b>	<b>-20.22</b>
2	0.17338	9.65	38.65	24.02	48.30	33.67	64.80	54.80	-16.50	-21.13
3	0.24600	9.66	30.79	16.99	40.45	26.65	61.89	51.89	-21.44	-25.24
4	0.33400	9.66	25.33	15.29	34.99	24.95	59.35	49.35	-24.36	-24.40
5	1.47000	9.68	14.60	8.55	24.28	18.23	56.00	46.00	-31.72	-27.77
6	2.21400	9.70	13.64	7.75	23.34	17.45	56.00	46.00	-32.66	-28.55

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

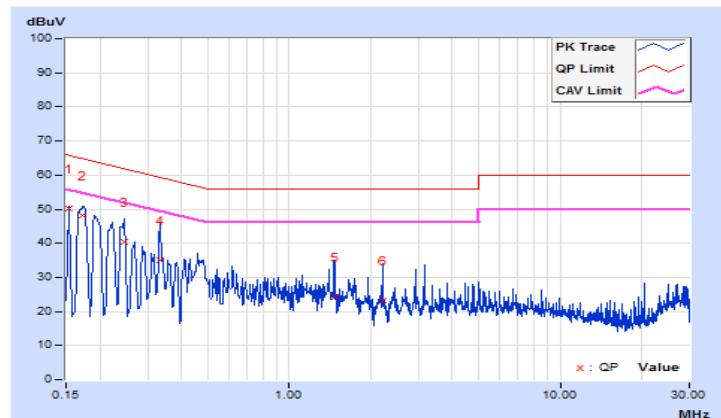


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 75%RH
Tested by	Greg Lin	Test Date	2020/9/5

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	9.68	40.00	23.93	49.68	33.61	65.78	55.78	-16.10	-22.17
2	0.20200	9.68	34.58	19.87	44.26	29.55	63.53	53.53	-19.27	-23.98
3	0.27400	9.68	27.36	13.34	37.04	23.02	61.00	51.00	-23.96	-27.98
4	0.55800	9.68	15.72	4.65	25.40	14.33	56.00	46.00	-30.60	-31.67
5	1.68600	9.72	17.25	6.06	26.97	15.78	56.00	46.00	-29.03	-30.22
6	2.46600	9.74	14.18	0.31	23.92	10.05	56.00	46.00	-32.08	-35.95

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

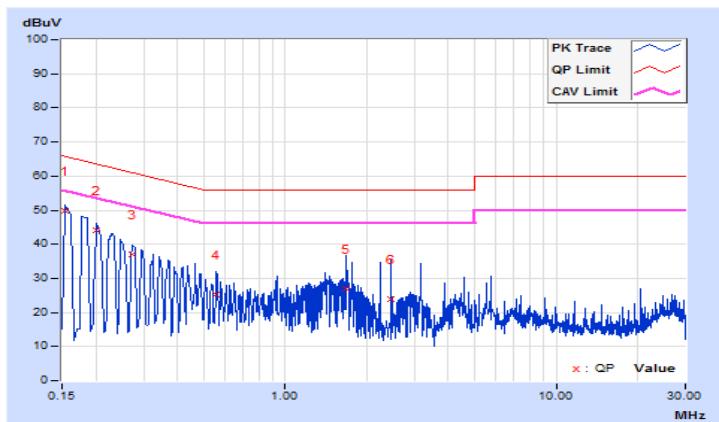


### 4.3 6 dB Bandwidth Measurement

#### 4.3.1 Limits of 6 dB Bandwidth Measurement

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100 kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Results

##### 802.11b

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	7.10	7.09	7.06	7.06	0.5	Pass
6	2437	7.10	7.06	7.07	7.12	0.5	Pass
11	2462	7.12	7.11	6.62	7.06	0.5	Pass

##### 802.11g


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	15.11	15.11	15.06	15.08	0.5	Pass
6	2437	15.11	15.15	15.12	15.08	0.5	Pass
11	2462	15.15	15.13	15.11	15.09	0.5	Pass

##### 802.11n (HT20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	15.15	15.11	15.14	15.17	0.5	Pass
6	2437	25.00	15.11	13.91	15.13	0.5	Pass
11	2462	15.09	15.10	13.89	15.34	0.5	Pass


##### 802.11n (HT40)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
3	2422	32.58	32.64	27.63	26.47	0.5	Pass
6	2437	32.61	30.04	28.85	32.61	0.5	Pass
9	2452	30.06	31.41	27.61	30.06	0.5	Pass

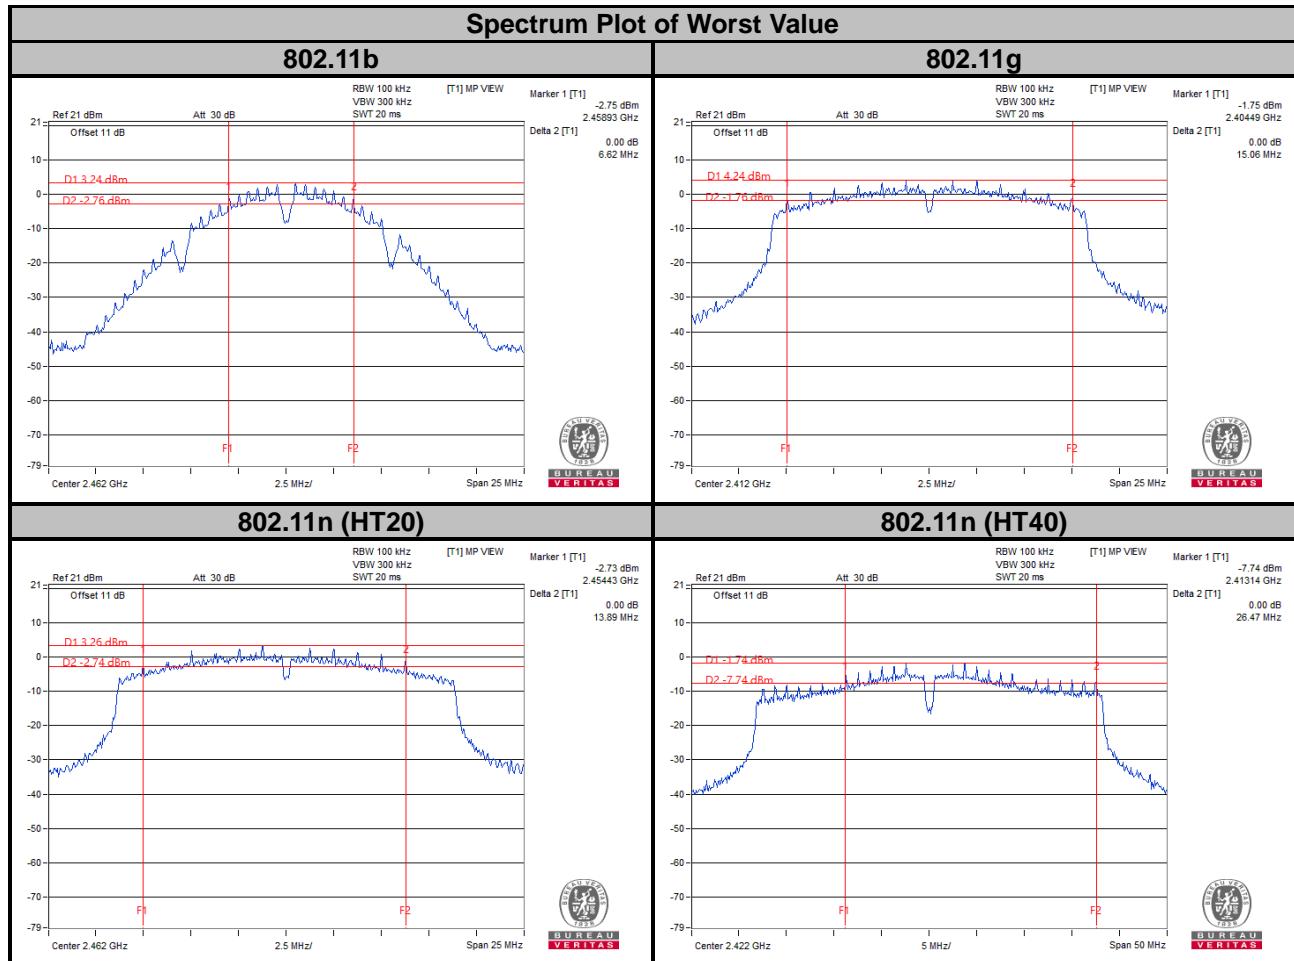

## 4.4 Occupied Bandwidth Measurement

### 4.4.1 Test Setup



### 4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

### 4.4.4 Deviation from Test Standard

No deviation.

### 4.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.4.6 Test Results

##### 802.11b

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)				Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3	
1	2412	12.00	12.00	11.91	12.00	Pass
6	2437	11.91	11.91	12.00	12.00	Pass
11	2462	11.88	12.00	12.00	12.00	Pass

##### 802.11g


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)				Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3	
1	2412	16.20	16.20	16.08	16.08	Pass
6	2437	16.92	16.92	17.52	18.08	Pass
11	2462	16.32	16.20	16.32	16.32	Pass

##### 802.11n (HT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)				Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3	
1	2412	17.28	17.28	17.40	17.28	Pass
6	2437	17.92	18.12	17.76	17.76	Pass
11	2462	17.40	17.40	17.40	17.52	Pass

##### 802.11n (HT40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)				Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3	
3	2422	36.12	36.00	36.24	36.36	Pass
6	2437	36.24	36.24	35.88	36.24	Pass
9	2452	36.24	36.12	35.88	35.88	Pass

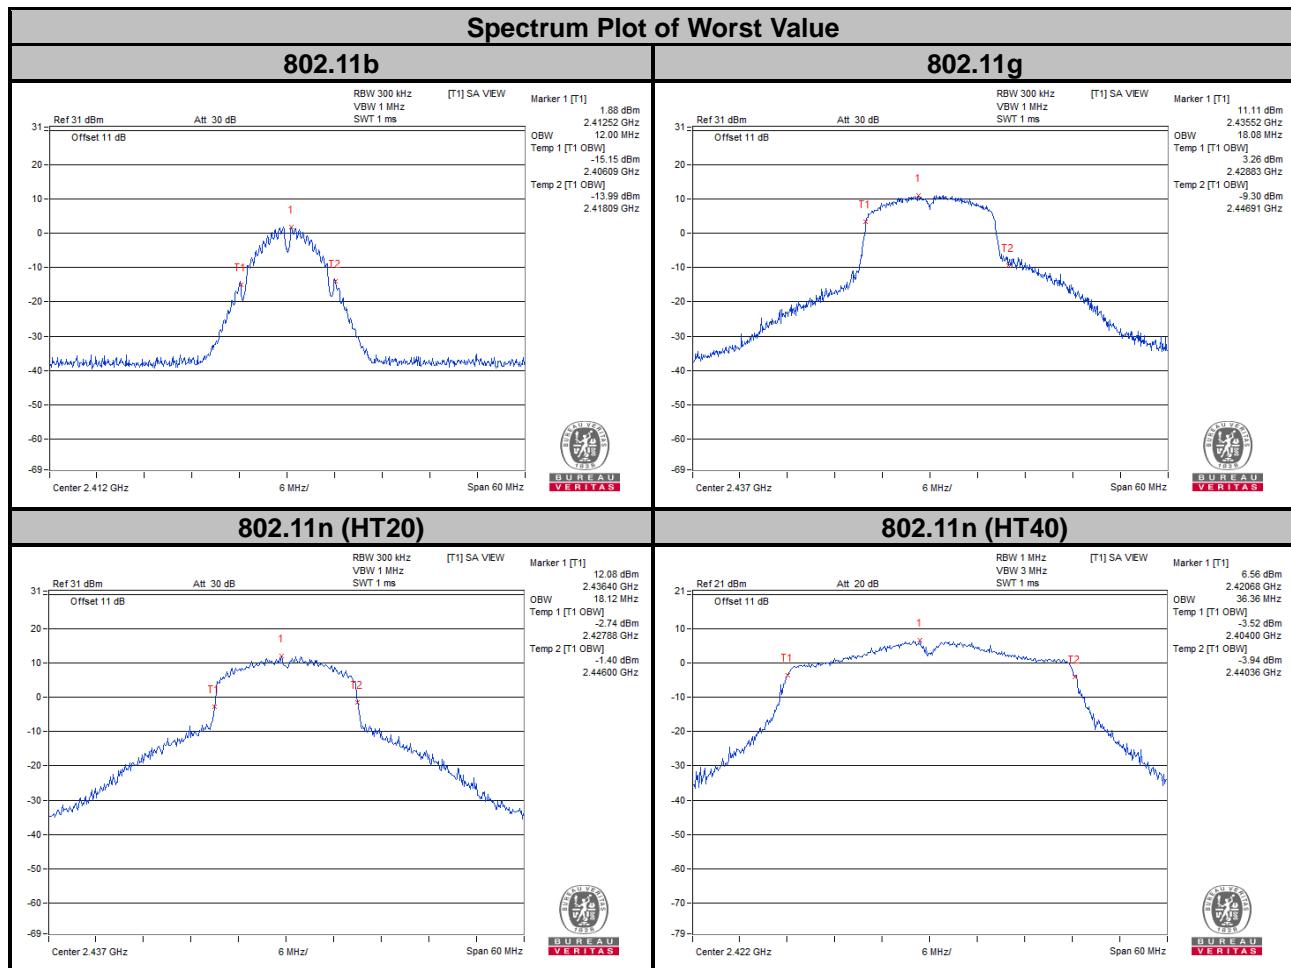

## 4.5 Conducted Output Power Measurement

### 4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain =  $5 \log(NANT/NSS)$  dB or 3 dB, whichever is less for 20 MHz channel widths with NANT ≥ 5.

For power measurements on all other devices: Array Gain =  $10 \log(NANT/NSS)$  dB.

### 4.5.2 Test Setup



### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedures

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.5.7 Test Results

##### 802.11b

Channel	Frequency (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	9.34	9.19	9.41	9.23	33.994	15.31	30	Pass
6	2437	10.25	10.12	10.59	10.41	43.318	16.37	30	Pass
11	2462	11.46	12.02	11.08	11.38	56.482	17.52	30	Pass

##### 802.11g

Channel	Frequency (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	15.57	15.74	15.34	15.62	144.229	21.59	30	Pass
6	2437	19.31	19.56	19.13	19.28	342.244	25.34	30	Pass
11	2462	13.76	14.29	13.43	13.83	96.806	19.86	30	Pass

##### 802.11n (HT20)

Channel	Frequency (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	15.06	15.54	14.92	14.82	129.257	21.11	30	Pass
6	2437	19.09	19.78	19.15	19.07	339.104	25.30	30	Pass
11	2462	14.12	14.03	13.69	13.87	98.882	19.95	30	Pass

##### 802.11n (HT40)


Channel	Frequency (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	11.54	11.11	11.12	10.96	52.584	17.21	30	Pass
6	2437	15.58	15.93	15.41	15.14	142.728	21.55	30	Pass
9	2452	11.84	12.29	11.75	11.69	61.938	17.92	30	Pass

## 4.6 Power Spectral Density Measurement

### 4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

For Average Power (Duty cycle  $\geq 98\%$ )

- a. Set instrument center frequency to DTS channel center frequency.
- b. Set span to at least 1.5 times the OBW.
- c. Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d. Set VBW  $\geq 3 \times \text{RBW}$ .
- e. Detector = power averaging (RMS) or sample detector (when RMS not available).
- f. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- g. Sweep time = auto couple.
- h. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i. Use the peak marker function to determine the maximum amplitude level.

### 4.6.5 Deviation from Test Standard

No deviation.

### 4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.6.7 Test Results

##### 802.11b

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=4) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	1	2412	-23.52	6.02	-17.5	2.98	Pass
	6	2437	-22.18	6.02	-16.16	2.98	Pass
	11	2462	-21.41	6.02	-15.39	2.98	Pass
1	1	2412	-23.7	6.02	-17.68	2.98	Pass
	6	2437	-21.86	6.02	-15.84	2.98	Pass
	11	2462	-20.44	6.02	-14.42	2.98	Pass
2	1	2412	-22.49	6.02	-16.47	2.98	Pass
	6	2437	-22.33	6.02	-16.31	2.98	Pass
	11	2462	-21.63	6.02	-15.61	2.98	Pass
3	1	2412	-23.26	6.02	-17.24	2.98	Pass
	6	2437	-22.18	6.02	-16.16	2.98	Pass
	11	2462	-21.41	6.02	-15.39	2.98	Pass

**NOTE:**

1. Directional gain = 5 dBi + 10log(4) = 11.02 dBi > 6 dBi, so the power density limit shall be reduced to 8- (11.02-6) = 2.98 dBm.
2. Method 2) c) of power density measurement of KDB 662911 is using for calculating total power density.

**802.11g**

<b>TX Chain</b>	<b>Channel</b>	<b>Freq. (MHz)</b>	<b>PSD (dBm/3 kHz)</b>	<b>10 log (N=4) dB</b>	<b>Total PSD (dBm/3 kHz)</b>	<b>Limit (dBm/3 kHz)</b>	<b>Pass / Fail</b>
0	1	2412	-19.73	6.02	-13.71	2.98	Pass
	6	2437	-16.5	6.02	-10.48	2.98	Pass
	11	2462	-21.69	6.02	-15.67	2.98	Pass
1	1	2412	-19.71	6.02	-13.69	2.98	Pass
	6	2437	-15.72	6.02	-9.7	2.98	Pass
	11	2462	-20.96	6.02	-14.94	2.98	Pass
2	1	2412	-20.01	6.02	-13.99	2.98	Pass
	6	2437	-15.36	6.02	-9.34	2.98	Pass
	11	2462	-22.25	6.02	-16.23	2.98	Pass
3	1	2412	-19.69	6.02	-13.67	2.98	Pass
	6	2437	-16.5	6.02	-10.48	2.98	Pass
	11	2462	-21.69	6.02	-15.67	2.98	Pass

**NOTE:**

1. Directional gain = 5 dBi + 10log(4) = 11.02 dBi > 6 dBi, so the power density limit shall be reduced to 8-(11.02-6) = 2.98 dBm.
2. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.

**802.11n (HT20)**

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=4) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	1	2412	-8.81	6.02	-2.79	2.98	Pass
	6	2437	-16.39	6.02	-10.37	2.98	Pass
	11	2462	-10.14	6.02	-4.12	2.98	Pass
1	1	2412	-20.6	6.02	-14.58	2.98	Pass
	6	2437	-16.21	6.02	-10.19	2.98	Pass
	11	2462	-20.82	6.02	-14.8	2.98	Pass
2	1	2412	-21.34	6.02	-15.32	2.98	Pass
	6	2437	-15.73	6.02	-9.71	2.98	Pass
	11	2462	-21.58	6.02	-15.56	2.98	Pass
3	1	2412	-20.79	6.02	-14.77	2.98	Pass
	6	2437	-16.39	6.02	-10.37	2.98	Pass
	11	2462	-10.14	6.02	-4.12	2.98	Pass

**NOTE:**


1. Directional gain = 5 dBi + 10log(4) = 11.02 dBi > 6 dBi, so the power density limit shall be reduced to 8-(11.02-6) = 2.98 dBm.
2. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.

**802.11n (HT40)**

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=4) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	3	2422	-27.07	6.02	-21.05	2.98	Pass
	6	2437	-22.96	6.02	-16.94	2.98	Pass
	9	2452	-26.82	6.02	-20.8	2.98	Pass
1	3	2422	-27.35	6.02	-21.33	2.98	Pass
	6	2437	-22.34	6.02	-16.32	2.98	Pass
	9	2452	-26.44	6.02	-20.42	2.98	Pass
2	3	2422	-26.28	6.02	-20.26	2.98	Pass
	6	2437	-23.1	6.02	-17.08	2.98	Pass
	9	2452	-26.58	6.02	-20.56	2.98	Pass
3	3	2422	-27.41	6.02	-21.39	2.98	Pass
	6	2437	-22.96	6.02	-16.94	2.98	Pass
	9	2452	-26.82	6.02	-20.8	2.98	Pass

**NOTE:**

1. Directional gain = 5 dBi + 10log(4) = 11.02 dBi > 6 dBi, so the power density limit shall be reduced to 8-(11.02-6) = 2.98 dBm.
2. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density.

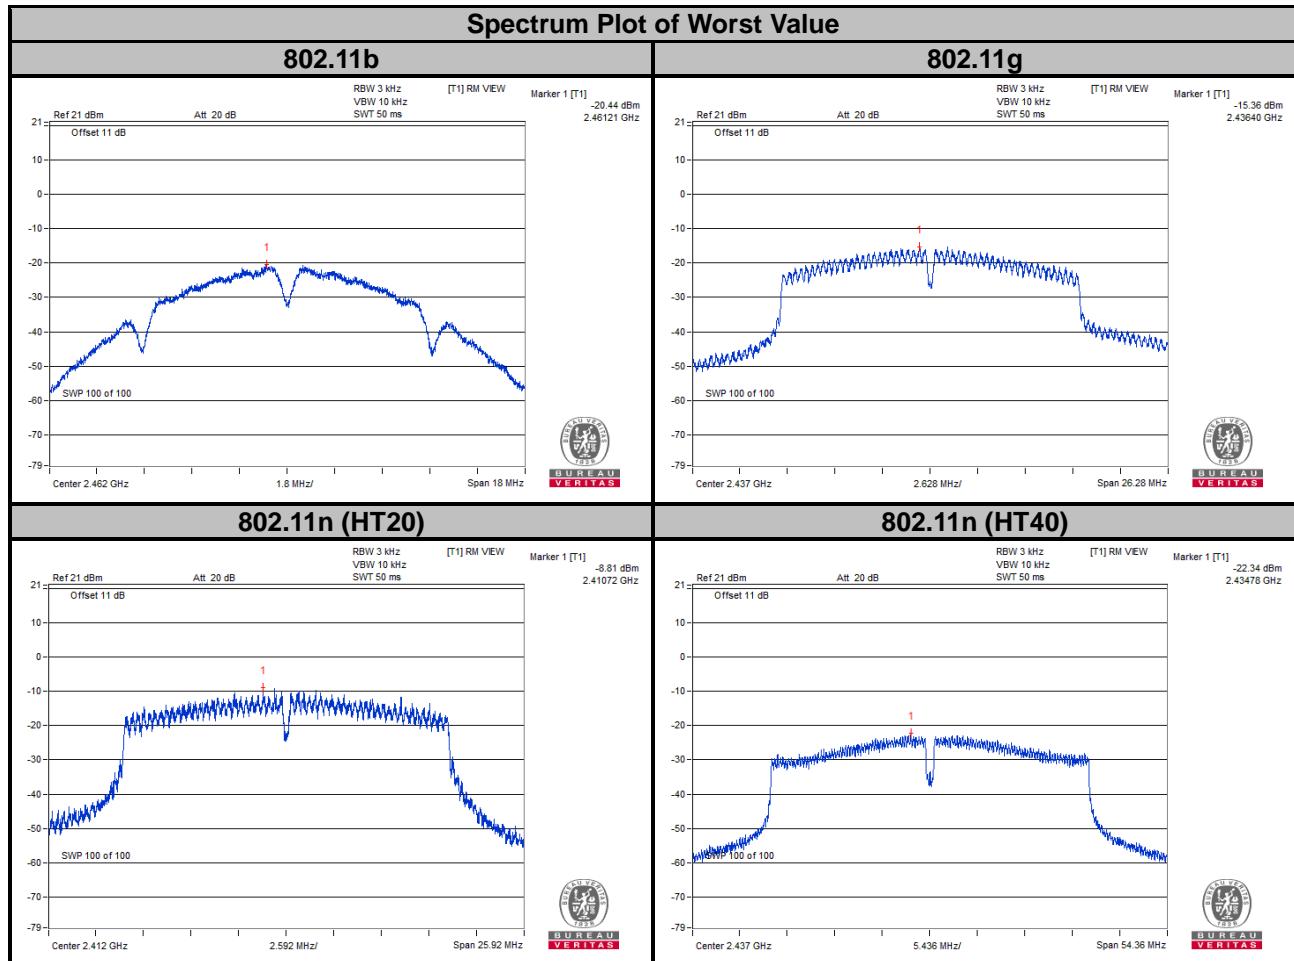

## 4.7 Conducted Out of Band Emission Measurement

### 4.7.1 Limits of Conducted Out of Band Emission Measurement

Below -30 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

### 4.7.2 Test Setup



### 4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.7.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.7.5 Deviation from Test Standard

No deviation.

### 4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


#### 4.7.7 Test Results


The conducted emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.




The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 30 dB offset below D1. It shows compliance with the requirement.


#### 802.11b


#### CHAIN 0

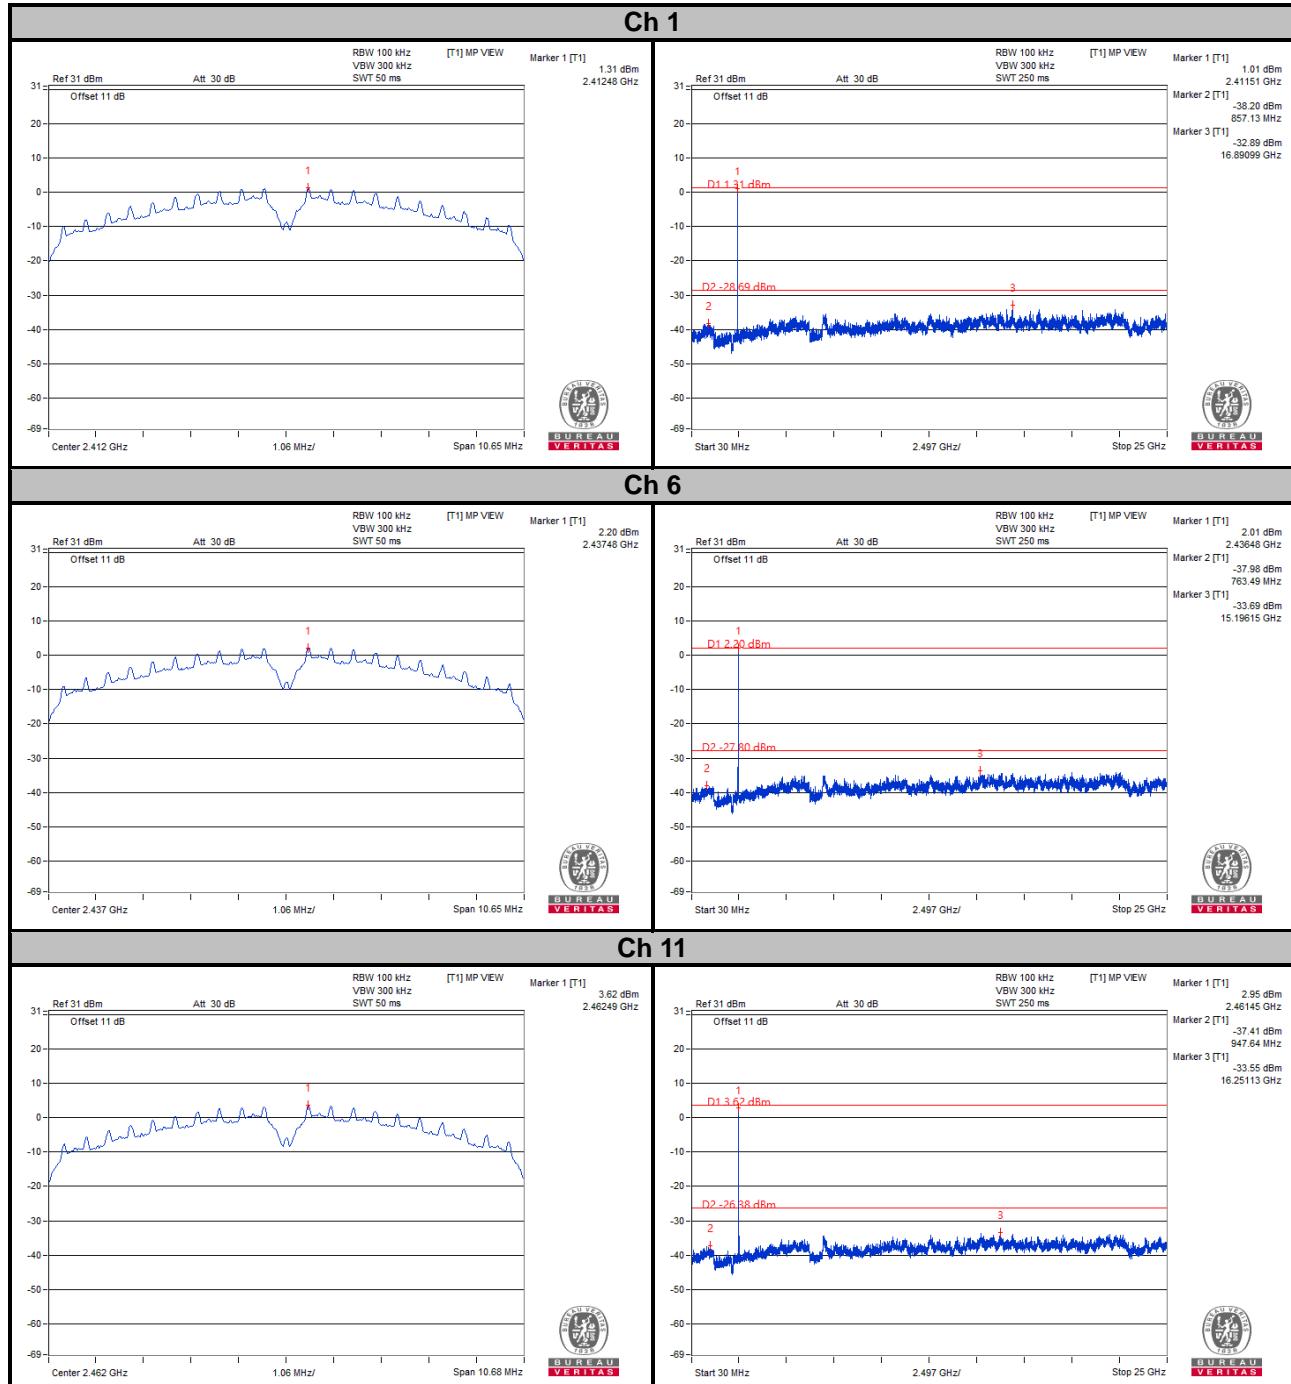


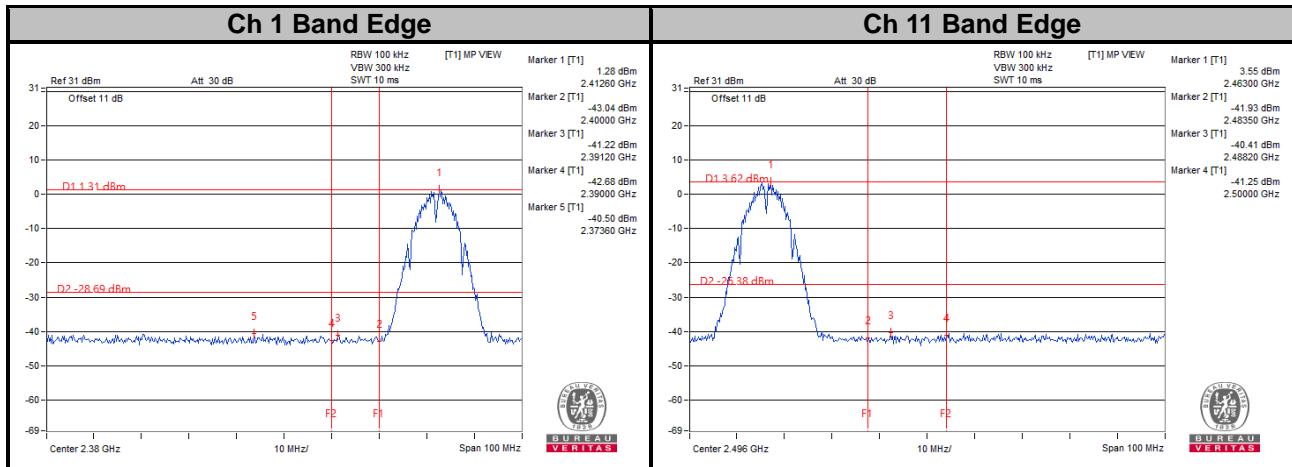


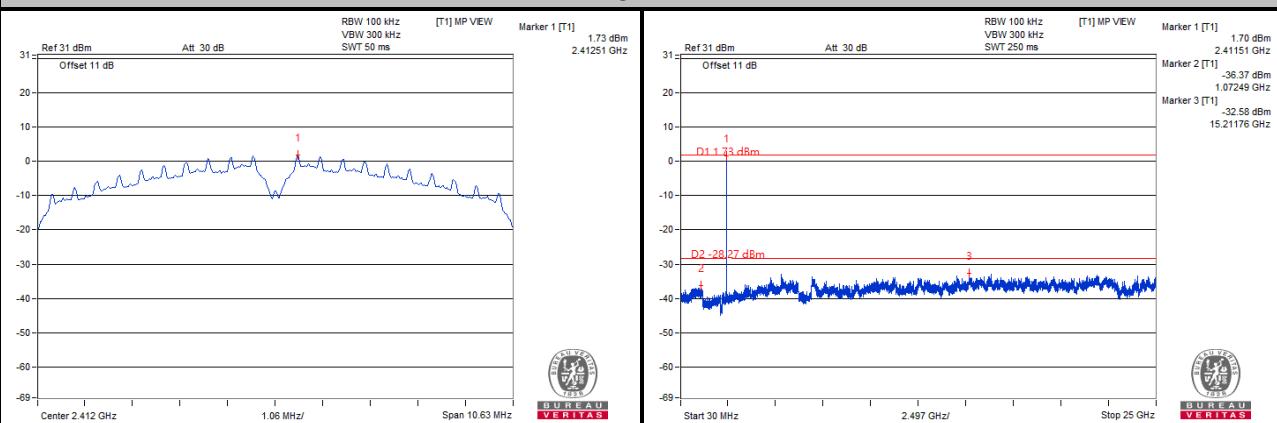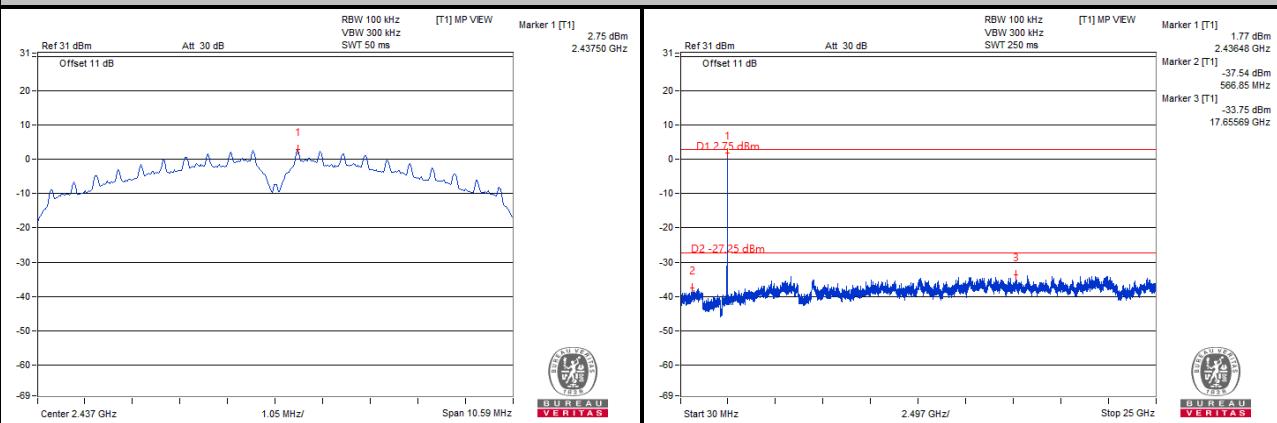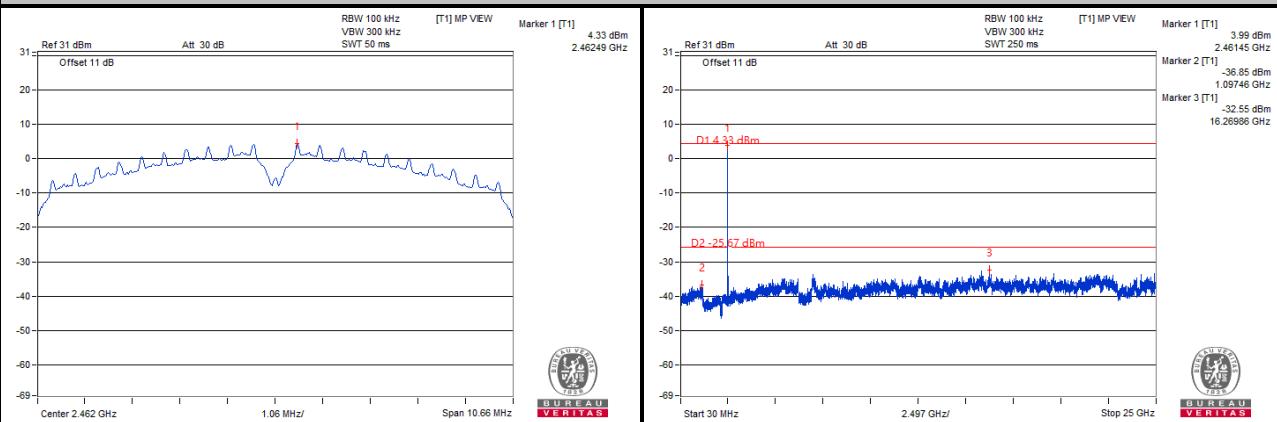
**CHAIN 1**
**Ch 1**

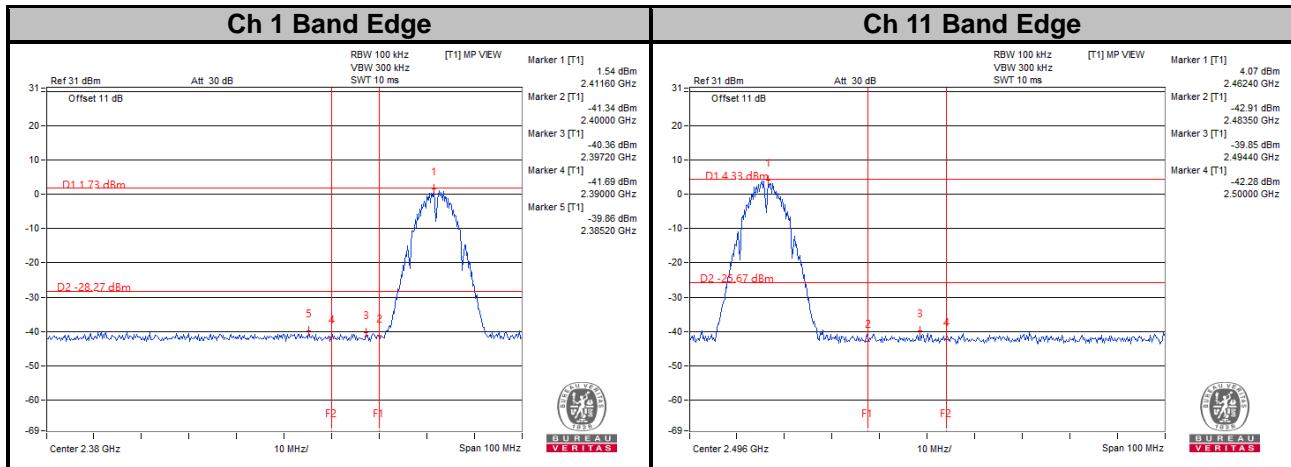**Ch 6**

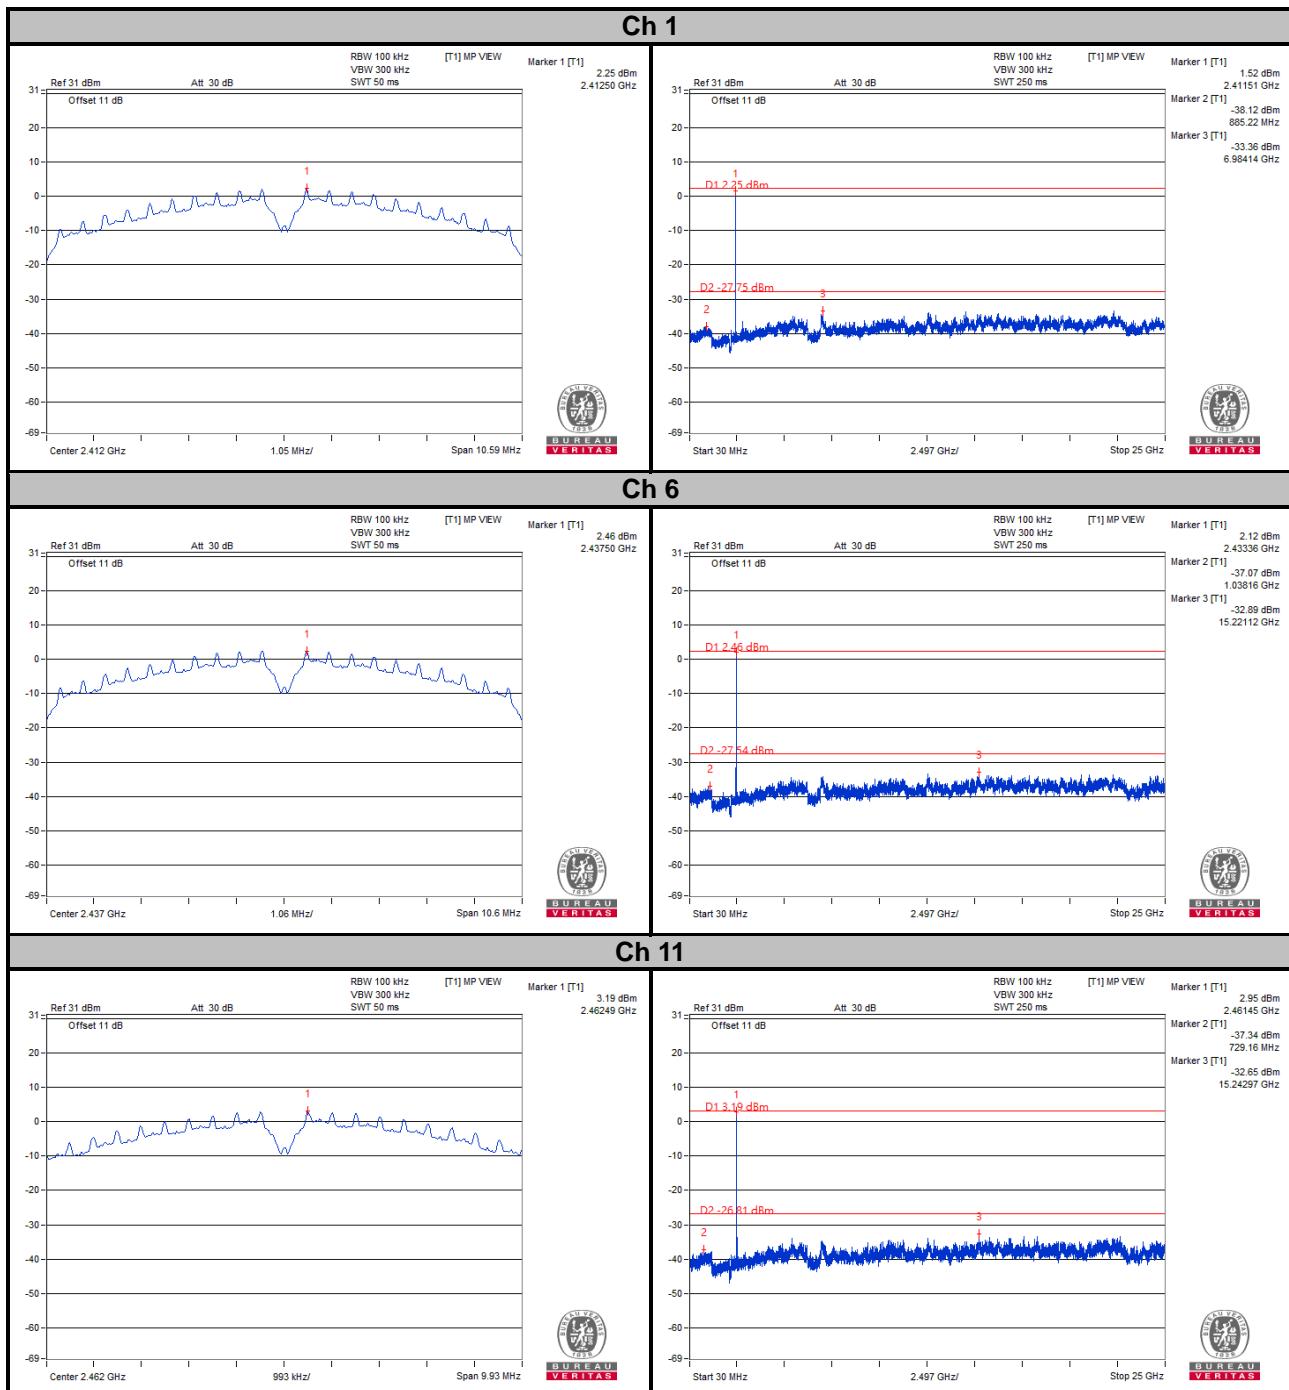**Ch 11**

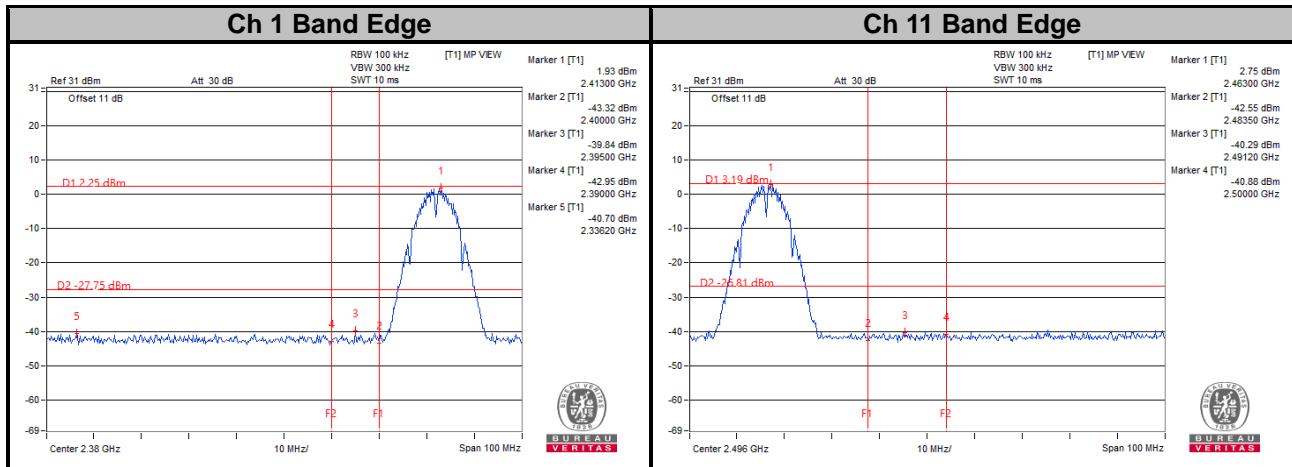

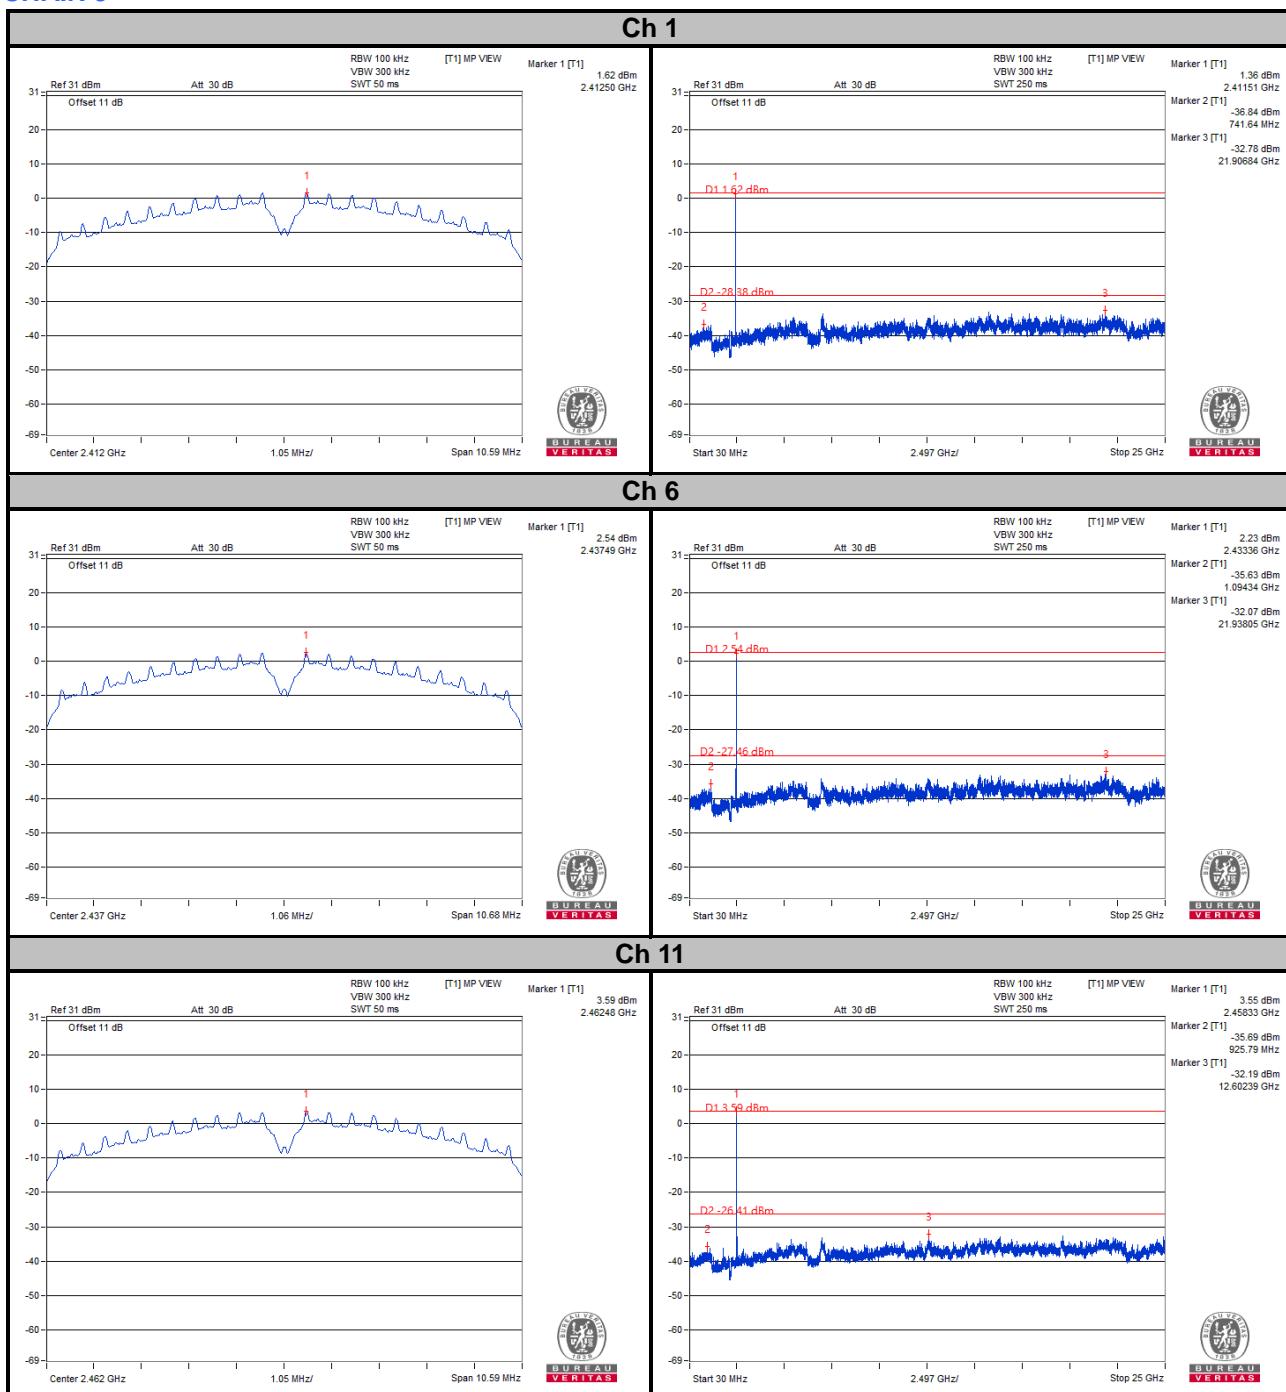
**CHAIN 2**

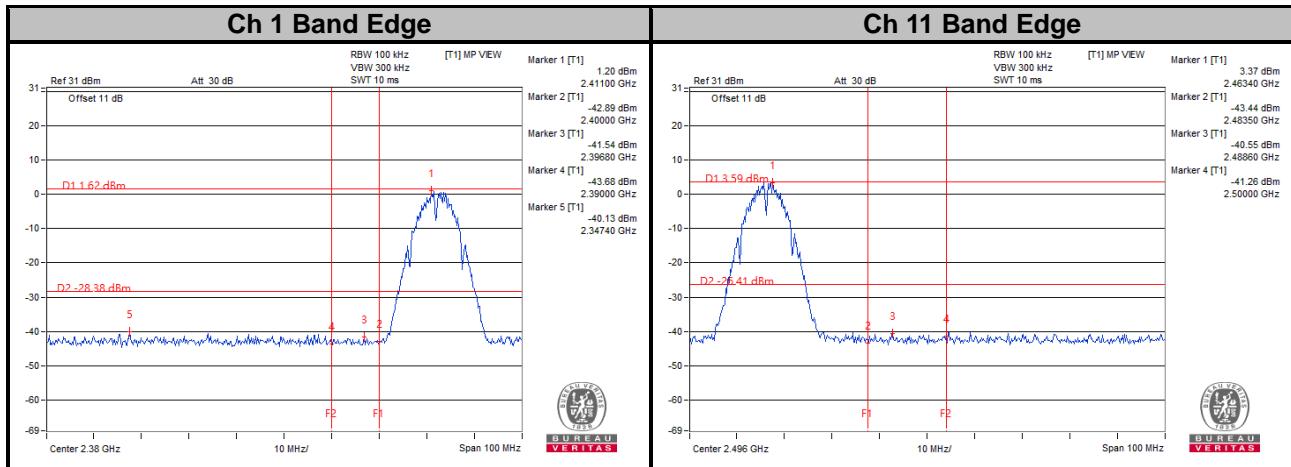
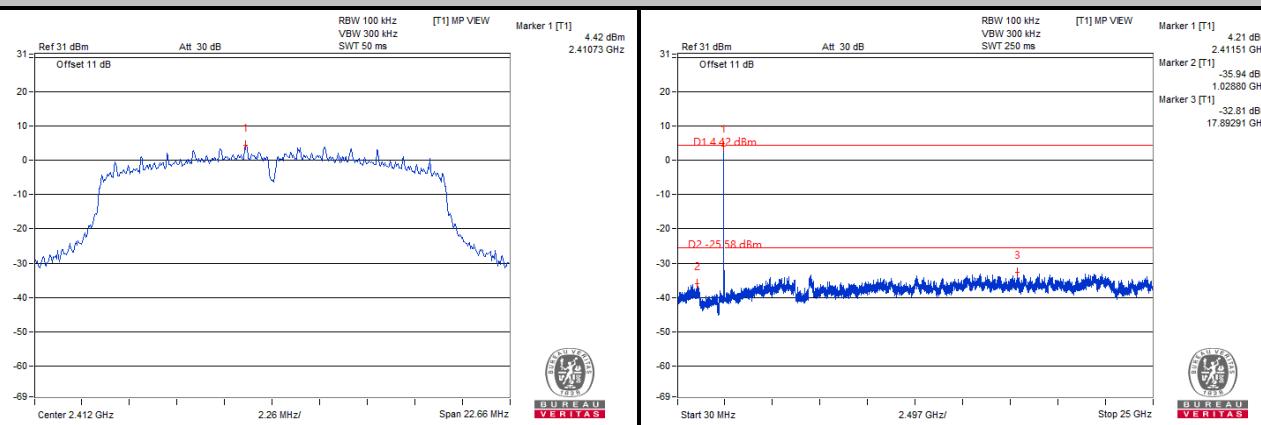


**CHAIN 3**


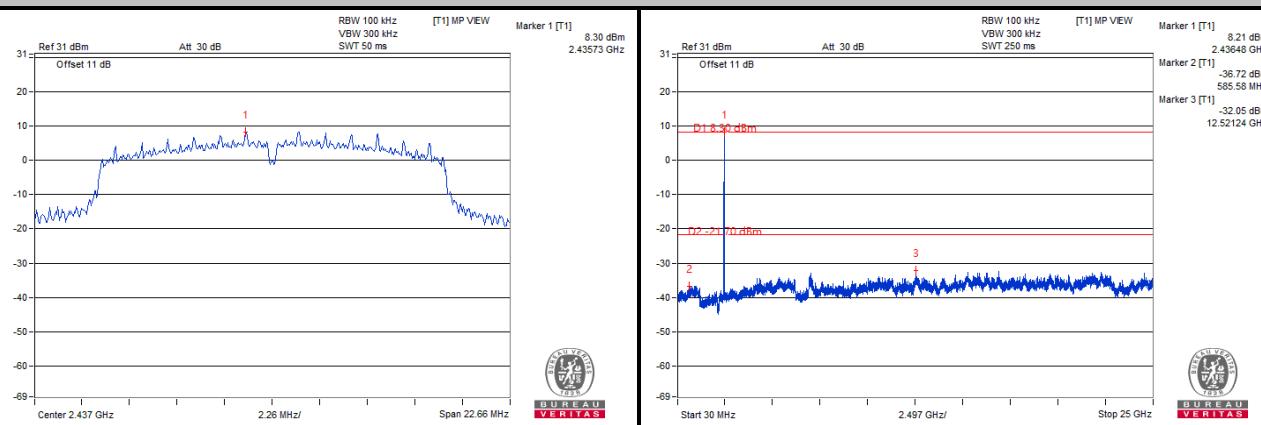


## 802.11g CHAIN 0


**Ch 1**










**Ch 6**





**Ch 11**

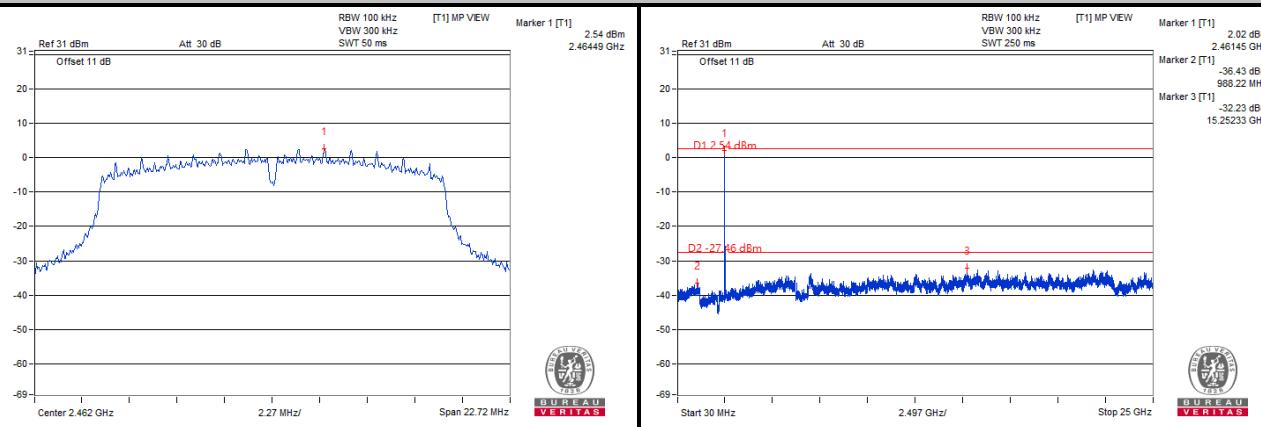


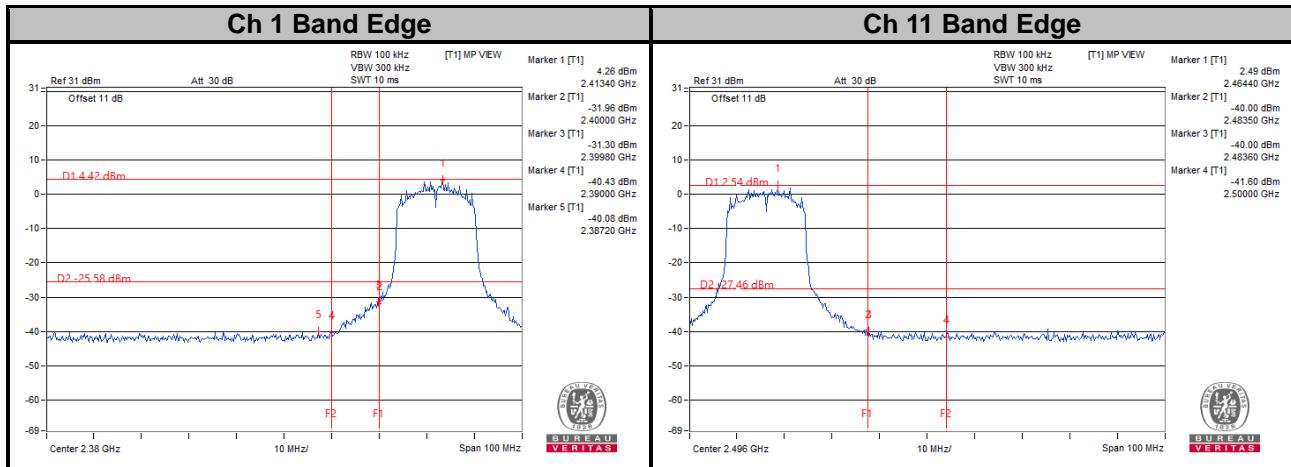


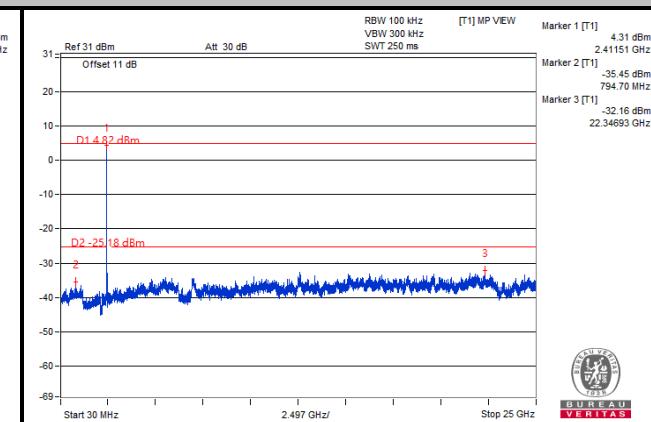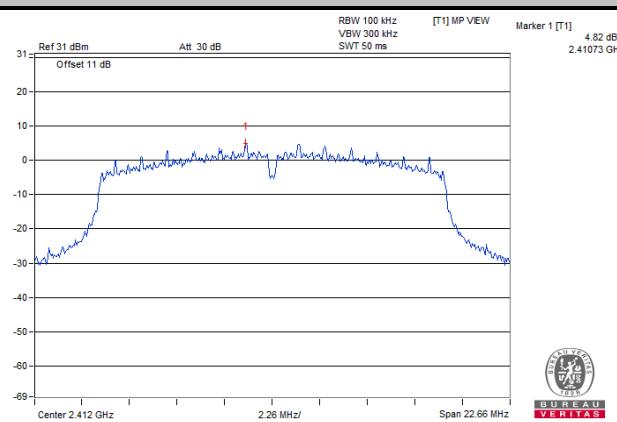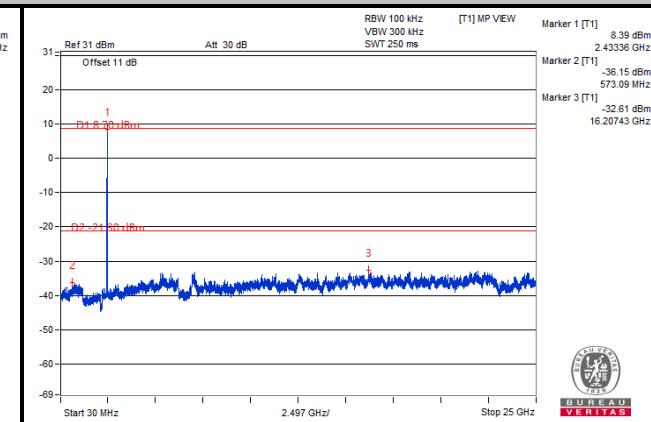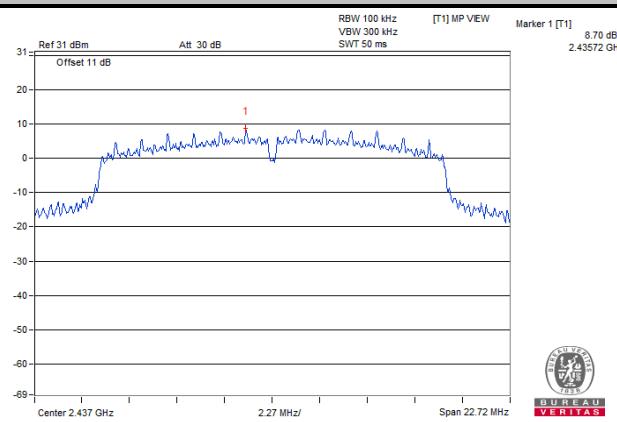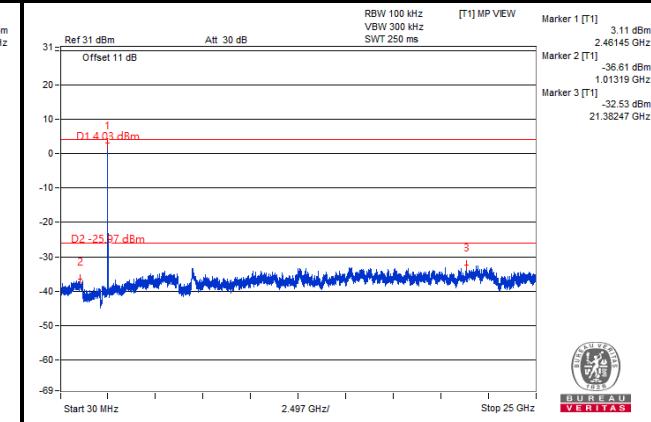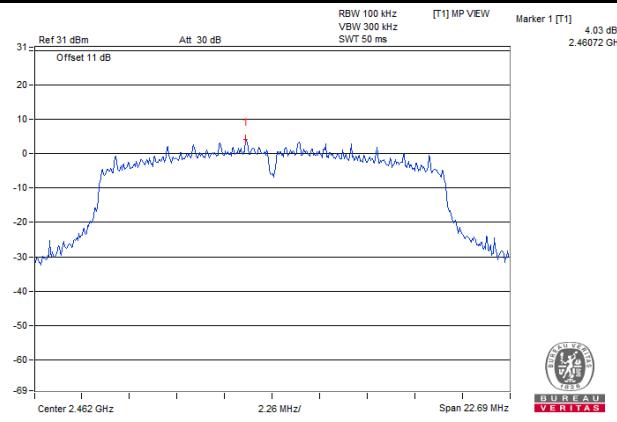
**CHAIN 1**
**Ch 1**

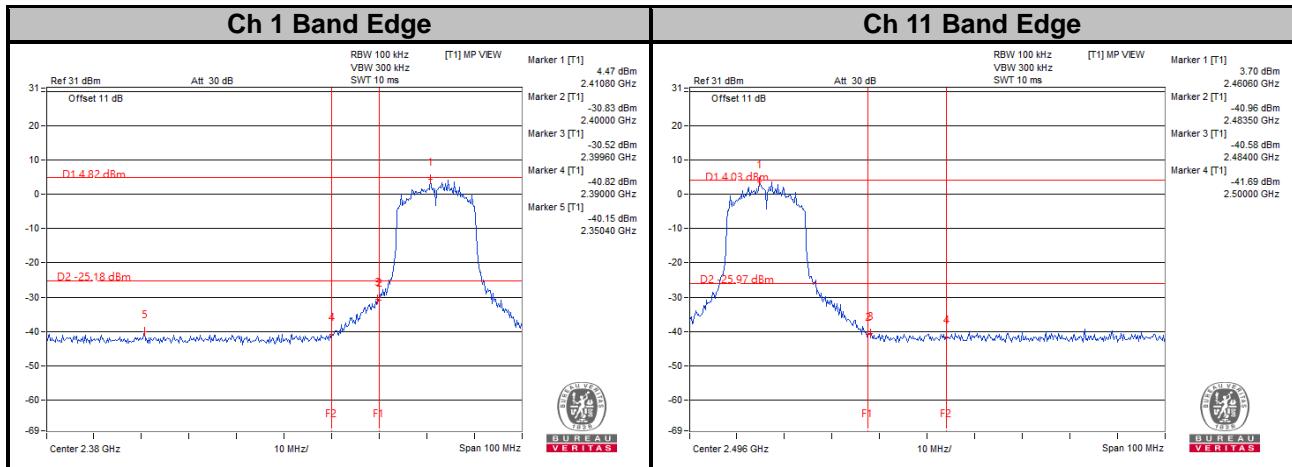**Ch 6**

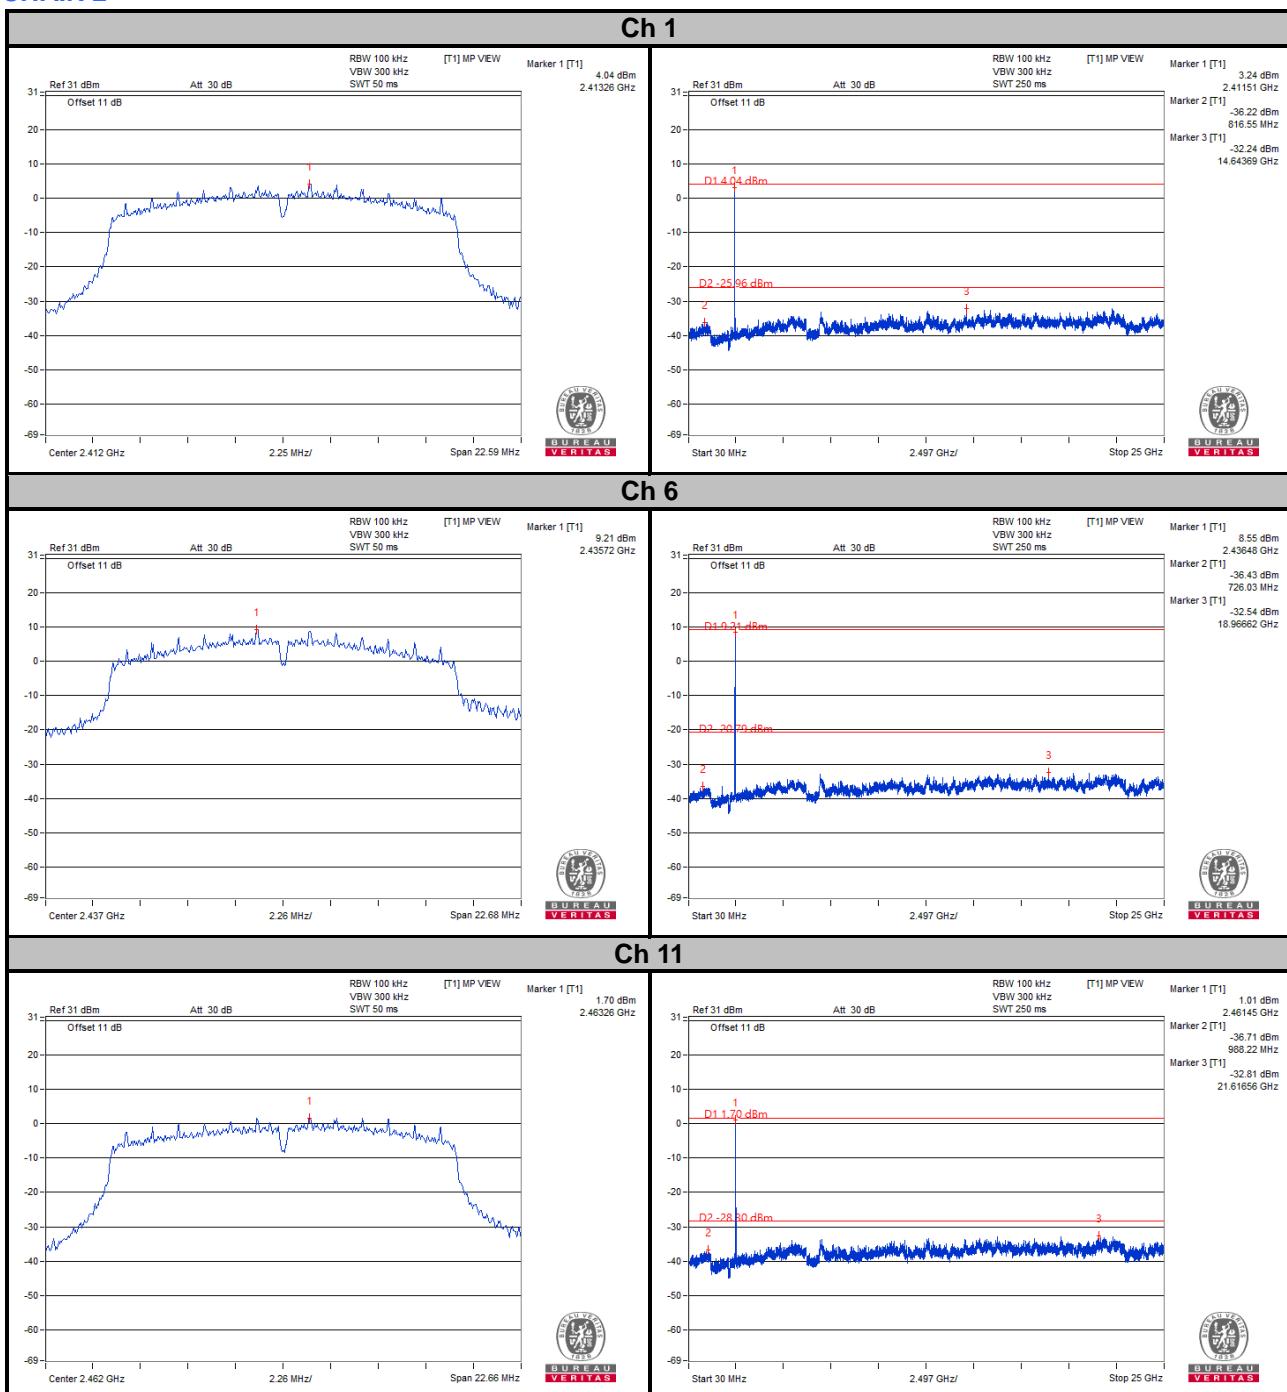**Ch 11**

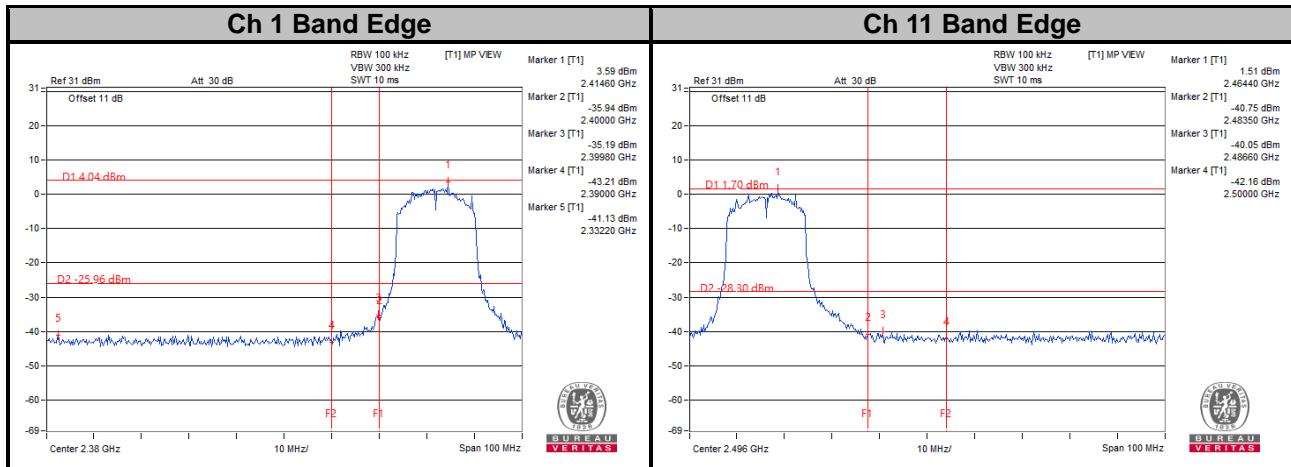

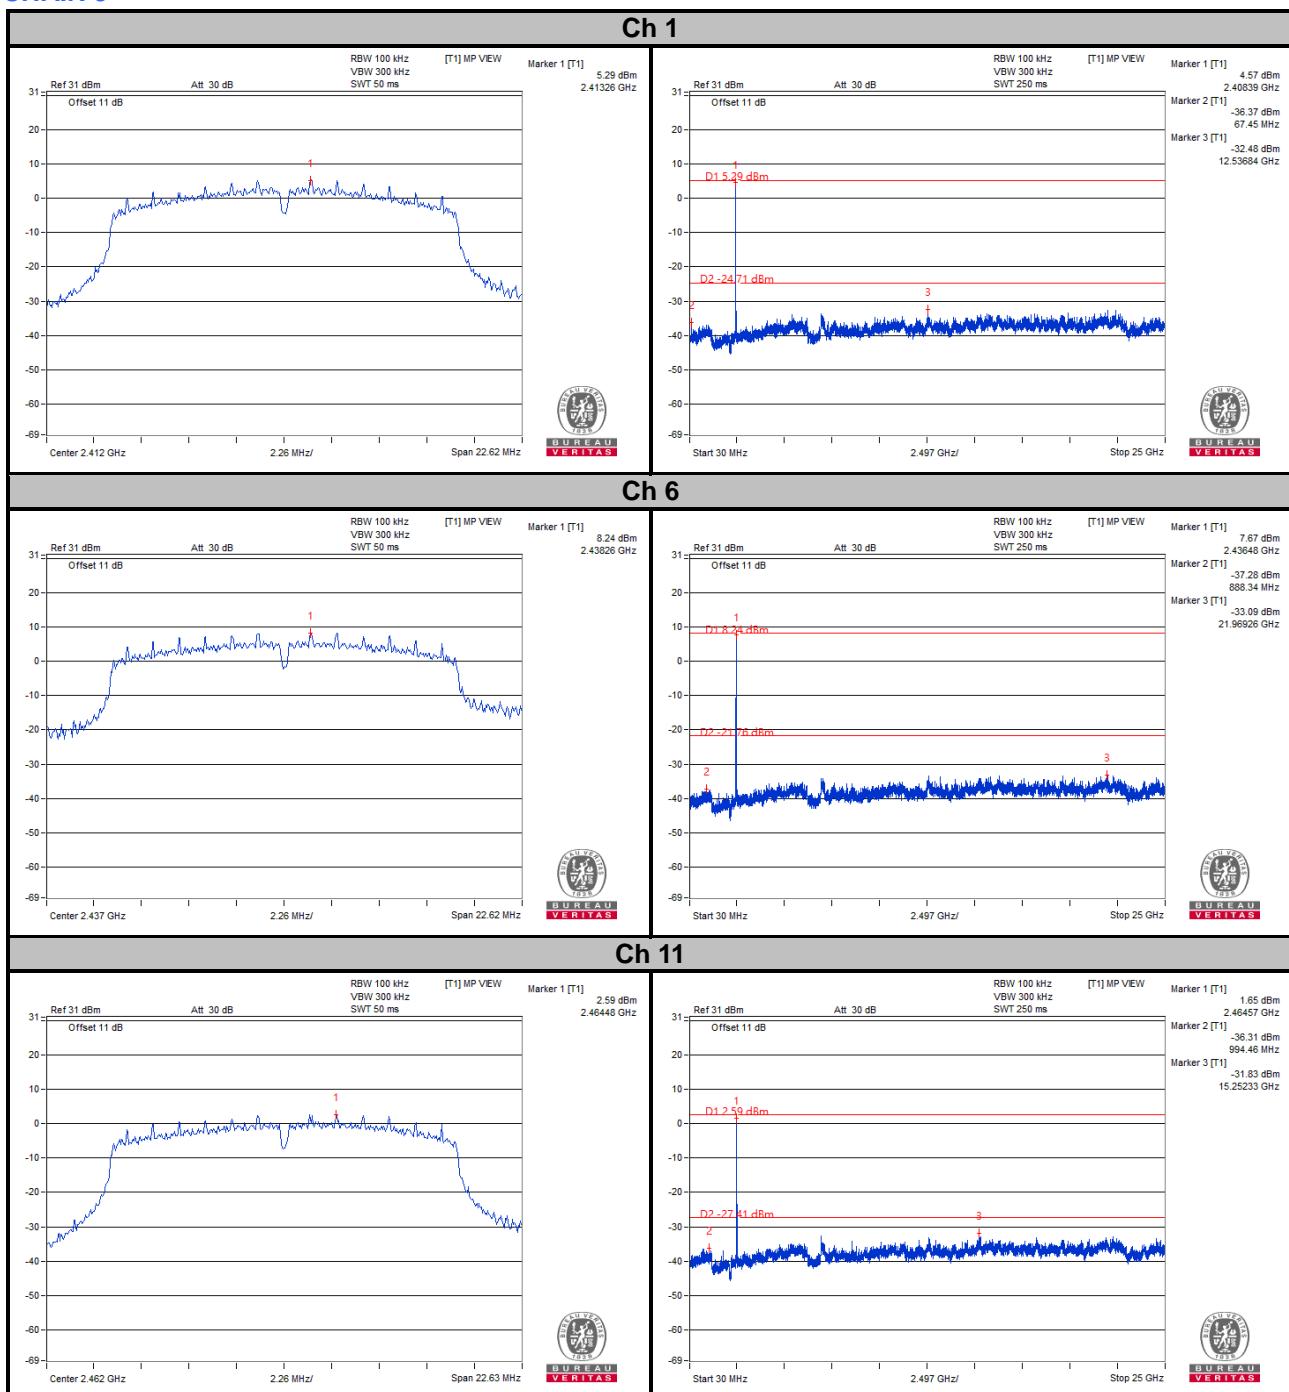
**CHAIN 2**

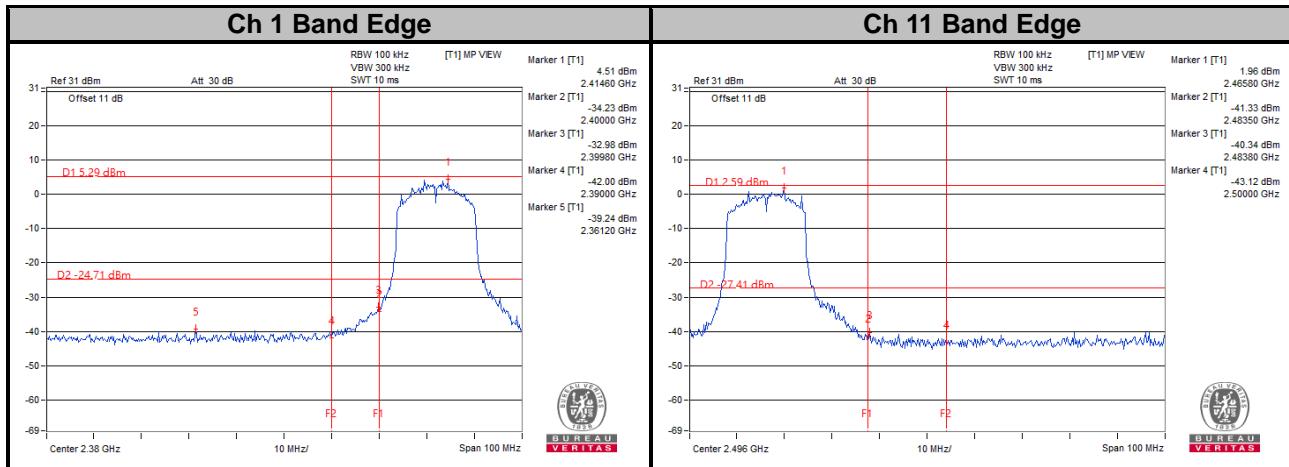


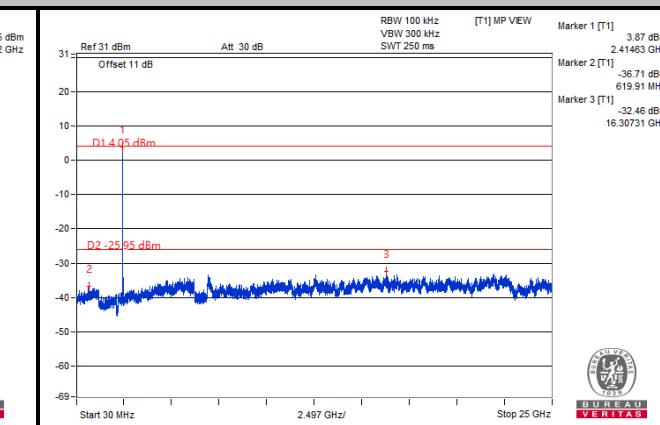
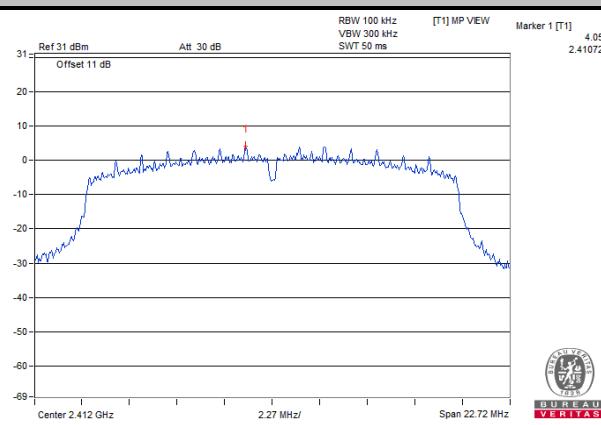
**CHAIN 3**




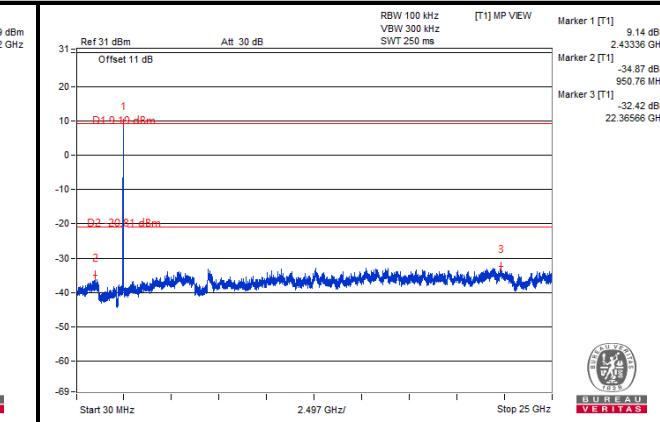
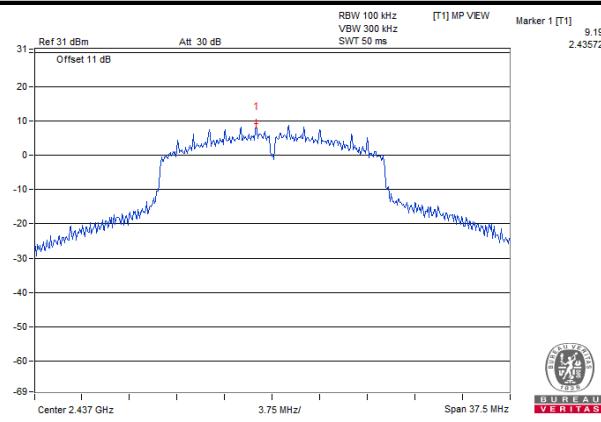
## 802.11n (HT20)

### CHAIN 0



**Ch 1**










**Ch 6**





**Ch 11**

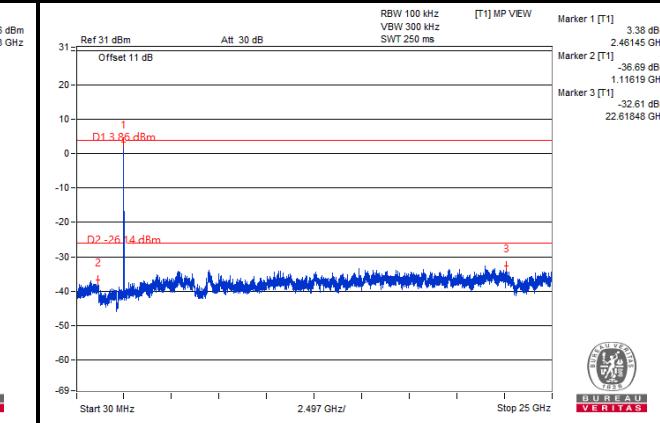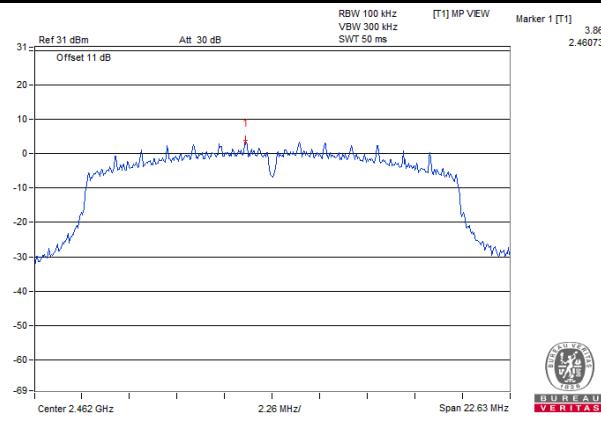


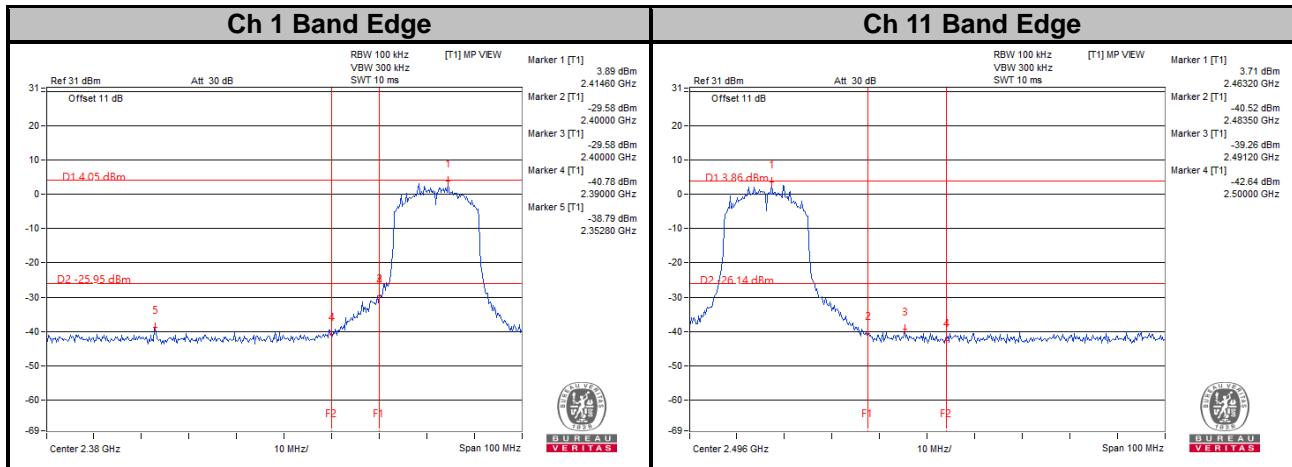


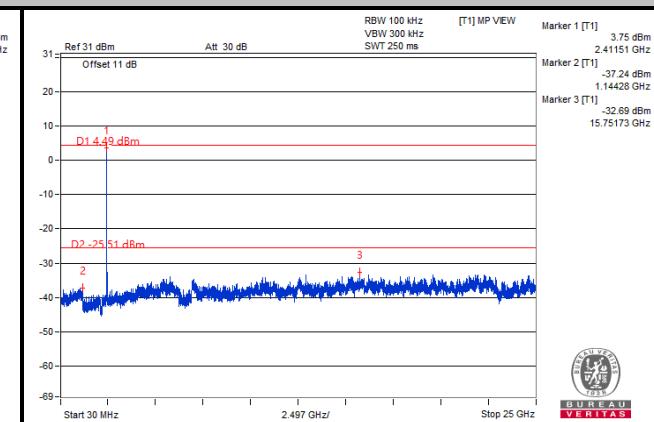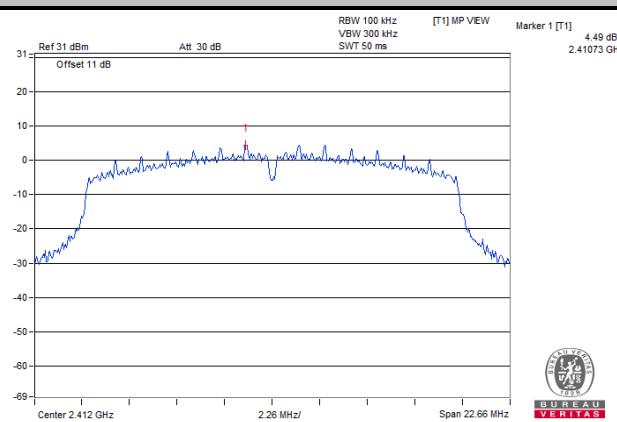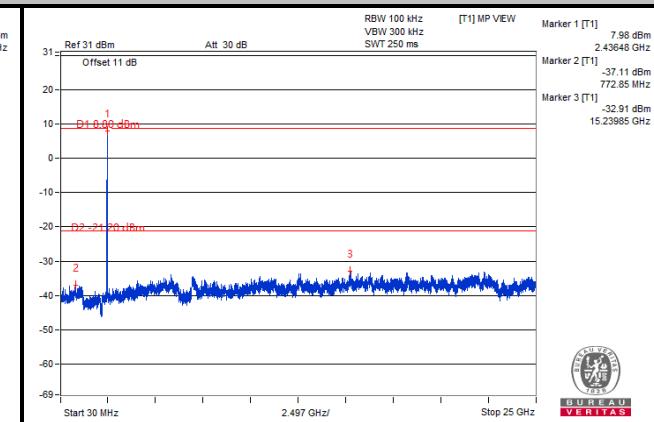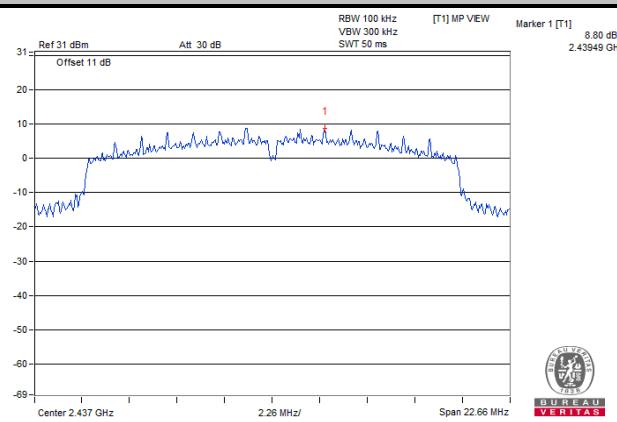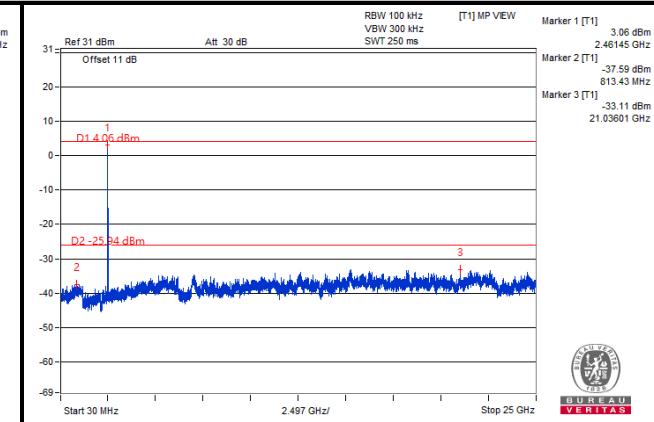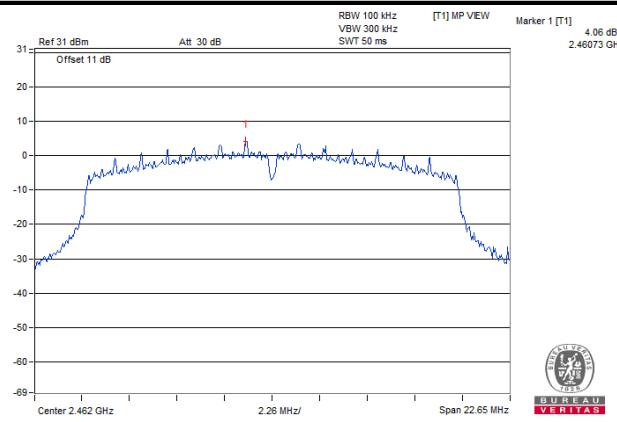
**CHAIN 1**
**Ch 1**

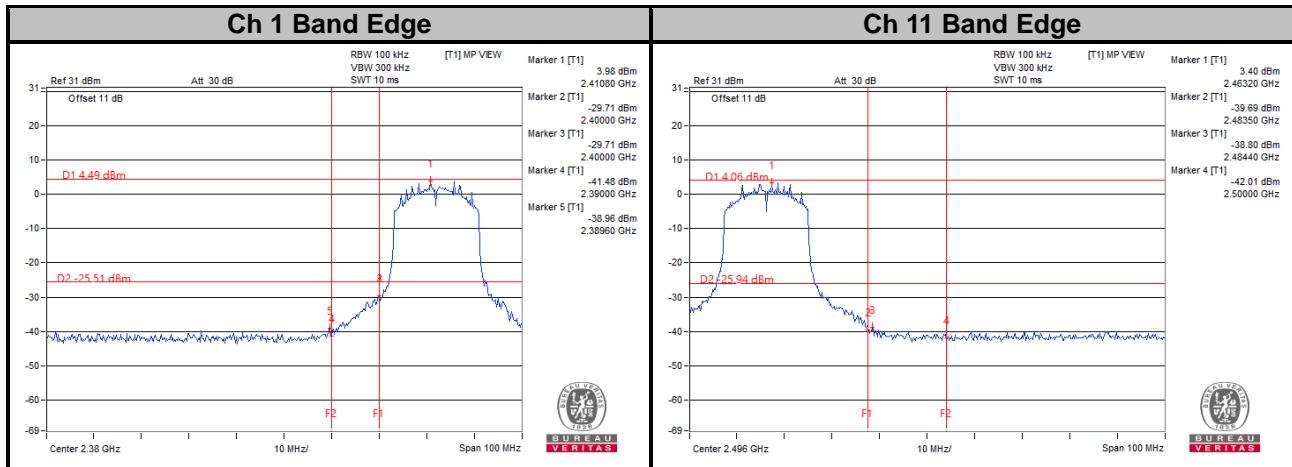**Ch 6**

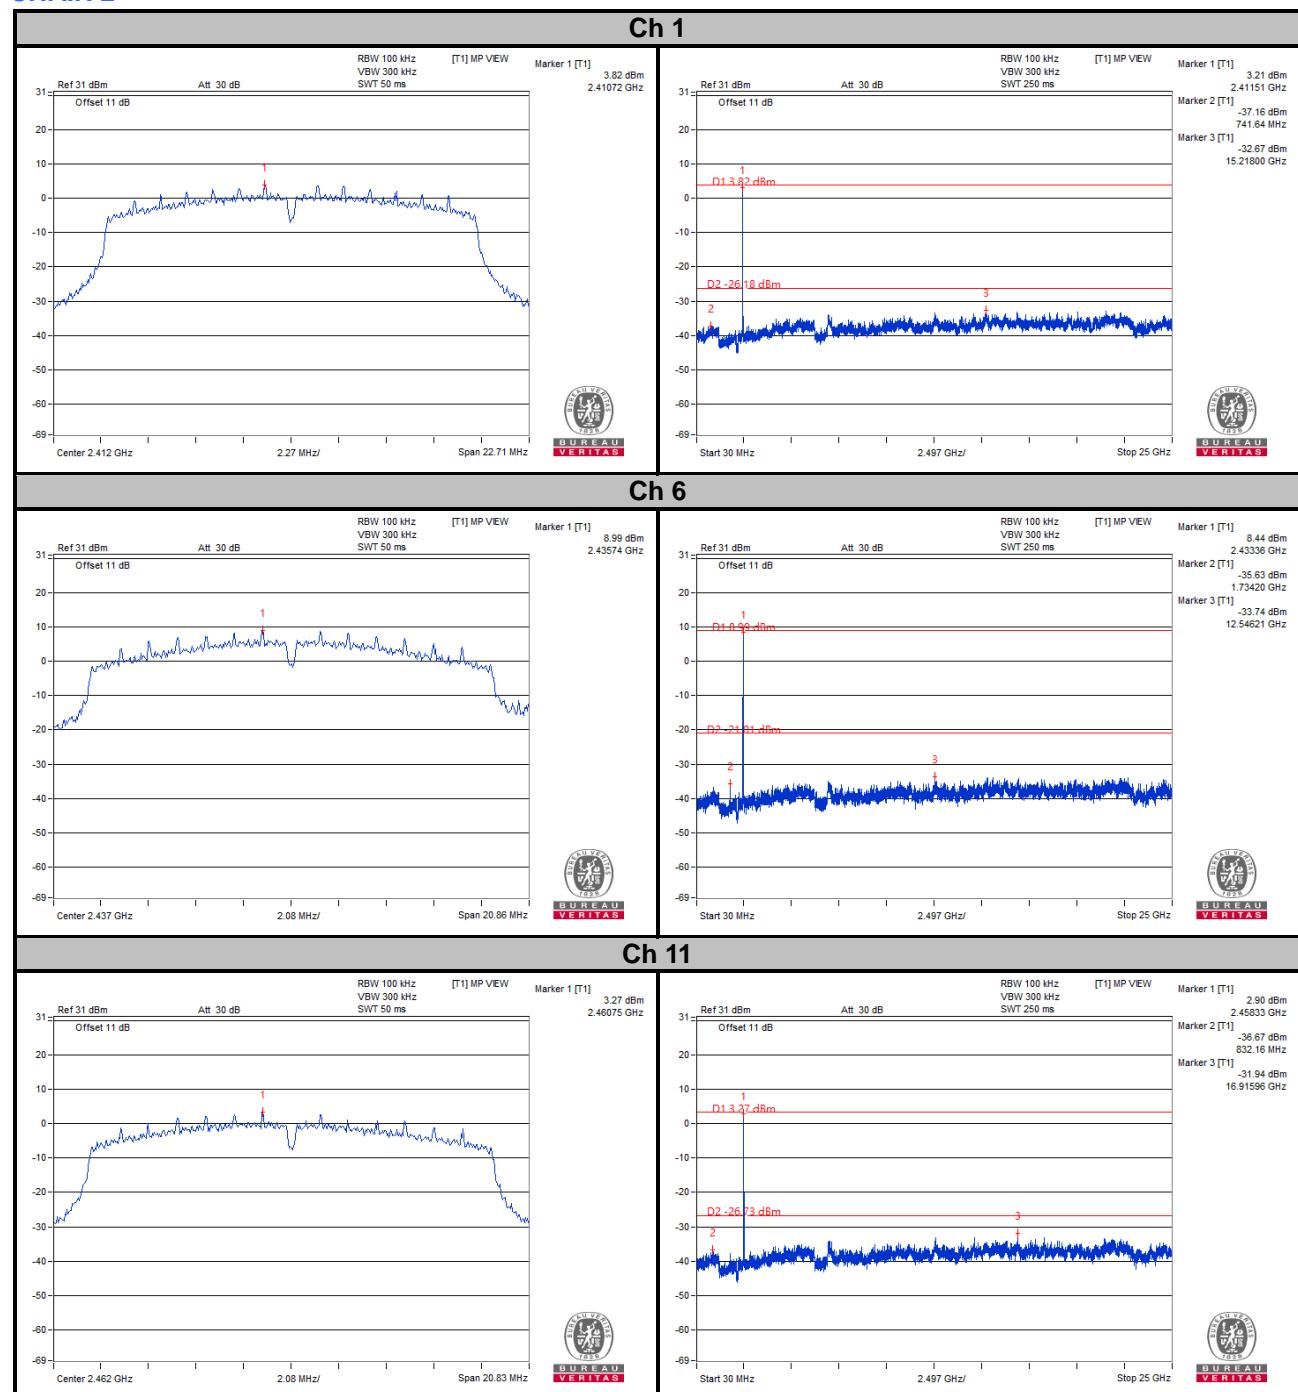**Ch 11**

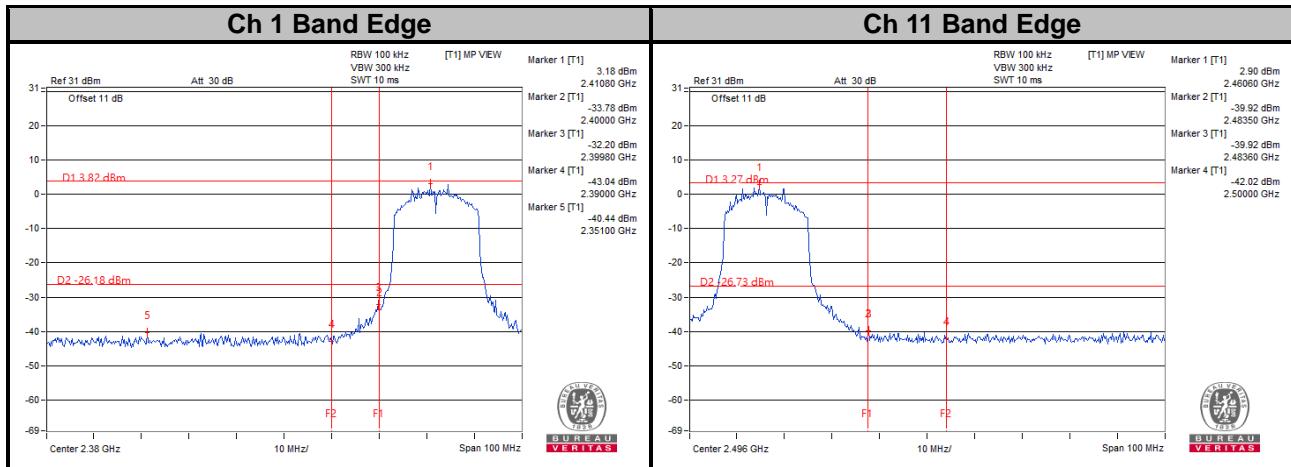

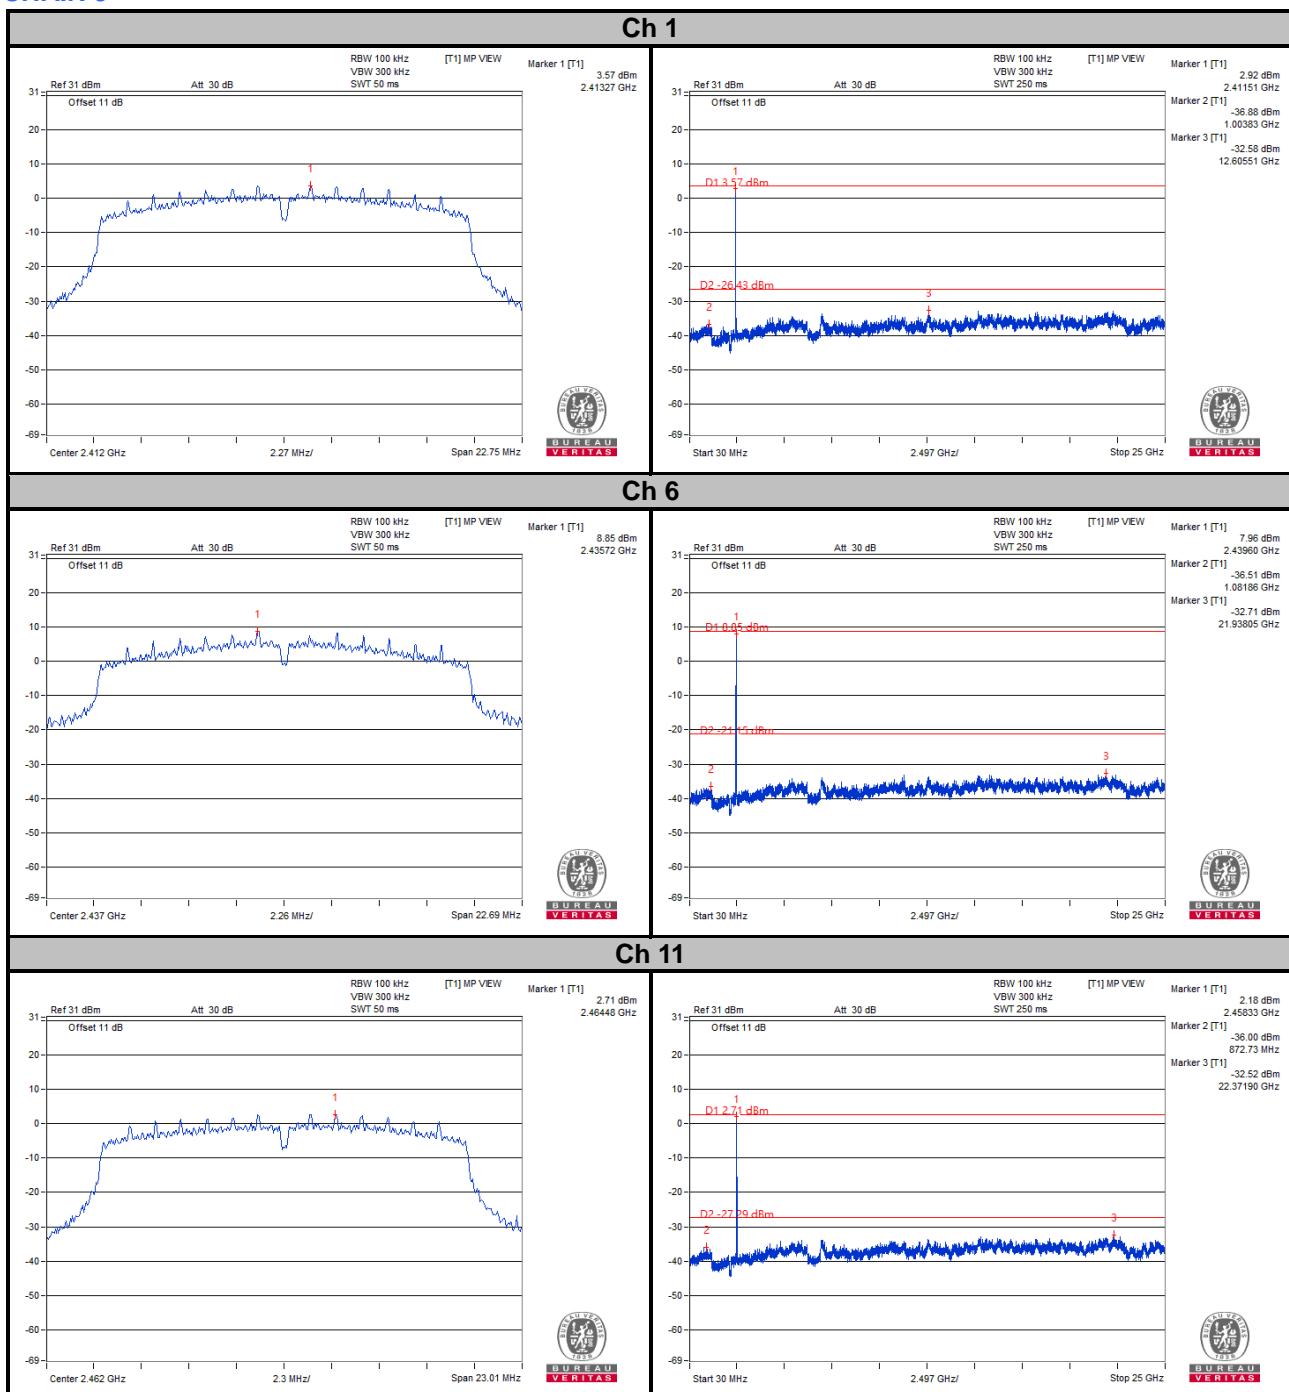
**CHAIN 2**

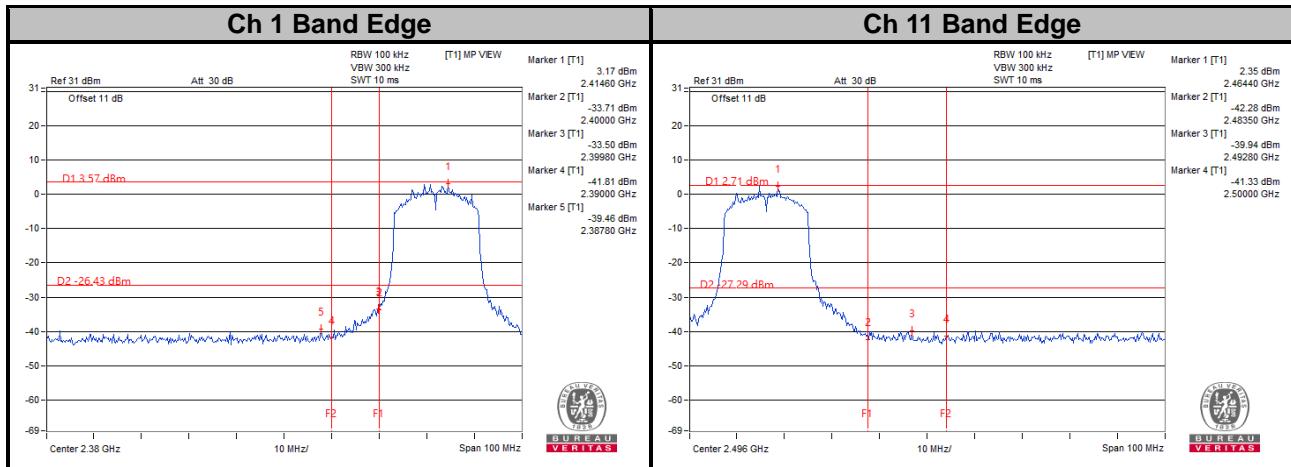


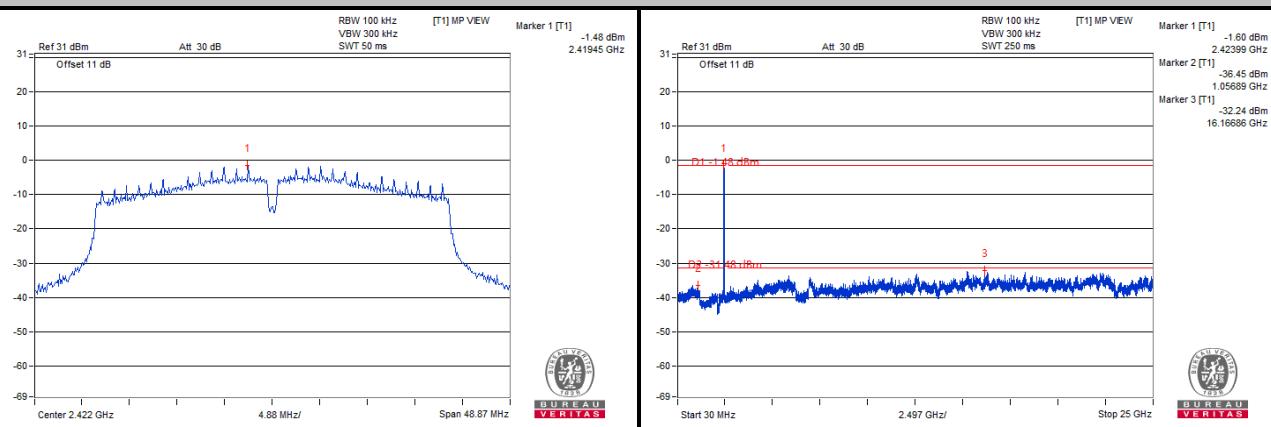
**CHAIN 3**




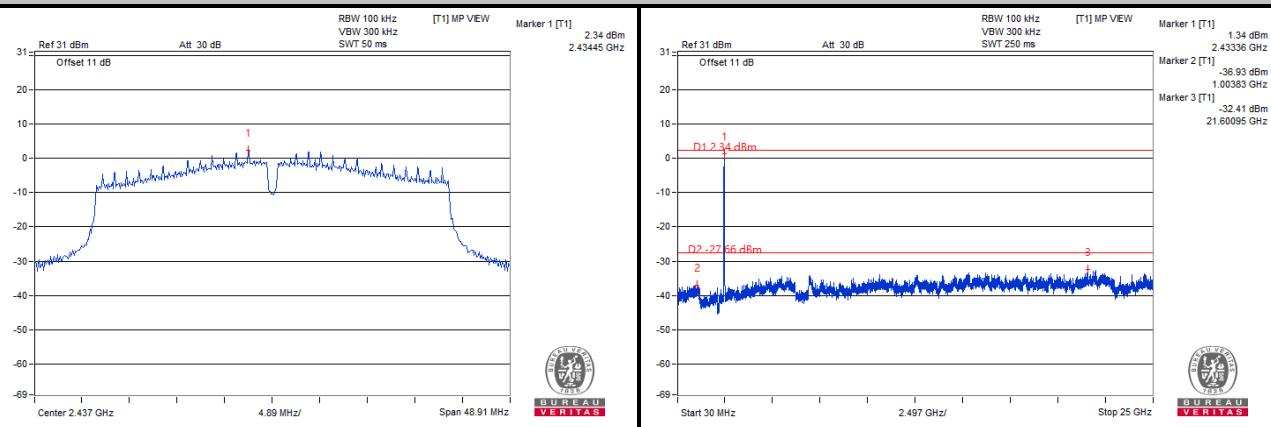
## 802.11n (HT40)

### CHAIN 0


**Ch 3**





**Ch 6**










**Ch 9**

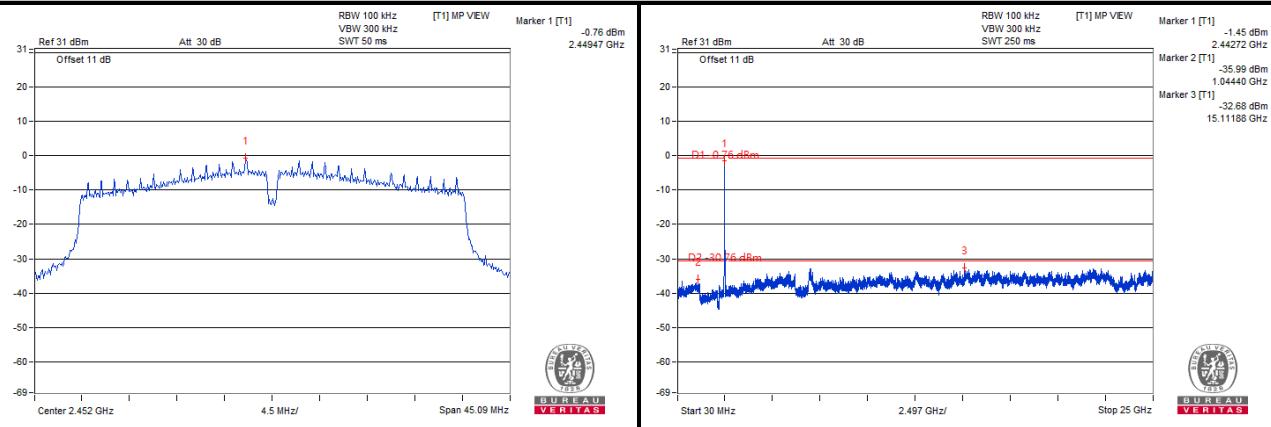


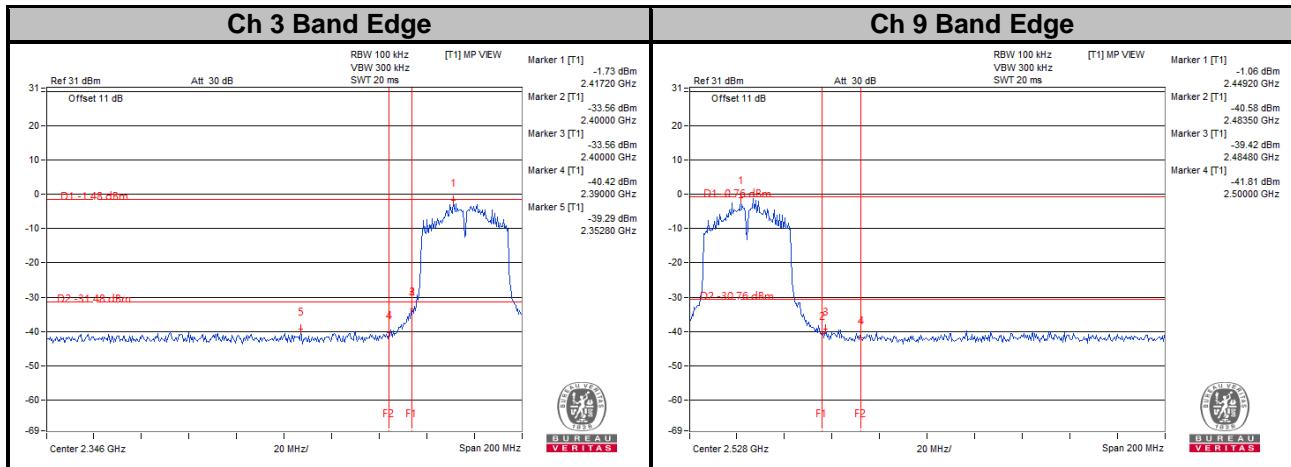

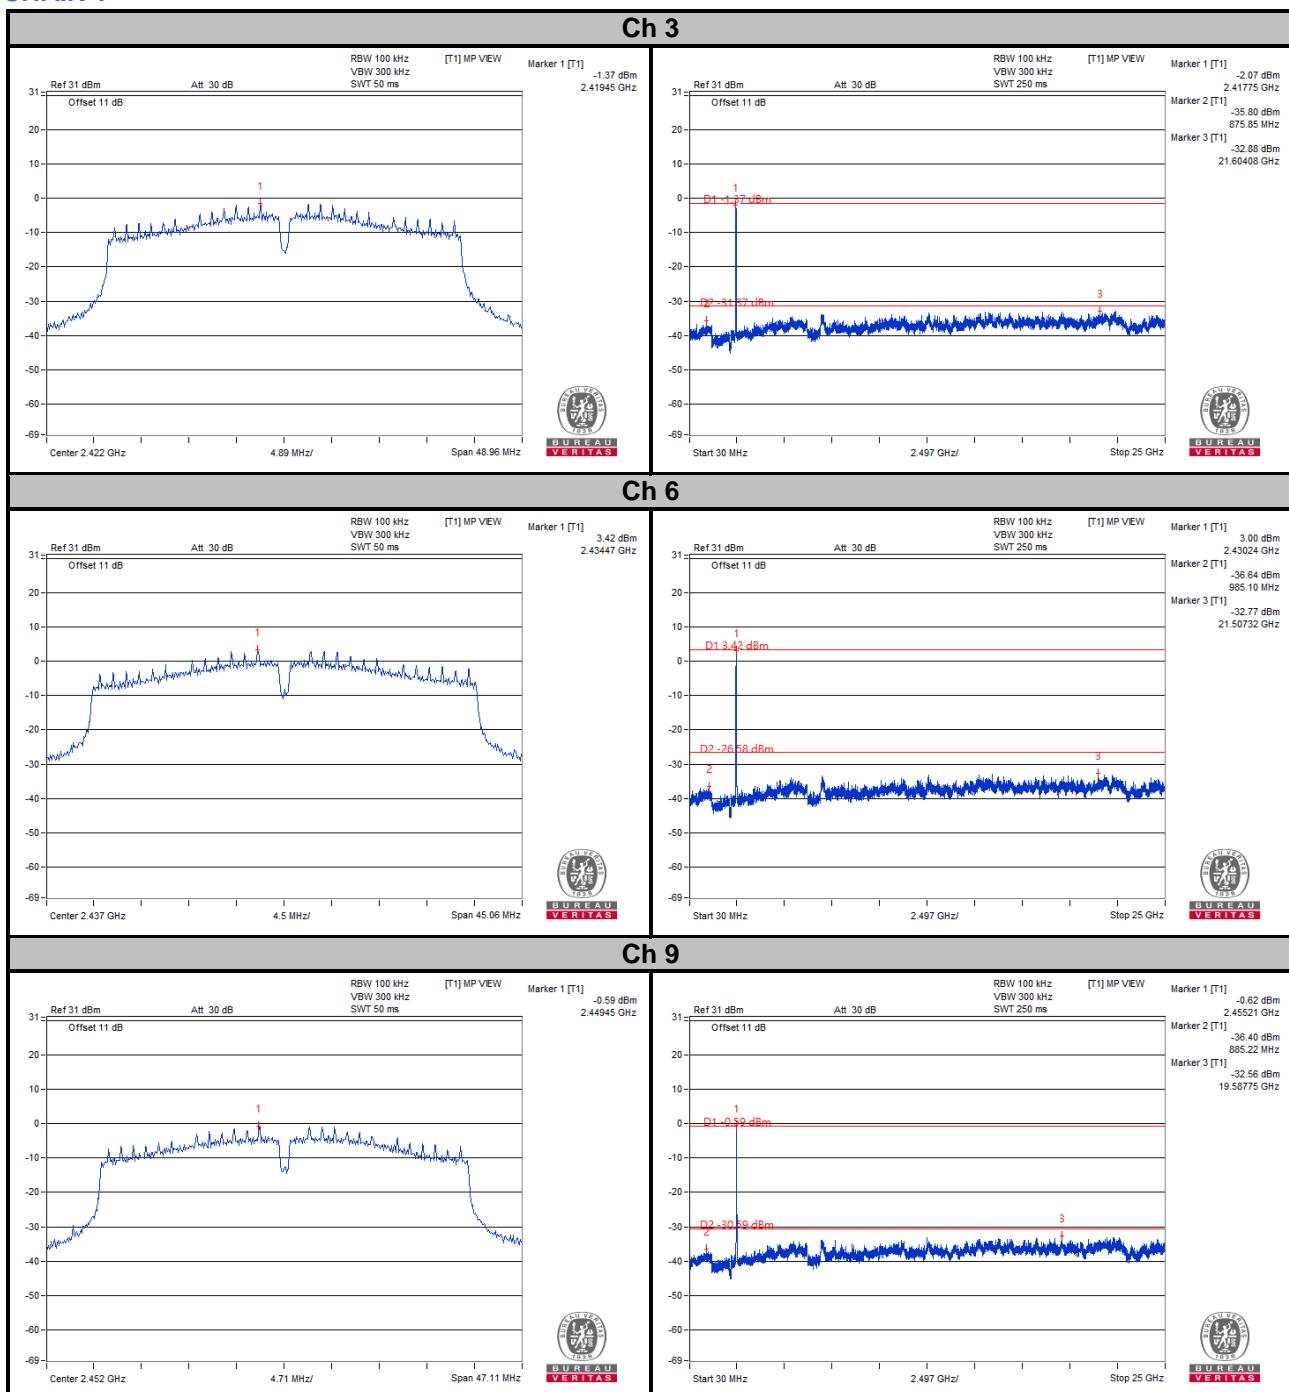**CHAIN 1**

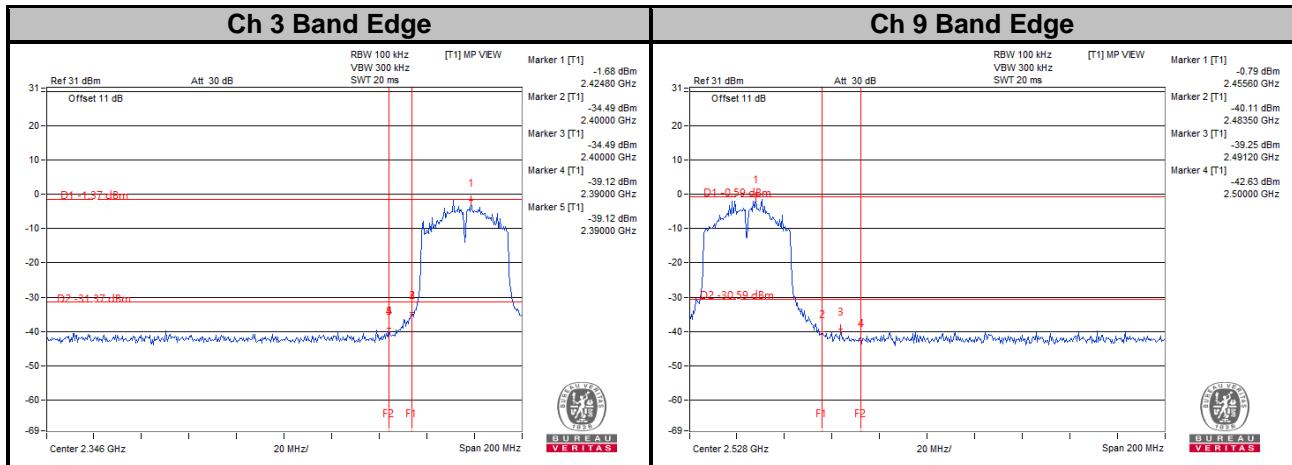
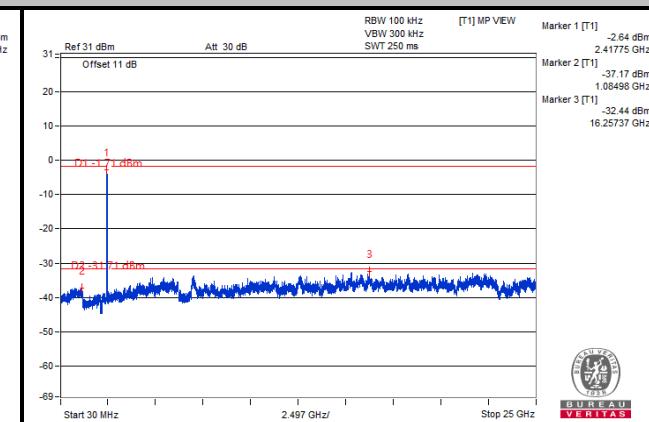
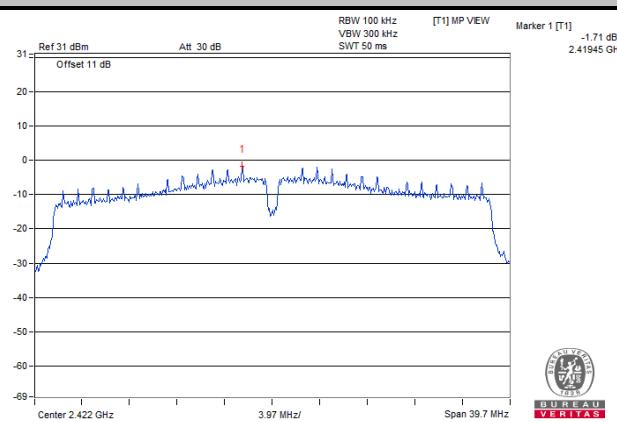


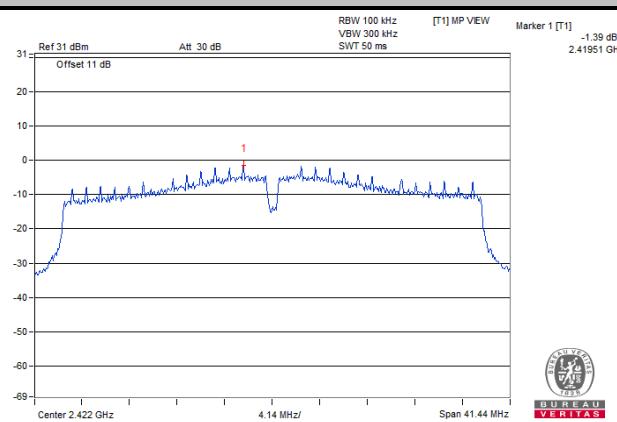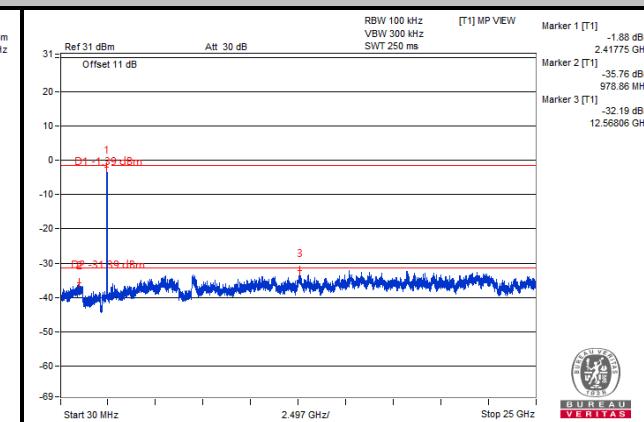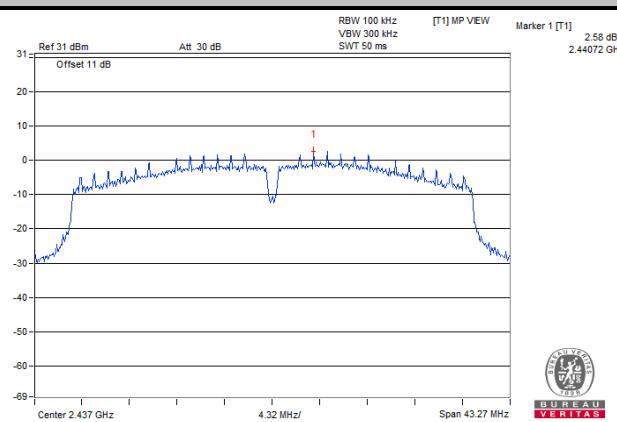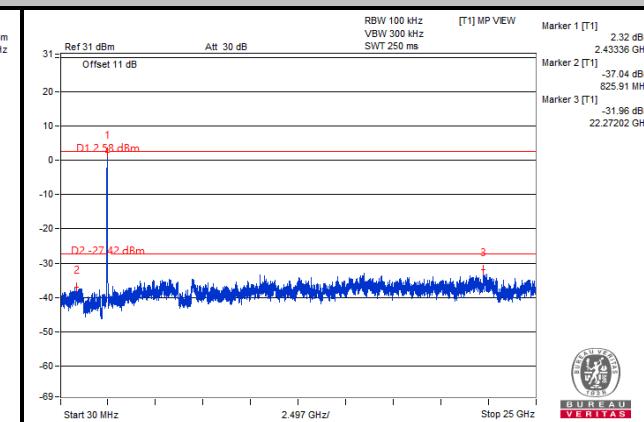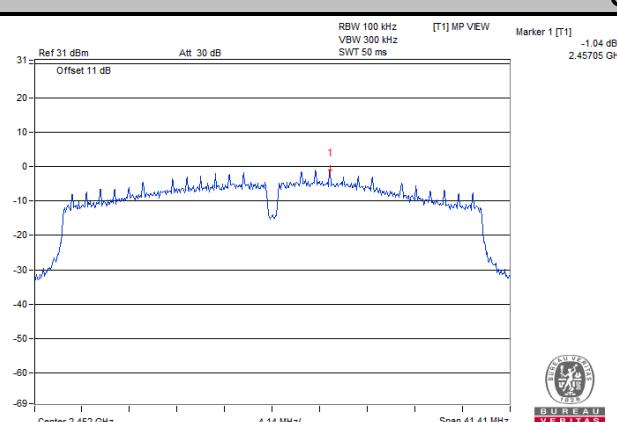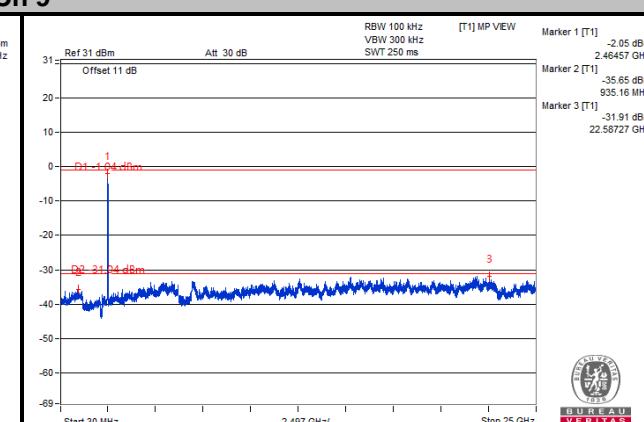**CHAIN 2**
**Ch 3**

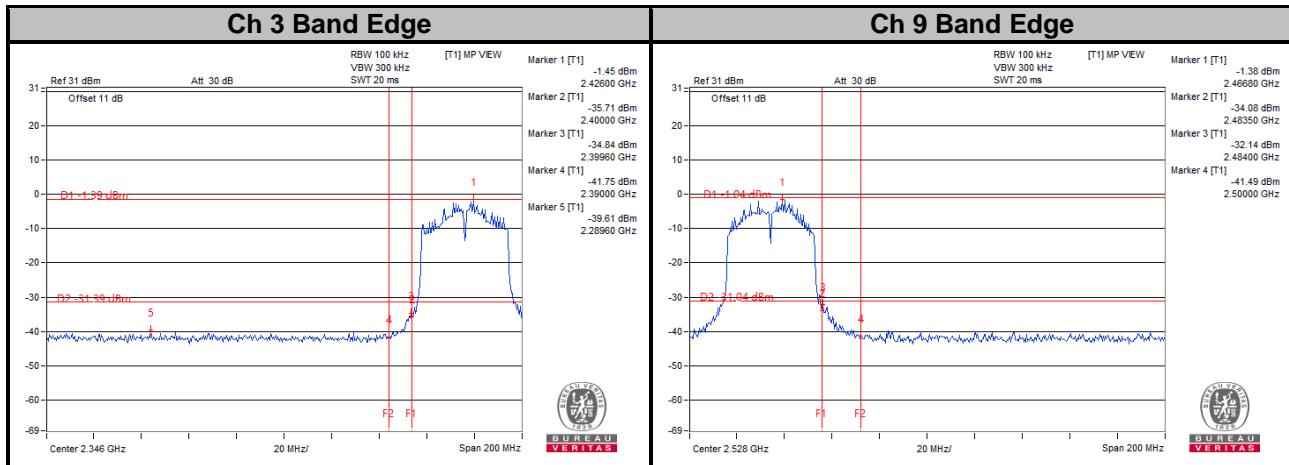**BUREAU  
VERITAS**
**Ch 3**

**BUREAU  
VERITAS**
**Ch 6**

**BUREAU  
VERITAS**

**BUREAU  
VERITAS**
**Ch 9**

**BUREAU  
VERITAS**

**BUREAU  
VERITAS**





### CHAIN 3



#### Ch 3




#### Ch 6

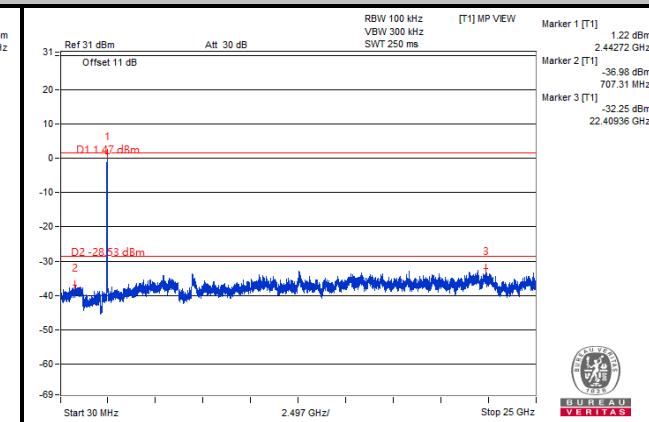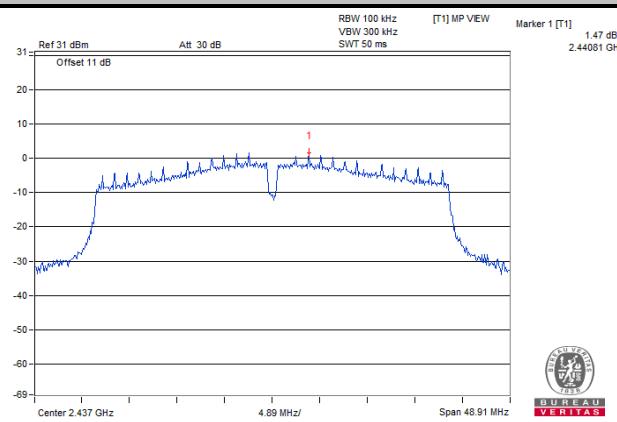

#### Ch 9

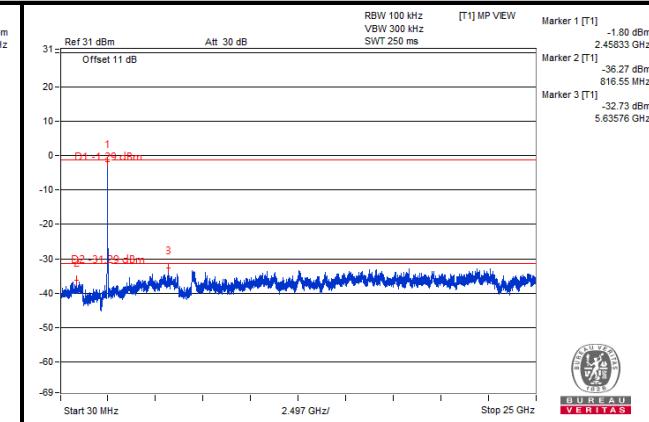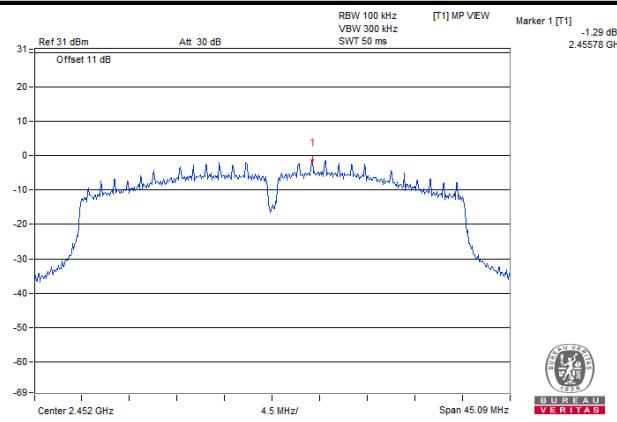

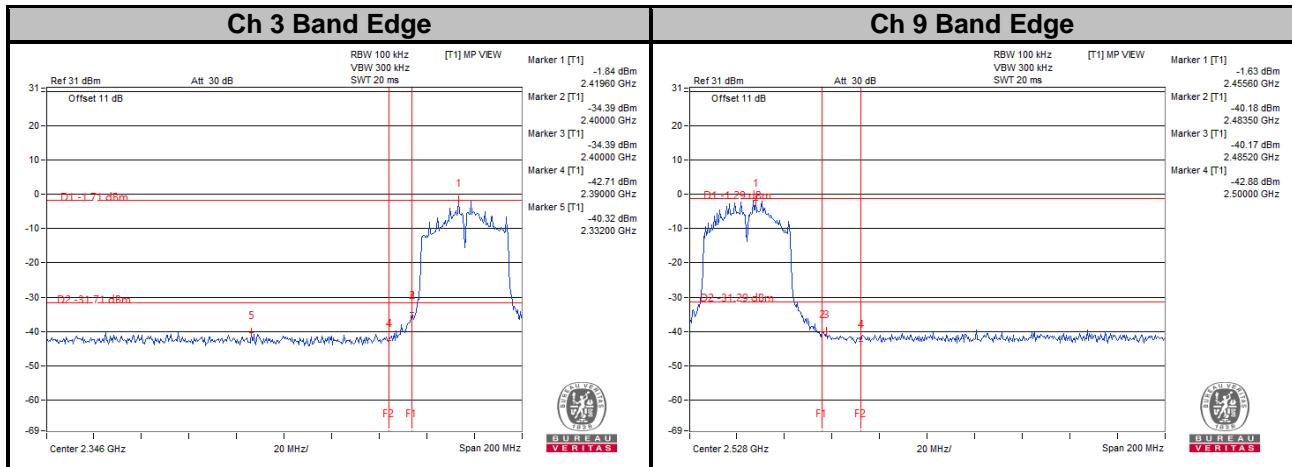



## 5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).


## Annex A - Band Edge Measurement


### 802.11b

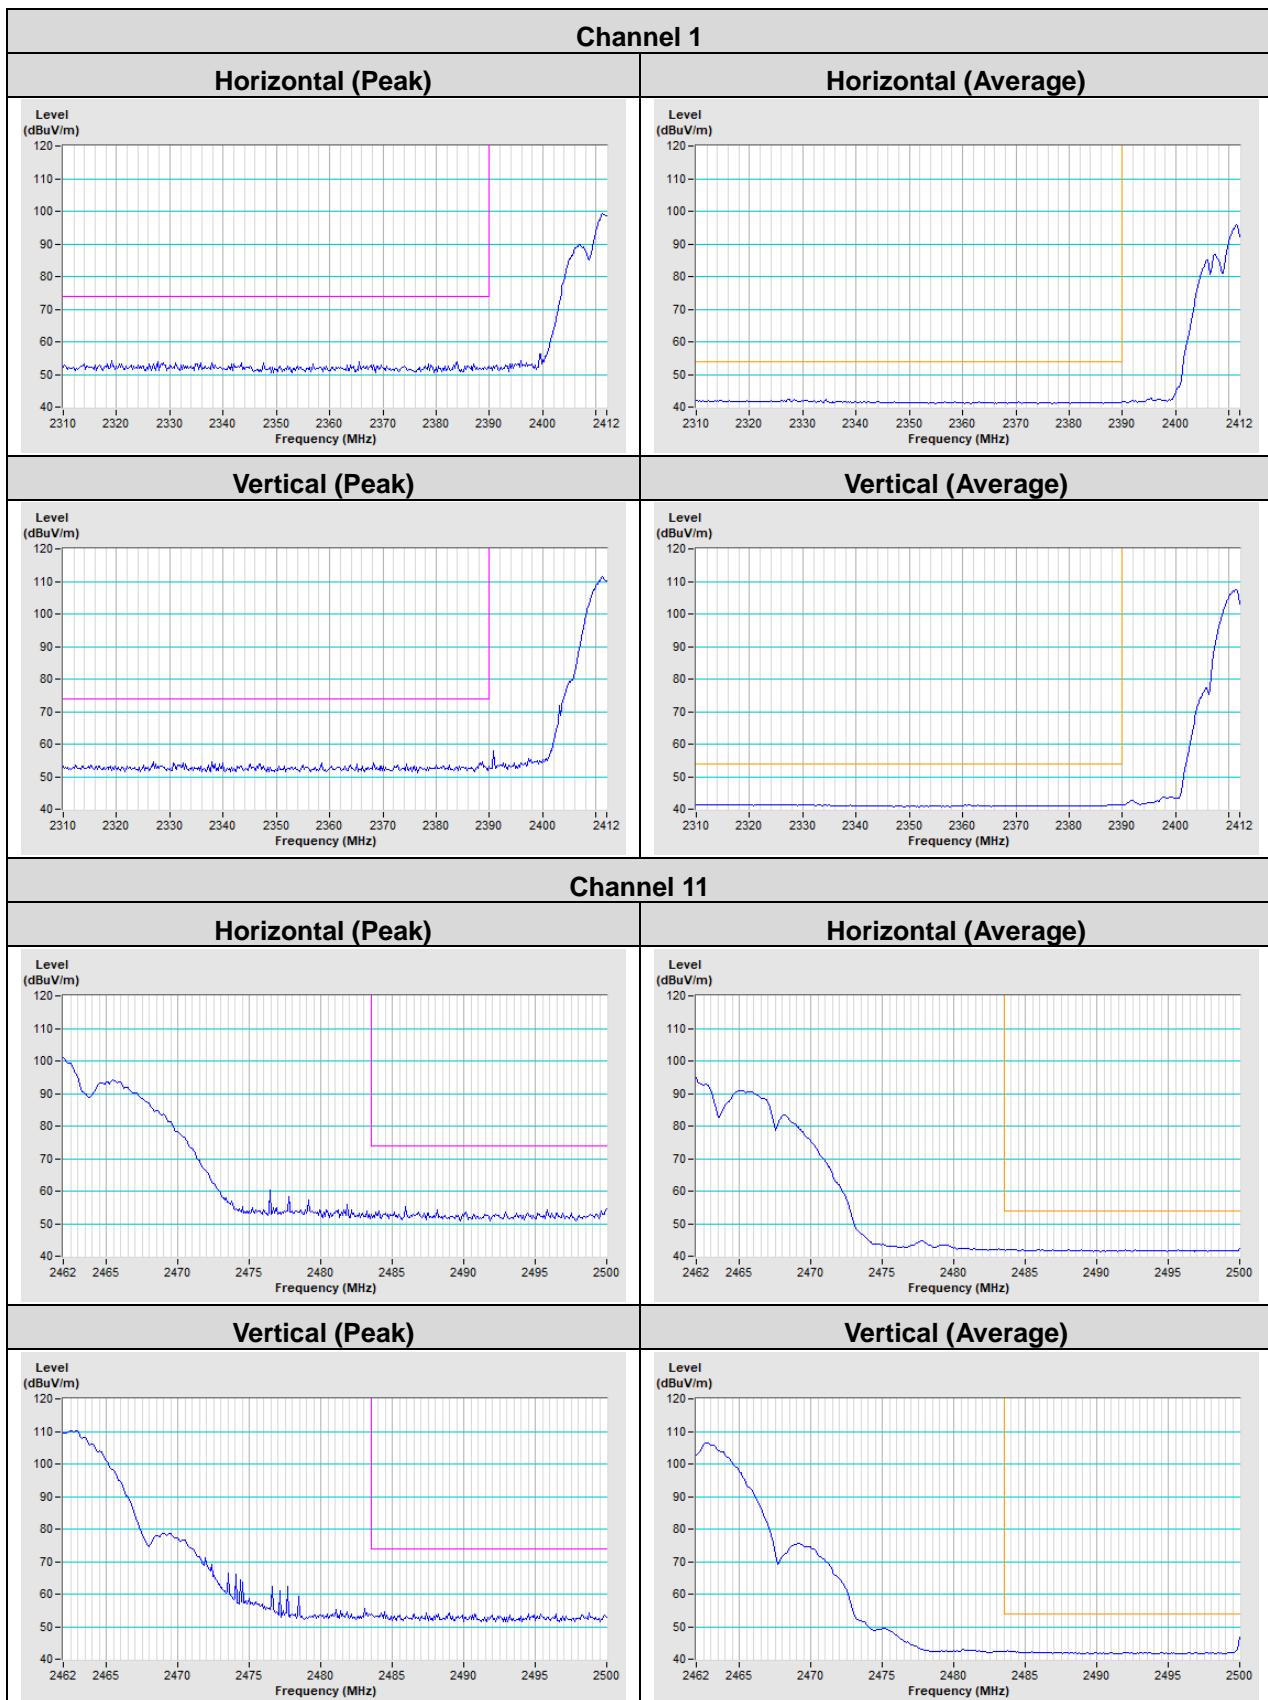

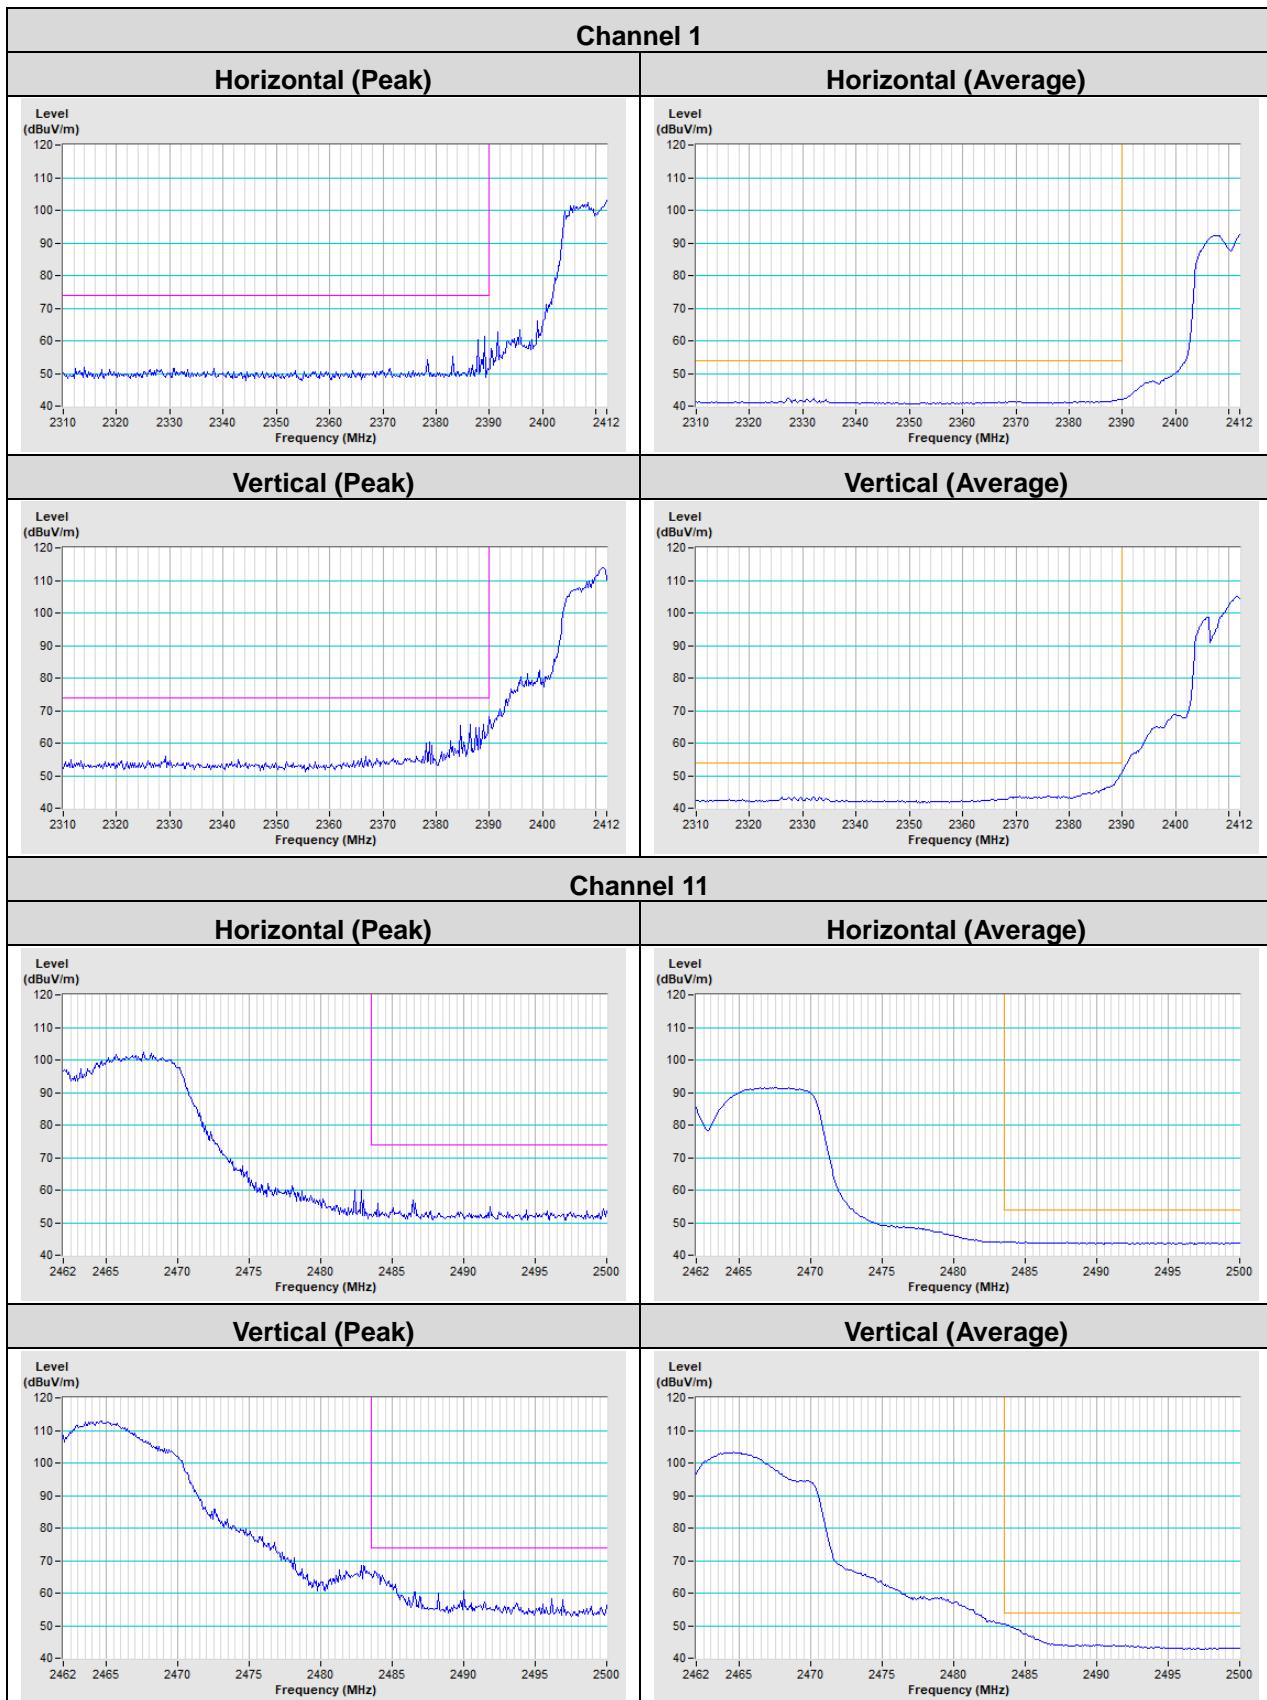**802.11g**

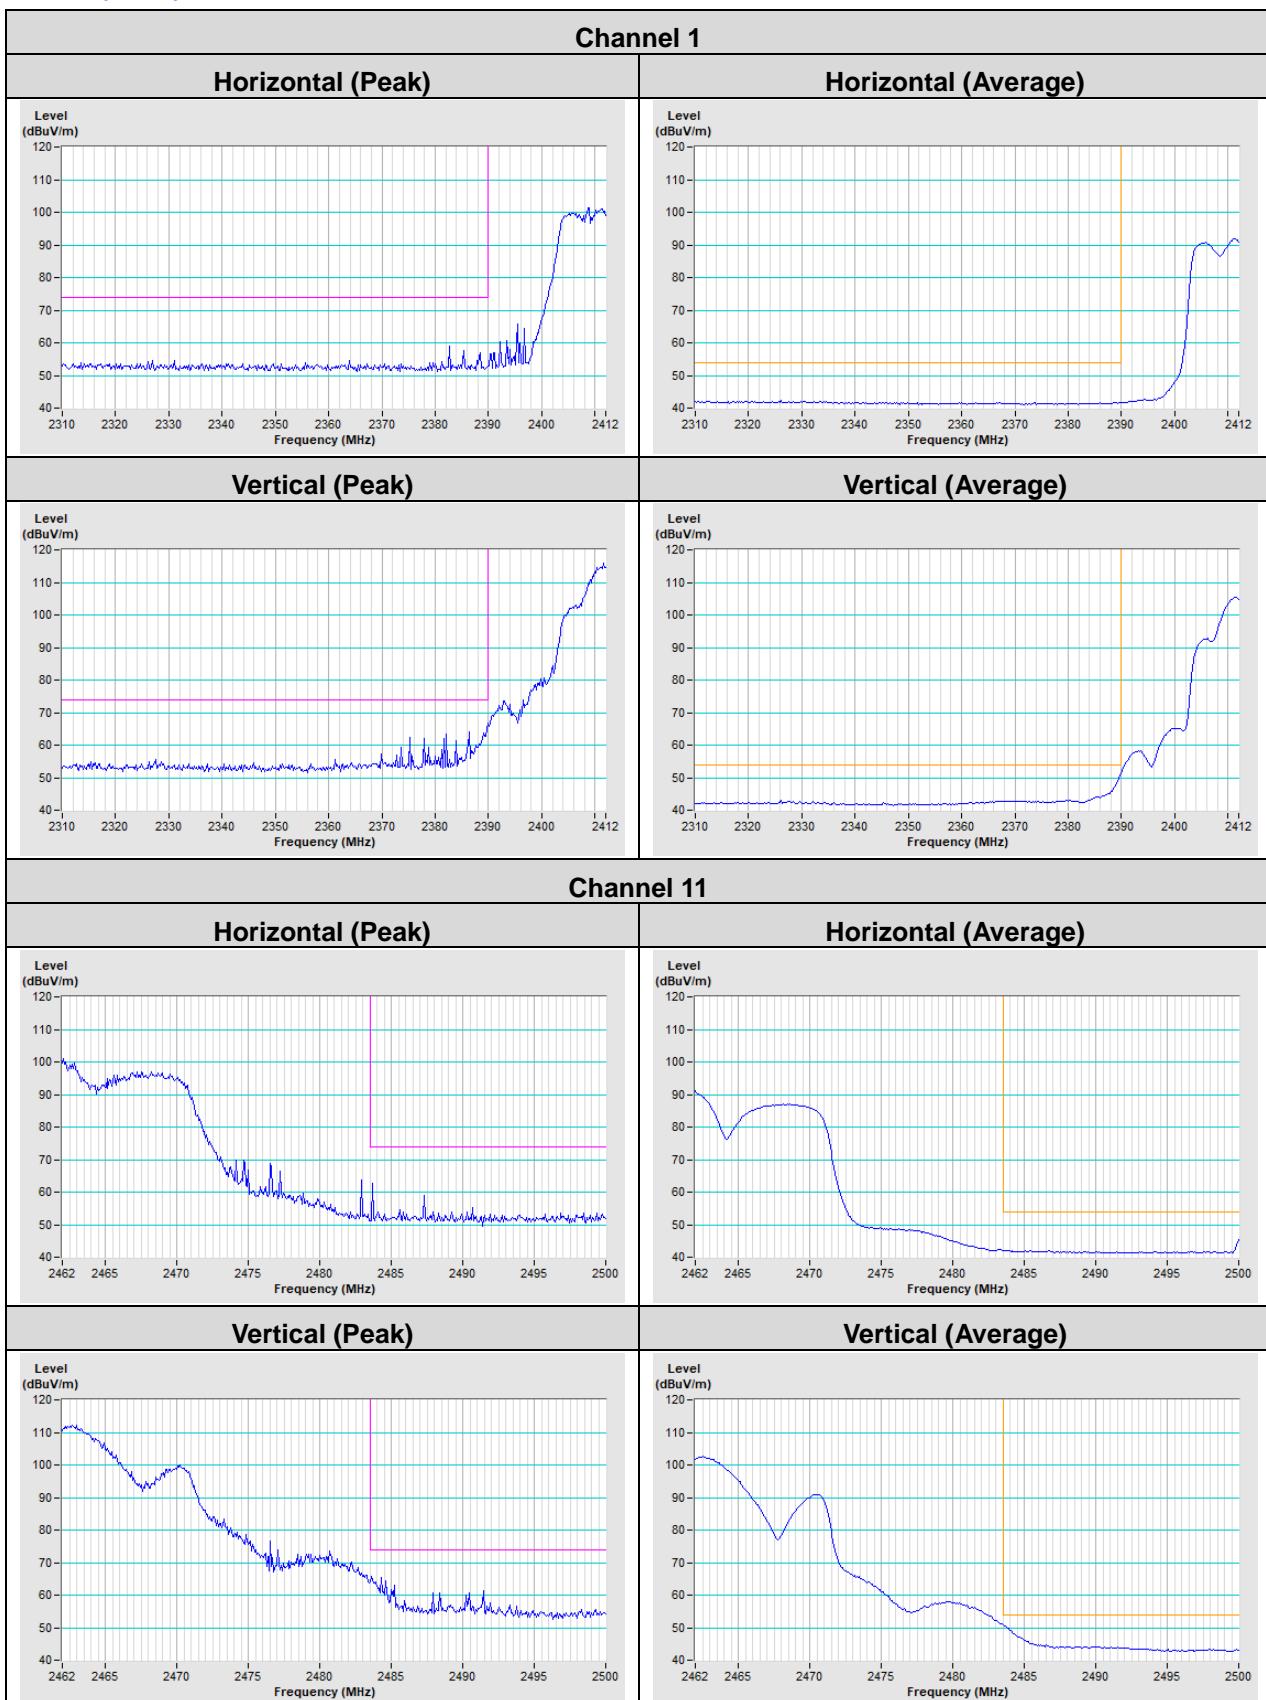
**802.11n (HT20)**

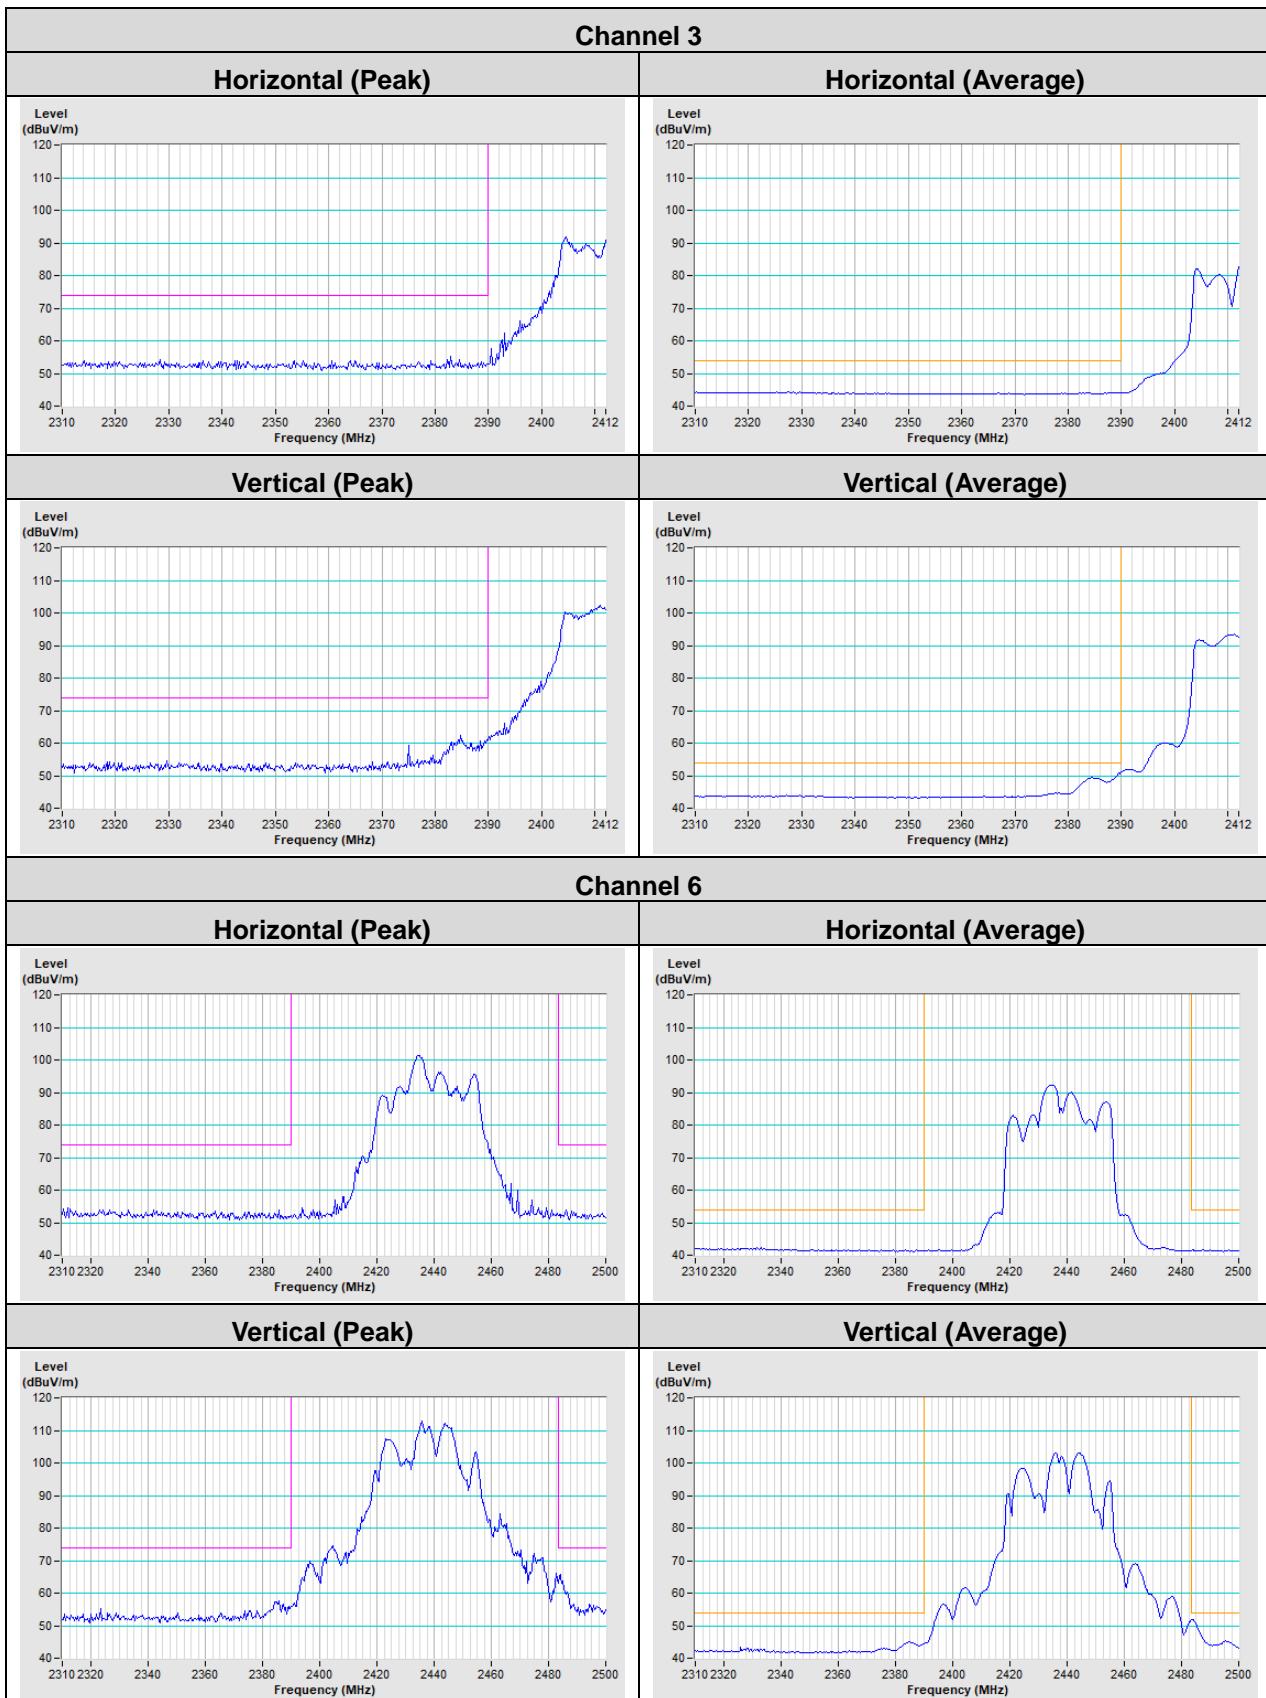
**802.11n (HT40)**

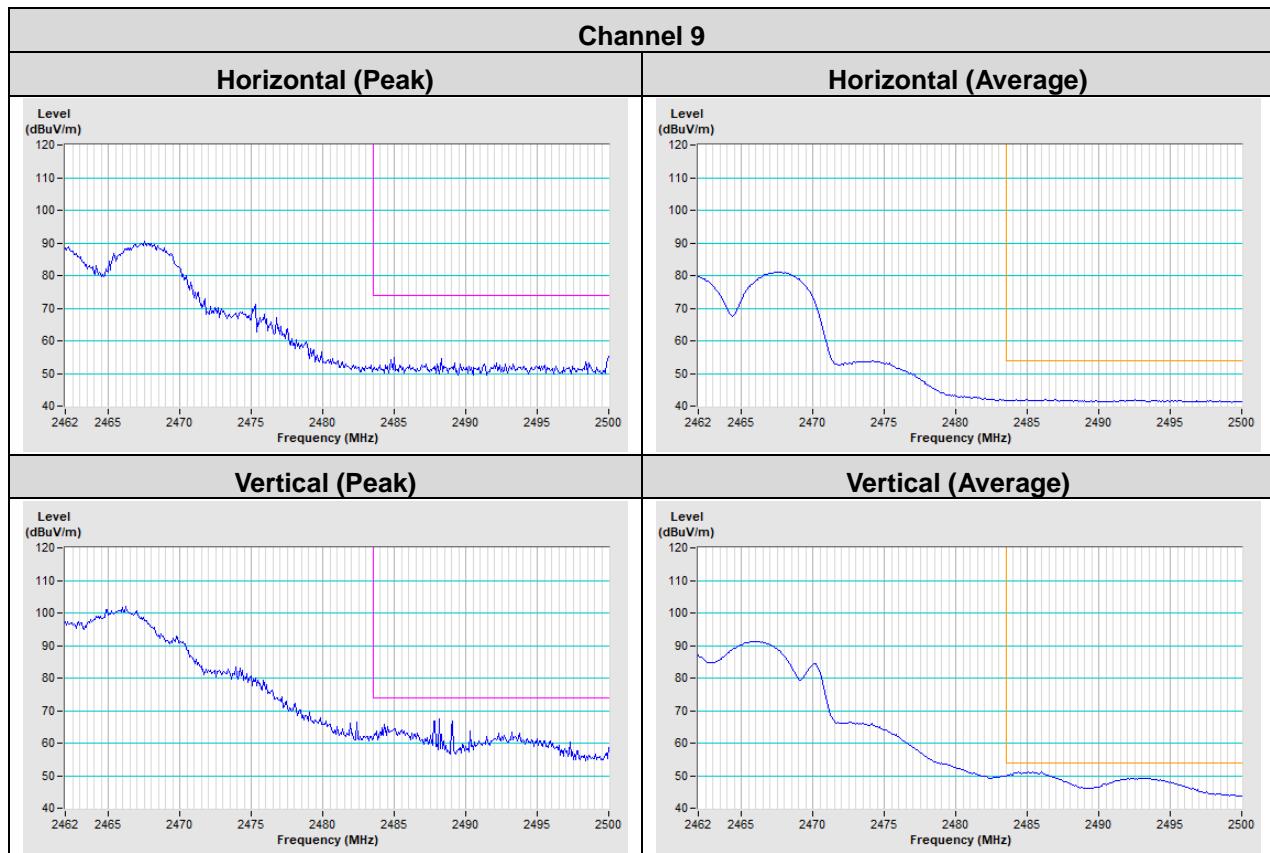


## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### **Lin Kou EMC/RF Lab**

Tel: 886-2-26052180  
Fax: 886-2-26051924

### **Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565  
Fax: 886-3-6668323

### **Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232  
Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---