

Certificate of Test

September 2007

ASUSTek COMPUTER INC

Product Type : Wireless slim keyboard

Model Number : RK626A

Test Report Number : 0708003R-01

Date of Test : August 03, 2007- August 07, 2007

This Product was tested to the following standards at the laboratory of Global EMC Standard Tech. Corp., and found Compliance.

Standards:

FCC Part 15 Subpart C Paragraph 15.249

ANSI C63.4: 2003

[http : //www.gestek.com.tw](http://www.gestek.com.tw)



Sharon Chang, President

GesTek EMC Lab

NO. 3, Pau-Tou-Tsuo Valley, Chia-Pau Tsuen,
Lin Kou Hsiang, Taipei County, Taiwan, R.O.C.
TEL:886-2-2603-5321
FAX:886-2-2603-5325

Date: September 05, 2007



NVLAP LAB CODE 200085-0





ASUSTek COMPUTER INC

**EUT:
Wireless slim keyboard**

**Model Number:
RK626A**

**FCC ID:
MSQ626A**

**Prepared for:
ASUSTek COMPUTER INC
15, Li-Te Rd., Peitou, Taipei 112, Taiwan**

**Report By :Global EMC Standard Tech. Corp.
No.3 Pau-Tou-Tsuo Valley, Chia-Pau
Tsuen, Lin Kou Hsiang, Taipei County,
Taiwan, R.O.C.
Tel : 886-2-2603-5321
Fax : 886-2-2603-5325**

1. Test results given in this report only relate to the specimen(s) tested, measured.
2. This report is the property of GesTek, and shall not be reproduced, other than in full, without the written consent of GesTek.
3. The report must not be used by the client to claim product certification, approval, or endorsement by any agency of the federal government.
4. All data in this report are traceable to national standard or international standard.

TABLE OF CONTENTS

DESCRIPTION	PAGE
1. CERTIFICATION.....	3
2. GENERAL INFORMATION.....	4
2.1 PRODUCTION DESCRIPTION.....	4
2.2 OPERATIONAL DESCRIPTION.....	5
2.3 TEST MODES & EUT COMPONENTS DESCRIPTION.....	5
2.4 SUMMARY OF TEST PROCEDURE AND TEST RESULTS.....	5
2.5 CONFIGURATION OF THE TESTED SYSTEM.....	5
2.6 TEST FACILITY.....	6
2.7 TEST SETUP.....	7
2.8 EUT OPERATING CONDITIONS.....	7
3. RADIATION EMISSION DATA.....	8
3.1 TEST EQUIPMENT.....	8
3.2 OPEN TEST SITE SETUP DIAGRAM.....	8
3.3 RADIATED EMISSION LIMIT.....	9
3.4 EUT CONFIGURATION.....	10
3.5 OPERATING CONDITION OF EUT.....	10
3.6 RADIATED EMISSION DATA.....	10
3.7 RADIATED EMISSIONS MEASUREMENT RESULTS.....	11
4. BAND EDGE.....	17
4.1 TEST EQUIPMENT.....	17
4.2 BLOCK DIAGRAM OF TEST SETUP.....	17
4.3 BAND EDGE LIMIT.....	18
4.4 EUT CONFIGURATION.....	18
4.5 OPERATING CONDITION OF EUT.....	18
4.6 TEST RELULT.....	19
5. DUTY CYCLE.....	25
5.1 TEST EQUIPMENT.....	25
5.2 BLOCK DIAGRAM OF TEST SETUP.....	25
5.3 TEST RESULT.....	25
6. PHOTOGRAPHS FOR TEST.....	27
6.1 TEST PHOTOGRAPHS FOR RADIATION.....	27
7. PHOTOGRAPHS FOR PRODUCT.....	29
8. EMI REDUCTION METHOD DURING COMPLIANCE TESTING.....	36

1. CERTIFICATION

Applicant : ASUSTek COMPUTER INC

EUT Description : Wireless slim keyboard
 Model Number : RK626A
 Serial Number : N/A
 Brand Name : ASUS
 FCC ID : MSQ626A
 Tested Power Supply : Battery DC 6V
 Manufacturer : Sunrex Technology Corp
 Manufacturer Address : No. 188-1, Chung Cheng Rd., Ta Ya Shiang, Taichung Hsien, Taiwan, R.O.C.

MEASUREMENT PROCEDURES USED:

- CFR 47, Part 15** Radio Frequency Device Subpart C Intentional Radiators :2005
- ANSI C63.4** Methods of Measurements of Radio-Noise Emissions from Low- Voltage Electrical and Electronic Equipment in the range of 9kHz To 40GHz. 2003

THE MEASUREMENT SHOWN IN THE ATTACHMENT WAS MADE IN ACCORDANCE WITH THE PROCEDURES INDICATED, AND THE MAXIMUM ENERGY EMITTED BY THE EQUIPMENT WAS FOUND TO BE WITHIN THE ABOVE LIMITS APPLICABLE.



NVLAP LAB CODE 200085-0

Date of est : **August 03, 2007 – August 07, 2007**

In order to ensure the quality and accuracy of this document, the contents have been thoroughly reviewed by the following qualified personnel from GesTek Lab.

Documented By :

Rini Chen

Rini Chen / adm. Dept. Supervisor

Test By :

John Wu

John Wu / eng. Dept. Engineer

Approved By :

Tony Lin

Tony Lin / General Manager

This test data shown below is traceable to National or international standard such as NIST/USA, etc. The laboratory's NVLAP accreditation in no way constitutes or implies product certification, approval, or endorsement by NVLAP or the United States government.

2. GENERAL INFORMATION

2.1 PRODUCTION DESCRIPTION

Product Name	: Wireless slim keyboard
Model Number	: RK626A
Serial Number	: N/A
Brand Name	: ASUS
FCC ID	: MSQ626A
Modulation Type	: GFSK
Antenna Type	: Printed on PCB
Frequencg Range	: 2.420 GHz
Channel Number	: 1 Channel
Working Voltage	: Battery 6V

Frequency of Each Channel:

Channel	Frequency (GHz)
1	2.420

Note:

1. This device is a Wireless slim keyboard included wireless transmission of keyboard and receiver. The test report is for transmitter.
2. This device is one channel and perform the test, then record on this report.
3. The antenna of EUT is printer on PCB and conform to FCC 15.203.
4. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.249.
5. The device of receiver to accordance with Part 15 regulations and under Declaration of Conformity and record of measurment in test report that the report number is 0708003F-01.

2.2 OPERATIONAL DESCRIPTION

This device is a Wireless slim keyboard included wireless transmitter of keyboard and receiver. It is powered by Battery 6V.

This device is only one channel and it is operated in 2.420GHz with GFSK modulation. The Receiver is usb interface and it is capable to receive signal from transmitter to control PC or notebook.

2.3 TEST MODES & EUT COMPONENTS DESCRIPTION

EUT: Wireless slim keyboard, M/N: RK626A	
Test Mode	Mode 1-Transmitter
Frequency	2.420 GHz

2.4 SUMMARY OF TEST PROCEDURE AND TEST RESULTS

Test Item	Applied Standard Section	Test Result
Radistion Emission	15.209, ANSI C63.4 Section 8	Pass (refer to section 3.7)
Peak Power Output	15.249(a), ANSI C63.4 Section 13 & Annex I	Pass (refer to section 3.7)
Band Edge	15.249(d) , ANSI C63.4 Section 13 & Annex I	Pass (refer to section 4.6)

2.5 CONFIGURATION OF THE TESTED SYSTEM

The FCC IDs/Types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

Non-test peripherals

2.6 TEST FACILITY

Ambient conditions in the laboratory:

ITEMS	Requirement
TEMPERATURE (°C)	10-40
HUMIDITY (%RH)	10-90
BAROMETRIC PRESSURE (mbar)	860-1060
FCC SITE DESCRIPTION	Aug. 10, 1995 /Aug. 25, 1998 File on FCC Engineering Laboratory Federal Communication Commission 7435 Oakland Mills Road Columbia, MD 21046 Reference 31040/SIT1300F2
NVLAP LAB. CODE	200085-0 United States Department of commerce National Institute of Standards and Technology National Voluntary Laboratory Accreditation Program Accreditation on NVLAP effective through Sep. 30,2007 For CISPR 22, FCC Method and AS/NZS CISPR 22 Measurement.
Taiwan Accreditation Foundation (TAF)	Recognized by the Council of Taiwan Accreditation Foundation and confirmed to meet the requirements of ISO/IEC 17025. Registration No.: 1082 Registration on TAF effective through Sep. 19,2009

2.7 TEST SETUP



EUT:
Wireless slim keyboard

2.8 EUT OPERATING CONDITIONS

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

1. Setup the EUT and simulators as shown on 2.7.
2. Turn on the power of all equipments.
3. The transmitter will transmit the signal continue.
4. Confirm the receiver is receive signal continue.
5. Repeat the above steps.

3. RADIATION EMISSION DATA

3.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:

Radiated test was performed on: Site #1 Site #2 Site #3 Site #4 Site #5


Item	Instrument	Manufacturer	Model	Serial No.	Last Cal.
1	Test Receiver	R & S	ESVS10	8421122/001	04/17/07
2	Spectrum Analyzer	R & S	FSP40	100061	04/09/07
3	Power Meter	Rohde & Schwarz	NRVS	100666	04/04/07
4	Peak Power Sensor	Rohde & Schwarz	NRV-Z32	8360191058	04/04/07
5	Pre-Amplifier	EMV-Technik	PA303	N/A	06/05/07
6	Pre-Amplifier	HP	8449B	3008A01263	03/22/07
7	BILOG ANTENNA	SCHAFFNER	CBL6112B	2879	03/10/07
8	HORN ANTENNA	SCHWARZBECK	BBHA 9120	D243	12/25/06
9	CABLE	PEWC	CFD400-NL	GTK-E-A394-01	02/16/07
10	Open Site	GesTek	N/A	C1	02/13/07
11	Test Program Software	GesTek	N/A	GTK-E-S001-01	N/A

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

3.2 OPEN TEST SITE SETUP DIAGRAM

Note: This is a representative setup diagram for Table-top EUT.

For Floor-standing EUT, the table will be removed with all others setup condition remain the same.

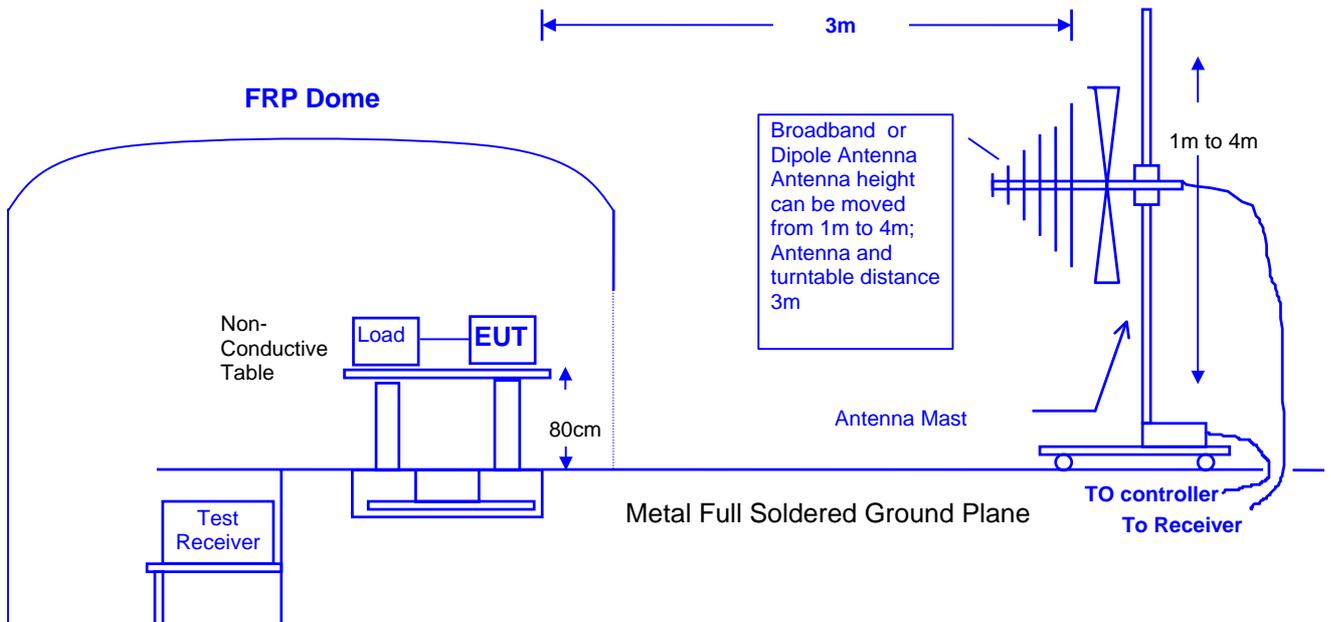

3.3 RADIATED EMISSION LIMIT

General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

Frequency	Distance	Field Strength	
		$\mu\text{V/M}$	$\text{dB}\mu\text{V/M}$
MHz	Meter		
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0

Remarks :

1. RF Voltage ($\text{dB}\mu\text{V/m}$) = $20 \log$ RF Voltage ($\mu\text{V/m}$)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Fundamental and Harmonics Emission Limits

Frequency	Distance	Field Strength of Fundamental		Field Strength of Harmonics	
		$\mu\text{V/M}$	$\text{dB}\mu\text{V/M}$	$\mu\text{V/M}$	$\text{dB}\mu\text{V/M}$
MHz	Meter				
902-928	3	50	94	500	54
2400-2483.5	3	50	94	500	54
5725-5875	3	50	94	500	54

Remarks :

1. RF Voltage ($\text{dB}\mu\text{V/m}$) = $20 \log$ RF Voltage ($\mu\text{V/m}$)
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4 EUT CONFIGURATION

The equipment which is listed 2.6 are installed on Radiated Emission Test to meet the Commission requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

The device under test, installed in a representative system as described in section 3.2, was placed on a non-conductive table whose total height equaled 80 cm. This table can be rotated 360 degree. The measurement antenna was mounted to a non-conductive mast capable of moving the antenna vertically. Antenna height was varied from 1 meter to 4 meters and the system under test was rotated from 0 degree through 360 degrees relative to the antenna position and polarization (Horizontal and Vertical). Also the I/O cable position was investigated to find the maximum emission condition.

3.5 OPERATING CONDITION OF EUT

Same as section 2.7.

3.6 RADIATED EMISSION DATA

The measurement range of radiated emission, which is from [30 MHz to 10 Harminics](#), was investigated. All readings below 1GHz are quasi-peak values with a resolution bandwidth of 120 KHz. Above 1GHz are peak and avg. values with a resolution bandwidth of 1MHz. The initial step in collecting radiated emission data is a spectrum analyzer peak scans of the measurement range for all the test modes and then use test receiver for final measurement. Then the worst modes were reported the following data pages.

3.7 RADIATED EMISSIONS MEASUREMENT RESULTS

3.7.1 HARMONIC RADIATED EMISSIONS


Date of Test	August 07, 2007	Temperature	26 deg/C
EUT	Wireless slim keyboard	Humidity	60 %RH
Working Cond.	Channel 1	Display Pattern	H Pattern
Antenna distance	3m at Horizontal	Frequency Range	30-1000MHz

No.	Frequency MHz	Reading Level dBµV	Factor dB	Measurement dBµV/m	Limit dBµV/m	Over Limit dB	Detector
1	57.7500	55.00	-22.12	32.88	40.00	-7.12	QP
2	166.8840	47.50	-18.58	28.92	43.50	-14.58	QP
3	315.2800	46.89	-13.99	32.90	46.00	-13.10	QP
4	499.9500	48.60	-9.92	38.68	46.00	-7.32	QP
5	687.2600	45.21	-6.86	38.35	46.00	-7.65	QP
6	781.8700	42.68	-6.12	36.56	46.00	-9.44	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ±0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “ ” means that this data is the worse case measurement level.

80.0 dBµV/m

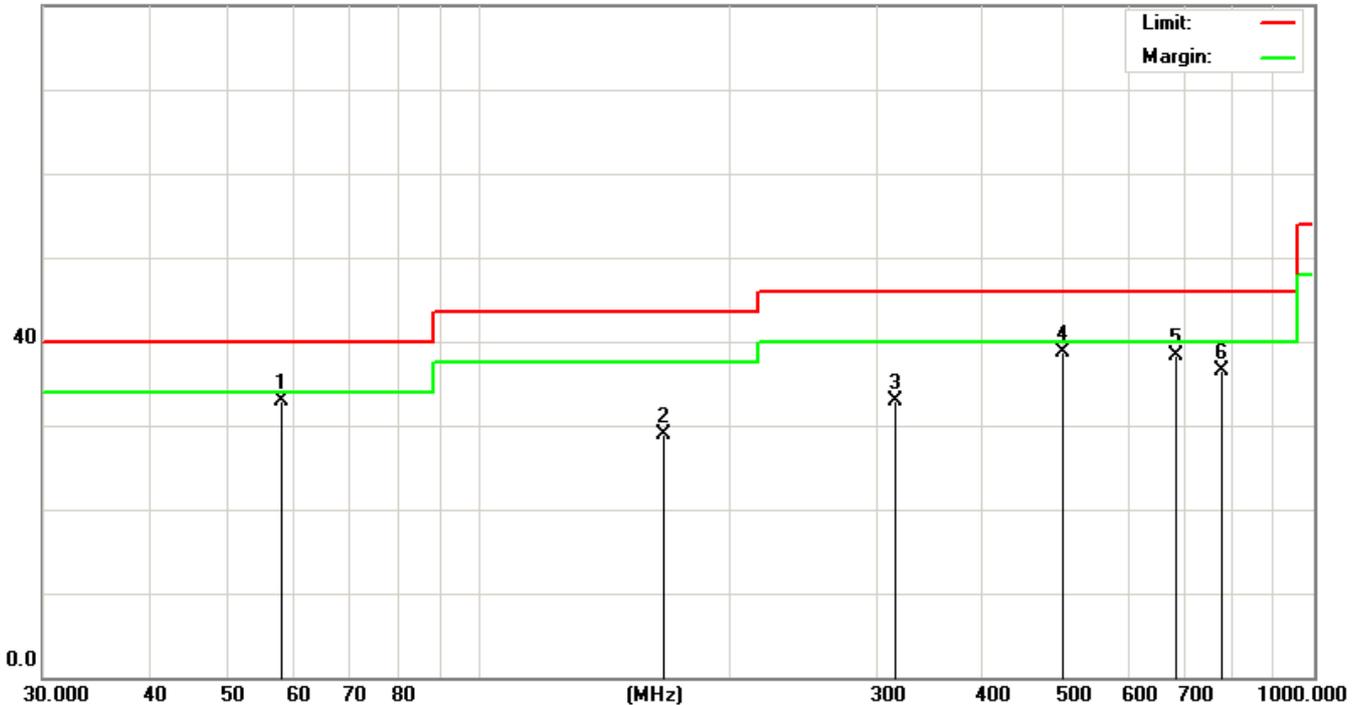

Remark: 1. The "Limit" in right-up corner in above diagram refers to Quasi-peak ; "Margin" refers to the data under 6dB.


Date of Test	August 07, 2007	Temperature	26 deg/C
EUT	Wireless slim keyboard	Humidity	60 %RH
Working Cond.	Channel 1	Display Pattern	H Pattern
Antenna distance	3m at Vertical	Frequency Range	30-1000MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	57.7320	50.87	-22.11	28.76	40.00	-11.24	QP
2	157.3680	46.78	-18.15	28.63	43.50	-14.87	QP
3	248.5970	47.36	-16.18	31.18	46.00	-14.82	QP
4	388.5900	47.88	-11.71	36.17	46.00	-9.83	QP
5	515.2890	48.26	-9.58	38.68	46.00	-7.32	QP
6	812.8600	40.58	-5.77	34.81	46.00	-11.19	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ±0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “ ” means that this data is the worse case measurement level.

80.0 dBμV/m

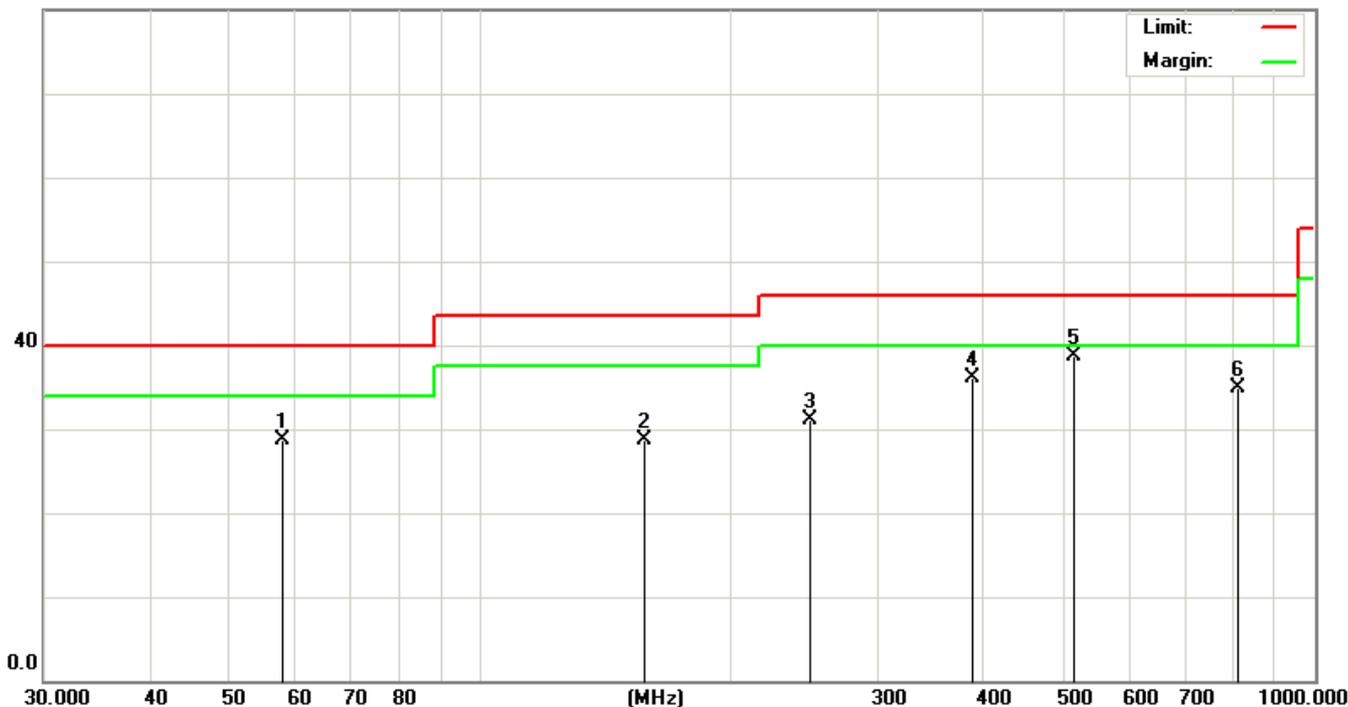

Remark: 1. The "Limit" in right-up corner in above diagram refers to Quasi-peak ; "Margin" refers to the data under 6dB.

Date of Test	August 03, 2007	Temperature	24.4 deg/C
EUT	Wireless slim keyboard	Humidity	61 %RH
Working Cond.	Channel 1	Display Pattern	H Pattern
Antenna distance	3m at Horizontal	Frequency Range	Above 1GHz

Peak

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB
1	4839.6400	63.14	1.45	64.59	74.00	-9.41
2	7259.6000	46.48	9.48	55.96	74.00	-18.04
3	9680.0400	44.40	6.82	< 51.22	74.00	-22.78
4	12100.0800	40.26	13.32	< 53.58	74.00	-20.42
5	14520.0400	44.53	8.64	< 53.17	74.00	-20.83
6	16940.2000	47.55	6.34	< 53.89	74.00	-20.11

Average

No.	Frequency MHz	Peak Measurement dB(uV/m)	Duty Cycle dB	Measurement dB(uV/m)	Limit dB(uV/m)	Margin dB
1	4839.64	64.59	-20	44.59	54.00	-9.41
2	7259.60	55.96	-20	35.96	54.00	-18.04

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz, Span=100MHz.
3. AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
4. Measurement = Reading + Factor (Could have ±0.01 tolerance due to computer automatically round off calculation).
5. Factor = antenna factor + cable loss – amplifier gain.
6. Over Limit (Margin Value)=Measurement level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
8. The Duty Cycle is refer to section 5.
9. If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

Date of Test	August 03, 2007	Temperature	24.4 deg/C
EUT	Wireless slim keyboard	Humidity	61 %RH
Working Cond.	Channel 1	Display Pattern	H Pattern
Antenna distance	3m at Vertical	Frequency Range	Above 1GHz

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	4839.6000	57.92	1.73	59.65	74.00	-14.35
2	7259.6400	47.19	8.68	55.87	74.00	-18.13
3	9680.0400	43.62	9.96	< 53.58	74.00	-20.42
4	12100.0800	37.80	15.77	< 53.57	74.00	-20.43
5	14520.0400	46.09	6.93	< 53.02	74.00	-20.98
6	16940.0400	47.62	5.90	< 53.52	74.00	-20.48

Average

No.	Frequency MHz	Peak Measurement dB(uV/m)	Duty Cycle dB	Measurement dB(uV/m)	Limit dB(uV/m)	Margin dB
1	4839.60	59.65	-20	39.65	54.00	-14.35
2	7259.64	55.87	-20	35.87	54.00	-18.13

Remark

- All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
- Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz, Span=100MHz.
- AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
- Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
- Factor = antenna factor + cable loss – amplifier gain.
- Over Limit (Margin Value)=Measurement level-Limit value.
- The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
- The Duty Cycle is refer to section 5.
- If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

3.7.2 FUNDAMENTAL RADIATED EMISSIONS

Date of Test	August 03, 2007	Temperature	24.4 deg/C
EUT	Wireless slim keyboard	Humidity	61 %RH
Working Cond.	Channel 1		
Antenna distance	3m at Horizontal		

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	2419.9200	57.62	35.71	93.33	114.00	-20.67

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
4. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
5. Factor = antenna factor + cable loss – amplifier gain.
6. Over Limit (Margin Value)=Measurement level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
8. The Duty Cycle is refer to section 5.
9. If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

Date of Test	August 03, 2007	Temperature	24.4 deg/C
EUT	Wireless slim keyboard	Humidity	61 %RH
Working Cond.	Channel 1		
Antenna distance	3m at Vertical		

Peak

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB
1	2419.9600	42.85	30.47	73.32	114.00	-40.68

Remark

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ, Span=100MHz.
3. AVG Measurement =Peak Measurement + Duty Cycle(Log Scale).
4. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
5. Factor = antenna factor + cable loss – amplifier gain.
6. Over Limit (Margin Value)=Measurement level-Limit value.
7. The average measurement was not performed when the peak measured data under the limit of average detection. If the average value is measured, peak measurement should also be supplied.
8. The Duty Cycle is refer to section 5.
9. If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

4. BAND EDGE


4.1 TEST EQUIPMENT

Item	Instrument	Manufacturer	Model	Serial No.	Last Cal.
1	Test Receiver	R & S	ESVS10	8421122/001	04/17/07
2	Spectrum Analyzer	R & S	FSP40	100061	04/09/07
3	Power Meter	Rohde & Schwarz	NRVS	100666	04/04/07
4	Peak Power Sensor	Rohde & Schwarz	NRV-Z32	8360191058	04/04/07
5	Pre-Amplifier	EMV-Technik	PA303	N/A	06/05/07
6	Pre-Amplifier	HP	8449B	3008A01263	03/22/07
7	BILOG ANTENNA	SCHAFFNER	CBL6112B	2879	03/10/07
8	HORN ANTENNA	SCHWARZBECK	BBHA 9120	D243	12/25/06
9	CABLE	PEWC	CFD400-NL	GTK-E-A394-01	02/16/07
10	Open Site	GesTek	N/A	C1	02/13/07
11	Test Program Software	GesTek	N/A	GTK-E-S001-01	N/A

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

4.2 BLOCK DIAGRAM OF TEST SETUP

◎ RF Radiated Measurement: ◎

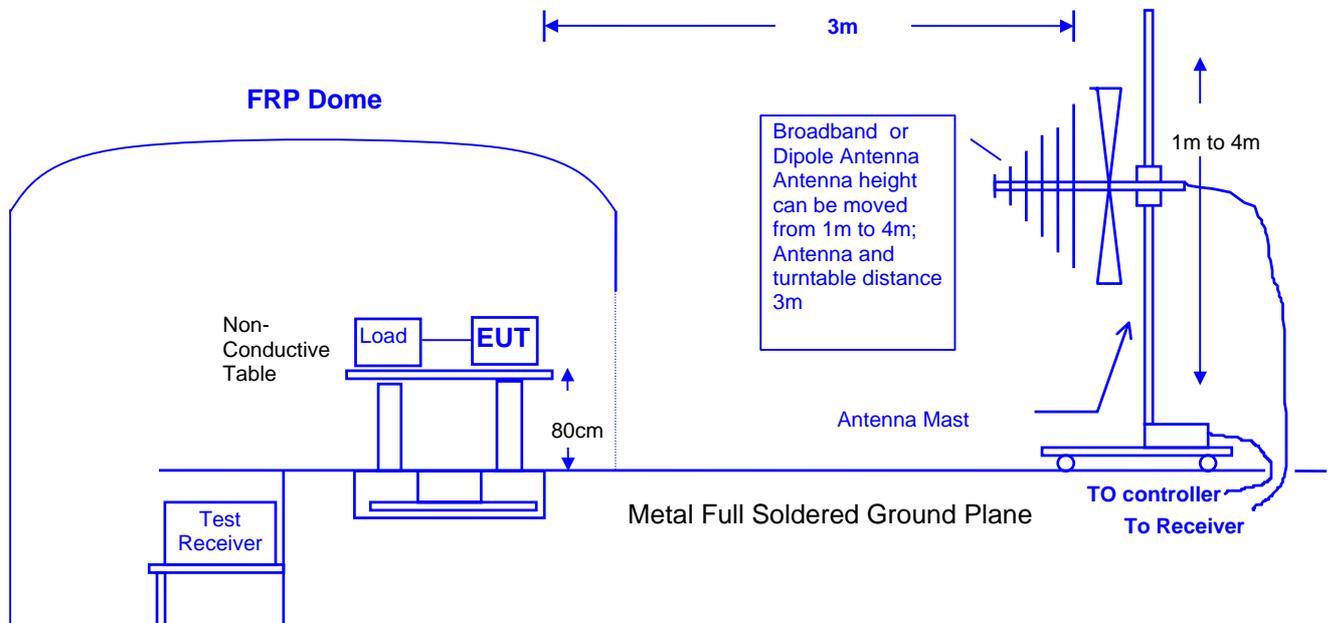

4.3 BAND EDGE LIMIT

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 50dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209 (a) (see Section 15.205(c)).

4.4 EUT CONFIGURATION

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2000 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120KHz, above 1GHz are 1MHz.

4.5 OPERATING CONDITION OF EUT

Same as section 2.7.

4.6 TEST RESULT

Date of Test	August 03, 2007	Temperature	24.8 deg/C
EUT	Wireless slim keyboard	Humidity	50 %RH
Working Cond.	Channel 1		
Antenna distance	3m at Horizontal	Test Band	Lower

Radiation Emission of Fundamental Peak

Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
2419.92	57.62	35.71	93.33

Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ.
3. Emission Level= Reading + Correction Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
4. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor

TEST Result

The band edge emission plot on next page are Peak and Average. The polt for peak is appear (27.58)dB delta between carry power and maximum emission in restrict band 2332.6 MHz.

The above tables are list of fundamental emission test result.

Therefore, peak field strength of 2332.6 MHz is 93.33 dBuV/m – 27.58dB = 65.75dBuV/m which is under 74dBuV/m.

Average filed strength = Peak filed strength x Duty Cycle

(20logAVG = 20logPeak + 20logDuty Cycle)

20logDuty Cycle = (-30.75)dB

Average field strength of (2332.6)MHz is

(65.75) dBuV/m + (-20)dB = (45.75)dBuV/m which is under 54dBuV/m.

Remark:

If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

The average measurement was not performed when the peak measured data under the limit of average detection.

Date of Test	August 03, 2007	Temperature	24.8 deg/C
EUT	Wireless slim keyboard	Humidity	50 %RH
Working Cond.	Channel 1		
Antenna distance	3m at Vertical	Test Band	Lower

Radiation Emission of Fundamental Peak

Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
2419.96	42.85	30.47	73.32

Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz.
3. Emission Level= Reading + Correction Factor (Could have ±0.01 tolerance due to computer automatically round off calculation).
4. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor

TEST Result

The band edge emission plot on next page are Peak and Average. The polt for peak is appear (27.58)dB delta between carry power and maximum emission in restrict band 2332.6 MHz.

The above tables are list of fundamental emission test result.

Therefore, peak field strength of 2332.6 MHz is 73.32 dBuV/m – 27.58 dB = 45.74 dBuV/m which is under 74dBuV/m.

Remark:

If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

The average measurement was not performed when the peak measured data under the limit of average detection.

Date of Test	August 03, 2007	Temperature	24.8 deg/C
EUT	Wireless slim keyboard	Humidity	50 %RH
Working Cond.	Channel 1		
Antenna distance	3m at Horizontal	Test Band	Higher

Radiation Emission of Fundamental Peak

Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
2419.92	57.62	35.71	93.33

Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHZ.
3. Emission Level= Reading + Correction Factor (Could have ±0.01 tolerance due to computer automatically round off calculation).
4. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor

TEST Result

The band edge emission plot on next page are Peak and Average. The polt for peak is appear (51.73)dB delta between carry power and maximum emission in restrict band 2484.4 MHz.

The above tables are list of fundamental emission test result.

Therefore, peak field strength of 2484.4 MHz is 93.33 dBuV/m – 51.73 dB = 41.6 dBuV/m which is under 74dBuV/m.

Remark:

If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

The average measurement was not performed when the peak measured data under the limit of average detection.

Date of Test	August 03, 2007	Temperature	24.8 deg/C
EUT	Wireless slim keyboard	Humidity	50 %RH
Working Cond.	Channel 1		
Antenna distance	3m at Vertical	Test Band	Higher

Radiation Emission of Fundamental Peak

Frequency [MHz]	Reading Level [dB(uV)]	Correction Factor [dB/m]	Emission Level [dB(uV/m)]
2419.96	42.85	30.47	73.32

Remark:

1. All Readings below 1GHz are Quasi-Peak and above 1GHz are peak or average.
2. Spectrum Analyzer Setting(Peak Detector): RBW=1MHz, VBW=1MHz.
3. Emission Level= Reading + Correction Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
4. Correction Factor= Antenna Factor + Cable Loss – Amplifier Factor

TEST Result

The band edge emission plot on next page are Peak and Average. The plot for peak is appear (51.73)dB delta between carry power and maximum emission in restrict band 2484.4 MHz.

The above tables are list of fundamental emission test result.

Therefore, peak field strength of 2484.4 MHz is 73.32 dBuV/m – 51.73 dB = 21.59 dBuV/m which is under 74dBuV/m.

Remark:

If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

The average measurement was not performed when the peak measured data under the limit of average detection.

5. DUTY CYCLE


5.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:

Item	Instrument	Manufacturer	Model	Serial No.	Last Cal.
1	Spectrum Analyzer	Rohde & Schwarz	FSP40	100061	04/09/07
2	Spectrum Analyzer	HP	E4407B	39240339	08/07/07

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

5.2 BLOCK DIAGRAM OF TEST SETUP

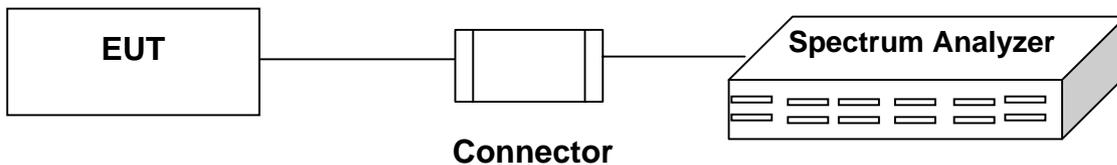

5.3 TEST RESULT

Date of Test	August 03, 2007	Temperature	25.4 deg/C
EUT	Wireless slim keyboard	Humidity	53 %RH
Working Cond.	Channel 1		

Duty Cycle = Time on of 100msec / 100 msec

Frequency 2420 MHz

Time on of one slot length = 580 (μs) = 0.58 (msec)

Totally time of one period = 0.23 (msec)


Time on of 100ms = 2.9 (msec)

Duty Cycle = 2.9m / 100msec = 0.029


20 log 0.029 = -30.75 dB

Remark:

If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

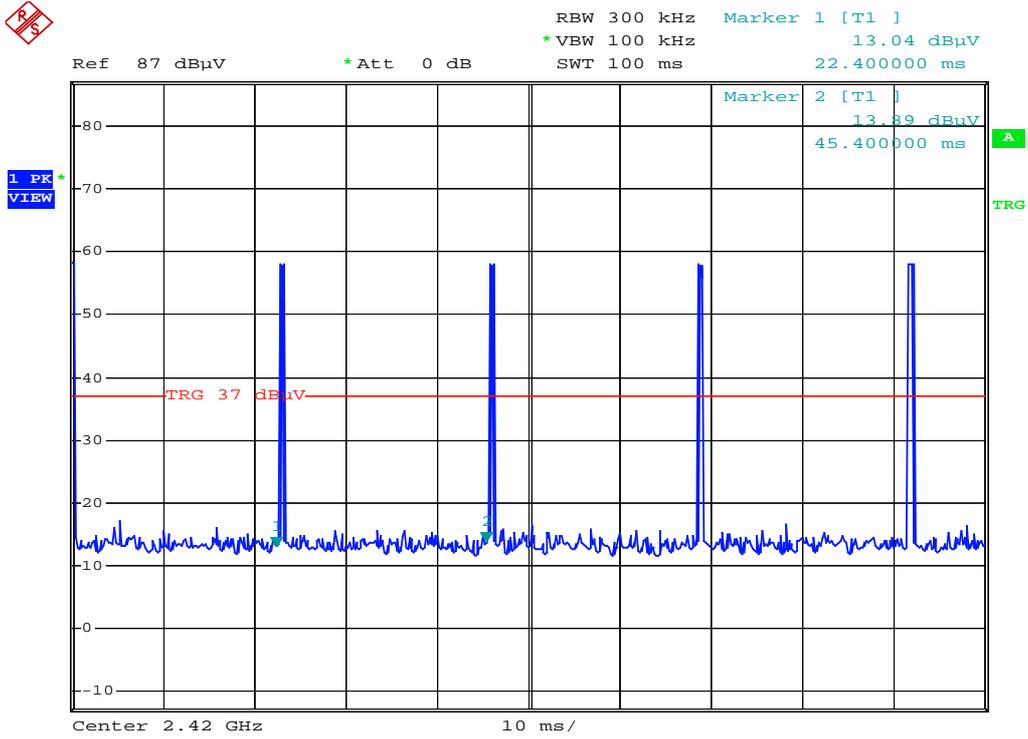

Date: 3.AUG.2007 14:35:26

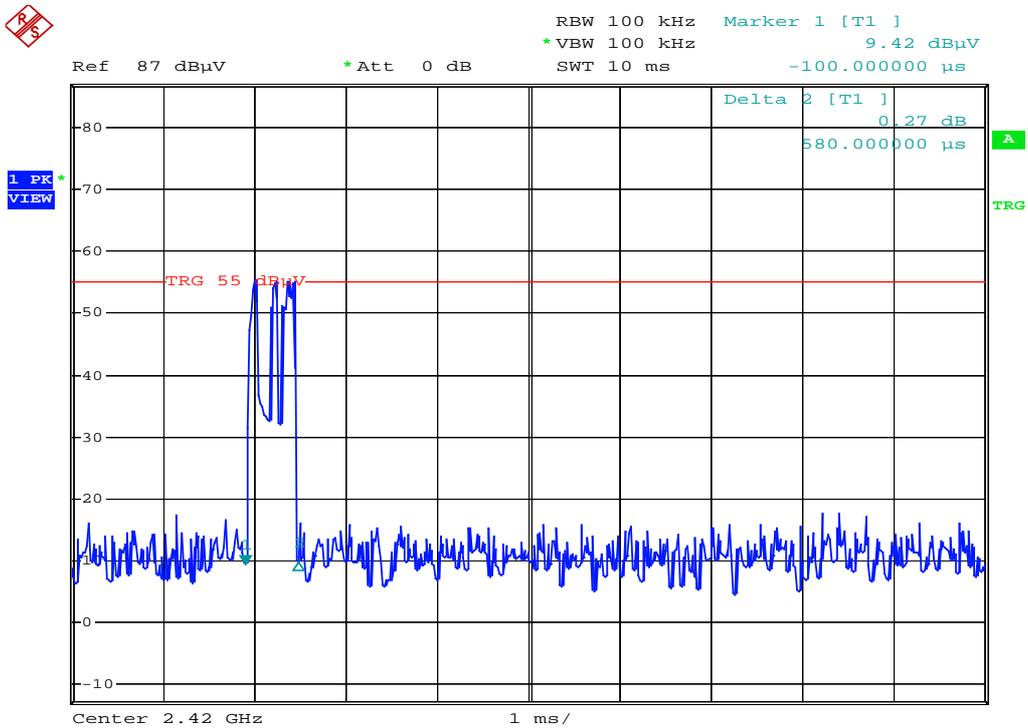

Date: 3.AUG.2007 14:44:54

6. PHOTOGRAPHS FOR TEST

6.1 TEST PHOTOGRAPHS FOR RADIATION

30-1000MHz



Above 1GHz



7. PHOTOGRAPHS FOR PRODUCT

1. Front View Of Wireless slim keyboard (EUT)
2. Back View Of Wireless slim keyboard (EUT)




- 3. Front View Of Wireless slim keyboard (EUT)
- 4. Back View Of Wireless slim keyboard (EUT)




5. Label Here



6. Inner View Of Wireless slim keyboard (EUT)

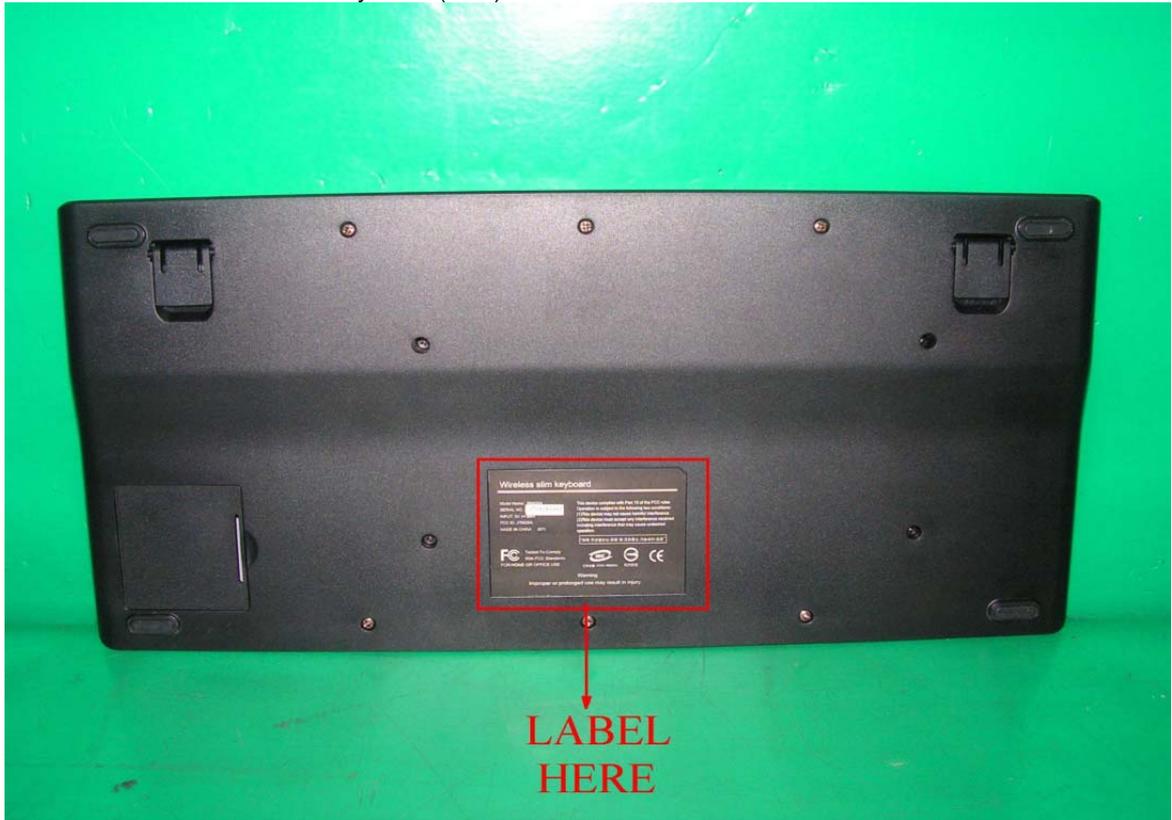


- 7. Inner View Of Wireless slim keyboard (EUT)
- 8. Main Board

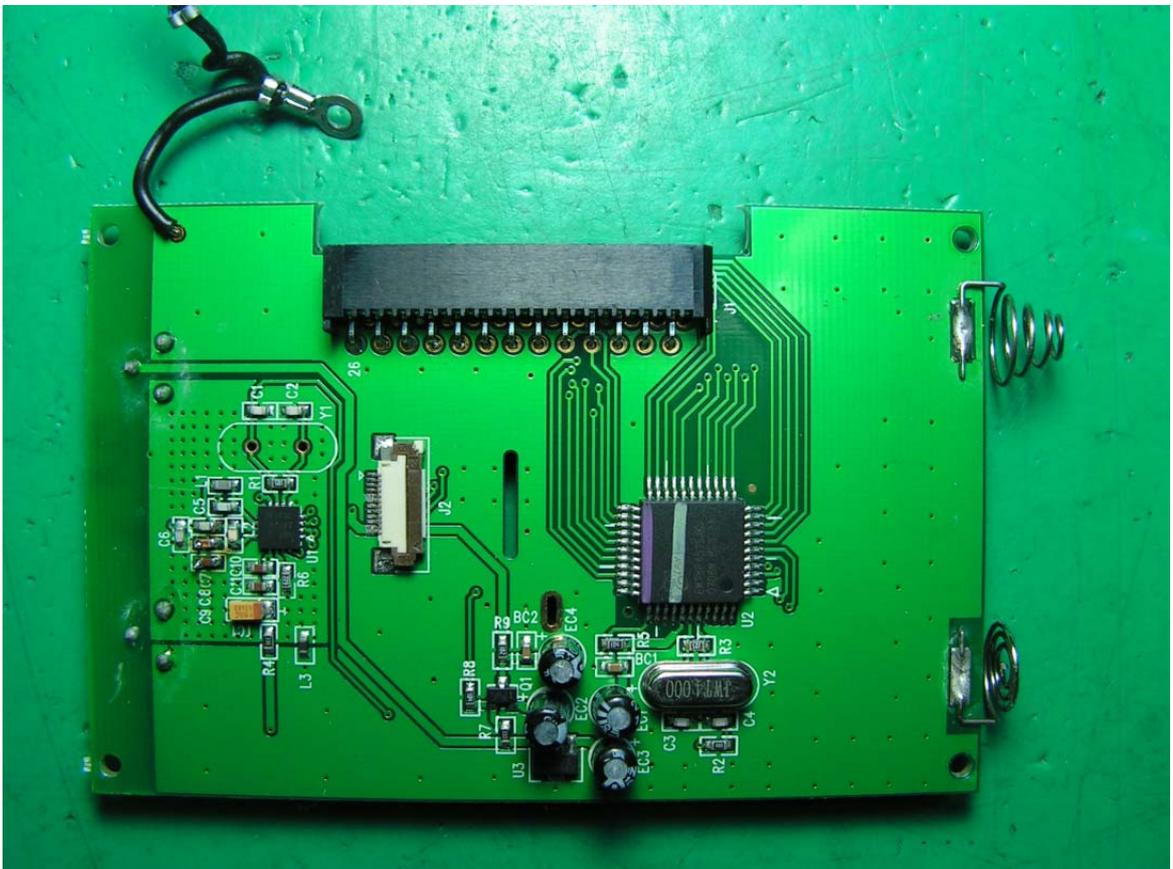


- 9. Main Board
- 10. Inner View Of Wireless slim keyboard (EUT)

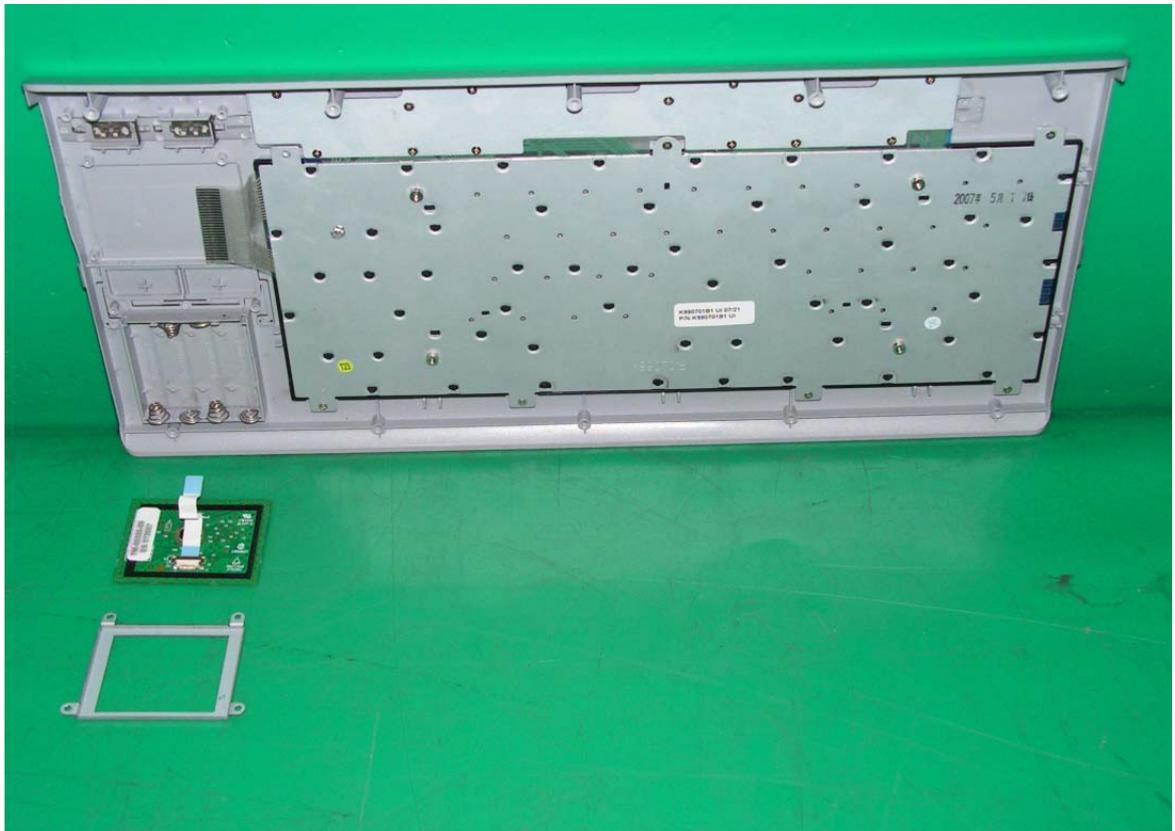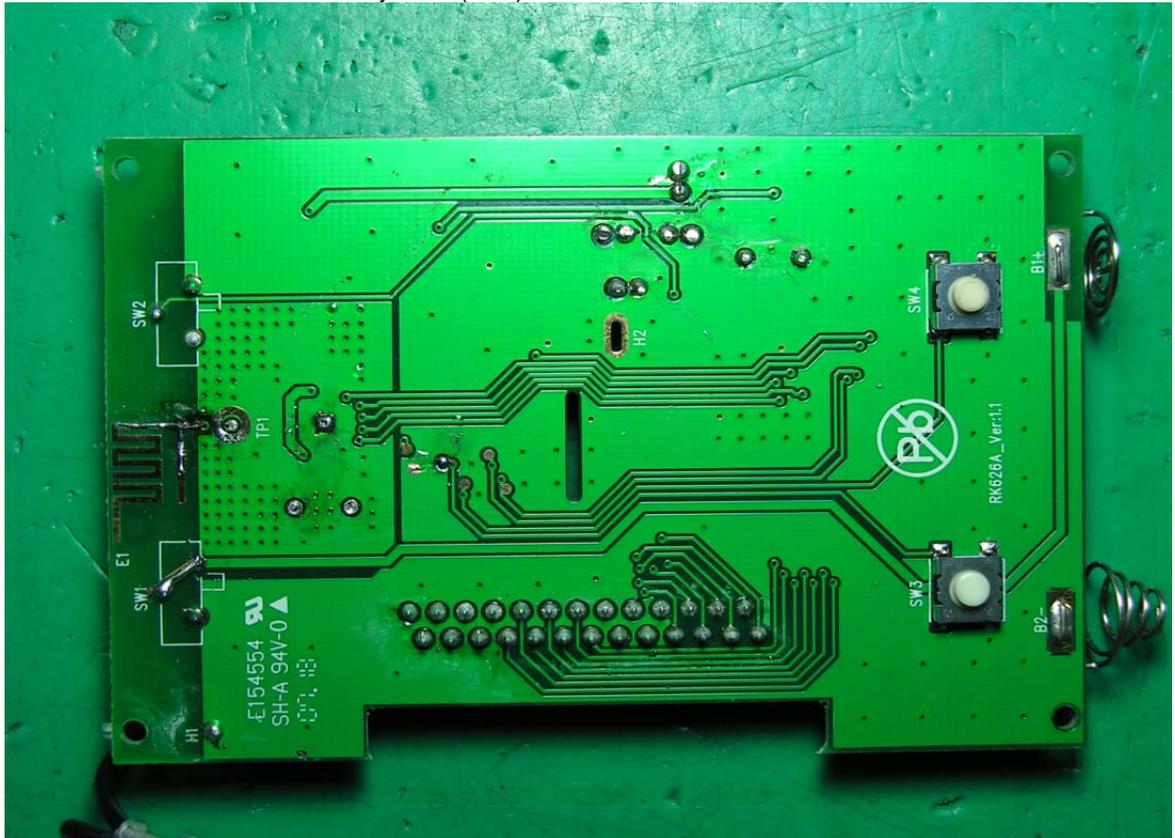

- 11. Touch Pad Board
- 12. Touch Pad Board

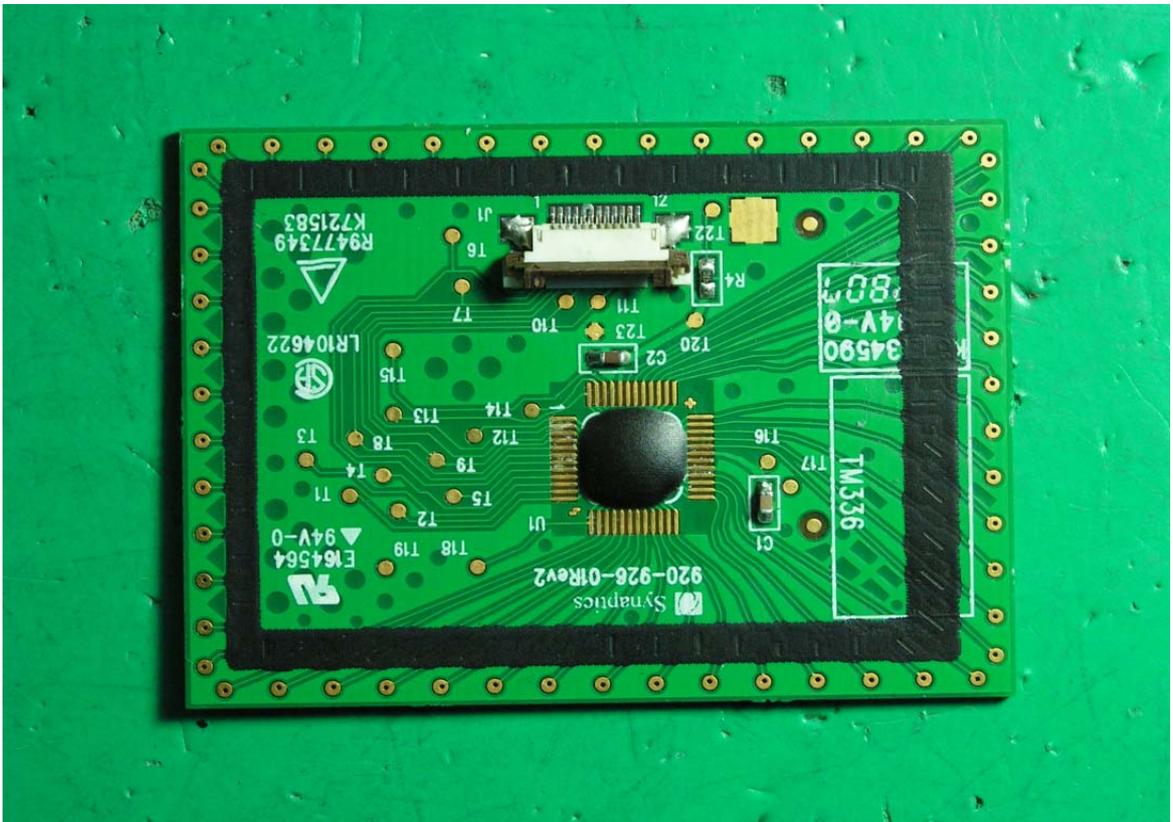

13. Conductive measurement point

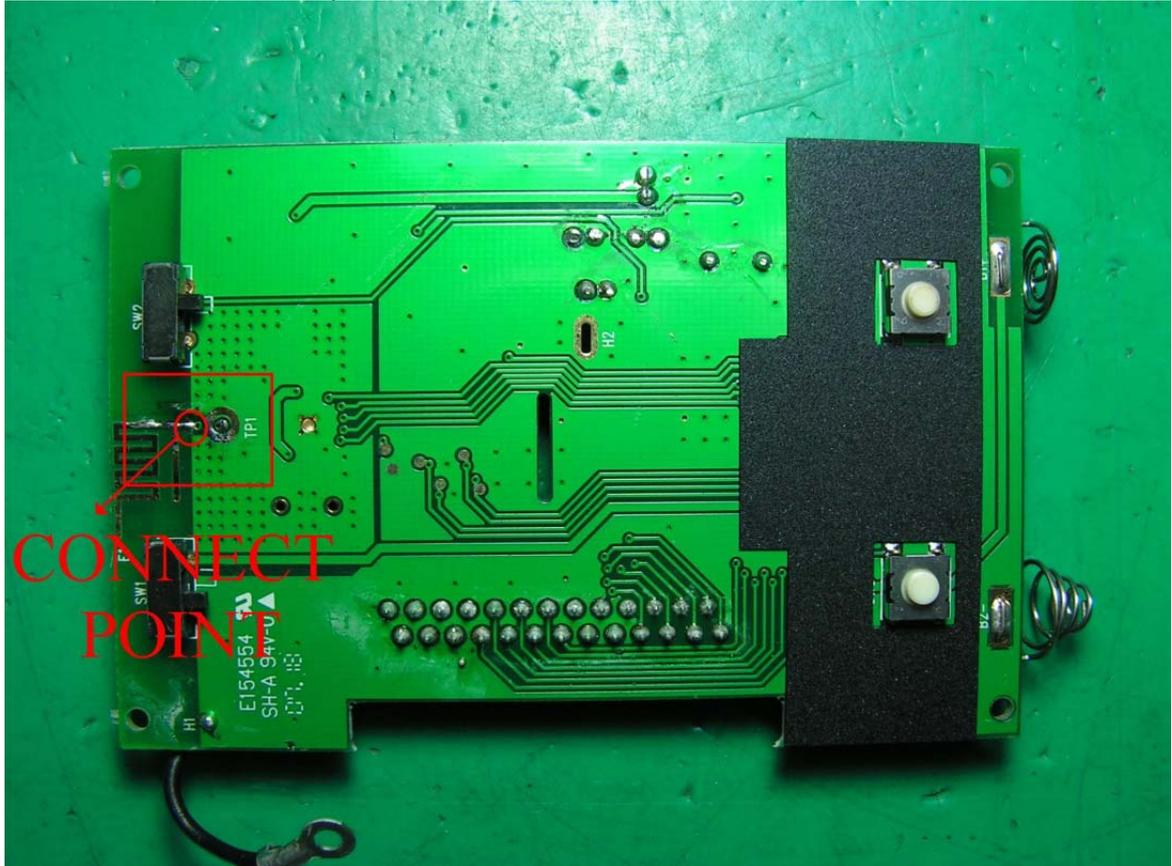

8. EMI REDUCTION METHOD DURING COMPLIANCE TESTING

No modification was made during testing.

Appendix A

Circuit (Block) Diagram

(Shall be added by Applicant)

Appendix B

User Manual

(Shall be added by Applicant)