

## *Measurement of Maximum Permissible Exposure*

### **1. Foreword**

In adopt with the Human Exposure IEEE C95.1, and according to the FCC 1.1310. The *Maximum Permissible Exposure (MPE)* is obligated to measure in order to prove the safety of radiation harmfulness to the human body.

The *Gain* of the antenna used is measured in an *Anechoic chamber*. The *maximum total power to the antenna* is to be recorded. By adopting the ***Friis Transmission Formula*** and the *power gain of the antenna*, we can find the distance right away from the product, where the limit of the MPE is.

### **2. Description of EUT**

<b>FCC ID</b>	:	MSQDPR2325
<b>Product Name</b>	:	Wireless Cable Modem
<b>Model Name</b>	:	DPR2325
<b>Frequency Range</b>	:	2.412GHz ~ 2.462GHz
<b>Channel Spacing</b>	:	5MHz
<b>Support Channel</b>	:	11 Channels
<b>Modulation Skill</b>	:	DBPSK, DQPSK, CCK, OFDM

**3. Limits for Maximum Permissible Exposure (MPE)**

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
<b>(A) Limits for Occupational/Controlled Exposure</b>				
0.3-3.0	614	1.63	100	6
3.0-30	1842/f	4.89/f	900/f <sup>2</sup>	6
30-300	61.4	0.163	1.0	6
300-1500	--	--	f/300	6
1500-100,000	--	--	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	100	30
1.34-30	824/f	2.19/f	180/f <sup>2</sup>	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

[The EUT is tested in transmit and receive modes and in the first, middle and the last channel separately.

The following shows only our observation have the greatest emissions.]

According to OET BULLETIN 56 Fourth Edition/August 1999, Equation for Predicting RF Fields:

**Friis Transmission Formula:** 
$$S = \frac{PG}{4\pi R^2} = \frac{229.61 \times 1.58}{4\pi(20)^2} = 0.072mW / cm^2$$

**Estimated safe separation:** 
$$R = \sqrt{\frac{PG}{4\pi}} = \sqrt{\frac{229.61 \times 1.58}{4\pi}} = 5.373cm$$

**Note: "The safe estimated separation that the user must maintain from the antenna is at least 6.5cm"**

Where: S = power density (in appropriate units, e.g. mW/cm<sup>2</sup>)

P = power input to the antenna (in appropriate units, e.g., mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

The Numeric gain G of antenna with a gain specified in dB is determined by:

$$G = \text{Log}^{-1} ( dB \text{ antenna gain} / 10 )$$

$$G = \text{Log}^{-1} (2.00 / 10) = 1.58$$

## *Appendix*

### **Antenna Specification**



WHA YU INDUSTRIAL CO., LTD. (HEAD OFFICE)  
 TAI HWA ELECTRONIC CO., LTD.(CHINA)  
 SHANGHAI HUA YU ELECTRONIC CO., LTD.(CHINA)  
 AEON TECH CO., LTD. (CHINA)

**SPECIFICATION FOR APPROVAL**

**CUSTOMER:** 華碩電腦股份有限公司

**PART NAME:** RF Antenna Assembly

**PART NO.:** 14G150001000

**REVISION:**

**W. Y. P/NO.:** C660-510003-A

**REV.:** X3

	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
APPROVED BY :		
DATE :		

**WHA YU GROUP**

WHA YU INDUSTRIAL CO., LTD.(HEAD OFFICE)

華裕實業股份有限公司

Address: No.326, Sec 2, Kung Tao 5 Road, Hsin Chu City, Taiwan, R.O.C.

Tel:+886-3-5714225(REP.)

Fax:+ 886-3-5713853 · + 886-3-5723600

TAI HWA ELECTRONIC CO., LTD. (CHINA)

台樺電業製品廠

Address: Pak Ho District, Hiu Street Town, Dong Guan City, Guangdong, China

Tel: + 86-769-5599375 · + 86-769-5912375

Fax: + 86-769-5599376

HUA HONG INTERNATIONAL LTD.

華弘國際有限公司

Rm.1103A,President Commercial Centre,608 Nathan Road,Mong Kok,Kowloon,Hong Kong

Tel: + 86-852-27712210

Fax: + 86-852-23843747

SHANGHAI HUA YU ELECTRONIC CO., LTD. (CHINA)

上海華裕電子有限公司

Address:3586,Wai Qing Song Road, Qing Pu County, Shanghai China

Tel: + 86-21-59741348 · + 86-21-59744101~4

Fax: + 86-21-59741347

SU ZHOU AEON TECH CO., LTD. (CHINA)

蘇州華廣電通有限公司

Address:Limin North Road, LiLi Town,LiLi Industrial Park,LinHu Economic Zone

Wujiang City,Jiangsu Province,China

Tel: + 86-512-63627980

Fax: + 86-512-63627981

# Contents

<b>Item</b>	<b>Description</b>	<b>Page</b>
1. ....	天線規格表	..... 1
2. ....	成品圖	..... 2
3. ....	測試報告	..... 3~5
4. ....	<b>Cable</b> 規格	..... 6~7
5. ....	<b>Connector</b> 材質特性	..... 8
6. ....	<b>SGS</b> 測試	..... 9~42

# RF Antenna Cable Assembly

## Specification


### 1. Electrical Properties :

1.1 Frequency Rang.....	2.4GHz ~ 2.5GHz
1.2 Impedance .....	50Ω Nominal
1.3 VSWR .....	1.92 Max.
1.4 Return Loss.....	-10dB Maximum
1.5 Electrical Wave.....	1/2 λ Diople
1.6 Gain.....	1.8 dBi
1.7 Admitted Power.....	1W

### 2. Physical Properties :

2.1 Cable.....	RG-178 Cable
2.2 Antenna Cover.....	TPE
2.3 Antenna Base.....	PC
2.4 Operating Temp. ....	-20°C ~ +65°C
2.5 Storage Temp. ....	-30°C ~ +75°C
2.6 Color .....	Black
2.7 Connector.....	SMA Plug Reverse

CG-	F	G
REV	DATE	DESCRIPTION
X1	2/19-2004	New Issue
X2	9/26-2005	Modify material, Add package

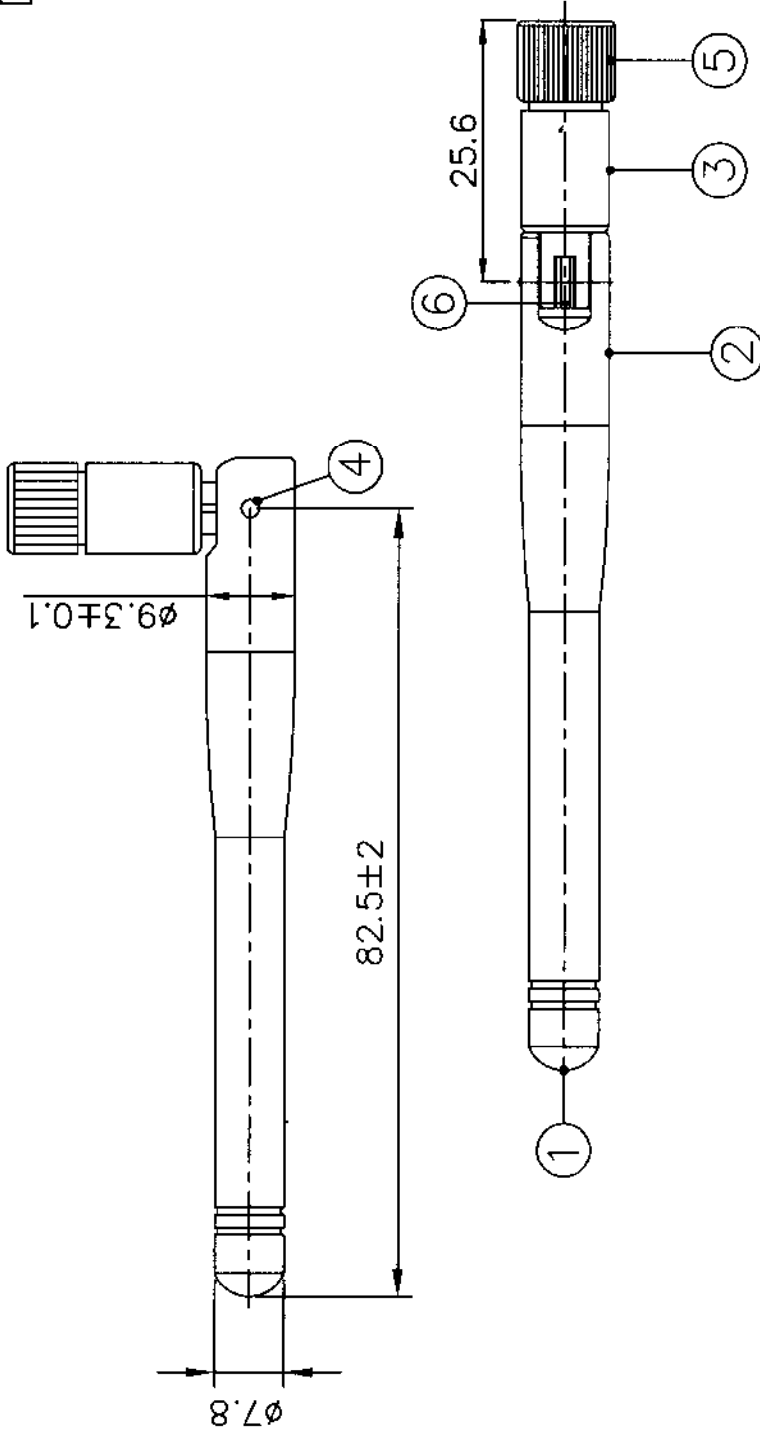

6	Cable	RG-178, Translucent Brown; 50 Ω	1
5	Connector	SMA Straight Plug/Reverse	1
4	Rivet	Brass, Zn Plated (Black)	2
3	Antenna Base	PBT; Color:Black	1
2	Antenna Base	PC; Color:Black	1
1	Antenna Cover	TPB; Color:Black	1
NO	DESCRIPTION		QTY
REMARK			

CUSTOMER: 華碩電腦股份有限公司	
PART NO :	
PARTNAME:	RF Antenna Assembly
W.Y.PNO :	C660-510003-A
REV	UNIT FILE :
X2	1/1

XXL	45	APPROVED
X	51.0	CHECKED
X	50.1	DESIGNED
XX	50.01	
XXX	50.005	


林其平  
程啟明

CUSTOMER'S SIGNATURE

Packing : 1pcs/bag

Wha Yu INDUSTRIAL CO.,LTD.  
 講裕實業股份有限公司

THIS DRAWING AND ITS INHERENT DESIGN CONCEPTS ARE THE PROPERTY OF WHA YU AND AS SUCH MAY NOT BE COPIED, REPRODUCED, OR GIVEN TO THIRD PARTIES WITHOUT THE WRITTEN CONSENT OF WHA YU.

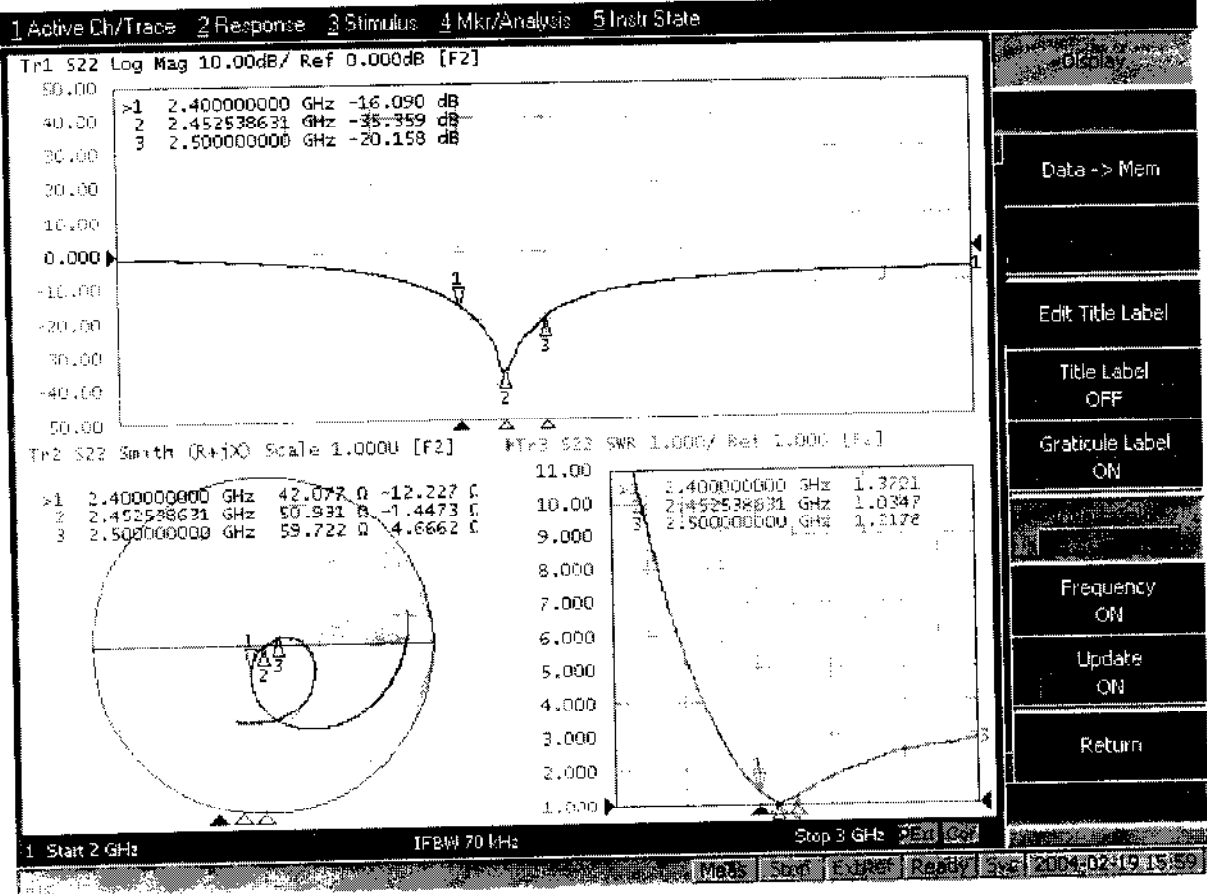






# 譚裕實業股份有限公司

## WHA YU INDUSTRIAL CO., LTD

Far-field amplitude of 2.4GHz small dipole antenna-E-plane.nsi

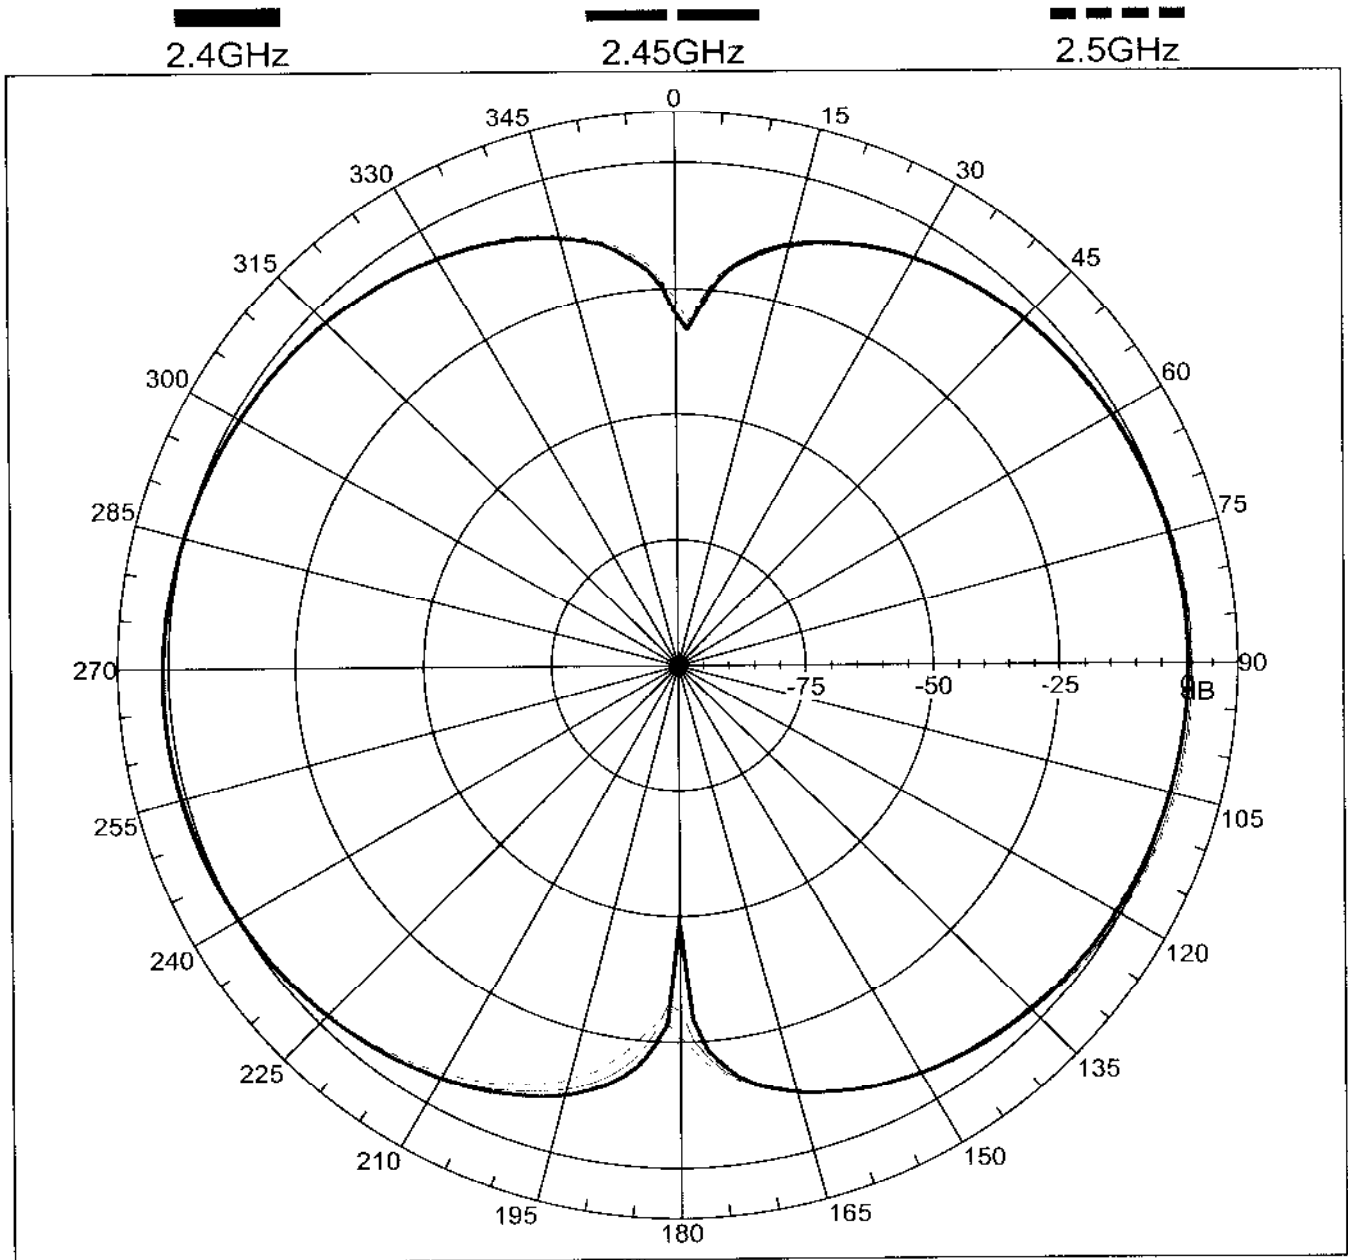




# 譚裕實業股份有限公司

## WHA YU INDUSTRIAL CO., LTD

Far-field amplitude of 2.4GHz small dipole antenna-H-plane.nsi

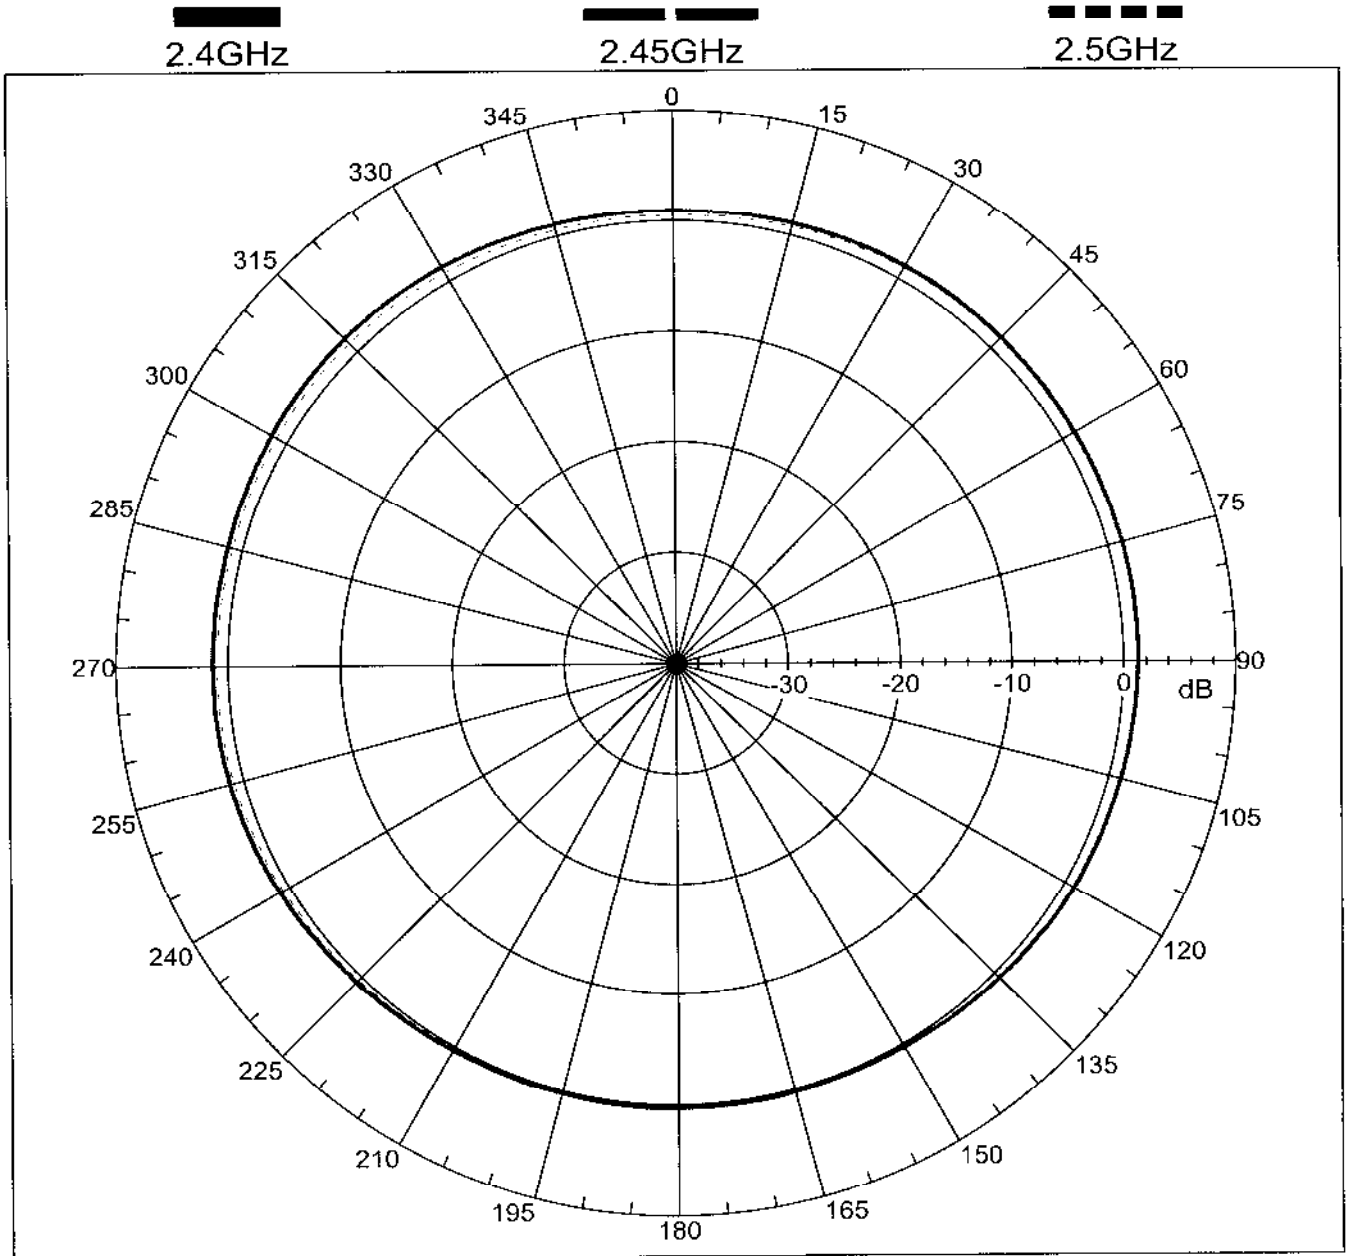

<b>PRODUCT SPECIFICATION</b>	ISSUED DATE	July.12, 2000	PAGE	1/2
	REVISION		REVISION NO.	

**PRODUCT NAME : Coaxial Cable**  
**RATING : -55°C ~ 200°C**  
**ITEM : RG 178 B/U**

誠 謙

No.	Revised Date	Revised Details	Page	Report

REPORTED BY :

APPROVED BY :




Q.C Engineer HOON LEE


Q.C Manager SOON-MOK SIIN

<b>PRODUCT SPECIFICATION</b>	ISSUED DATE	July.12, 2000	PAGE	2/2
	REVISION		REVISION NO.	

### 1. APPLICATIONS

This specification is applies to Coaxial Cable manufactured by the YOUNG CHANG SILICONE CO.,LTD

### 2. STRUCTURE

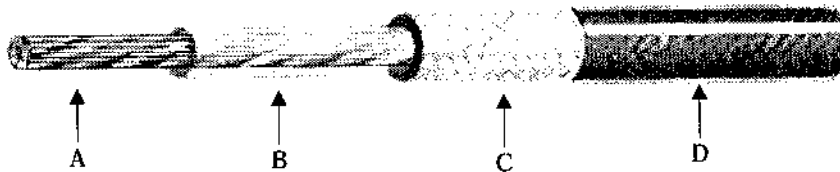

- A. Conductor: SCCS
- B. Insulation : PFA
- C. Shield : Silver-Plated Copper
- D. Jacket : FEP

### 3. DIMENSION

Conductor (SCCS)			Insulation		Shield		Jacket	
Structure	Cross sectional area	Diameter	Material	Diameter	Material	Diameter	Material	Diameter
Q'ty/mmφ	mm <sup>2</sup> (SQ)	mmφ		mmφ		mmφ		mmφ
7/0.102	0.06	0.30	PFA	0.84±0.05	SPC	1.25	FEP	1.80±0.10

### 4. ELECTRIC PROPERTIES

Impedance	Capacitance	Maximum Attenuation (dB/100ft)				Dielectric Sterngth
		100Mhz	400Mhz	1Ghz	3Ghz	
ohms	pF/ft(Max)					V/1min
50 ± 2	32	16.0	33.0	52.0	94.0	2000




# 譚裕實業股份有限公司

WHA YU INDUSTRIAL CO., LTD

## Connector 材質證明書

譚裕料號 Whayu P/N	100-2001150-AZ	產品名稱 Product Name	SMA Plug Reverse Straight For RG-178
-------------------	----------------	----------------------	--------------------------------------

### 結構圖面

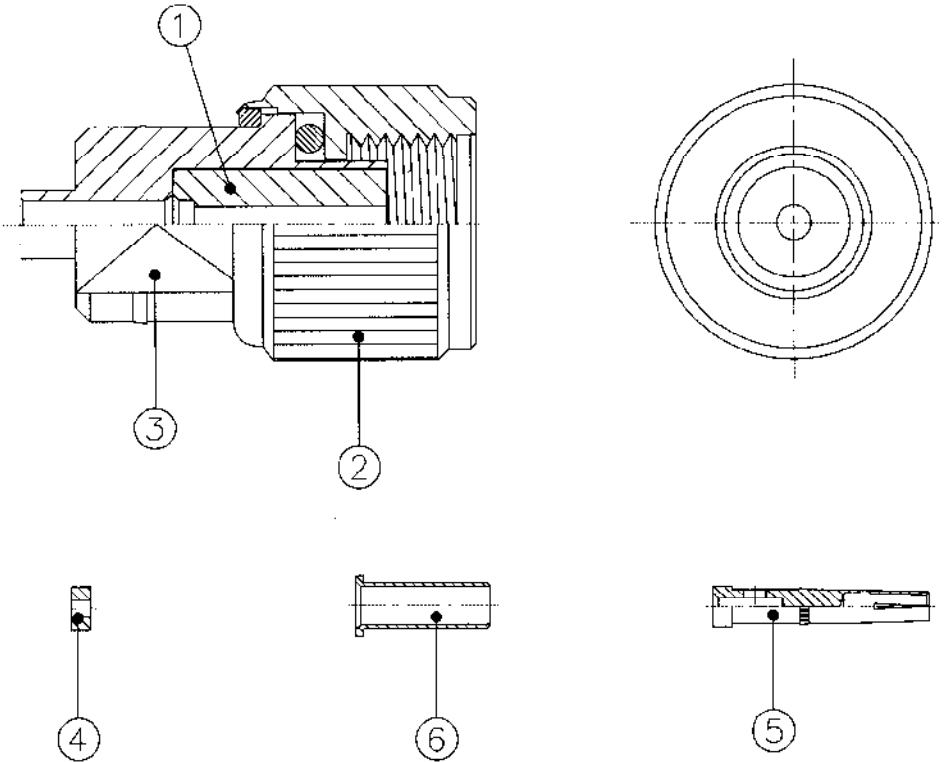

### 材質成份

### 表面處理

		材質成份							表面處理	
1	絕緣體	Teflon	PTFE							N/A
2	外殼	Brass	Cu	Pb	Fe	Fe+Sn	Zn		電著	
3	本體	Brass	Cu	Pb	Fe	Fe+Sn	Zn		鍍鎳	
4	絕緣體	Teflon	PTFE							N/A
5	中心針	Phos. Bronze	Cu	Sn	P	Zn	Pb		鍍金	
6	尾管	Brass	Cu	Pb	Fe	Fe+Sn	Zn		鍍鎳	

Remark :



ET-QA-0017-A2

# SGS Test Report

---

**Product : RF Antenna**

## Contents

No	Description		Report No.	Page
1	Cable	RG-178 Cable	F690501/LF-CTS500034 F690501/LF-CTS500035 F690501/LF-CTSGP06-0418 F690501/LF-CTSGP05-5552	P.10~19
2	Antenna Body	TPE EL-630	GZSCR050640653/LP	P.20~21
3	Antenna Base	PC L-1250Z	GZSCR050640656/LP	P.22~23
4	Antenna Base	PBT	SH533383/CHEM	P.24~25
5	Rivet	Brass , Zn Plated	GZML060201325 SZTYR050305623/LP	P.26~28
6	Connector	SMA Plug Reverse	SH517723/CHEM GZML060201325 GZSCR050421403/LP 2054827/EC 2054838/EC	P.29~40
7	Ground Tube	Brass ; Tin Plated	GZ0602013169/CHEM GZSCR051191692/LP	P.41~43

**Result for RoHS : PASS**



WHA YU INDUSTRIAL CO., LTD. (HEAD OFFICE)  
 TAI HWA ELECTRONIC CO., LTD.(CHINA)  
 SHANGHAI HUA YU ELECTRONIC CO., LTD.(CHINA)  
 AEON TECH CO., LTD. (CHINA)

## SPECIFICATION FOR APPROVAL

**CUSTOMER:** ASUS


**PART NAME:** DPR-2320 Antenna Assembly

**PART NO.:** 14G151037000

**REVISION:**

**W. Y. P/NO.:** C660-520100-A

**REV.:** XI

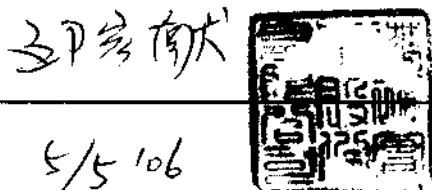	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
APPROVED BY :		
DATE :	5/5/06	

### WHA YU GROUP

WHA YU INDUSTRIAL CO., LTD.(HEAD OFFICE)

譚裕實業股份有限公司

Address: No.326, Sec 2, Kung Tao 5 Road, Hsin Chu City, Taiwan, R.O.C.

Tel:+886-3-5714225(REP.)

Fax:+ 886-3-5713853 · + 886-3-5723600

TAI HWA ELECTRONIC CO., LTD. (CHINA)

台樺電業製品廠

Address: Pak Ho District, Hiu Street Town, Dong Guan City, Guangdong, China

Tel: + 86-769-5599375 · + 86-769-5912375

Fax: + 86-769-5599376

HUA HONG INTERNATIONAL LTD.

華弘國際有限公司

Rm.1103A,President Commercial Centre,608 Nathan Road,Mong Kok,Kowloon,Hong Kong

Tel: + 86-852-27712210

Fax: + 86-852-23843747

SHANGHAI HUA YU ELECTRONIC CO., LTD. (CHINA)

上海譚裕電子有限公司

Address:3586,Wai Qing Song Road, Qing Pu County, Shanghai China

Tel: + 86-21-59741348 · + 86-21-59744101-4

Fax: + 86-21-59741347

SU ZHOU AEON TECH CO., LTD. (CHINA)

蘇州華廣電通有限公司

Address:Limin North Road, LiLi Town,LiLi Industrial Park,LinHu Economic Zone

Wujiang City, Jiangsu Province, China

Tel: + 86-512-63627980

Fax: + 86-512-63627981

# **INDEX**

<b>Item</b>	<b>Content</b>	
1. ....	天線規格表	.....
2. ....	成品圖	.....
3. ....	測試報告	.....
4. ....	天線本體(PCB板)材質	.....
5. ....	背膠(3M 467)材質	.....
6. ....	Cable規格	.....
7. ....	Connector材質	.....



# Antenna Assembly

## Specification

### 1. Electrical Properties :





1.1 Frequency Range.....	2.4~2.5GHz
1.2 Impedance.....	50Ω
1.3 Return Loss.....	<-10dBi
1.4 VSWR.....	1.92 Max.
1.5 Peak Gain.....	<2.0dBi@2.40~2.50GHz
1.6 Average Gain.....	>-3.0dBi@2.40~2.50GHz
1.7 Admitted Power.....	1W

### 2. Physical Properties :

2.1 Operating Temp.....	-10°C ~ +55°C
2.2 Storage Temp.....	-30°C ~ +75°C


CG-1395

REV	DATE	DESCRIPTION
A	2006-05-05	NEW

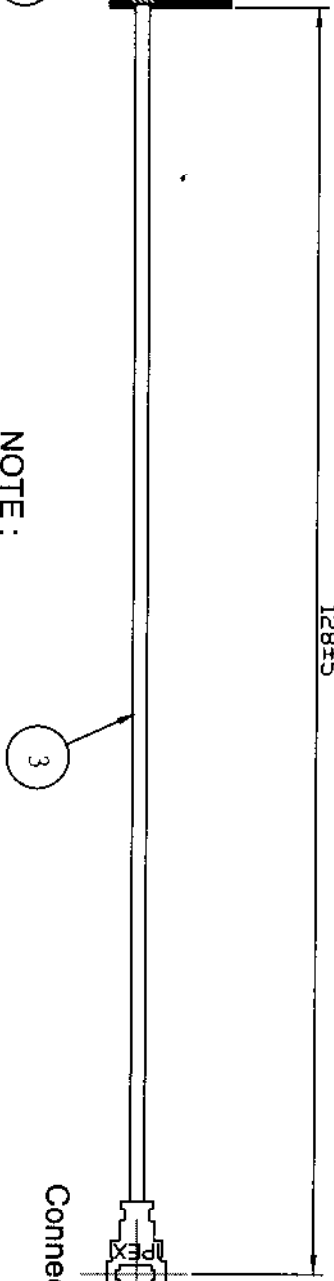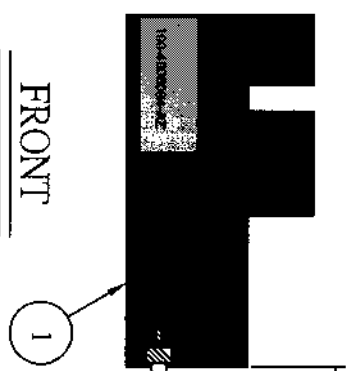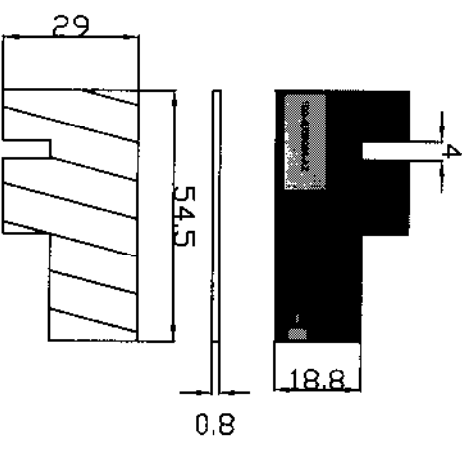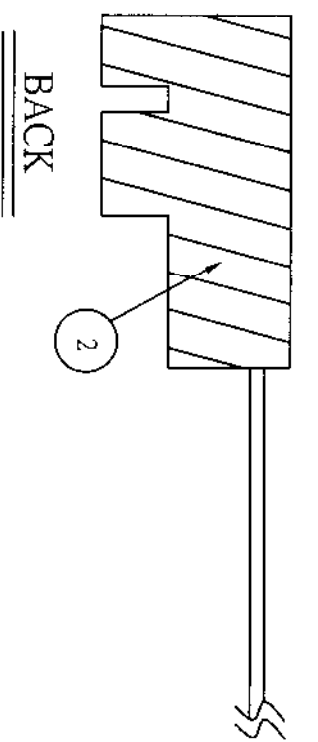

Antenna PCB  
Connector朝下

Packing : 1set/bag  
每10袋用釘書機訂起來  
(以便客戶點收)



- NOTE :
- 1.Remove All Burrs.
  - 2.All Angle Within 90°±3°.
  - 3.All Corners Within R0.2~R0.5.
  - 4.Diameter On Common Center And To Be Concentric Within 0.1mm.
  - 5.[X..]Means Important Dimension.

NO	DESCRIPTION	QTY	REMARK
4	Connector	1	NA
3	Cable Assembly	1	Grey
2	Adhesive	1	NA
1	WLAN Antenna [FR4(T=0.8mm)]單面PCB板	1	NA

CUSTOMER: ASUS		
PART NO :	14G151037000	
PARTNAME:	DPR-2320 Antenna	
W.Y P/NO :	C660-520100-A	
REV	UNIT	FILE
A	mm	
SHEET : 1/1		

Wha Yu INDUSTRIAL CO.,LTD.

華裕實業股份有限公司

THIS DRAWING, AND ITS INHERANT DESIGN CONCEPTS ARE THE PROPERTY OF WHA YU AND AS SUCH MAY NOT BE COPIED, REPRODUCED, OR GIVEN TO THIRD PARTIES WITHOUT THE WRITTEN CONSENT OF WHA YU.

APPROVED	CHECKED	DRAWING
余哲輝	余哲輝	吳改輝
XX	±5	±0.1
X	±3.0	±0.1
X	±1.0	±0.1
.XX	±0.5	±0.1
.XXX	±0.1	±0.1

CUSTOMER'S SIGNATURE

6  
5  
4  
3  
2  
1

A B C D E F G

## ASUS VOIP Model Small Case Test Report


**Measurement Time :** 2006/01/16

**Measurement Instrument :**

- 1、Agilent Technologies E5071A 300K~8.5GHz ENASeries Network Analyzer
- 2、Chamber : 3.5m(W) \* 3.25m(H) \* 7.12m(L)  
Gain Horn Antenna : SG-430 1.7~2.6GHz

**Measurement Frequency :** 2.4 GHz ~ 2.5GHz

### Antenna VSWR

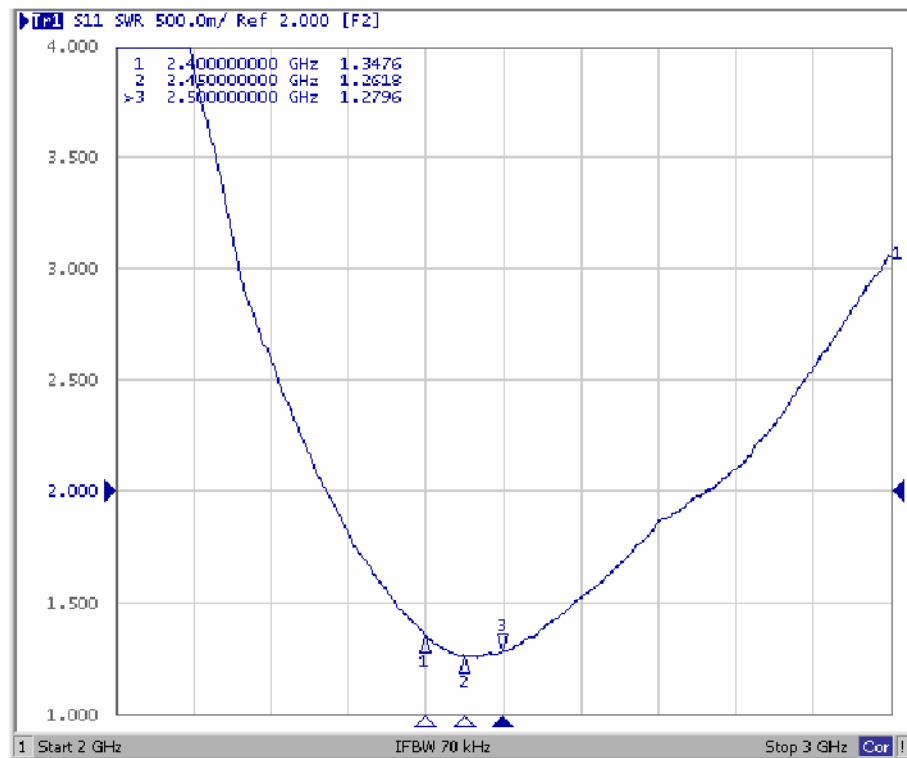

Antenna	VSWR		
Frequency	2.4GHz	2.45GHz	2.5GHz
<b>Small Case Side</b>	<b>1.34</b>	<b>1.26</b>	<b>1.27</b>




## Antenna Peak Gain & Average Gain Test Result

Antenna	Peak Gain (dBi)			Average Gain (dBi)		
	2.4GHz	2.45GHz	2.5GHz	2.4GHz	2.45GHz	2.5GHz
<b>Small Case Side</b>	<b>1.08</b>	<b>0.54</b>	<b>0.15</b>	<b>-0.66</b>	<b>-1.32</b>	<b>-1.45</b>

## Antenna Pattern

### Small Case Side

2.4GHz~2.5GHz

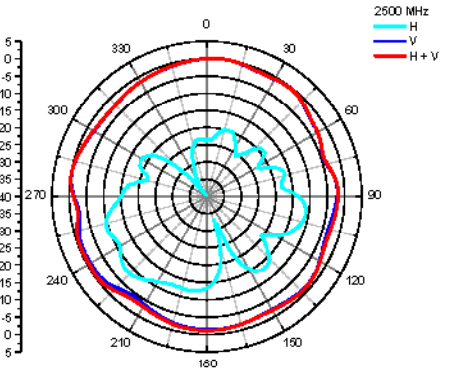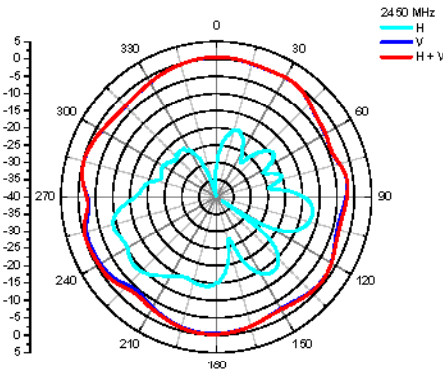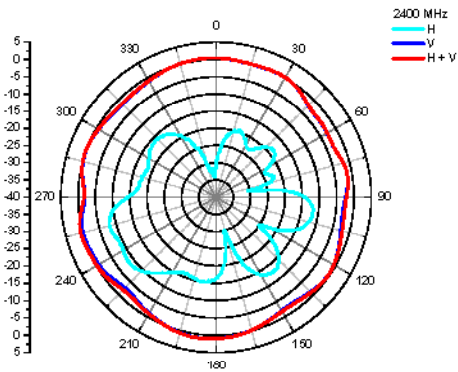

## NP-150R

Glass cloth base epoxy resin flame retardant copper clad laminate

### FEATURES

- 1 High luminance of epoxy contrast with copper for laser type A.O.I.
- 1 UV solder mask may be applied simultaneously to increase yields.
- 1 High performance epoxy blended to achieve higher resistance than that of FR-4-86
- 1 Thickness 0.8mm capability
- 1 Other properties are similar to NP-140

### PERFORMANCE LIST

Characteristics	Unit	Conditioning	Typical Values	SPEC	
Volume resistivity	MΩcm	C-96/35/90	$5 \times 10^8 \sim 5 \times 10^9$	$10^6 \uparrow$	
Surface resistivity	MΩ	C-96/35/90	$5 \times 10^8 \sim 5 \times 10^7$	$10^4 \uparrow$	
Permittivity 1MHZ	-	C-24/23/50	4.2-4.8	5.4 ↓	
Loss Tangent 1MHZ	-	D-24/23/50	0.010-0.016	0.035 ↓	
Arc resistance	SEC	D-48/50+D-0.5/23	120 ↑	60 ↑	
Dielectric breakdown	KV	D-48/50	60 ↑	40 ↑	
Moisture absorption	%	D-24/23	0.05-0.10	0.35 ↓	
Flammability	-	C-24/23/50+E-24/125	94V0	94V0	
Peel strength 1oz	lb/in	288°C × 10" solder floating	10-14	8 ↑	
Thermal stress	SEC	288°C solder dipping	200 ↑	10 ↑	
Pressure cooker (2 atm 12°C )	1/2hr	SEC	288°C dipping	230	N/A
	1hr	SEC	288°C dipping	220	N/A
	2hr	SEC	288°C dipping	150	N/A
Flexural strength	LW	psi	A	70000-80000	60000 ↑
	CW	psi	A	60000-65000	50000 ↑
Dimensional stability X-Y axis	%	E-0.5/170	0.005-0.030	0.050 ↓	
Coefficient of thermal expansion Z-axis before Tg Z-axis after Tg	in/in/°C	TMA	$5 \times 10^{-5}$	N/A	
	in/in/°C	TMA	$25 \times 10^{-5}$		
Glass transition temp	°C	DSC	150 ±5	N/A	

Data shown are nominal values for reference only.

#### NOTE:

The average value in the table refers to samples of .062" 1/1.

**PRODUCT SPECIFICATION**

製品規格

No. PRS-1176

**MHF series micro coaxial connector**

Qualification Test Report No. TR-1021

2	S2031	K.O	May/17/ 02	K.K	Prepared by	Reviewed by	Approved by
1	S1053	K.O	Nov/14/ 01	K.K	K.Ohbayashi	E,Kawabe	K.Katabuchi
0	S1025	K.O	Jun/25/ 01				
REV.	ECN	BY	DATE	APP.	JUN / 25 / 01	Jun / 25 / 01	Jun / 29 / 01
REVISION RECORD							

DOCUMENT CLASSIFICATION Product Specification 製品規格	TITLE MHF series micro coaxial connector	No. PRS-1176
<p>1. Scope / 序言 MHF series micro coaxial connector is a wire to board connector for AWG#36,32,30 coaxial cable . MHF series micro coaxial connector は、AWG # 36,32,30同軸ケーブルの基板対ワイヤーコネクタである。</p> <p>2. Objectives / 目的 This specification covers the requirements for product performance and test methods of MHF series microcoaxial connector 本規格は、MHF series micro coaxial connector の性能と試験条件について規定する。</p> <p>3. Part No. , construction , material and finish / 構成、材料及び仕上げ (1) Part No. Plug : 20278-***R-08,-13,-18 , Receptacle : 20279-001E-01 (2) Construction, material and finish of the connector are covered as each drawings. 構成、材料及び仕上げは、各図面に指定されている通りとする。</p> <p>4. Applicable cable / 適合ケーブル 4-1 Part No. 20278-001R-08, 20278-011R-08 (1) Description Inner conductor : AWG#36(7/0.05) Silver plating annealed copper wire or silver plating tin-copper alloy Dielectric core : Fluoro-plastics ,diameter 0.4(+0.04,-0.02)mm , nominal thickness 0.125mm Outer conductor : 8/5/0.05 , nominal diameter 0.65mm , silver plating annealed copper wire Jacket : Fluoro-plastics , diameter 0.81(+0.04,-0.02)mm , nominal thickness 0.08mm (2) Requirements Characteristic impedance : 50(+3,-3)ohm by TDR method (raise time 40ps) Nominal capacitance: 96 pF/m Conductor resistance of inner conductor at 293K (20°C) : 1400 ohm/km MAX. Insulation resistance : 1000 mega-ohm.km MIN. Dielectric withstand voltage : no breakdown at AC1000V for 1 minutes.</p> <p>(1) 構成 中心導体 : AWG # 36 (7 / 0.05), 銀メッキ軟銅線または銀メッキすず入り銅線 誘電体 : フッ素樹脂, 外径0.4(+0.04,-0.02), 標準厚さ0.125mm 外部導体 : 8 / 5 / 0.05, 標準外径0.65mm, 銀メッキ軟銅線 ジャケット : フッ素樹脂, 外径0.81(+0.04,-0.02)mm, 標準厚さ0.08mm (2) 仕様 特性インピーダンス : 50±3Ω (TDR,ライズタイム40ps) 標準静電容量 : 96pF/m 293K(20°C)時の中心導体導体抵抗 : 1400Ω /km以下 絶縁抵抗 : 1000MΩ・km以上 耐電圧 : AC1000V・1分間にて絶縁破壊の無い事</p> <p>4-2 Part No. 20278-101R-13, 20278-111R-13 (1) Description Inner conductor : AWG#32(7/0.08) Silver plating annealed copper wire or silver plating tin-copper alloy Dielectric core : Fluoro-plastics , diameter 0.68(+0.04,-0.02)mm , nominal thickness 0.22mm Outer conductor : 16/4/0.05 , nominal diameter 0.93mm , silver plating annealed copper wire Jacket : Fluoro-plastics , diameter 1.13(+0.08,-0.05)mm , nominal thickness 0.1mm</p>		

DOCUMENT CLASSIFICATION Product Specification 製品規格	TITLE MHF series micro coaxial connector	No. PRS-1176
--	--	-----------------

## (2) Requirements

Characteristic impedance : 50(+2,-2)ohm by TDR method (raise time 40ps)  
 Nominal capacitance: 97 pF/m  
 Conductor resistance of inner conductor at 293K (20°C) : 520 ohm/km MAX.  
 Insulation resistance : 1500 mega-ohm.km MIN.  
 Dielectric withstand voltage : no breakdown at AC1000V for 1 minutes.

## (1) 構成

中心導体 : AWG # 32(7/0.08), 銀メッキ軟銅線または銀メッキすず入り銅線  
 誘電体 : フッ素樹脂, 外径0.68(+0.04,-0.02), 標準厚さ0.22mm  
 外部導体 : 16/4/0.05, 標準外径0.93mm, 銀メッキ軟銅線  
 ジャケット : フッ素樹脂, 外径1.13(+0.08,-0.05)mm, 標準厚さ0.1mm

## (2) 仕様

特性インピーダンス : 50±2Ω (TDR, ライズタイム40ps)  
 標準静電容量 : 97pF/m  
 293K(20°C)時の中心導体導体抵抗 : 520Ω /km以下  
 絶縁抵抗 : 1500MΩ・km以上  
 耐電圧 : AC1000V・1分間にて絶縁破壊の無い事

## 4-3 Part No. 20278-001R-32, 20278-011R-32

## (1) Description

Inner conductor : AWG#32(7/0.08)  
 Silver plating annealed copper wire or silver plating tin-copper alloy  
 Dielectric core : Fluoro-plastics, diameter 0.66(+0.05,-0.05)mm, nominal thickness 0.21mm  
 First outer conductor : 16/5/0.05, tin plating annealed copper wire  
 Second outer conductor : 16/6/0.05, nominal diameter 1.12mm, tin plating annealed copper wire  
 Jacket : Fluoro-plastics, diameter 1.32(+0.1,-0.1)mm, nominal thickness 0.1mm

## (2) Requirements

Characteristic impedance : 50(+2,-2)ohm by TDR method (raise time 40ps)  
 Nominal capacitance: 95 pF/m  
 Conductor resistance of inner conductor at 293K (20°C) : 520 ohm/km MAX.  
 Insulation resistance : 1500 mega-ohm.km MIN.  
 Dielectric withstand voltage : no breakdown at AC1000V for 1 minutes.

## (1) 構成

中心導体 : AWG # 32(7/0.08), 銀メッキ軟銅線または銀メッキすず入り銅線  
 誘電体 : フッ素樹脂, 外径0.66(+0.05,-0.05), 標準厚さ0.21mm  
 外部導体(内側) : 16/5/0.05, すずメッキ軟銅線  
 外部導体(外側) : 16/6/0.05, 標準外径1.12mm, すずメッキ軟銅線  
 ジャケット : フッ素樹脂, 外径1.32(+0.1,-0.1)mm, 標準厚さ0.1mm

## (2) 仕様

特性インピーダンス : 50±2Ω (TDR, ライズタイム40ps)  
 標準静電容量 : 95pF/m  
 293K(20°C)時の中心導体導体抵抗 : 520Ω /km以下  
 絶縁抵抗 : 1500MΩ・km以上  
 耐電圧 : AC1000V・1分間にて絶縁破壊の無い事



DOCUMENT CLASSIFICATION Product Specification 製品規格	TITLE MHF series micro coaxial connector	No. PRS-1176
<p>4-4 Part No. 20278-001R-18, 20278-011R-18 RG178 B/U</p> <p>(1) Description  Inner conductor : AWG#30(7/0.102) , silver plating copper clad steel wire  Dielectric core : Fluoro-plastics , diameter 0.84(+0.03,-0.03)mm , nominal thickness 0.268mm  Outer conductor : 16/3/0.1 , nominal diameter 1.35mm , silver plating copper wire  Jacket : Fluoro-plastics , diameter 1.8(+0.1,-0.1)mm , nominal thickness 0.23mm</p> <p>(2) Requirements  Characteristic impedance : 50(+2,-2)ohm by TDR method (raise time 40ps)  Nominal capacitance: 95 pF/m  Conductor resistance of inner conductor at 293K (20°C) : 805 ohm/km MAX.  Insulation resistance : 1500 mega-ohm.km MIN.  Dielectric withstand voltage : no breakdown at AC2000V for 1 minutes.</p> <p>(1) 構成  中心導体 : AWG # 30(7/0.102), 銀メッキ銅被鋼線  誘電体 : フッ素樹脂, 外径0.84(±0.03), 標準厚さ0.268mm  外部導体 : 16/3/0.1, 標準外径1.35mm, 銀メッキ軟銅線  ジャケット : フッ素樹脂, 外径1.8(±0.1)mm, 標準厚さ0.23mm</p> <p>(2) 仕様  特性インピーダンス : 50±2Ω (TDR, ライズタイム40ps)  標準静電容量 : 95pF/m  293K(20°C)時の中心導体導体抵抗 : 805Ω /km以下  絶縁抵抗 : 1500MΩ・km以上  耐電圧 : AC2000V・1分間にて絶縁破壊の無い事</p> <p>5. Ratings / 定格  (1) Rated voltage / 電圧 : AC60Vrms  (2) Nominal characteristic impedance / 公称特性インピーダンス : 50Ω  (3) Frequency / 周波数 : DC~3GHz  (4) VSWR : 1.3 MAX.  (5) Service Temperature / 使用温度範囲 : 233~363K(-40~+90°C)</p> <p>6. Test methods and performance / 試験及び性能</p> <p>6-1 Test condition / 試験条件  Unless otherwise specified, all tests and measurements shall be performed under the following conditions in accordance with MIL-STD-202  全ての測定と試験は、MIL-STD-202に基づき以下の条件で行う。  Temperature / 温度 : 288~308K (15~35°C)  Humidity / 湿度 : 45~75%RH</p>		

DOCUMENT CLASSIFICATION	TITLE	No.
Product Specification 製品規格	MHF series micro coaxial connector	PRS-1176

## 6-2 Sample quantity / 試料数

- (1) Insulation resistance / 絶縁抵抗 : 10pcs.
- (2) Dielectric withstanding voltage / 耐電圧 : 10pcs.
- (3) VSWR : 5pcs.
- (4) Unmating force / 抜去力 : 10pcs
- (5) Durability / 耐久性 : 10pcs.
- (6) Cable retention force / ケーブル保持力 : 10pcs.
- (7) Vibration / 振動 : 10pcs.
- (8) Shock / 衝撃 : 10pcs.
- (9) Thermal shock / 温度サイクル : 10pcs.
- (10) Humidity / 湿度 : 10pcs.
- (11) Salt water spray / 塩水噴霧 : 10pcs.
- (12) Solderability / 半田付け性 : 10pcs.
- (13) Reflow soldering heat resistance / 半田耐熱性 : 10pcs.

## 6-3-1 Electrical / 電氣的性能

## (1) Contact Resistance / 接触抵抗

A. Testing: Solder the receptacle connector to the test board and mate the plug connector together, then measure the contact resistance as shown in Fig.1 by the four terminal method. Apply the low level condition in accordance with MIL-STD-202, Method 307.

Open circuit voltage : 20mV MAX

Circuit current : 10mA MAX. (DC or AC1kHz)

Contact resistance of inner contact : <resistance of A-E> - <resistance of B-E>

Contact resistance of ground contact : <resistance of A-D> - <resistance of B-D>

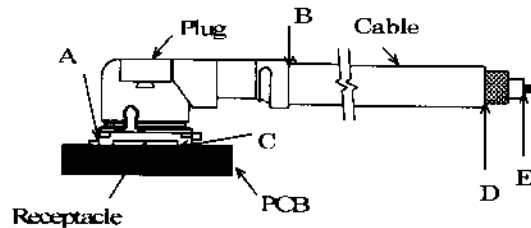


Fig.1

## B. Requirements :

Contact resistance of inner contact initial 20 milli-ohm MAX. after testing 25milli-ohm MAX.

Contact resistance of ground contact initial 10 milli-ohm MAX. after testing 15milli-ohm MAX.

A. 試験法: テスト基板にリセプタクルコネクタを半田付けし、プラグコネクタと嵌合させ、Fig. 1のように4端子法にて下記の条件で測定する。MIL-STD-202 試験法 307 に準拠。

開回路電圧: 20mV以下

試験電流 : 10mA (DCもしくはAC1kHz)

中心導体 : <A-E間の電気抵抗> - <B-E間の電気抵抗>

外部導体 : <A-D間の電気抵抗> - <B-D間の電気抵抗>

B. 必要条件: 中心導体 初期 20mΩ 以下, 試験後 25mΩ 以下

外部導体 初期 10mΩ 以下, 試験後 15mΩ 以下

DOCUMENT CLASSIFICATION	TITLE	No.
Product Specification 製品規格	MHF series micro coaxial connector	PRS-1176

## (2) Insulation resistance / 絶縁抵抗

A. Testing : Mate the plug and receptacle connector together, then apply DC 100 V between the inner contact and the ground contact in accordance with MIL-STD-202, Method 302.

B. Requirements : Initial 500 Mohm MIN. after testing 100 Mohm MIN.

A.試験法: リセプタクル及びプラグコネクタを互いに嵌合させ、中心導体と外部導体の間に DC 100Vを印加し、測定する。MIL-STD-202 試験法 302 に準拠。

B.必要条件: 初期 500MΩ 以上 試験後 100MΩ 以上

## (3) Dielectric withstanding voltage / 耐電圧

A. Testing : Mate the receptacle and plug connector together, then apply AC 200 Vrms between the inner contact and the ground contact for a minute in accordance with MIL-STD-202, Method 301.

B. Requirements : No creeping discharge, flashover, nor insulator breakdown shall occur.

A.試験法: リセプタクル及びプラグコネクタを互いに嵌合させ、中心導体と外部導体の間に AC 200V(実効値)を一分間印加する。MIL-STD-202 試験法 301 に準拠。

B.必要条件: 沿面放電、空中放電、絶縁破壊等の異常のないこと。

## (4) VSWR

A. Testing : Measure the VSWR as shown in Fig.3 by the network analyzer.

Frequency : 100M~3GHz

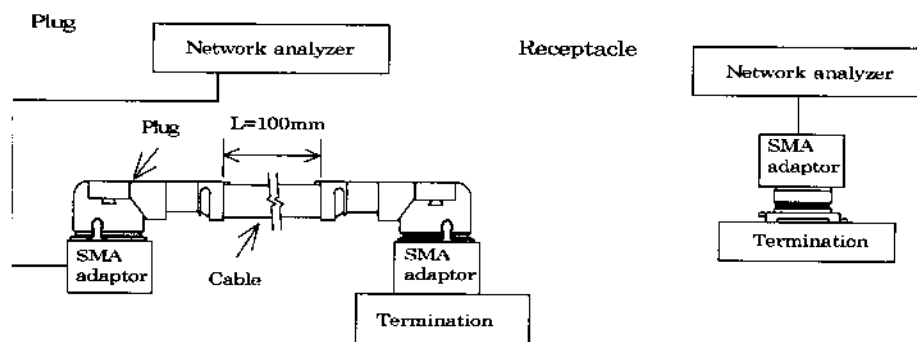


Fig.3

B. Requirements : 1.3 MAX.

A.試験法: ネットワークアナライザにて Fig.3 のようにVSWRを測定する。

周波数 : 100M~3GHz

B.必要条件: 1.3以下

## 6-3-2 Mechanical / 機械的性能

## (1) Unmating force / 抜去力

A. Testing : Unmate the receptacle connector ( soldered to the test board) and plug at a speed  $25 \pm 3$  mm/minutes along the mating by the push-on/pull-off machine .

B. Requirements :

Total unmating force : Initial 5N MIN. after 30 cycles 3N MIN.

Unmating force of inner contact : Initial 0.15N MIN. after 30 cycles 0.1N MIN

DOCUMENT CLASSIFICATION	TITLE	No.
Product Specification 製品規格	MHF series micro coaxial connector	PRS-1176

A.試験法:挿抜試験機を用いて、基板に半田付けしたリセプタクルとプラグを嵌合軸と平行に毎分 $25 \pm 3$ mmの速度で挿抜する。

B.必要条件:

総合抜去力:初回抜去力 5N以上 ,30回後抜去力 3N以上

中心導体 :初回抜去力 0.15N以上 ,30回後抜去力 0.1N以上

## (2) Durability / 耐久性

A. Testing : Mate and unmate the receptacle connector ( soldered to the test board) and plug 30 cycles at a speed  $25 \pm 3$ mm/minutes along the mating by the push-on/pull-off machine .

B.Requirements :

Contact resistance of inner contact initial 20 milli-ohm MAX. after testing 25milli-ohm MAX.

Contact resistance of ground contact initial 10 milli-ohm MAX. after testing 15milli-ohm MAX.

A.試験法:挿抜試験機を用いて、基板に半田付けしたリセプタクルとプラグを嵌合軸と平行に毎分 $25 \pm 3$ mmの速度で30回挿抜する。

B.必要条件 中心導体接触抵抗 : 初期 20mΩ 以下, 試験後 25mΩ 以下

外部導体接触抵抗 : 初期 10mΩ 以下, 試験後 15mΩ 以下

## (3) Cable retention force / ケーブル保持力

A. Testing : Apply force on the cable as shown in Fig.2.

During the testing, run 100mA DC to check electrical discontinuity.

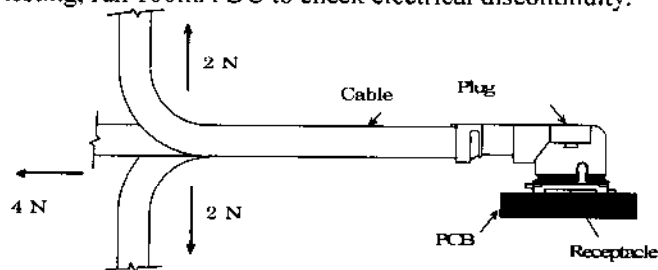


Fig.2

## B.Requirements

Appearance : Looseness between the parts, chipping, breakage or other abnormality shall not occur.

Electrical discontinuity : No electrical discontinuity greater than 1 micro-sec. shall occur.

Contact resistance of inner contact initial 20 milli-ohm MAX. after testing 25milli-ohm MAX.

Contact resistance of ground contact initial 10 milli-ohm MAX. after testing 15milli-ohm MAX.

A.試験法:Fig. 2のようにケーブルに力を加える。尚、試験中にDC100mAの電流を流して電氣的瞬断を確認する。

B.必要条件 外観 : 部品のゆるみ、欠け、割れ、その他外観上の異常の無いこと。

電流瞬断 : 試験中、1マイクロ秒を超える電氣的瞬断の無いこと。

中心導体接触抵抗 : 初期 20mΩ 以下, 試験後 25mΩ 以下

外部導体接触抵抗 : 初期 10mΩ 以下, 試験後 15mΩ 以下

DOCUMENT CLASSIFICATION	TITLE	No.
Product Specification 製品規格	MHF series micro coaxial connector	PRS-1176
<p>(4) Vibration / 振動</p> <p>A. Testing : Apply the following vibration to the mating connector .            During the testing, run 100mA DC to check electrical discontinuity.            Frequency : 10Hz → 100Hz → 10Hz / approx 15 minutes.            Half amplitude ,Peak value of acceleration: 1.5mm or 59m/s<sup>2</sup> (6G)            Directions , cycle : 3 mutually perpendicular direction ,            5 cycles(approx 75min )about each direction</p> <p>B.Requirements            Appearance : Looseness between the parts, chipping, breakage or other abnormality shall not occur.            Electrical discontinuity : No electrical discontinuity grater than 1micro-sec. shall occur.            Contact resistance of inner contact initial 20 milli-ohm MAX. after testing 25milli-ohm MAX.            Contact resistance of ground contact initial 10 milli-ohm MAX. after testing 15milli-ohm MAX.</p> <p>A.試験法: 嵌合状態のコネクタを、下記の振動を加える。尚、試験中にDC100mAの電流を流して電氣的瞬断を確認する。            周波数 : 10Hz→100Hz→10Hz / 約15分間            片振幅,加速度: 1.5mm or 59m/s<sup>2</sup> (6G)            方向,サイクル: 3つの互いに直角な方向について各5サイクル(約75分)実施</p> <p>B.必要条件 外観 : 部品のゆるみ、欠け、割れ、その他外観上の異常の無いこと。            電流瞬断 : 試験中、1マイクロ秒を超える電氣的瞬断の無いこと。            中心導体接触抵抗 : 初期 20mΩ 以下、試験後 25mΩ 以下            外部導体接触抵抗 : 初期 10mΩ 以下、試験後 15mΩ 以下</p> <p>(5) Shock / 衝撃</p> <p>A. Testing : Apply the following vibration to the mating connector in accordance with MIL-STD-202, Method 213, Condition B. During the testing, run 100mA DC to check electrical discontinuity.            Peak value of acceleration: 735m/s<sup>2</sup> (75G)            Duration : 11msec            Wave Form : half sinusoidal            Directions , cycle : 6 mutually perpendicular direction , 3 cycles about each direction</p> <p>B.Requirements            Appearance : Looseness between the parts, chipping, breakage or other abnormality shall not occur.            Electrical discontinuity : No electrical discontinuity grater than 1 micro-sec. shall occur.            Contact resistance of inner contact initial 20 milli-ohm MAX. after testing 25milli-ohm MAX.            Contact resistance of ground contact initial 10 milli-ohm MAX. after testing 15milli-ohm MAX.</p> <p>A.試験法: 嵌合状態のコネクタを、衝撃試験機に取り付け、下記の衝撃を加える。尚、試験中にDC100mAの電流を流して電氣的瞬断を確認する。MIN-STD-202 試験法 213 試験条件 B に準拠。            最大加速度: 735m/s<sup>2</sup>(75G)            標準持続時間: 11msec.            波形: 半波正弦波            方向: 直交する6方向、各3回</p> <p>B.必要条件 外観 : 部品のゆるみ、欠け、割れ、その他外観上の異常の無いこと。            電流瞬断 : 試験中、1マイクロ秒を超える電氣的瞬断の無いこと。            中心導体接触抵抗 : 初期 20mΩ 以下、試験後 25mΩ 以下            外部導体接触抵抗 : 初期 10mΩ 以下、試験後 15mΩ 以下</p>		

DOCUMENT CLASSIFICATION Product Specification 製品規格	TITLE MHF series micro coaxial connector	No. PRS-1176
<p>6-3-3 Environmental / 耐環境性</p> <p>(1) Thermal shock/ 温度サイクル</p> <p>A. Testing : Apply the following environment to the mating connector .  Temperature ,duration  :233K/30minutes→278~308K/5minutes MAX.→363K/30minutes→278~308K/5minutes MAX.  (-40°C) (5~35°C) (90°C) (5~35°C)  No. of cycles : 5 cycles</p> <p>B.Requirements  Appearance : Looseness between the parts, chipping, breakage or other abnormality shall not occur.  Contact resistance of inner contact initial 20 milli-ohm MAX. after testing 25milli-ohm MAX.  Contact resistance of ground contact initial 10 milli-ohm MAX. after testing 15milli-ohm MAX.  Insulation resistance : initial 500 mega-ohm MIN. after testing 100 mega-ohm MIN.</p> <p>A.試験法: 嵌合状態のコネクタを、下記の雰囲気中に設置する。  1サイクルの条件  :233K/30分→278~308K/5分以下→363K/30分→278~308K/5分以下  (-40°C) (5~35°C) (90°C) (5~35°C)  実施サイクル :5サイクル</p> <p>B.必要条件 外観 : 部品のゆるみ、欠け、割れ、その他外観上の異常の無いこと。  中心導体接触抵抗 : 初期 20mΩ 以下、試験後 25mΩ 以下  外部導体接触抵抗 : 初期 10mΩ 以下、試験後 15mΩ 以下  絶縁抵抗 : 初期 500MΩ 以上 試験後 100MΩ 以上</p> <p>(2) Humidity / 湿度</p> <p>A. Testing : Apply the following environment to the mating connector in accordance with MIL-STD-202, Method 103, Condition B .  Temperature : 313 ± 2 K (40 ± 2°C)  Humidity : 90~95%RH  Duration : 96 hours</p> <p>B.Requirements  Appearance : Looseness between the parts, chipping, breakage or other abnormality shall not occur.  Contact resistance of inner contact initial 20 milli-ohm MAX. after testing 25milli-ohm MAX.  Contact resistance of ground contact initial 10 milli-ohm MAX. after testing 15milli-ohm MAX.  Insulation resistance : initial 500 mega-ohm MIN. after testing 100 mega-ohm MIN.</p> <p>A.試験法: 嵌合状態のコネクタを、下記の雰囲気中に設置する。MIL-STD-202 試験法 103 条件 B に準拠。  温度: 313 ± 2K (40 ± 2°C)  湿度: 90~95%RH  時間: 96時間</p> <p>B.必要条件 外観 : 部品のゆるみ、欠け、割れ、その他外観上の異常の無いこと。  中心導体接触抵抗 : 初期 20mΩ 以下、試験後 25mΩ 以下  外部導体接触抵抗 : 初期 10mΩ 以下、試験後 15mΩ 以下  絶縁抵抗 : 初期 500MΩ 以上 試験後 100MΩ 以上</p> <p>(3) Salt water spray / 塩水噴霧</p> <p>A. Testing : Apply the following environment to the mating connector in accordance with MIL-STD-202, Method 101, Condition B.  Temperature : 308 ± 2 K (35 ± 2°C)  Salt water density by weight : 5 ± 1%  Duration : 48 hours</p> <p>B.Requirements : Appearance no abnormality adversely affecting the performance shall occur.</p>		

DOCUMENT CLASSIFICATION Product Specification 製品規格	TITLE MHF series micro coaxial connector	No. PRS-1176
--	--	-----------------

A.試験法:嵌合状態のコネクタを、下記の雰囲気中に放置する。

温度 :  $308 \pm 2\text{K}$  ( $35 \pm 2^\circ\text{C}$ )

塩水濃度:  $5 \pm 1\%$  (重量比)

時間 : 48時間

B.必要条件 : 外観 著しい腐食の無い事。

#### 6-3-4 Solder / 半田付け関連

##### (1) Solderability / 半田付け性

A. Testing : Dip the solder tine of the contact in the solder bath at  $518 \pm 5$  ( $245 \pm 5^\circ\text{C}$ ) for  $5 \pm 0.5$  sec.  
After immersing the tine in the flux of RMA or R type for 5 to 10 seconds in accordance with MIL-STD-202, Method 208.

B.Requirements : More than 95% of the dipped surface shall be evenly wet.

A.試験法:コンタクトの半田付け部を $518 \pm 5\text{K}$  ( $245 \pm 5^\circ\text{C}$ )の半田槽内に $5 \pm 0.5$ 秒浸す。フラックスは、RMA又はR型を使用し5~10秒間浸すものとする。MIL-STD-202、試験法208に準拠。

B.必要条件:浸した面積の95%以上に半田がむらなく付着すること。

##### (2) Reflow soldering heat resistance / 半田耐熱性

A. Testing : Put on the receptacle connector to PCB , apply the heat 2 cycles as shown in Fig. 4

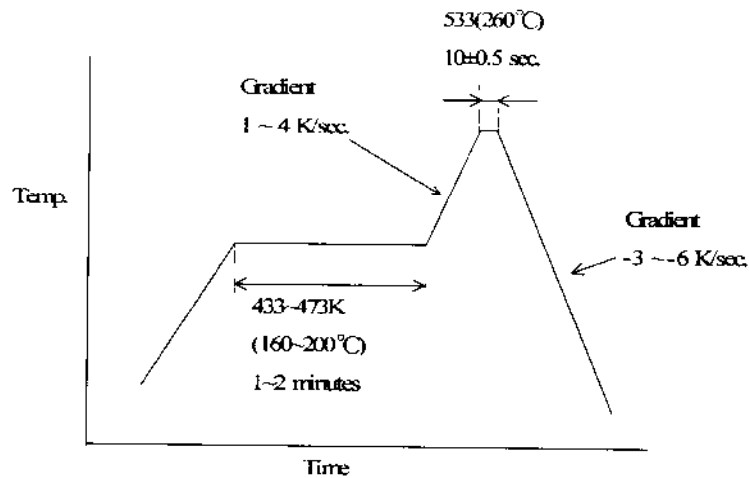


Fig4

B.Requirements : Appearance no abnormality adversely affecting the performance shall occur.

A.試験法:基板にリセプタクルコネクタを置き、Fig. 4の条件で2回リフローを行う。

B.必要条件:機能を損なう変形及び欠陥の無い事。



WHA YU INDUSTRIAL CO., LTD. (HEAD OFFICE)  
 TAI HWA ELECTRONIC CO., LTD.(CHINA)  
 SHANGHAI HUA YU ELECTRONIC CO., LTD.(CHINA)  
 AEON TECH CO., LTD. (CHINA)

## SPECIFICATION FOR APPROVAL

**CUSTOMER:** 華碩科技股份有限公司



**PART NAME:** RF Cable Assembly

**PART NO.:**

**REVISION:**

**W. Y. P/NO.:** C660-510019-A

**REV.:** X1

	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
APPROVED BY :		
DATE :	2004/7/6	

HG

TH

### WHA YU GROUP

WHA YU INDUSTRIAL CO., LTD.(HEAD OFFICE)

華裕實業股份有限公司

Address: #70 Shui Li Road, Hsin Chu City, Taiwan, R.O.C.

Tel:+886-3-5714225(REP.)

Fax:+ 886-3-5713853 · + 886-3-5723600

TAI HWA ELECTRONIC CO., LTD. (CHINA)

台樺電業製品廠

Address: Pak Ho District, Hiu Street Town, Dong Guan City, Guangdong, China

Tel: + 86-769-5599375 · + 86-769-5912375

Fax: + 86-769-5599376

HUA HONG INTERNATIONAL LTD.

華弘國際有限公司

Rm.1103A,President Commercial Centre,608 Nathan Road,Mong Kok,Kowloon,Hong Kong

Tel: + 86-852-27712210

Fax: + 86-852-23843747

SHANGHAI HUA YU ELECTRONIC CO., LTD. (CHINA)

上海華裕電子有限公司

Address:3586,Wai Qing Song Road, Qing Pu County, Shanghai China

Tel: + 86-21-59741348 · + 86-21-59744101~4

Fax: + 86-21-59741347

SU ZHOU AEON TECH CO., LTD. (CHINA)

蘇州華廣電通有限公司

Address:Limin North Road, LiLi Town,LiLi Industrial Park,LinHu Economic Zone

Wujiang City, Jiangsu Province, China

Tel: + 86-512-63627980

Fax: + 86-512-63627981





# ***INDEX***

<i><b>Item</b></i>	<i><b>Content</b></i>	<i><b>Page</b></i>
1. ....	<b>Cable Assembly</b> 規格表 .....	1
2. ....	成品圖 .....	2
3. ....	測試報告 .....	3
4. ....	<b>Cable</b> 規格 .....	4~9
5. ....	<b>Connector</b> 材質特性 .....	10~19

# Cable Assembly


## Specification

### 1. Electrical Properties :

- 1.1 Frequency Rang..... 2.4GHz ~ 2.5GHz
- 1.2 Impedance ..... 50Ω Nominal
- 1.3 Insertion Loss..... <1.5 dB


### 2. Physical Properties :

- 2.1 Cable.....  $\phi$  1.13 Coaxial Cable
- 2.2 Connector1..... SMA Straight Jack Reverse  
Connector2..... MHF Connector
- 2.3 Operating Temp. .... -20°C ~ +65°C
- 2.4 Storage Temp. .... -30°C ~ +75°C

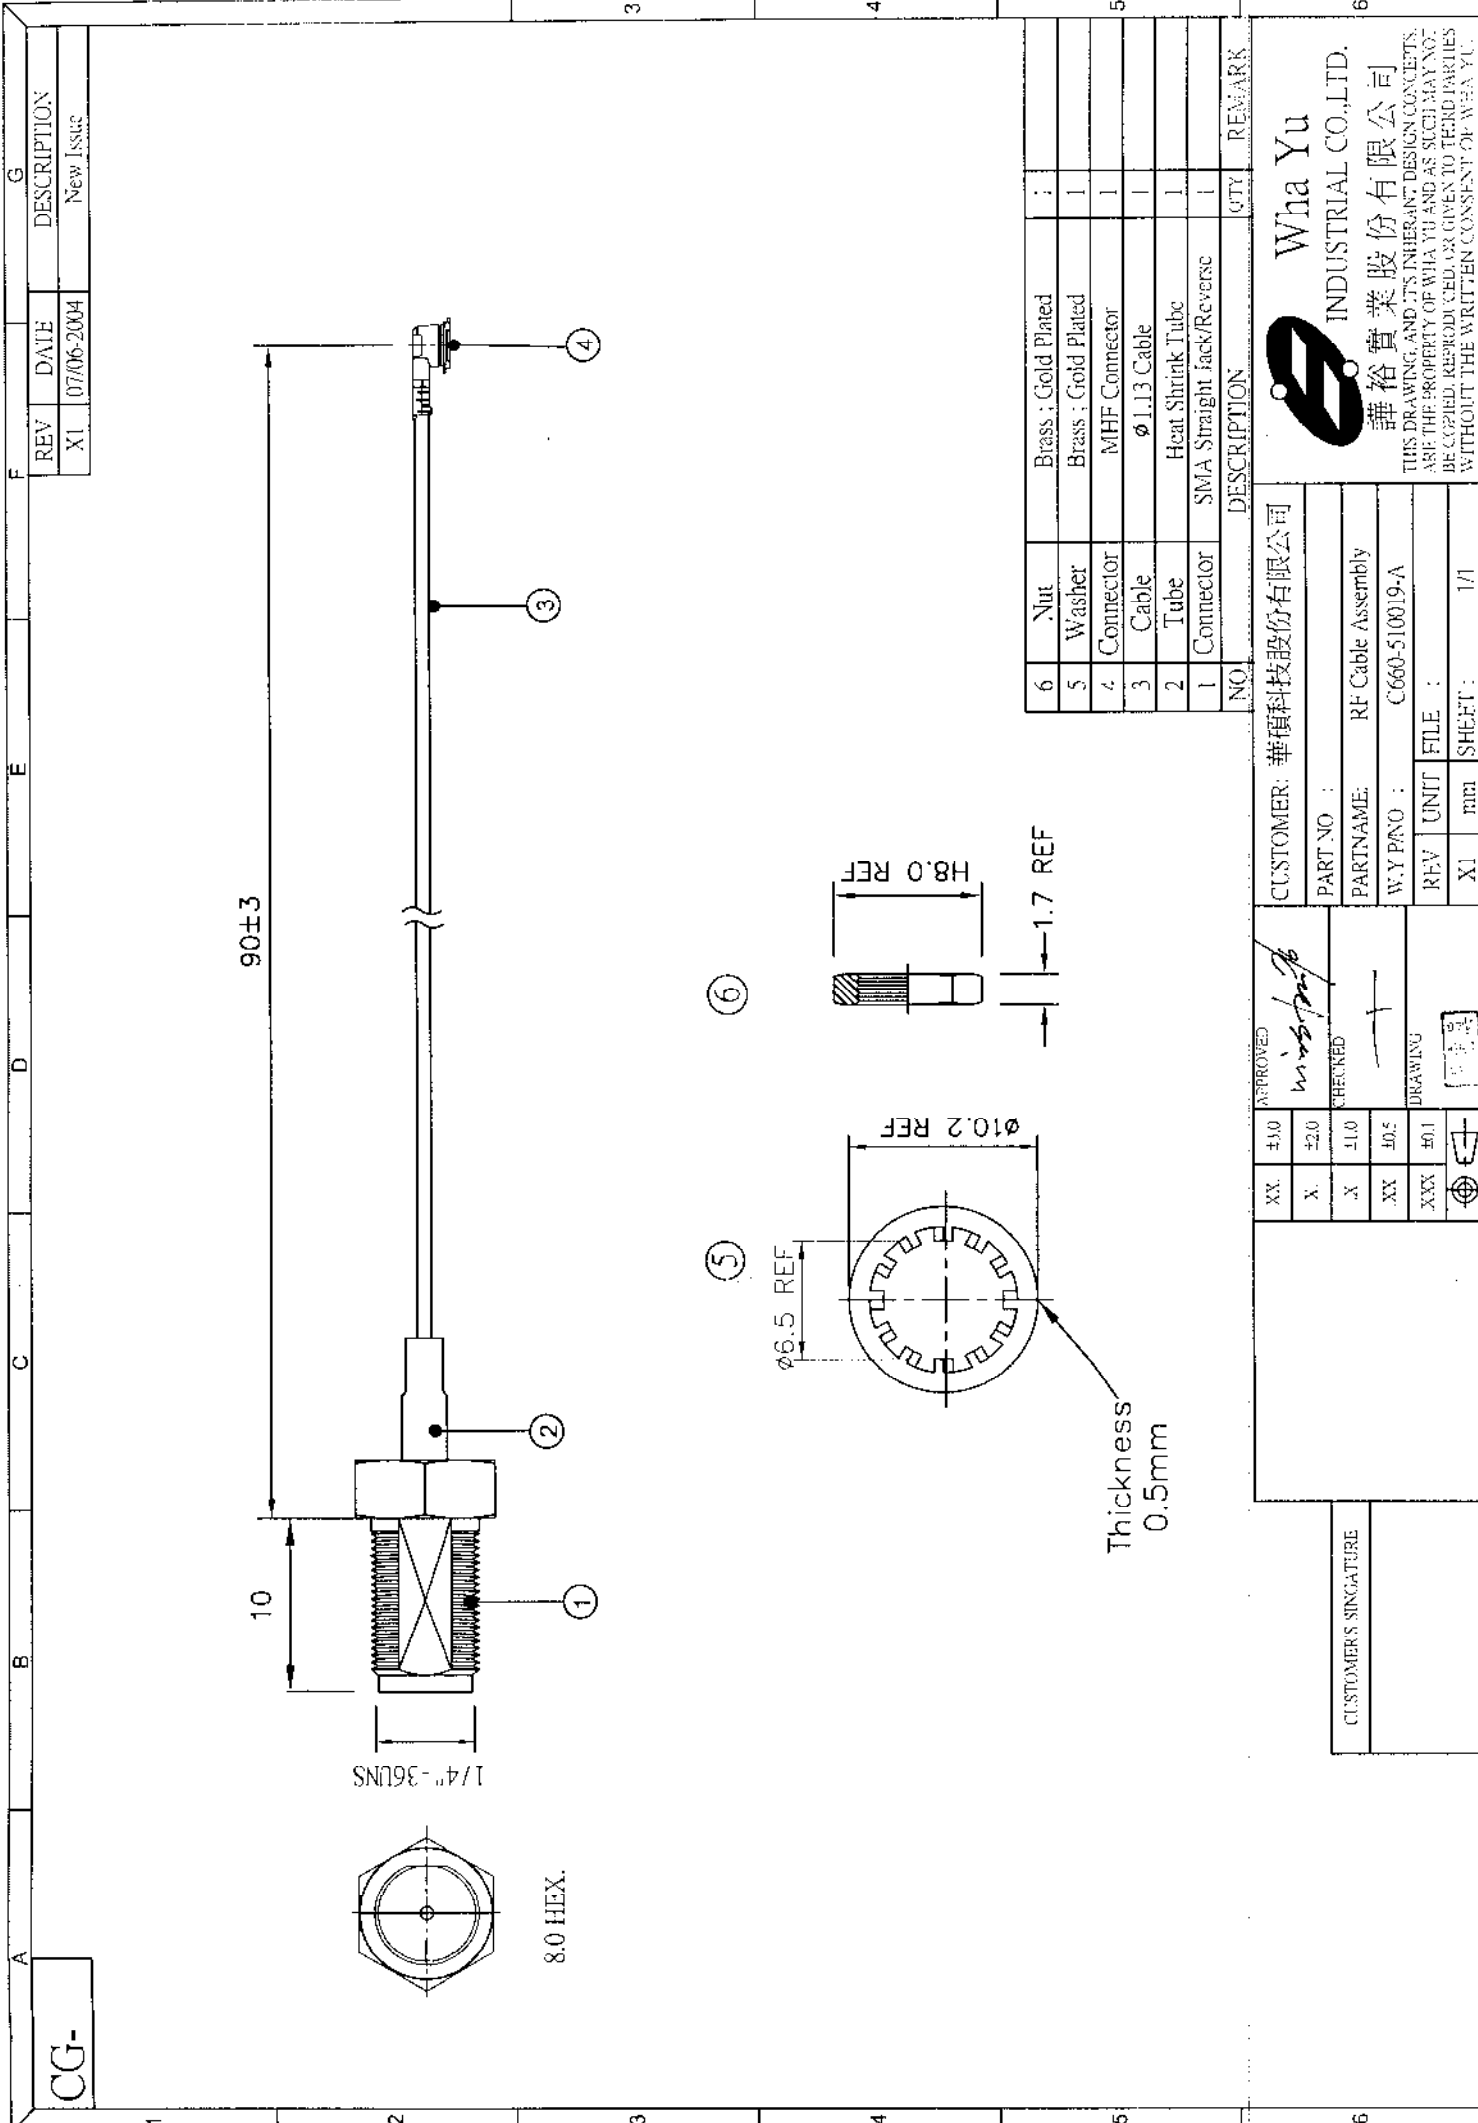

CG-	A	B	C	D	E	F	G
REV	DAVE	DESCRIPTION					
X1	07/06-2004	New Issue					

NO	DESCRIPTION	QTY	REMARK
6	Nut	1	Brass ; Gold Plated
5	Washer	1	Brass ; Gold Plated
4	Connector	1	MHF Connector
3	Cable	1	φ 1.13 Cable
2	Tube	1	Heat Shrink Tube
1	Connector	1	SMA Straight Jack/Reverse


**Wha Yu**  
**INDUSTRIAL CO.,LTD.**  
**誨裕實業股份有限公司**

THIS DRAWING AND ITS INHERENT DESIGN CONCEPTS ARE THE PROPERTY OF WHA YU AND AS SUCH MAY NOT BE COPIED, REPRODUCED, OR GIVEN TO THIRD PARTIES WITHOUT THE WRITTEN CONSENT OF WHA YU.

CUSTOMER: 華碩科技股份有限公司	
PART NO :	
PARTNAME:	RF Cable Assembly
W.Y.PNO :	C660-510019-A
REV	UNIT
X1	mm
FILE :	SHEET :
	1/1

APPROVED	<i>Wang</i>
CHECKED	
DRAWING	
XX ±1.0	±1.0
X ±2.0	±1.0
.X ±1.0	±0.5
.XX ±0.5	±0.1
.XXX ±0.1	

CUSTOMERS SIGNATURE	
---------------------	--




譚裕實業股份有限公司

WHA YU INDUSTRIAL CO., LTD

RF Cable Assembly

P/NO : C660-510019-A

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

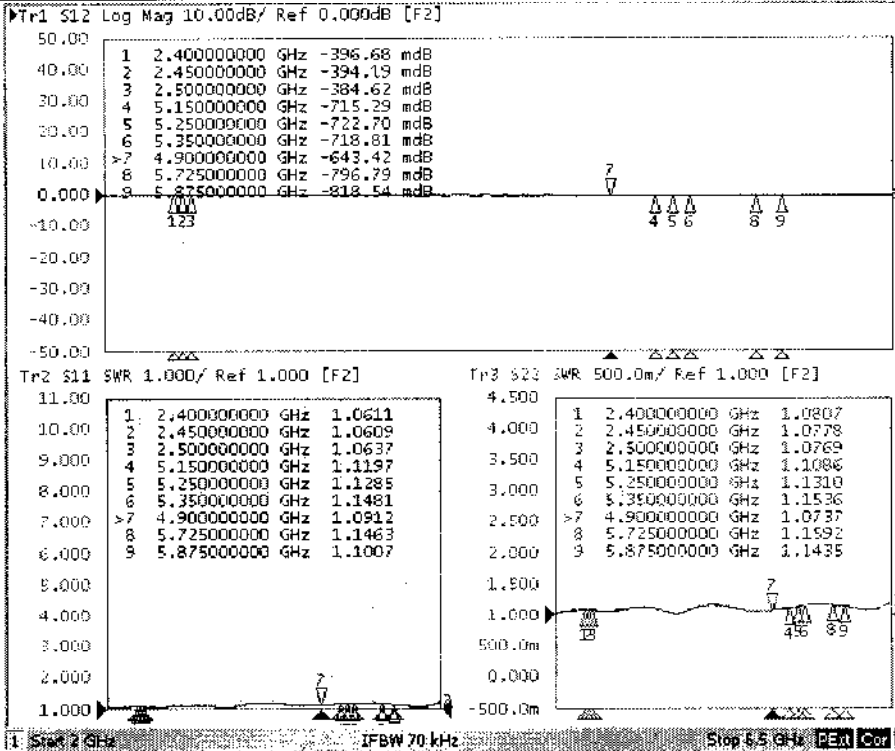

System

Print

Abort Printing

Printer Setup

Invert Image

ON

Dump Screen Image

E5091A Setup

Misc Setup

Backlight

ON


Firmware Revision

A3132PS001	FEP INSULATED HIGH-FREQUENCY COAXIAL CABLE	PAGE	1 / 2
PRODUCT STANDARD		ISSUED	21. Oct. 2003
		REVISED	

**I - Scope**

This specification presents a FEP insulated high-frequency coaxial cable AWG 32, 1.13 mm O.D. for internal wiring of electronic equipment, such as Computer / Notebook with wireless communication systems.

**II - Construction**

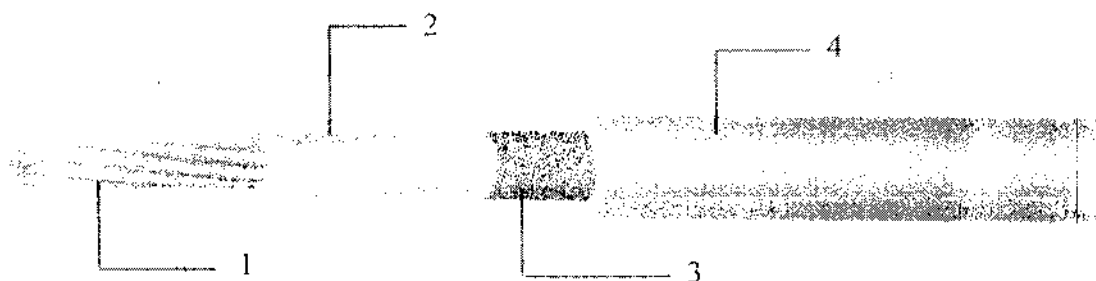

Item	Unit	Details
1. Inner Conductor	Material	Silver coated copper
	Composition	No./mm AWG 32 or 7 × 0.08
	Dia. (approx.)	mm 0.24
2. Dielectric	Material	Extruded FEP
	Thickness	mm 0.22
	Nom. O.D.	mm 0.68 ± 0.02
	Color	Natural
3. Outer Conductor	Material	Silver coated copper
	Composition	Braided (16 / 4 / 0.05)
	Dia. (approx.)	mm 0.90 ± 0.03
4. Jacket	Material	Extruded FEP
	Thickness	mm 0.10
	Dia.	mm 1.13 ± 0.05 / -0.08
	Color	Standard colors are Light Grey, Black, Dark Grey

Note:

MADE BY  
APPROVALS


*Shen Bin Chao*

A3132PS001	FEP INSULATED HIGH-FREQUENCY COAXIAL CABLE	PAGE	2 / 2
PRODUCT STANDARD		ISSUED	21. Oct. 2003
		REVISED	

**III – Characteristics**

Item	Unit	Specified Value	Note
Temperature Rating	°C	200	
Voltage Lasting	V	250	
Dielectric strength	—	Dielectric core: No breakdown at AC 1.5 kV for 0.15 sec.	Spark test
		Jacket: No breakdown at AC 1.5 kV for 0.15 sec.	Spark test
		No breakdown at AC 500V for 1 min.	Outer conductor to inner conductor
Inner conductor resistance	Ω / km	525	at 20°C
Insulation resistance	MΩ / km	Min. 1500	at 20°C
Characteristic Impedance	Ω	50 ± 2	TDR method
Capacitance	pF / m	98	at 1 kHz
Attenuation. (nom.)	dB / m	2.0	1.0 GHz
		2.9	2.0 GHz
		3.6	3.0 GHz
		4.2	4.0 GHz
		4.7	5.0 GHz
		5.2	6.0 GHz
Approx. Weight	g / m	3.15	

Note :



MADE BY  
APPROVALS

*Shen Bin Chao*

KURABE INDUSTRIAL CO., LTD

SP3830M-X	FEP INSULATED HIGH-FREQUENCY COAXIAL CABLE (FWS 5022)	PAGE	1/4
PRODUCT STANDARD		ISSUED	17-9-2001
		REVISED	

1. SCOPE

This standard covers "FEP insulated High-Frequency coaxial cable".

2. CONSTRUCTION

Construction and dimensions of the cable are shown in Figure.1 and Table 1.

3. PERFORMANCE

Performance of the finished cable is shown in Table 2. The test methods are in accordance with applicable test methods described in JIS C 3005.

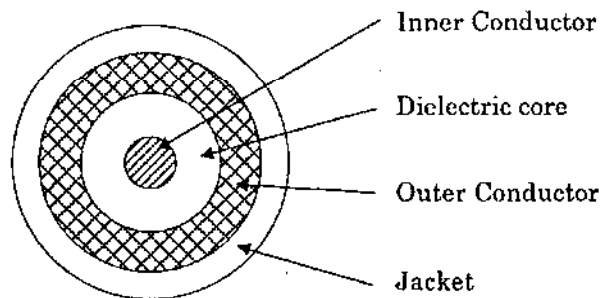


Figure 1.

NOTE :	MADE BY	<i>M. Mba</i>
	APPROVALS	<i>T. Kawazawa</i>

KURABE INDUSTRIAL CO., LTD

SP3830M-X	<b>FEP INSULATED HIGH-FREQUENCY COAXIAL CABLE (FWS 5022)</b>	PAGE	2/4
PRODUCT STANDARD		ISSUED	17-9-2001
		REVISED	

Table 1. Construction

Item	Unit	Specified Value
Inner Conductor	Material	—
	Stranding	No./mm
	Dia.(approx.)	mm
Dielectric Core	Material	—
	Thick.(nom.)	mm
	Dia.	mm
	Color	—
Outer Conductor	Material	—
	Type	—
	Dia.(approx)	mm
Jacket	Material	—
	Thick.(nom.)	mm
	Dia.	mm
	Color	—

Table 2. Performance

Item	Unit	Specified Value	Note
Appearance	—	Faultless in visible	—
Inner conductor resistance	Ω/km	Max. 597	at 20°C
Insulation resistance	MΩ·km	Min. 1500	at 20°C
Dielectric strength	—	Dielectric core: No breakdown at AC1.5kV for 0.15sec.	Spark test
		Jacket: No breakdown at AC1.5kV for 0.15sec.	Spark test
		No breakdown at AC500V for 1min.	Outer conductor to inner conductor
Heat resistance for solder	—	Shrink or expansion of dielectric core are not more than 0.5mm	※
Capacitance	pF/m	nom. 98	at 1kHz
Characteristic impedance	Ω	50±2	TDR method
Attenuation (nom.)	dB/m	2.0	1.0GHz
		2.9	2.0GHz
		3.6	3.0GHz
		4.2	4.0GHz
		4.7	5.0GHz
		5.2	6.0GHz

※ After immersion of dielectric core, 10mm into soldering pot which is 230°C for 5 seconds, shrinkage or expansion of the dielectric core must not exceed 0.5mm.

NOTE :	MADE BY	<i>M. Ohba</i>
	APPROVALS	<i>T. Kawasumi</i>



KURABE INDUSTRIAL CO., LTD

SP3830M-X	<b>FEP INSULATED HIGH-FREQUENCY COAXIAL CABLE (FWS 5022)</b>	PAGE	3/4
PRODUCT STANDARD		ISSUED	17-9-2001
		REVISED	
<p><b>4. INSPECTION</b></p> <p>An inspection is took place in accordance with applicable test methods. The cable has to pass the specifications described Table 1 and Table 2.</p> <p><b>5. TEST METHOD</b></p> <p>The test methods are in accordance with applicable test methods described in JIS C 3005 (Test methods for rubber or plastic insulated wires and cables).</p> <p><b>6. TEMPERATURE RATING</b></p> <p style="padding-left: 40px;">150 °C</p> <p><b>7. VOLATGE LATING</b></p> <p style="padding-left: 40px;">250 V</p> <p><b>8. MARKING ON TAG</b></p> <p>Each reel of finished cable is tagged to indicate following information:</p> <ul style="list-style-type: none"> <li>(1) Designation of the cable,</li> <li>(2) Conductor size,</li> <li>(3) Length,</li> <li>(4) Date of manufacture or LOT No.,</li> <li>(5) Specification No., and</li> <li>(6) Manufacture's name.</li> </ul> <p><b>9. PACKAGE</b></p> <p>The finished cables are cut into a shipping length of 200 meters, reeled to paper bobbin and packed securely to prevent injuries during transportation. Odd length of the finished wires should be accepted for shipping according to the condition of mutual agreement.</p> <p style="padding-left: 40px;">In the case no agreement is found, the condition stated in quotation shall prevail.</p> <p><b>10. APPLICATION NOTES</b></p> <p>10-1. For use other than the use mutually agreed, compatibility should be carefully confirmed in each practical use by user.</p> <p>10-2. It is recommended to make a trial run for each practical application.</p>			
NOTE :		MADE BY	<i>M. Ohba</i>
		APPROVALS	<i>J. Kasama</i>

KURABE INDUSTRIAL CO., LTD

SP3830M-X	<b>FEP INSULATED HIGH-FREQUENCY COAXIAL CABLE (FWS 5022)</b>	PAGE	4/4
PRODUCT STANDARD		ISSUED	17-9-2001
		REVISED	
<p>10-3. In case a design for use of cable is changed, please contact our sales department, if necessary. Do not use under extreme mechanical stress such as hard bending, tightening, and twisting. The use under extreme mechanical stress may cause not only shortening the life span of cable but also troubles such as decline of dielectric strength.</p> <p>10-4. Handling precautions</p> <p>① Do not hurt the insulation and sheath of the cable by making holes and scratches. And avoid any sharp edge when wiring so as not to injure cables.</p> <p>② Avoid unnecessary excessive force to cable, such as pulling, twisting, bending or tightening.</p> <p>10-5. Storage precautions</p> <p style="padding-left: 20px;">Avoid continuous exposure to sunlight.</p>			
NOTE :	MADE BY	<i>M. Ohba</i>	
	APPROVALS	<i>T. Kawasawa</i>	

**PRODUCT SPECIFICATION**

製品規格

No. PRS-1176

**MHF series micro coaxial connector**

Qualification Test Report No. TR-1021

2	S2031	K.O	May/17/'02	K.K	Prepared by	Reviewed by	Approved by
1	S1053	K.O	Nov/14/'01	K.K	K.Ohbayashi	E,Kawabe	K.Katabuchi
0	S1025	K.O	Jun/25/'01				
REV.	ECN	BY	DATE	APP.	JUN / 25 / 01	Jun / 25 / 01	Jun / 29 / 01
REVISION RECORD							

DOCUMENT CLASSIFICATION Product Specification 製品規格	TITLE MHF series micro coaxial connector	No. PRS-1176
<p>1. Scope / 序言 MHF series micro coaxial connector is a wire to board connector for AWG#36,32,30 coaxial cable. MHF series micro coaxial connector は、AWG # 36,32,30同軸ケーブルの基板対ワイヤーコネクタである。</p> <p>2. Objectives / 目的 This specification covers the requirements for product performance and test methods of MHF series microcoaxial connector 本規格は、MHF series micro coaxial connector の性能と試験条件について規定する。</p> <p>3. Part No. , construction , material and finish / 構成、材料及び仕上げ (1) Part No. Plug : 20278-***R-08,-13,-18 , Receptacle : 20279-001E-01 (2) Construction, material and finish of the connector are covered as each drawings. 構成、材料及び仕上げは、各図面に指定されている通りとする。</p> <p>4. Applicable cable / 適合ケーブル 4-1 Part No. 20278-001R-08, 20278-011R-08 (1) Description Inner conductor : AWG#36(7/0.05) Silver plating annealed copper wire or silver plating tin-copper alloy Dielectric core : Fluoro-plastics , diameter 0.4(+0.04,-0.02)mm , nominal thickness 0.125mm Outer conductor : 8/5/0.05 , nominal diameter 0.65mm , silver plating annealed copper wire Jacket : Fluoro-plastics , diameter 0.81(+0.04,-0.02)mm , nominal thickness 0.08mm (2) Requirements Characteristic impedance : 50(+3,-3)ohm by TDR method (raise time 40ps) Nominal capacitance: 96 pF/m Conductor resistance of inner conductor at 293K (20°C) : 1400 ohm/km MAX. Insulation resistance : 1000 mega-ohm.km MIN. Dielectric withstand voltage : no breakdown at AC1000V for 1 minutes.</p> <p>(1) 構成 中心導体 : AWG # 36 (7 / 0.05), 銀メッキ軟銅線または銀メッキナズ入り銅線 誘電体 : フッ素樹脂, 外径0.4 (+0.04, -0.02), 標準厚さ0.125mm 外部導体 : 8 / 5 / 0.05, 標準外径0.65mm, 銀メッキ軟銅線 ジャケット : フッ素樹脂, 外径0.81 (+0.04, -0.02)mm, 標準厚さ0.08mm</p> <p>(2) 仕様 特性インピーダンス : 50 ± 3 Ω (TDR, ライズタイム40ps) 標準静電容量 : 96pF / m 293K (20°C) 時の中心導体導体抵抗 : 1400 Ω / km以下 絶縁抵抗 : 1000MΩ · km以上 耐電圧 : AC1000V · 1分間にて絶縁破壊の無い事</p> <p>4-2 Part No. 20278-101R-13, 20278-111R-13 (1) Description Inner conductor : AWG#32(7/0.08) Silver plating annealed copper wire or silver plating tin-copper alloy Dielectric core : Fluoro-plastics , diameter 0.68(+0.04,-0.02)mm , nominal thickness 0.22mm Outer conductor : 16/4/0.05 , nominal diameter 0.93mm , silver plating annealed copper wire Jacket : Fluoro-plastics , diameter 1.13(+0.08,-0.05)mm , nominal thickness 0.1mm</p>		

DOCUMENT CLASSIFICATION	TITLE	No.
Product Specification 製品規格	MHF series micro coaxial connector	PRS-1176
<p>(2) Requirements</p> <p>Characteristic impedance : 50(+2,-2)ohm by TDR method (raise time 40ps)  Nominal capacitance: 97 pF/m  Conductor resistance of inner conductor at 293K (20°C) : 520 ohm/km MAX.  Insulation resistance : 1500 mega-ohm.km MIN.  Dielectric withstand voltage : no breakdown at AC1000V for 1 minutes.</p> <p>(1) 構成</p> <p>中心導体 : AWG # 32(7/0.08),銀メッキ軟銅線または銀メッキすず入り銅線  誘電体 : フッ素樹脂,外径0.68(+0.04,-0.02),標準厚さ0.22mm  外部導体 : 16/4/0.05,標準外径0.93mm, 銀メッキ軟銅線  ジャケット : フッ素樹脂,外径1.13(+0.08,-0.05)mm, 標準厚さ0.1mm</p> <p>(2) 仕様</p> <p>特性インピーダンス : 50±2Ω (TDR,ライズタイム40ps)  標準静電容量 : 97pF/m  293K(20°C)時の中心導体導体抵抗 : 520Ω /km以下  絶縁抵抗 : 1500MΩ・km以上  耐電圧 : AC1000V・1分間にて絶縁破壊の無い事</p> <p>4-3 Part No. 20278-001R-32, 20278-011R-32</p> <p>(1) Description</p> <p>Inner conductor : AWG#32(7/0.08)  Silver plating annealed copper wire or silver plating tin-copper alloy  Dielectric core : Fluoro-plastics , diameter 0.66(+0.05,-0.05)mm , nominal thickness 0.21mm  First outer conductor : 16/5/0.05, tin plating annealed copper wire  Second outer conductor :16/6/0.05, nominal diameter 1.12mm , tin plating annealed copper wire  Jacket : Fluoro-plastics , diameter 1.32(+0.1,-0.1)mm , nominal thickness 0.1mm</p> <p>(2) Requirements</p> <p>Characteristic impedance : 50(+2,-2)ohm by TDR method (raise time 40ps)  Nominal capacitance: 95 pF/m  Conductor resistance of inner conductor at 293K (20°C) : 520 ohm/km MAX.  Insulation resistance : 1500 mega-ohm.km MIN.  Dielectric withstand voltage : no breakdown at AC1000V for 1 minutes.</p> <p>(1) 構成</p> <p>中心導体 : AWG # 32(7/0.08),銀メッキ軟銅線または銀メッキすず入り銅線  誘電体 : フッ素樹脂,外径0.66(+0.05,-0.05),標準厚さ0.21mm  外部導体(内側) : 16/5/0.05,すずメッキ軟銅線  外部導体(外側) : 16/6/0.05,標準外径1.12mm, すずメッキ軟銅線  ジャケット : フッ素樹脂,外径1.32(+0.1,-0.1)mm, 標準厚さ0.1mm</p> <p>(2) 仕様</p> <p>特性インピーダンス : 50±2Ω (TDR,ライズタイム40ps)  標準静電容量 : 95pF/m  293K(20°C)時の中心導体導体抵抗 : 520Ω /km以下  絶縁抵抗 : 1500MΩ・km以上  耐電圧 : AC1000V・1分間にて絶縁破壊の無い事</p>		

DOCUMENT CLASSIFICATION	TITLE	No.
Product Specification 製品規格	MHF series micro coaxial connector	PRS-1170
<p>4-4 Part No. 20278-001R-18, 20278-011R-18            RG178 B/U</p> <p>(1) Description            Inner conductor : AWG#30(7/0.102) , silver plating copper clad steel wire            Dielectric core : Fluoro-plastics , diameter 0.84(+0.03,-0.03)mm , nominal thickness 0.268mm            Outer conductor : 16/3/0.1 , nominal diameter 1.35mm , silver plating copper wire            Jacket : Fluoro-plastics , diameter 1.8(+0.1,-0.1)mm , nominal thickness 0.23mm</p> <p>(2) Requirements            Characteristic impedance : 50(+2,-2)ohm by TDR method (raise time 40ps)            Nominal capacitance: 95 pF/m            Conductor resistance of inner conductor at 293K (20°C) : 805 ohm/km MAX.            Insulation resistance : 1500 mega-ohm.km MIN.            Dielectric withstand voltage : no breakdown at AC2000V for 1 minutes.</p> <p>(1) 構成            中心導体 : AWG # 30(7 / 0. 102), 銀メッキ銅被鋼線            誘電体 : フッ素樹脂, 外径0. 84(±0. 03), 標準厚さ0. 268mm            外部導体 : 16 / 3 / 0. 1, 標準外径1. 35mm, 銀メッキ軟銅線            ジャケット : フッ素樹脂, 外径1. 8(±0. 1)mm, 標準厚さ0. 23mm</p> <p>(2) 仕様            特性インピーダンス : 50±2Ω (TDR, ライズタイム40ps)            標準静電容量 : 95pF / m            293K (20°C) 時の中心導体導体抵抗 : 805Ω / km以下            絶縁抵抗 : 1500MΩ · km以上            耐電圧 : AC2000V · 1分間にて絶縁破壊の無い事</p> <p>5. Ratings / 定格            (1) Rated voltage / 電圧 : AC60Vrms            (2) Nominal characteristic impedance / 公称特性インピーダンス : 50Ω            (3) Frequency / 周波数 : DC~3GHz            (4) VSWR : 1. 3 MAX.            (5) Service Temperature / 使用温度範囲 : 233~363K (-40~+90°C)</p> <p>6. Test methods and performance / 試験及び性能</p> <p>6-1 Test condition / 試験条件            Unless otherwise specified, all tests and measurements shall be performed under the following conditions in accordance with MIL-STD-202            全ての測定と試験は、MIL-STD-202 に基づき以下の条件で行う。            Temperature / 温度 : 288~308K (15~35°C)            Humidity / 湿度 : 45~75%RH</p>		

DOCUMENT CLASSIFICATION	TITLE	No.
Product Specification 製品規格	MHF series micro coaxial connector	PRS-1176

## 6-2 Sample quantity / 試料数

- (1) Insulation resistance / 絶縁抵抗 : 10pcs.
- (2) Dielectric withstanding voltage / 耐電圧 : 10pcs.
- (3) VSWR : 5pcs.
- (4) Unmating force / 抜去力 : 10pcs
- (5) Durability / 耐久性 : 10pcs.
- (6) Cable retention force / ケーブル保持力 : 10pcs.
- (7) Vibration / 振動 : 10pcs.
- (8) Shock / 衝撃 : 10pcs.
- (9) Thermal shock / 温度サイクル : 10pcs.
- (10) Humidity / 湿度 : 10pcs.
- (11) Salt water spray / 塩水噴霧 : 10pcs.
- (12) Solderability / 半田付け性 : 10pcs.
- (13) Reflow soldering heat resistance / 半田耐熱性 : 10pcs.

## 6-3-1 Electrical / 電氣的性能

## (1) Contact Resistance / 接触抵抗

A. Testing: Solder the receptacle connector to the test board and mate the plug connector together, then measure the contact resistance as shown in Fig.1 by the four terminal method. Apply the low level condition in accordance with MIL-STD-202, Method 307.

Open circuit voltage : 20mV MAX

Circuit current : 10mA MAX. (DC or AC1kHz)

Contact resistance of inner contact : <resistance of A-E> - <resistance of B-E>

Contact resistance of ground contact : <resistance of A-D> - <resistance of B-D>

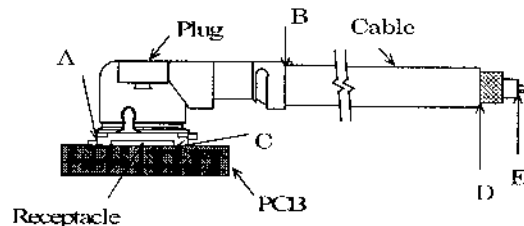


Fig.1

## B. Requirements :

Contact resistance of inner contact initial 20 milli-ohm MAX. after testing 25milli-ohm MAX.

Contact resistance of ground contact initial 10 milli-ohm MAX. after testing 15milli-ohm MAX.

A. 試験法: テスト基板にリセプタクルコネクタを半田付けし、プラグコネクタと嵌合させ、Fig. 1のように4端子法にて下記の条件で測定する。MIL-STD-202 試験法 307 に準拠。

開回路電圧: 20mV以下

試験電流 : 10mA (DCもしくはAC1kHz)

中心導体 : <A-E間の電気抵抗> - <B-E間の電気抵抗>

外部導体 : <A-D間の電気抵抗> - <B-D間の電気抵抗>

B. 必要条件: 中心導体 初期 20mΩ 以下、試験後 25mΩ 以下

外部導体 初期 10mΩ 以下、試験後 15mΩ 以下

DOCUMENT CLASSIFICATION	TITLE	No.
Product Specification 製品規格	MHF series micro coaxial connector	PRS-1176

## (2) Insulation resistance / 絶縁抵抗

A. Testing : Mate the plug and receptacle connector together, then apply DC 100 V between the inner contact and the ground contact in accordance with MIL-STD-202, Method 302.

B. Requirements : Initial 500 Mohm MIN. after testing 100 Mohm MIN.

A. 試験法: リセプタクル及びプラグコネクタを互いに嵌合させ、中心導体と外部導体の間に DC 100Vを印加し、測定する。MIL-STD-202 試験法 302 に準拠。

B. 必要条件: 初期 500MΩ 以上 試験後 100MΩ 以上

## (3) Dielectric withstanding voltage / 耐電圧

A. Testing : Mate the receptacle and plug connector together, then apply AC 200 Vrms between the inner contact and the ground contact for a minute in accordance with MIL-STD-202, Method 301.

B. Requirements : No creeping discharge, flashover, nor insulator breakdown shall occur.

A. 試験法: リセプタクル及びプラグコネクタを互いに嵌合させ、中心導体と外部導体の間に AC200V(実効値)を一分間印加する。MIL-STD-202 試験法 301 に準拠。

B. 必要条件: 沿面放電、空中放電、絶縁破壊等の異常のないこと。

## (4) VSWR

A. Testing : Measure the VSWR as shown in Fig.3 by the network analyzer.

Frequency : 100M~3GHz

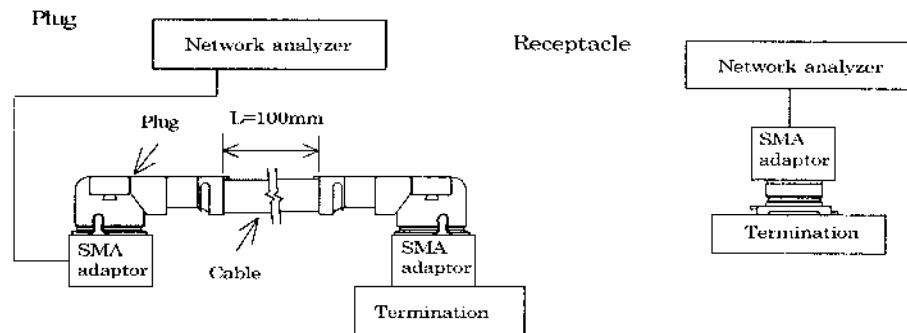


Fig.3

B. Requirements : 1.3 MAX.

A. 試験法: ネットワークアナライザーにて Fig.3 のように VSWR を測定する。

周波数 : 100M~3GHz

B. 必要条件: 1.3以下

## 6-3-2 Mechanical / 機械的性能

## (1) Unmating force / 抜去力

A. Testing : Unmate the receptacle connector ( soldered to the test board) and plug at a speed  $25 \pm 3\text{mm/minutes}$  along the mating by the push-on/pull-off machine .

B. Requirements :

Total unmating force : Initial 5N MIN. after 30 cycles 3N MIN.

Unmating force of inner contact : Initial 0.15N MIN. after 30 cycles 0.1N MIN



DOCUMENT CLASSIFICATION	TITLE	No.
Product Specification 製品規格	MHF series micro coaxial connector	PRS-1176

A.試験法:挿抜試験機を用いて、基板に半田付けしたリセプタクルとプラグを嵌合軸と平行に毎分 $25 \pm 3$ mmの速度で挿抜する。

B.必要条件:

総合抜去力:初回抜去力 5N以上 ,30回後抜去力 3N以上

中心導体:初回抜去力 0.15N以上 ,30回後抜去力 0.1N以上

### (2) Durability / 耐久性

A. Testing : Mate and umate the receptacle connector ( soldered to the test board) and plug 30 cycles at a speed  $25 \pm 3$ mm/minutes along the mating by the push-on/pull-off machine .

B.Requirements :

Contact resistance of inner contact initial 20 milli-ohm MAX. after testing 25milli-ohm MAX.

Contact resistance of ground contact initial 10 milli-ohm MAX. after testing 15milli-ohm MAX.

A.試験法:挿抜試験機を用いて、基板に半田付けしたリセプタクルとプラグを嵌合軸と平行に毎分 $25 \pm 3$ mmの速度で30回挿抜する。

B.必要条件 中心導体接触抵抗 : 初期 20mΩ 以下, 試験後 25mΩ 以下

外部導体接触抵抗 : 初期 10mΩ 以下, 試験後 15mΩ 以下

### (3) Cable retention force / ケーブル保持力

A. Testing : Apply force on the cable as shown in Fig.2.

During the testing, run 100mA DC to check electrical discontinuity.

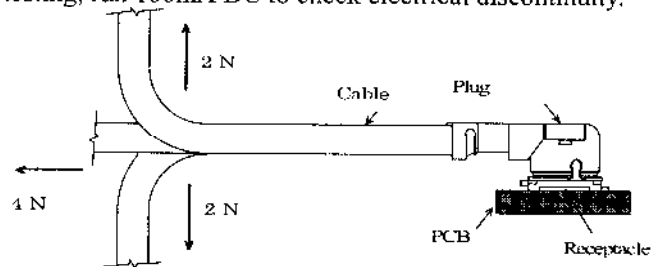


Fig.2

B.Requirements

Appearance : Looseness between the parts, chipping, breakage or other abnormality shall not occur.

Electrical discontinuity : No electrical discontinuity grater than 1 micro-sec. shall occur.

Contact resistance of inner contact initial 20 milli-ohm MAX. after testing 25milli-ohm MAX.

Contact resistance of ground contact initial 10 milli-ohm MAX. after testing 15milli-ohm MAX.

A.試験法:Fig. 2のようにケーブルに力を加える。尚、試験中にDC100mAの電流を流して電氣的瞬断を確認する。

B.必要条件 外観 : 部品のゆるみ、欠け、割れ、その他外観上の異常の無いこと。

電流瞬断 : 試験中、1マイクロ秒を超える電氣的瞬断の無いこと。

中心導体接触抵抗 : 初期 20mΩ 以下, 試験後 25mΩ 以下

外部導体接触抵抗 : 初期 10mΩ 以下, 試験後 15mΩ 以下

DOCUMENT CLASSIFICATION	TITLE	No.
Product Specification 製品規格	MHF series micro coaxial connector	PRS-1176
<p>(4) Vibration / 振動</p> <p>A. Testing : Apply the following vibration to the mating connector .            During the testing, run 100mA DC to check electrical discontinuity.            Frequency : 10Hz → 100Hz → 10Hz / approx 15 minutes.            Half amplitude ,Peak value of acceleration: 1.5mm or 59m/s<sup>2</sup> (6G)            Directions , cycle : 3 mutually perpendicular direction ,            5 cycles(approx 75min )about each direction</p> <p>B.Requirements            Appearance : Looseness between the parts, chipping, breakage or other abnormality shall not occur.            Electrical discontinuity : No electrical discontinuity grater than 1micro-sec. shall occur.            Contact resistance of inner contact initial 20 milli-ohm MAX. after testing 25milli-ohm MAX.            Contact resistance of ground contact initial 10 milli-ohm MAX. after testing 15milli-ohm MAX.</p> <p>A.試験法: 嵌合状態のコネクタを、下記の振動を加える。尚、試験中にDC100mAの電流を流して電氣的瞬断を確認する。            周波数 : 10Hz→100Hz→10Hz / 約15分間            片振幅,加速度: 1.5mm or 59m/s<sup>2</sup> (6G)            方向,サイクル: 3つの互いに直角な方向について各5サイクル(約75分)実施</p> <p>B.必要条件            外観 : 部品のゆるみ、欠け、割れ、その他外観上の異常の無いこと。            電流瞬断 : 試験中、1 マイクロ秒を超える電氣的瞬断の無いこと。            中心導体接触抵抗 : 初期 20mΩ 以下、試験後 25mΩ 以下            外部導体接触抵抗 : 初期 10mΩ 以下、試験後 15mΩ 以下</p> <p>(5) Shock / 衝撃</p> <p>A. Testing : Apply the following vibration to the mating connector in accordance with MIL-STD-202, Method 213, Condition B. During the testing, run 100mA DC to check electrical discontinuity.            Peak value of acceleration: 735m/s<sup>2</sup> (75G)            Duration : 11msec            Wave Form : half sinusoidal            Directions , cycle : 6 mutually perpendicular direction , 3 cycles about each direction</p> <p>B.Requirements            Appearance : Looseness between the parts, chipping, breakage or other abnormality shall not occur.            Electrical discontinuity : No electrical discontinuity grater than 1 micro-sec. shall occur.            Contact resistance of inner contact initial 20 milli-ohm MAX. after testing 25milli-ohm MAX.            Contact resistance of ground contact initial 10 milli-ohm MAX. after testing 15milli-ohm MAX.</p> <p>A.試験法: 嵌合状態のコネクタを、衝撃試験機に取り付け、下記の衝撃を加える。尚、試験中にDC100mAの電流を流して電氣的瞬断を確認する。MIN-STD-202 試験法 213 試験条件 B に準拠。            最大加速度: 735m/s<sup>2</sup>(75G)            標準持続時間: 11msec.            波形: 半波正弦波            方向: 直交する6方向、各3回</p> <p>B.必要条件            外観 : 部品のゆるみ、欠け、割れ、その他外観上の異常の無いこと。            電流瞬断 : 試験中、1 マイクロ秒を超える電氣的瞬断の無いこと。            中心導体接触抵抗 : 初期 20mΩ 以下、試験後 25mΩ 以下            外部導体接触抵抗 : 初期 10mΩ 以下、試験後 15mΩ 以下</p>		

DOCUMENT CLASSIFICATION	TITLE	No.
Product Specification 製品規格	MHF series micro coaxial connector	PRS-1176
<p>6-3-3 Environmental / 耐環境性</p> <p>(1) Thermal shock / 温度サイクル</p> <p>A. Testing : Apply the following environment to the mating connector .</p> <p>Temperature ,duration            :233K/30minutes→278~308K/5minutes MAX.→363K/30minutes→278~308K/5minutes MAX.            (-40°C) (5~35°C) (90°C) (5~35°C)</p> <p>No. of cycles : 5 cycles</p> <p>B.Requirements</p> <p>Appearance : Looseness between the parts, chipping, breakage or other abnormality shall not occur.            Contact resistance of inner contact initial 20 milli-ohm MAX. after testing 25milli-ohm MAX.            Contact resistance of ground contact initial 10 milli-ohm MAX. after testing 15milli-ohm MAX.            Insulation resistance : initial 500 mega-ohm MIN. after testing 100 mega-ohm MIN.</p> <p>A.試験法: 嵌合状態のコネクタを、下記の雰囲気中に設置する。            1サイクルの条件            :233K / 30分→278~308K / 5分以下→363K / 30分→278~308K / 5分以下            (-40°C) (5~35°C) (90°C) (5~35°C)            実施サイクル : 5サイクル</p> <p>B.必要条件 外観 : 部品のゆるみ、欠け、割れ、その他外観上の異常の無いこと。            中心導体接触抵抗 : 初期 20mΩ 以下, 試験後 25mΩ 以下            外部導体接触抵抗 : 初期 10mΩ 以下, 試験後 15mΩ 以下            絶縁抵抗 : 初期 500MΩ 以上 試験後 100MΩ 以上</p> <p>(2) Humidity / 湿度</p> <p>A. Testing : Apply the following environment to the mating connector in accordance with MIL-STD-202, Method 103, Condition B .</p> <p>Temperature : 313 ± 2 K (40 ± 2°C)            Humidity : 90~95%RH            Duration : 96 hours</p> <p>B.Requirements</p> <p>Appearance : Looseness between the parts, chipping, breakage or other abnormality shall not occur.            Contact resistance of inner contact initial 20 milli-ohm MAX. after testing 25milli-ohm MAX.            Contact resistance of ground contact initial 10 milli-ohm MAX. after testing 15milli-ohm MAX.            Insulation resistance : initial 500 mega-ohm MIN. after testing 100 mega-ohm MIN.</p> <p>A.試験法: 嵌合状態のコネクタを、下記の雰囲気中に設置する。MIL-STD-202 試験法 103 条件 B に準拠。            温度: 313 ± 2K (40 ± 2°C)            湿度: 90~95%RH            時間: 96時間</p> <p>B.必要条件 外観 : 部品のゆるみ、欠け、割れ、その他外観上の異常の無いこと。            中心導体接触抵抗 : 初期 20mΩ 以下, 試験後 25mΩ 以下            外部導体接触抵抗 : 初期 10mΩ 以下, 試験後 15mΩ 以下            絶縁抵抗 : 初期 500MΩ 以上 試験後 100MΩ 以上</p> <p>(3) Salt water spray / 塩水噴霧</p> <p>A. Testing : Apply the following environment to the mating connector in accordance with MIL-STD-202, Method 101, Condition B.</p> <p>Temperature : 308 ± 2 K (35 ± 2°C)            Salt water density by weight : 5 ± 1%            Duration : 48 hours</p> <p>B.Requirements : Appearance no abnormality adversely affecting the performance shall occur.</p>		

DOCUMENT CLASSIFICATION	TITLE	No.
Product Specification 製品規格	MHF series micro coaxial connector	PRS-1176

A.試験法: 嵌合状態のコネクタを、下記の雰囲気中に設置する。

温度 :  $308 \pm 2\text{K}$  ( $35 \pm 2^\circ\text{C}$ )

塩水濃度:  $5 \pm 1\%$  (重量比)

時間 : 48時間

B.必要条件 : 外観 著しい腐食の無い事。

#### 6-3-4 Solder / 半田付け関連

##### (1) Solderability / 半田付け性

A. Testing : Dip the solder tine of the contact in the solder bath at  $518 \pm 5$  ( $245 \pm 5^\circ\text{C}$ ) for  $5 \pm 0.5$  sec.

After immersing the tine in the flux of RMA or R type for 5 to 10 seconds in accordance with MIL-STD-202, Method 208.

B.Requirements : More than 95% of the dipped surface shall be evenly wet.

A.試験法: コネクタの半田付け部を  $518 \pm 5\text{K}$  ( $245 \pm 5^\circ\text{C}$ ) の半田槽内に  $5 \pm 0.5$  秒浸す。フラックスは、RMA 又は R 型を使用し 5~10 秒間浸すものとする。MIL-STD-202, 試験法 208 に準拠。

B.必要条件: 浸した面積の 95%以上に半田がむらなく付着すること。

##### (2) Reflow soldering heat resistance / 半田耐熱性

A. Testing : Put on the receptacle connector to PCB , apply the heat 2 cycles as shown in Fig: 4

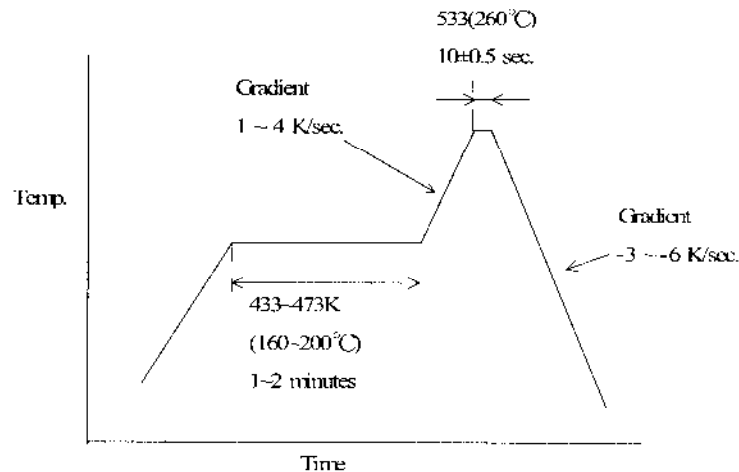


Fig.4

B.Requirements : Appearance no abnormality adversely affecting the performance shall occur.

A.試験法: 基板にリセプタクルコネクタを置き、Fig. 4の条件で2回リフローを行う。

B.必要条件: 機能を損なう変形及び欠陥の無い事。