



# FCC TEST REPORT

**REPORT NO.:** RF980108A01

**MODEL NO.:** ER-C2I

**RECEIVED:** Dec. 23, 2008

**TESTED:** Dec. 23, 2008 ~ Jan. 13, 2009

**ISSUED:** March 4, 2009

**APPLICANT:** ASUSTeK COMPUTER INC.

**ADDRESS:** NO. 15, LI-TE RD., PEITOU, TAIPEI, TAIWAN, R.O.C.

**ISSUED BY:** Bureau Veritas Consumer Products Services (H.K.) Ltd.,  
Taoyuan Branch

**LAB LOCATION:** No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang, Taipei  
Hsien, 244 Taiwan

This test report consists of 29 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



## Table of Contents

1.	CERTIFICATION.....	3
2.	SUMMARY OF TEST RESULTS.....	4
2.1	MEASUREMENT UNCERTAINTY.....	4
3.	GENERAL INFORMATION .....	5
3.1	GENERAL DESCRIPTION OF EUT .....	5
3.2	DESCRIPTION OF TEST MODES.....	6
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST .....	6
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL: .....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	8
3.4	DESCRIPTION OF SUPPORT UNITS .....	8
4.	TEST TYPES AND RESULTS.....	9
4.1	CONDUCTED EMISSION MEASUREMENT .....	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	9
4.1.2	TEST INSTRUMENTS .....	10
4.1.3	TEST PROCEDURES .....	10
4.1.4	DEVIATION FROM TEST STANDARD .....	11
4.1.5	TEST SETUP .....	11
4.1.6	EUT OPERATING CONDITIONS .....	12
4.1.7	TEST RESULTS.....	13
4.2	RADIATED EMISSION MEASUREMENT .....	15
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	15
4.2.2	TEST INSTRUMENTS .....	16
4.2.3	TEST PROCEDURES.....	17
4.2.4	DEVIATION FROM TEST STANDARD .....	17
4.2.5	TEST SETUP .....	18
4.2.6	EUT OPERATING CONDITIONS .....	18
4.2.7	TEST RESULTS.....	19
4.3	BAND EDGES MEASUREMENT .....	24
4.3.1	LIMITS OF BAND EDGES MEASUREMENT.....	24
4.3.2	TEST INSTRUMENTS .....	24
4.3.3	TEST PROCEDURE .....	24
4.3.4	DEVIATION FROM TEST STANDARD .....	24
4.3.5	EUT OPERATING CONDITION .....	24
4.3.6	TEST RESULTS.....	24
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	27
6.	INFORMATION ON THE TESTING LABORATORIES .....	28
7.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	29



## 1. CERTIFICATION

**PRODUCT:** receiver  
**BRAND NAME:** ASUS  
**MODEL NO.:** ER-C2I  
**APPLICANT:** ASUSTeK COMPUTER INC.  
**TESTED:** Dec. 23, 2008 ~ Jan. 13, 2009  
**TEST SAMPLE:** ENGINEERING SAMPLE  
**STANDARDS:** FCC Part 15, Subpart C (Section 15.249)  
ANSI C63.4-2003

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Celia Chen , **DATE:** March 4, 2009  
( Celia Chen / Senior Specialist )

**TECHNICAL ACCEPTANCE :** Jamison Chan , **DATE:** March 4, 2009  
Responsible for RF ( Jamison Chan / Supervisor )

**APPROVED BY :** Ken Liu , **DATE:** March 4, 2009  
( Ken Liu / Assistant Manager )



## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.249)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	Conducted Emission Test	PASS	Minimum passing margin is -16.72dB at 0.181MHz
15.209 15.249 15.249 (d)	Radiated Emission Test Band Edge Measurement Limit: 50dB less than the peak value of fundamental frequency or meet radiated emission limit in section 12.209	PASS	Minimum passing margin is -2.41dB at 2483.500MHz

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz ~ 30MHz	2.44 dB
Radiated emissions	30MHz ~ 1GHz	3.72 dB
	1GHz ~ 40GHz	2.89 dB

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>EUT</b>	receiver
<b>MODEL NO.</b>	ER-C2I
<b>FCC ID</b>	MSQER-C2I
<b>POWER SUPPLY</b>	5Vdc from host equipment
<b>MODULATION TECHNOLOGY</b>	DSSS
<b>OPERATING FREQUENCY</b>	2402MHz ~ 2478MHz
<b>NUMBER OF CHANNEL</b>	77
<b>ANTENNA TYPE</b>	Strip antenna with 1.84dBi gain
<b>DATA CABLE</b>	N/A
<b>I/O PORTS</b>	N/A
<b>ASSOCIATED DEVICES</b>	N/A

**NOTE:**


1. The EUT is a transceiver.
2. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

77 channels are provided to this EUT:

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459		
18	2420	38	2440	58	2460		
19	2421	39	2441	59	2461		

#### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

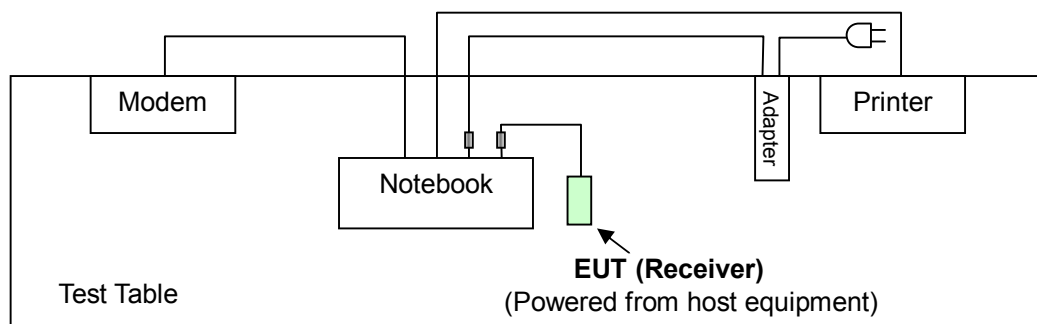

### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	BM	
-	√	√	√	√	-

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz  
 RE≥1G: Radiated Emission above 1GHz BM: Bandedge Measurement

#### **POWER LINE CONDUCTED EMISSION TEST:**

- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
0 to 76	0	DSSS

#### **RADIATED EMISSION TEST (BELOW 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ Axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	AXIS
0 to 76	0	DSSS	X

#### **RADIATED EMISSION TEST (ABOVE 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ Axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	AXIS
0 to 76	0, 38, 76	DSSS	X

#### **BANDEDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
0 to 76	0, 76	DSSS

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. (15.249)**

**ANSI C63.4-2003**

All test items have been performed and recorded as per the above standards.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	20375526736	FCC DoC Approved
2	PRINTER	EPSON	LQ-300+	DCGY017054	FCC DoC Approved
3	MODEM	ACEEX	1414	980020520	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A
2	1.8m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

**NOTE:** (1) All power cords of the above support units are non-shielded (1.8m).  
 (2) One USB cable (14cm with one ferrite core) was provided by client, which was connected from EUT to support unit 1.



## 4. TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

## 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	838251/021	Dec. 20, 2008	Dec. 19, 2009
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100218	Nov. 26, 2008	Nov. 25, 2009
LISN With Adapter (for EUT)	AD10	C10Ada-001	Nov. 26, 2008	Nov. 25, 2009
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100219	Nov. 20, 2008	Nov. 19, 2009
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100220	Nov. 05, 2008	Nov. 04, 2009
Software	ADT_Cond_V7.3.6	NA	NA	NA
Software	ADT_ISN_V7.3.6	NA	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	Feb. 27, 2008	Feb. 26, 2009
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Feb. 14, 2008	Feb. 13, 2009

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in Shielded Room No. 10.
  3. The VCCI Site Registration No. C-1852.


## 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under limit - 20dB was not recorded.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.1.5 TEST SETUP

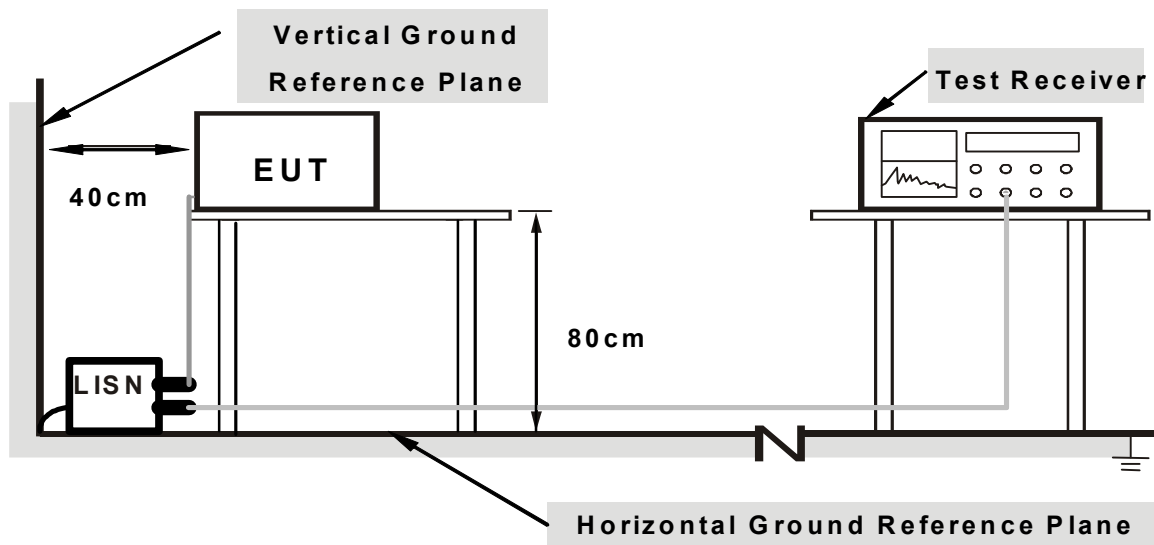

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT to a notebook placed on a testing table.
- b. The notebook ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The notebook sent "H" messages to its screen.
- d. The notebook sent messages to printer and the printer printed them out
- e. The notebook sent messages to modem.
- f. Repeated c ~ f.




### 4.1.7 TEST RESULTS

#### CONDUCTED WORST CASE DATA

<b>CHANNEL</b>	0	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line 1
<b>ENVIRONMENTAL CONDITIONS</b>	16deg. C, 52% RH, 1010hPa	<b>TESTED BY</b>	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.20	47.51	-	47.71	-	64.43	54.43	-16.72	-
2	0.240	0.22	41.77	-	41.99	-	62.10	52.10	-20.11	-
3	0.302	0.22	35.82	-	36.04	-	60.18	50.18	-24.14	-
4	1.676	0.27	34.82	-	35.09	-	56.00	46.00	-20.91	-
5	3.355	0.33	35.76	-	36.09	-	56.00	46.00	-19.91	-
6	21.211	1.43	26.57	-	28.00	-	60.00	50.00	-32.00	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

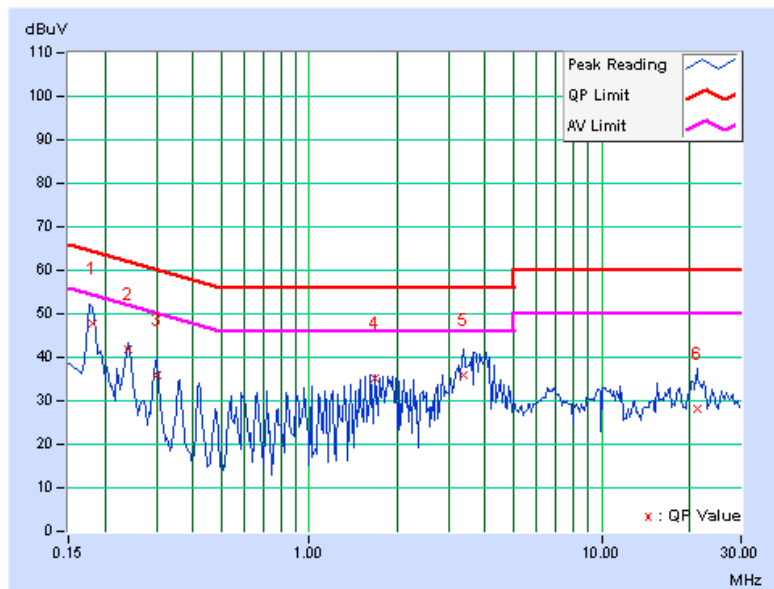




A D T

<b>CHANNEL</b>	0	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line 2
<b>ENVIRONMENTAL CONDITIONS</b>	16deg. C, 52% RH, 1010hPa	<b>TESTED BY</b>	Jamison Chan

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.194	0.18	25.60	-	25.78	-	63.84
2	0.255	0.19	26.00	-	26.19	-	61.59	51.59	-35.39	-
3	0.315	0.20	27.86	-	28.06	-	59.84	49.84	-31.78	-
4	0.914	0.22	33.95	-	34.17	-	56.00	46.00	-21.83	-
5	3.919	0.31	25.94	-	26.25	-	56.00	46.00	-29.75	-
6	20.508	1.07	25.79	-	26.86	-	60.00	50.00	-33.14	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

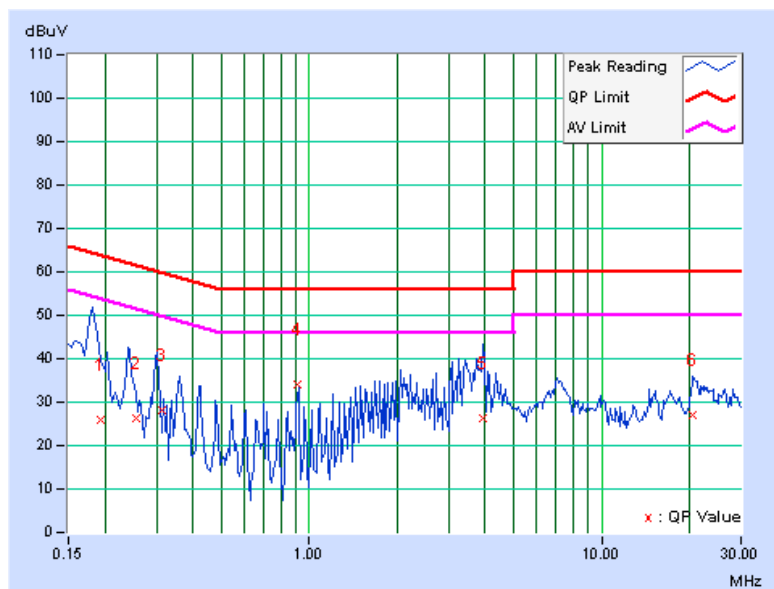

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209, 15.249 as following:

<b>15.209 Limit</b>		
<b>Frequencies (MHz)</b>	<b>Field strength (microvolts/meter)</b>	<b>Measurement distance (meters)</b>
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3
<b>15.249 Limit</b>		
<b>Fundamental Frequency</b>	<b>Field Strength of Fundamental (millivolts/meter)</b>	<b>Field Strength of Harmonics (microvolts/meter)</b>
902 ~ 928 MHz	50	500
2400 ~ 2483.5 MHz	50	500
5725 ~ 5875 MHz	50	500
24 ~ 24.25 GHz	250	2500

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



## 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	May 09, 2008	May 08, 2009
HP Preamplifier	8449B	3008A01924	Sep. 03, 2008	Sep. 02, 2009
HP Preamplifier	8449B	3008A01292	Aug. 06, 2008	Aug. 05, 2009
ROHDE & SCHWARZ TEST RECEIVER	ESI7	836697/012	Dec. 04, 2008	Dec. 03, 2009
Schwarzbeck Antenna	VULB 9168	137	May 02, 2008	May 01, 2009
Schwarzbeck Antenna	VHBA 9123	480	Apr. 23, 2008	Apr. 22, 2009
EMCO Horn Antenna	3115	6714	Oct. 17, 2008	Oct. 16, 2009
EMCO Horn Antenna	3115	9312-4192	Apr. 21, 2008	Apr. 20, 2009
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	ADT_Radiated_V 7.6.15.9.2	NA	NA	NA
SUHNER RF cable	SF104-26.5	CABLE-CH6-17m -01	Aug. 22, 2008	Aug. 21, 2009
ROHDE & SCHWARZ Spectrum Analyzer	FSP 40	100035	Mar. 26, 2008	Mar. 25, 2009

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
  2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  3. The test was performed in Chamber No. 6.
  4. The Industry Canada Reference No. IC 7450E-6.
  5. The FCC Site Registration No. is 447212.



### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.


#### NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

## 4.2.5 TEST SETUP

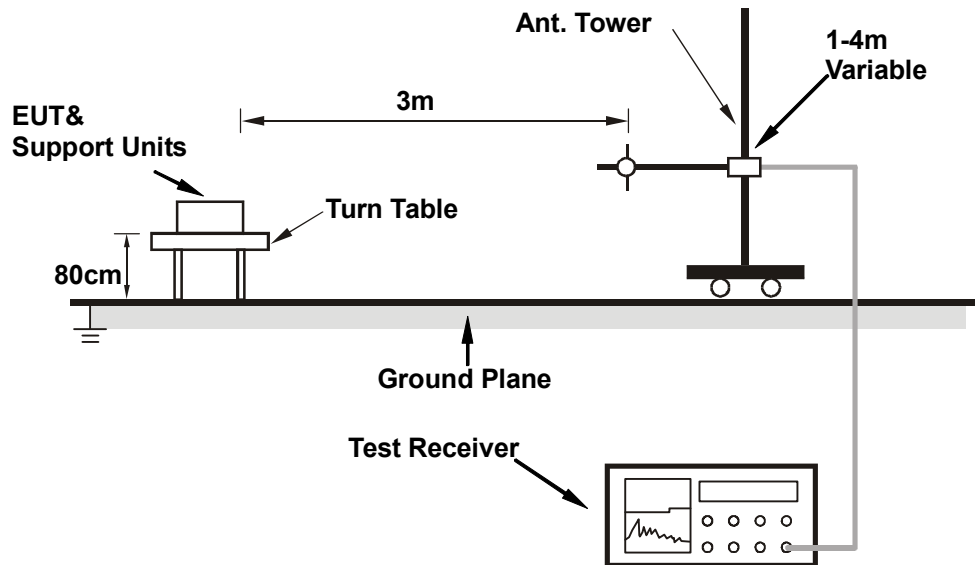

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 4.2.6 EUT OPERATING CONDITIONS

Set the EUT under transmission condition continuously at specific channel frequency.

## 4.2.7 TEST RESULTS

### RADIATED WORST CASE DATA: BELOW 1GHz

<b>CHANNEL</b>	0	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	19deg. C, 78% RH, 1008hPa	<b>TESTED BY</b>	Chad Lee

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.663	29.25 QP	40.00	-10.75	1.08 H	193	9.85	19.40
2	129.138	35.14 QP	43.50	-8.36	1.13 H	286	17.62	17.52
3	216.069	32.08 QP	46.00	-13.92	1.00 H	310	16.12	15.96
4	261.323	37.20 QP	46.00	-8.80	1.00 H	319	18.91	18.29
5	801.723	35.70 QP	46.00	-10.30	1.00 H	292	7.93	27.77
6	861.984	37.05 QP	46.00	-8.95	1.05 H	10	8.69	28.36

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	90.261	31.51 QP	43.50	-11.99	1.00 V	193	17.48	14.02
2	123.307	36.18 QP	43.50	-7.32	1.08 V	106	18.86	17.32
3	129.138	32.32 QP	43.50	-11.18	1.00 V	346	14.80	17.52
4	255.491	34.20 QP	46.00	-11.80	1.14 V	10	15.96	18.24
5	731.743	36.33 QP	46.00	-9.67	1.54 V	301	10.12	26.21
6	865.872	34.11 QP	46.00	-11.89	1.07 V	34	5.71	28.40

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  - 3The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



A D T

**RADIATED DATA: ABOVE 1GHz**

<b>CHANNEL</b>	0	<b>FREQUENCY RANGE</b>	1 ~ 25GHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	19deg. C, 78% RH, 1008hPa	<b>TESTED BY</b>	Chad Lee

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1602.000	49.53 PK	74.00	-24.47	1.00 H	91	17.90	31.63
2	1602.000	39.73 AV	54.00	-14.27	1.00 H	91	8.10	31.63
3	2390.000	65.50 PK	74.00	-8.50	1.05 H	95	31.76	33.73
4	2390.000	43.88 AV	54.00	-10.12	1.05 H	95	10.15	33.73
5	*2402.000	100.23 PK	114.00	-13.77	1.05 H	96	66.45	33.78
6	*2402.000	78.61 AV	94.00	-15.39	1.05 H	96	44.83	33.78
7	4804.000	50.17 PK	74.00	-23.83	1.15 H	317	9.36	40.81
8	4804.000	28.55 AV	54.00	-25.45	1.15 H	317	-12.26	40.81

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1602.000	48.00 PK	74.00	-26.00	1.00 V	273	16.37	31.63
2	1602.000	36.50 AV	54.00	-17.50	1.00 V	273	4.87	31.63
3	2390.000	60.47 PK	74.00	-13.53	1.00 V	27	26.74	33.73
4	2390.000	38.85 AV	54.00	-15.15	1.00 V	27	5.12	33.73
5	*2402.000	91.91 PK	114.00	-22.09	1.00 V	27	58.13	33.78
6	*2402.000	70.29 AV	94.00	-23.71	1.00 V	27	36.51	33.78
7	4804.000	55.28 PK	74.00	-18.72	1.00 V	201	14.47	40.81
8	4804.000	33.66 AV	54.00	-20.34	1.00 V	201	-7.15	40.81

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “ : Fundamental frequency
6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:

$$20\log(\text{Duty cycle}) = 20\log \frac{0.68 \text{ ms}}{8.2 \text{ ms}} = -21.62\text{dB}$$

Please see page 23 for plotted duty.



A D T

<b>CHANNEL</b>	38	<b>FREQUENCY RANGE</b>	1 ~ 25GHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	19deg. C, 78% RH, 1008hPa	<b>TESTED BY</b>	Chad Lee

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1626.000	50.19 PK	74.00	-23.81	1.00 H	253	18.54	31.65
2	1626.000	40.55 AV	54.00	-13.45	1.00 H	253	8.90	31.65
3	*2440.000	99.23 PK	114.00	-14.77	1.05 H	96	65.33	33.90
4	*2440.000	77.61 AV	94.00	-16.39	1.05 H	96	43.71	33.90
5	4880.000	50.34 PK	74.00	-23.66	1.00 H	40	9.35	40.99
6	4880.000	28.72 AV	54.00	-25.28	1.00 H	40	-12.27	40.99

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1626.000	46.39 PK	74.00	-27.61	1.00 V	274	14.74	31.65
2	1626.000	36.34 AV	54.00	-17.66	1.00 V	274	4.69	31.65
3	*2440.000	91.03 PK	114.00	-22.97	1.25 V	15	57.13	33.90
4	*2440.000	69.41 AV	94.00	-24.59	1.25 V	15	35.51	33.90
5	4880.000	56.13 PK	74.00	-17.87	1.00 V	104	15.14	40.99
6	4880.000	34.51 AV	54.00	-19.49	1.00 V	104	-6.48	40.99

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ \* “ : Fundamental frequency
6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:

$$20\log(\text{Duty cycle}) = 20\log \frac{0.68 \text{ ms}}{8.2 \text{ ms}} = -21.62\text{dB}$$

Please see page 23 for plotted duty.



A D T

<b>CHANNEL</b>	76	<b>FREQUENCY RANGE</b>	1 ~ 25GHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	19deg. C, 78% RH, 1008hPa	<b>TESTED BY</b>	Chad Lee

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1652.000	50.65 PK	74.00	-23.35	1.00 H	254	18.98	31.67
2	1652.000	41.73 AV	54.00	-12.27	1.00 H	254	10.06	31.67
3	*2478.000	98.43 PK	114.00	-15.57	1.05 H	96	64.41	34.02
4	*2478.000	76.81 AV	94.00	-17.19	1.05 H	96	42.79	34.02
<b>5</b>	<b>2483.500</b>	<b>71.59 PK</b>	<b>74.00</b>	<b>-2.41</b>	<b>1.05 H</b>	<b>96</b>	<b>37.55</b>	<b>34.04</b>
6	2483.500	49.97 AV	54.00	-4.03	1.05 H	96	15.93	34.04
7	4956.000	52.08 PK	74.00	-21.92	1.02 H	24	10.91	41.17
8	4956.000	30.46 AV	54.00	-23.54	1.02 H	24	-10.71	41.17

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1652.000	46.38 PK	74.00	-27.62	1.00 V	276	14.71	31.67
2	1652.000	36.54 AV	54.00	-17.46	1.00 V	276	4.87	31.67
3	*2478.000	88.85 PK	114.00	-25.15	1.00 V	273	54.83	34.02
4	*2478.000	67.23 AV	94.00	-26.77	1.00 V	273	33.21	34.02
5	2483.500	63.07 PK	74.00	-10.93	1.00 V	273	29.03	34.04
6	2483.500	41.45 AV	54.00	-12.55	1.00 V	273	7.41	34.04
7	4956.000	58.20 PK	74.00	-15.80	1.00 V	104	17.03	41.17
8	4956.000	36.58 AV	54.00	-17.42	1.00 V	104	-4.59	41.17

**REMARKS:**

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* " : Fundamental frequency
6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:

$$20\log(\text{Duty cycle}) = 20\log \frac{0.68 \text{ ms}}{8.2 \text{ ms}} = -21.62\text{dB}$$


Please see page 23 for plotted duty.



A D T



RBW 100 kHz Delta 2 [ T1 ]  
 \*VBW 300 kHz 2.88 dB  
 Ref 10 dBm \*Att 20 dB SWT 20 ms 8.200000 ms

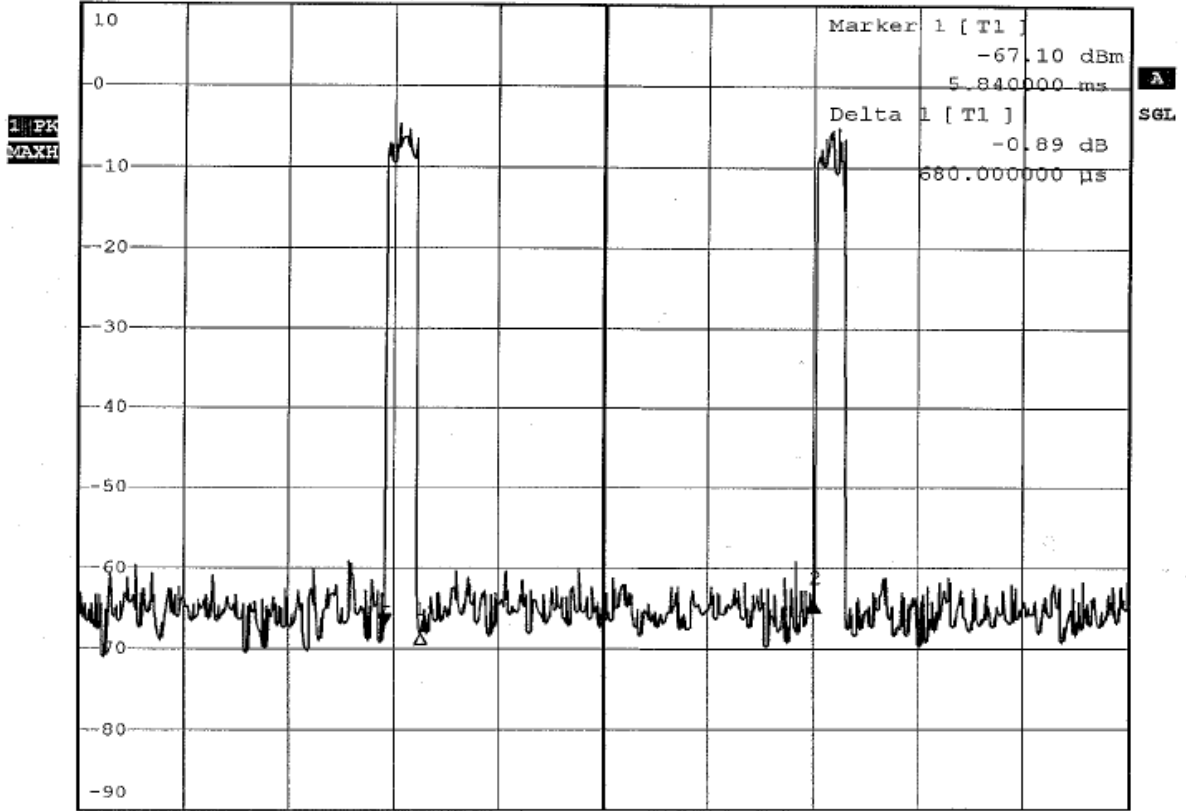

Center 2.402 GHz 2 ms/

$$20\log(\text{Duty cycle}) = 20\log \frac{0.68 \text{ ms}}{8.2 \text{ ms}} = -21.62\text{dB}$$

### 4.3 BAND EDGES MEASUREMENT

#### 4.3.1 LIMITS OF BAND EDGES MEASUREMENT

Below –50dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

#### 4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100035	Mar. 26, 2008	Mar. 25, 2009

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots are attached on the following pages.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 EUT OPERATING CONDITION

Same as Item 4.2.6


#### 4.3.6 TEST RESULTS

The spectrum plots are attached on the following 4 images. D1 line indicates the highest level, and D2 line indicates the 50dB offset below D1. It shows compliance with the requirement in part 15.249(d).






A D T

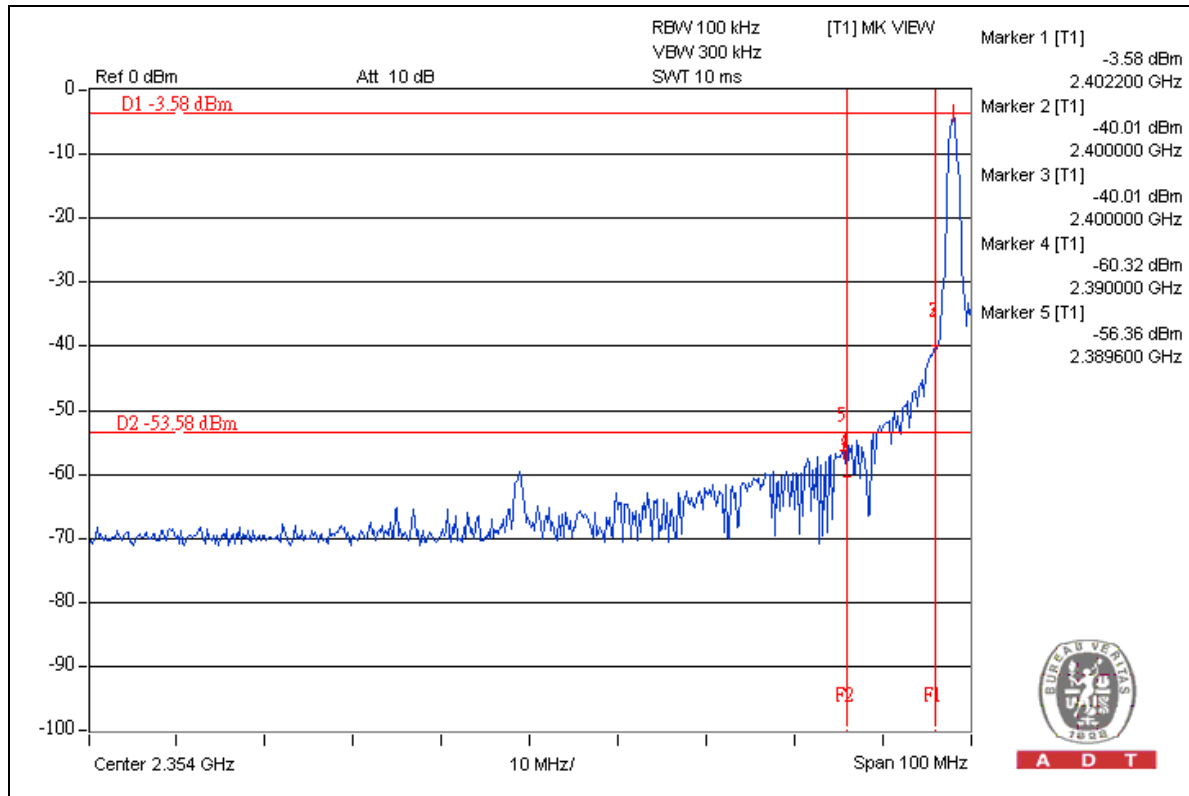



A D T

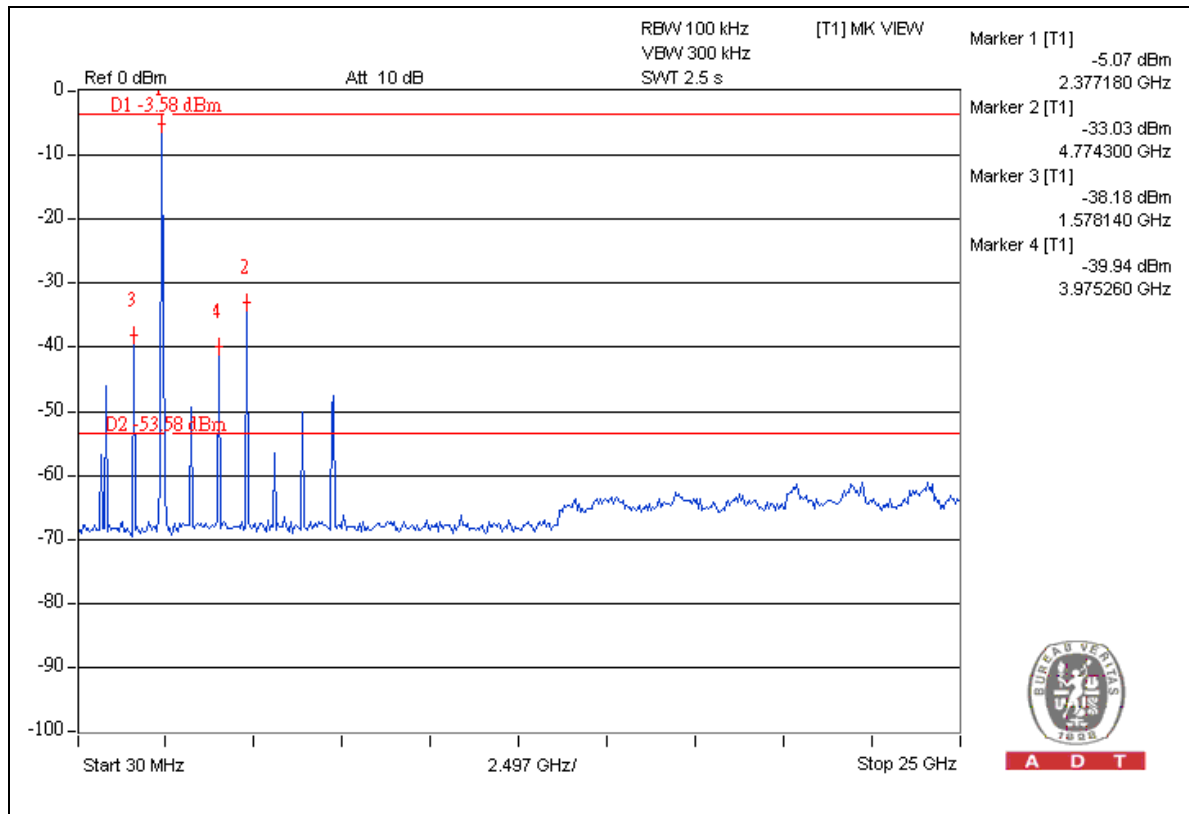

A D T



A D T

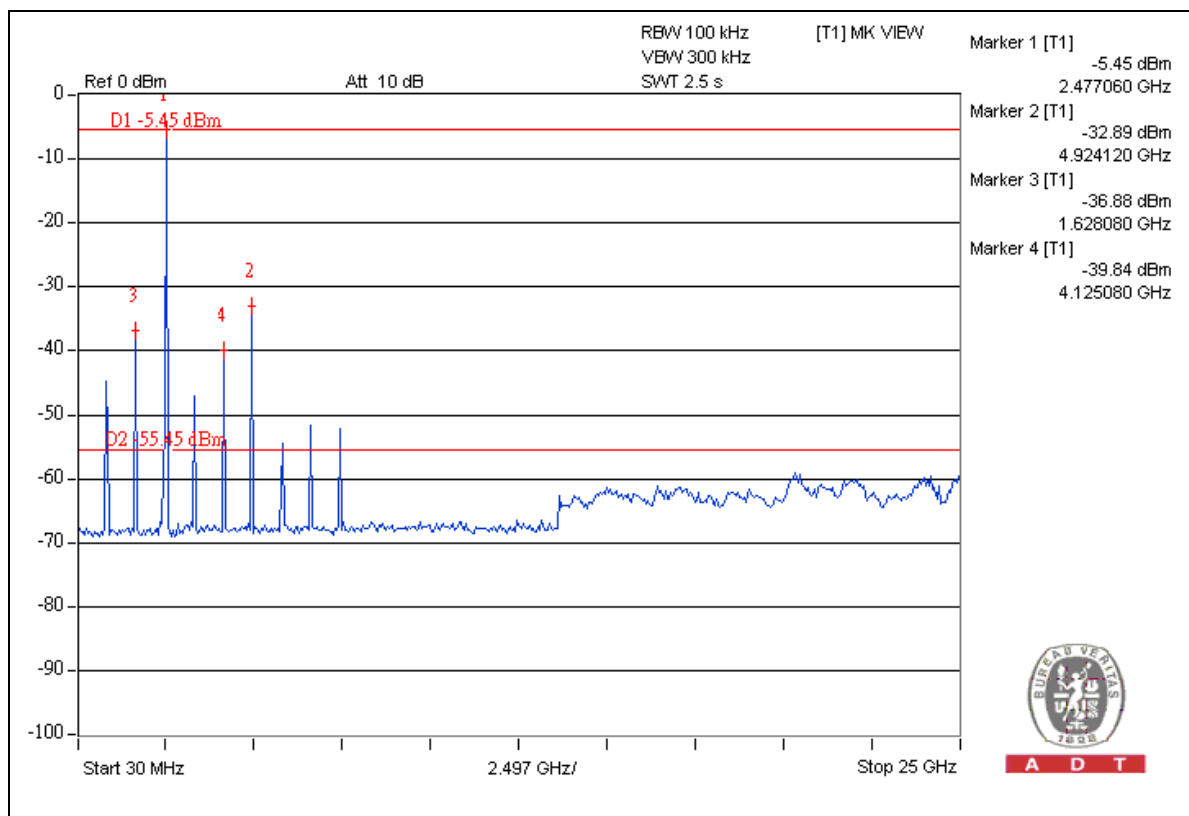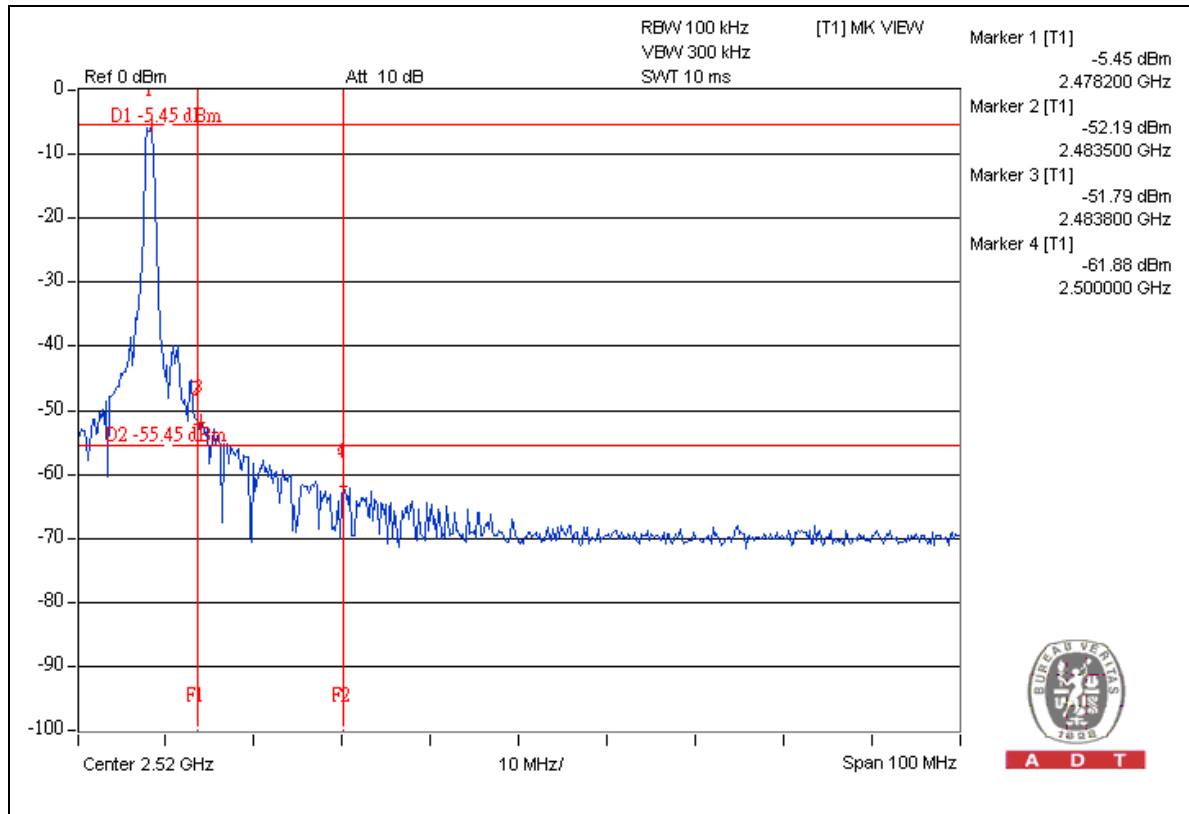

## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

## 6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>USA</b>	FCC, NVLAP
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA, CSA
<b>R.O.C.</b>	TAF, BSMI, NCC
<b>Netherlands</b>	Telefication
<b>Singapore</b>	GOST-ASIA(MOU)
<b>Russia</b>	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).  
If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**  
Tel: 886-2-26052180  
Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**  
Tel: 886-3-5935343  
Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Telecom Lab:**  
Tel: 886-3-3183232  
Fax: 886-3-3185050

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also



A D T

## **7. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**---END---**