

## Partial FCC Test Report

### (PART 24)

**Report No.:** RFBFLF-WTW-P21070538F-1

**FCC ID:** MSQFM350GL

**Test Model:** FM350-GL

**Received Date:** Dec. 28, 2022

**Test Date:** Dec. 30, 2022 ~ Jan. 03, 2023

**Issued Date:** Mar. 08, 2023

**Applicant:** ASUSTeK COMPUTER INC.

**Address:** 1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 Summary of Test Results.....</b>	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments .....	6
<b>3 General Information .....</b>	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Configuration of System under Test.....	9
3.2.1 Description of Support Units.....	9
3.3 Test Mode Applicability and Tested Channel Detail .....	10
3.4 EUT Operating Conditions .....	11
3.5 General Description of Applied Standards and references.....	11
<b>4 Test Types and Results .....</b>	<b>12</b>
4.1 Radiated Emission Measurement.....	12
4.1.1 Limits of Radiated Emission Measurement .....	12
4.1.2 Test Procedure .....	12
4.1.3 Deviation from Test Standard .....	12
4.1.4 Test Setup.....	13
4.1.5 Test Results .....	14
<b>5 Pictures of Test Arrangements.....</b>	<b>27</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>28</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBFLF-WTW-P21070538F-1	Original Release	Mar. 08, 2023

## 1 Certificate of Conformity

**Product:** 5G Module  
**Brand:** Fibocom Wireless Inc  
**Test Model:** FM350-GL  
**Sample Status:** Engineering Sample  
**Applicant:** ASUSTeK COMPUTER INC.  
**Test Date:** Dec. 30, 2022 ~ Jan. 03, 2023  
**Standards:** FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Lena Wang , Date: Mar. 08, 2023  
Lena Wang / Specialist

Approved by : Jeremy Lin , Date: Mar. 08, 2023  
Jeremy Lin / Project Engineer

## 2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Equivalent Isotropic Radiated Power	N/A	Refer to Note
2.1047	Modulation Characteristics	N/A	Refer to Note
24.232(d)	Peak to Average Ratio	N/A	Refer to Note
2.1055 24.235	Frequency Stability	N/A	Refer to Note
2.1049	Occupied Bandwidth	N/A	Refer to Note
24.238	Band Edge Measurements	N/A	Refer to Note
2.1051 24.238	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -32.56 dB at 78.50 MHz.

### Note:

1. This report is a partial report, only test items of Radiated Spurious Emissions tests was performed. Other testing data please refer to Sporton report no.: FG051802A\_R01, FG051802B\_R01, FG051802G\_R01, FG051802H\_R01 for module (Brand: Fibocom, Model: FM350-GL).
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	2.44 dB
	30 MHz ~ 200 MHz	2.95 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower & Turn Max-Full	MFA-440H	AT93021705	NA	NA
Turn Table Max-Full	MFT-201SS	NA	NA	NA
Turn Table Controller Max-Full	MG-7802	NA	NA	NA
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 27, 2022	Apr. 26, 2023
Signal Analyzer Agilent	N9010A	MY52220207	Jan. 06, 2022	Jan. 05, 2023
Loop Antenna TESEQ	HLA 6121	45745	Jul. 27, 2022	Jul. 26, 2023
Loop Antenna EMCI	EM-6879	269	Sep. 19, 2022	Sep. 18, 2023
Pre-amplifier EMCI	EMC001340	980201	Sep. 23, 2022	Sep. 22, 2023
RF Coaxial Cable EMCI	5D-NM-BM	140903+140902	Jan. 15, 2022	Jan. 14, 2023
Pre-Amplifier EMCI	EMC 330H	980112	Oct. 01, 2022	Sep. 30, 2023
Bi_Log Antenna Schwarzbeck	VULB9168	9168-472	Oct. 21, 2022	Oct. 20, 2023
RF Coaxial Cable WORKEN	8D-FB	Cable-Ch10-01	Oct. 01, 2022	Sep. 30, 2023
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-969	Nov. 13, 2022	Nov. 12, 2023
Pre-Amplifier EMCI	EMC 012645	980115	Oct. 01, 2022	Sep. 30, 2023
RF Coaxial Cable EMCI	EMC104-SM-SM- 8000+3000	171005	Oct. 01, 2022	Sep. 30, 2023
RF Coaxial Cable HUBER SUHNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	Oct. 01, 2022	Sep. 30, 2023
RF FLITER MICRO-TRONICS	BRM50716	060	Jan. 10, 2022	Jan. 09, 2023
RF FLITER MICRO-TRONICS	BRM17690	004	Jan. 10, 2022	Jan. 09, 2023
Boresight antenna tower fixture BV	BAF-02	7	NA	NA
Radio Communication Analyzer Anritsu	MT8821C	6201462755	Mar. 03, 2022	Mar. 02, 2023
Pre-Amplifier EMCI	EMC 184045	980116	Oct. 01, 2022	Sep. 30, 2023
Horn Antenna Schwarzbeck	BBHA 9170	148	Nov. 13, 2022	Nov. 12, 2023
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	Jul. 09, 2022	Jul. 08, 2023
RF Coaxial Cable EMCI	EMC102-KM-KM- 3000	150929	Jul. 09, 2022	Jul. 08, 2023

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HY - 966 chamber 5.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	5G Module	
<b>Brand</b>	Fibocom Wireless Inc	
<b>Test Model</b>	FM350-GL	
<b>Status of EUT</b>	Engineering Sample	
<b>Power Supply Rating</b>	11.61 Vdc (Battery) 5 Vdc / 9Vdc / 15Vdc / 20Vdc (Adapter)	
<b>Modulation Type</b>	WCDMA	QPSK
	LTE	QPSK, 16QAM, 64QAM, 256QAM
	5G NR	$\pi/2$ BPSK, QPSK, 16QAM, 64QAM, 256QAM
<b>Frequency Range</b>	WCDMA	1852.4 ~ 1907.6 MHz
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1909.3 MHz
	LTE Band 2 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1908.5 MHz
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1907.5 MHz
	LTE Band 2 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1905.0 MHz
	LTE Band 2 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1902.5 MHz
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1900.0 MHz
	LTE Band 25 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1914.3 MHz
	LTE Band 25 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1913.5 MHz
	LTE Band 25 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1912.5 MHz
	LTE Band 25 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1910.0 MHz
	LTE Band 25 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1907.5 MHz
	LTE Band 25 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1905.0 MHz
	n2 (Channel Bandwidth 5MHz)	1852.5MHz ~ 1907.5MHz
	n2 (Channel Bandwidth 10MHz)	1855.0MHz ~ 1905.0MHz
	n2 (Channel Bandwidth 15MHz)	1857.5MHz ~ 1902.5MHz
	n2 (Channel Bandwidth 20MHz)	1860.0MHz ~ 1900.0MHz
	n25 (Channel Bandwidth 5MHz)	1852.5MHz ~ 1912.5MHz
	n25 (Channel Bandwidth 10MHz)	1855.0MHz ~ 1910.0MHz
	n25 (Channel Bandwidth 15MHz)	1857.5MHz ~ 1907.5MHz
n25 (Channel Bandwidth 20MHz)	1860.0MHz ~ 1905.0MHz	
<b>Antenna Type</b>	Refer to Note as below	
<b>Tx / Rx Function</b>	2Tx / 4Rx	

Note:

1. The EUT is authorized for use in specific End-product. Please refer to below for more details.

Product Name	Brand	Model	Difference
Notebook PC/Expertbook	ASUS	B7402FB	For marketing purpose
		B7402F	
		B7402FV	
		B7402FVA	
		B7402FVAT	

2. The antenna information is listed as below.

WWAN Antenna								
Ant. Type	Couple							
Band	NB				Tablet			
	Antenna Peak Gain (dBi)							
	Ant 0 (TX/RX)	Ant 1 (RX)	Ant 2 (TX/RX)	Ant 3 (RX)	Ant 0 (TX/RX)	Ant 1 (RX)	Ant 2 (TX/RX)	Ant 3 (RX)
WCDMA II / LTE 2 / 5G NR n2	1.96	1.51	1.82	1.96	-1.18	1.92	0.93	-1.73
WCDMA IV / LTE 4	1.89	1.57	1.84	1.87	1.22	1.95	0.48	-0.24
WCDMA V / LTE 5 / 5G NR n5	-0.42	-	-	-0.36	-3.96	-	-	-2.49
LTE 7 / 5G NR n7	1.97	1.61	1.79	1.83	0.29	1.94	1.99	0.79
LTE 12	0.88	-	-	-0.86	-1.05	-	-	-4.13
LTE 13	1.95	-	-	1.99	0.23	-	-	-1.81
LTE 14	1.90	-	-	1.81	-0.78	-	-	-1.95
LTE 17	0.88	-	-	-0.86	-1.05	-	-	-4.13
LTE 25 / 5G NR n25	1.93	1.77	1.82	1.97	-1.04	1.92	0.93	-1.69
LTE 26	-0.03	-	-	-0.22	-3.72	-	-	-2.49
LTE 30 / 5G NR n30	1.80	1.27	1.83	1.96	0.49	1.33	0.71	1.63
LTE 38 / 5G NR n38	1.31	1.55	1.88	1.81	0.8	1.96	1.94	-0.46
LTE 41 / 5G NR n41	1.97	1.98	1.50	1.84	1.82	1.84	1.86	1.96
LTE 48	1.90	1.89	1.73	1.91	1.84	1.77	1.82	1.83
LTE 66 / 5G NR n66	1.94	1.75	1.85	1.85	1.22	1.99	0.51	-0.44
5G NR n77	1.98	1.91	1.87	1.97	1.80	1.89	1.92	1.90
5G NR n78	1.98	1.75	1.87	1.91	1.98	1.89	1.82	1.93

\*The max antenna gain was chosen for final test.


3. Detail antenna specification please refer to antenna datasheet.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.



### 3.2 Configuration of System under Test

#### <Radiated Emission Test>

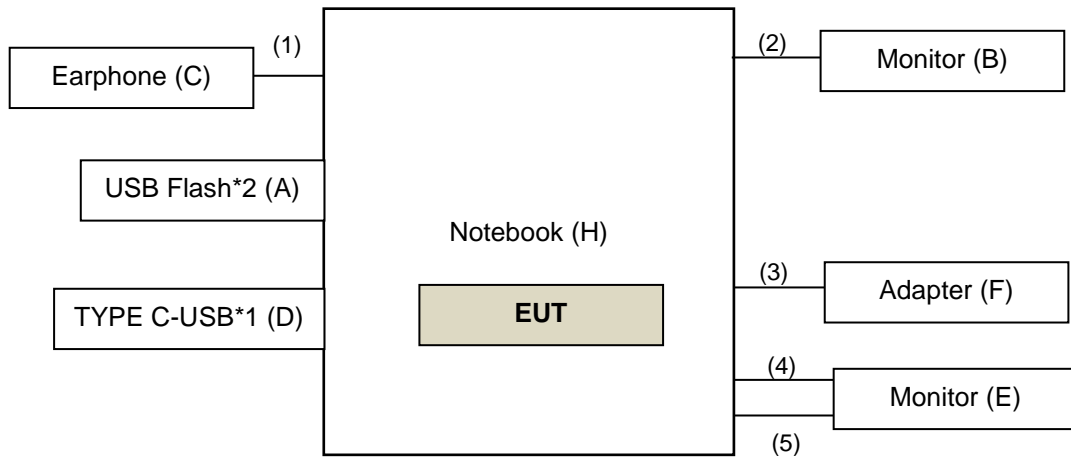

Under Table

Remote Site

Radio Communication  
Analyzer (G)

#### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	USB*2	TRANSCEND	USB3.0 32GB	N/A	N/A	Provided by Lab
B	Monitor	Dell	A14S2421HSXmTW	CN-01KFWF-WSL00-24C-711B	N/A	Provided by Lab
C	Earphone	HTC	HTC_MAX320	N/A	N/A	Provided by Lab
D	TYPE C-USB*1	SanDisk	SDDDC3-032G	N/A	N/A	Provided by Lab
E	Monitor	Dell	A14S2421HSXmTW	CN-01KFWF-WSL00-24C-714B	N/A	Provided by Lab
F	Adapter	CHICONY	A19-065N3A	N/A	N/A	Accessory of the EUT
G	Radio Communication Analyzer	Anritsu	MT8821C	6201462755	NA	Provided by Lab
H	Notebook	ASUS	B7402FV	NA	NA	Provided by client

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Audio for Earphone Cable	1	1.2	N	0	Provided by Lab
2.	HDMI Cable	1	1.8	Y	0	Provided by Lab
3.	Adapter Cable	1	1.6	Y	0	Accessory of the EUT
4.	Mini DP TO DP Cable	1	1.5	Y	0	Provided by Lab
5.	Micro HDMI TO HDMI Cable	1	1.5	Y	0	Provided by Lab

### 3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis of Tablet Mode and NB Mode, and antenna ports.

The worst case was found when positioned on NB Mode. Following channel(s) was (were) selected for the final test as listed below:

#### WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	Radiated Emission	9262 to 9538	9400	WCDMA

#### LTE Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Radiated Emission	18700 to 19100	18900	20 MHz	QPSK	1 RB / 0 RB Offset

#### LTE Band 25

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Radiated Emission	26140 to 26590	26365	20 MHz	QPSK	1 RB / 0 RB Offset

#### NR Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Radiated Emission	372000 to 380000	376000	20MHz	QPSK	1 RB / 1 RB Offset

#### NR Band 25

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Radiated Emission	372000 to 381000	376500	20MHz	QPSK	1 RB / 1 RB Offset

#### Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
Radiated Emission	24 deg. C, 66 % RH	120 Vac, 60 Hz	Thomas Cheng, Vincent Chen

### **3.4 EUT Operating Conditions**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### **3.5 General Description of Applied Standards and references**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test Standard:**

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**ANSI 63.26-2015**

**NOTE:** All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**ANSI/TIA/EIA-603-E 2016**

**NOTE:** All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Radiated Emission Measurement

#### 4.1.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit is equal to -13 dBm.

#### 4.1.2 Test Procedure

- a. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7  
EIRP (dBm) =  $E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$ ; where D is the measurement distance (in the far field region) in m.  
ERP (dBm) =  $E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8 - 2.15$ ; where D is the measurement distance (in the far field region) in m.

#### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:


The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

#### 4.1.3 Deviation from Test Standard


No deviation.

4.1.4 Test Setup

<Radiated Emission below or equal 1 GHz>

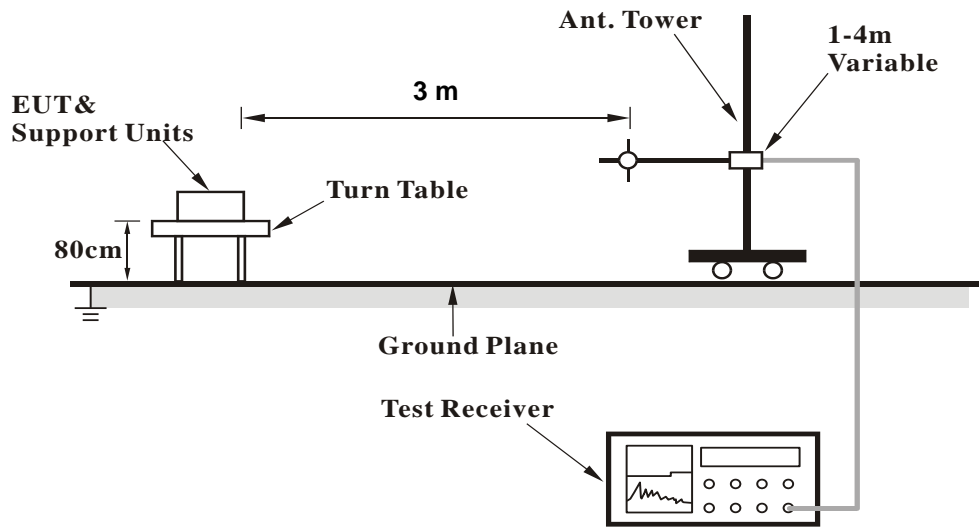

<Radiated Emission above 1 GHz>

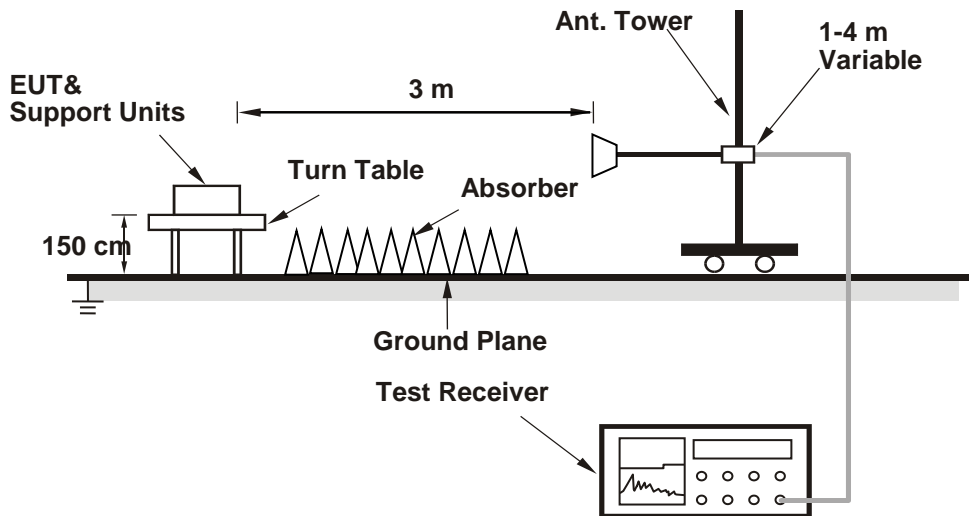

For the actual test configuration, please refer to the attached file (Test Setup Photo).


4.1.5 Test Results  
Below 1GHz  
WCDMA Band 2

<b>RF Mode</b>	TX WCDMA Band II	<b>Channel</b>	CH 9400 : 1880 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	79.47	-46.33	-13.00	-33.33	3.35 H	326	65.59	-111.92
2	200.72	-49.09	-13.00	-36.09	1.96 H	356	61.81	-110.90
3	279.29	-47.11	-13.00	-34.11	2.18 H	147	60.42	-107.53
4	376.29	-47.46	-13.00	-34.46	2.90 H	136	57.70	-105.16
5	460.68	-54.36	-13.00	-41.36	3.55 H	41	48.73	-103.09
6	882.63	-53.80	-13.00	-40.80	2.81 H	306	42.69	-96.49

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

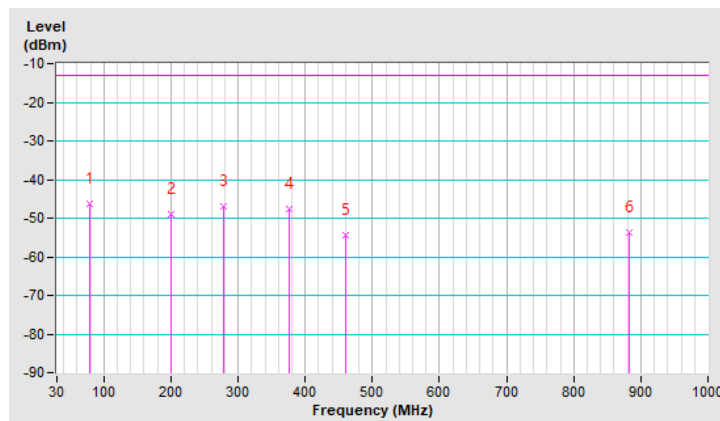


<b>RF Mode</b>	TX WCDMA Band II	<b>Channel</b>	CH 9400 : 1880 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-46.26	-13.00	-33.26	1.75 V	28	61.39	-107.65
2	200.72	-48.62	-13.00	-35.62	2.78 V	101	62.28	-110.90
3	280.26	-49.50	-13.00	-36.50	3.02 V	179	57.99	-107.49
4	377.26	-53.51	-13.00	-40.51	2.69 V	176	51.63	-105.14
5	461.65	-54.06	-13.00	-41.06	2.91 V	86	49.00	-103.06
6	859.35	-53.74	-13.00	-40.74	3.38 V	192	43.05	-96.79

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

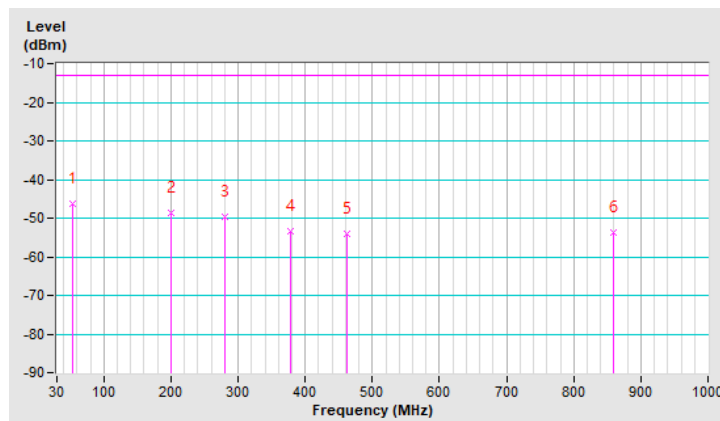


LTE Band 2

<b>RF Mode</b>	TX LTE Band II-20MHz	<b>Channel</b>	CH 18900 : 1880 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	79.47	-46.46	-13.00	-33.46	2.30 H	103	65.46	-111.92
2	198.78	-49.24	-13.00	-36.24	3.73 H	5	61.64	-110.88
3	278.32	-47.30	-13.00	-34.30	1.74 H	148	60.27	-107.57
4	365.62	-47.76	-13.00	-34.76	2.96 H	13	57.80	-105.56
5	462.62	-53.86	-13.00	-40.86	1.91 H	38	49.18	-103.04
6	837.04	-51.88	-13.00	-38.88	1.62 H	164	44.85	-96.73

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

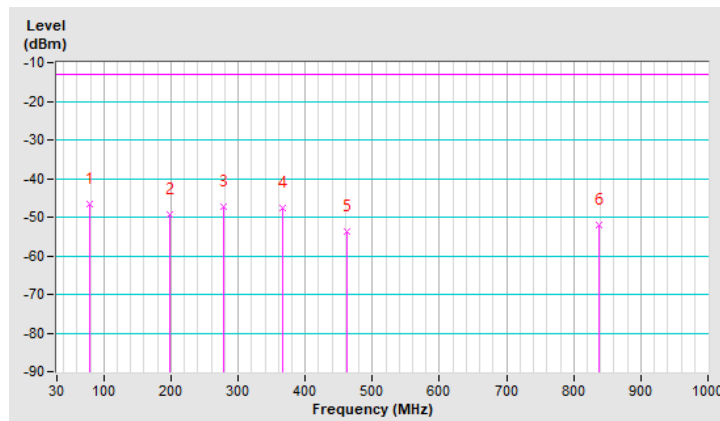




<b>RF Mode</b>	TX LTE Band II-20MHz	<b>Channel</b>	CH 18900 : 1880 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-46.26	-13.00	-33.26	1.08 V	236	61.39	-107.65
2	199.75	-48.73	-13.00	-35.73	2.60 V	44	62.16	-110.89
3	283.17	-49.72	-13.00	-36.72	1.32 V	167	57.69	-107.41
4	380.17	-53.91	-13.00	-40.91	2.11 V	182	51.16	-105.07
5	464.56	-55.07	-13.00	-42.07	2.02 V	92	47.93	-103.00
6	856.44	-54.62	-13.00	-41.62	1.87 V	245	42.18	-96.80

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

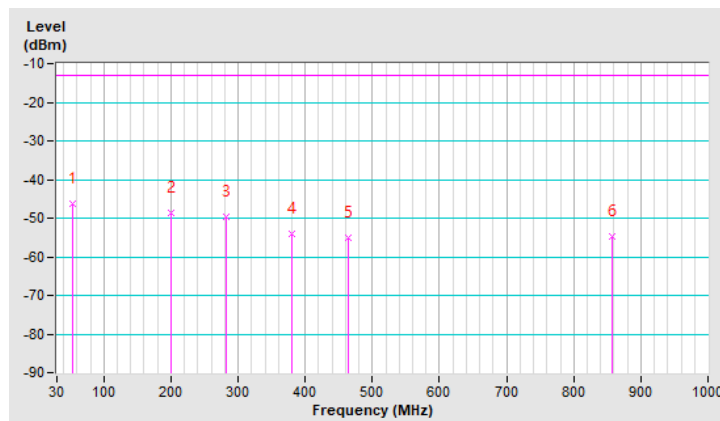


LTE Band 25

<b>RF Mode</b>	TX LTE Band XXV-20MHz	<b>Channel</b>	CH 26365 : 1882.5 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	78.50	-45.56	-13.00	-32.56	1.76 H	170	66.12	-111.68
2	199.75	-49.30	-13.00	-36.30	3.43 H	286	61.59	-110.89
3	282.20	-47.44	-13.00	-34.44	1.61 H	139	59.99	-107.43
4	366.59	-47.73	-13.00	-34.73	2.75 H	103	57.79	-105.52
5	453.89	-54.62	-13.00	-41.62	3.45 H	43	48.58	-103.20
6	825.40	-54.33	-13.00	-41.33	1.17 H	170	42.41	-96.74

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

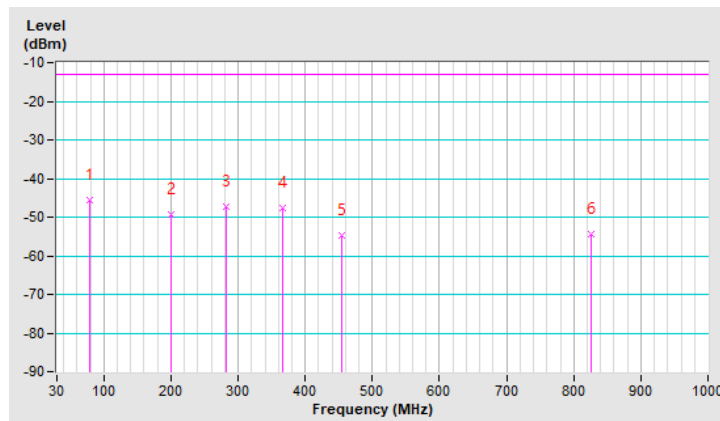


<b>RF Mode</b>	TX LTE Band XXV-20MHz	<b>Channel</b>	CH 26365 : 1882.5 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-46.35	-13.00	-33.35	2.11 V	159	61.30	-107.65
2	200.72	-48.53	-13.00	-35.53	2.79 V	56	62.37	-110.90
3	278.32	-48.74	-13.00	-35.74	1.32 V	187	58.83	-107.57
4	384.05	-53.59	-13.00	-40.59	1.98 V	188	51.41	-105.00
5	463.59	-54.09	-13.00	-41.09	2.96 V	95	48.93	-103.02
6	849.65	-54.88	-13.00	-41.88	2.53 V	317	41.94	-96.82

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

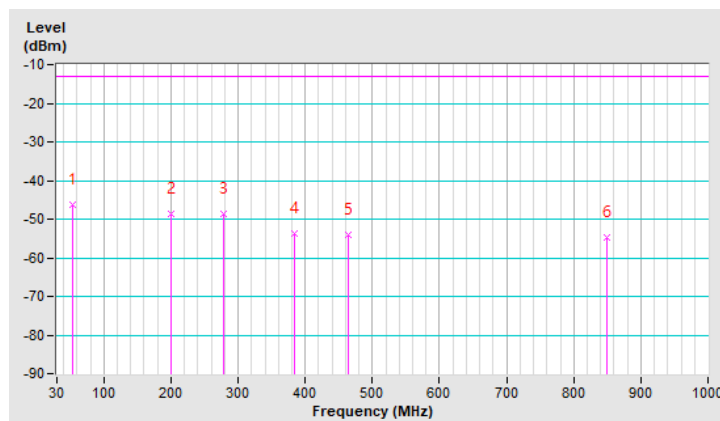


n2

<b>RF Mode</b>	TX 5GNR Band II-20MHz	<b>Channel</b>	CH 376000 : 1880 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	78.50	-46.42	-13.00	-33.42	2.40 H	216	65.26	-111.68
2	199.75	-49.36	-13.00	-36.36	1.58 H	175	61.53	-110.89
3	277.35	-47.30	-13.00	-34.30	1.37 H	142	60.31	-107.61
4	360.77	-47.48	-13.00	-34.48	2.18 H	3	58.26	-105.74
5	457.77	-54.19	-13.00	-41.19	1.88 H	140	48.94	-103.13
6	837.04	-54.05	-13.00	-41.05	1.35 H	162	42.68	-96.73

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

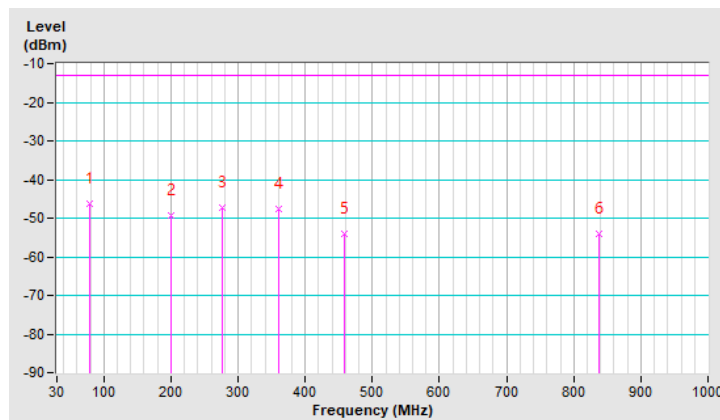


<b>RF Mode</b>	TX 5GNR Band II-20MHz	<b>Channel</b>	CH 376000 : 1880 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-46.09	-13.00	-33.09	1.78 V	166	61.56	-107.65
2	199.75	-49.33	-13.00	-36.33	2.33 V	205	61.56	-110.89
3	282.20	-49.18	-13.00	-36.18	1.97 V	181	58.25	-107.43
4	381.14	-53.17	-13.00	-40.17	2.13 V	175	51.88	-105.05
5	472.32	-54.83	-13.00	-41.83	1.22 V	104	47.98	-102.81
6	837.04	-54.85	-13.00	-41.85	3.41 V	2	41.88	-96.73

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

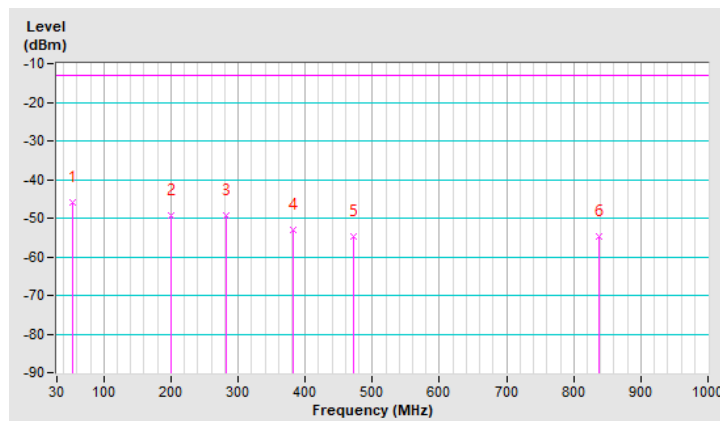


n25

<b>RF Mode</b>	TX 5GNR Band XXV-20MHz	<b>Channel</b>	CH 376500 : 1882.5 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	78.50	-46.25	-13.00	-33.25	3.69 H	167	65.43	-111.68
2	200.72	-48.95	-13.00	-35.95	1.18 H	9	61.95	-110.90
3	279.29	-46.93	-13.00	-33.93	1.68 H	146	60.60	-107.53
4	374.35	-47.47	-13.00	-34.47	2.39 H	2	57.75	-105.22
5	459.71	-54.71	-13.00	-41.71	2.42 H	130	48.39	-103.10
6	856.44	-54.10	-13.00	-41.10	1.74 H	200	42.70	-96.80

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

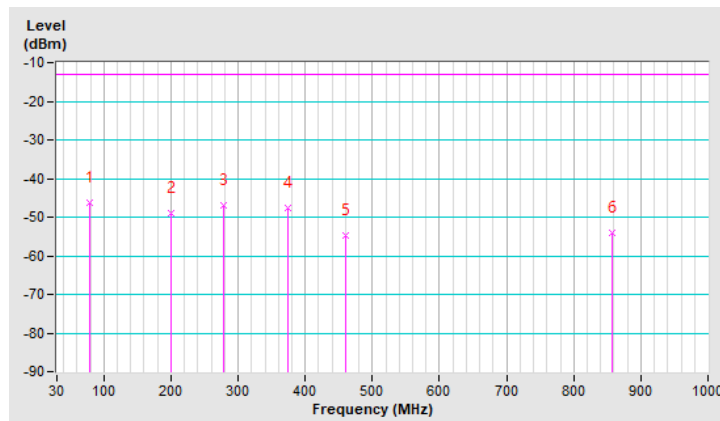


<b>RF Mode</b>	TX 5GNR Band XXV-20MHz	<b>Channel</b>	CH 376500 : 1882.5 MHz
<b>Frequency Range</b>	30MHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	-46.43	-13.00	-33.43	1.98 V	125	61.22	-107.65
2	201.69	-49.02	-13.00	-36.02	3.10 V	206	61.89	-110.91
3	281.23	-48.59	-13.00	-35.59	1.21 V	190	58.88	-107.47
4	385.02	-52.47	-13.00	-39.47	2.32 V	179	52.51	-104.98
5	468.44	-55.13	-13.00	-42.13	3.08 V	92	47.77	-102.90
6	869.05	-54.61	-13.00	-41.61	1.91 V	180	42.11	-96.72

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

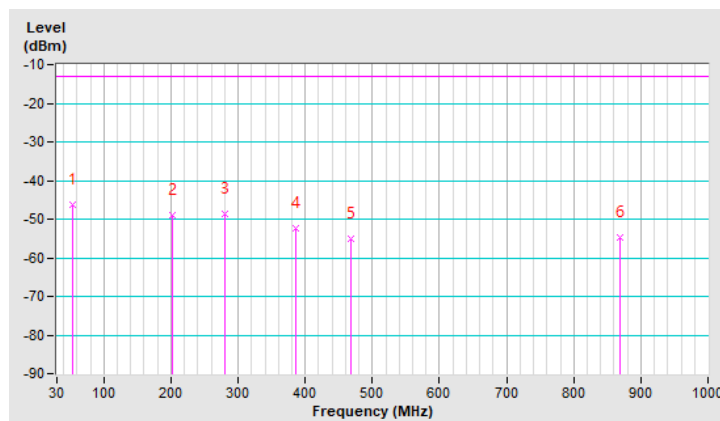

Above 1GHz  
WCDMA Band 2

<b>RF Mode</b>	TX WCDMA Band II	<b>Channel</b>	CH 9400 : 1880 MHz
<b>Frequency Range</b>	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-53.77	-13.00	-40.77	1.16 H	159	55.22	-108.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-52.89	-13.00	-39.89	2.78 V	29	56.10	-108.99

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 2

<b>RF Mode</b>	TX LTE Band II-20MHz	<b>Channel</b>	CH 18900 : 1880 MHz
<b>Frequency Range</b>	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-55.76	-13.00	-42.76	1.74 H	39	53.23	-108.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-54.25	-13.00	-41.25	1.44 V	241	54.74	-108.99

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.



LTE Band 25

<b>RF Mode</b>	TX LTE Band XXV-20MHz	<b>Channel</b>	CH 26365 : 1882.5MHz
<b>Frequency Range</b>	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-54.39	-13.00	-41.39	1.98 H	84	54.61	-109.00
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-53.81	-13.00	-40.81	1.68 V	233	55.19	-109.00

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

n2

<b>RF Mode</b>	TX 5GNR Band II-20MHz	<b>Channel</b>	CH 376000 : 1880 MHz
<b>Frequency Range</b>	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-53.58	-13.00	-40.58	1.23 H	197	55.41	-108.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-53.65	-13.00	-40.65	1.91 V	117	55.34	-108.99

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

n25

<b>RF Mode</b>	TX 5GNR Band XXV-20MHz	<b>Channel</b>	CH 376500 : 1882.5 MHz
<b>Frequency Range</b>	1GHz ~ 20GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-53.33	-13.00	-40.33	1.70 H	152	55.67	-109.00
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3765.00	-52.42	-13.00	-39.42	2.22 V	49	56.58	-109.00

**Remarks:**

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---