



FCC RADIO TEST REPORT

FCC ID : MSQI005D
Equipment : ASUS Phone(Mobile Phone)
Brand Name : ASUS
Model Name : ASUS_I005D
ASUS_I005DC
Standard : FCC Part 15 Subpart C §15.247

The product was received on Nov. 02, 2020 and testing was started from Nov. 17, 2020 and completed on Jan. 05, 2021. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Reviewed by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Modification of EUT.....	6
1.5 Testing Location.....	7
1.6 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test.....	8
2.1 Carrier Frequency Channel.....	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system.....	10
2.5 EUT Operation Test Setup.....	11
2.6 Measurement Results Explanation Example.....	11
3 Test Result.....	12
3.1 Number of Channel Measurement.....	12
3.2 Hopping Channel Separation Measurement.....	16
3.3 Dwell Time Measurement.....	32
3.4 20dB and 99% Bandwidth Measurement.....	35
3.5 Output Power Measurement.....	66
3.6 Conducted Band Edges Measurement.....	67
3.7 Conducted Spurious Emission Measurement.....	86
3.8 Radiated Band Edges and Spurious Emission Measurement.....	114
3.9 AC Conducted Emission Measurement.....	118
3.10 Antenna Requirements.....	120
4 List of Measuring Equipment.....	121
5 Uncertainty of Evaluation.....	123
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR082114A	01	Initial issue of report	Feb. 04, 2021



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(1)	Number of Channels	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	Pass	-
3.4	2.1049	99% Occupied Bandwidth	Reporting only	-
3.5	15.247(b)(1)	Peak Output Power	Pass	-
3.6	15.247(d)	Conducted Band Edges	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	Under limit 6.50 dB at 903.970 MHz
3.9	15.207	AC Conducted Emission	Pass	Under limit 4.92 dB at 0.152 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Amy Chen



1 General Description

1.1 Applicant

1. ASUSTeK COMPUTER INC.
1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

1.2 Manufacturer

1. Guangdong Enok Communication Co., Ltd.
No. 137, 139, Lixiang Road., Songmushan Village, Dalang Town, Dongguan City, Guangdong Province, China
2. PT. SAT NUSAPERSADA TBK
JALAN PELITA VI. NO. 99, BATAM, 29443,INDONESIA

1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, NFC, and GNSS.

Product Specification subjective to this standard							
Sample 1	Model Name: ASUS_I005D						
Sample 2	Model Name: ASUS_I005DC						
Antenna Type	WWAN: PIFA Antenna WLAN <Ant. 4>: PIFA Antenna <Ant. 5>: PIFA Antenna <Ant. 6>: PIFA Antenna Bluetooth <Ant. 4>: PIFA Antenna <Ant. 5>: PIFA Antenna <Ant. 6>: PIFA Antenna GPS / Glonass / BDS / Galileo: PIFA Antenna NFC: Loop Antenna						
Antenna information							
2400 MHz ~ 2483.5 MHz	<table border="1"> <tr> <td>Peak Gain (dBi)</td> <td>Ant. 4: -0.5 dBi</td> </tr> <tr> <td></td> <td>Ant. 5: -0.8 dBi</td> </tr> <tr> <td></td> <td>Ant. 6: 2.7 dBi</td> </tr> </table>	Peak Gain (dBi)	Ant. 4: -0.5 dBi		Ant. 5: -0.8 dBi		Ant. 6: 2.7 dBi
Peak Gain (dBi)	Ant. 4: -0.5 dBi						
	Ant. 5: -0.8 dBi						
	Ant. 6: 2.7 dBi						

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.



Sample Information		
Model Name	ASUS_I005D	ASUS_I005DC
SKU	SKU1	SKU2
	UE2S3	UE2S2
High-end or Entry level (Back cover CN or WW)	High-end WW (Etching + Black) PMOLED	High-end CN (Etching + Black) Light guide plate
PCB Manufacturer	COMPEQ	COMPEQ
Front Camera 24M (Brand/Model name)	TRIPLEWIN/CASF0-000A	LUXVISIONS/0BFO01P3
Rear CAM 64M+13M (Brand/Model name)	PRIMAX/50-704JHASC8	PRIMAX/50-704JHASC8
Rear CAM 8M (Brand/Model name)	TSPRECISION/O5F9323 VERA1	TSPRECISION/O5F9323 VERA1
BATT (Brand/Model name)	SCUD/C21P2001	SCUD/C21P2001
CPU (Brand/Model name)	QUALCOMM/ SM-8350-1-MPSP1393-TR-00-0-AB	QUALCOMM/ SM-8350-1-MPSP1393-TR-00-0-AB
DDR	12G	12G
Brand/Model name	Micron/MT62F1536M64D8CH-031WT:A	Micron/MT62F1536M64D8CH-031WT:A
UFS	512G	256G
Brand/Model name	Micron/MTFC512GARATAM-WT	Samsung/KLUEG8UHDC-B0E1

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH05-HY, CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH15-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-




2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Normal Mode: X plane for Ant. 4 and Ant. 5; Camera Mode: Z plane for Ant. 6) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
Conducted Test Cases	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth BR 1Mbps GFSK		
	Mode 1: CH00_2402 MHz		
	Mode 2: CH39_2441 MHz		
	Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN (2.4GHz) Link + Camera (Front) + NFC On + USB Cable 1 (Bottom USB Port) (Charging from Adapter) + X mode + Aura sync + SIM 1 for Sample 1		
Remark:			
1. For radiated test cases, the worst mode data rate 1Mbps was reported only since the highest RF output power in the preliminary tests. The conducted spurious emissions and conducted band edge measurement for other data rates were not worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission.			
2. The worst case of conducted emission is mode 1; only the test data of it was reported.			
3. For Radiated Test Cases, the tests were performed with USB Cable 1 and Sample 1.			

2.3 Connection Diagram of Test System

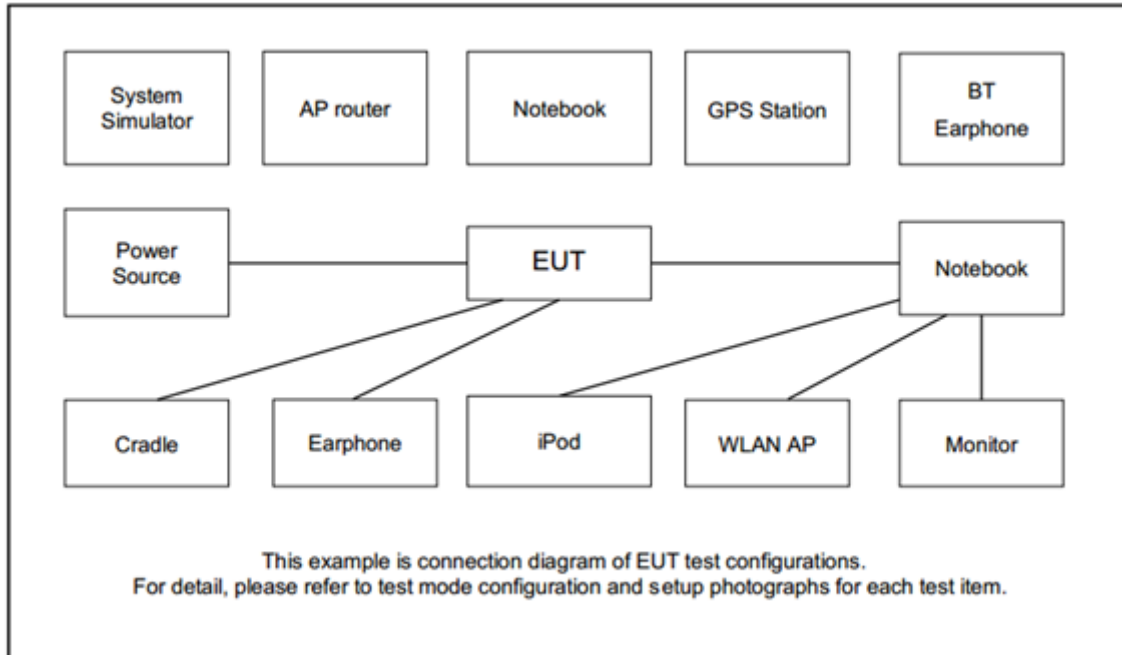

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
4.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m
6.	Earphone	ASUS	EA009B	N/A	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “QRCT V4.0.00175.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to contact with base station to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

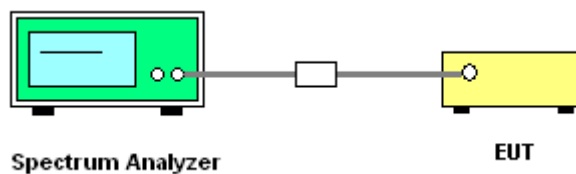





3.1.5 Test Result of Number of Hopping Frequency

Please refer to Appendix A.

<Normal Mode with Ant. 4>


Number of Hopping Channel Plot on Channel 00 - 78

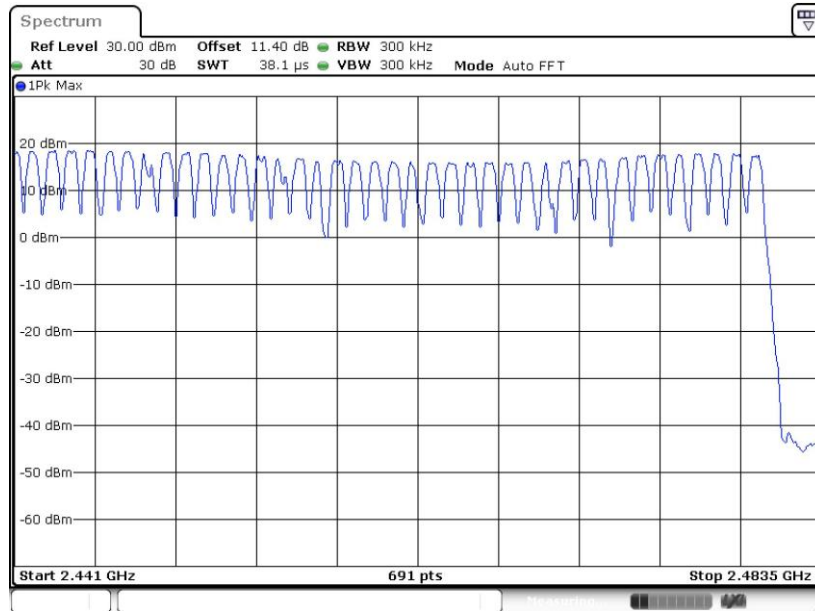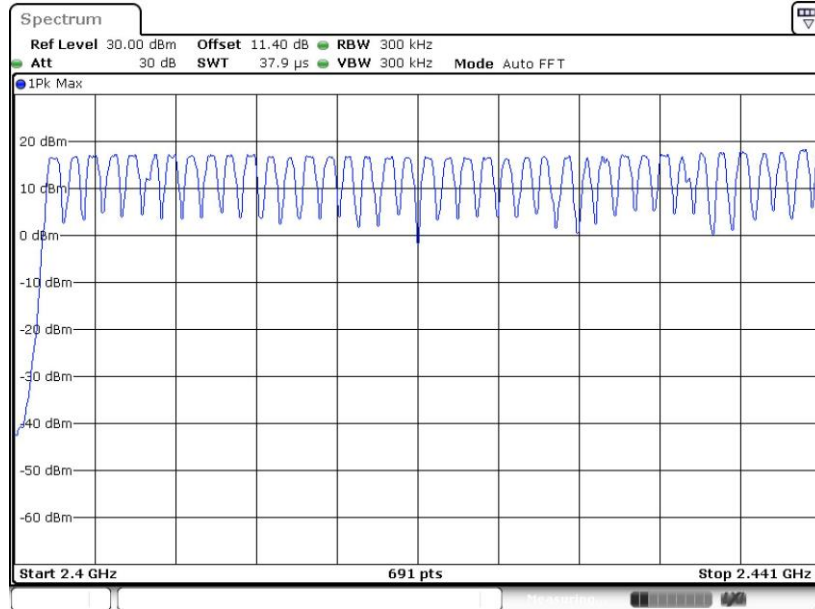




<Normal Mode with Ant. 5>

Number of Hopping Channel Plot on Channel 00 - 78

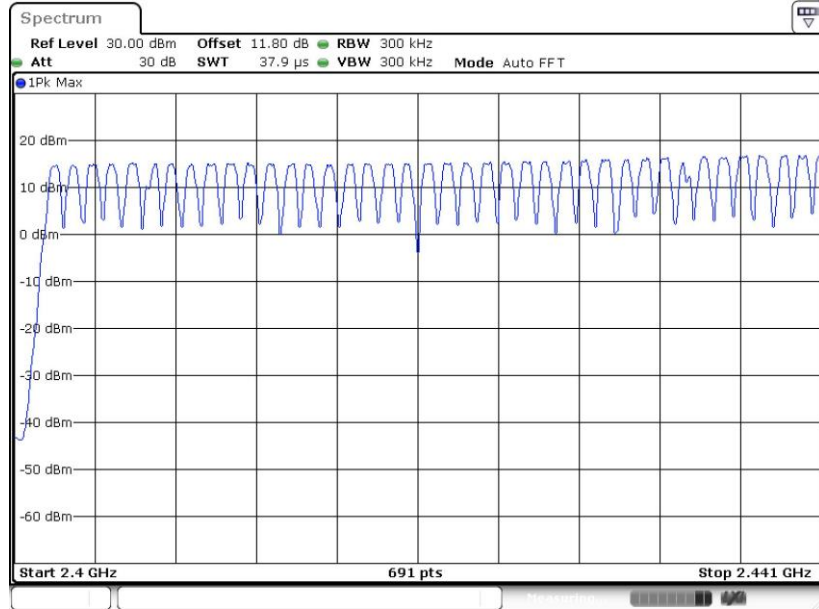

Date: 5.JAN.2021 00:29:49

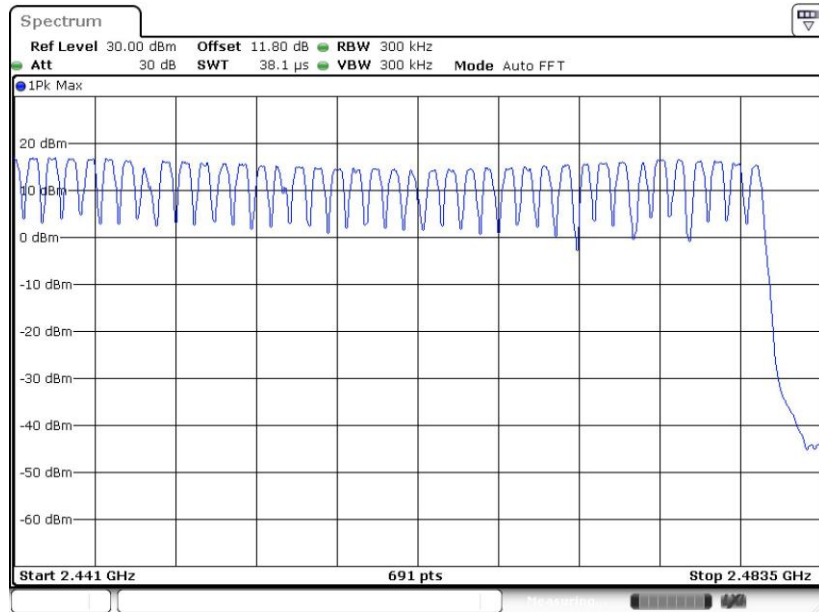


Date: 5.JAN.2021 00:30:07




<Camera Mode with Ant. 6>

Number of Hopping Channel Plot on Channel 00 - 78

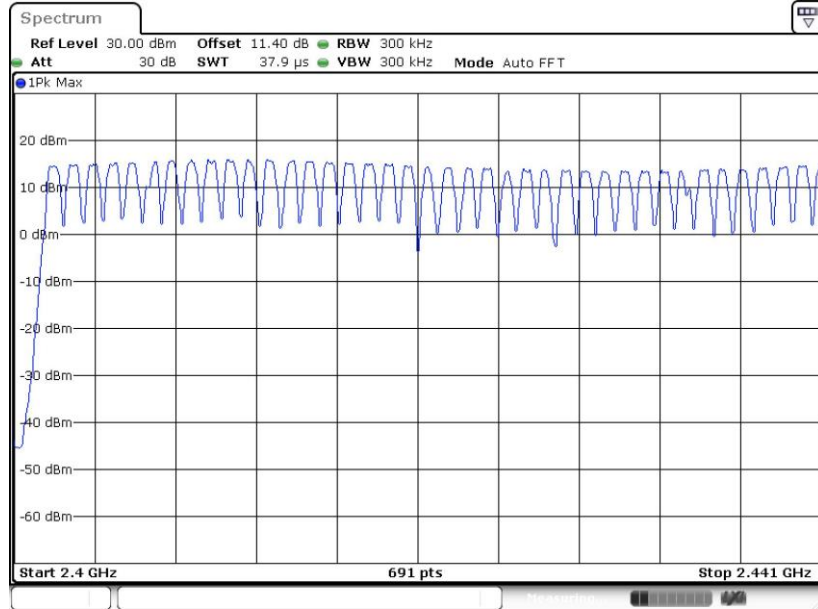

Date: 30.DECEMBER.2020 20:08:06

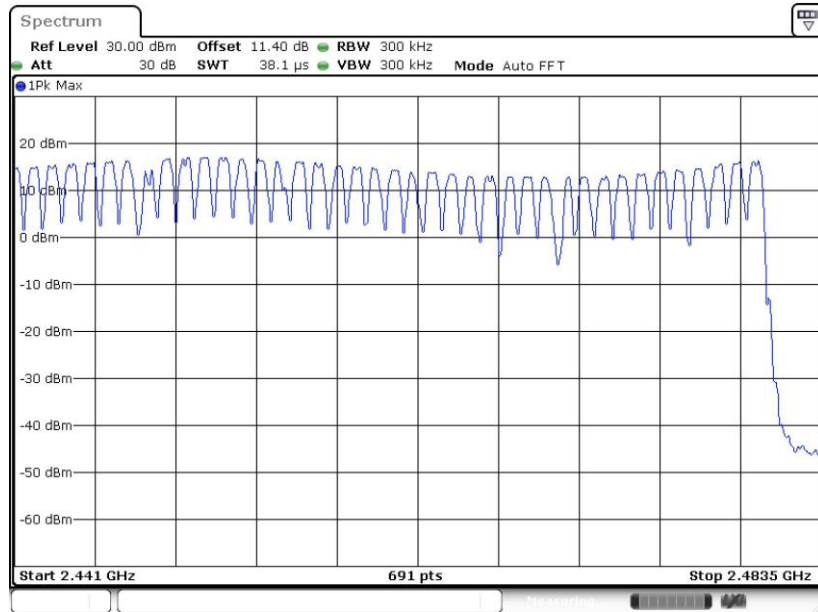

Date: 30.DECEMBER.2020 20:08:22

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

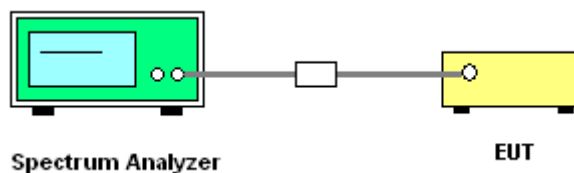

3.2.5 Test Result of Hopping Channel Separation


Please refer to Appendix A.



<Normal Mode with Ant. 4>


<1Mbps>

Channel Separation Plot on Channel 00 - 01

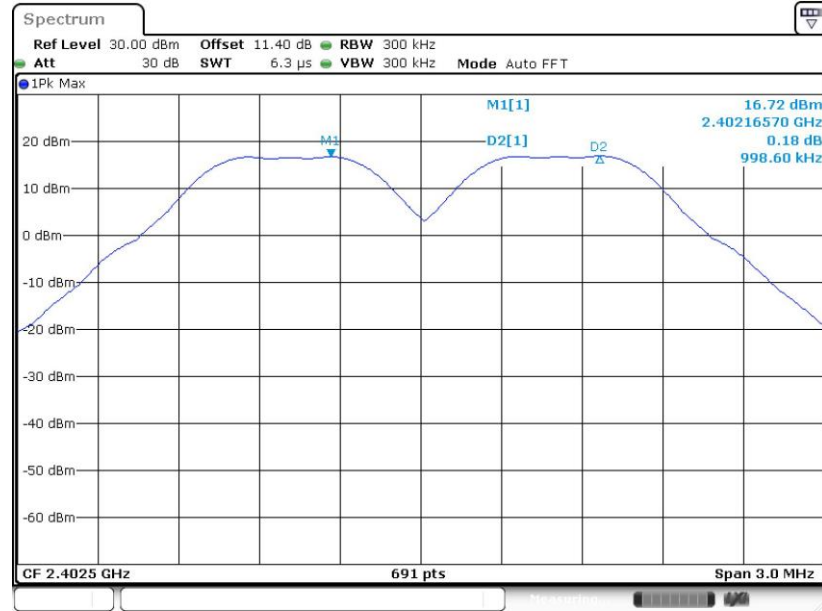

Date: 29,DEC,2020 23:48:07


Channel Separation Plot on Channel 39 - 40

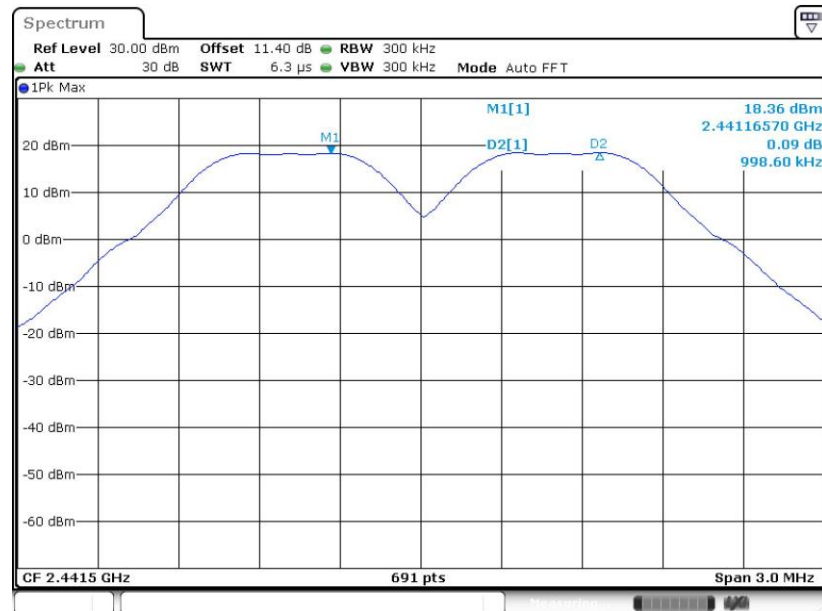

Date: 29,DEC,2020 23:51:27




Channel Separation Plot on Channel 77 - 78

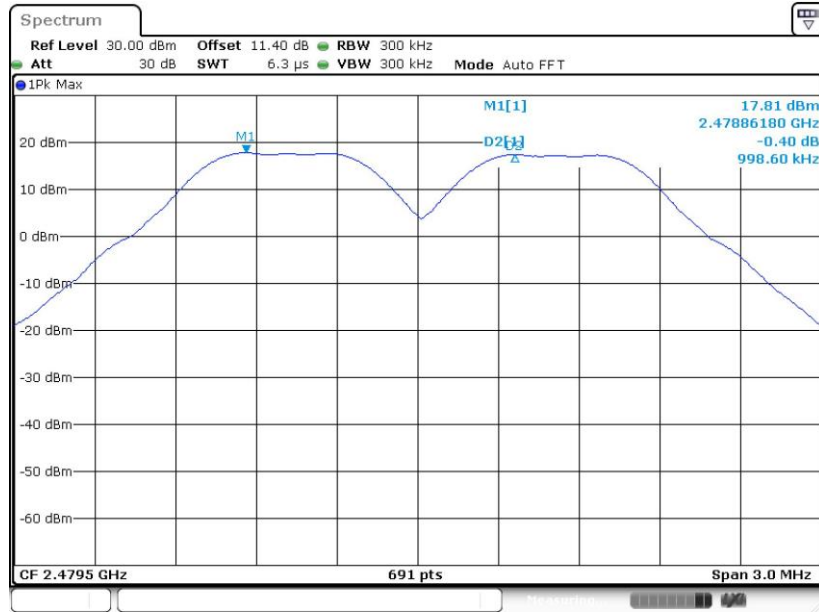

Date: 29.DEC.2020 23:59:27

<2Mbps>


Channel Separation Plot on Channel 00 - 01

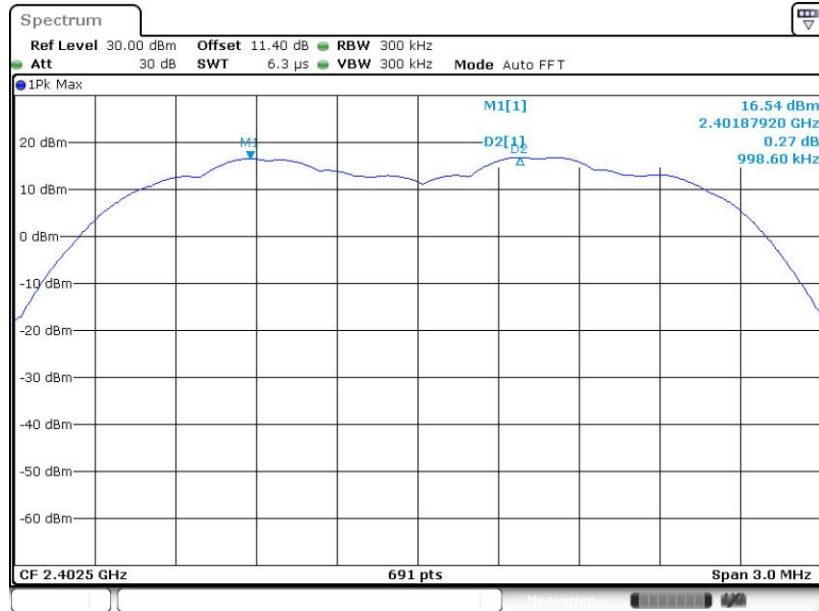

Date: 30.DEC.2020 00:07:27




Channel Separation Plot on Channel 39 - 40

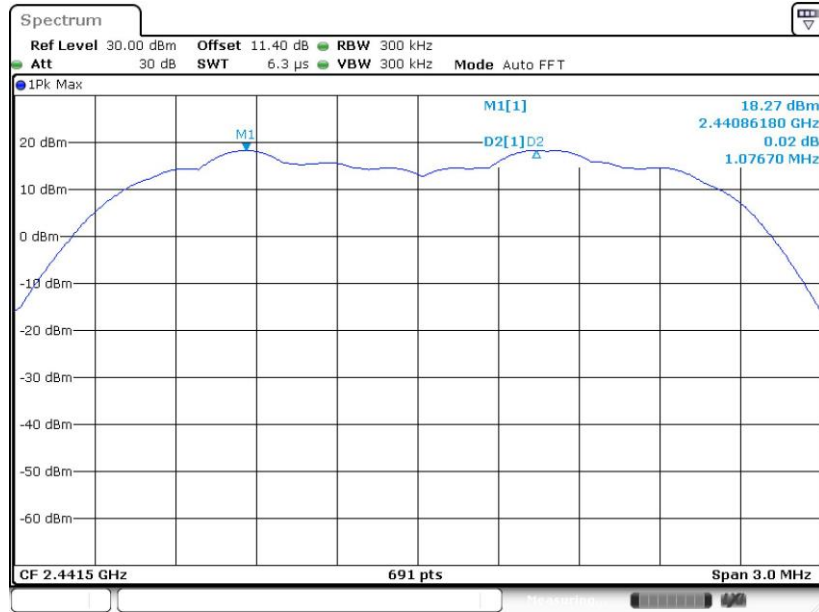

Date: 30.DEC.2020 00:14:04

Channel Separation Plot on Channel 77 - 78

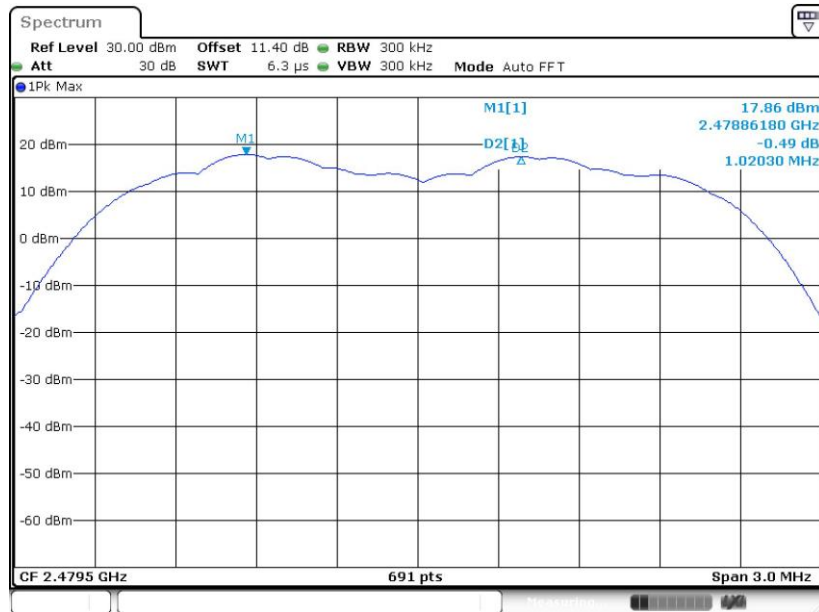


Date: 30.DEC.2020 00:19:13




<3Mbps>

Channel Separation Plot on Channel 00 - 01

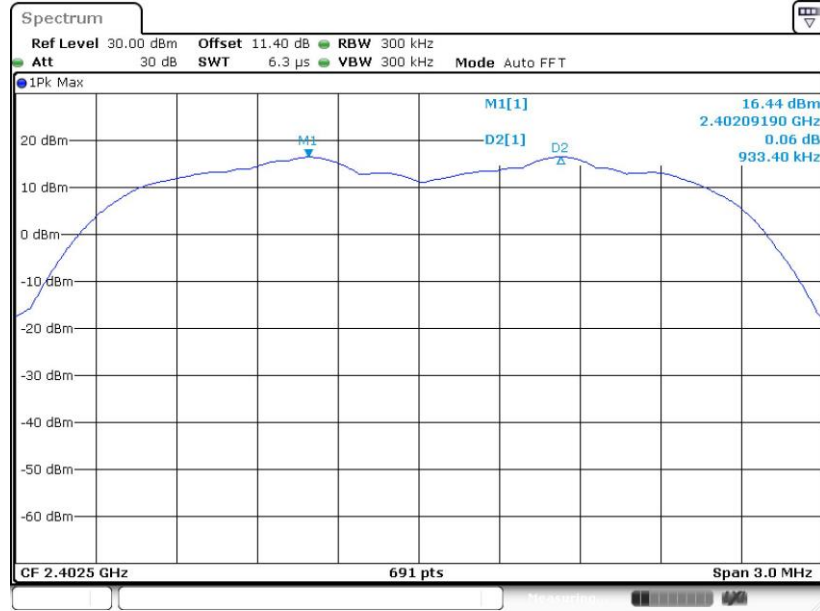

Date: 30.DEC.2020 00:23:54


Channel Separation Plot on Channel 39 - 40

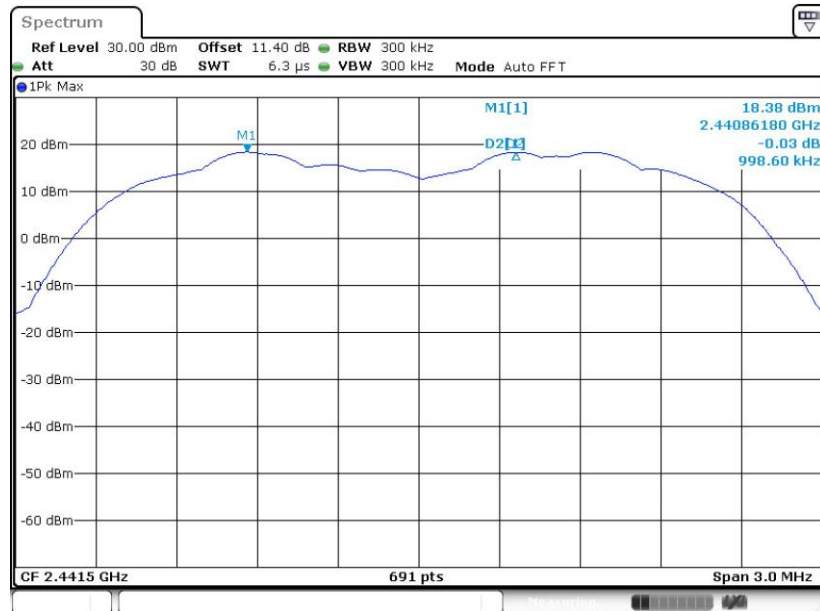

Date: 30.DEC.2020 00:28:20



Channel Separation Plot on Channel 77 - 78

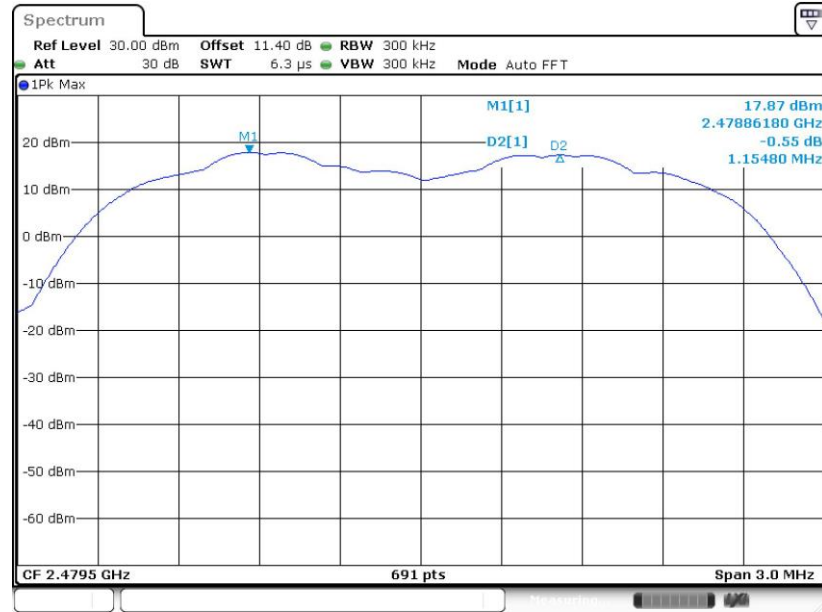


Date: 30.DEC.2020 00:33:30



<Normal Mode with Ant. 5>


<1Mbps>

Channel Separation Plot on Channel 00 - 01

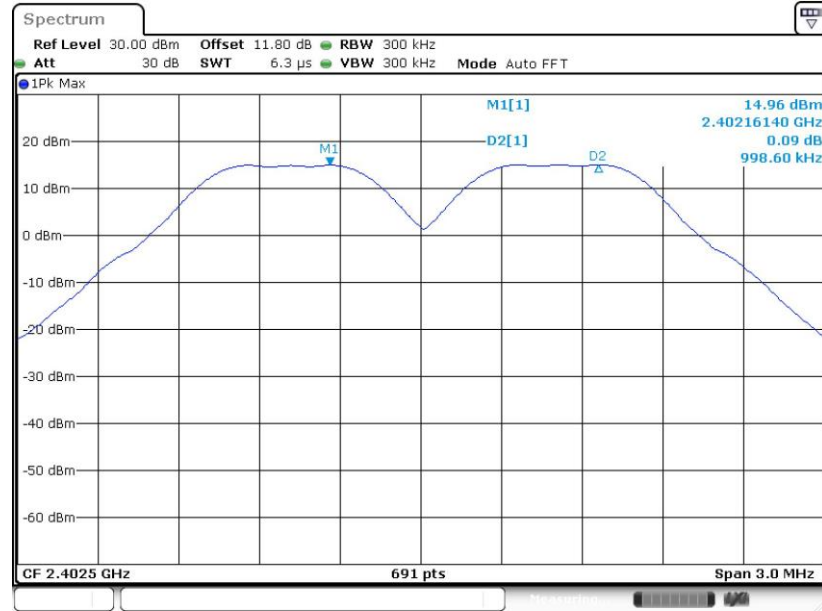

Date: 5.JAN.2021 00:37:20


Channel Separation Plot on Channel 39 - 40

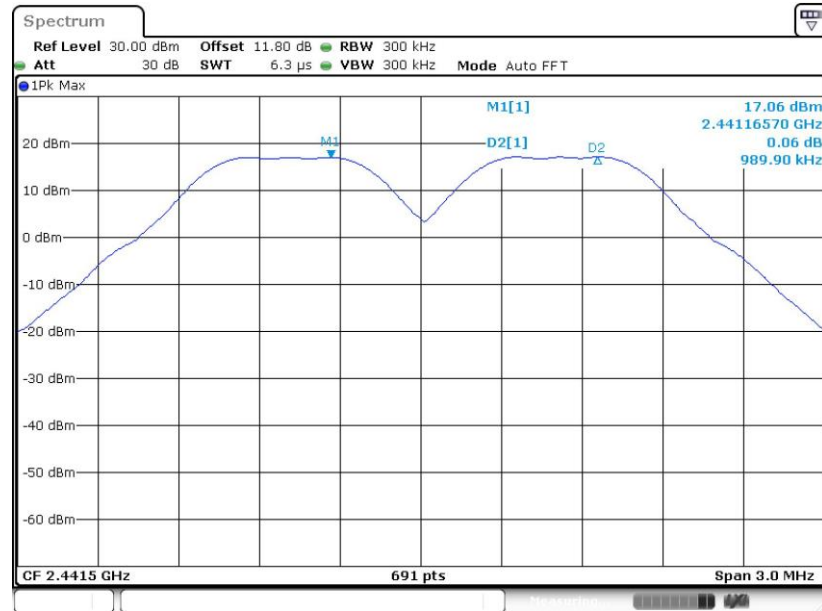

Date: 5.JAN.2021 00:41:23




Channel Separation Plot on Channel 77 - 78

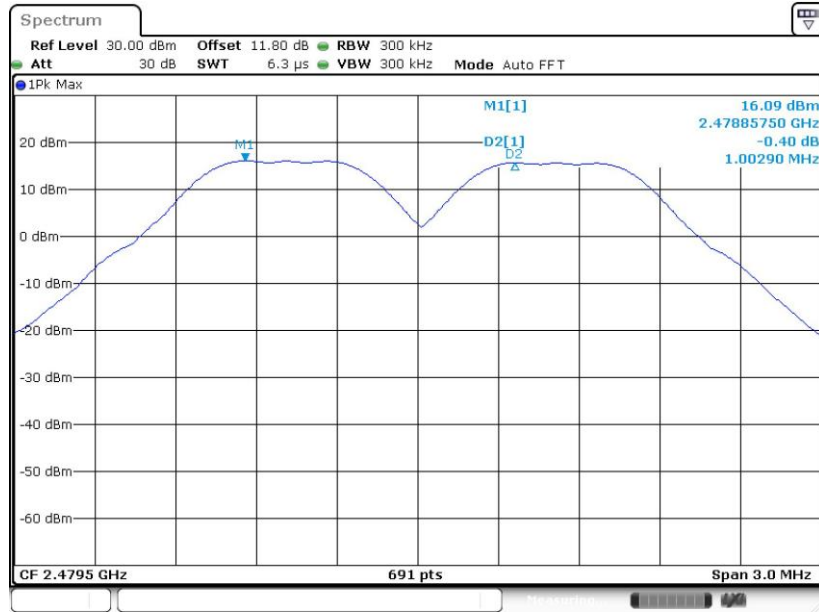

Date: 5.JAN.2021 00:45:59

<2Mbps>


Channel Separation Plot on Channel 00 - 01

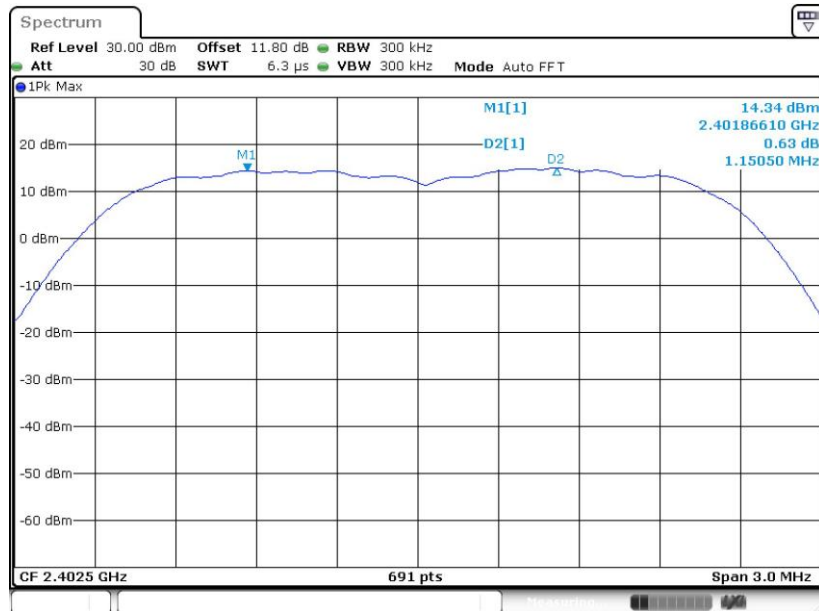

Date: 5.JAN.2021 01:40:35




Channel Separation Plot on Channel 39 - 40

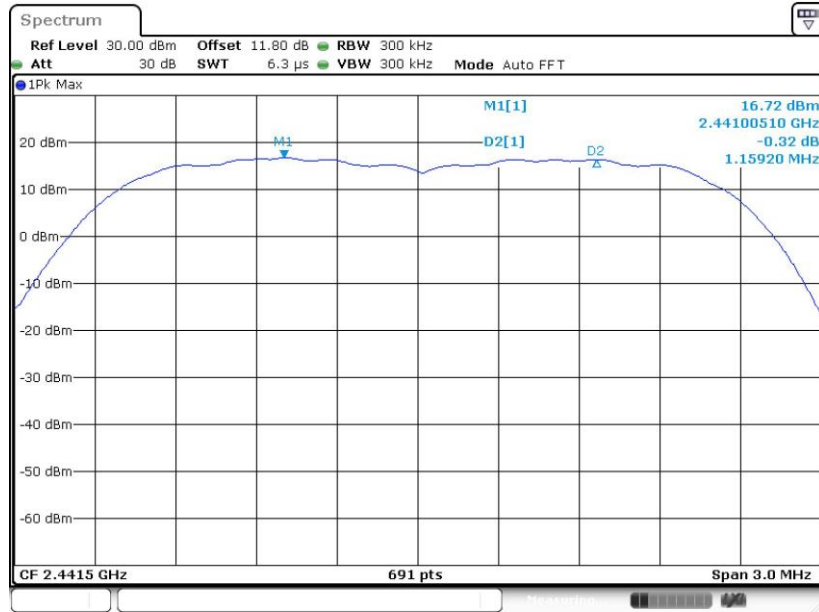

Date: 5.JAN.2021 00:56:01

Channel Separation Plot on Channel 77 - 78

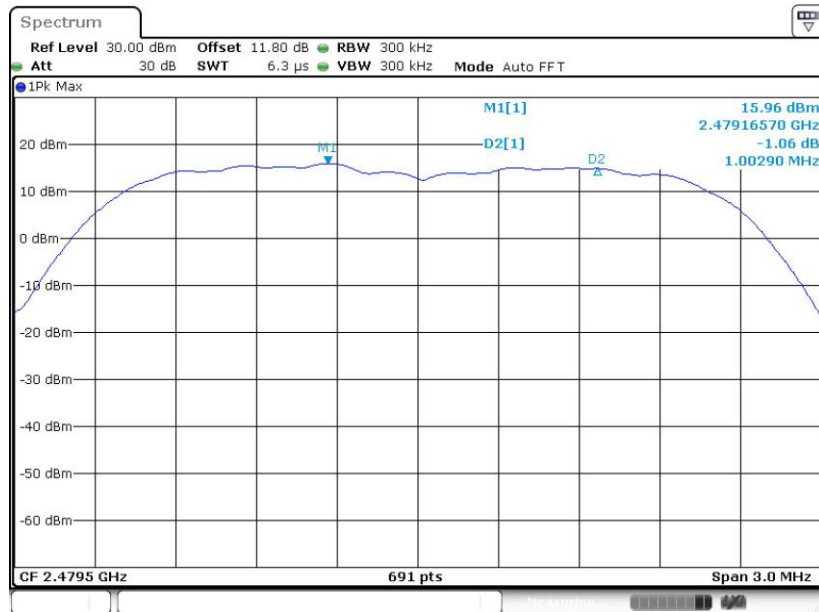


Date: 5.JAN.2021 01:00:44




<3Mbps>

Channel Separation Plot on Channel 00 - 01

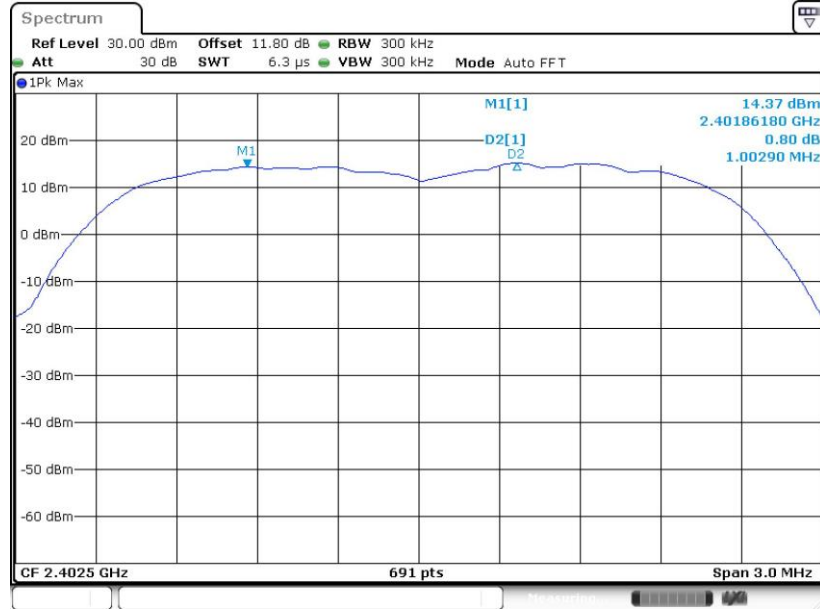

Date: 5.JAN.2021 01:34:30


Channel Separation Plot on Channel 39 - 40

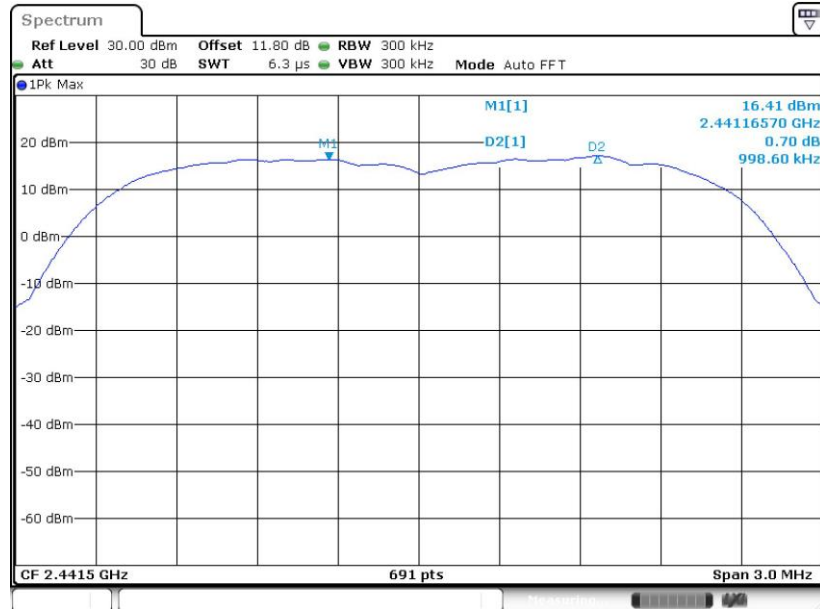

Date: 5.JAN.2021 01:11:23



Channel Separation Plot on Channel 77 - 78

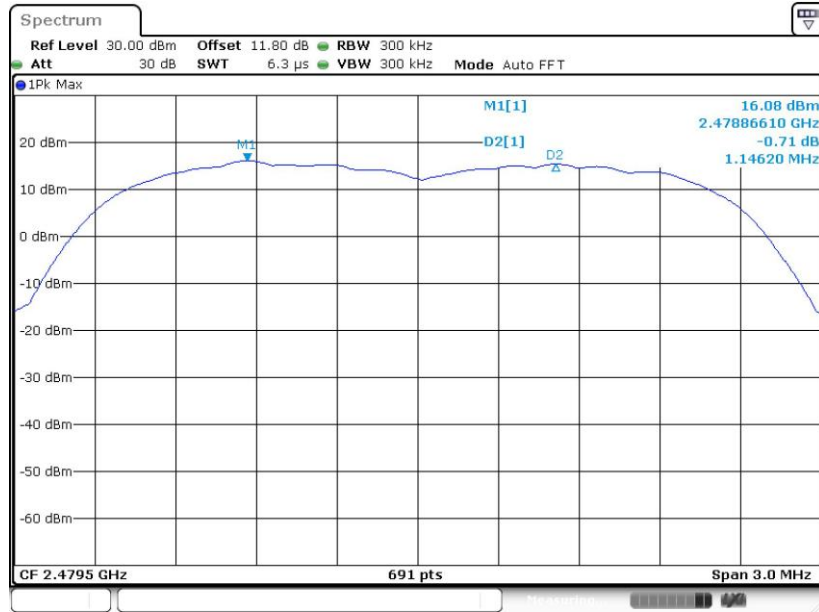


Date: 5.JAN.2021 01:18:41



<Camera Mode with Ant. 6>


<1Mbps>

Channel Separation Plot on Channel 00 - 01

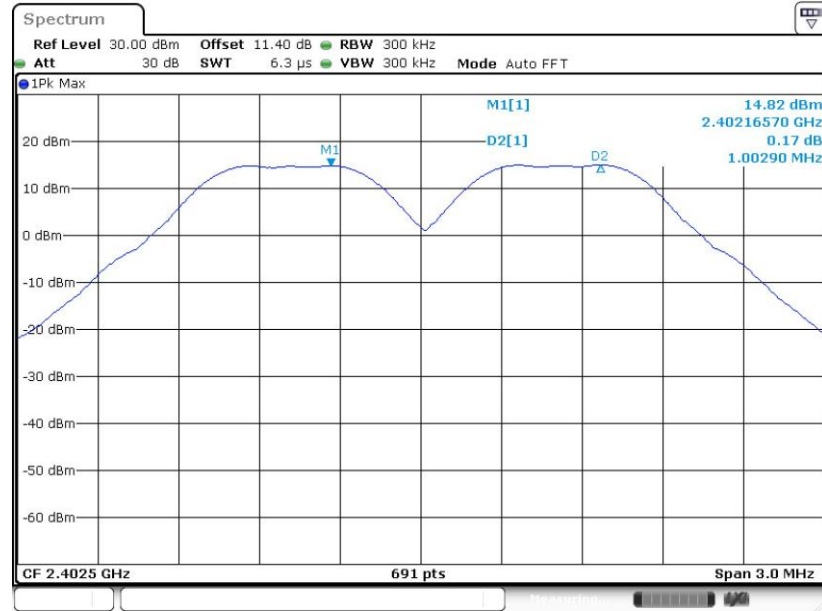

Date: 30.DECEMBER.2020 20:21:57


Channel Separation Plot on Channel 39 - 40

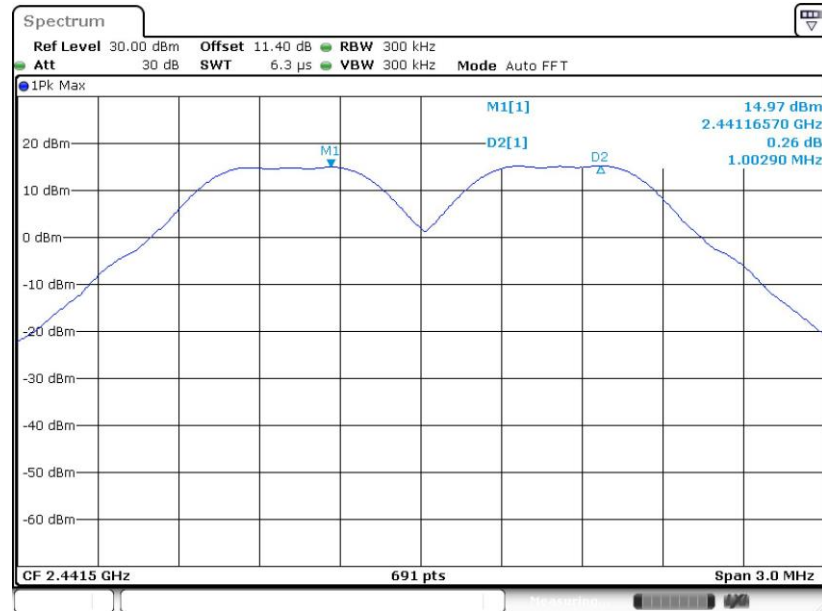

Date: 30.DECEMBER.2020 20:59:00




Channel Separation Plot on Channel 77 - 78

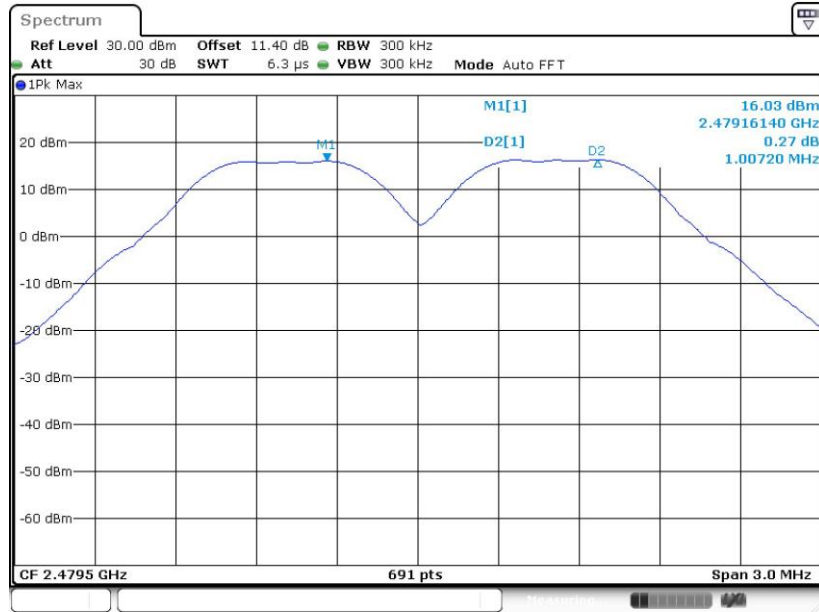

Date: 30.DEC.2020 21:05:58

<2Mbps>


Channel Separation Plot on Channel 00 - 01

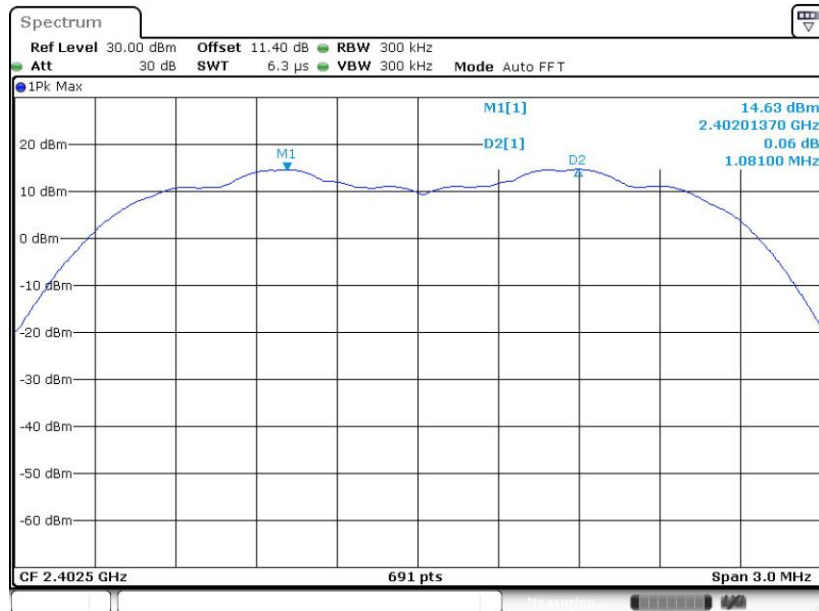

Date: 30.DEC.2020 21:13:11




Channel Separation Plot on Channel 39 - 40

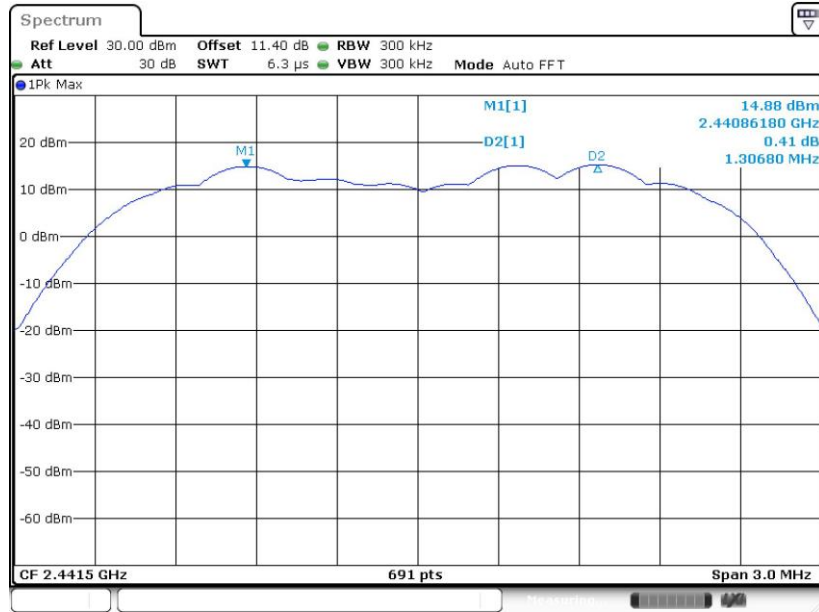

Date: 30.DECEMBER.2020 21:20:12

Channel Separation Plot on Channel 77 - 78

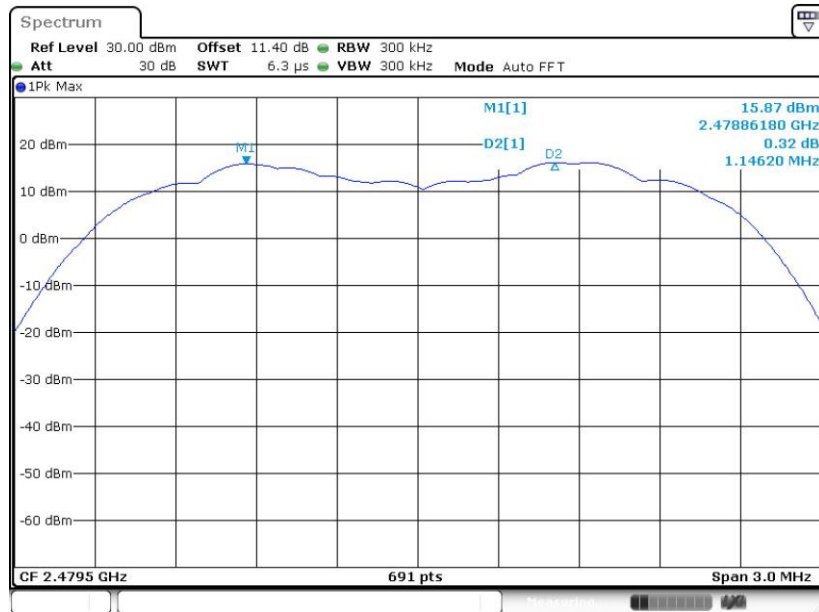


Date: 30.DECEMBER.2020 21:33:22




<3Mbps>

Channel Separation Plot on Channel 00 - 01

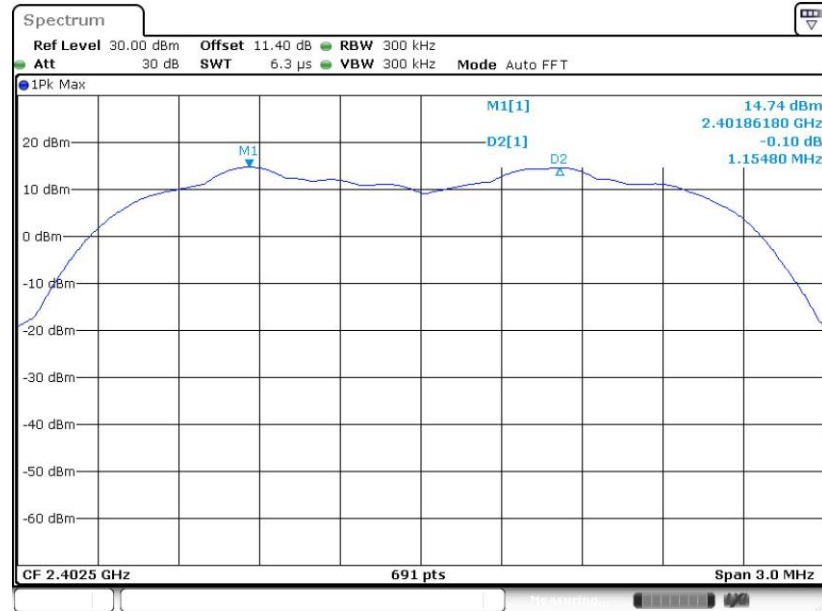

Date: 30.DEC.2020 21:59:05


Channel Separation Plot on Channel 39 - 40

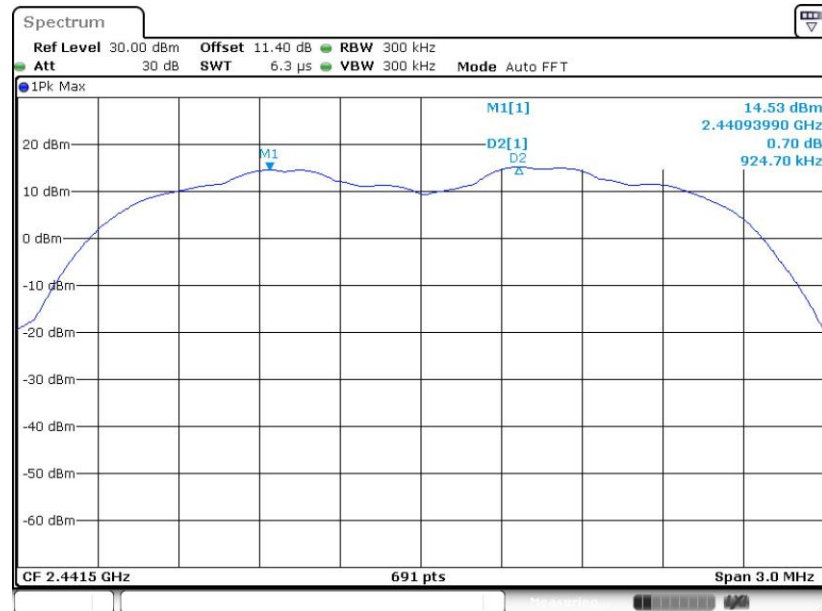

Date: 30.DEC.2020 22:05:04



Channel Separation Plot on Channel 77 - 78

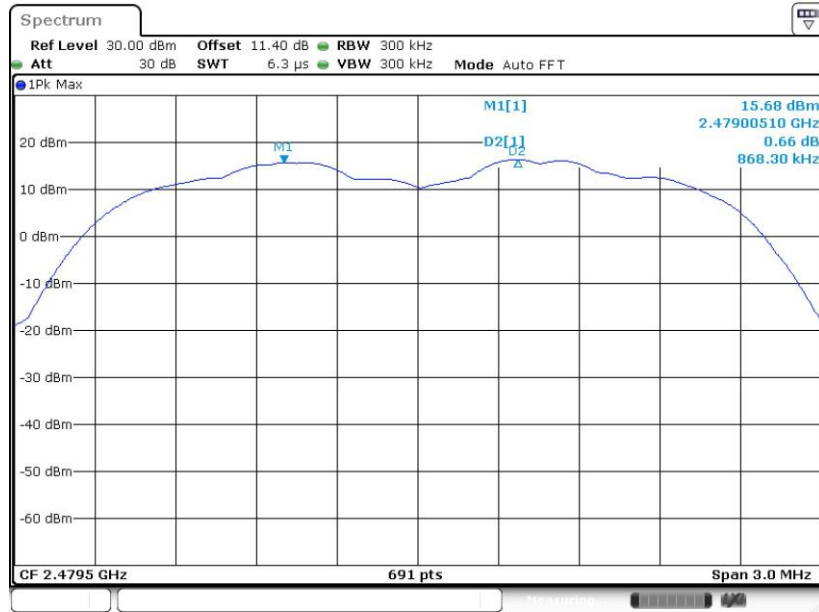

Date: 30.DEC.2020 22:10:52

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

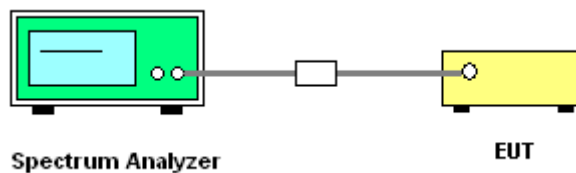


3.3.5 Test Result of Dwell Time

Please refer to Appendix A.



<Normal Mode with Ant. 4>


Package Transfer Time Plot

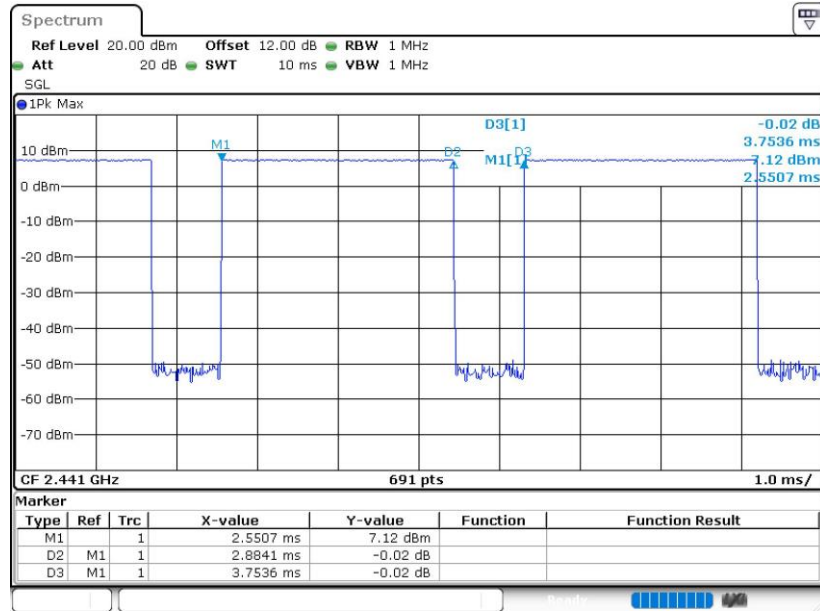

Date: 17.NOV.2020 04:20:07

<Normal Mode with Ant. 5>

Package Transfer Time Plot

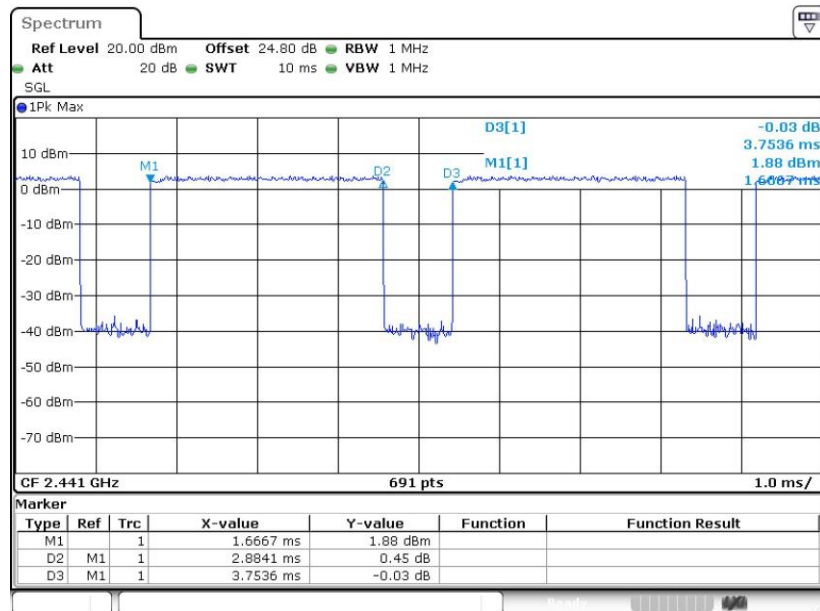


Date: 23.NOV.2020 19:38:57



<Camera Mode with Ant. 6>

Package Transfer Time Plot

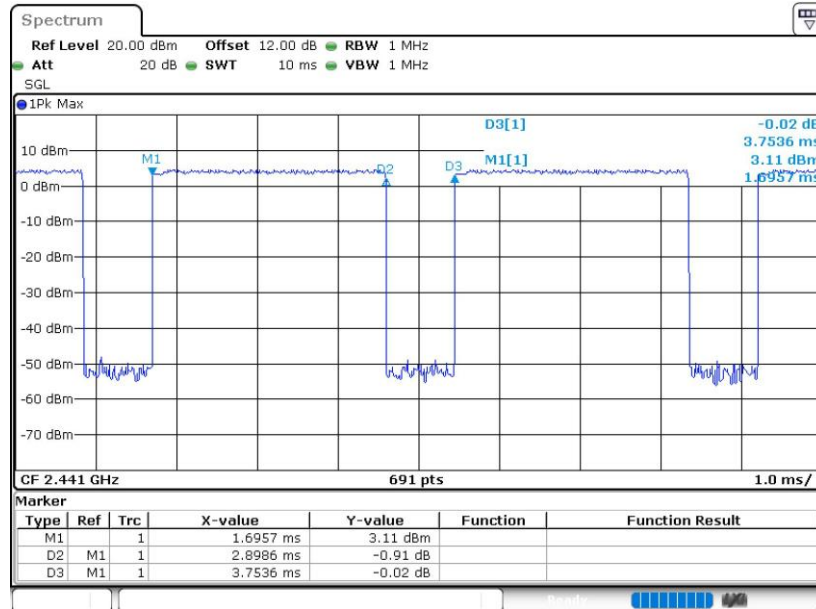

Date: 17.NOV.2020 03:43:42

Remark:

1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels. With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s), Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels. With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s), Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW \geq 1-5% of the 99% bandwidth; VBW \geq 3 * RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

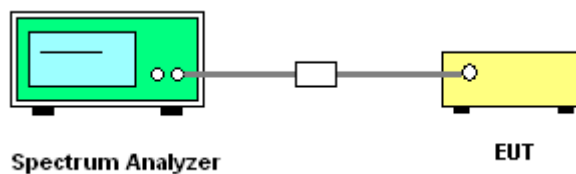

3.4.5 Test Result of 20dB Bandwidth


Please refer to Appendix A.



<Normal Mode with Ant. 4>


<1Mbps>

20 dB Bandwidth Plot on Channel 00

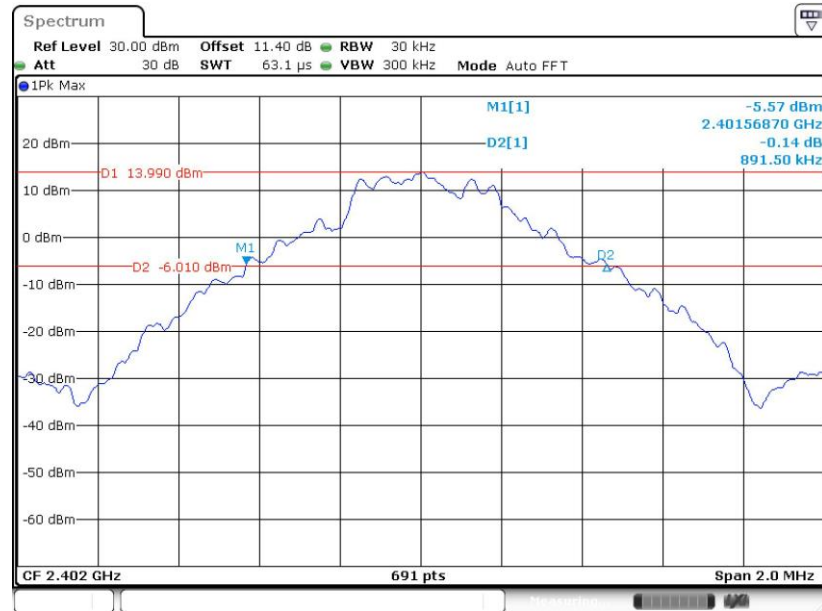

Date: 29.DECEMBER.2020 23:45:00


20 dB Bandwidth Plot on Channel 39

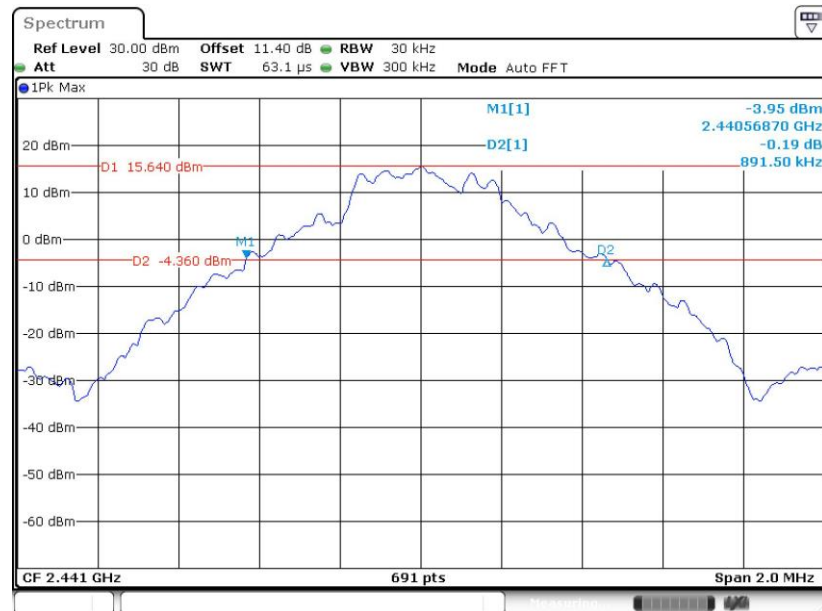

Date: 29.DECEMBER.2020 23:49:03




20 dB Bandwidth Plot on Channel 78

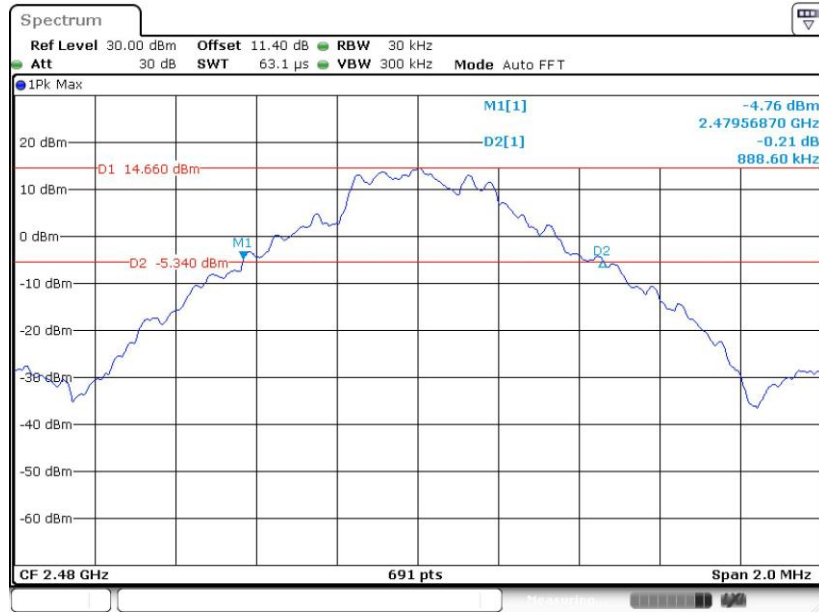

Date: 29.DEC.2020 23:56:06

<2Mbps>


20 dB Bandwidth Plot on Channel 00

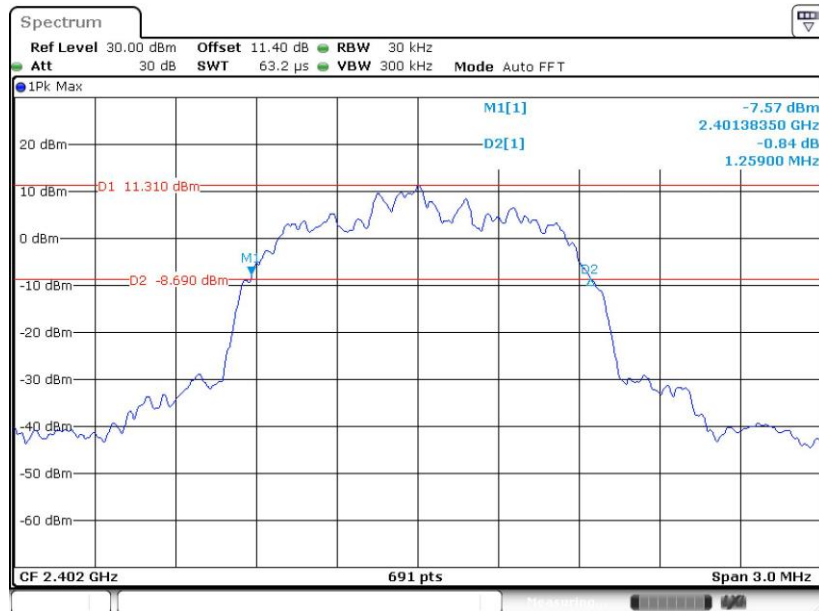

Date: 30.DEC.2020 00:01:03




20 dB Bandwidth Plot on Channel 39

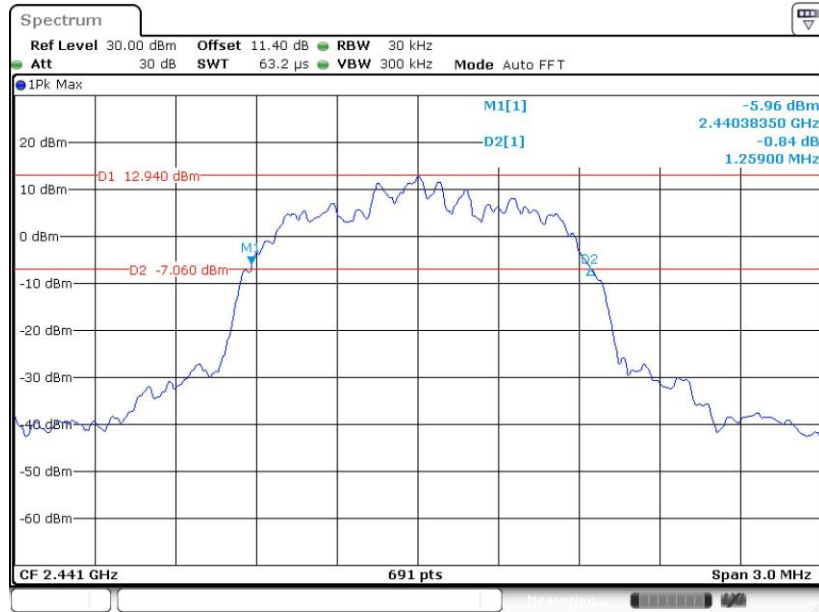

Date: 30.DEC.2020 00:09:34

20 dB Bandwidth Plot on Channel 78

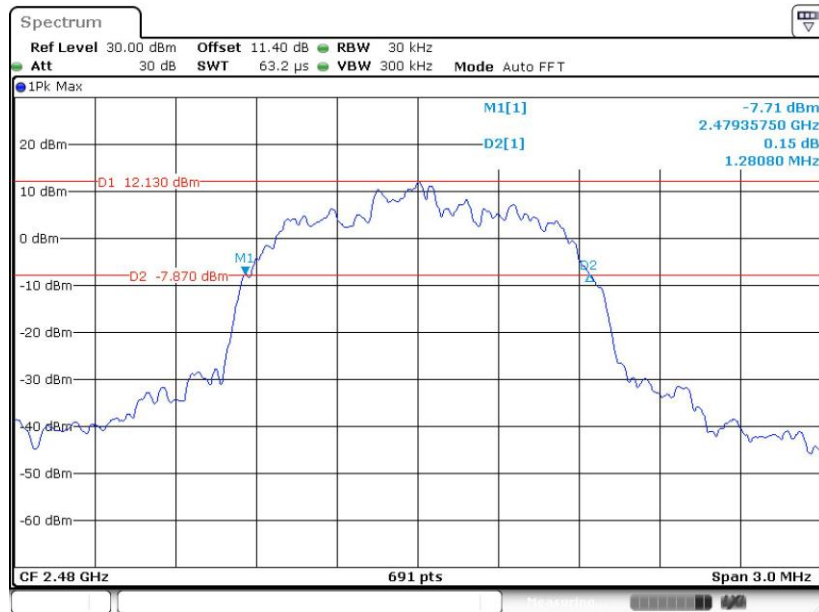


Date: 30.DEC.2020 00:15:22




<3Mbps>

20 dB Bandwidth Plot on Channel 00

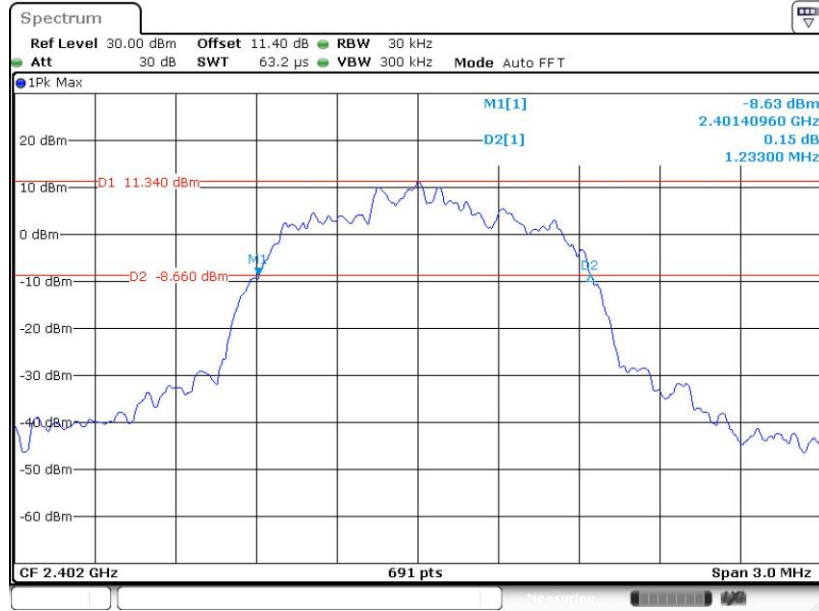

Date: 30.DECEMBER.2020 00:25:06


20 dB Bandwidth Plot on Channel 39

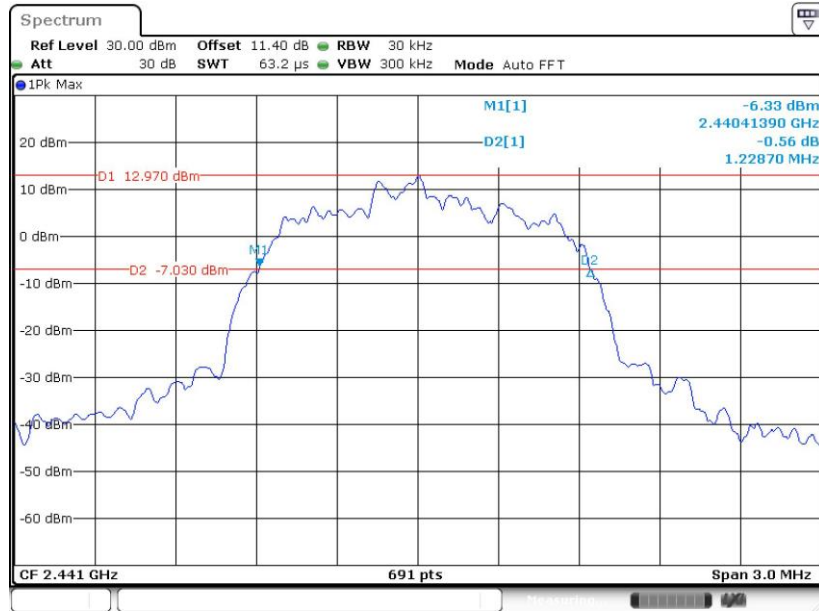

Date: 30.DECEMBER.2020 00:29:15



20 dB Bandwidth Plot on Channel 78

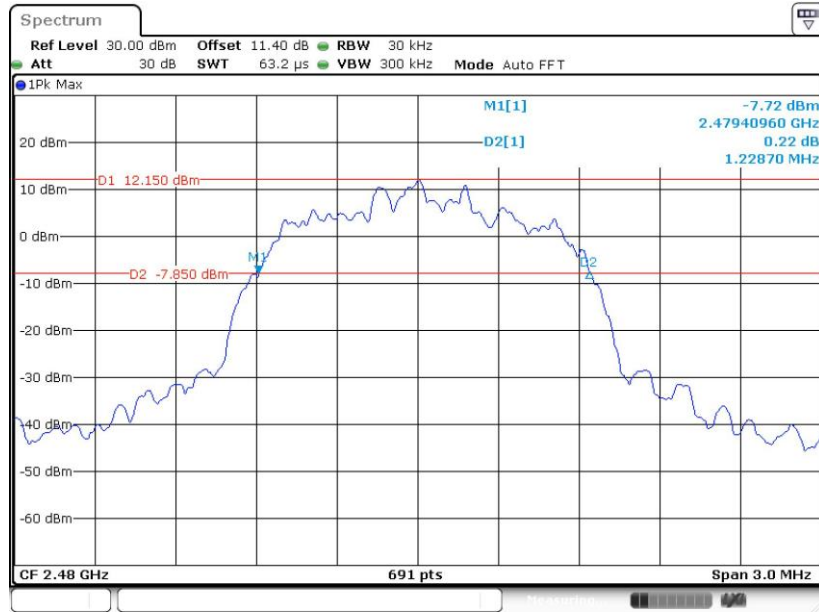


Date: 30.DEC.2020 00:30:12



<Normal Mode with Ant. 5>


<1Mbps>

20 dB Bandwidth Plot on Channel 00

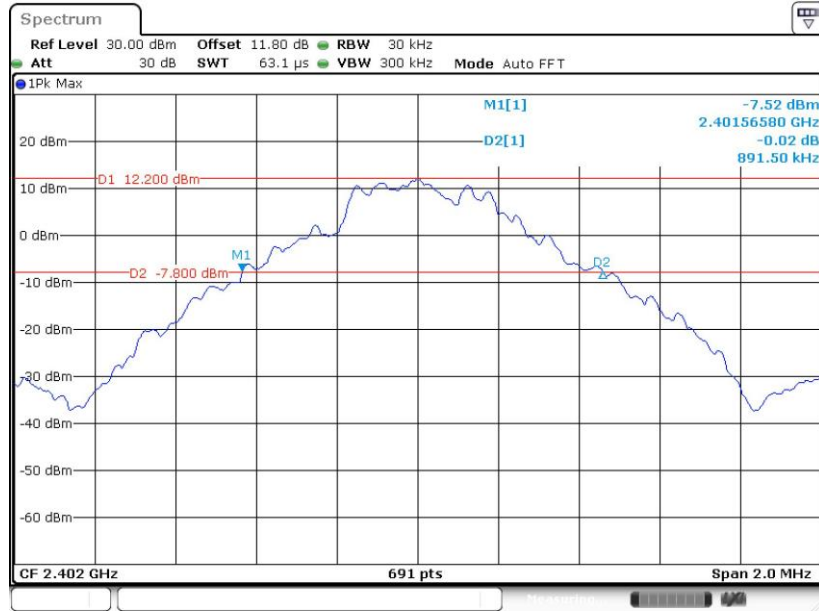

Date: 5.JAN.2021 00:34:10


20 dB Bandwidth Plot on Channel 39

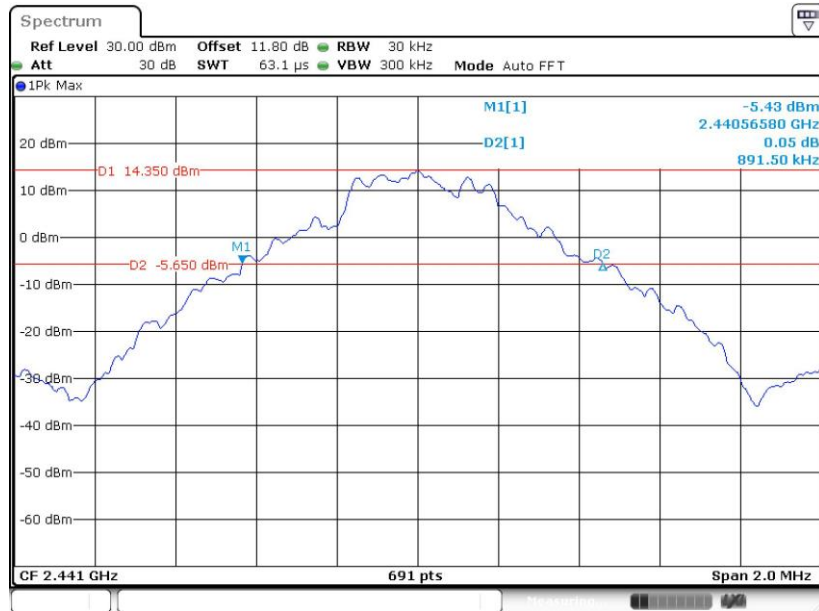

Date: 5.JAN.2021 00:38:57




20 dB Bandwidth Plot on Channel 78

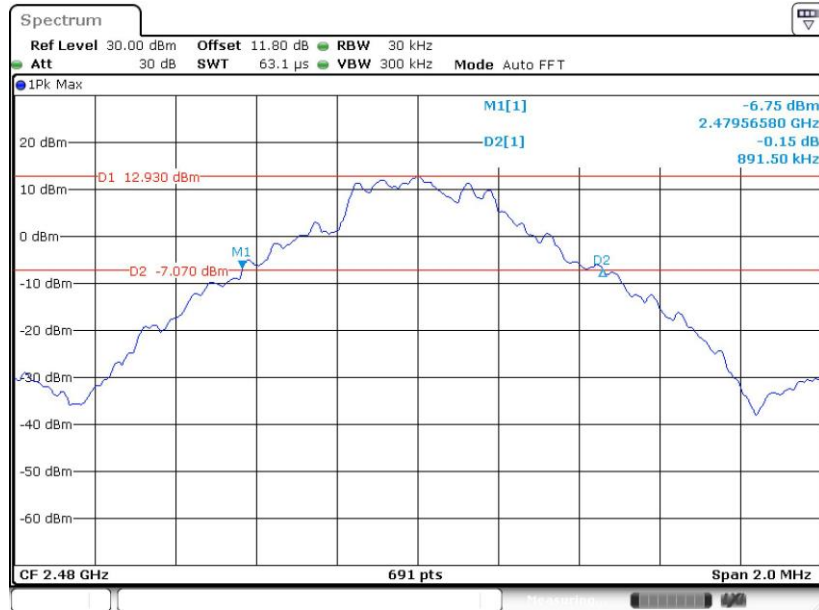

Date: 5.JAN.2021 00:42:38

<2Mbps>


20 dB Bandwidth Plot on Channel 00

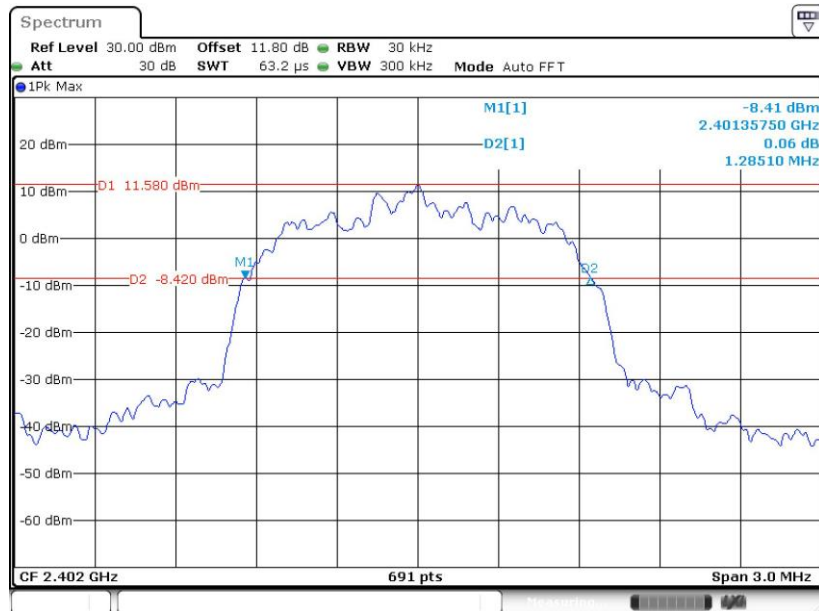

Date: 5.JAN.2021 00:47:01




20 dB Bandwidth Plot on Channel 39

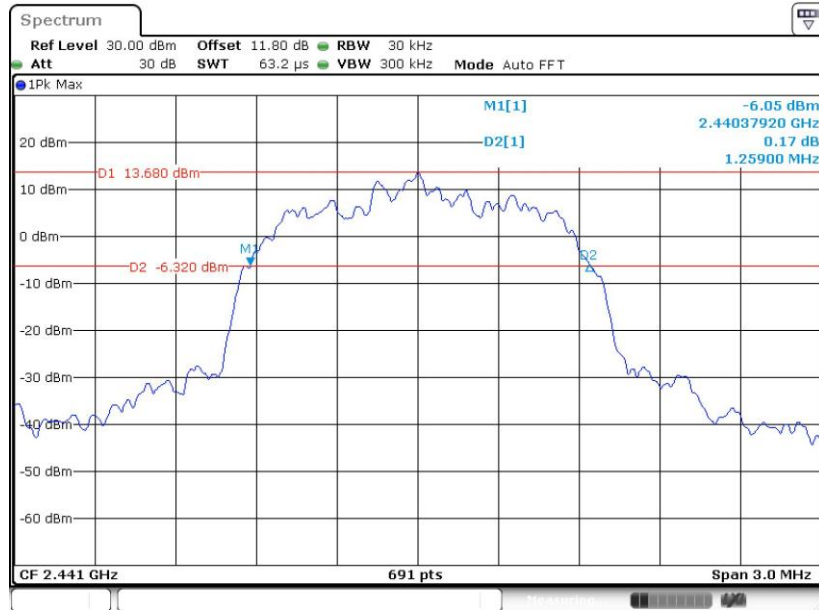

Date: 5.JAN.2021 00:51:58

20 dB Bandwidth Plot on Channel 78

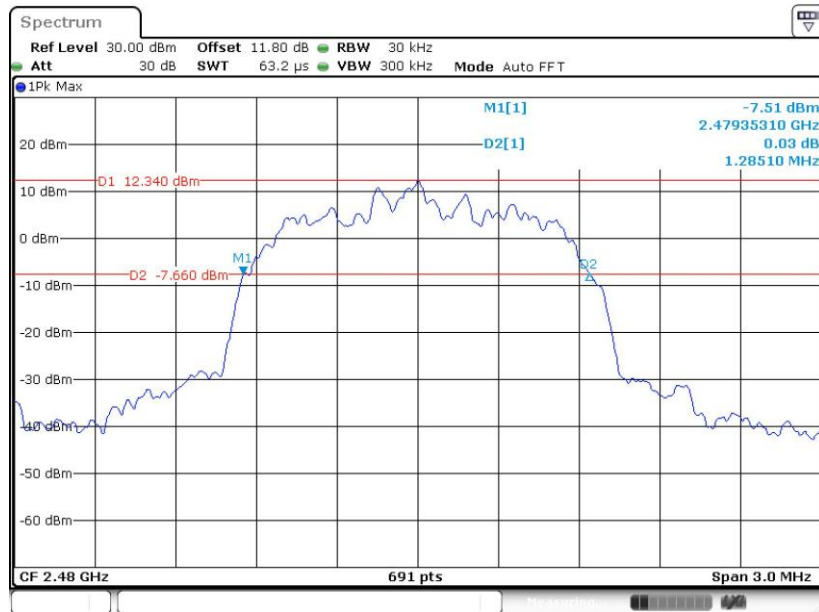

Date: 5.JAN.2021 00:57:26



<3Mbps>

20 dB Bandwidth Plot on Channel 00



Date: 5.JAN.2021 01:02:01


20 dB Bandwidth Plot on Channel 39



Date: 5.JAN.2021 01:08:27



20 dB Bandwidth Plot on Channel 78

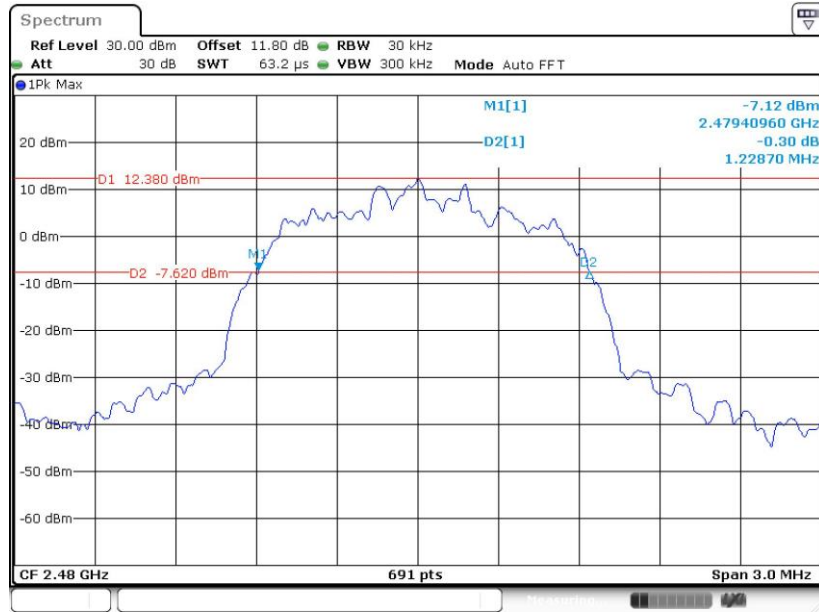


Date: 5.JAN.2021 01:12:13



<Camera Mode with Ant. 6>


<1Mbps>

20 dB Bandwidth Plot on Channel 00

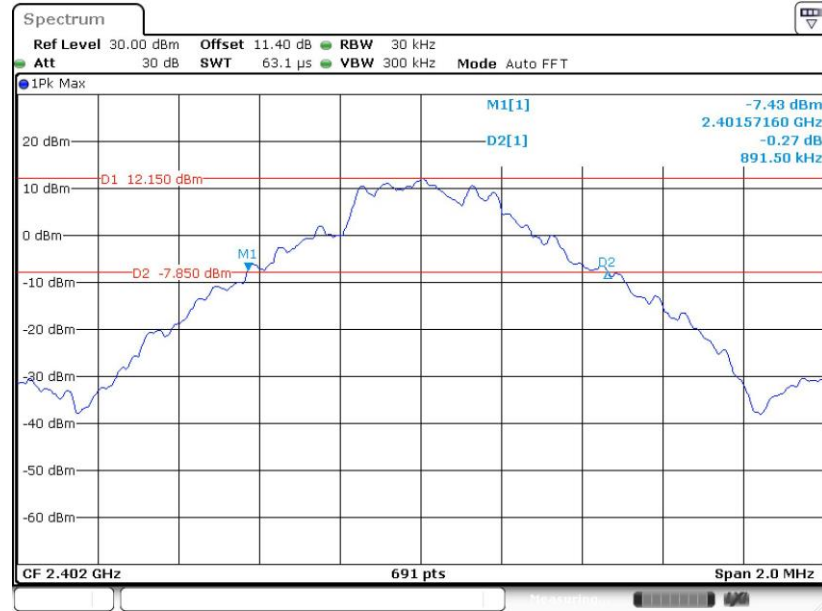

Date: 30.DEC.2020 20:15:45


20 dB Bandwidth Plot on Channel 39

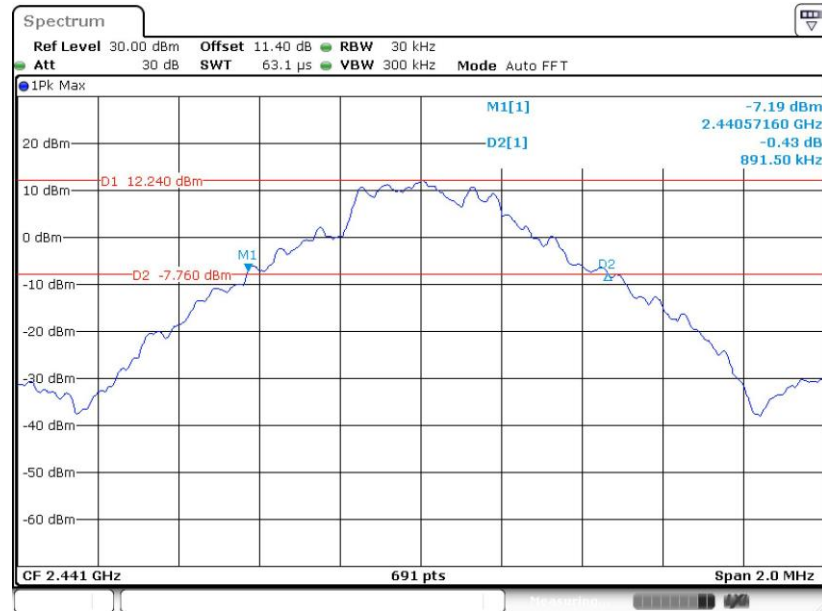

Date: 30.DEC.2020 21:00:15




20 dB Bandwidth Plot on Channel 78

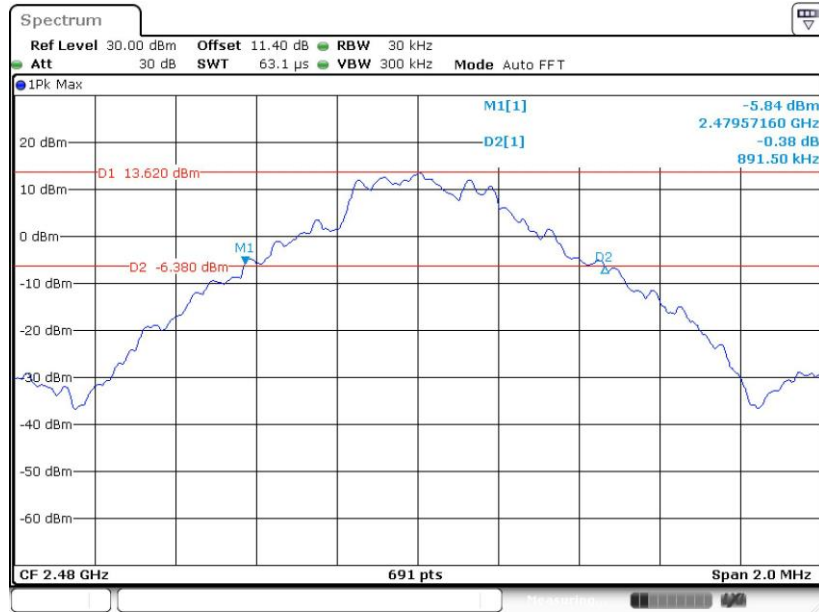

Date: 30.DEC.2020 21:02:45

<2Mbps>


20 dB Bandwidth Plot on Channel 00

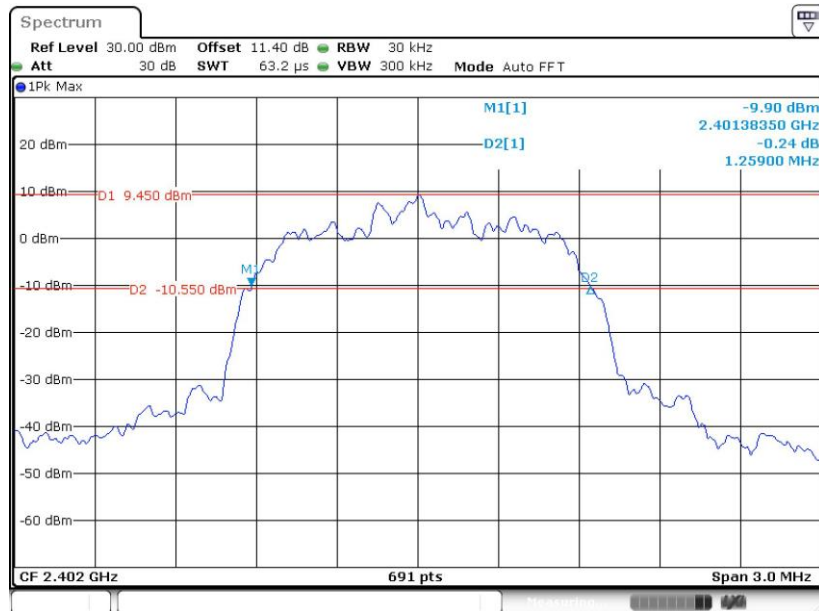

Date: 30.DEC.2020 21:07:09




20 dB Bandwidth Plot on Channel 39

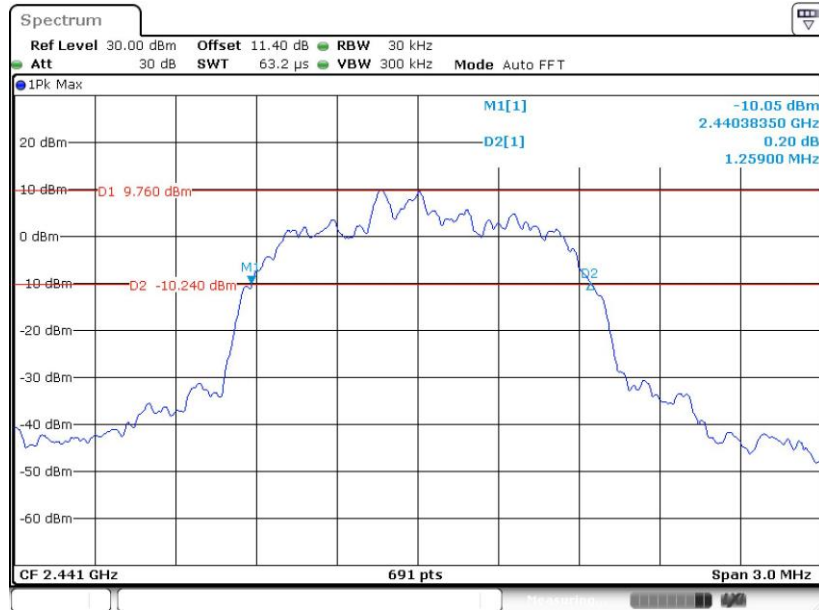

Date: 30.DEC.2020 21:16:23

20 dB Bandwidth Plot on Channel 78

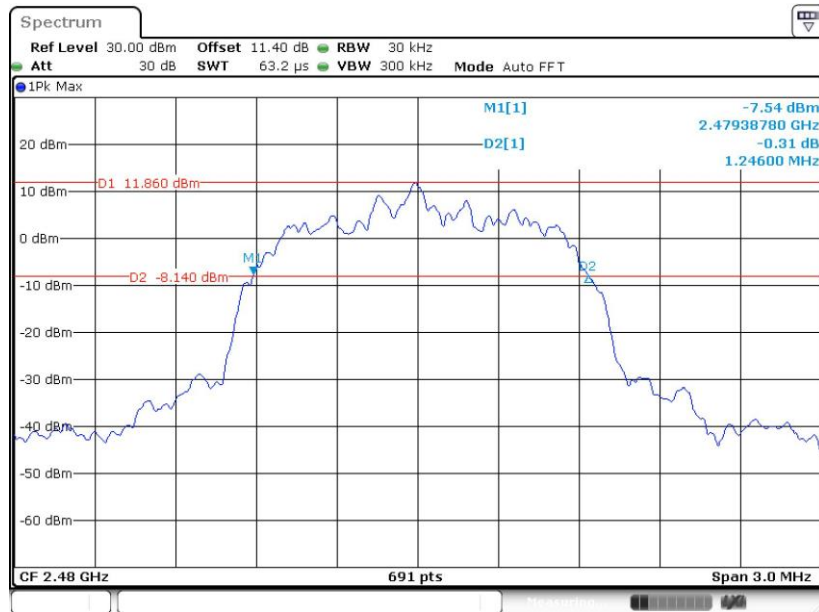


Date: 30.DEC.2020 21:21:34




<3Mbps>

20 dB Bandwidth Plot on Channel 00

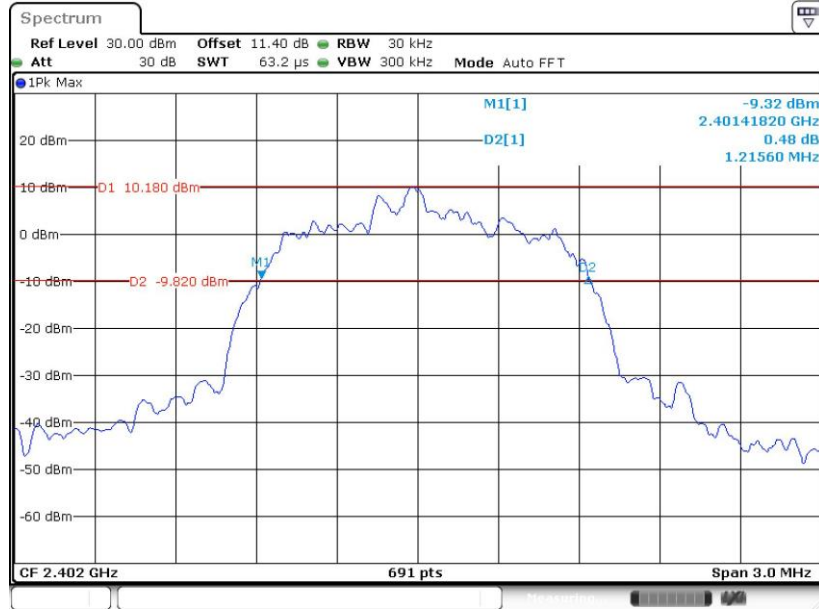

Date: 30.DEC.2020 21:34:30


20 dB Bandwidth Plot on Channel 39

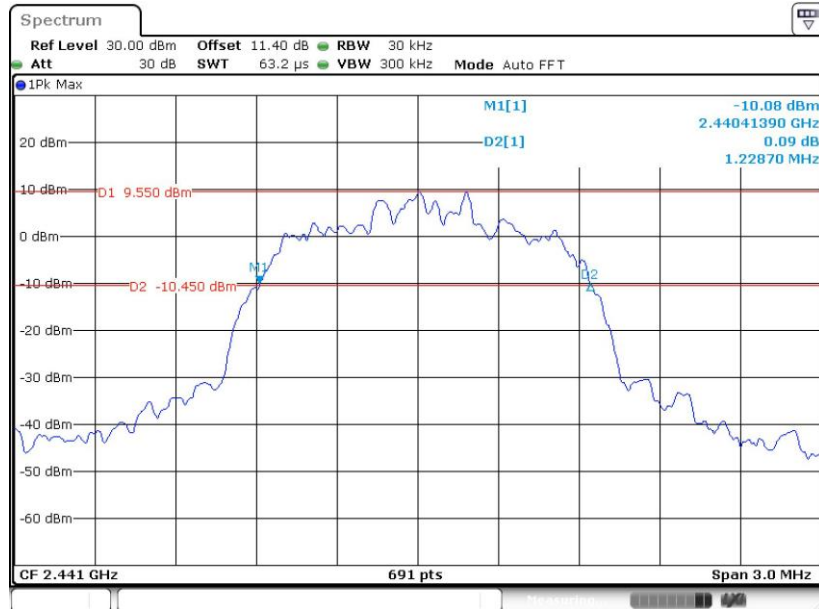

Date: 30.DEC.2020 21:59:59



20 dB Bandwidth Plot on Channel 78

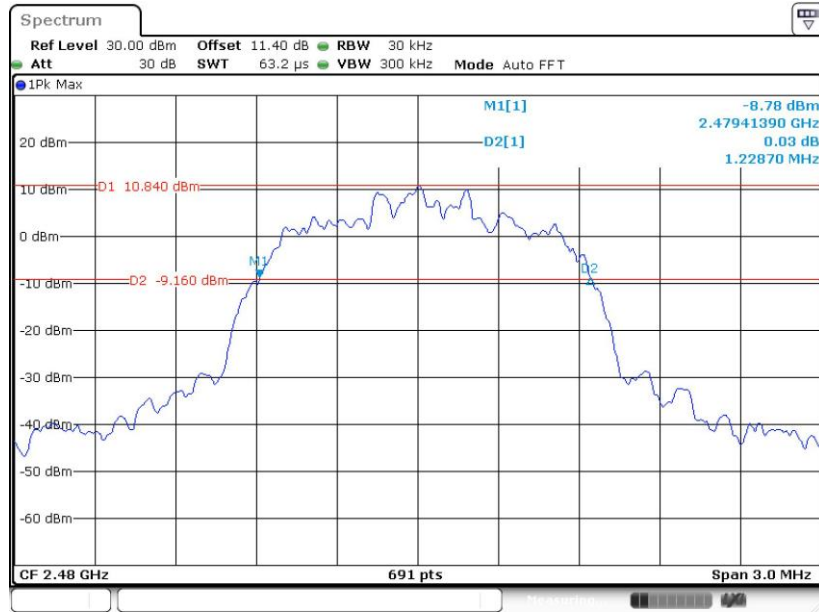

Date: 30.DEC.2020 22:06:00



3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

<Normal Mode with Ant. 4>

<1Mbps>

99% Occupied Bandwidth Plot on Channel 00



Date: 29.DEC.2020 23:46:00



99% Occupied Bandwidth Plot on Channel 39



Date: 29.DEC.2020 23:49:42

99% Occupied Bandwidth Plot on Channel 78




Date: 29.DEC.2020 23:57:24




<2Mbps>

99% Occupied Bandwidth Plot on Channel 00

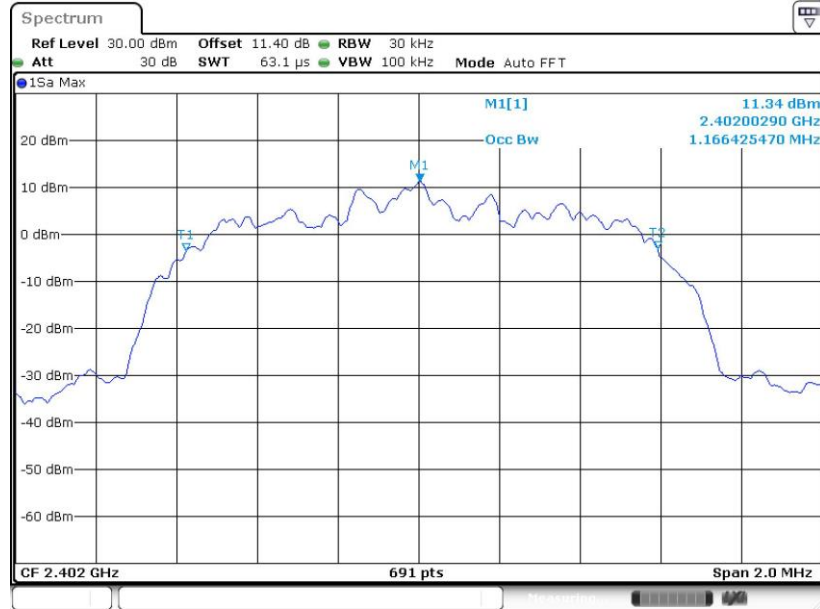


99% Occupied Bandwidth Plot on Channel 39

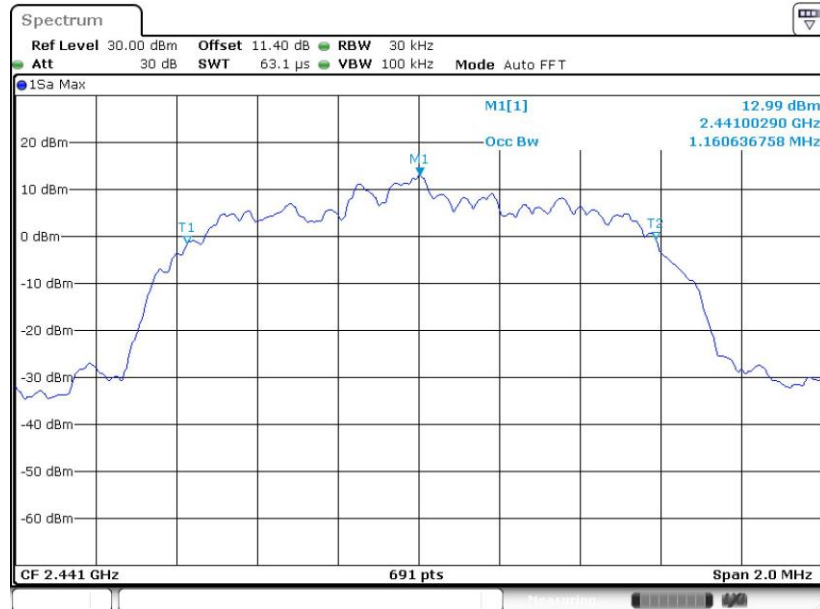




99% Occupied Bandwidth Plot on Channel 78

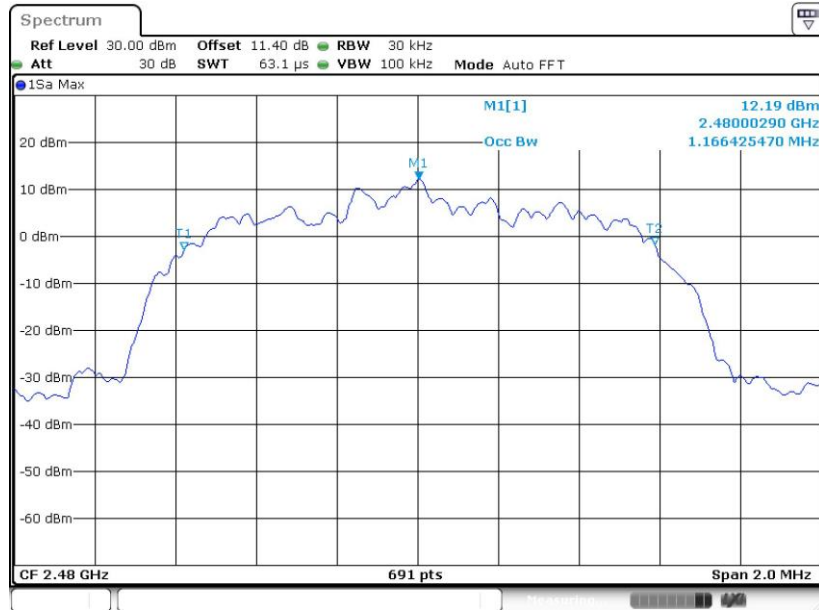

Date: 30.DEC.2020 00:16:20

<3Mbps>


99% Occupied Bandwidth Plot on Channel 00

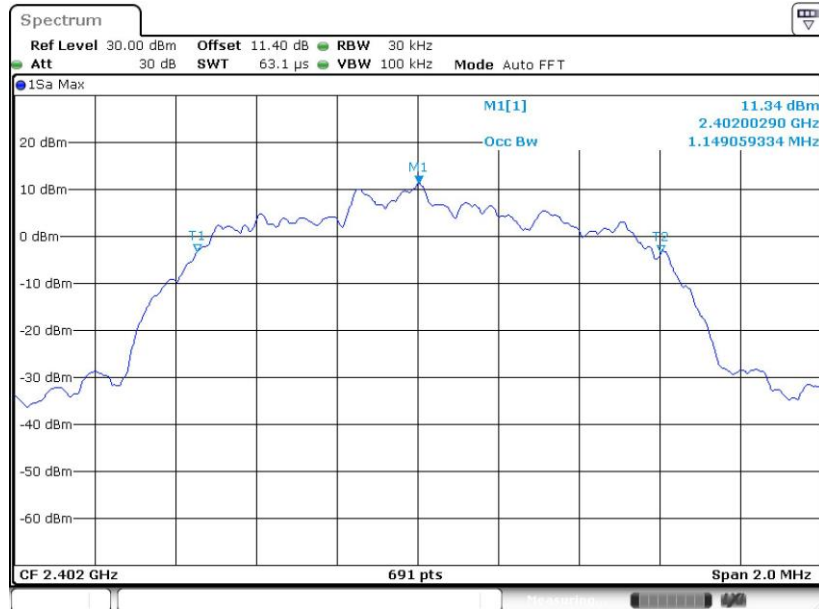

Date: 30.DEC.2020 00:21:19




99% Occupied Bandwidth Plot on Channel 39

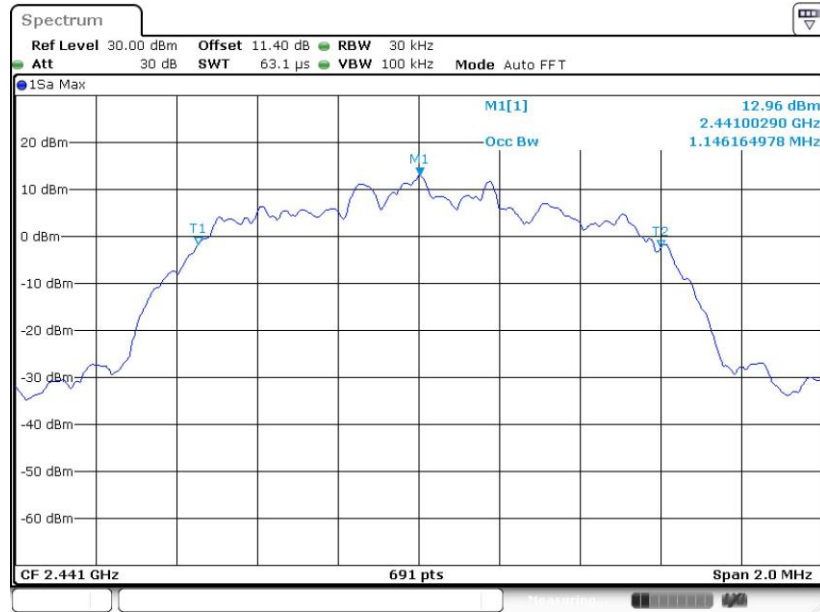

Date: 30.DEC.2020 00:26:34

99% Occupied Bandwidth Plot on Channel 78

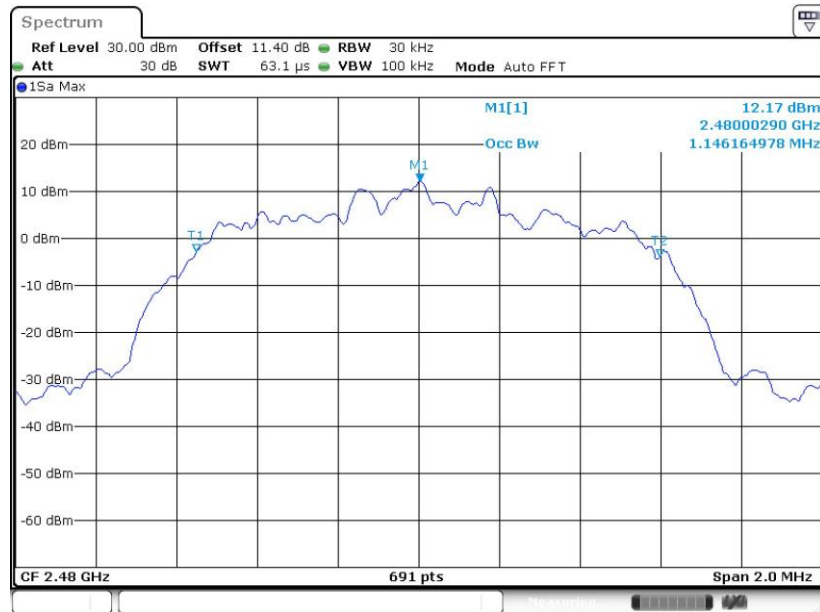

Date: 30.DEC.2020 00:31:09