

FCC TEST REPORT

for

47 CFR Part 15 Subpart C

Equipment : ASUS J201S Dual-Band GPRS Mobile Phone
Trade Name : ASUS
Model No. : J201S
FCC ID : MSQJ201S
Filing Type : Certification
Applicant : ASUSTek COMPUTER INC.
No. 15, Li-Te Rd., Peitou, Taipei, Taiwan

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**
- The data shown in this test report were carried out on Oct. 03, 2005 at **Sporton International Inc. LAB.**



Dr. Daniel Lee
EMC/SAR Director

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

Rev. 01



Table of Contents

History of this test reportii

1. General Description of Equipment under Test..... 1

 1.1.Applicant..... 1

 1.2.Manufacturer 1

 1.3.Basic Description of Equipment under Test..... 1

 1.4.Feature of Equipment under Test 1

2. Test Configuration of Equipment under Test 2

 2.1.Test Manner 2

 2.2.Test Mode 2

 2.3.Connection Diagram of Test System 3

 2.4.Ancillary Equipment List 3

3. RF Utility 4

4. General Information of Test..... 5

 4.1.Test Voltage 5

 4.2.Standard for Methods of Measurement..... 5

 4.3.Test in Compliance with 5

 4.4.Frequency Range Investigated 5

 4.5.Test Distance 5

5. Report of Measurements and Examinations 6

 5.1.List of Measurements and Examinations 6

 5.2.Hopping Channel Separation 7

 5.3.Number of Hopping Frequency 11

 5.5 Dwell Time of Each Frequency within a 30 Seconds Period 17

 5.6 Output Power 37

 5.7 100kHz Bandwidth of Frequency Band Edges 41

 5.8 Conducted Emission 45

 5.9 Radiated Emission Measurement 50

 5.10 Antenna Requirements..... 56

6. List of Measuring Equipments Used 57

7. Uncertainty Evaluation..... 58

Appendix A. External Product Photograph

Appendix B. Internal Photograph

Appendix C. Setup Photograph



History of this test report

Report No.: FR592703-01

Report Issue Date: Nov. 25, 2005

Original Report Issue Date	Description



1. General Description of Equipment under Test

1.1. Applicant

ASUSTek COMPUTER INC.
No. 15, Li-Te Rd., Peitou, Taipei, Taiwan

1.2. Manufacturer

ASUSTek COMPUTER INC.
No. 15, Li-Te Rd., Peitou Taipei, Taiwan

1.3. Basic Description of Equipment under Test

Equipment : ASUS J201S Dual-Band GPRS Mobile Phone
Trade Name : ASUS
Model No. : J201S
FCC ID : MSQJ201S
Power Supply Type : Switching
AC Power Cord : AC 120V, Non-Shielded, Wall-mount, 1.8 meter, 2 pin

1.4. Feature of Equipment under Test

Product Feature & Specification			
1. Modulation Type/Data Rate	GFSK		
2. Frequency Range.	2400 MHz ~ 2483.5 MHz		
Number of Channels	79		
3. Carrier Frequency of each channel	2402+ n*1 MHz, n= 0~78		
4. Channel Spacing	1 MHz		
5. Maximum Output Power to Antenna (Normal condition)	0.24 dBm		
6. Type of Antenna Connector	N/A		
7. Antenna Type	PIFA Antenna		
8. Antenna Gain	0 dBi		
9. HW Version	V1.02		
10. SW Version	V4.0.0		
11. Function Type	Transmitter		Transceiver V
12. Power Rating (DC/AC , Voltage)	3.8V/250mA		



2. Test Configuration of Equipment under Test

2.1. Test Manner


- a. The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.
- b. For spurious emission below 1GHz, only one channel of each application was tested because it is not related to channel selection.
- c. The EUT is programmed to transmit signal continuously for all testings.
- d. Frequency range investigated: conduction 150 kHz to 30 MHz, radiation 30 MHz to 25000MHz.

2.2. Test Mode


Application	Bluetooth
Radiated Emission	Mode 1: Tx_CH00_2402 MHz Mode 2: Tx_CH39_2441 MHz Mode 3: Tx_CH78_2480 MHz
Conducted Emission	Mode 1: PCS 1900 Idle Mode + MP3 Player + Earphone + BT on Mdde 2: PCS 1900 Idle Mode + Camera + Earphone + BT on

2.3. Connection Diagram of Test System

<Radiation Emission>

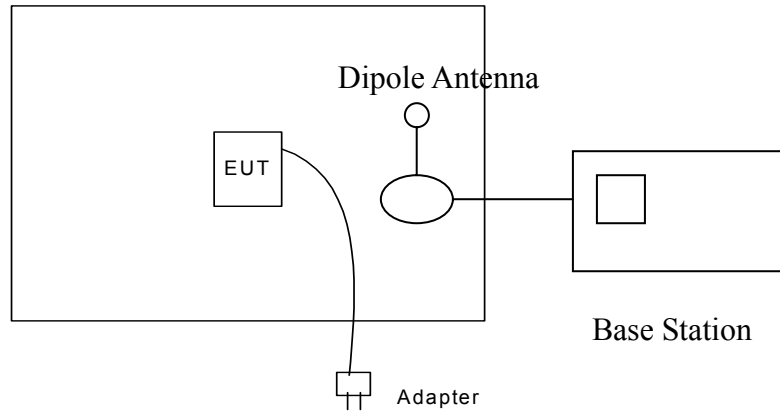

<Conducted Emission>

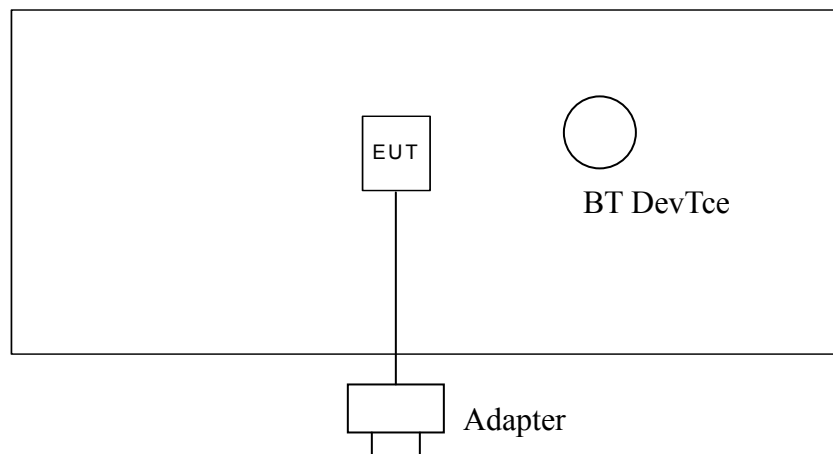

2.4. Ancillary Equipment List

N/A



3. RF Utility

The EUT is in BT Link mode With BT device for conducted emission or in BT continuous Tx Mode controlled by base station simulator for radiation emission.



4. General Information of Test

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055
Test Site No : CO01-HY, 03CH06-HY

4.1. Test Voltage

AC 120V

4.2. Standard for Methods of Measurement

ANSI C63.4-2003

4.3. Test in Compliance with

47 CFR Part 15 Subpart C

4.4. Frequency Range Investigated

Conduction: from 150 kHz to 30 MHz
Radiation: from 30 MHz to 25000MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 m.



5. Report of Measurements and Examinations

5.1. List of Measurements and Examinations

FCC Rule	Description of Test	Result	Section
15.247(a)(1)	Hopping Channel Separation	Pass	5.2
15.247(a)(1)(iii)	Number of Hopping Frequency Used	Pass	5.3
15.247(a)(1)	Hopping Channel Bandwidth	Pass	5.4
15.247(a)(1)(iii)	Dwell Time of Each Frequency within a 30 Second Period	Pass	5.5
15.247(b)(1)	Output Power	Pass	5.6
15.247(c)	100kHz Bandwidth of Frequency Band Edges	Pass	5.7
15.207	Conducted Emission	Pass	5.8
15.209	Radiated Emission	Pass	5.9
15.203	Antenna Requirement	Pass	5.10

5.2. Hopping Channel Separation


5.2.1. Measuring Instruments :

As described in chapter 6 of this test report.

5.2.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer directly.
2. Set RBW of spectrum analyzer to 30kHz and VBW to 100kHz.
3. The Hopping Channel Separation is defined as the channel is separated with the next channel.

5.2.3. Test Setup Layout :

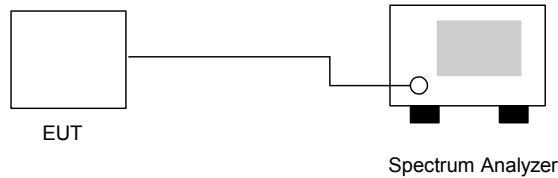

5.2.4. Test Result : The spectrum analyzer plots are attached as below

- Temperature: 24°C
- Relative Humidity: 52%
- Test Engineer : Jay


Channel	Frequency (MHz)	Hopping Channel Separation (MHz)	Limits (MHz)	Plot Ref. No.
00	2402	1.0	0.874	Mode 1
39	2441	1.0	0.868	Mode 2
78	2480	1.0	0.874	Mode 3

Remark: Limit is the greater one of 25kHz or the 20dB bandwidth of the hopping channel.



5.2.5 Hopping Channel Separation

Mode 1: CH00 (2402MHz)

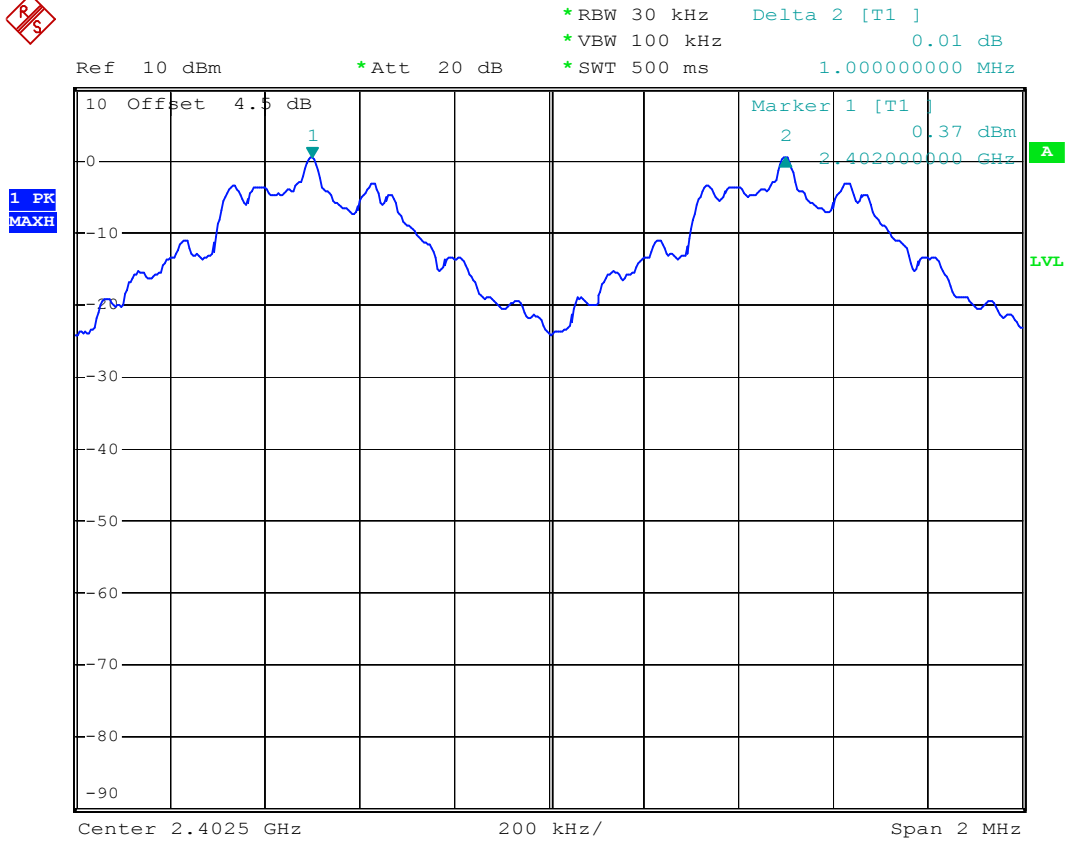

Date: 3.OCT.2005 16:34:29



Mode 2: CH39 (2441MHz)




*RBW 30 kHz Delta 2 [T1]
 *VBW 100 kHz 0.01 dB
 *SWT 500 ms 1.000000000 MHz

Ref 10 dBm

*Att 20 dB

1 PK
MAXH

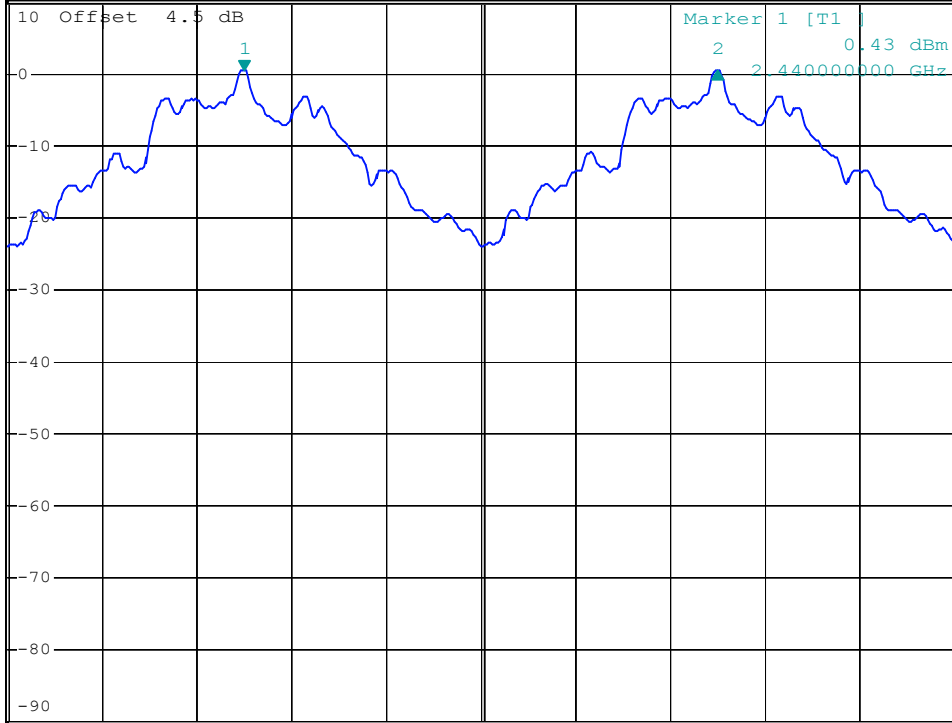

Center 2.4405 GHz

200 kHz/

Span 2 MHz

Date: 3.OCT.2005 16:36:43



Mode 3: CH78 (2480MHz)




*RBW 30 kHz Delta 2 [T1]
 *VBW 100 kHz 0.02 dB
 *SWT 500 ms 1.000000000 MHz

Ref 10 dBm

*Att 20 dB

1 PK
MAXH

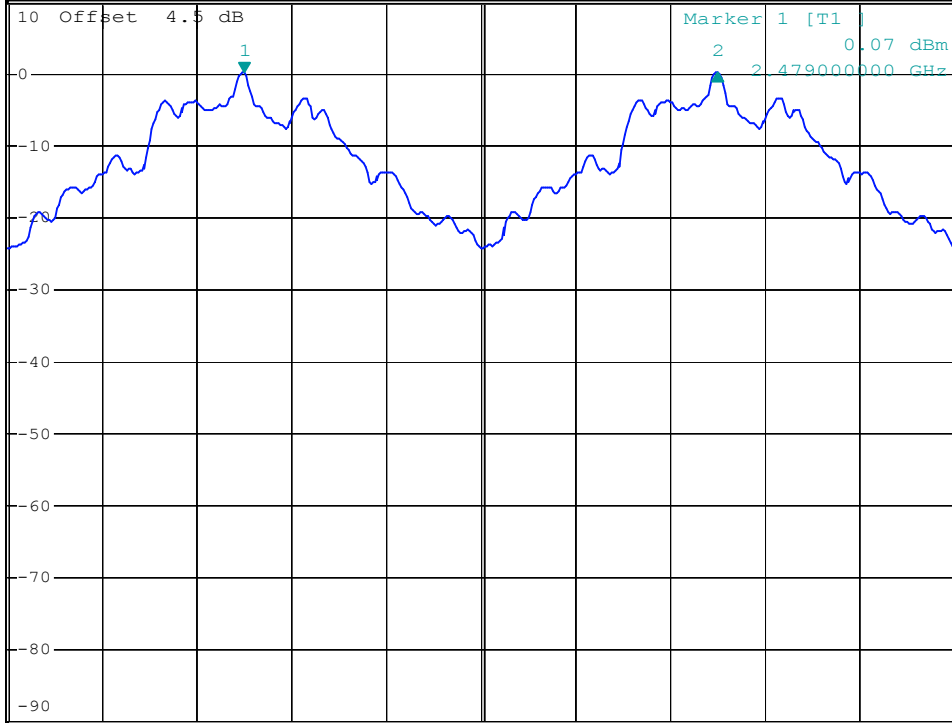

Center 2.4795 GHz

200 kHz/

Span 2 MHz

Date: 3.OCT.2005 16:38:28

5.3. Number of Hopping Frequency


5.3.1. Measuring Instruments :

As described in chapter 6 of this test report.

5.3.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer directly.
2. Set RBW of spectrum analyzer to 100kHz and VBW to 100kHz.
3. The number of hopping frequency used is defined as the device has the numbers of total channel.

5.3.3. Test Setup Layout :

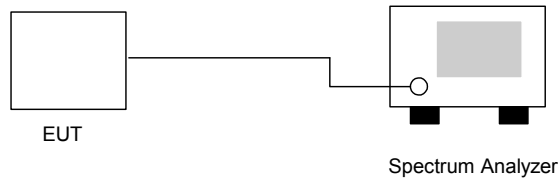


5.3.4. Test Result : See spectrum analyzer plots below

- Temperature: 24°C
- Relative Humidity: 52%
- Test Engineer : Jay

Number of Hopping Frequency (Channel)	Limits (Channel)
79	15



5.3.5 Number of Hopping Frequency

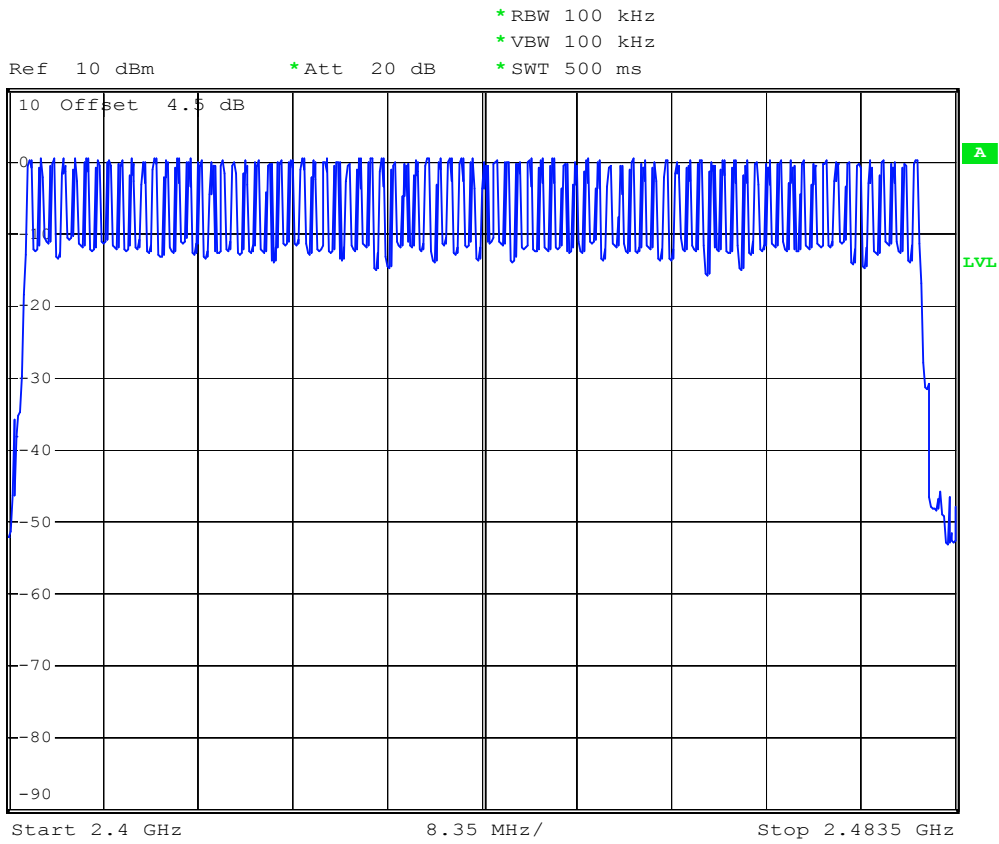

Date: 3.OCT.2005 16:56:55

5.4 Hopping Channel Bandwidth


5.4.1 Measuring Instruments :

As described in chapter 6 of this test report.

5.4.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer directly.
2. Set RBW of spectrum analyzer to 30kHz and VBW to 300kHz.
3. The Hopping Channel bandwidth is defined as the frequency range where the power is higher than peak power minus 20dB.

5.4.3 Test Setup Layout :

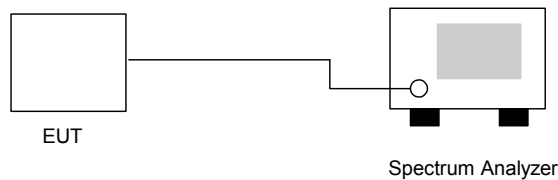

5.4.4 Test Result : See spectrum analyzer plots below

- Temperature: 24°C
- Relative Humidity: 52%
- Test Engineer : Jay

Channel	Frequency (MHz)	Hopping Channel Bandwidth (MHz)	Limits (MHz)	Plot Ref. No.
00	2402	0.874	1.0	Mode 1
39	2441	0.868	1.0	Mode 2
78	2480	0.874	1.0	Mode 3




5.4.5 Hopping Channel Bandwidth

Mode 1: CH00 (2402MHz)



*RBW 30 kHz Delta 2 [T1]
 *VBW 300 kHz -0.01 dB
 *SWT 500 ms 874.00000000 kHz
 Ref 10 dBm *Att 20 dB

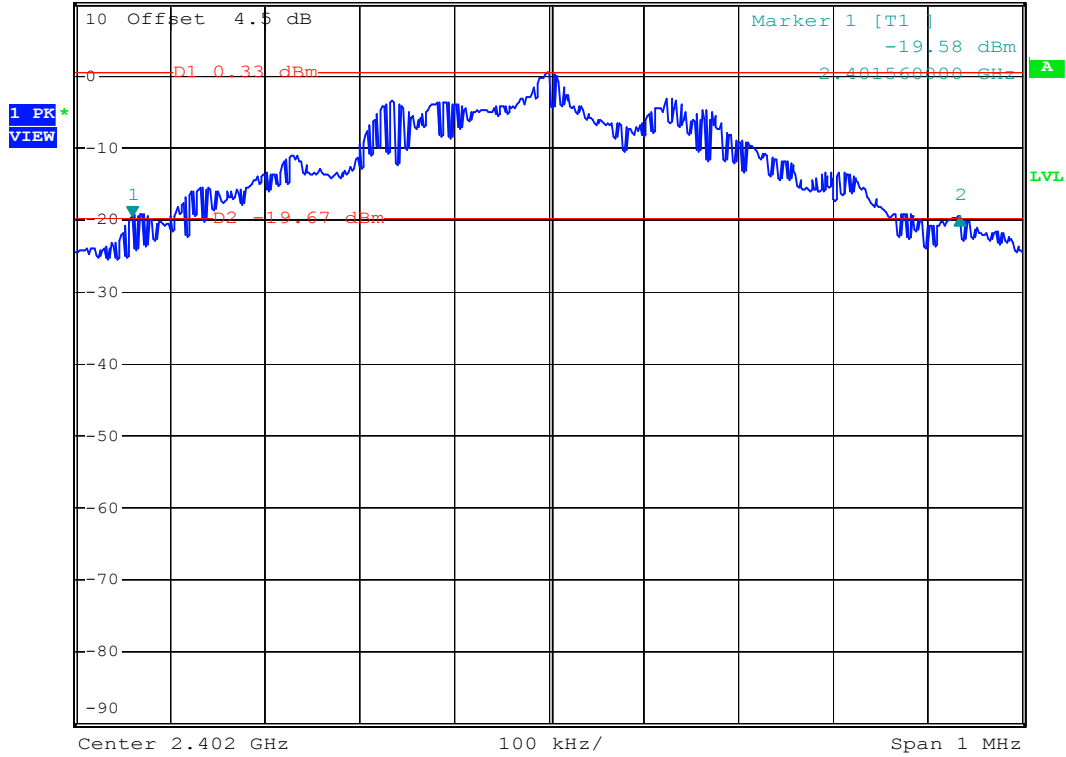


Date: 3.OCT.2005 16:33:44



Mode 2: CH39 (2441MHz)



Ref 10 dBm *Att 20 dB *RBW 30 kHz Delta 2 [T1]
 *VBW 300 kHz -0.26 dB
 *SWT 500 ms 868.000000000 kHz

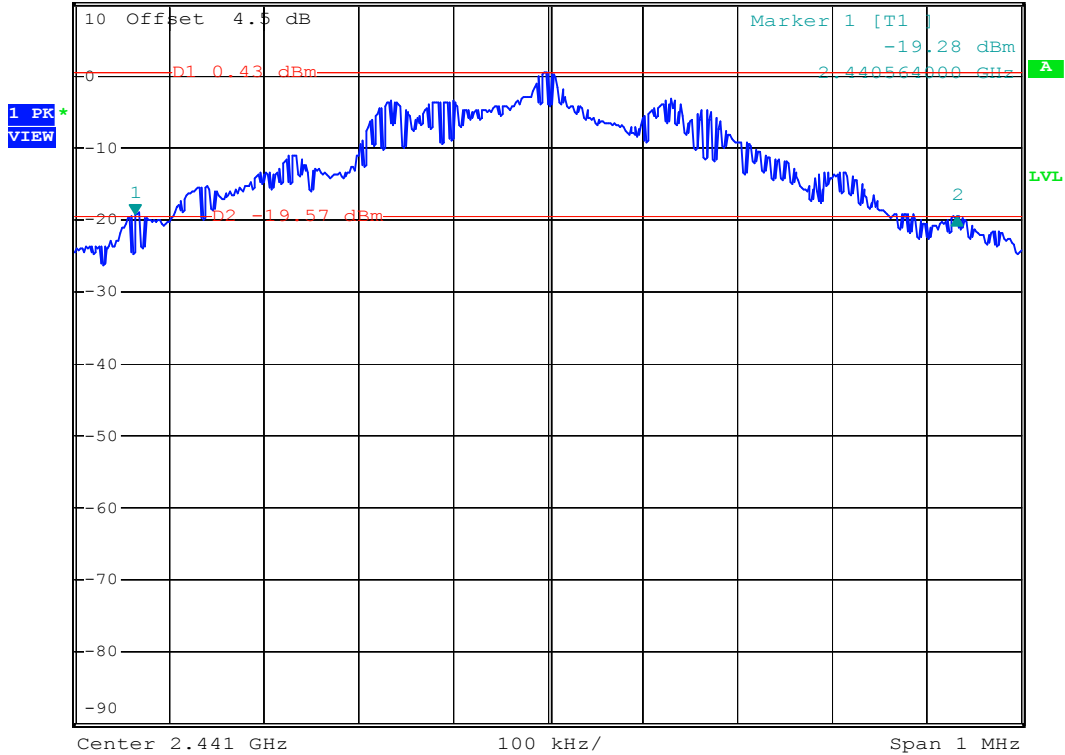


Date: 3.OCT.2005 16:37:33



Mode 3: CH78 (2480MHz)



Ref 10 dBm *Att 20 dB *RBW 30 kHz Delta 2 [T1]
 *VBW 100 kHz -0.06 dB
 *SWT 500 ms 874.000000000 kHz

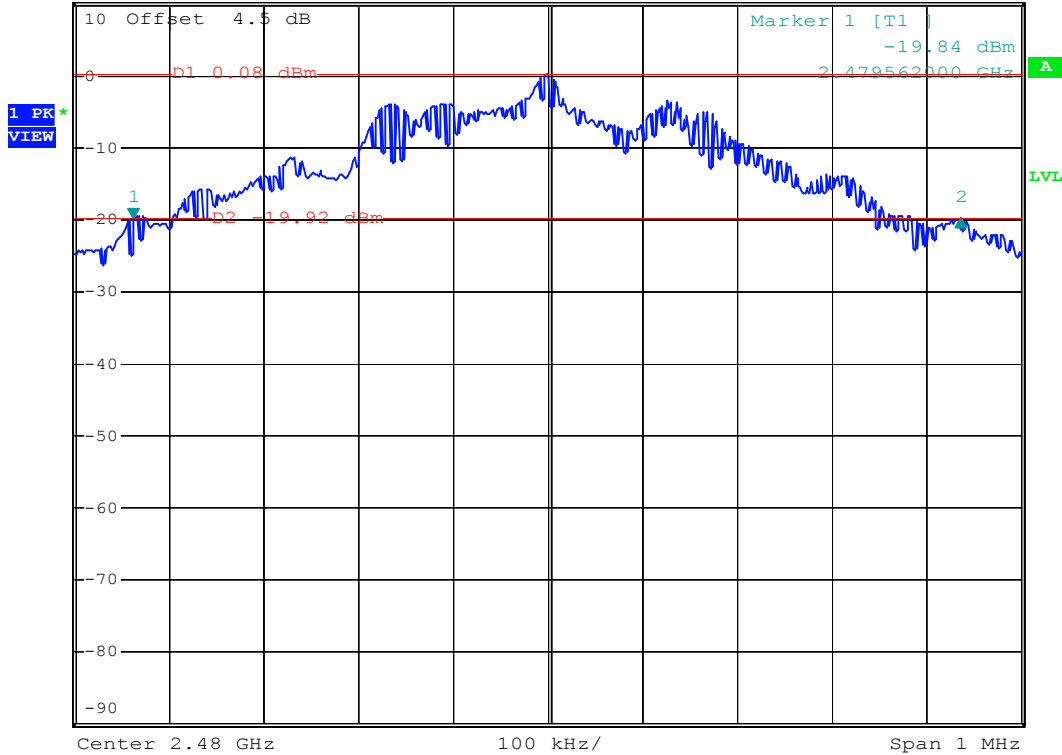

Date: 3.OCT.2005 16:39:26

5.5 Dwell Time of Each Frequency within a 30 Seconds Period


5.5.1 Measuring Instruments :

As described in chapter 6 of this test report.

5.5.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer directly.
2. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
3. Set the center frequency on any frequency would be measured and set the frequency span to zero span.
4. The equation = $30 \cdot (1600/79) \cdot t$ (t = the time duration of one single pulse)

5.5.3 Test Setup Layout :

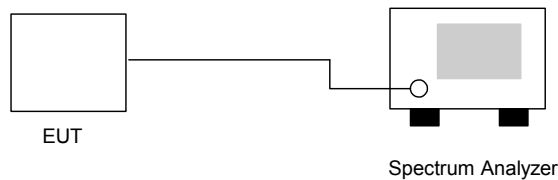

5.5.4 Test Result : See spectrum analyzer plots below

- Temperature: 24°C
- Relative Humidity: 52%
- Test Engineer : Jay

Ch00

Package Mode	Average Hopping Channel	Package Transfer Time (us)	Dwell Time (s)	Limit (s)
DH1	8.6	548	0.149	0.4
DH3	5.4	1818	0.310	0.4
DH5	3.1	3078	0.301	0.4



CH39

Package Mode	Average Hopping Channel	Package Transfer Time (us)	Dwell Time (s)	Limit (s)
DH1	8.9	548	0.154	0.4
DH3	4.7	1810	0.269	0.4
DH5	3.6	3078	0.350	0.4

CH78

Package Mode	Average Hopping Channel	Package Transfer Time (us)	Dwell Time (s)	Limit (s)
DH1	8.8	548	0.152	0.4
DH3	4.5	1818	0.259	0.4
DH5	3.7	3078	0.360	0.4

※ Remark:

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)




5.5.5 Dwell Time


DH1 (CH00)



Ref 10 dBm *Att 20 dB RBW 1 MHz Delta 3 [T1] -0.79 dB
 *VBW 1 MHz SWT 2 ms 1.260000 ms

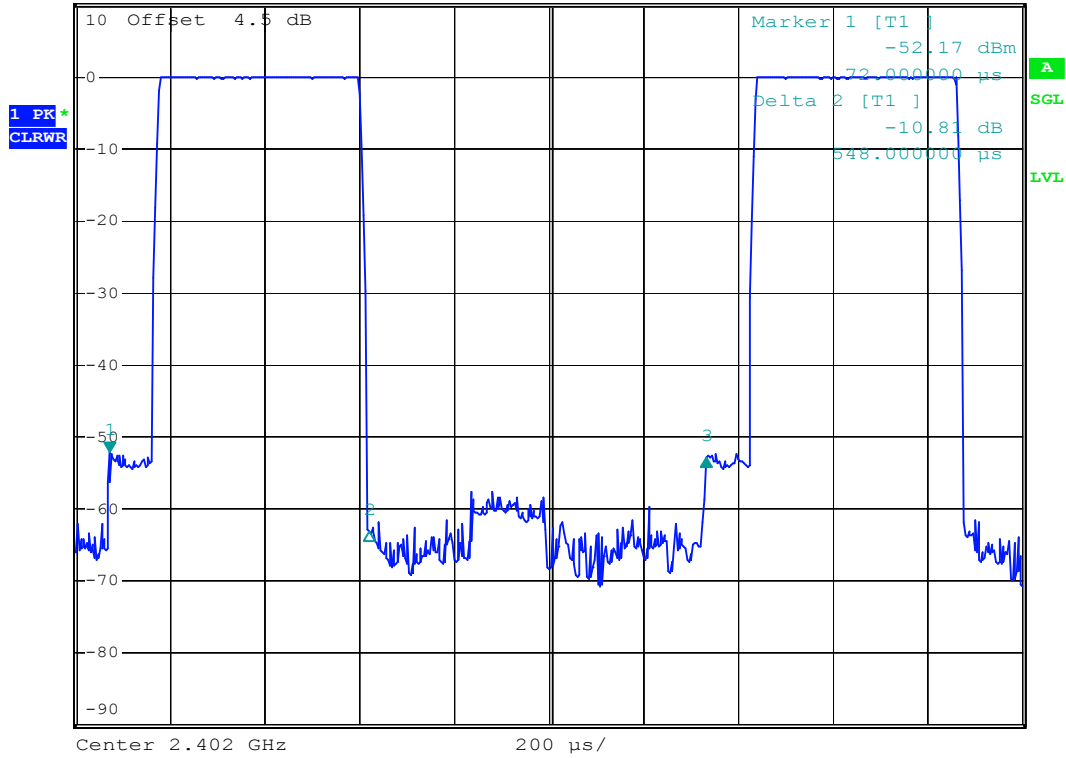

Date: 3.OCT.2005 16:46:03

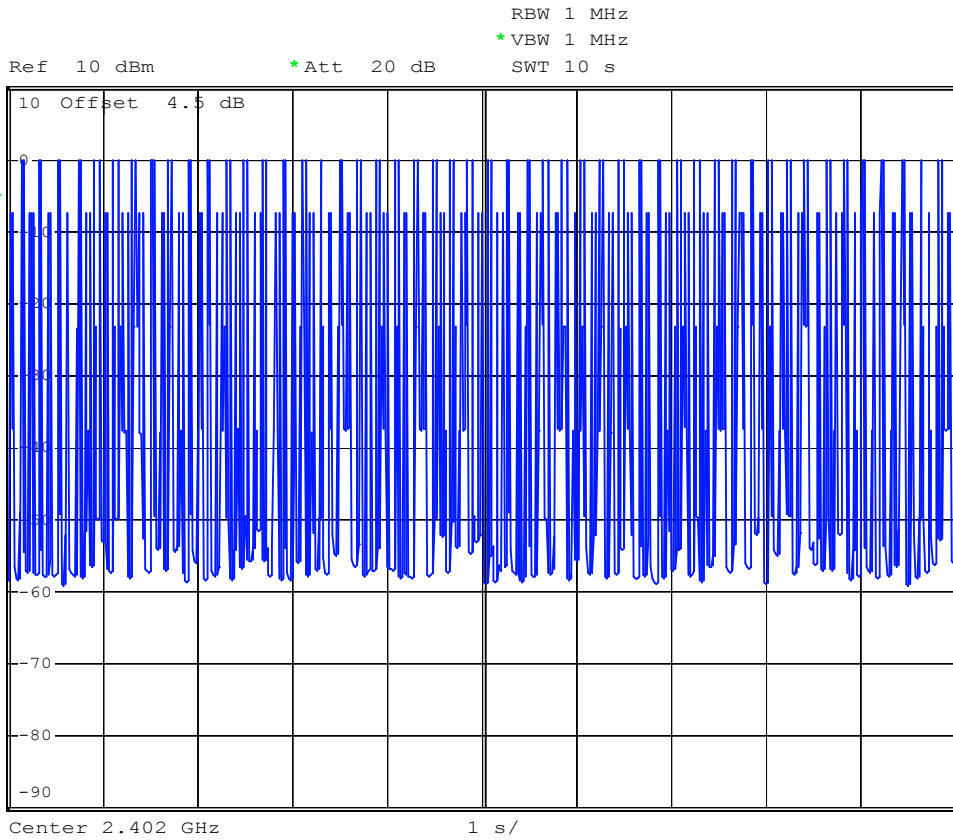


Date: 3.OCT.2005 16:51:56



DH1 (CH39)




RBW 1 MHz Delta 3 [T1]
 *VBW 1 MHz -0.40 dB
 Ref 10 dBm *Att 20 dB SWT 2 ms 1.260000 ms

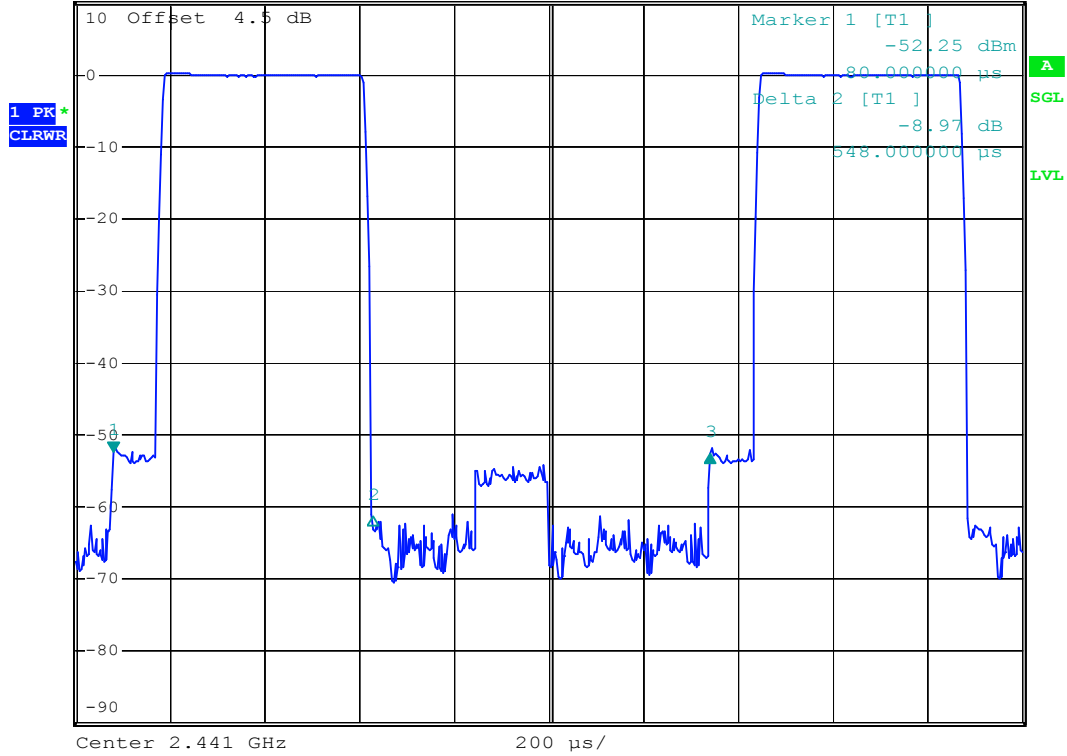

Date: 3.OCT.2005 16:45:34




Ref 10 dBm *Att 20 dB RBW 1 MHz
*VBW 1 MHz SWT 10 s

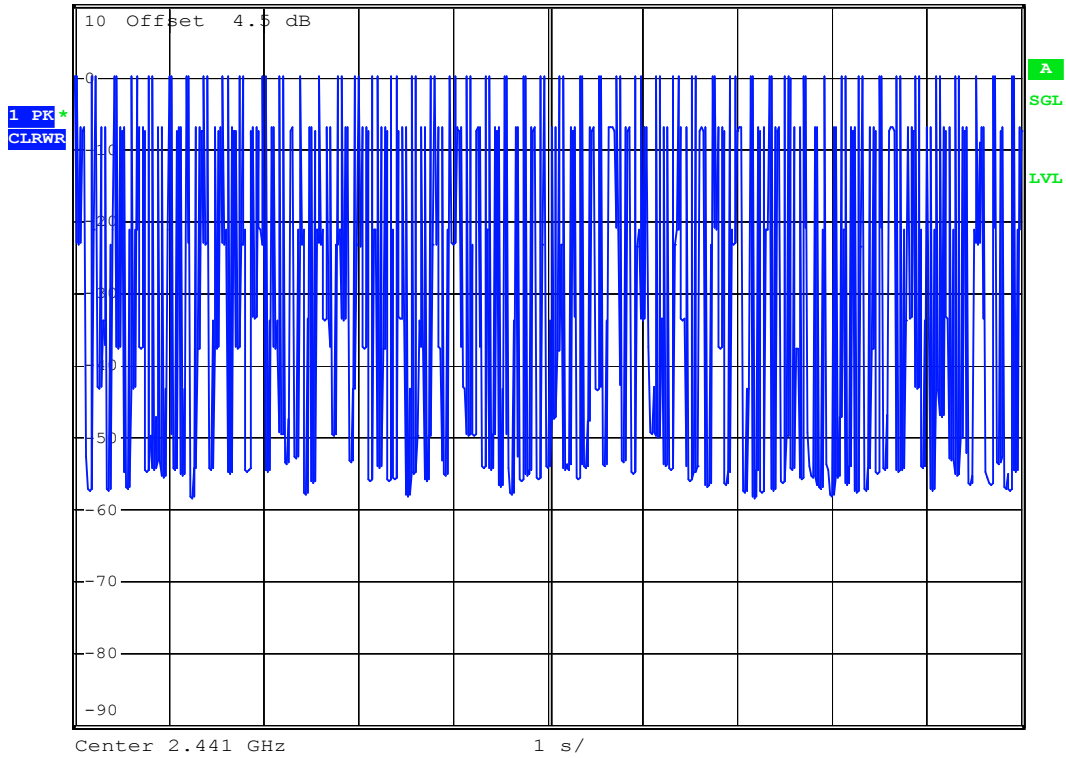

Date: 3.OCT.2005 16:52:16




DH1 (CH78)

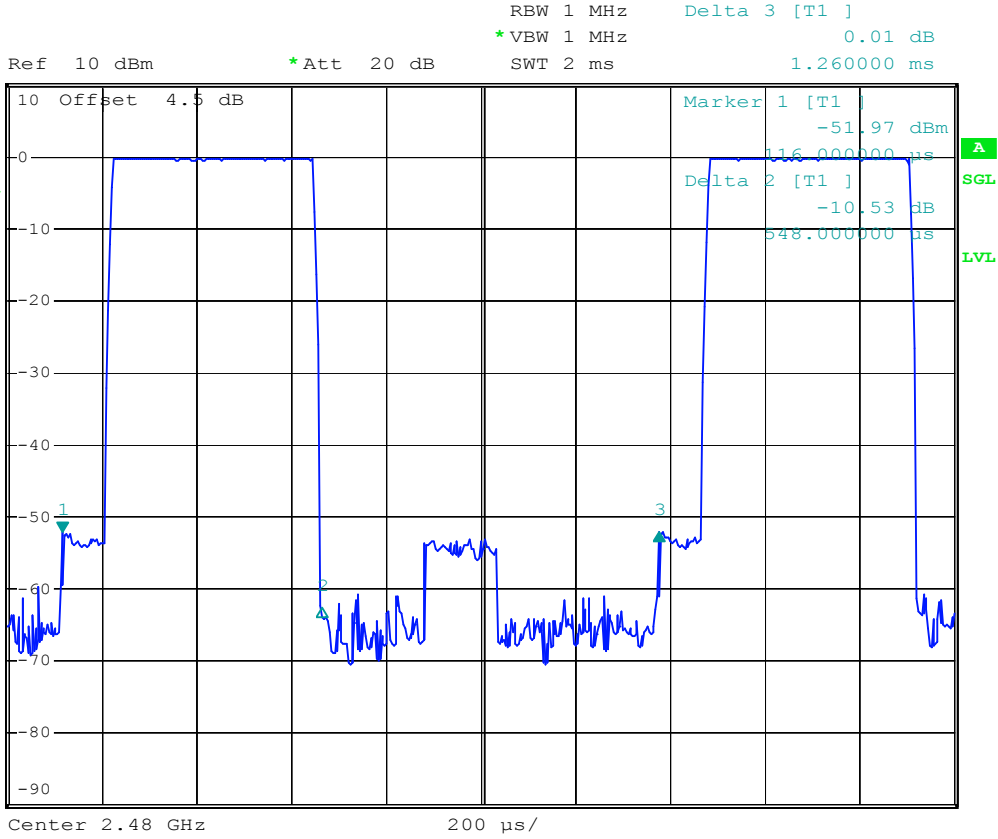

Date: 3.OCT.2005 16:42:34




Ref 10 dBm *Att 20 dB RBW 1 MHz
*VBW 1 MHz SWT 10 s

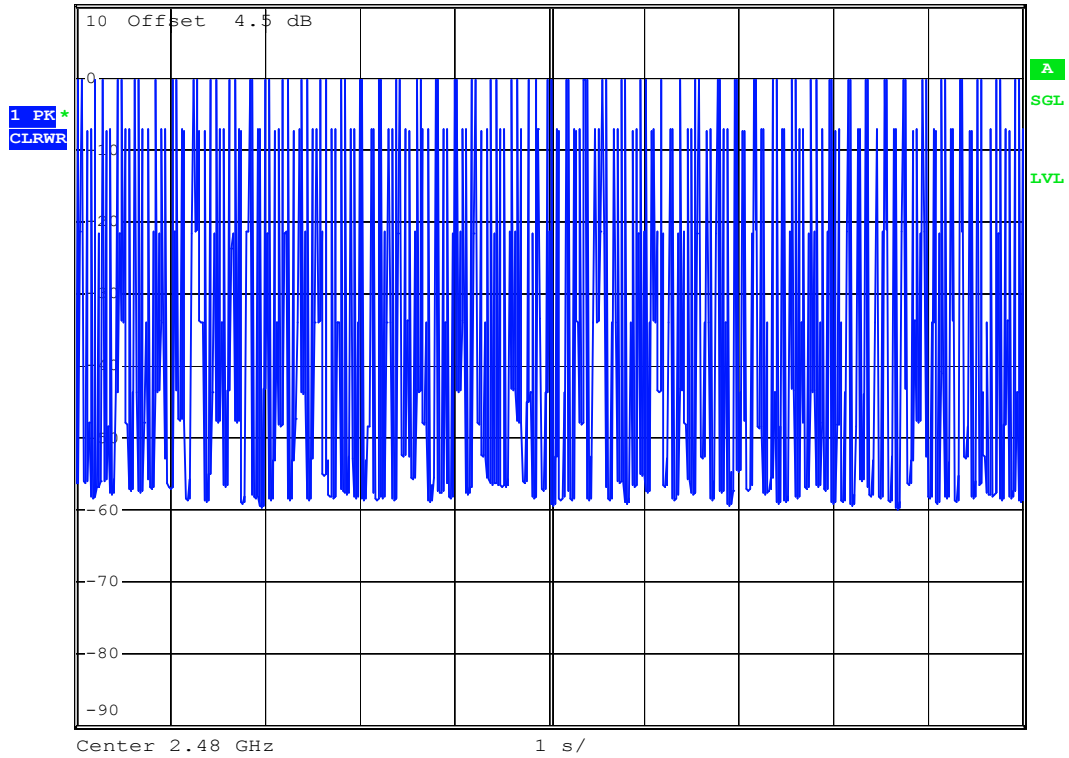


Date: 3.OCT.2005 16:52:53



DH3 (CH00)

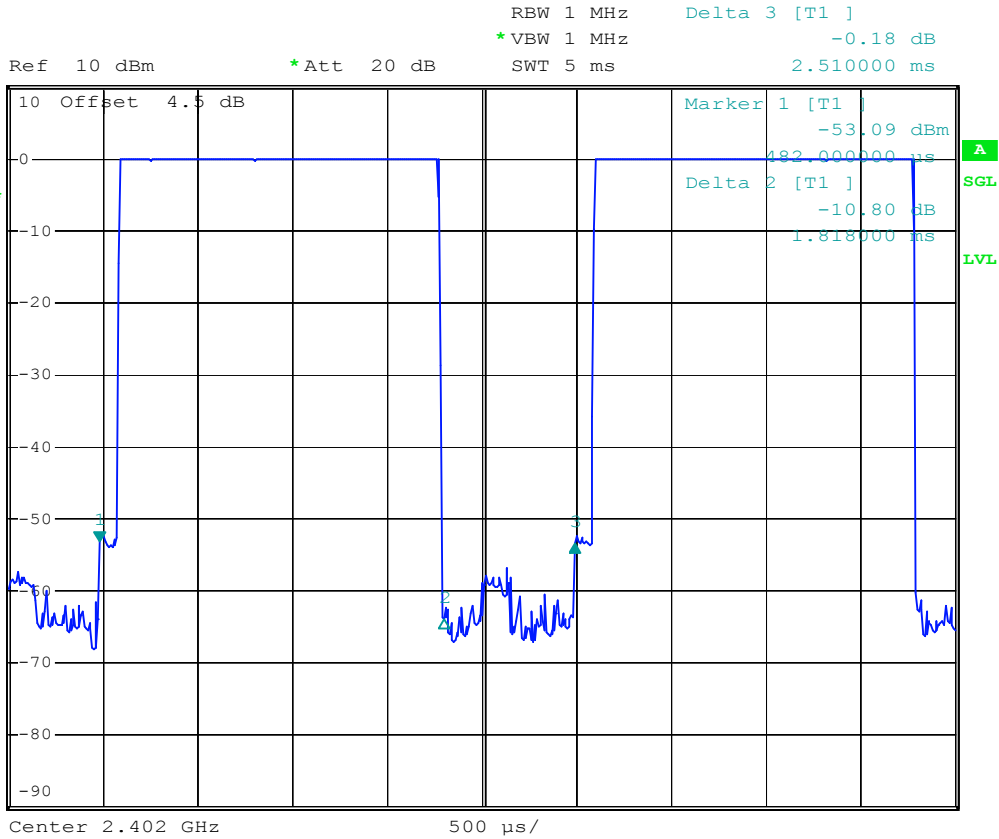

Date: 3.OCT.2005 16:46:42

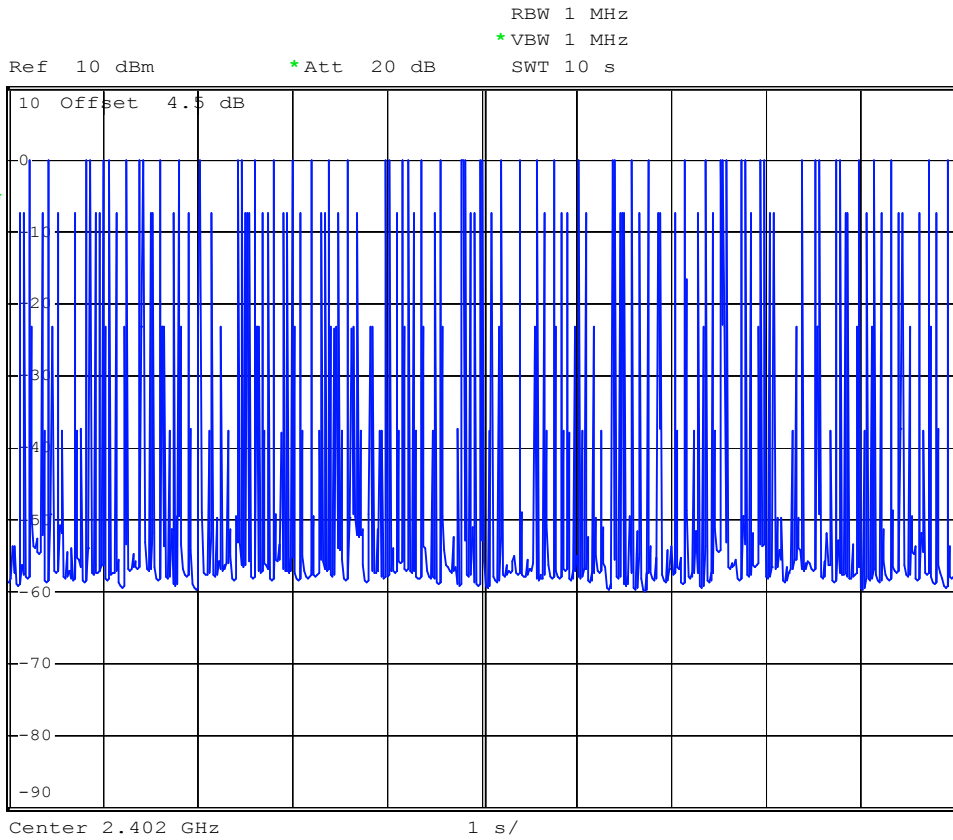


Date: 3.OCT.2005 16:51:28



DH3 (CH39)




RBW 1 MHz Delta 3 [T1]
 *VBW 1 MHz -0.07 dB
 Ref 10 dBm *Att 20 dB SWT 5 ms 2.510000 ms

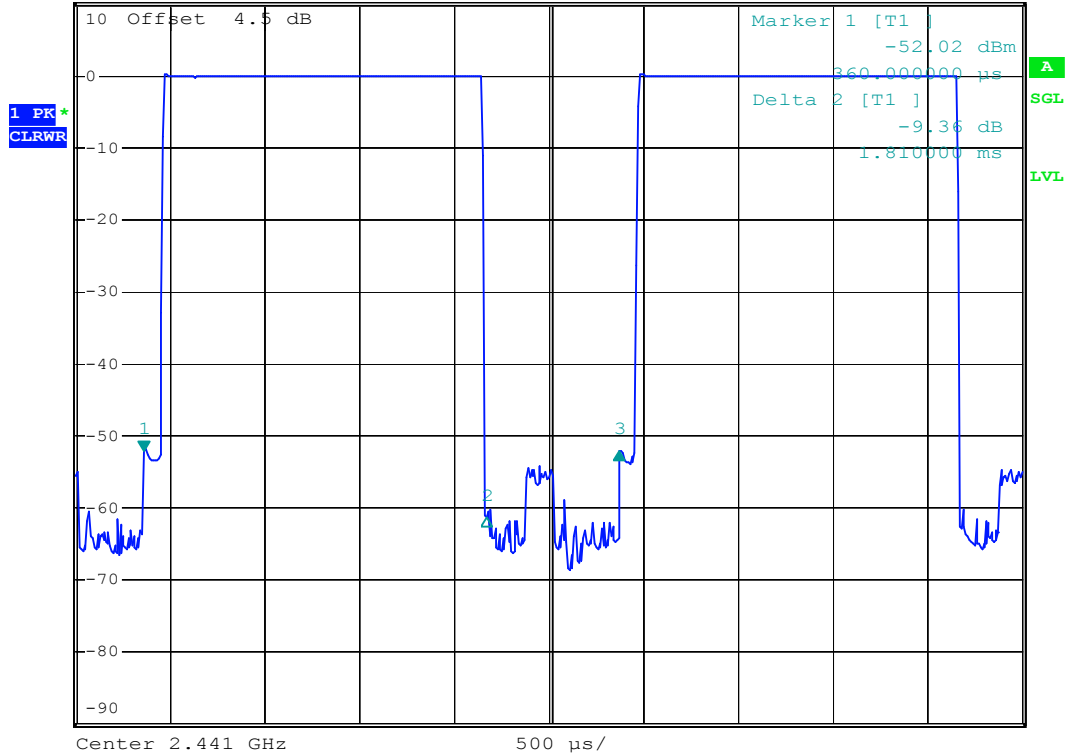

Date: 3.OCT.2005 16:45:04




Ref 10 dBm *Att 20 dB RBW 1 MHz
*VBW 1 MHz SWT 10 s

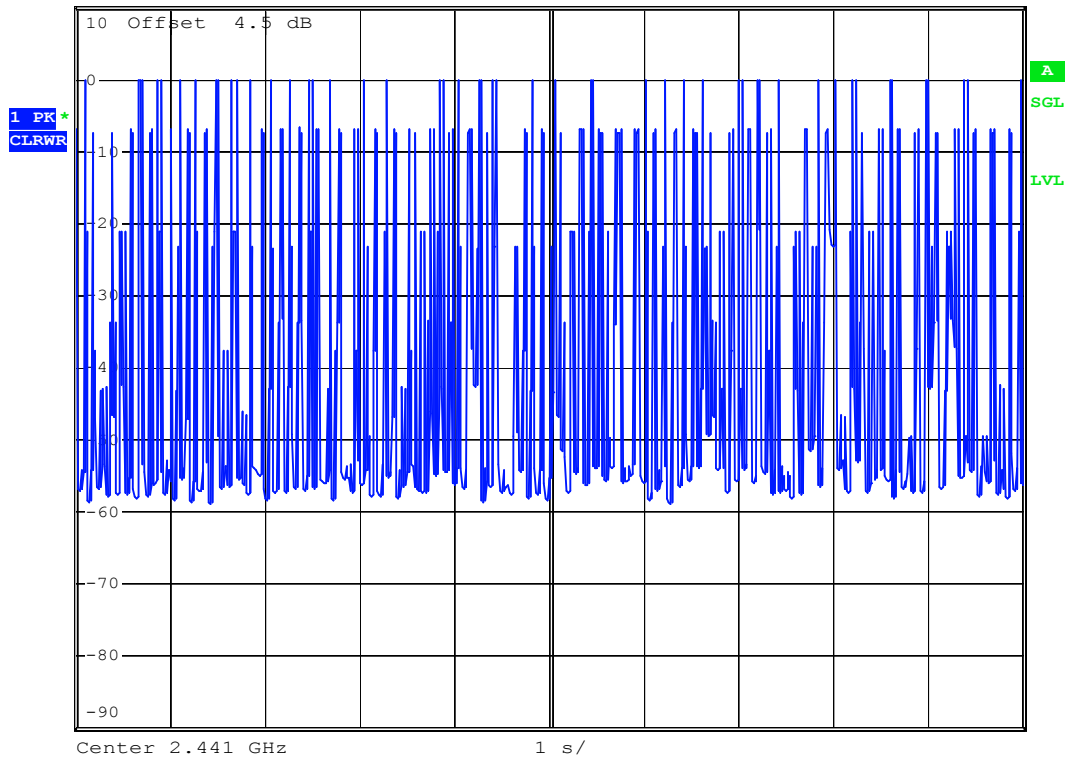

Date: 3.OCT.2005 16:51:06




DH3 (CH78)

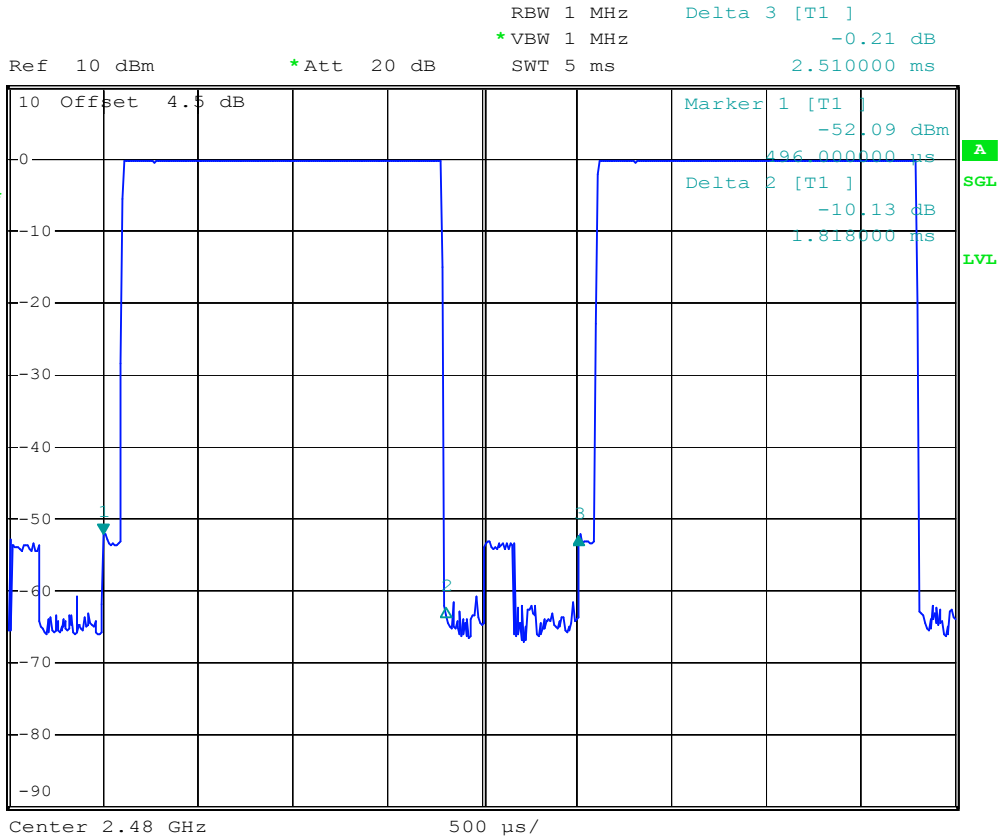

Date: 3.OCT.2005 16:43:18




Ref 10 dBm *Att 20 dB RBW 1 MHz
*VBW 1 MHz SWT 10 s

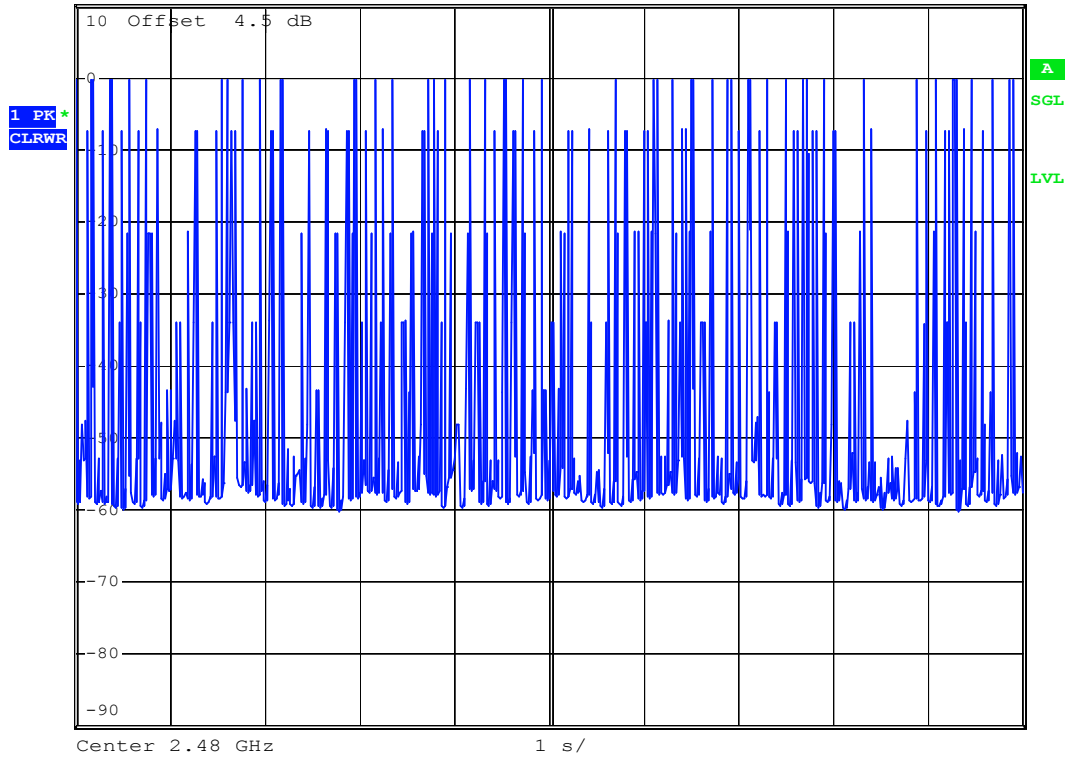


Date: 3.OCT.2005 16:50:40



DH5 (CH00)

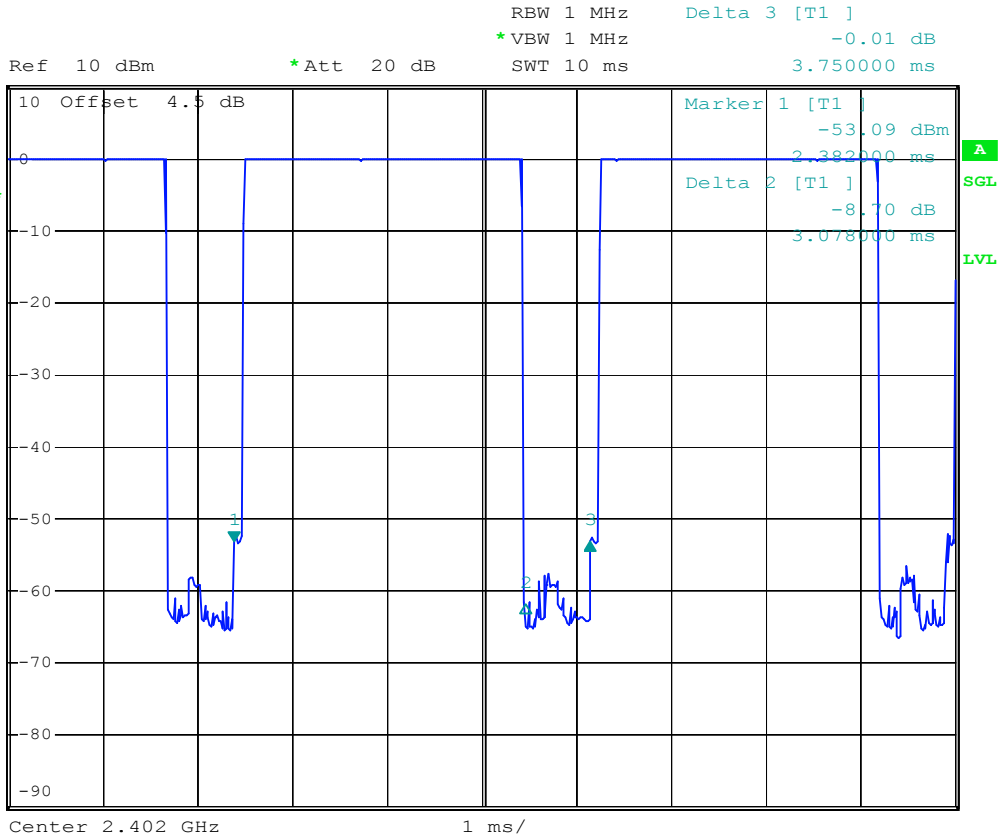

Date: 3.OCT.2005 16:47:58

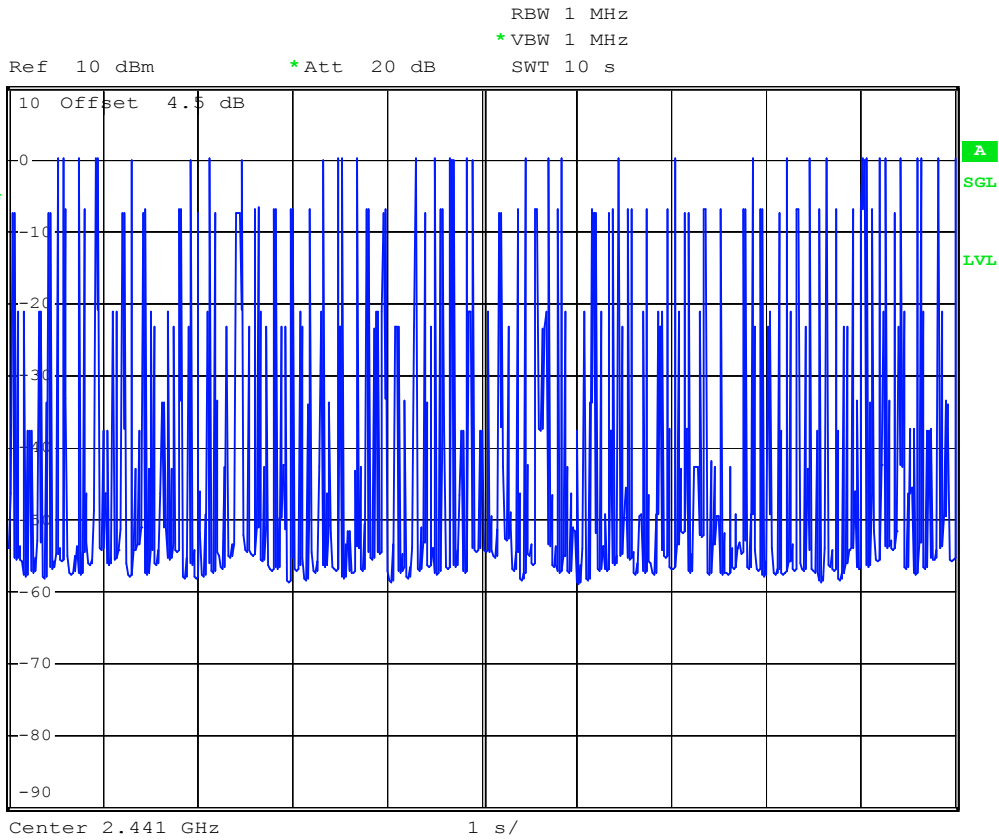


Date: 3.OCT.2005 16:49:52




DH5 (CH39)



RBW 1 MHz Delta 3 [T1]
 *VBW 1 MHz -0.46 dB
 Ref 10 dBm *Att 20 dB SWT 10 ms 3.770000 ms

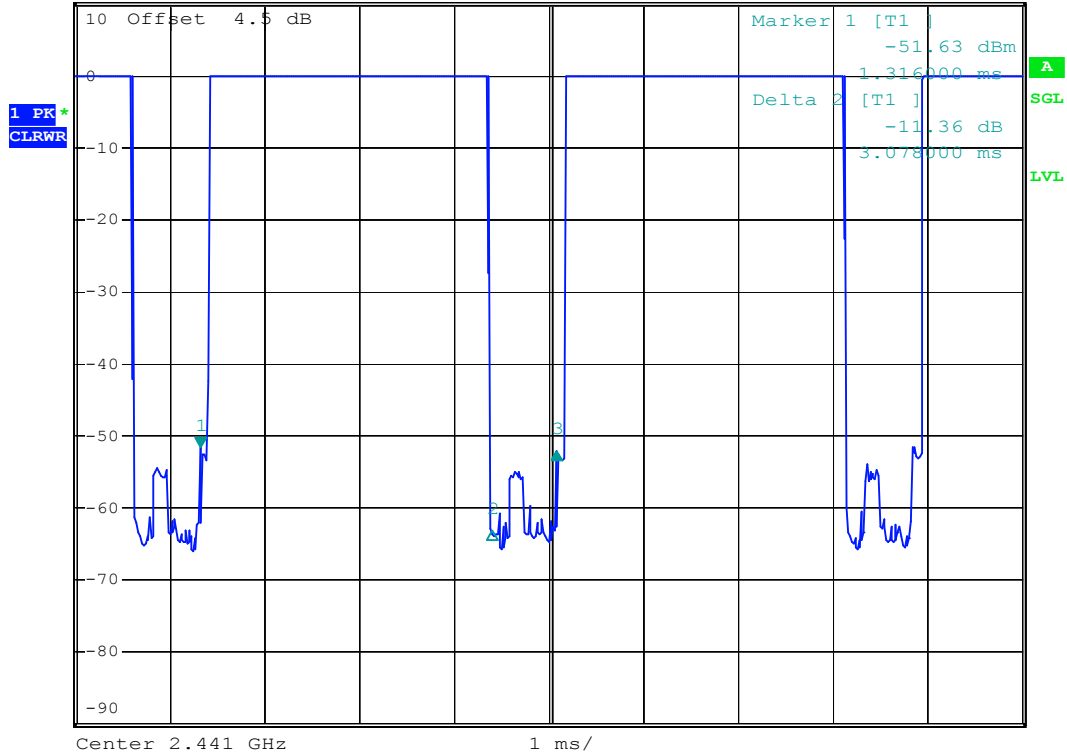

Date: 3.OCT.2005 16:44:35

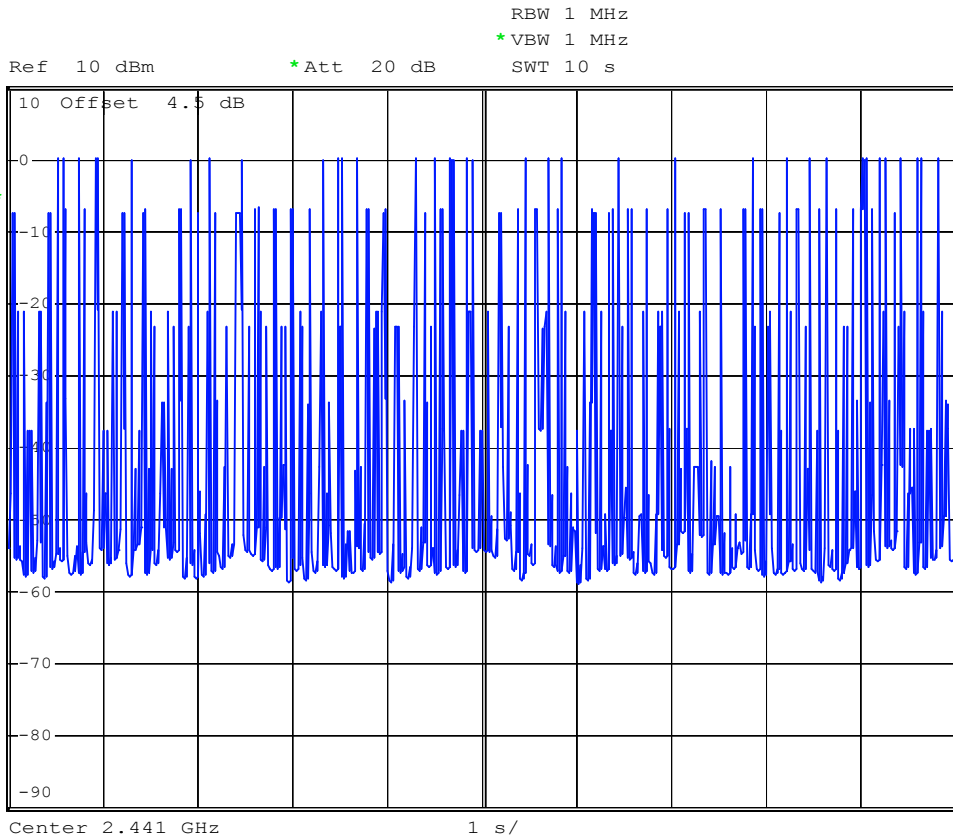


Date: 3.OCT.2005 16:49:52




DH5 (CH78)



RBW 1 MHz Delta 3 [T1]
 *VBW 1 MHz 0.21 dB
 Ref 10 dBm *Att 20 dB SWT 10 ms 3.770000 ms

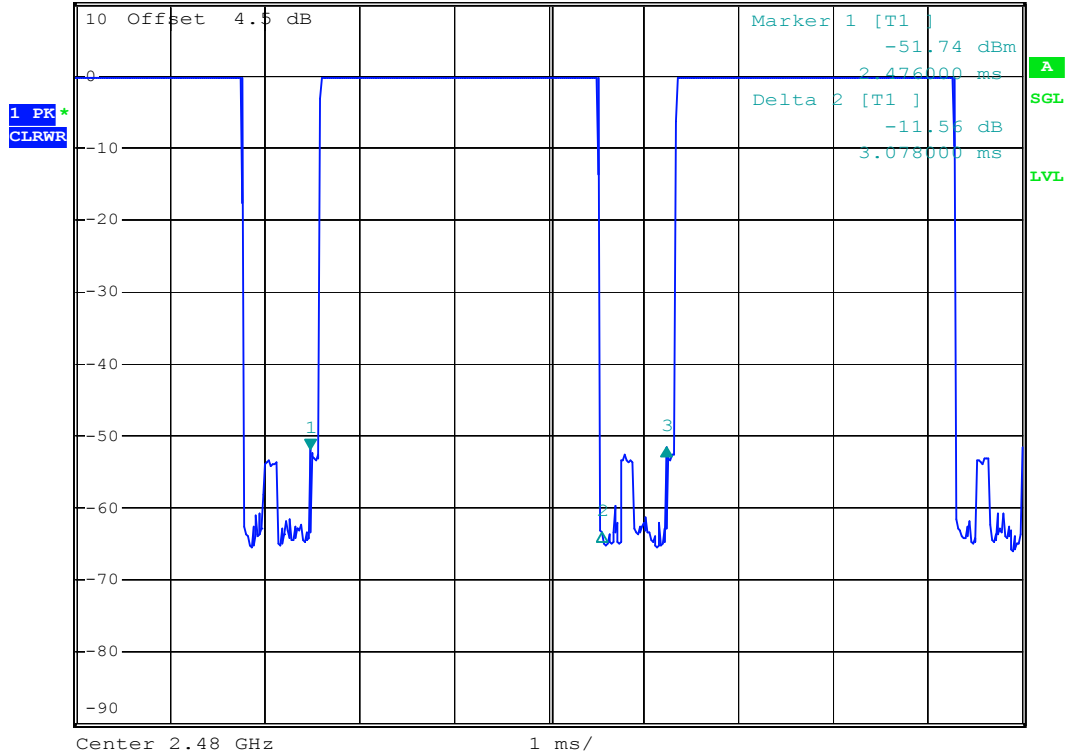

Date: 3.OCT.2005 16:43:58

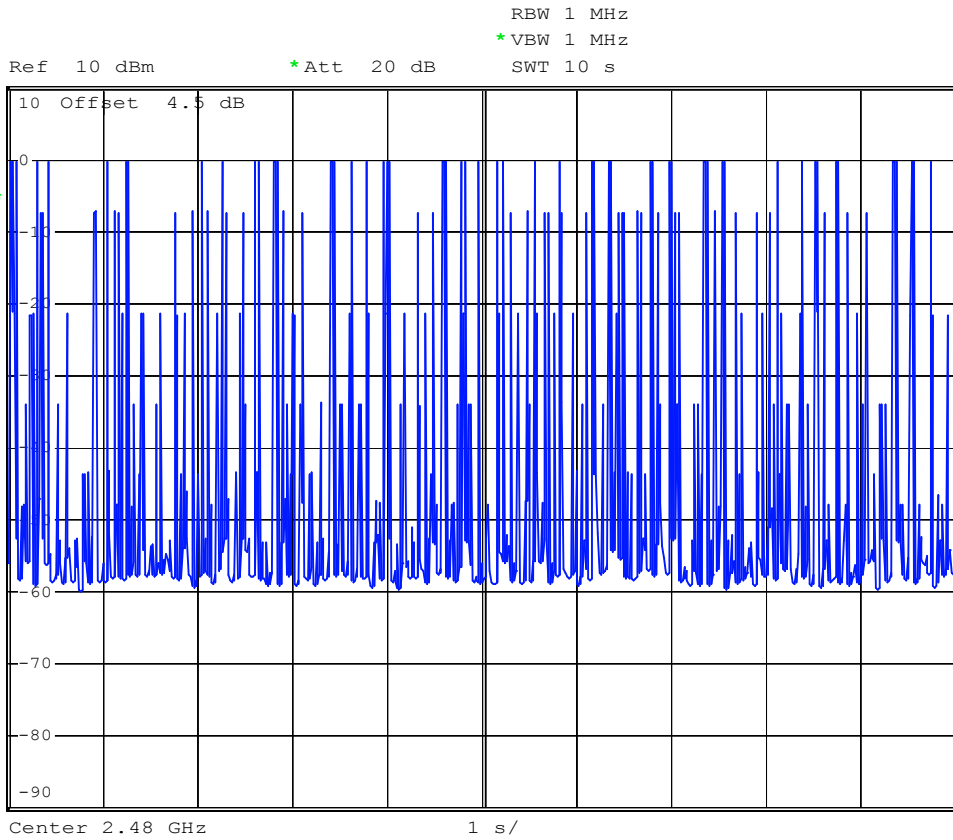

Date: 3.OCT.2005 16:50:14

5.6 Output Power


5.6.1 Measuring Instruments :

As described in chapter 6 of this test report.

5.6.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer directly.
2. The center frequency of the spectrum analyzer was set to the fundamental frequency and set RBW to 3MHz and VBW to 3MHz.

5.6.3 Test Setup Layout :

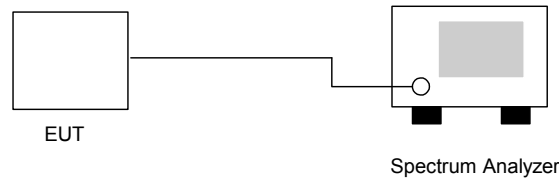

5.6.4 Test Result : See spectrum analyzer plots below


- Temperature: 24°C
- Relative Humidity: 52%
- Test Engineer : Jay

Channel	Frequency (MHz)	Measured Output Power (dBm)	Limits (Watt/dBm)	Plot Ref. No.
00	2402	0.14	1W/30 dBm	Mode 1
39	2441	0.24	1W/30 dBm	Mode 2
78	2480	-0.27	1W/30 dBm	Mode 3



5.6.5 Output Power

Mode 1: CH00 (2402MHz)

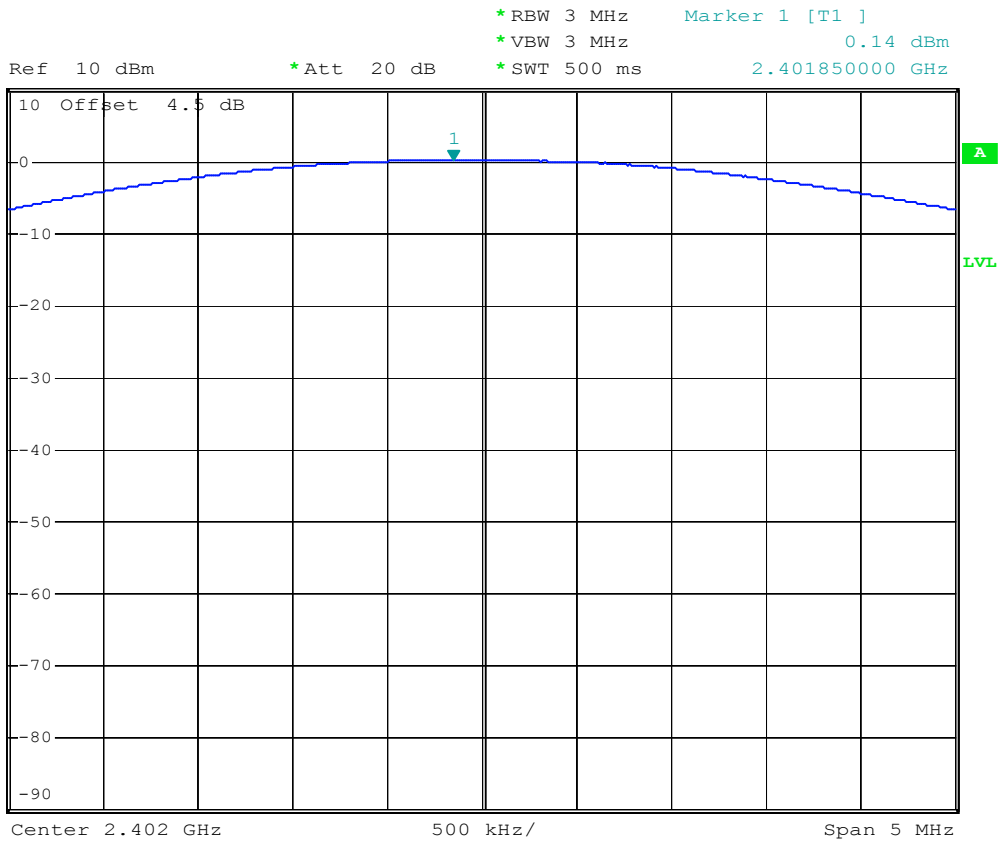


Date: 3.OCT.2005 16:35:17



Mode 2: CH39 (2441MHz)



Ref 10 dBm *Att 20 dB *RBW 3 MHz Marker 1 [T1] 0.24 dBm
*VBW 3 MHz *SWT 500 ms 2.440870000 GHz

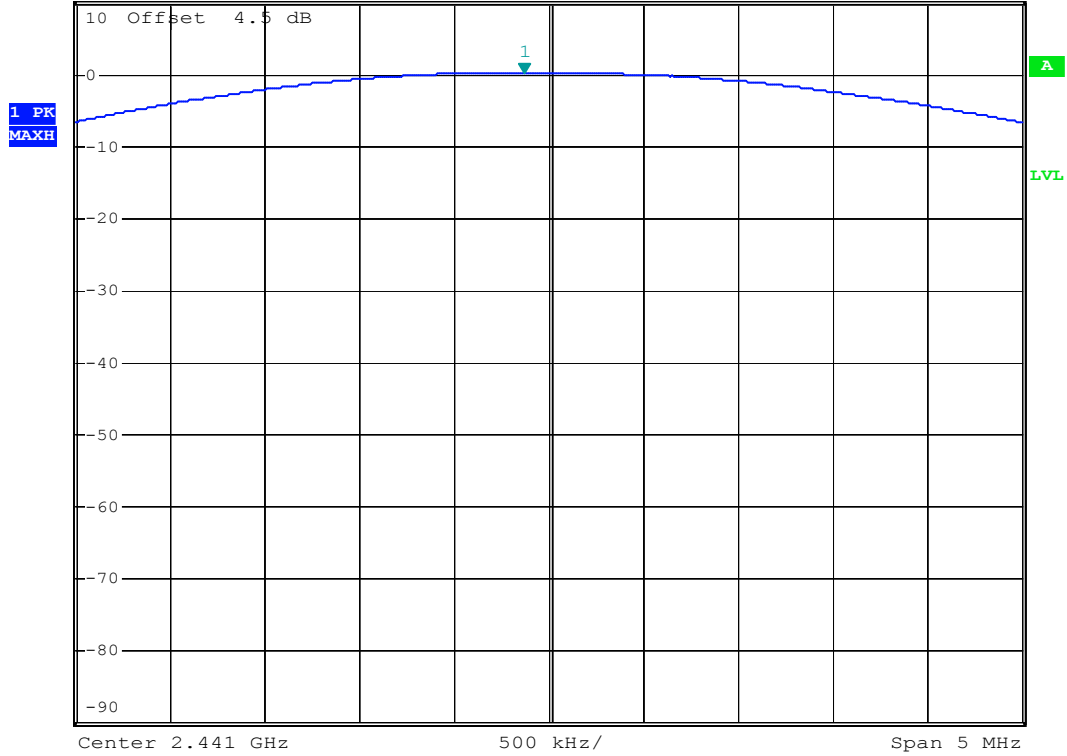


Date: 3.OCT.2005 16:36:05



Mode 3: CH78 (2480MHz)



Ref 10 dBm *Att 20 dB *RBW 3 MHz Marker 1 [T1] -0.27 dBm
*VBW 100 kHz *SWT 500 ms 2.479950000 GHz

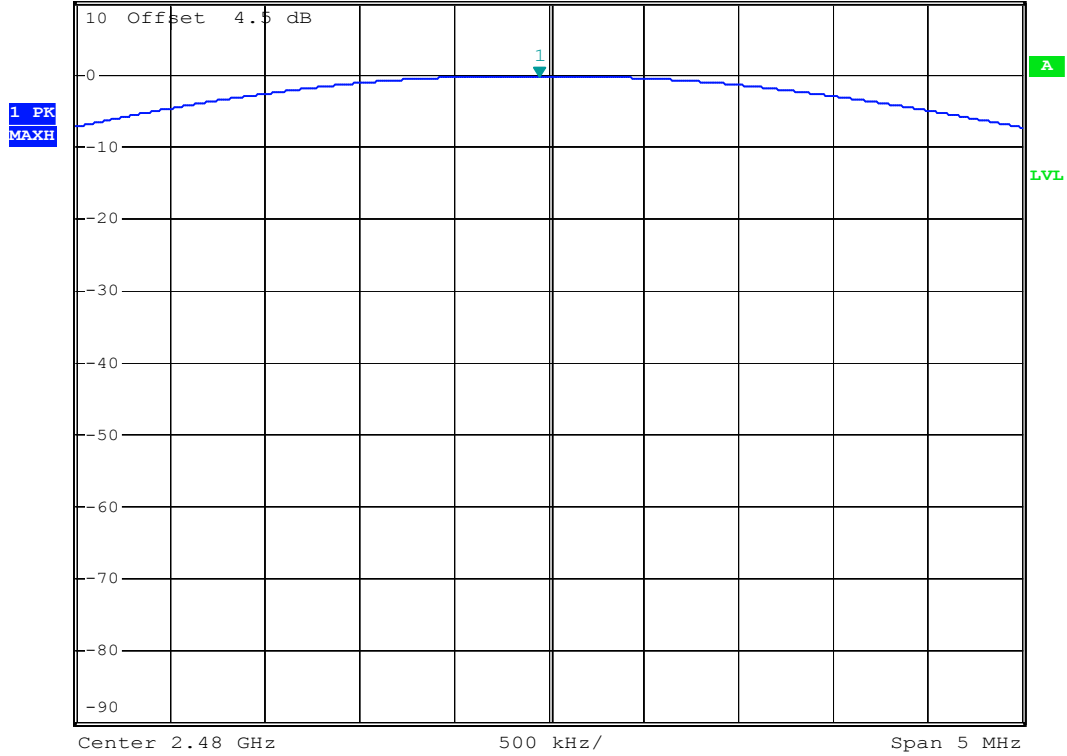

Date: 3.OCT.2005 16:41:24



5.7 100kHz Bandwidth of Frequency Band Edges

5.7.1 Measuring Instruments :

As described in chapter 6 of this test report.

5.7.2 Test Procedure :

- 1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span for the conducted measurement, and RBW/VBW=1MHz/1MHz for peak measurement and RBW/VBW=1MHz/300Hz for average measurement in the radiated measurement.
3. The band edges was measured and recorded.

5.7.3 Test Result :

- Temperature: 24°C
Relative Humidity: 52%
Test Engineer : Jay

Test Result in lower band (Channel 00) : PASS

Test Result in higher band(Channel 78) : PASS

5.7.4 Note on Band edge Emission

CH00 (Horizontal)

Table with 9 columns: Frequency, Level, Over Limit, Limit Line, Read Level, Factor, Ant Pos, Table Pos, Detect Mode. Rows for 2368.00 MHz at 45.95 dB and 33.17 dB.

CH00 (Vertical)

Table with 9 columns: Frequency, Level, Over Limit, Limit Line, Read Level, Factor, Ant Pos, Table Pos, Detect Mode. Rows for 2318.00 MHz at 45.84 dB and 32.64 dB.



CH78 (Horizontal)

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Detect Mode
2484.00	71.10	-2.90	74.00	71.84	30.41	200	0	Peak
2484.00	45.28	-28.72	74.00	46.02	-30.41	200	173	Average

CH78 (Vertical)

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Detect Mode
2484.00	68.17	-5.83	74.00	68.91	30.41	103	0	Peak
2484.00	42.74	-31.26	74.00	43.48	30.41	100	144	Average




5.7.5 Frequency Band Edge

Mode 1: CH00 (2402 MHz)



1 PK
MAXH

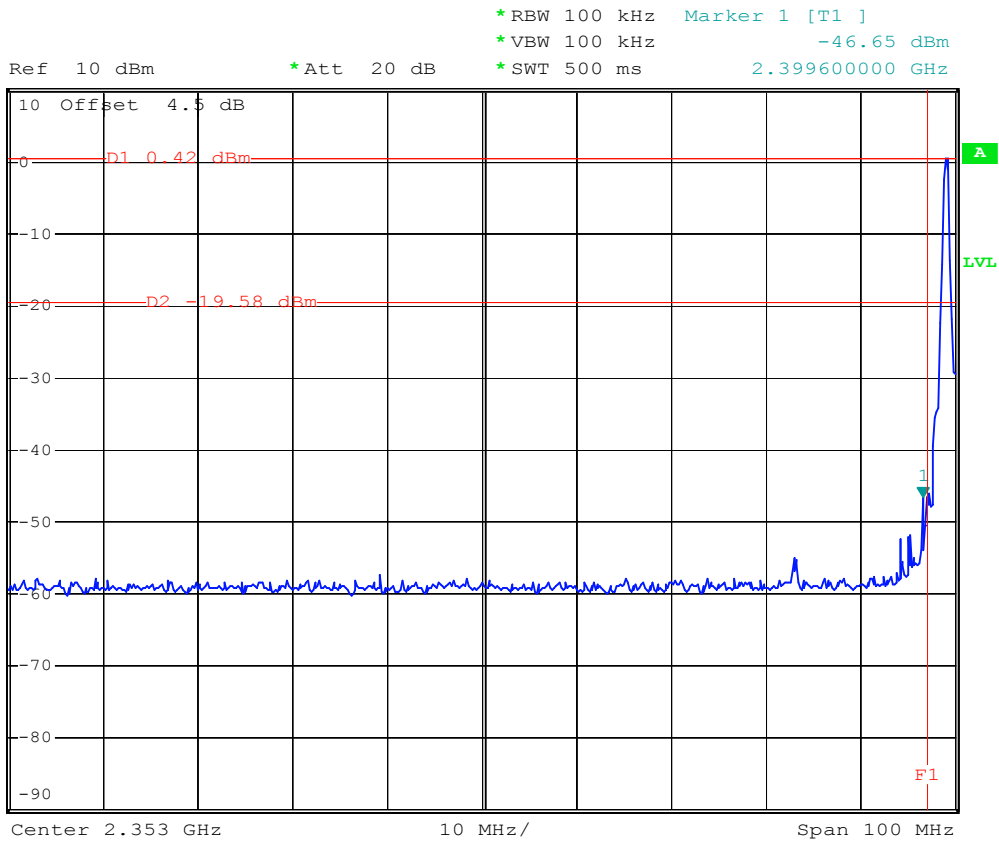


Date: 3.OCT.2005 16:32:31



Mode 3: CH78 (2480 MHz)



Ref 10 dBm *Att 20 dB *RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz -46.25 dBm
*SWT 500 ms 2.484300000 GHz

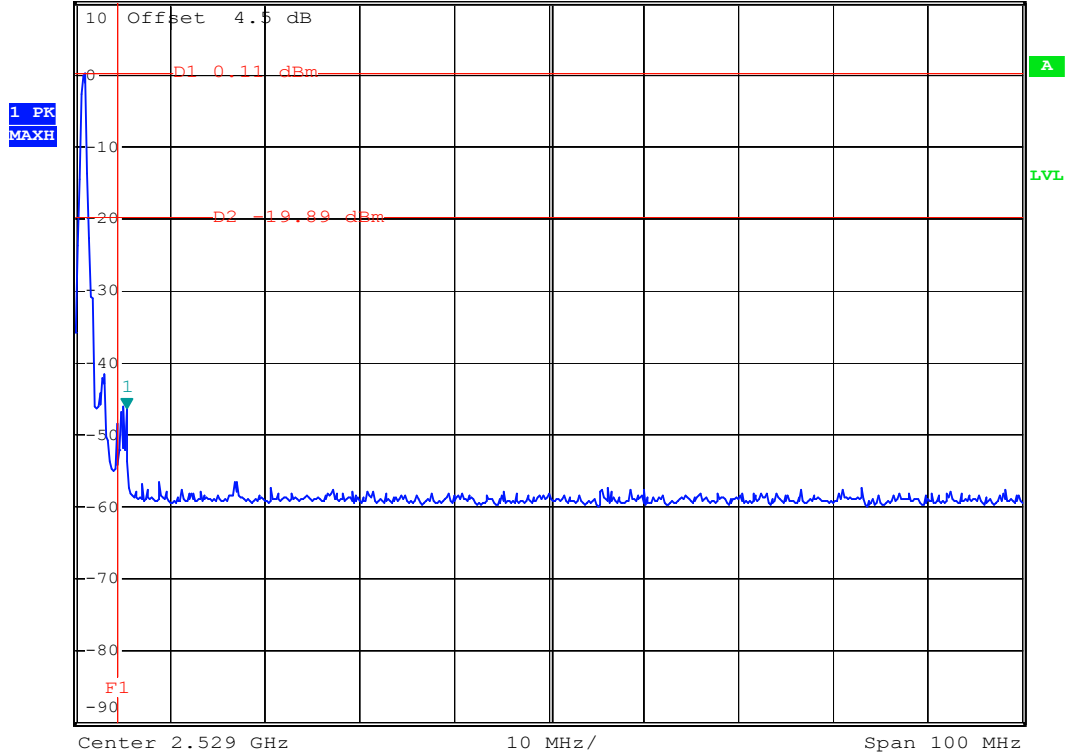

Date: 3.OCT.2005 16:40:49



5.8 Conducted Emission

5.8.1 Measuring Instruments

As described in chapter 6 of this test Report.

5.8.2 Test Procedures :


- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power port of a line impedance stabilization network (LISN).
- c. All the support units are connected to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.



5.8.3 Test Data Test Mode 1


- Temperature: 24°C
- Relative Humidity: 52%
- Test Engineer : Jay
- Test Mode : Mode 1

■ The test that passed at minimum margin was marked by the frame in the following table.

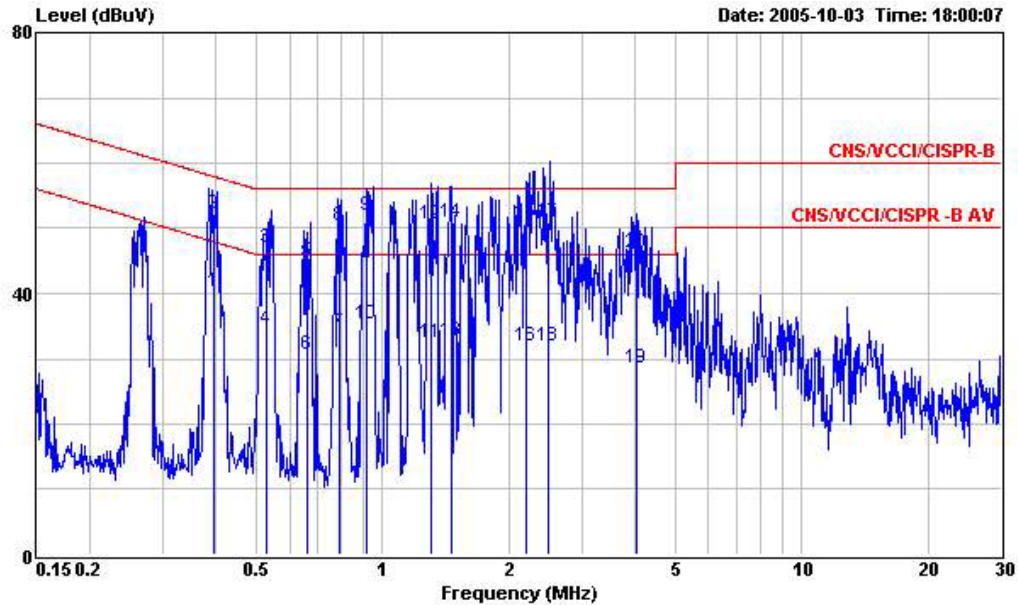

Site : site
 Condition : CNS/WCCI/CISPR-B 2001/004 200505 LINE
 EUT : GSM Tri Band Mobile Phone (Bluetooth)
 Power : 120V/60Hz
 Model : FD592703
 Memo : PCS1900 Idle+MP3 Player+Earphone+Charger
 Memo : +BT ON
 Memo :

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.394	40.33	-7.65	47.98	40.23	0.06	0.04	Average
2	0.394	52.09	-5.89	57.98	51.99	0.06	0.04	QP
3	0.526	46.89	-9.11	56.00	46.76	0.08	0.05	QP
4	0.526	34.58	-11.42	46.00	34.45	0.08	0.05	Average
5	0.659	44.98	-11.02	56.00	44.83	0.09	0.06	QP
6	0.659	30.69	-15.31	46.00	30.54	0.09	0.06	Average
7	0.788	34.09	-11.91	46.00	33.92	0.10	0.07	Average
8	0.788	50.29	-5.71	56.00	50.12	0.10	0.07	QP
9	0.916	51.82	-4.18	56.00	51.63	0.11	0.08	QP
10	0.916	35.43	-10.57	46.00	35.24	0.11	0.08	Average
11	1.308	32.54	-13.46	46.00	32.33	0.11	0.10	Average
12	1.308	50.74	-5.26	56.00	50.53	0.11	0.10	QP
13	1.456	32.71	-13.29	46.00	32.50	0.11	0.10	Average
14	1.456	50.87	-5.13	56.00	50.66	0.11	0.10	QP
15	2.196	50.85	-5.15	56.00	50.60	0.12	0.13	QP
16	2.196	32.07	-13.93	46.00	31.82	0.12	0.13	Average
17	2.476	51.02	-4.98	56.00	50.75	0.14	0.13	QP
18	2.476	31.87	-14.13	46.00	31.60	0.14	0.13	Average
19	4.049	28.46	-17.54	46.00	28.09	0.21	0.16	Average
20	4.049	46.21	-9.79	56.00	45.84	0.21	0.16	QP

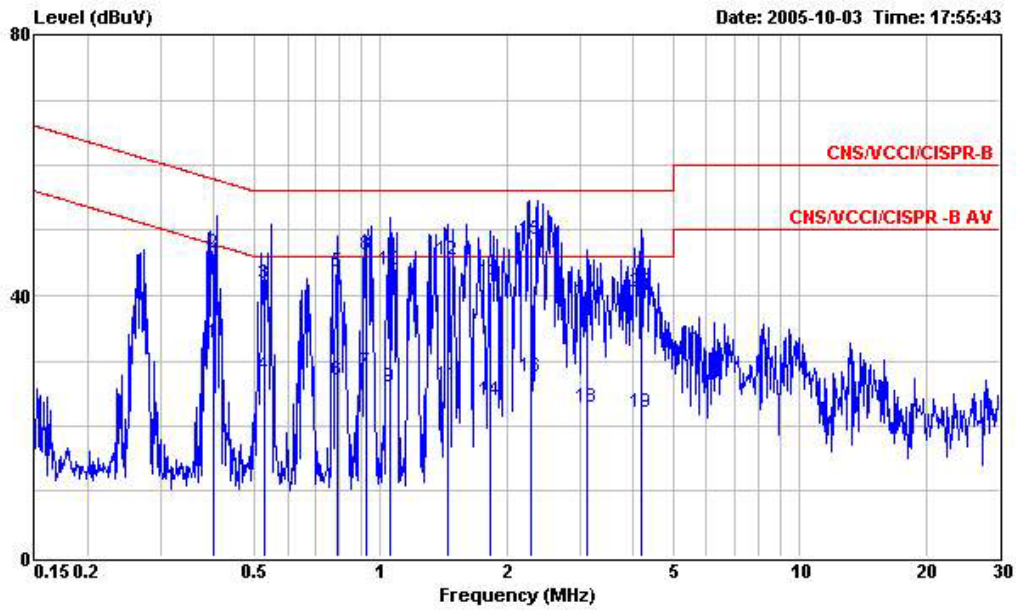

Site : site
 Condition : CNS/WCCI/CISPR-B 2001/004 200505 NEUTRAL
 EUT : GSM Tri Band Mobile Phone (Bluetooth)
 Power : 120V/60Hz
 Model : FD592703
 Memo : PCS1900 Idle+MP3 Player+Earphone+Charger
 Memo : +BT ON
 Memo :


	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.398	32.76	-15.14	47.90	32.61	0.11	0.04	Average
2	0.398	46.61	-11.29	57.90	46.46	0.11	0.04	QP
3	0.527	41.90	-14.10	56.00	41.70	0.15	0.05	QP
4	0.527	27.67	-18.33	46.00	27.47	0.15	0.05	Average
5	0.792	43.63	-12.37	56.00	43.36	0.20	0.07	QP
6	0.792	26.93	-19.07	46.00	26.66	0.20	0.07	Average
7	0.926	28.19	-17.81	46.00	27.89	0.22	0.08	Average
8	0.926	46.36	-9.64	56.00	46.06	0.22	0.08	QP
9	1.055	25.95	-20.05	46.00	25.64	0.23	0.08	Average
10	1.055	43.98	-12.02	56.00	43.67	0.23	0.08	QP
11	1.447	26.34	-19.66	46.00	26.01	0.23	0.10	Average
12	1.447	45.51	-10.49	56.00	45.18	0.23	0.10	QP
13	1.826	42.18	-13.82	56.00	41.84	0.23	0.11	QP
14	1.826	23.77	-22.23	46.00	23.43	0.23	0.11	Average
15	2.275	48.59	-7.41	56.00	48.23	0.23	0.13	QP
16	2.275	27.63	-18.37	46.00	27.27	0.23	0.13	Average
17	3.102	39.12	-16.88	56.00	38.74	0.23	0.15	QP
18	3.102	22.77	-23.23	46.00	22.39	0.23	0.15	Average
19	4.201	22.13	-23.87	46.00	21.73	0.24	0.16	Average
20	4.201	40.48	-15.52	56.00	40.08	0.24	0.16	QP



5.8.4 Test Data Test Mode 2


- Temperature: 24°C
- Relative Humidity: 52%
- Test Engineer : Jay
- Test Mode : Mode 1

■ The test that passed at minimum margin was marked by the frame in the following table.

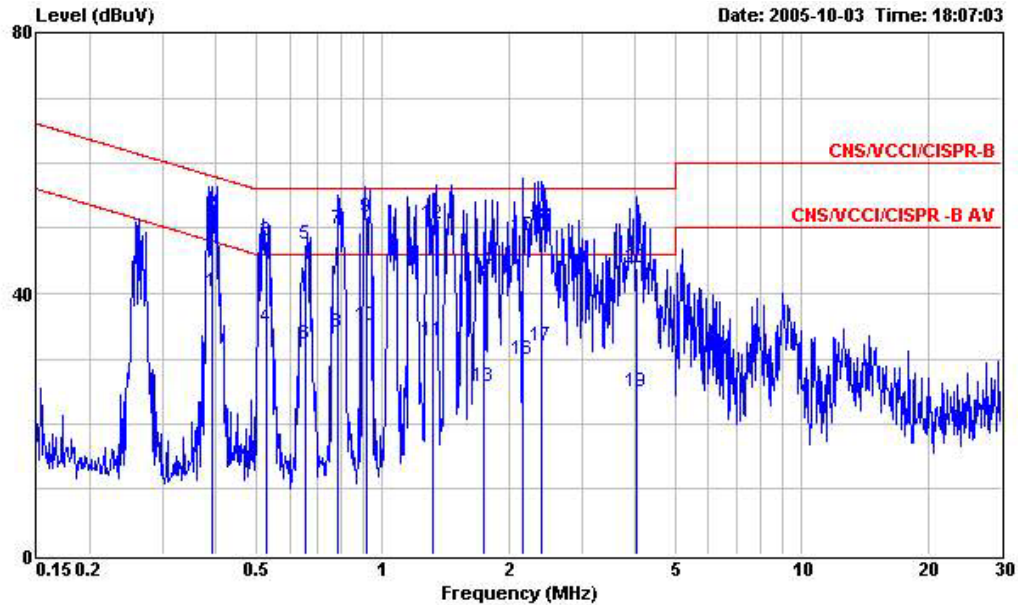

Site : site
 Condition : CNS/WCCI/CISPR-B 2001/004 200505 LINE
 EUT : GSM Tri Band Mobile Phone (Bluetooth)
 Power : 120V/60Hz
 Model : FD592703
 Memo : PCS 1900 Idle+Camera+Earphone+Charger
 Memo : +BT ON
 Memo :

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.393	40.33	-7.67	48.00	40.23	0.06	0.04	Average
2	0.393	52.33	-5.67	58.00	52.23	0.06	0.04	QP
3	0.526	48.01	-7.99	56.00	47.88	0.08	0.05	QP
4	0.526	34.75	-11.25	46.00	34.62	0.08	0.05	Average
5	0.657	47.50	-8.50	56.00	47.35	0.09	0.06	QP
6	0.657	32.33	-13.67	46.00	32.18	0.09	0.06	Average
7	0.784	49.89	-6.11	56.00	49.72	0.10	0.07	QP
8	0.784	33.95	-12.05	46.00	33.78	0.10	0.07	Average
9	0.914	51.76	-4.24	56.00	51.57	0.11	0.08	QP
10	0.914	35.04	-10.96	46.00	34.85	0.11	0.08	Average
11	1.317	32.65	-13.35	46.00	32.44	0.11	0.10	Average
12	1.317	50.58	-5.42	56.00	50.37	0.11	0.10	QP
13	1.736	25.68	-20.32	46.00	25.46	0.11	0.11	Average
14	1.736	43.74	-12.26	56.00	43.52	0.11	0.11	QP
15	2.159	48.90	-7.10	56.00	48.66	0.12	0.12	QP
16	2.159	29.75	-16.25	46.00	29.51	0.12	0.12	Average
17	2.401	31.93	-14.07	46.00	31.66	0.14	0.13	Average
18	2.401	50.51	-5.49	56.00	50.24	0.14	0.13	QP
19	4.050	25.00	-21.00	46.00	24.63	0.21	0.16	Average
20	4.050	43.97	-12.03	56.00	43.60	0.21	0.16	QP

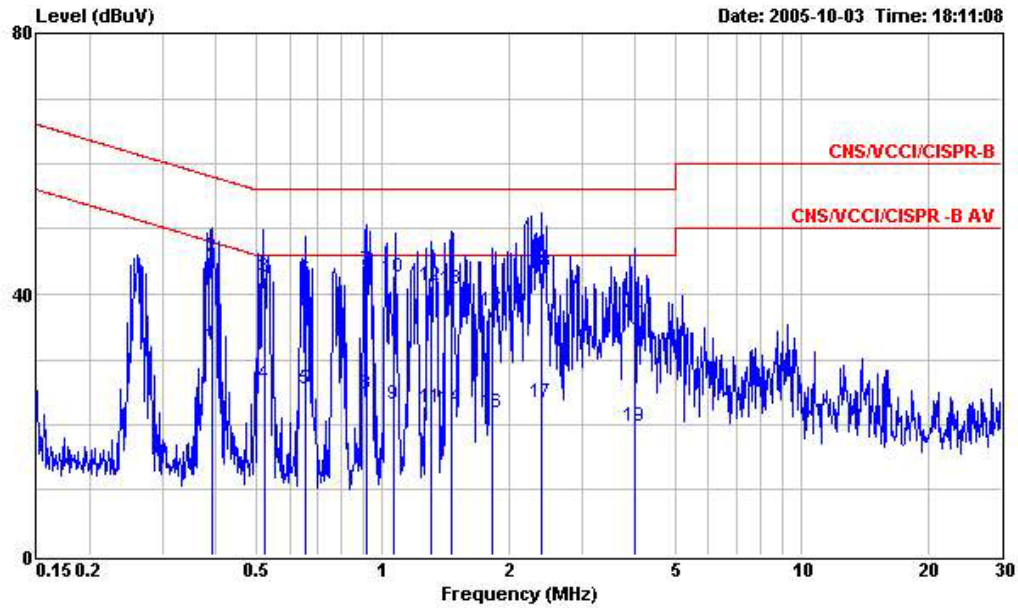

Site : site
 Condition : CNS/VCCI/CISPR-B 2001/004 200505 NEUTRAL
 EUT : GSM Tri Band Mobile Phone (Bluetooth)
 Power : 120V/60Hz
 Model : FD592703
 Memo : PCS 1900 Idle+Camera+Earphone+Charger
 Memo : +BT ON
 Memo :

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.393	32.10	-15.90	48.00	31.95	0.11	0.04	Average
2	0.393	45.71	-12.29	58.00	45.56	0.11	0.04	QP
3	0.526	42.57	-13.43	56.00	42.37	0.15	0.05	QP
4	0.526	26.32	-19.68	46.00	26.12	0.15	0.05	Average
5	0.655	25.34	-20.66	46.00	25.11	0.17	0.06	Average
6	0.655	42.39	-13.61	56.00	42.16	0.17	0.06	QP
7	0.917	43.74	-12.26	56.00	43.44	0.22	0.08	QP
8	0.917	24.61	-21.39	46.00	24.31	0.22	0.08	Average
9	1.067	23.21	-22.79	46.00	22.90	0.23	0.08	Average
10	1.067	42.66	-13.34	56.00	42.35	0.23	0.08	QP
11	1.306	22.73	-23.27	46.00	22.40	0.23	0.10	Average
12	1.306	41.19	-14.81	56.00	40.86	0.23	0.10	QP
13	1.459	40.71	-15.29	56.00	40.38	0.23	0.10	QP
14	1.459	22.66	-23.34	46.00	22.33	0.23	0.10	Average
15	1.830	37.49	-18.51	56.00	37.15	0.23	0.11	QP
16	1.830	21.74	-24.26	46.00	21.40	0.23	0.11	Average
17	2.400	23.35	-22.65	46.00	22.99	0.23	0.13	Average
18	2.400	43.41	-12.59	56.00	43.05	0.23	0.13	QP
19	4.011	19.74	-26.26	46.00	19.35	0.23	0.16	Average
20	4.011	37.05	-18.95	56.00	36.66	0.23	0.16	QP



5.9 Radiated Emission Measurement


5.9.1 Measuring Instruments

As described in chapter 6 of this Report.

5.9.2 Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. For testing below 1GHz, If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.9.3 Typical Test Setup Layout of Radiated Emission

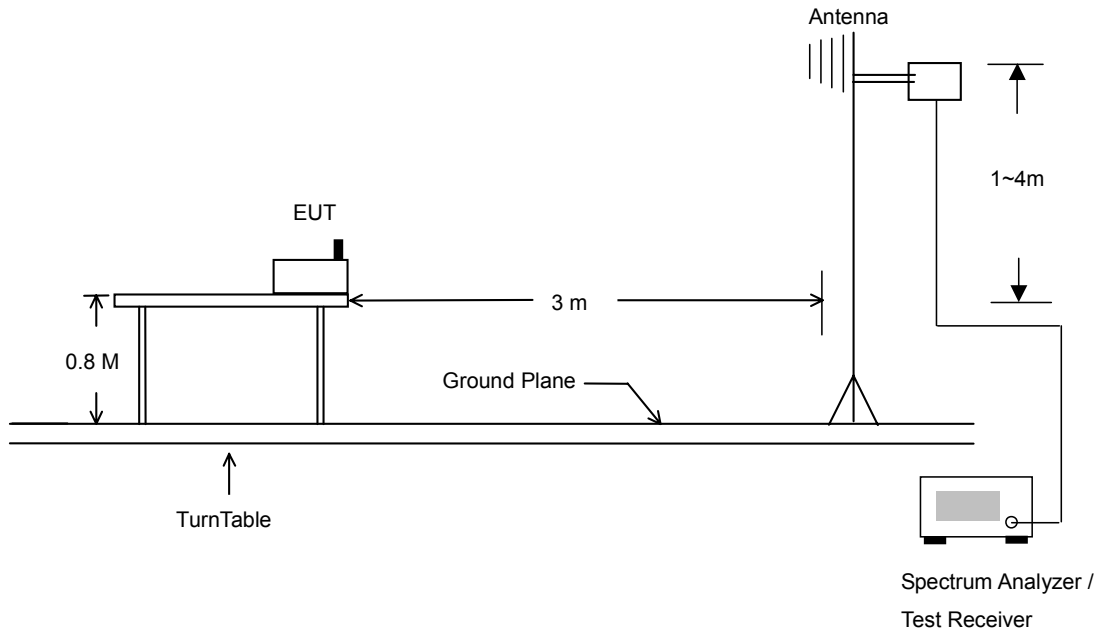



5.9.4 Test Data

- Temperature : 31 °C
- Relating Humidity : 59 %
- Test Engineer : Jay
- Test Mode : Mode 1
- Polarization : Horizontal

■ The test that passed at the minimum margin was marked by the frame in the following test record

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2368.00	45.95	-28.05	74.00	46.64	30.51	4.23	35.44	186	0	Peak
2	2368.00	33.17	-40.83	74.00	33.87	30.51	4.23	35.44	100	200	Average
3 @	2398.00	96.13			96.84	30.48	4.26	35.46	186	0	Peak
4 X	2398.00	77.89			78.60	30.48	4.26	35.46	100	202	Average
5	2494.00	45.53	-28.47	74.00	46.27	30.40	4.39	35.53	186	0	Peak
6	2494.00	32.40	-41.60	74.00	33.14	30.40	4.39	35.53	100	205	Average

Remark: #3 and #4 Fundamental Signal

- Test Mode : Mode 1
- Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2318.00	45.84	-28.16	74.00	46.54	30.54	4.17	35.40	155	0	Peak
2	2318.00	32.64	-41.36	74.00	33.34	30.54	4.17	35.40	100	83	Average
3 X	2398.00	91.89			92.61	30.48	4.26	35.46	155	0	Peak
4 X	2398.00	75.58			76.29	30.48	4.26	35.46	100	80	Average
5	2484.00	45.48	-28.52	74.00	46.22	30.41	4.36	35.51	155	0	Peak
6	2484.00	33.16	-40.84	74.00	33.90	30.41	4.36	35.51	100	88	Average

Remark: #3 and #4 Fundamental Signal



- Test Mode : Mode 2
- Polarization : Horizontal

■ The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	41.88	23.17	-16.83	40.00	40.52	13.74	0.60	31.69	400	0	Peak
2	101.28	26.36	-17.14	43.50	46.01	10.57	1.07	31.29	400	0	Peak
3	126.93	22.09	-21.41	43.50	40.29	11.84	1.55	31.59	400	0	Peak

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	700.40	31.40	-14.60	46.00	38.54	19.04	4.44	30.61	100	0	Peak
2	756.40	31.43	-14.57	46.00	36.96	20.65	4.55	30.73	100	0	Peak
3	799.80	34.29	-11.71	46.00	37.62	21.90	4.90	30.12	100	0	Peak

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2348.00	46.52	-27.48	74.00	47.21	30.52	4.20	35.42	198	1	Peak
2	2348.00	32.67	-41.33	74.00	33.37	30.52	4.20	35.42	100	199	Average
3 @	2438.00	94.48			95.22	30.44	4.29	35.47	198	1	Peak
4 X	2438.00	77.40			78.13	30.44	4.33	35.49	100	201	Average
5	2498.00	45.10	-28.90	74.00	45.84	30.40	4.39	35.53	198	1	Peak
6	2498.00	32.88	-41.12	74.00	33.62	30.40	4.39	35.53	100	206	Average

Remark: #3 and #4 Fundamental Signal



- Test Mode : Mode 2
- Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.54	30.20	-9.80	40.00	42.43	18.40	0.89	31.52	400	0	Peak
2	42.69	36.95	-3.05	40.00	54.86	13.19	0.57	31.67	400	0	Peak
3	53.49	32.73	-7.27	40.00	54.34	8.88	0.95	31.45	400	0	Peak

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	700.40	30.03	-15.97	46.00	37.17	19.04	4.44	30.61	100	0	Peak
2	726.30	32.72	-13.28	46.00	38.99	19.79	4.47	30.53	100	0	Peak
3	799.80	34.92	-11.08	46.00	38.25	21.90	4.90	30.12	100	0	Peak

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2328.00	45.83	-28.17	74.00	46.53	30.54	4.17	35.40	193	360	Peak
2	2328.00	32.95	-41.05	74.00	33.65	30.54	4.17	35.40	100	148	Average
3	2438.00	92.48			93.21	30.44	4.29	35.47	193	360	Peak
4	2438.00	76.54			77.28	30.44	4.29	35.47	100	142	Average
5	2484.00	45.66	-28.34	74.00	46.40	30.41	4.36	35.51	193	360	Peak
6	2484.00	32.98	-41.02	74.00	33.72	30.41	4.36	35.51	100	147	Average

Remark: #3 and #4 Fundamental Signal



- Test Mode : Mode 3
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2328.00	45.89	-28.11	74.00	46.58	30.54	4.17	35.40	200	0	Peak
2 @	2328.00	32.37	-41.63	74.00	33.07	30.54	4.17	35.40	200	170	Average
3 @	2478.00	93.85			94.59	30.41	4.36	35.51	200	0	Peak
4 @	2478.00	77.13			77.87	30.41	4.36	35.51	200	171	Average
5 @	2484.00	71.10	-2.90	74.00	71.84	30.41	4.36	35.51	200	0	Peak
6 @	2484.00	45.28	-28.72	74.00	46.02	30.41	4.36	35.51	200	173	Average

Remark: #3 and #4 Fundamental Signal.

- Test Mode : Mode 3
- Polarization : Vertical

The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2384.00	46.26	-27.74	74.00	46.98	30.50	4.23	35.44	103	0	Peak
2 @	2384.00	32.79	-41.21	74.00	33.50	30.50	4.23	35.44	100	144	Average
3 @	2478.00	90.40			91.14	30.41	4.36	35.51	103	0	Peak
4 @	2478.00	74.97			75.71	30.41	4.36	35.51	100	141	Average
5 @	2484.00	68.17	-5.83	74.00	68.91	30.41	4.36	35.51	103	0	Peak
6 @	2484.00	42.74	-31.26	74.00	43.48	30.41	4.36	35.51	100	144	Average

Remark: #3 and #4 Fundamental Signal



5.10 Antenna Requirements

5.10.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no other antenna except assembled by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

5.10.2 Antenna Connected Construction

The antenna used in this product is a Printed antenna without connector and it is considered to meet antenna requirement of FCC.

5.10.3 Antenna Gain

The antenna gain of EUT is less than 6dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



6. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Feb. 19, 2005	Feb. 19, 2006	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/009	9kHz – 30MHz	Apr. 26, 2005	Apr. 26, 2006	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/008	9kHz – 30MHz	May 06, 2005	May 06, 2006	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 – 60Hz	N/A	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9kHz – 30MHz	Dec. 23, 2004	Dec. 23, 2005	Conduction (CO01-HY)
Spectrum analyzer	Agilent	E4408B	MY44211030	9KHz-26.5GHz	Jul. 27, 2004	Jul. 27, 2006	Radiation (03CH06-HY)
Receiver	R&S	ESCS30	100356	9KHz-2.75GHz	Jul. 09,2004	Jul. 09,2006	Radiation (03CH06-HY)
Controller	CT	SC100	N/A	N/A	N/A	N/A	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Nov. 22, 2004	Nov. 22, 2005	Radiation (03CH06-HY)
Horn Antenna	Com-Power	AH118	071025	1G-18G	Feb. 22, 2005	Feb. 22, 2006	Radiation (03CH06-HY)
SHF-EHF Horn	SCHWARZBECK	BBHA 9170	9170-249	14G - 40G	Jul. 21, 2005	Jul. 20, 2006	Radiation (03CH06-HY)
HF Amplifier	MITEQ	AFS44	973248	0.1G - 26.5G	Dec. 17, 2004	Dec. 17, 2005	Radiation (03CH06-HY)
Amplifier	MITEQ	AMF-6F	997165	26G - 40G	Jul. 21, 2005	Jul. 20, 2006	Radiation (03CH06-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	N/A	Radiation (03CH06-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	N/A	Radiation (03CH06-HY)



7. Uncertainty Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.10	Normal(k=2)	0.05
Cable loss	0.10	Normal(k=2)	0.05
AMN insertion loss	2.50	Rectangular	0.63
Receiver Spec	1.50	Rectangular	0.43
Site imperfection	1.39	Rectangular	0.80
Mismatch	+0.34/-0.35	U-shape	0.24
combined standard uncertainty Uc(y)	1.13		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.26		

Uncertainty of Radiated Emission Evaluation (30MHz ~ 1000MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.15	Normal(k=2)	0.08
Antenna factor calibration	1.12	Normal(k=2)	0.56
Cable loss calibration	0.12	Normal(k=2)	0.06
Pre Amplifier Gain calibration	0.13	Normal(k=2)	0.07
RCV/SPA specification	2.5	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1	Rectangular	0.29
Site imperfection	2.1	Rectangular	1.21
Mismatch	+0.39/-0.41	U-shaped	0.28
combined standard uncertainty Uc(y)	1.58		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	3.16		



Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 * \Gamma_2 * \Gamma_3)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty $U_c(y)$	2.36				
Measuring uncertainty for a level of confidence of 95% $U = 2U_c(y)$	4.72				