

# FCC Test Report

Equipment : ASUS Tablet  
Brand Name : ASUS  
Model No. : K01G  
FCC ID : MSQK01G  
Standard : 47 CFR FCC Part 15.247  
Operating Band : 2400 MHz – 2483.5 MHz  
Equipment Class : DSS  
Applicant : ASUSTeK COMPUTER INC.  
Manufacturer : 4F, No. 150, LI-TE RD., PEITOU, TAIPEI, TAIWAN  
RF Module : BROADCOM / BCM43340

The product sample received on Aug. 08, 2014 and completely tested on Aug. 22, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Wayne Hsu / Assistant Manager



## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Support Equipment.....	7
1.3	Testing Applied Standards .....	7
1.4	Testing Location Information .....	8
1.5	Measurement Uncertainty .....	8
<b>2</b>	<b>TEST CONFIGURATION OF EUT .....</b>	<b>9</b>
2.1	The Worst Case Modulation Configuration .....	9
2.2	Test Channel Frequencies Configuration.....	9
2.3	The Worst Case Power Setting Parameter .....	9
2.4	The Worst Case Measurement Configuration.....	10
2.5	Test Setup Diagram .....	11
<b>3</b>	<b>TRANSMITTER TEST RESULT .....</b>	<b>13</b>
3.1	AC Power-line Conducted Emissions .....	13
3.2	20dB Bandwidth and Carrier Frequency Separation .....	16
3.3	Number of Hopping Frequencies .....	18
3.4	Time of Occupancy (Dwell Time) .....	20
3.5	RF Output Power.....	22
3.6	Transmitter Radiated Bandedge Emissions.....	24
3.7	Transmitter Radiated Unwanted Emissions .....	27
<b>4</b>	<b>TEST EQUIPMENT AND CALIBRATION DATA .....</b>	<b>38</b>
<b>APPENDIX A. TEST PHOTOS</b>		
<b>APPENDIX B. PHOTOGRAPHS OF EUT</b>		

## Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.3	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.3633820 MHz 43.40 (Margin 15.25 dB) - QP 38.35 (Margin 10.30 dB) - AV	FCC 15.207	Complied
3.2	15.247(a)	20dB Bandwidth	EDR: 1.3372 MHz	N/A	Complied
3.2	15.247(a)	Carrier Frequency Separation (ChS)	EDR: 1.0000 MHz	$ChS \geq BW_{20dB} \times 2/3$	Complied
3.3	15.247(a)	Number of Hopping Frequencies (N)	Max: 79 Min: 15	$N \geq 15$	Complied
3.4	15.247(a)	Time of Occupancy (Dwell Time)	EDR: 0.317 sec	0.4 s within $0.4 \times N$	Complied
3.5	15.247(b)	RF Output Power (that Maximum Peak Conducted Output Power)	Power [dBm] BR: 6.57 EDR: 5.20	Power [dBm] BR:21 EDR:21	Complied
3.6	15.247(c)	Transmitter Radiated Bandedge Emissions	Restricted Bands [dBuV/m at 3m]: 2483.53 MHz 55.98 (Margin 18.02 dB) - PK 45.44 (Margin 8.56 dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.7	15.247(c)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 30.00 MHz 28.00 (Margin 12.00 dB) - PK	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied



SPORTON INTERNATIONAL INC.  
TEL : 886-3-327-3456  
FAX : 886-3-327-0973

# 1 General Description

## 1.1 Information

### 1.1.1 Manufacturer and Factory Information

<b>Manufacturer :</b>	ASUSTeK COMPUTER INC. 4F, No. 150, LI-TE RD., PEITOU, TAIPEI, TAIWAN
<b>Factory 1.</b>	COTEK ELECTRONICS (SUZHOU) CO LTD 288 MAYUN RD NEW DISTRICT SUZHOU JIANGSU CHINA

### 1.1.2 RF General Information

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	RF Output Power (dBm)
2400-2483.5	BR / EDR	2402-2480	0-78 [79]	6.57
Note 1: Bluetooth BR uses a GFSK (1Mbps). Note 2: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps). Note 3: RF output power specifies that Maximum Peak Conducted Output Power.				

### 1.1.3 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input checked="" type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	PIFA	-0.33

**1.1.4 Type of EUT**

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input checked="" type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:




**1.1.5 Test Signal Duty Cycle**

Operated Mode for Worst Duty Cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 78.38% - test mode single channel- BR-1Mbps DH5	1.06
<input checked="" type="checkbox"/> 79.15% - test mode single channel- EDR-2Mbps DH5	1.02
<input checked="" type="checkbox"/> 79.15% - test mode single channel- EDR-3Mbps DH5	1.02
Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle.	

**1.1.6 EUT Operational Condition**

<b>Supply Voltage</b>	<input checked="" type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
<b>Type of DC Source</b>	<input checked="" type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> From system	<input checked="" type="checkbox"/> Li-ion Battery

## 1.2 Accessories and Support Equipment

Accessories Information				
AC Adapter 1	Brand Name	ASUS	Model Name	W12-010N3A
	Vendor	Chicony		
	Power Rating	I/P: 100-240V~50/60Hz 0.3A; O/P: 5V  2A		
AC Adapter 2	Brand Name	ASUS	Model Name	AD897320
	Vendor	PI		
	Power Rating	I/P: 100-240V~50/60Hz 0.3A; O/P: 5V  2A		
Li-ion battery	Brand Name	ASUS	Model Name	C11P1329
	Vendor	SMP		
	Power Rating	3.8V  3948mAh, 15.2Wh		
USB Cable	Brand Name	ASUS	Model Name	CUHD003B-Y11EF
	Vendor	FOXCONN		

Note: Regarding to more detail and other information, please refer to user manual.

Support Equipment- RF Conducted			
No.	Equipment	Brand Name	Model Name
1	Base Station	Anritsu	MT8852B
2	Notebook PC	DELL	E5520

Support Equipment- Radiated Emission			
No.	Equipment	Brand Name	Model Name
1	Base Station	R&S	CBT

## 1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.10-2009
- ♦ 47 CFR FCC Part 15
- ♦ FCC DA 00-0705

## 1.4 Testing Location Information

Testing Location			
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	
		TEL : 886-3-327-3456 FAX : 886-3-327-0973	
Test Condition	Test Site No.	Test Engineer	Test Environment
AC Conduction	CO04-HY	Zeus	25°C / 45%
RF Conducted	TH06-HY	Cain	24.6°C / 66%
Radiated Emission	03CH03-HY	Hunter	26.1°C / 45%

## 1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		±2.3 dB
Emission bandwidth, 20dB bandwidth		±1.4 %
RF output power, conducted		±0.6 dB
Unwanted emissions, conducted	9 – 150 kHz	±0.4 dB
	0.15 – 30 MHz	±0.4 dB
	30 – 1000 MHz	±0.5 dB
	1 – 18 GHz	±0.7 dB
	18 – 40 GHz	±0.8 dB
	40 – 200 GHz	N/A
All emissions, radiated	9 – 150 kHz	±2.5 dB
	0.15 – 30 MHz	±2.3 dB
	30 – 1000 MHz	±2.6 dB
	1 – 18 GHz	±3.6 dB
	18 – 40 GHz	±3.8 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±3 %
DC and low frequency voltages		±3 %
Time		±1.4 %
Duty Cycle		±1.4 %



## 2 Test Configuration of EUT

### 2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing					
Bluetooth Mode	Transmit Chains (N <sub>TX</sub> )	Data Rate	Modulation Mode	RF Output Power (dBm)	Worst Mode
BR	1	1 Mbps	BR-1Mbps	6.57	BR-1Mbps
EDR	1	2 Mbps	EDR-2Mbps	5.01	
EDR	1	3 Mbps	EDR-3Mbps	5.20	
Note 1: Bluetooth BR uses a combination of GFSK (1Mbps).					
Note 2: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps).					
Note 3: Modulation modes consist below configuration: FHSS BR-1Mbps: GFSK (1Mbps), EDR-2Mbps: $\pi/4$ -DQPSK (2Mbps), EDR-3Mbps: 8DPSK(3Mbps)					
Note 4: RF output power specifies that Maximum Peak Conducted Output Power					

### 2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Bluetooth Mode	Test Channel Frequencies (MHz) – FX (Frequencies Abbreviations)
BR / EDR	2402-(F1), 2441-(F2), 2480-(F3)




### 2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter			
Test Software Version	DUT Mode		
Modulation Mode	2402 MHz	2440 MHz	2480 MHz
BR,1Mbps	Default	Default	Default
EDR,2Mbps	Default	Default	Default
EDR,3Mbps	Default	Default	Default


## 2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
<b>Operating Mode</b>	Operating Mode Description
1	Adapter mode and transmit
2	USB mode and transmit
For operating mode 1 is the worst case and it was record in this test report.	


The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	RF Output Power, 20dB Bandwidth, Carrier Frequency Separation (ChS) Number of Hopping Frequencies (N), Time of Occupancy (Dwell Time)
<b>Test Condition</b>	Conducted measurement at transmit chains
<b>Modulation Mode</b>	BR-1Mbps, EDR-3Mbps

The Worst Case Mode for Following Conformance Tests			
<b>Tests Item</b>	Transmitter Radiated Bandedge Emissions Transmitter Radiated Unwanted Emissions		
<b>Test Condition</b>	Radiated measurement		
<b>User Position</b>	<input type="checkbox"/> EUT will be placed in fixed position.		
	<input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes. The worst planes is X.		
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed three orthogonal planes.		
<b>Operating Mode</b>	1. Adapter mode and transmit 2. USB mode and transmit For operating mode 1 is the worst case and it was record in this test report.		
<b>Modulation Mode</b>	For test mode BR-1Mbps, EDR-2Mbps and EDR-3Mbps of the transmitter were assess for pretest. The worst case was recorded in this test report and shown below as the following:  Transmitter Radiated Bandedge Emissions: BR-1Mbps / EDR-2Mbps / EDR-3Mbps . Transmitter Radiated Unwanted Emissions: BR-1Mbps		
<b>Orthogonal Planes of EUT</b>	<b>X Plane</b>	<b>Y Plane</b>	<b>Z Plane</b>
			


## 2.5 Test Setup Diagram

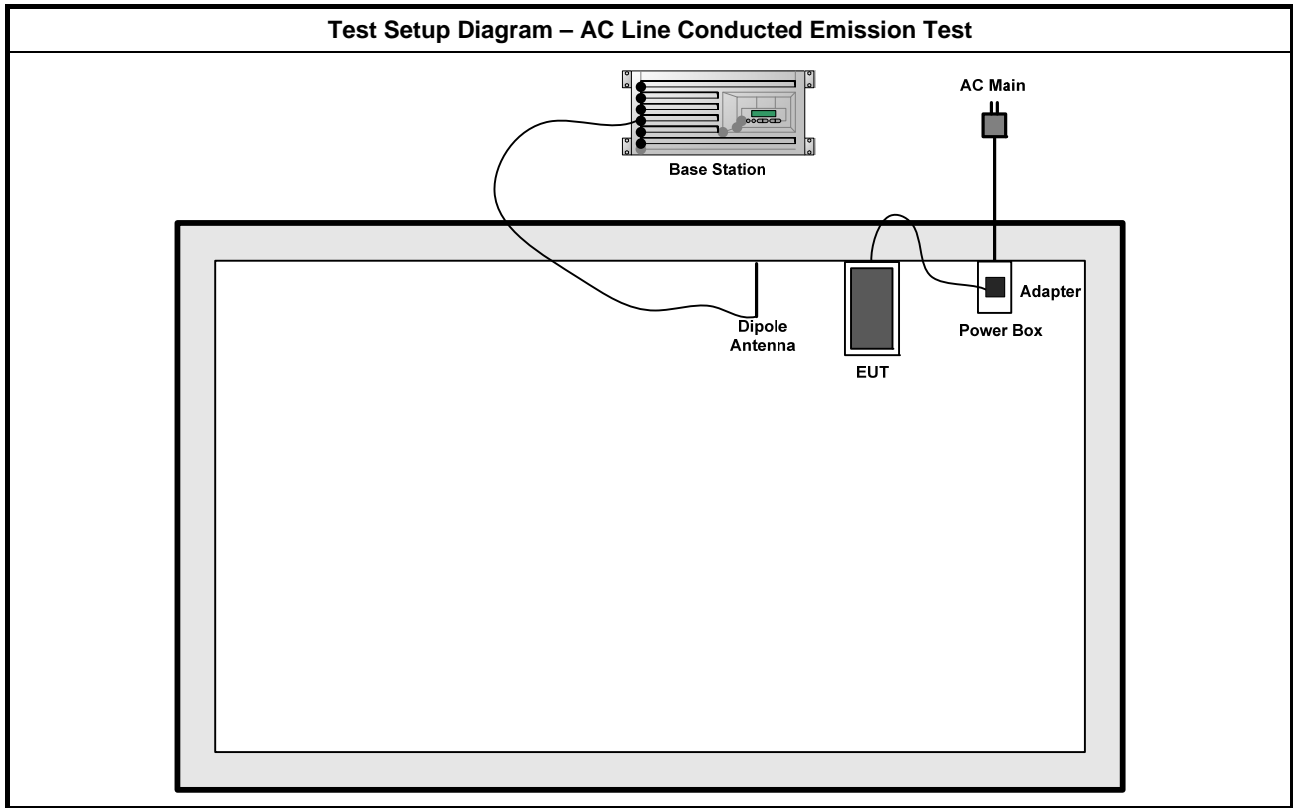

**Test Setup Diagram – Radiated Emission (below 1GHz)**

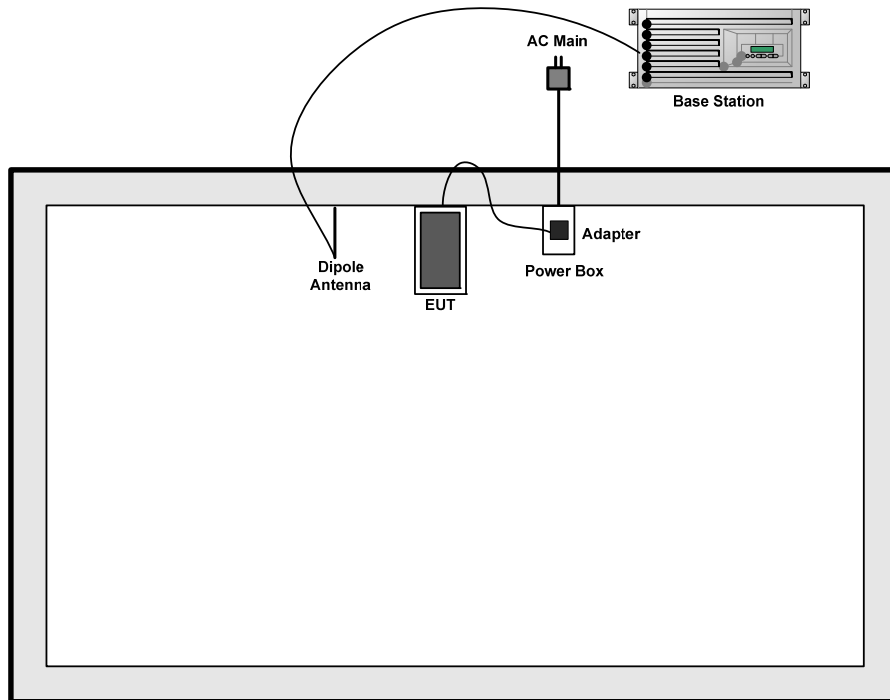

**Test Setup Diagram – Radiated Emission (Above 1GHz)**

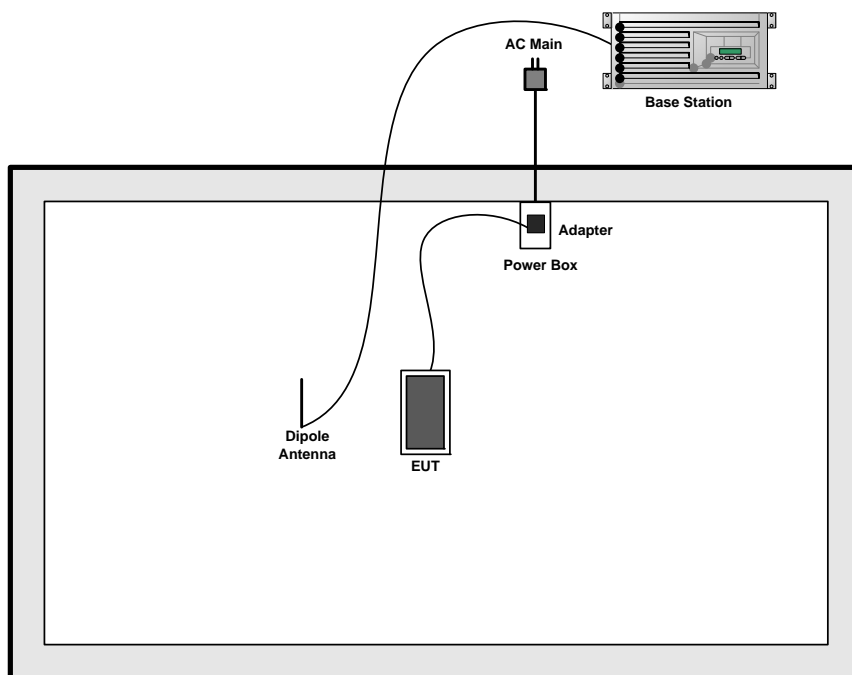

### 3 Transmitter Test Result

### 3.1 AC Power-line Conducted Emissions

### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


### 3.1.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

### 3.1.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.


### 3.1.4 Test Setup

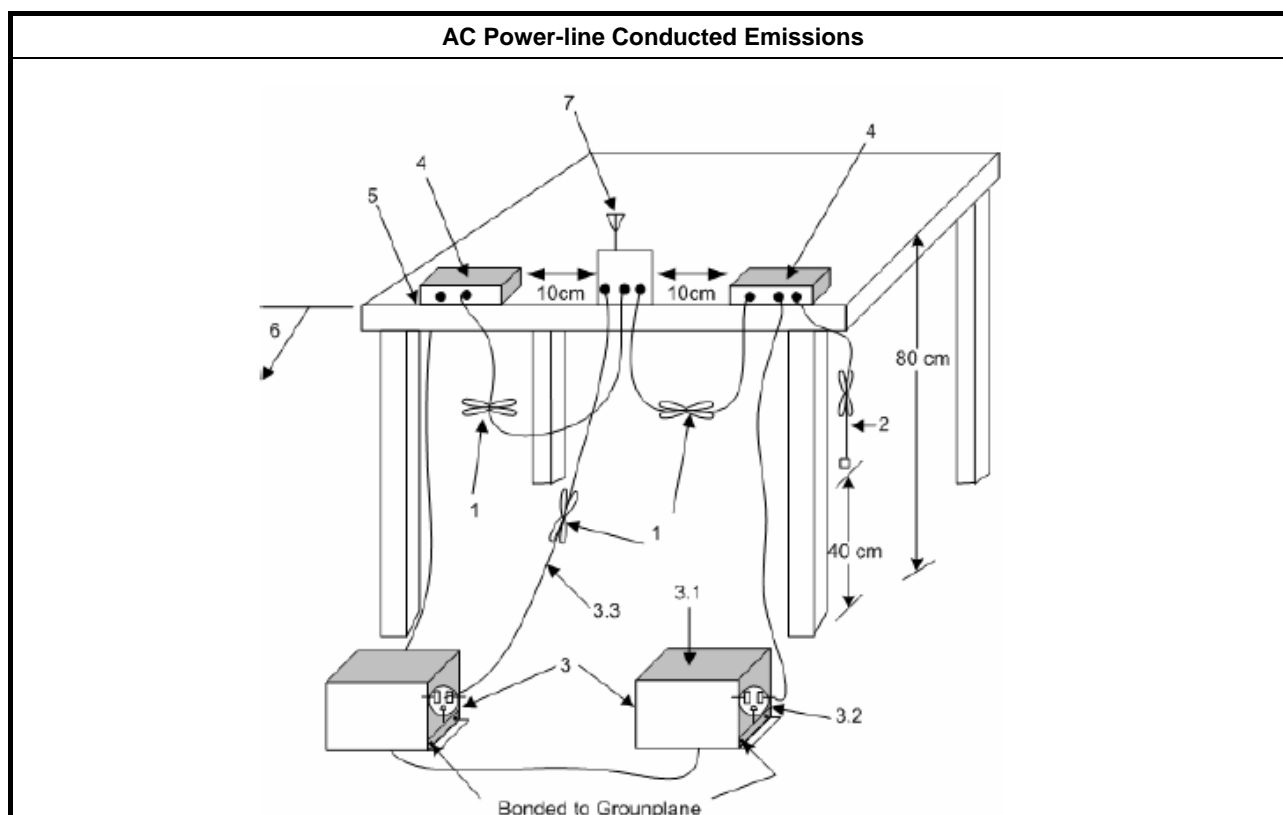

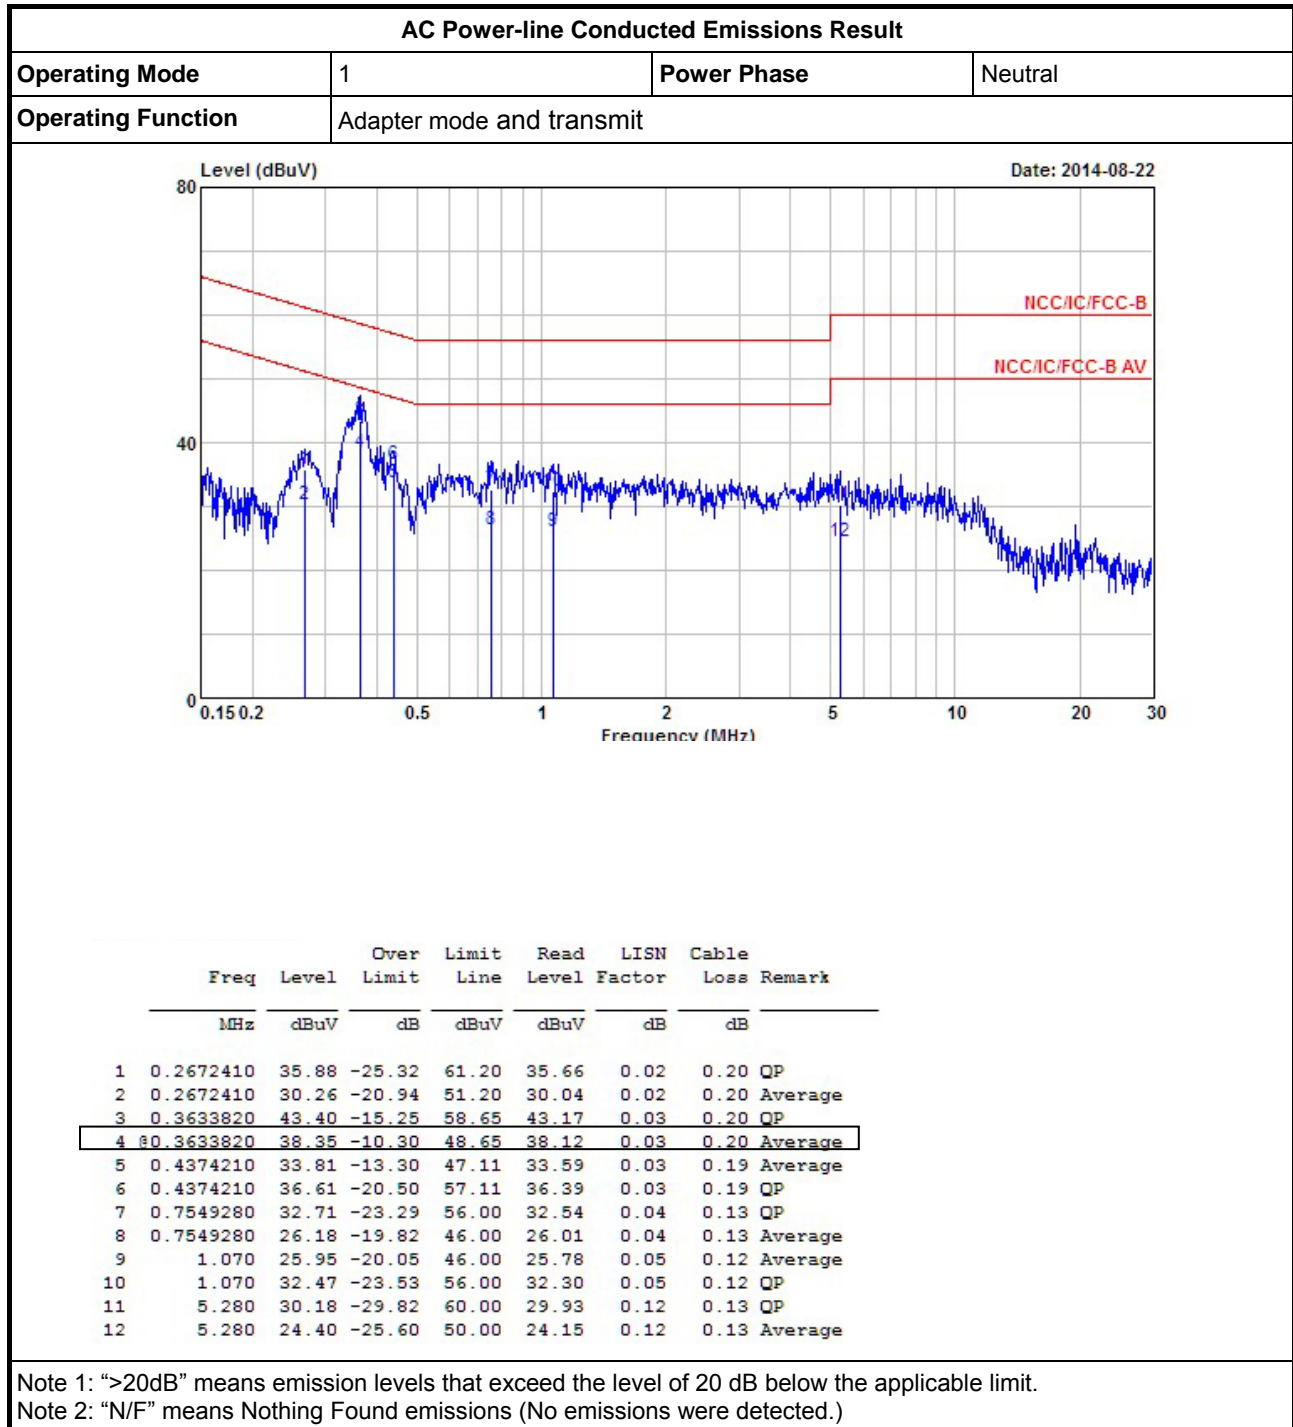**3.1.5 Test Result of AC Power-line Conducted Emissions**


### AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Adapter mode and transmit		

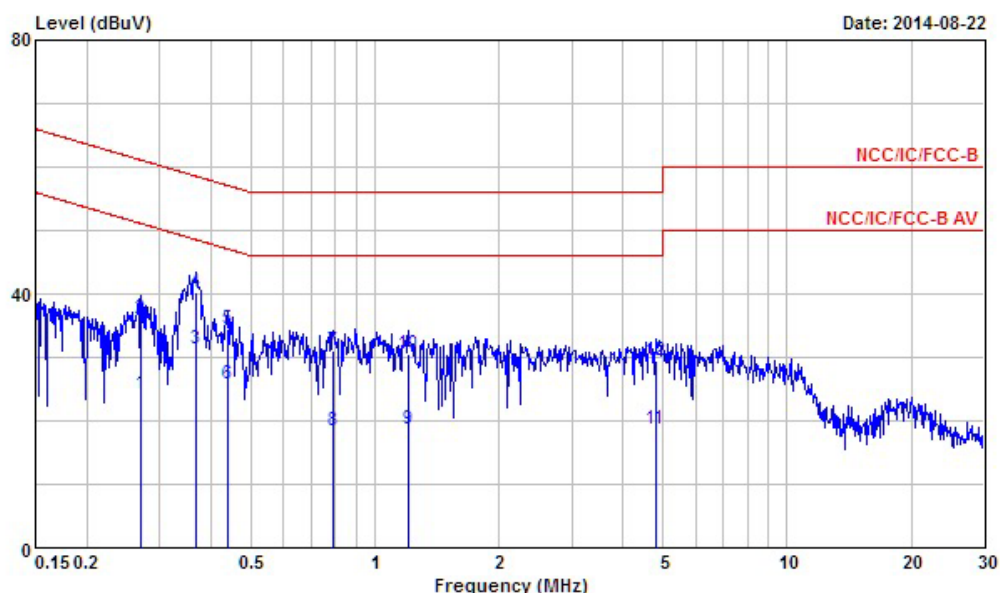

0.15 0.2 0.5 1 2 5 10 20 30

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.2700880	24.12	-27.00	51.12	23.89	0.03	0.20	Average
2	0.2700880	35.98	-25.14	61.12	35.75	0.03	0.20	QP
3	0.3692040	31.37	-17.15	48.52	31.14	0.03	0.20	Average
4	0.3692040	40.28	-18.24	58.52	40.05	0.03	0.20	QP
5	0.4397440	34.54	-22.53	57.07	34.32	0.03	0.19	QP
6	0.4397440	25.88	-21.19	47.07	25.66	0.03	0.19	Average
7	0.7917990	31.04	-24.96	56.00	30.86	0.05	0.13	QP
8	0.7917990	18.30	-27.70	46.00	18.12	0.05	0.13	Average
9	1.200	18.69	-27.31	46.00	18.48	0.06	0.15	Average
10	1.200	30.42	-25.58	56.00	30.21	0.06	0.15	QP
11	4.800	18.68	-27.32	46.00	18.44	0.12	0.12	Average
12	4.800	29.45	-26.55	56.00	29.21	0.12	0.12	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

## 3.2 20dB Bandwidth and Carrier Frequency Separation

### 3.2.1 20dB Bandwidth and Carrier Frequency Separation Limit

20dB Bandwidth and Carrier Frequency Separation Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/>	2400-2483.5 MHz Band:
<input type="checkbox"/>	$N \geq 75$ and ChS $\geq$ MAX (20 dB bandwidth, 25 kHz).
<input checked="" type="checkbox"/>	$N \geq 15$ and ChS $\geq$ MAX (20 dB bandwidth x 2/3, 25 kHz).
<b>N:</b> Number of Hopping Frequencies; <b>ChS:</b> Hopping Channel Separation	


### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for 20 dB bandwidth measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.7.2 for carrier frequency separation measurement.
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

### 3.2.4 Test Setup

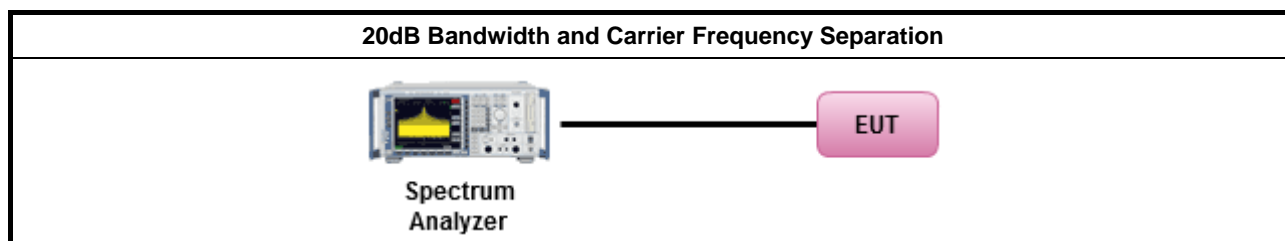




### 3.2.5 Test Result of 20dB Bandwidth and Carrier Frequency Separation

20dB Bandwidth and Carrier Frequency Separation Result					
Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)
BR-1Mbps	2402	1.0289	0.9247	1.0000	0.68593
BR-1Mbps	2441	1.0333	0.9204	1.0000	0.68887
BR-1Mbps	2480	1.0333	0.9247	1.0000	0.68887
EDR-3Mbps	2402	1.3329	1.2069	1.0000	0.88860
EDR-3Mbps	2441	1.3372	1.2026	1.0000	0.89147
EDR-3Mbps	2480	1.3329	1.2069	1.0000	0.88860
<b>Result</b>		<b>Complied</b>			


#### Worst 20dB Bandwidth Plots

##### EDR-3Mbps

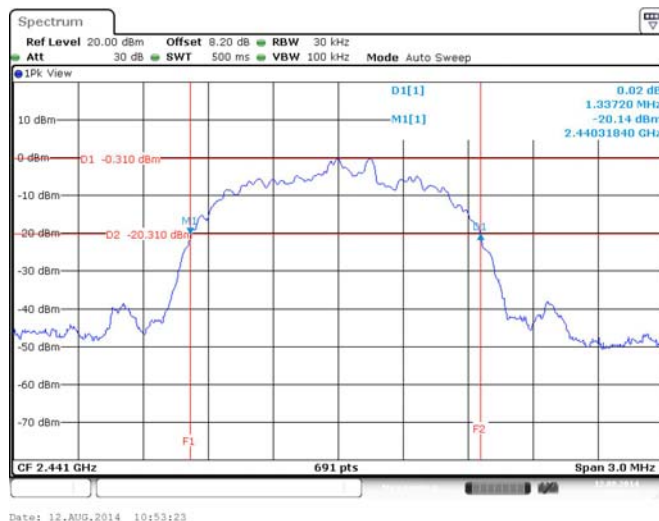

#### Worst Carrier Frequency Separation Plots

##### EDR-3Mbps

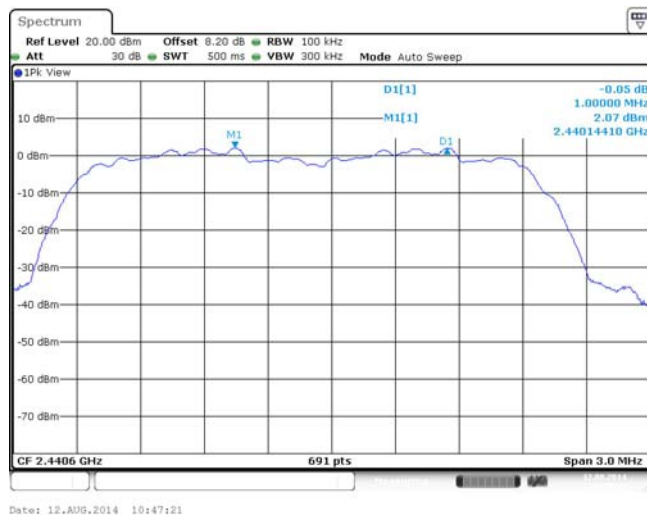

### 3.3 Number of Hopping Frequencies

#### 3.3.1 Number of Hopping Frequencies Limit

Number of Hopping Frequencies Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/>	2400-2483.5 MHz Band:
<input type="checkbox"/>	$N \geq 75$ and ChS $\geq$ MAX (20 dB bandwidth, 25 kHz).
<input checked="" type="checkbox"/>	$N \geq 15$ and ChS $\geq$ MAX (20 dB bandwidth x 2/3, 25 kHz).
<b>N:</b> Number of Hopping Frequencies; <b>ChS:</b> Hopping Channel Separation	


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.3.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.7.3 for number of hopping frequencies measurement.
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

#### 3.3.4 Test Setup

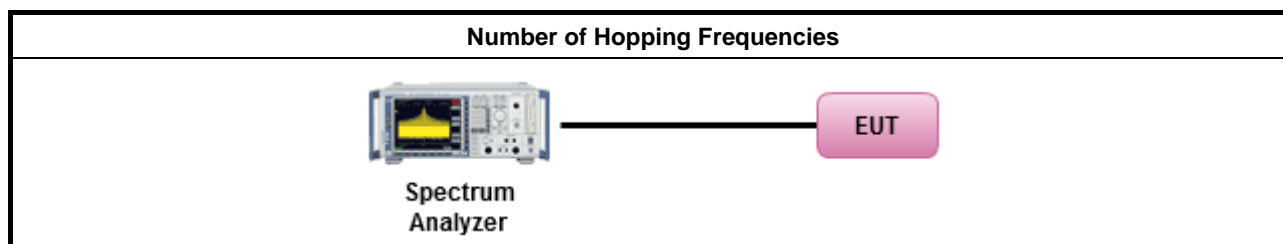

### 3.3.5 Test Result of Number of Hopping Frequencies

Number of Hopping Frequencies Result			
Modulation Mode	Freq. (MHz)	Hopping Channel Number (N)	Hopping Channel Number Limits
EDR-3Mbps	2402-2480	79	15
<b>Result</b>	<b>Complied</b>		

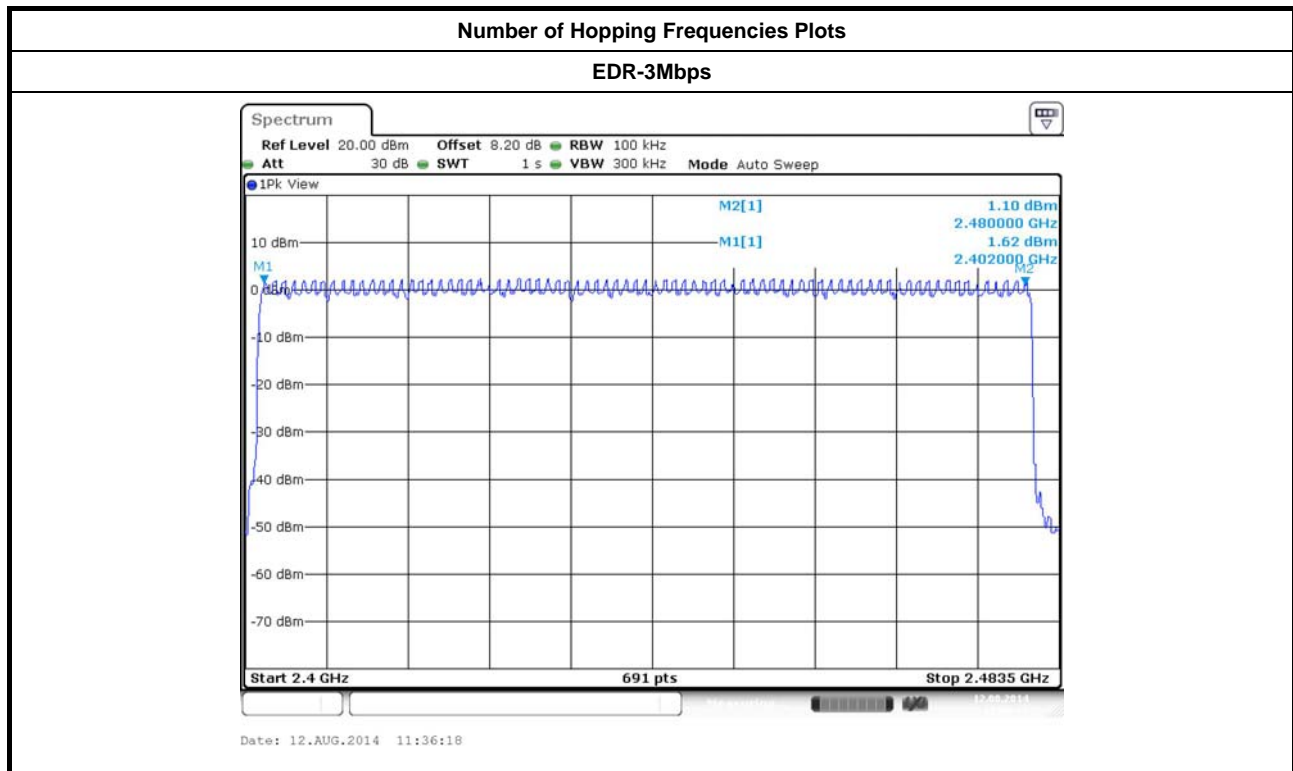

### 3.4 Time of Occupancy (Dwell Time)

#### 3.4.1 Time of Occupancy (Dwell Time) Limit

Time of Occupancy (Dwell Time) Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/>	2400-2483.5 MHz Band: Dwell time $\leq 0.4$ second within $0.4 \times N$
<b>N:</b> Number of Hopping Frequencies	


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.7.4 for dwell time measurement.
<input checked="" type="checkbox"/>	Bluetooth ACL packets can be 1, 3, or 5 time slots. Following as dwell time. Operate DH5 at maximum dwell time and maximum duty cycle.
<input checked="" type="checkbox"/>	The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $1/1600$ seconds, or 0.625ms. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.
<input checked="" type="checkbox"/>	The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $3/1600$ seconds, or 1.875ms. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
<input checked="" type="checkbox"/>	The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $5/1600$ seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.


#### 3.4.4 Test Setup

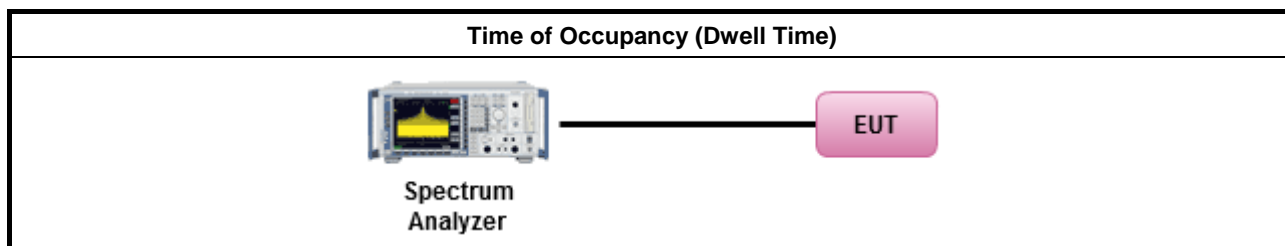

### 3.4.5 Test Result of Time of Occupancy (Dwell Time)

Time of Occupancy (Dwell Time) Result					
Modulation Mode	Freq. (MHz)	Pulse Time per Hop (ms)	Number of Pulse in [0.4 x N sec]	Dwell Time in [0.4 x N sec] (s)	Dwell Time Limits (s)
EDR-3Mbps	2402	2.971	106.7	0.317	0.4
<b>Result</b>		<b>Complied</b>			

Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms.

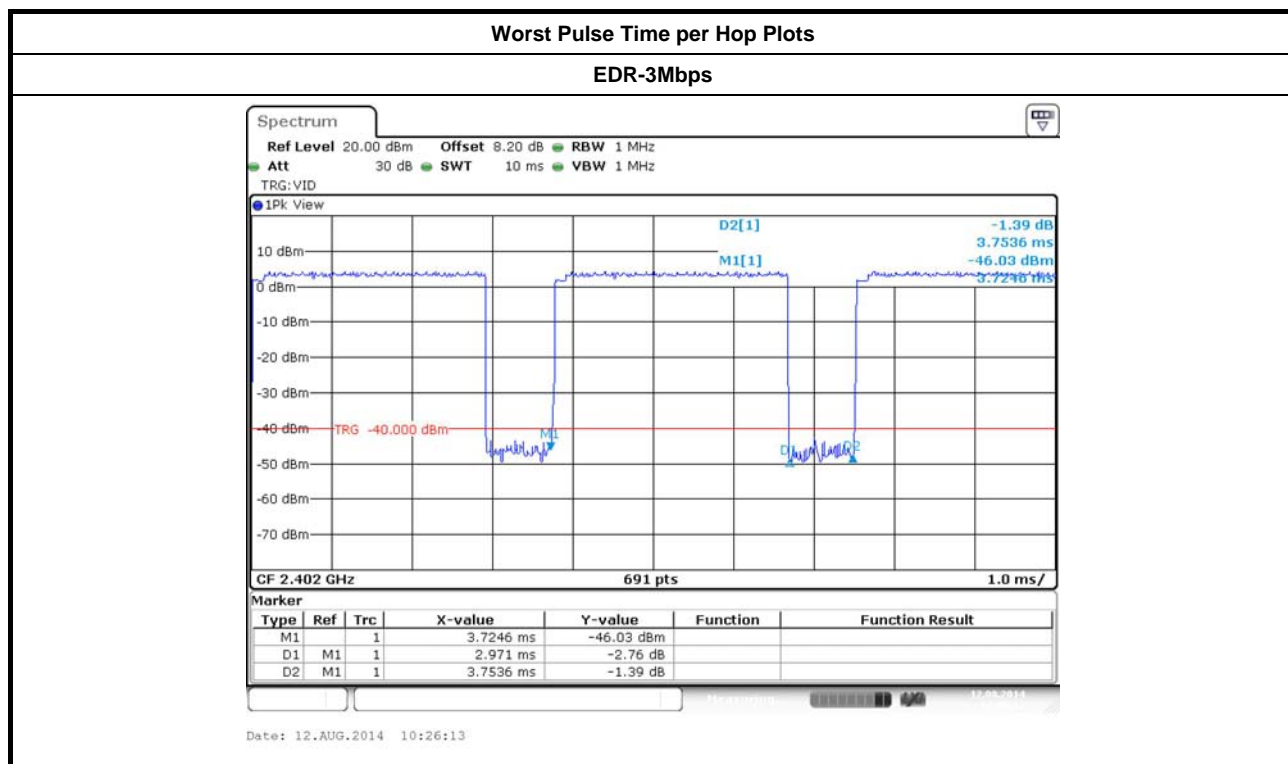

### 3.5 RF Output Power

#### 3.5.1 RF Output Power Limit

RF Output Power Limit for Frequency Hopping Systems	
<b>Maximum Peak Conducted Output Power Limit</b>	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
	<input type="checkbox"/> For Hopping Channel: $N \geq 75$
	<input type="checkbox"/> If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	<input type="checkbox"/> If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	<input checked="" type="checkbox"/> For Hopping Channel: $N \geq 15$
	<input checked="" type="checkbox"/> If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 21$ dBm (0.125 W)
	<input type="checkbox"/> If $G_{TX} > 6$ dBi, then $P_{Out} = 21 - (G_{TX} - 6)$ dBm
<b>e.i.r.p. Power Limit:</b>	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
	<input type="checkbox"/> For Hopping Channel: $N \geq 75 - P_{eirp} \leq 36$ dBm (4 W)
	<input checked="" type="checkbox"/> For Hopping Channel: $N \geq 15 - P_{eirp} \leq 27$ dBm (0.5 W)
$G_{TX}$ = the maximum transmitting antenna directional gain in dBi. $P_{eirp}$ = e.i.r.p. Power in dBm. $N$ : Number of Hopping Frequencies $ChS$ : Hopping Channel Separation	


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/> Maximum Peak Conducted Output Power	
	<input type="checkbox"/> Refer as FCC DA 00-0705, spectrum analyzer for peak power.
	<input checked="" type="checkbox"/> Refer as FCC DA 00-0705, peak power meter for peak power.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 6.10.2.1 a) for peak power meter.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 6.10.2.1 a) for spectrum analyzer - (RBW $\geq$ EBW).
<input checked="" type="checkbox"/> For conducted measurement.	
	<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
	<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

### 3.5.4 Test Setup

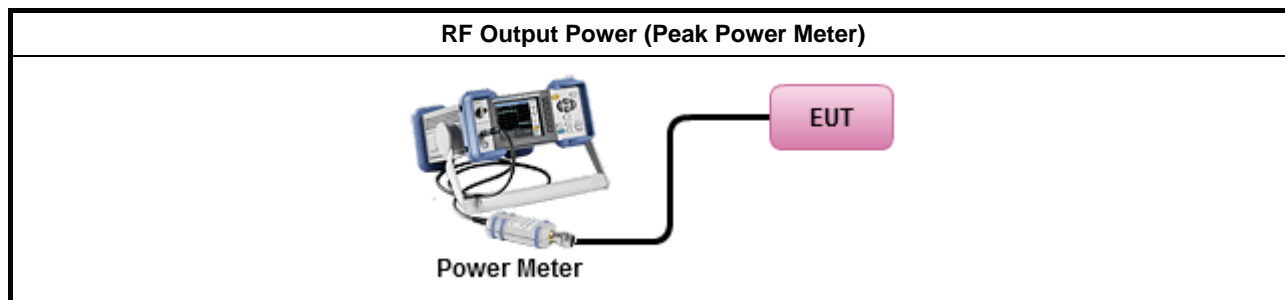


### 3.5.5 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
BR-1Mbps	2402	5.60	21	-0.33	5.27	27
BR-1Mbps	2441	6.57	21	-0.33	6.24	27
BR-1Mbps	2480	6.52	21	-0.33	6.19	27
EDR-3Mbps	2402	4.79	21	-0.33	4.46	27
EDR-3Mbps	2441	5.20	21	-0.33	4.87	27
EDR-3Mbps	2480	4.99	21	-0.33	4.66	27
Result		Complied				

### 3.6 Transmitter Radiated Bandedge Emissions

#### 3.6.1 Transmitter Radiated Bandedge Emissions Limit

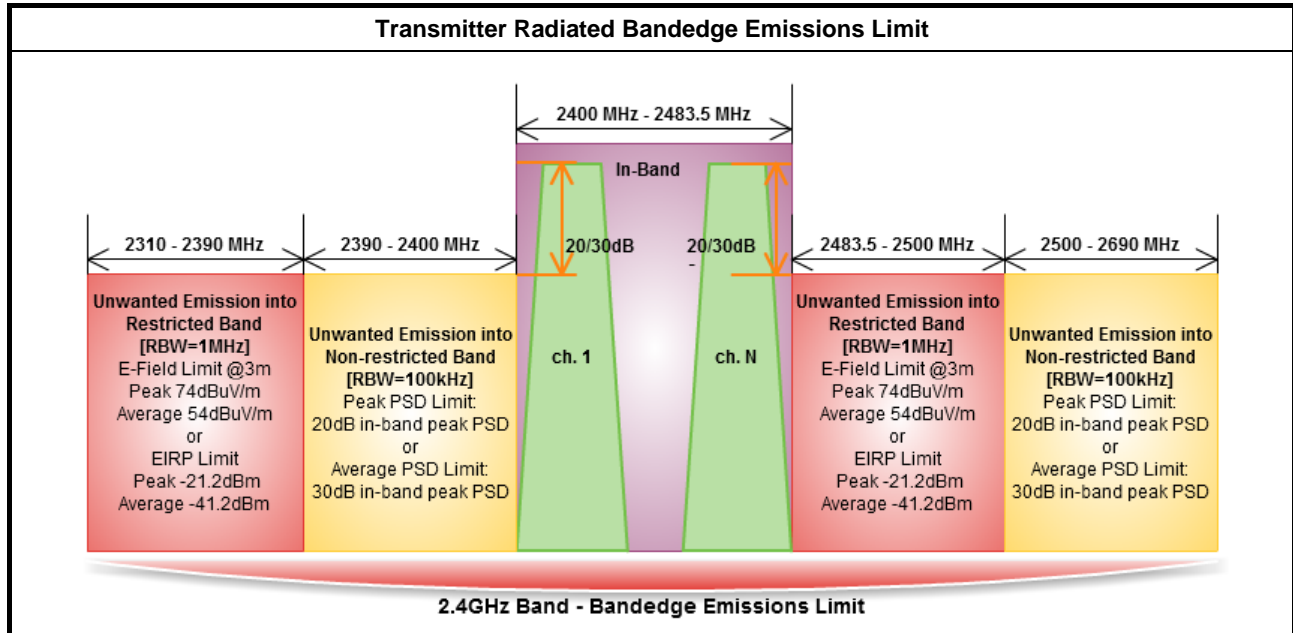

#### 3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

#### 3.6.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq 98$ or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
<input checked="" type="checkbox"/>	For unwanted emissions into restricted bands.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq 1/T$ , where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 7.7.9 for band-edge testing into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions and test distance is 3m.



### 3.6.4 Test Setup

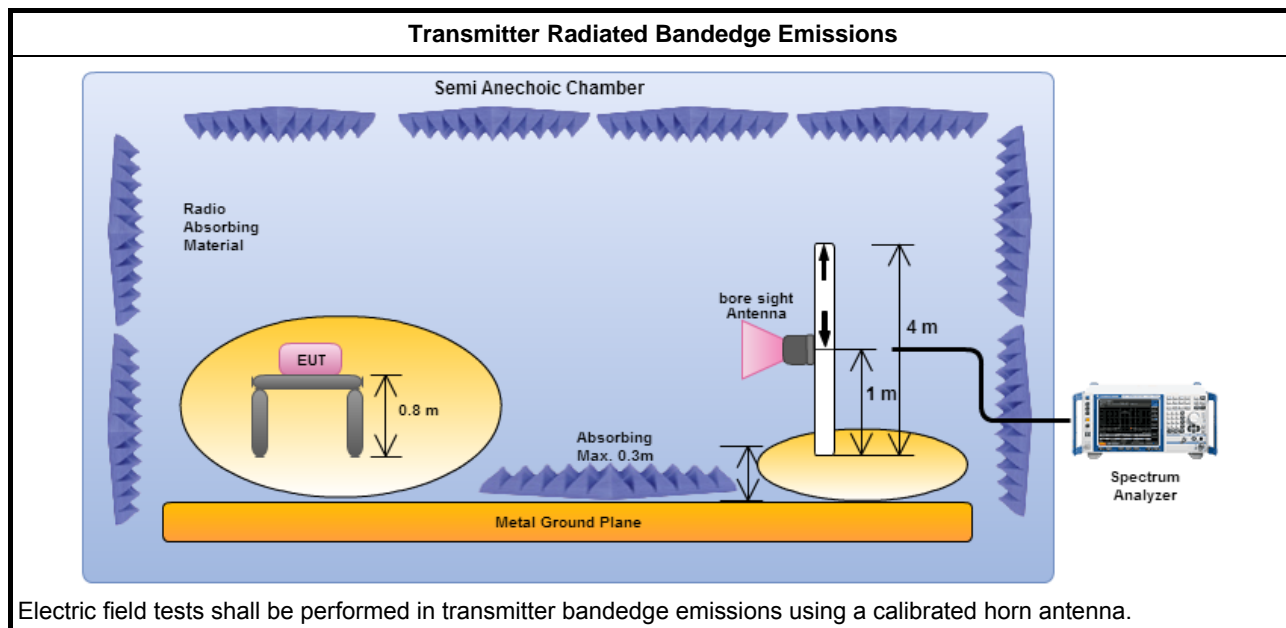

**3.6.5 Transmitter Radiated Bandedge Emissions**

Transmitter Radiated Bandedge Emissions (Non-restricted Band)								
Modulation	N <sub>TX</sub>	Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.
BR-1Mbps	1	2402	97.99	2390.58	59.51	38.48	20	H
BR-1Mbps	1	2480	101.84	2518.71	60.95	40.89	20	H
EDR-2Mbps	1	2402	93.23	2391.19	59.86	33.37	20	H
EDR-2Mbps	1	2480	97.65	2517.40	61.07	36.58	20	H
EDR-3Mbps	1	2402	93.41	2397.31	60.18	33.23	20	H
EDR-3Mbps	1	2480	97.11	2505.26	60.67	36.44	20	H

Note 1: Measurement worst emissions of receive antenna polarization.

Transmitter Radiated Bandedge Emissions (Restricted Band)										
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
BR-1Mbps	1	2402	3	2330.60	56.27	74	2311.43	43.51	54	H
BR-1Mbps	1	2480	3	2483.94	55.98	74	2483.53	45.44	54	H
EDR-2Mbps	1	2402	3	2372.02	56.65	74	2315.71	43.50	54	H
EDR-2Mbps	1	2480	3	2495.26	57.06	74	2483.53	44.72	54	H
EDR-3Mbps	1	2402	3	2329.58	56.07	74	2314.49	43.49	54	H
EDR-3Mbps	1	2480	3	2493.62	56.54	74	2483.53	44.55	54	H

Note 1: Measurement worst emissions of receive antenna polarization.  
 Note 2: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz

### 3.7 Transmitter Radiated Unwanted Emissions

#### 3.7.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

#### 3.7.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

### 3.7.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq 98$ or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC DA 00-0705, for spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$
<input checked="" type="checkbox"/>	For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
<input checked="" type="checkbox"/>	For unwanted emissions into restricted bands.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $\text{VBW} \geq 1/T$ , where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


### 3.7.4 Test Setup

#### Transmitter Radiated Unwanted Emissions Below 1GHz

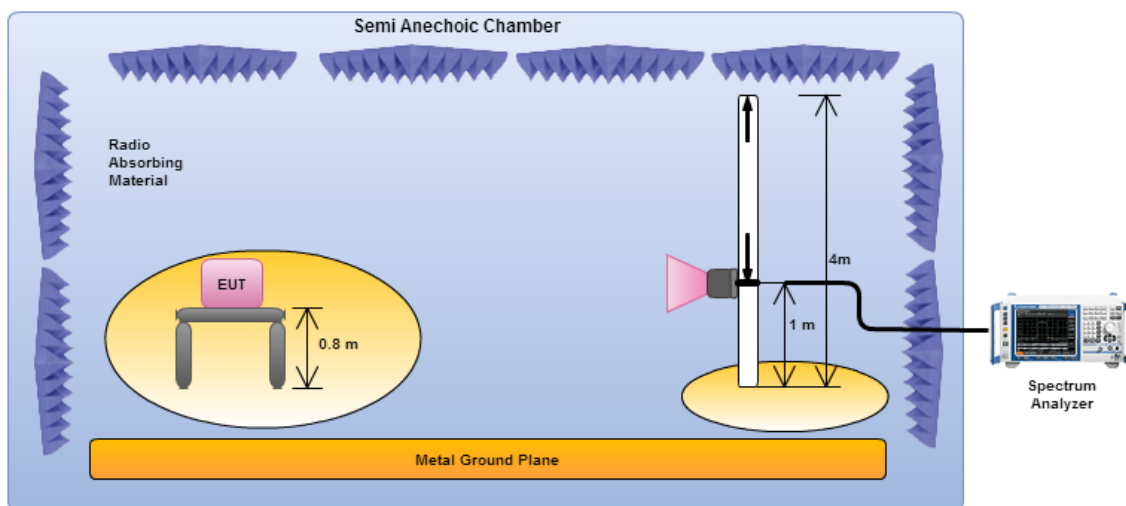

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna.


#### Transmitter Radiated Unwanted Emissions Above 1GHz

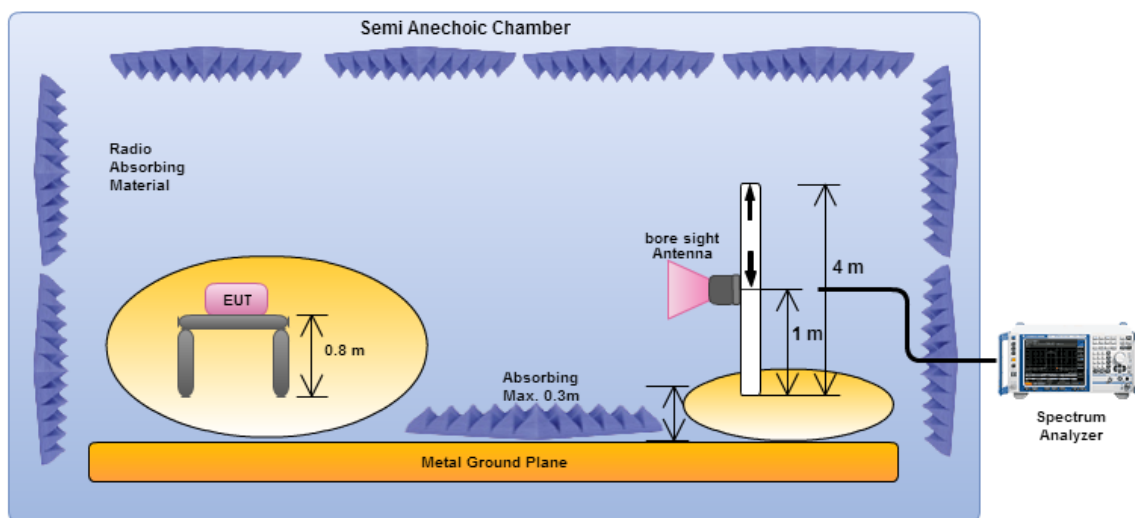

Electric field tests shall be performed in the frequency range of 1 GHz to 10th harmonic of highest fundamental frequency or 40 GHz using a calibrated horn antenna.


### 3.7.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

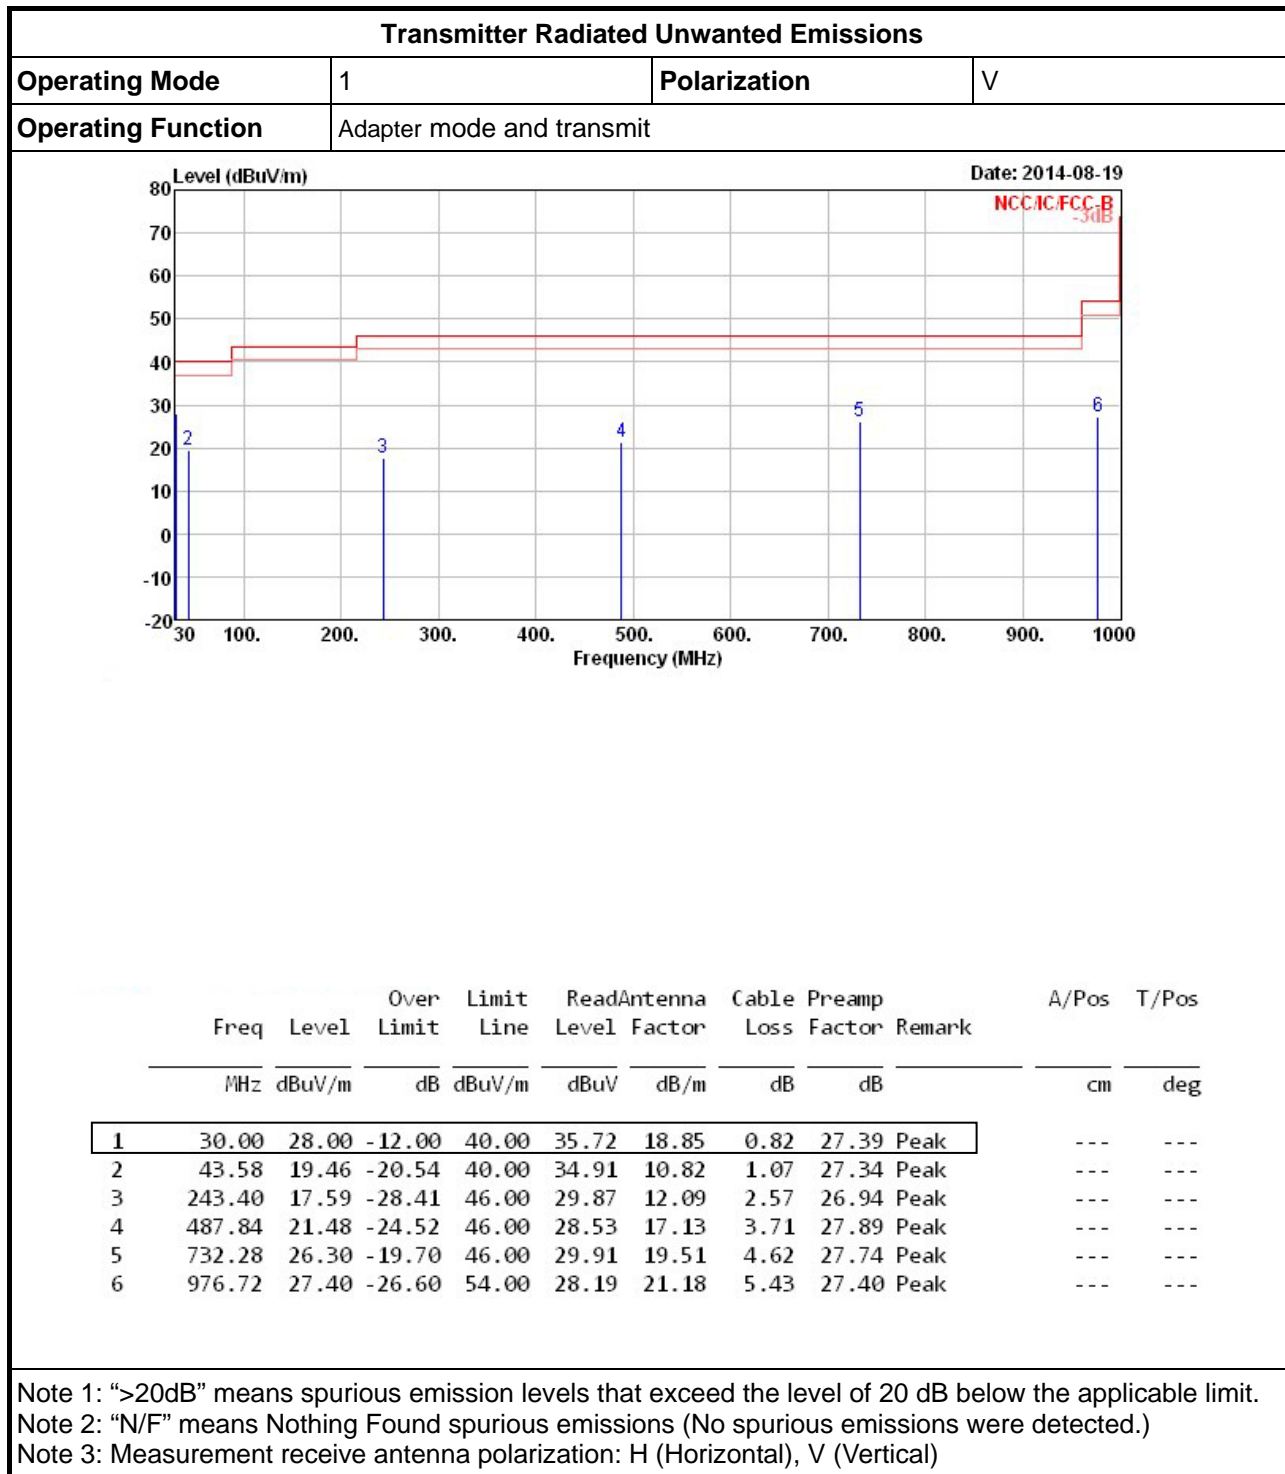**3.7.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)**


**Transmitter Radiated Unwanted Emissions**

Operating Mode	1	Polarization	H
Operating Function	Adapter mode and transmit		

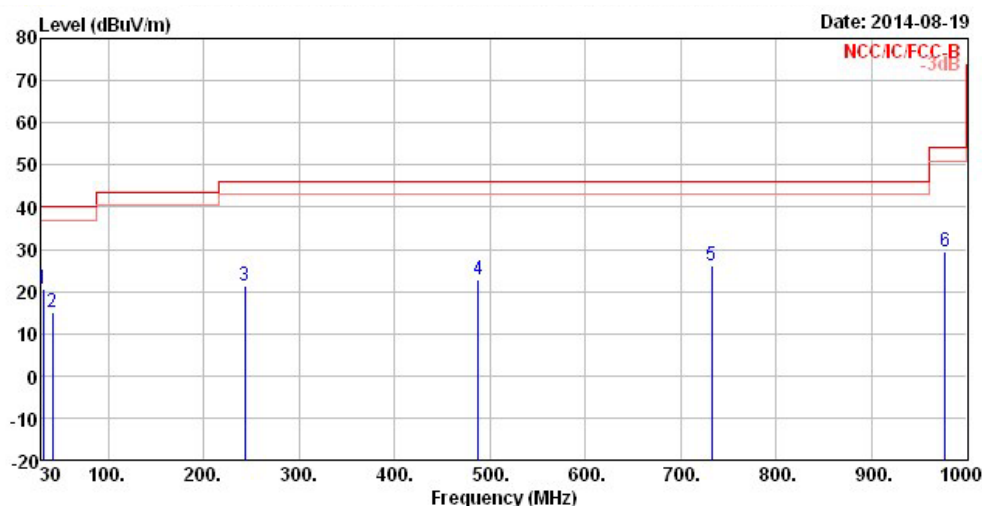


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	31.94	20.64	-19.36	40.00	29.36	17.76	0.87	27.35	Peak	---	---
2	41.64	15.22	-24.78	40.00	29.56	11.95	1.04	27.33	Peak	---	---
3	243.40	21.26	-24.74	46.00	33.54	12.09	2.57	26.94	Peak	---	---
4	487.84	22.76	-23.24	46.00	29.81	17.13	3.71	27.89	Peak	---	---
5	732.28	26.05	-19.95	46.00	29.66	19.51	4.62	27.74	Peak	---	---
6	976.72	29.62	-24.38	54.00	30.41	21.18	5.43	27.40	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

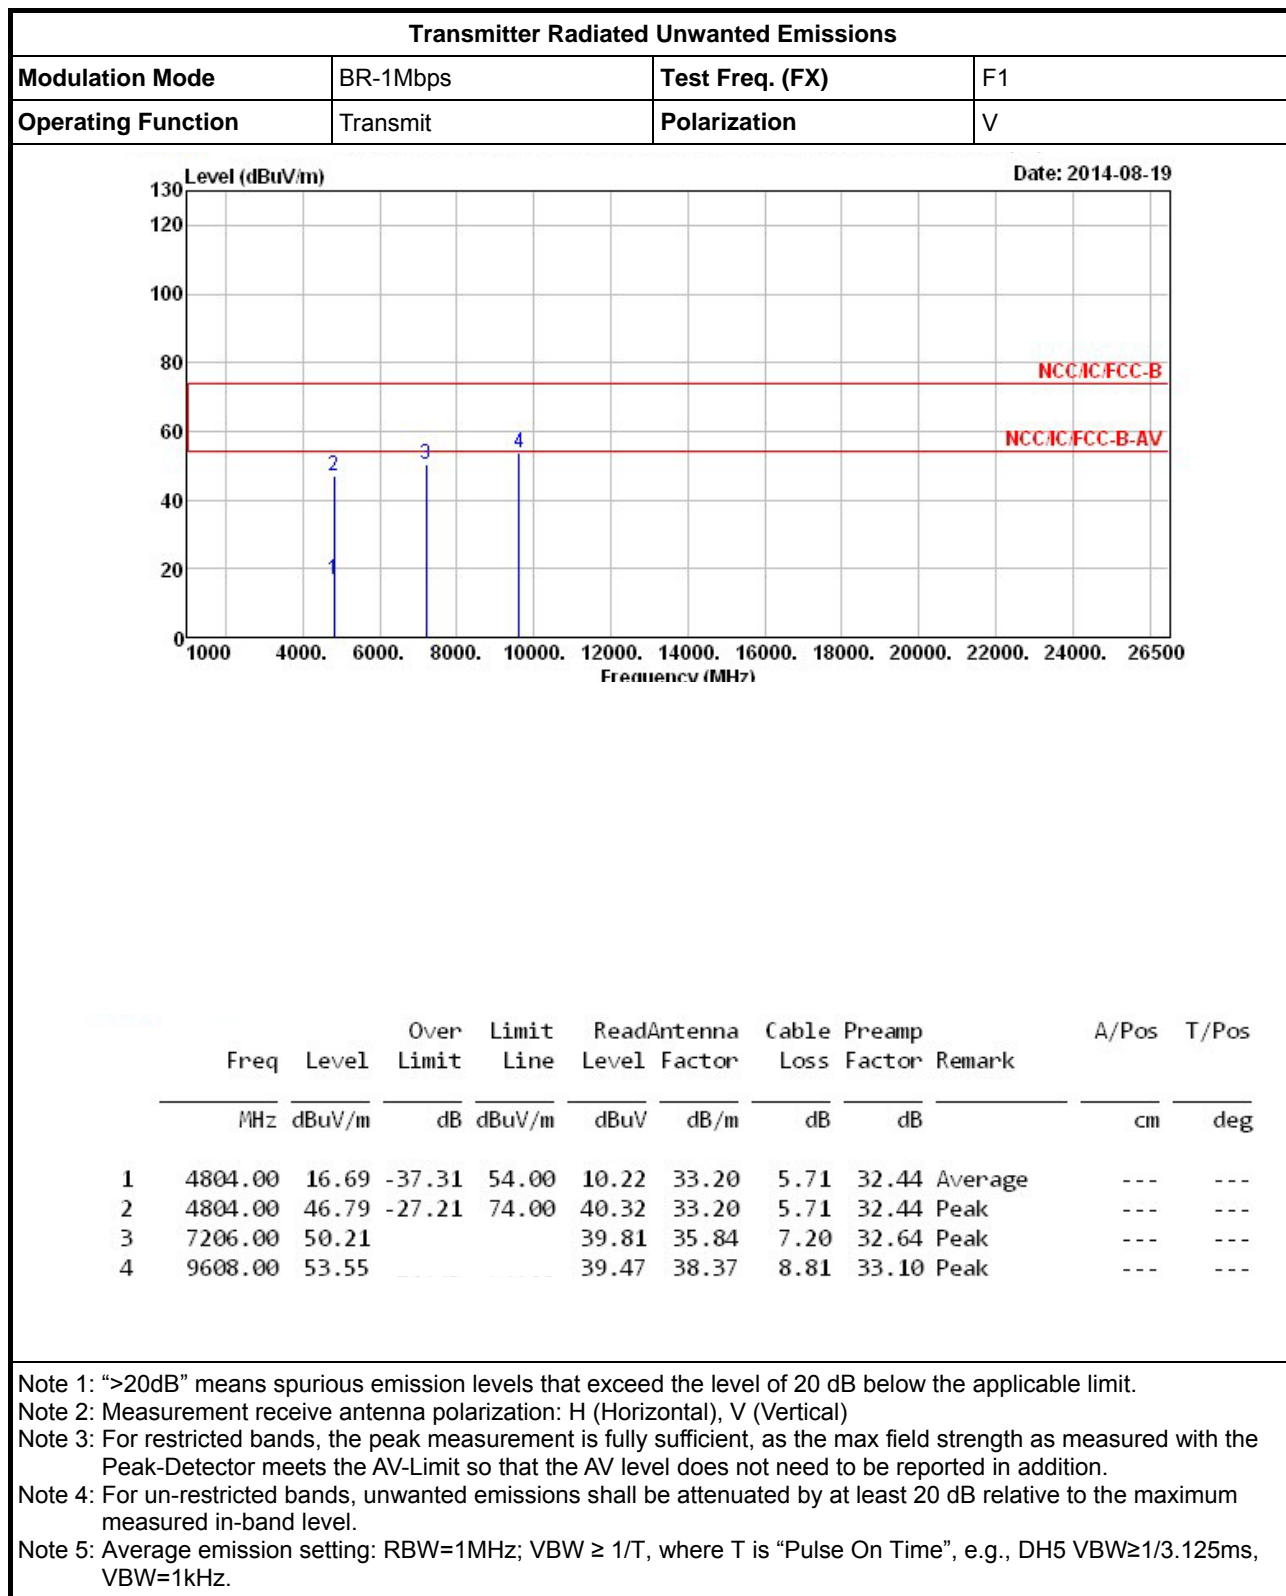**3.7.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)**




**Transmitter Radiated Unwanted Emissions**

<b>Modulation Mode</b>	BR-1Mbps	<b>Test Freq. (FX)</b>	F1
<b>Operating Function</b>	Transmit	<b>Polarization</b>	H

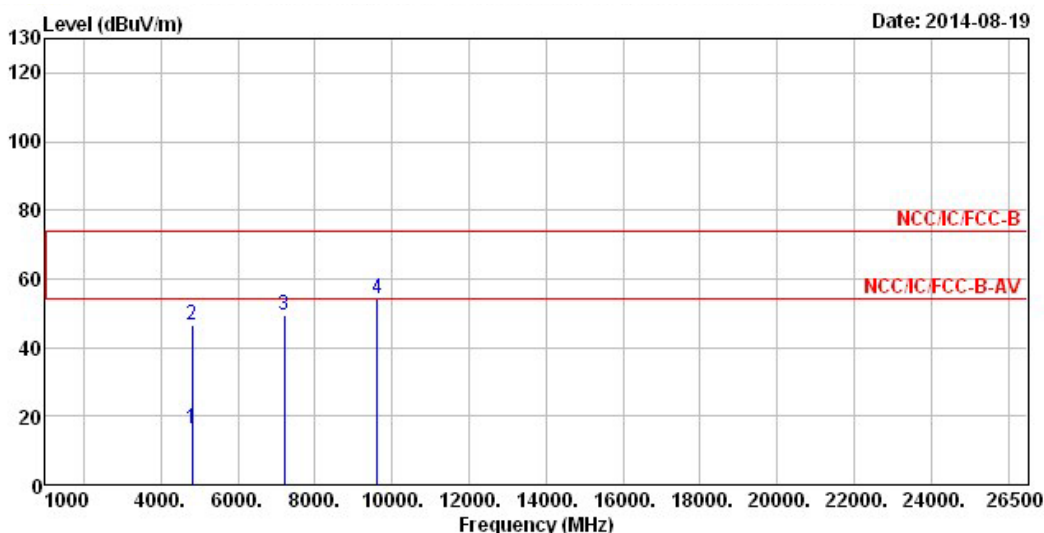

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4804.00	16.48	-37.52	54.00	10.01	33.20	5.71	32.44	Average	---	---
2	4804.00	46.58	-27.42	74.00	40.11	33.20	5.71	32.44	Peak	---	---
3	7206.00	49.52			39.12	35.84	7.20	32.64	Peak	---	---
4	9608.00	54.31			40.23	38.37	8.81	33.10	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

### Transmitter Radiated Unwanted Emissions

Modulation Mode	BR-1Mbps	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

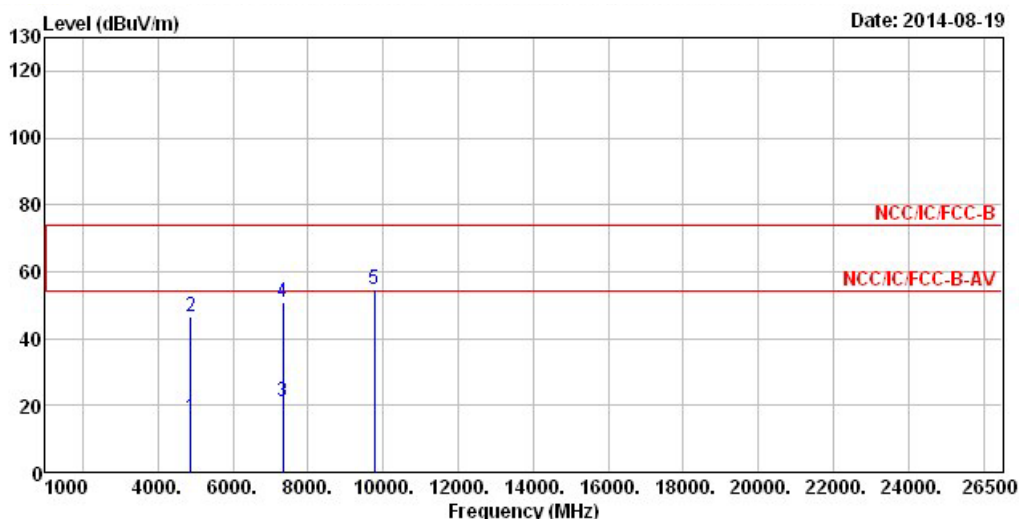

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4882.00	16.45	-37.55	54.00	9.83	33.31	5.73	32.42	Average	---	---
2	4882.00	46.55	-27.45	74.00	39.93	33.31	5.73	32.42	Peak	---	---
3	7323.00	20.93	-33.07	54.00	10.17	36.15	7.28	32.67	Average	---	---
4	7323.00	51.03	-22.97	74.00	40.27	36.15	7.28	32.67	Peak	---	---
5	9764.00	54.50			40.18	38.64	8.76	33.08	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

**Transmitter Radiated Unwanted Emissions**

<b>Modulation Mode</b>	BR-1Mbps	<b>Test Freq. (FX)</b>	F2
<b>Operating Function</b>	Transmit	<b>Polarization</b>	H

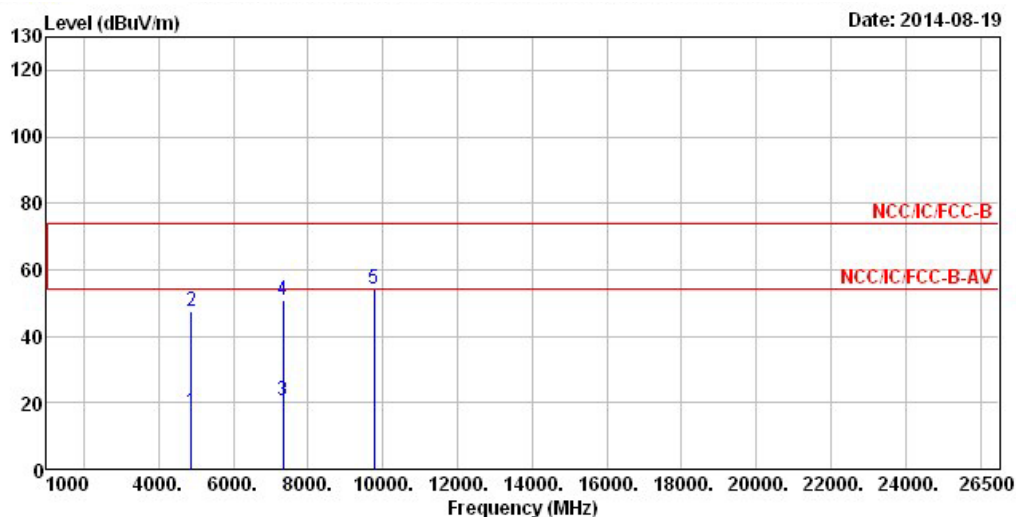

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	4882.00	17.19	-36.81	54.00	10.57	33.31	5.73	32.42	Average	---	---
2	4882.00	47.29	-26.71	74.00	40.67	33.31	5.73	32.42	Peak	---	---
3	7323.00	20.70	-33.30	54.00	9.94	36.15	7.28	32.67	Average	---	---
4	7323.00	50.80	-23.20	74.00	40.04	36.15	7.28	32.67	Peak	---	---
5	9764.00	54.35			40.03	38.64	8.76	33.08	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

**Transmitter Radiated Unwanted Emissions**

<b>Modulation Mode</b>	BR-1Mbps	<b>Test Freq. (FX)</b>	F3
<b>Operating Function</b>	Transmit	<b>Polarization</b>	V

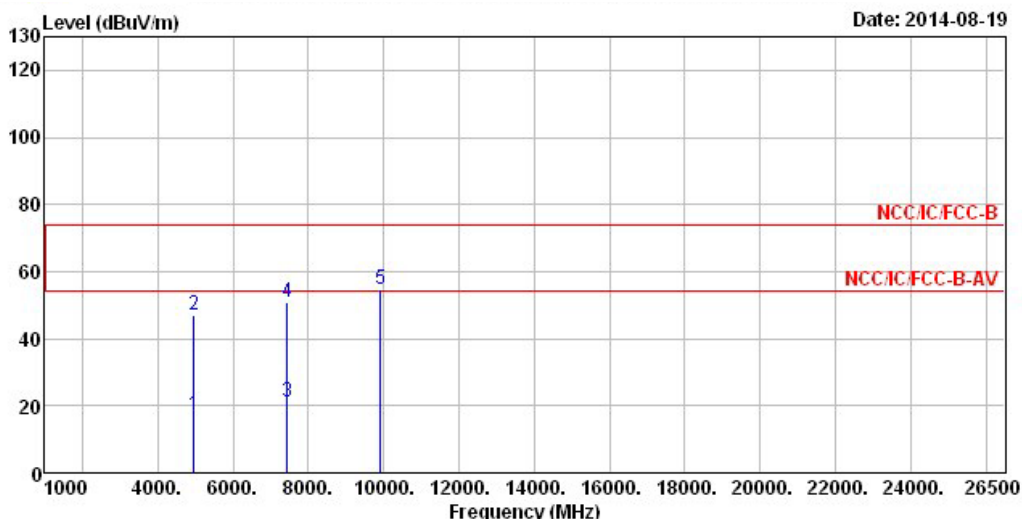

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4960.00	17.03	-36.97	54.00	10.25	33.44	5.75	32.41 Average	---	---
2	4960.00	47.13	-26.87	74.00	40.35	33.44	5.75	32.41 Peak	---	---
3	7440.00	20.96	-33.04	54.00	9.83	36.47	7.37	32.71 Average	---	---
4	7440.00	51.06	-22.94	74.00	39.93	36.47	7.37	32.71 Peak	---	---
5	9920.00	54.55			40.02	38.89	8.71	33.07 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

**Transmitter Radiated Unwanted Emissions**

<b>Modulation Mode</b>	BR-1Mbps	<b>Test Freq. (FX)</b>	F3
<b>Operating Function</b>	Transmit	<b>Polarization</b>	H

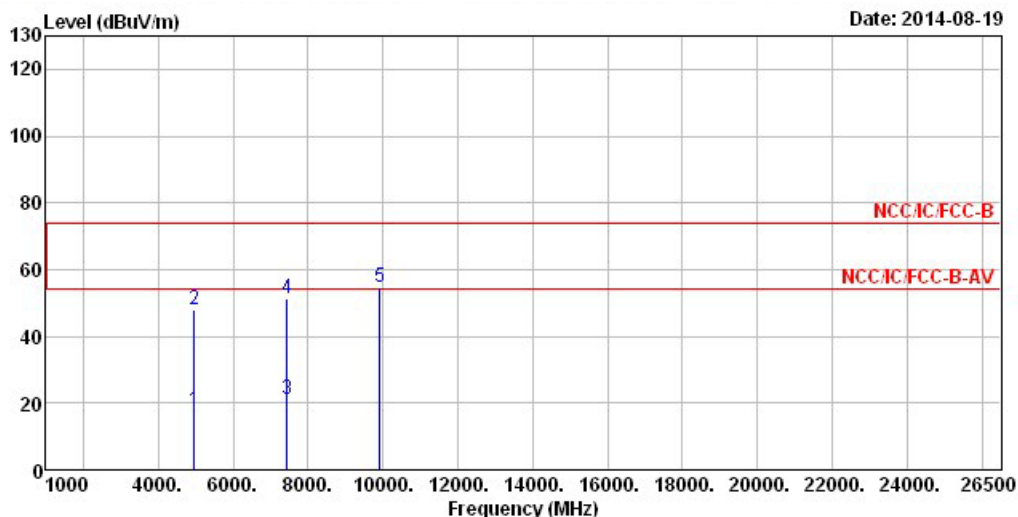

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	Remark	A/Pos	T/Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4960.00	17.82	-36.18	54.00	11.04	33.44	5.75	32.41 Average	---	---
2	4960.00	47.92	-26.08	74.00	41.14	33.44	5.75	32.41 Peak	---	---
3	7440.00	21.20	-32.80	54.00	10.07	36.47	7.37	32.71 Average	---	---
4	7440.00	51.30	-22.70	74.00	40.17	36.47	7.37	32.71 Peak	---	---
5	9920.00	54.78			40.25	38.89	8.71	33.07 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., DH5 VBW≥1/3.125ms, VBW=1kHz.

## 4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2014	AC Conduction
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2014	AC Conduction
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	Oct. 30, 2013	AC Conduction
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	AC Conduction

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9KHz ~ 40GHz	Jan. 25, 2014	RF Conducted
Signal enerator	R&S	SMR40	100116	10MHz ~ 40GHz	Jul. 31, 2014	RF Conducted
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Sep. 11, 2013	RF Conducted
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Sep. 11, 2013	RF Conducted
RF Cable-1m	HUBER+SUHNER	SUCOFLEX_104	SN 324557	30MHz ~ 26.5GHz	Dec. 02, 2013	RF Conducted
RF Cable-0.5m	HUBER+SUHNER	SUCOFLEX_103	10715/4 10716/4	30MHz ~ 26.5GHz	Dec. 02, 2013	RF Conducted
DC Power Source	G.W.	GPS-3030DD	GEN865896	DC 0V ~ 30V	Nov. 21, 2013	RF Conducted

Note: Calibration Interval of instruments listed above is one year.



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 30, 2013	Radiated Emission
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May. 05, 2014	Radiated Emission
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Aug. 20, 2013	Radiated Emission
Spectrum	R&S	FSP40	100004	9kHz ~ 40GHz	Mar. 27, 2014	Radiated Emission
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 21, 2013	Radiated Emission
Horn Antenna	ETS • LINDGREN	3115	6741	1GHz ~ 18GHz	Jun. 11, 2014	Radiated Emission
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 10, 2014	Radiated Emission
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 16, 2013	Radiated Emission
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Dec. 11, 2013	Radiated Emission
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiated Emission
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiated Emission

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	Dec. 02, 2012	Radiated Emission

Note: Calibration Interval of instruments listed above is two year.