



FCC RF Test Report

APPLICANT : ASUSTek Computer Inc.
EQUIPMENT : Eee Pad
BRAND NAME : ASUS
MODEL NAME : SL101
FCC ID : MSQSL101
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : Digital Spread Spectrum (DSS)

The product was received on Jun. 18, 2011 and completely tested on Jul. 07, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test 6

 1.4 Testing Site 7

 1.5 Applied Standards 7

 1.6 Ancillary Equipment List 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 RF Output Power 8

 2.2 Test Mode 9

 2.3 Connection Diagram of Test System 10

 2.4 RF Utility 11

3 TEST RESULT 12

 3.1 Number of Channel Measurement 12

 3.2 20dB and 99% Bandwidth Measurement 14

 3.3 Hopping Channel Separation Measurement 27

 3.4 Dwell Time Measurement 30

 3.5 Peak Output Power Measurement 32

 3.6 Band Edges Measurement 35

 3.7 Spurious Emission Measurement 46

 3.8 AC Conducted Emission Measurement 50

 3.9 Radiated Emission Measurement 54

 3.10 Antenna Requirements 63

4 LIST OF MEASURING EQUIPMENT 64

5 UNCERTAINTY OF EVALUATION 65

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR131159-02A	Rev. 01	Initial issue of report	Jul. 13, 2011

**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.2	-	Gen 4.4.1	99% Bandwidth	-	Pass	-
3.3	15.247(a)(1)	A8.1(b)	Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.4	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	$\leq 125\text{ mW}$	Pass	-
3.6	15.247(d)	A8.5	Frequency Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	A8.5	Spurious Emission	$< 20\text{ dBc}$	Pass	-
3.8	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 4.4 dB at 1.638 MHz
3.9	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.9 dB at 2483.5 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

ASUSTek Computer Inc.

No. 15, Li-Te Rd., Peitou, Taipei 112, Taiwan

1.2 Manufacturer

1. PEGATRON CORPORATION Taoyuan Mfg.

No. 5, Shing Yeh St., Kwei Shan Hsiang Taoyuan 333, Taiwan

2. Protek (Shanghai) Limited.

No. 3768, Xiu Yan Rd., Nanhui District, Shanghai, China

3. NorthTec Asis (Shanghai) Limited.

No. 3768, Xiuyan Rd., Kangqiao Town, Nanhui District, Shanghai, 201319 China

4. Unihan Maitek Computer

No. 233, jinfeng Rd., Suzhou New District, Jiangsu Province 215011, China

5. ASKEY TECHNOLOGY (JIANGSU) LTD.

No. 1388, JiaoTong Road, WuJiang Economic-Technological Development Area, Jiangsu Province, P.R.C.



1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Eee Pad
Brand Name	ASUS
Model Name	SL101
FCC ID	MSQSL101
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Channel Spacing	1 MHz
Maximum Output Power to Antenna	Bluetooth (1Mbps) : 9.70 dBm (0.009 W) Bluetooth EDR (2Mbps) : 12.17 dBm (0.016 W) Bluetooth EDR (3Mbps) : 10.26 dBm (0.011 W)
Antenna Type	PIFA Antenna with gain 1.17 dBi
HW Version	1.2G
SW Version	ventana-img-20110121.092845
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : π /4-DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
EUT Stage	Production Unit

Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Spread Spectrum (DSS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	CO05-HY	03CH07-HY	722060/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 8

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
2.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	LCD Monitor	Dell	U2410	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
5.	iPod Earphone	Apple	A1285	FCC DoC	Unshielded, 1.2 m	N/A
6.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A
7.	Bluetooth Base Station	Anritsu	8852B	N/A	N/A	Unshielded, 1.8 m

2 Test Configuration of Equipment Under Test

2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	π /4-DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	9.04 dBm	11.48 dBm	9.50 dBm
Ch39	2441MHz	9.70 dBm	12.17 dBm	10.26 dBm
Ch78	2480MHz	9.58 dBm	12.06 dBm	10.06 dBm

Remark:

1. The data rate was set in 2Mbps for all the test items due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests were conducted to determine the final configuration from all possible combinations.

The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps π /4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated TCs	N/A	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	N/A
AC Conducted Emission	Mode 1 :Bluetooth Link + WLAN Link +TC (Charging from Adapter)		
Remark: 1. TC stands for Test Configuration, and consists of iPod, monitor, and earphone. 2. For radiated TCs, the data rate was set in 2Mbps due to the highest RF output power; only the data of these modes was reported.			

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

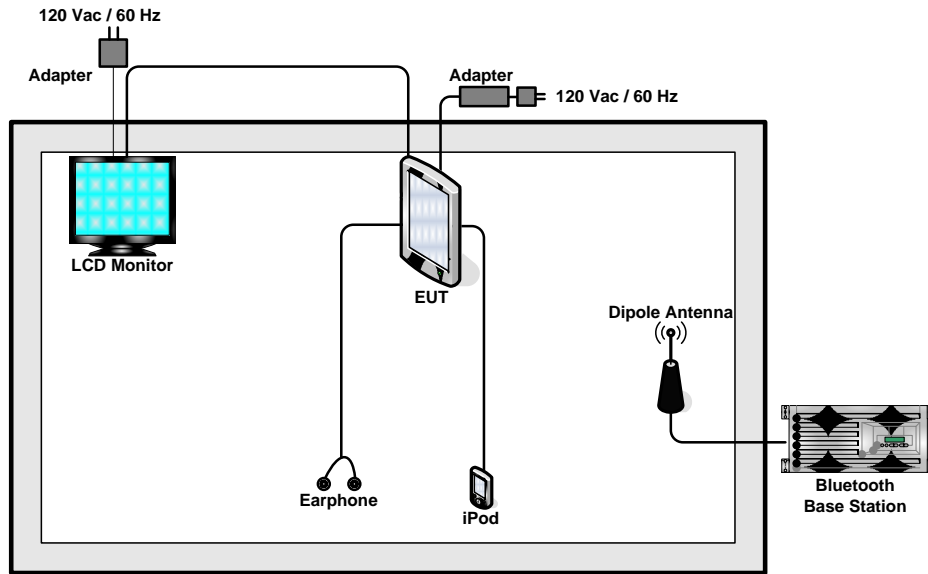

<AC Conducted Emission Mode>

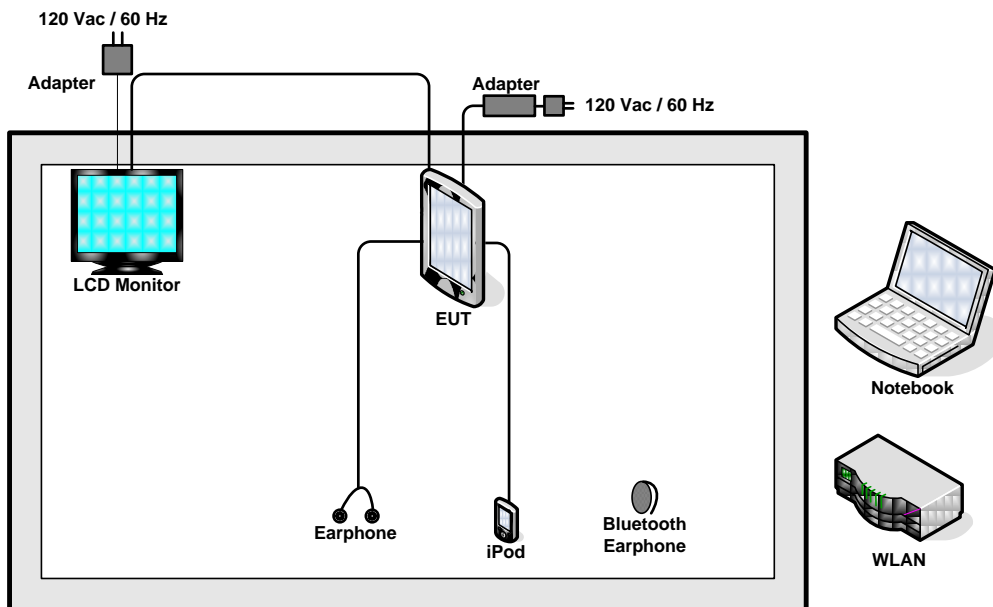



2.4 RF Utility

For Bluetooth function, the RF utility, "BT Test" was installed in EUT which was programmed in order to make the EUT into the engineering modes to contact with Bluetooth base station for transmitting and receiving signals continuously.

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = the frequency band of operation; RBW \geq 1% of the span; VBW \geq RBW; Sweep = auto;
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.

3.1.4 Test Setup

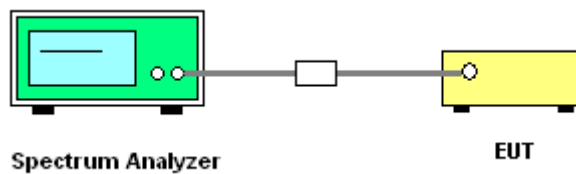


3.1.5 Test Result of Number of Hopping Frequency


Test Mode :	Mode 7~9	Temperature :	24~26°C
Test Engineer :	Hank Yu	Relative Humidity :	52~55%
Number of Hopping Channels (Channel)		Limits (Channel)	Pass/Fail
79		> 15	Pass



Number of Hopping Channel Plot on Channel 00 - 78

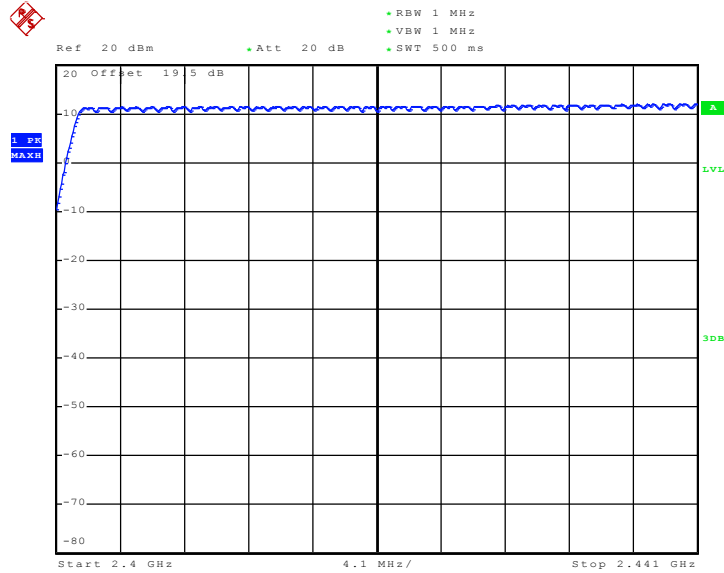

Date: 24.JUN.2011 01:25:18

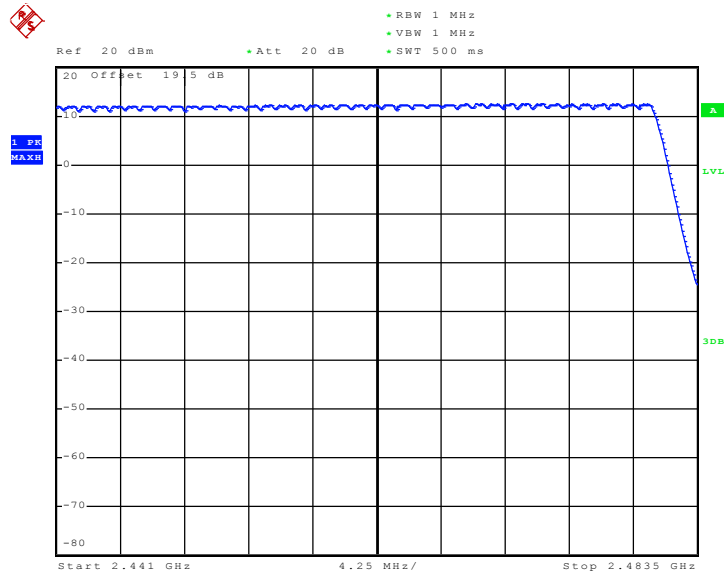

Date: 24.JUN.2011 01:29:49

3.2 20dB and 99% Bandwidth Measurement

3.2.1 Limit of 20dB Bandwidth

N/A

3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

3.2.4 Test Setup






3.2.5 Test Result of 20dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	24~26°C
Test Engineer :	Hank Yu	Relative Humidity :	52~55%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.944
39	2441	0.948
78	2480	1.036


20 dB Bandwidth Plot on Channel 00

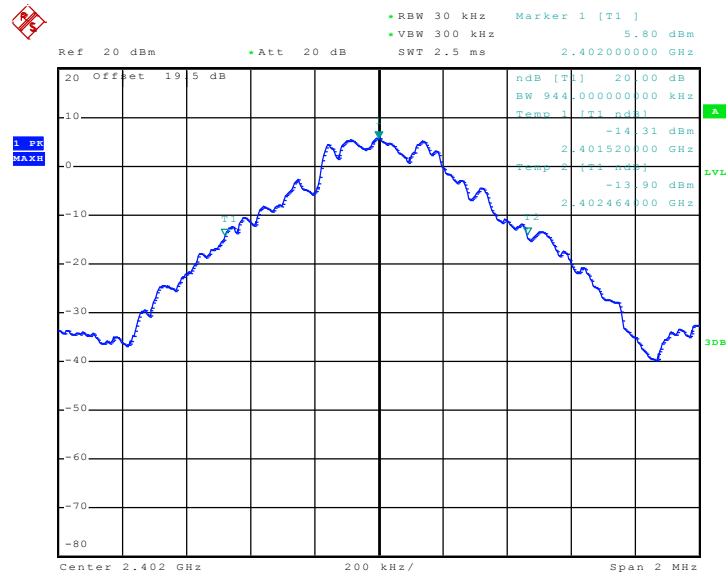

Date: 24.JUN.2011 00:57:39




20 dB Bandwidth Plot on Channel 39

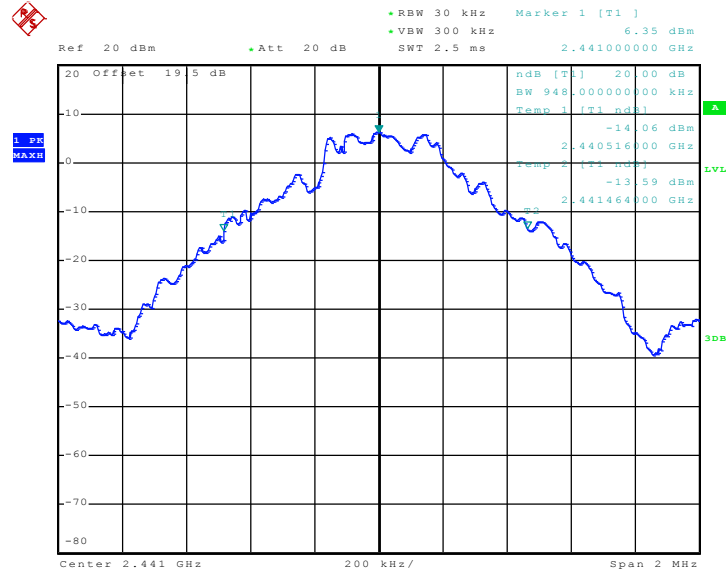

Date: 24.JUN.2011 00:57:53

20 dB Bandwidth Plot on Channel 78

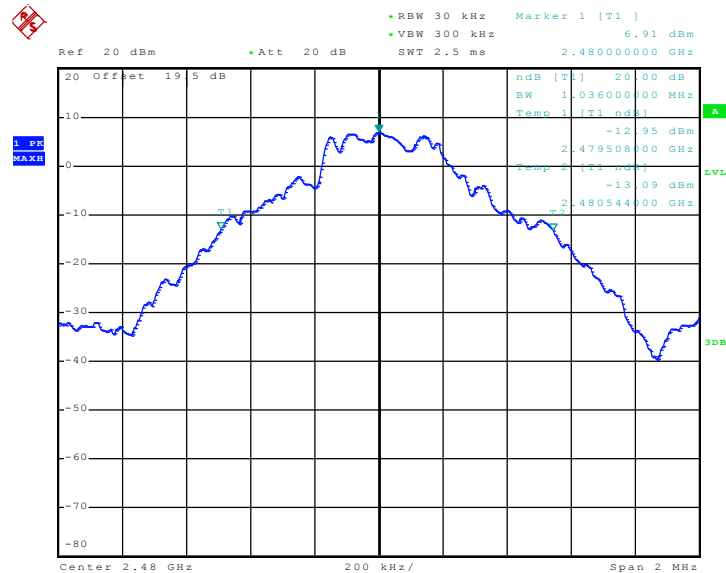


Date: 24.JUN.2011 00:58:07



Test Mode :	Mode 4, 5, 6	Temperature :	24~26°C
Test Engineer :	Hank Yu	Relative Humidity :	52~55%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.314
39	2441	1.314
78	2480	1.308


20 dB Bandwidth Plot on Channel 00

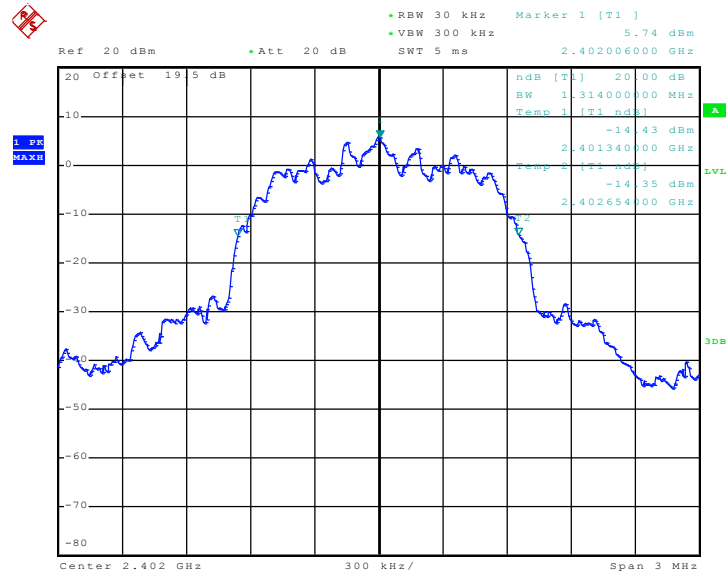

Date: 24.JUN.2011 00:58:24




20 dB Bandwidth Plot on Channel 39

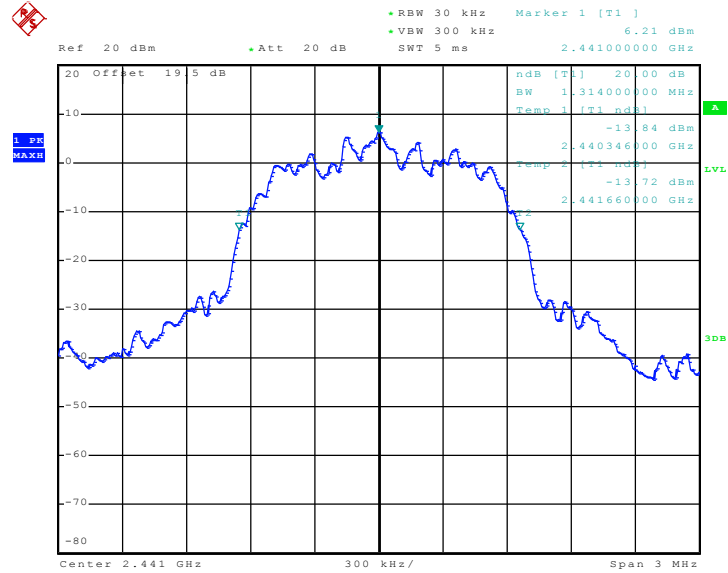

Date: 24.JUN.2011 00:58:40

20 dB Bandwidth Plot on Channel 78

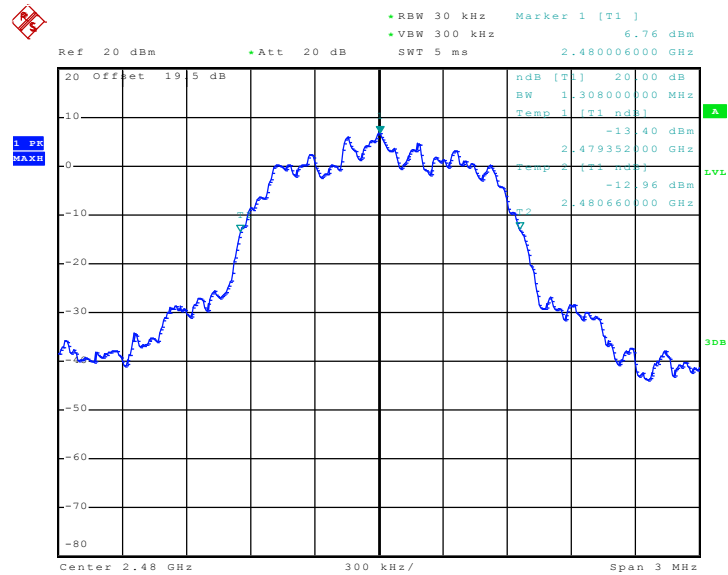


Date: 24.JUN.2011 00:58:56



Test Mode :	Mode 7, 8, 9	Temperature :	24~26°C
Test Engineer :	Hank Yu	Relative Humidity :	52~55%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.314
39	2441	1.320
78	2480	1.338


20 dB Bandwidth Plot on Channel 00

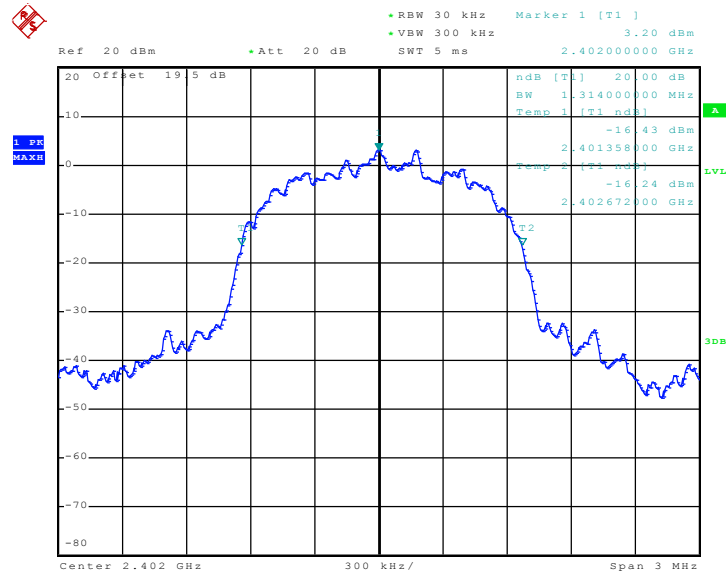

Date: 24.JUN.2011 00:59:39




20 dB Bandwidth Plot on Channel 39

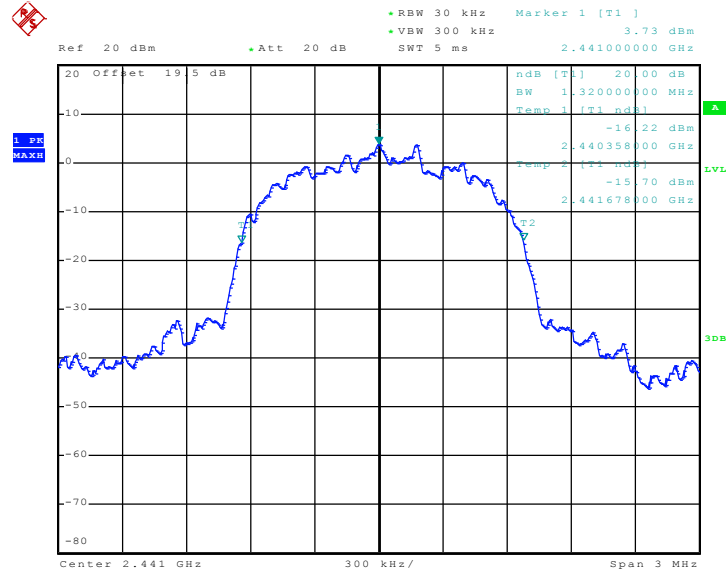

Date: 24.JUN.2011 01:00:11

20 dB Bandwidth Plot on Channel 78

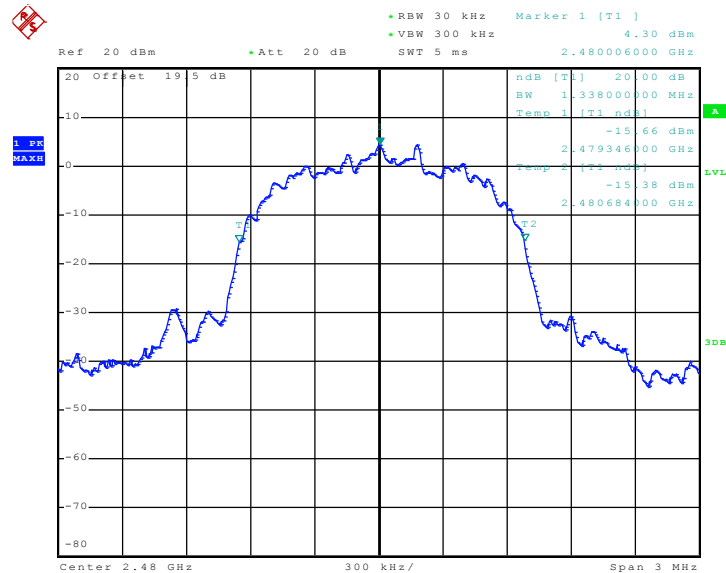

Date: 24.JUN.2011 01:03:08




3.2.6 Test Result of 99% Occupied Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	24~26°C
Test Engineer :	Hank Yu	Relative Humidity :	52~55%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.884
39	2441	0.896
78	2480	0.912


99% Bandwidth Plot on Channel 00

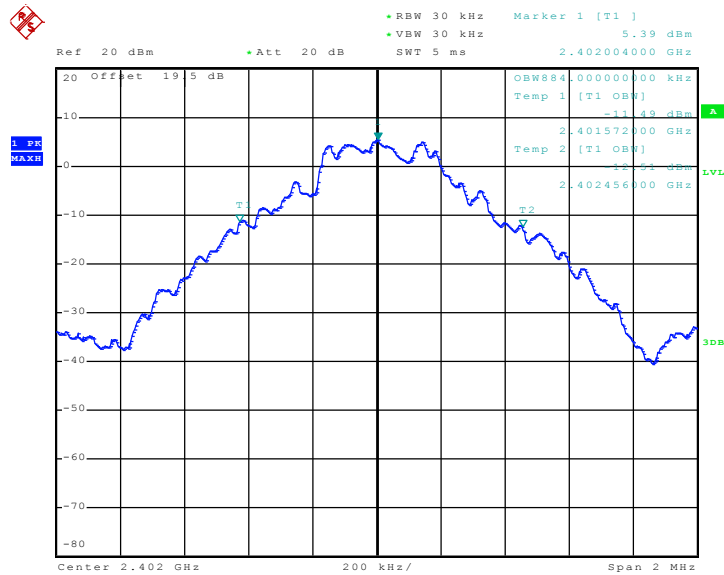

Date: 24.JUN.2011 01:04:18




99% Occupied Bandwidth Plot on Channel 39

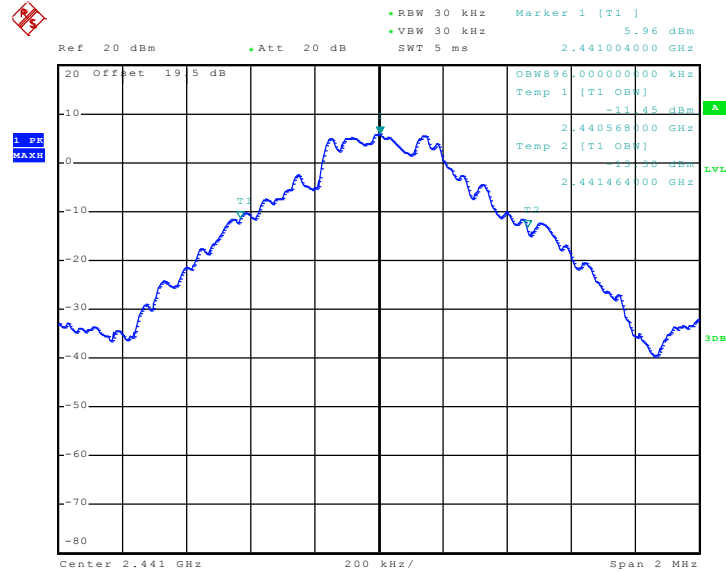

Date: 24.JUN.2011 01:04:54

99% Occupied Bandwidth Plot on Channel 78

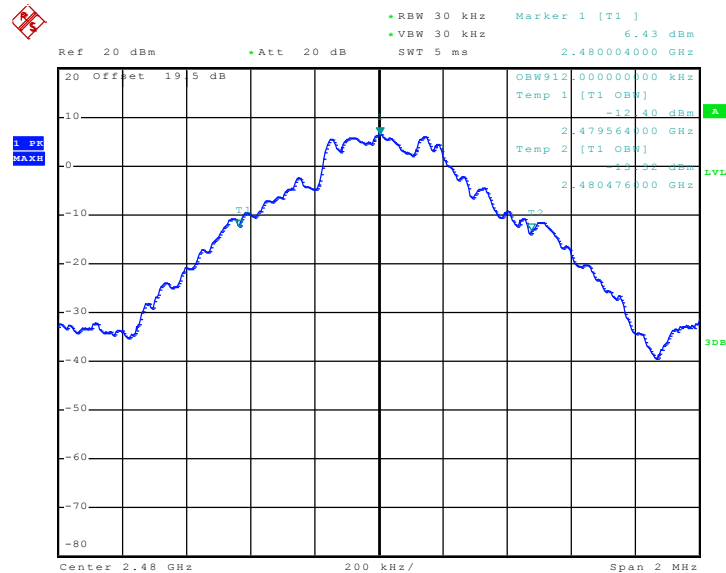


Date: 24.JUN.2011 01:05:30



Test Mode :	Mode 4, 5, 6	Temperature :	24~26°C
Test Engineer :	Hank Yu	Relative Humidity :	52~55%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.180
39	2441	1.180
78	2480	1.180


99% Bandwidth Plot on Channel 00

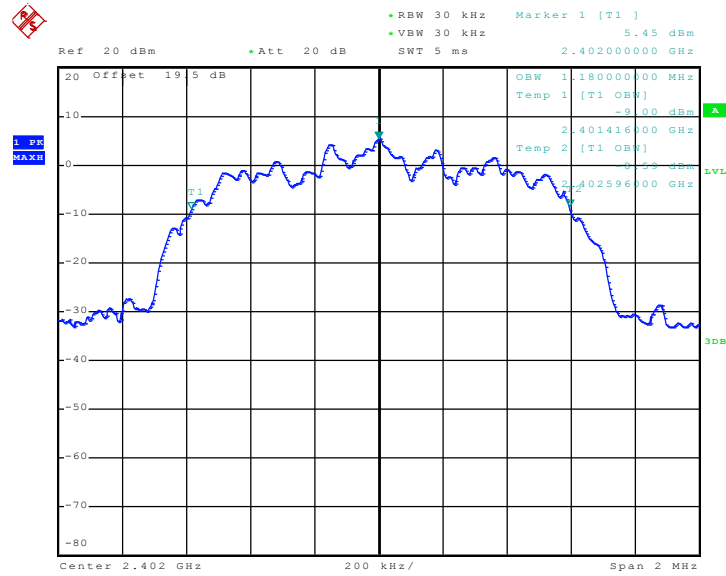

Date: 24.JUN.2011 01:06:06




99% Occupied Bandwidth Plot on Channel 39

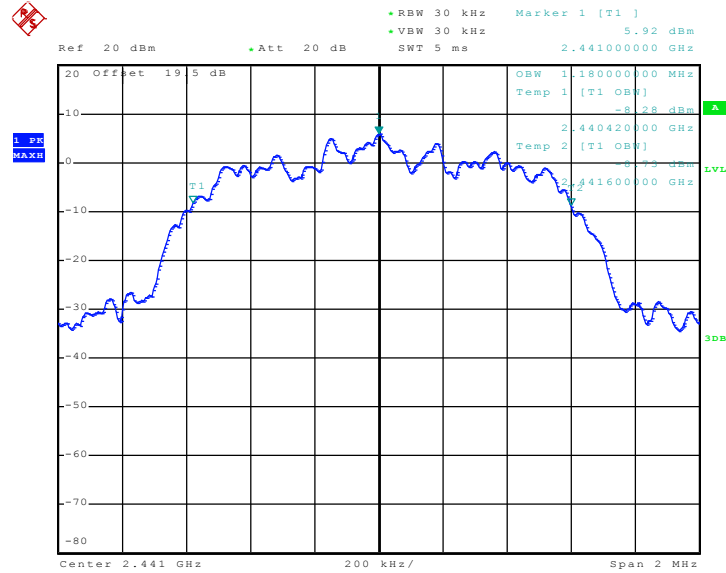

Date: 24.JUN.2011 01:06:42

99% Occupied Bandwidth Plot on Channel 78

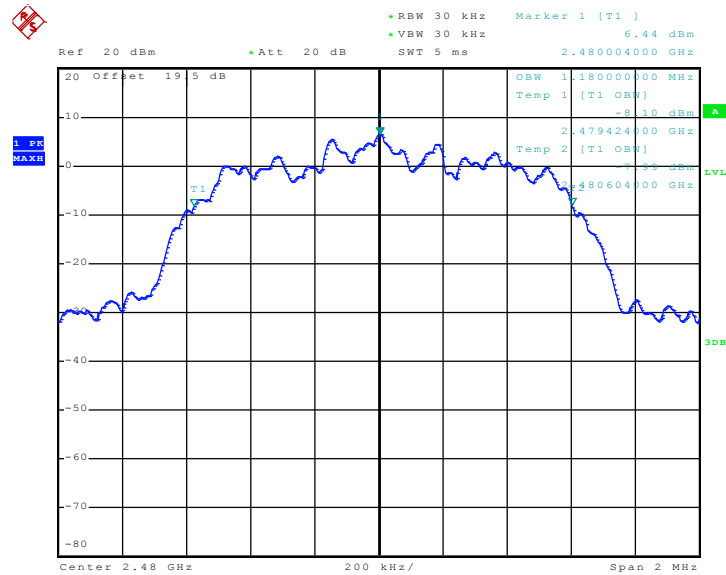


Date: 24.JUN.2011 01:07:18



Test Mode :	Mode 7, 8, 9	Temperature :	24~26°C
Test Engineer :	Hank Yu	Relative Humidity :	52~55%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.184
39	2441	1.192
78	2480	1.196


99% Bandwidth Plot on Channel 00

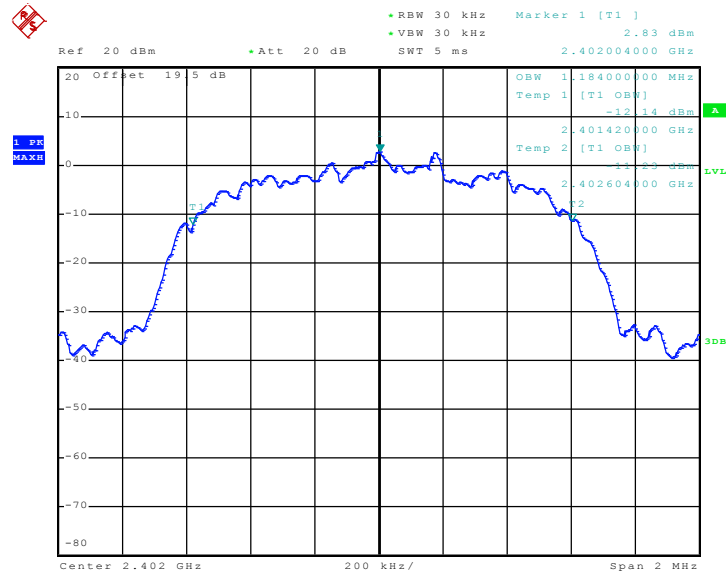

Date: 24.JUN.2011 01:07:54




99% Occupied Bandwidth Plot on Channel 39

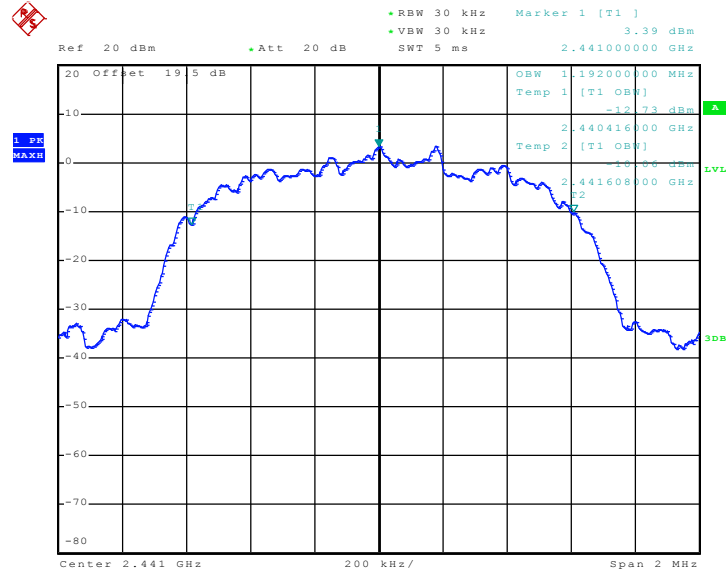

Date: 24.JUN.2011 01:08:30

99% Occupied Bandwidth Plot on Channel 78

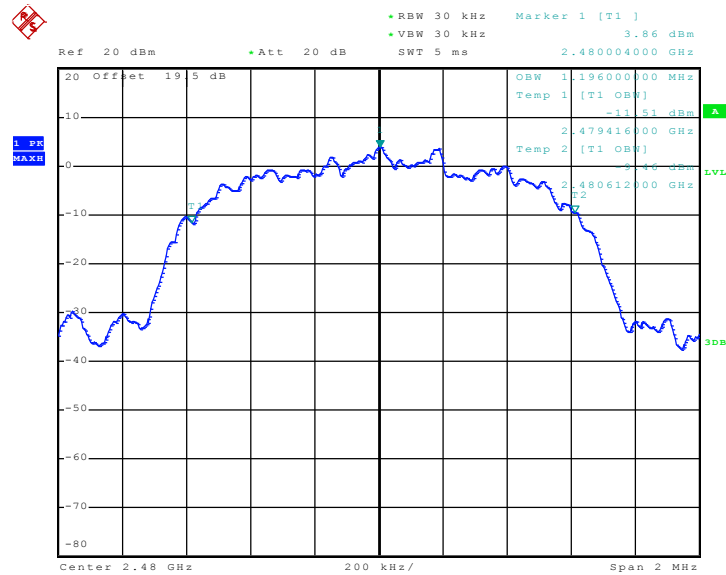

Date: 24.JUN.2011 01:09:06

3.3 Hopping Channel Separation Measurement

3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
 $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.3.4 Test Setup

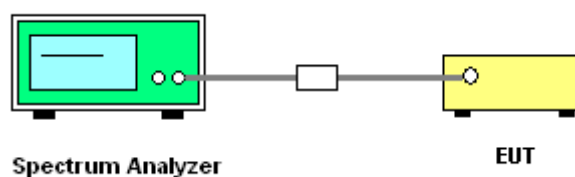




3.3.5 Test Result of Hopping Channel Separation

Test Mode :	Mode 4, 5, 6	Temperature :	24~26°C
Test Engineer :	Hank Yu	Relative Humidity :	52~55%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.876	Pass
39	2441	1.002	0.876	Pass
78	2480	1.002	0.872	Pass


Channel Separation Plot on Channel 00 - 01

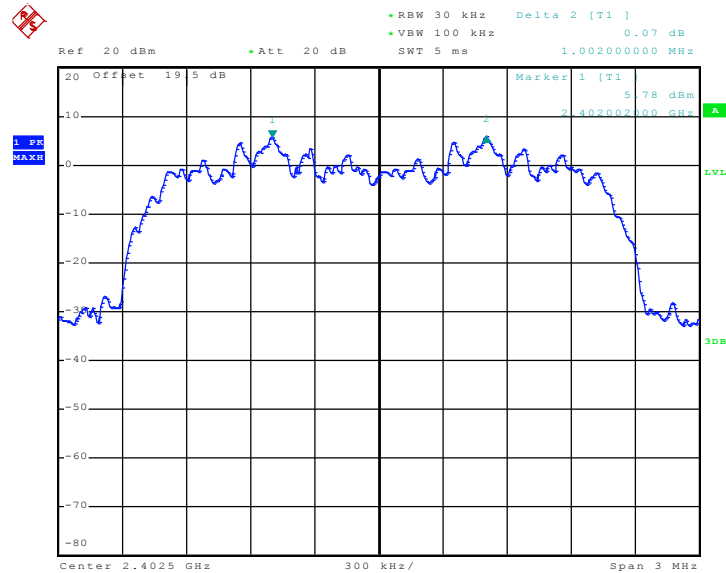

Date: 24.JUN.2011 00:49:24




Channel Separation Plot on Channel 39 - 40

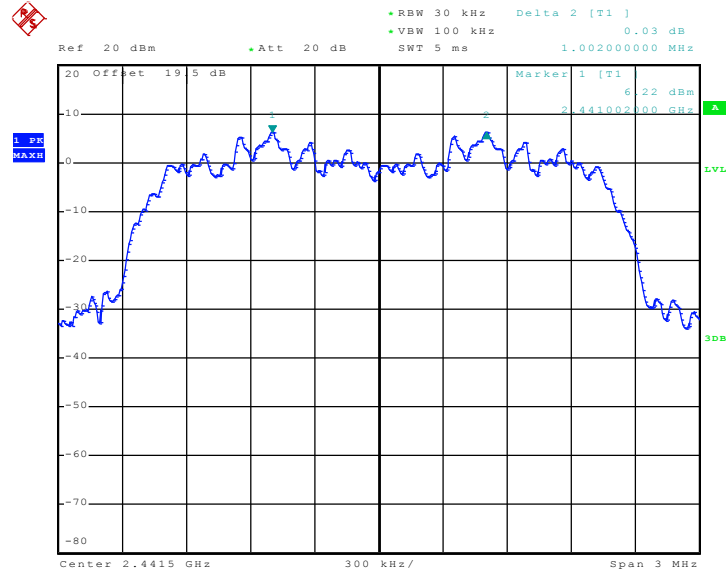

Date: 24.JUN.2011 00:50:12

Channel Separation Plot on Channel 77 - 78

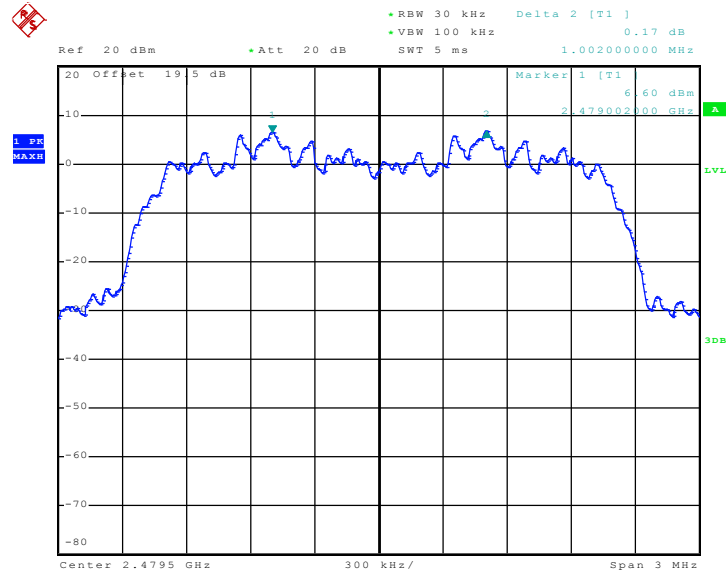

Date: 24.JUN.2011 00:50:57

3.4 Dwell Time Measurement

3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

3.4.4 Test Setup

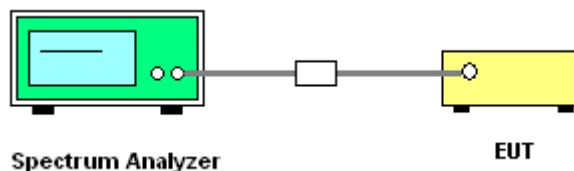

3.4.5 Test Result of Dwell Time

Test Mode :	Mode 5	Temperature :	24~26°C
Test Engineer :	Hank Yu	Relative Humidity :	52~55%


Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
2DH5	3.70	3042.00	0.36	0.4	Pass

Remark:

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)




2DH5 Dwell Time (One Pulse) Plot on Channel 39

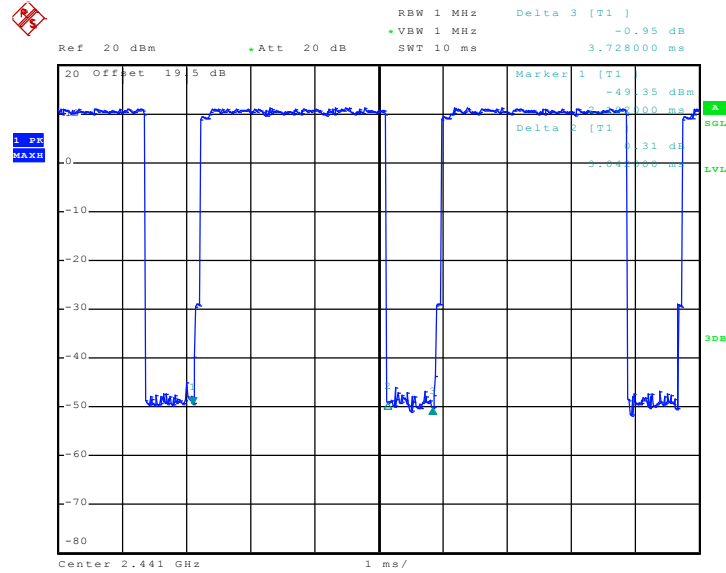

Date: 22.JUN.2011 22:49:28

2DH5 Dwell Time (Count Pulses) Plot on Channel 39

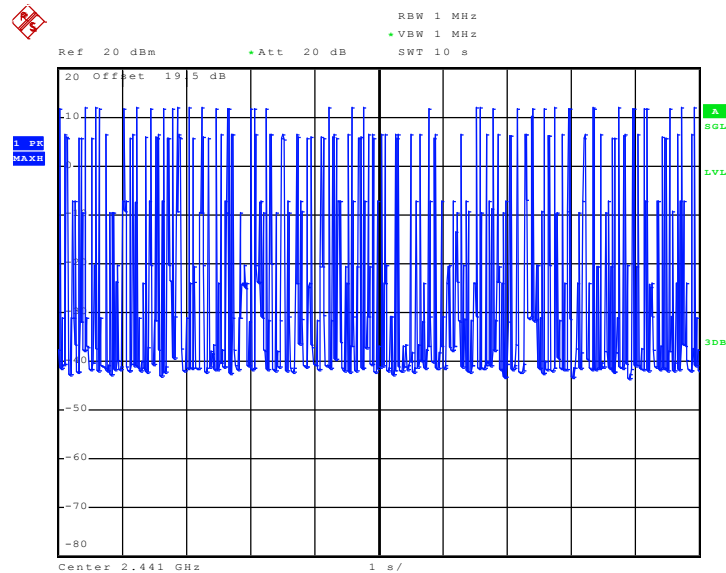

Date: 24.JUN.2011 00:41:52

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW (20.97dBm).


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.

3.5.4 Test Setup

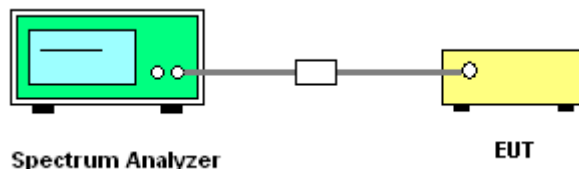


3.5.5 Test Result of Peak Output Power

Test Mode :	Mode 4, 5, 6	Temperature :	24~26°C	
Test Engineer :	Hank Yu	Relative Humidity :	52~55%	
Channel	Frequency (MHz)	RF Power (dBm)		
		π /4-DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	11.48	20.97	Pass
39	2441	12.17	20.97	Pass
78	2480	12.06	20.97	Pass




Peak Output Power Plot on Channel 00

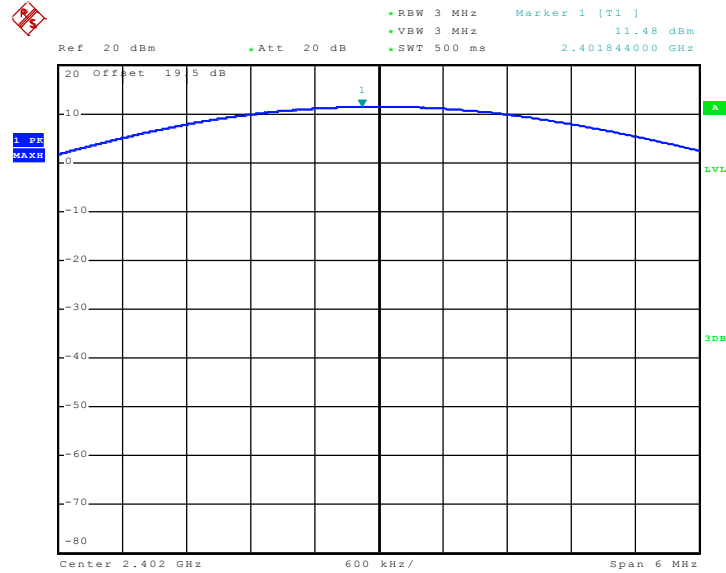

Date: 22.JUN.2011 22:55:14


Peak Output Power Plot on Channel 39

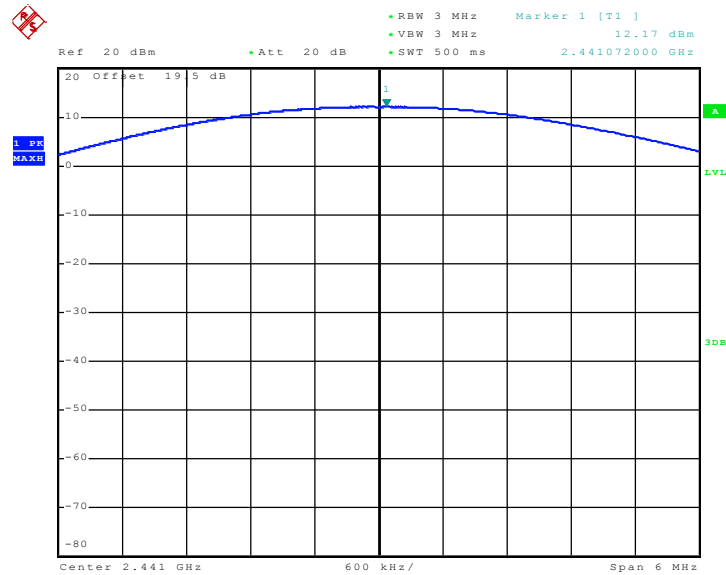

Date: 22.JUN.2011 23:01:11



Peak Output Power Plot on Channel 78

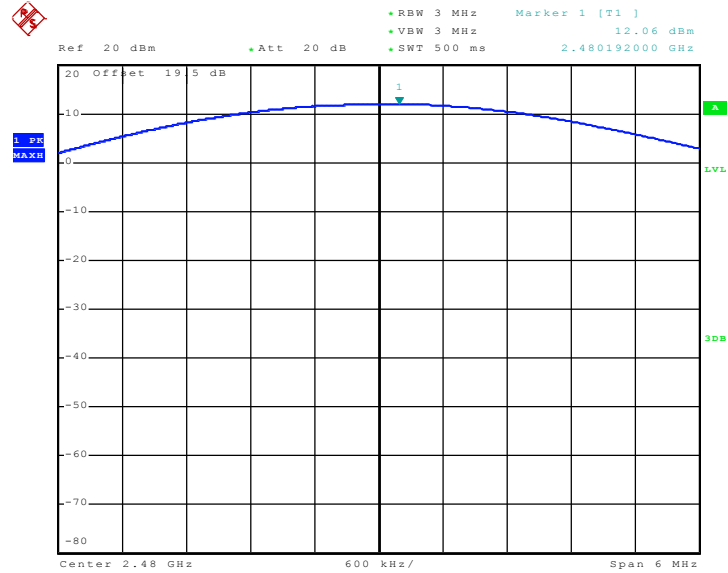

Date: 22.JUN.2011 22:58:38



3.6 Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

3.6.2 Measuring Instruments


See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 300kHz, Video bandwidth (VBW) \geq RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300k Hz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 1MHz, Sweep: Auto for Peak; set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto for Average. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).
4. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

3.6.4 Test Setup

<Radiated Band Edges>

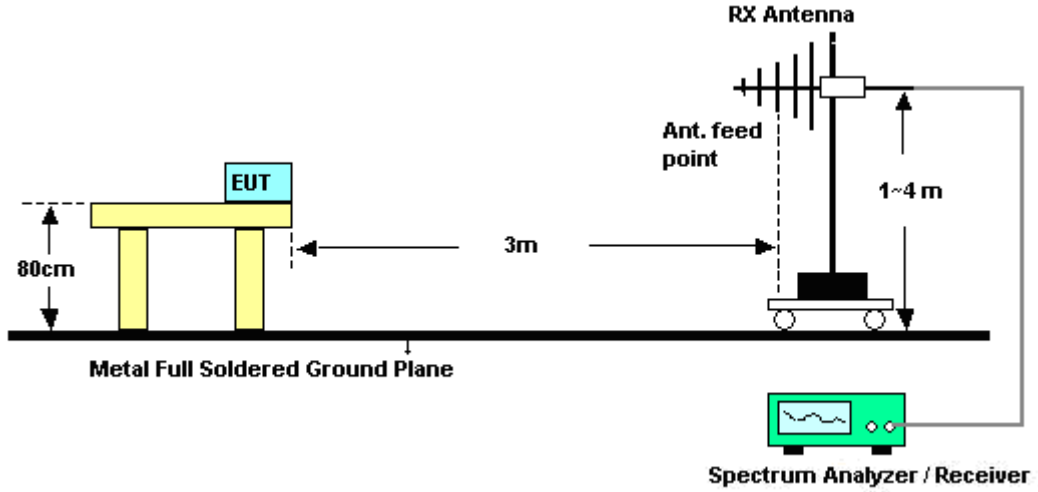

<Conducted Band Edges>

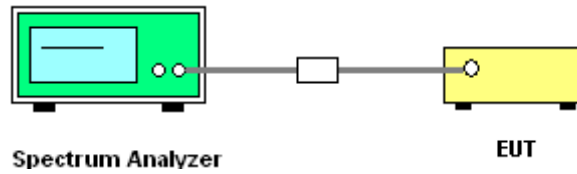



3.6.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	23~24°C
Test Channel :	00	Relative Humidity :	46~47%
		Test Engineer :	Kai Wang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.85	52.14	-21.86	74	47.78	32.18	6.03	33.85	102	227	Peak
2388.85	38.73	-15.27	54	34.37	32.18	6.03	33.85	102	227	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2385.81	47.86	-26.14	74	43.5	32.18	6.03	33.85	100	10	Peak
2385.81	35.15	-18.85	54	30.79	32.18	6.03	33.85	100	10	Average



Test Mode :	Mode 3	Temperature :	23~24°C
Test Channel :	78	Relative Humidity :	46~47%
		Test Engineer :	Kai Wang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	72.1	-1.9	74	67.54	32.28	6.18	33.9	100	216	Peak
2483.5	34.72	-19.28	54	30.16	32.28	6.18	33.9	100	216	Average

Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBµV/m)	Delta Result (dB)	Average Result (dBµV/m)	Average Limit (dBµV/m)	Margin (dB)	Result
Single Carrier Mode	89.07	54.35	34.72	54	-19.28	Pass
Hopping Mode	89.07	55.25	33.82	54	-20.18	Pass

Note : Average result = Maximum field strength – Delta result

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	66.78	-7.22	74	62.22	32.28	6.18	33.9	112	128	Peak
2483.5	30.33	-23.67	54	25.77	32.28	6.18	33.9	112	128	Average


Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBµV/m)	Delta Result (dB)	Average Result (dBµV/m)	Average Limit (dBµV/m)	Margin (dB)	Result
Single Carrier Mode	84.27	53.94	30.33	54	-23.67	Pass
Hopping Mode	84.27	55.1	29.17	54	-24.83	Pass

Note : Average result = Maximum field strength – Delta result



Test Mode :	Mode 3	Temperature :	23~24°C
Test Channel :	78	Relative Humidity :	46~47%
Test Engineer :	Kai Wang	Polarization :	Horizontal

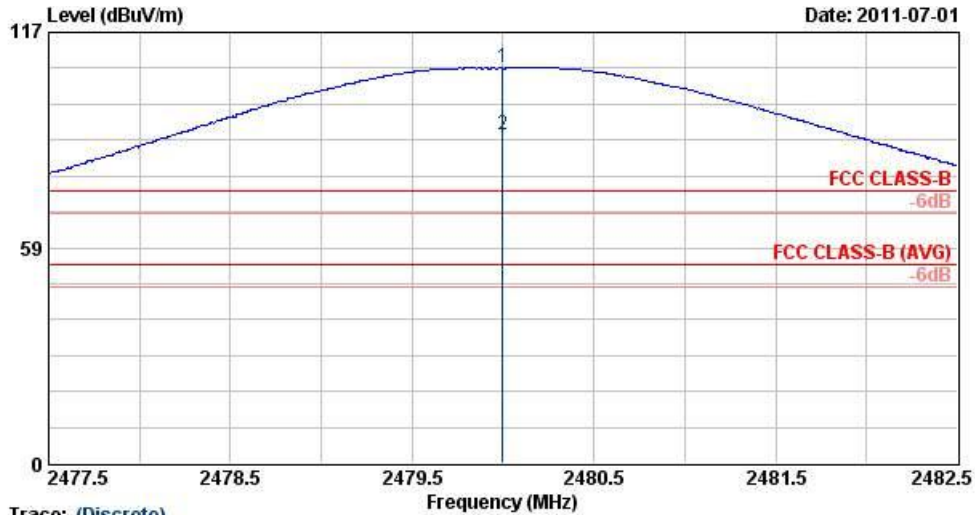

Trace: (Discrete)


Site : D3CH07-HY
 Condition : FCC CLASS-B HF_ANT_100824 HORIZONTAL
 Project : FR 131159-02
 Mode : Mode 3

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2480.00	107.52	33.52	74.00	102.96	32.28	6.18	33.90	100	216	Peak
2 @	2480.00	89.07	35.07	54.00	84.51	32.28	6.18	33.90	100	216	Average

* Maximum field strength of the fundamental emission



Test Mode :	Mode 3	Temperature :	23~24°C
Test Channel :	78	Relative Humidity :	46~47%
Test Engineer :	Kai Wang	Polarization :	Horizontal

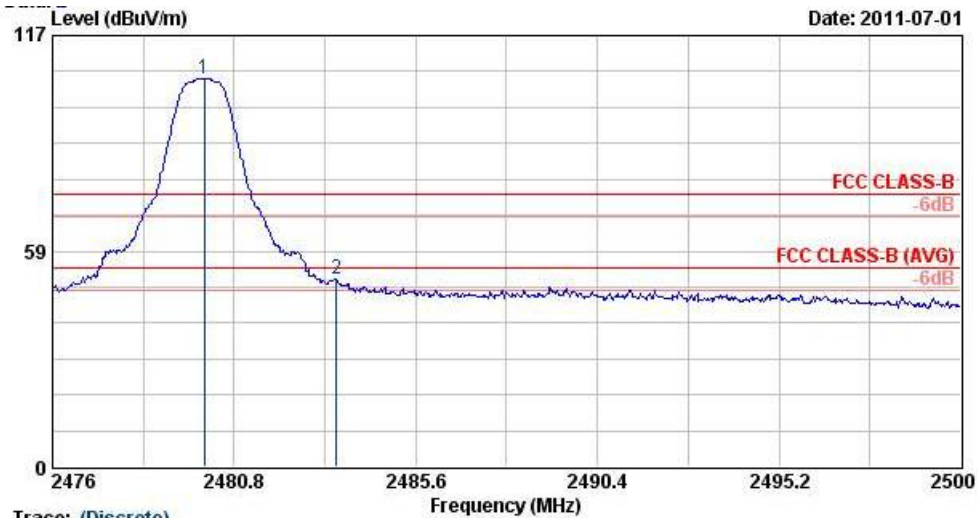


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : FCC CLASS-B HF_ANT_100824 HORIZONTAL
 Project : FR 131159-02
 Mode : Mode 3

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2480.00	105.29	31.29	74.00	100.74	32.28	6.18	33.90	100	216	Peak
2	2483.50	50.94	-23.06	74.00	46.38	32.28	6.18	33.90	100	216	Peak

* Marker-Delta Method (RBW/VBW=100KHz): -19.28 dB , single carrier Mode



Test Mode :	Mode 3	Temperature :	23~24°C
Test Channel :	78	Relative Humidity :	46~47%
Test Engineer :	Kai Wang	Polarization :	Horizontal

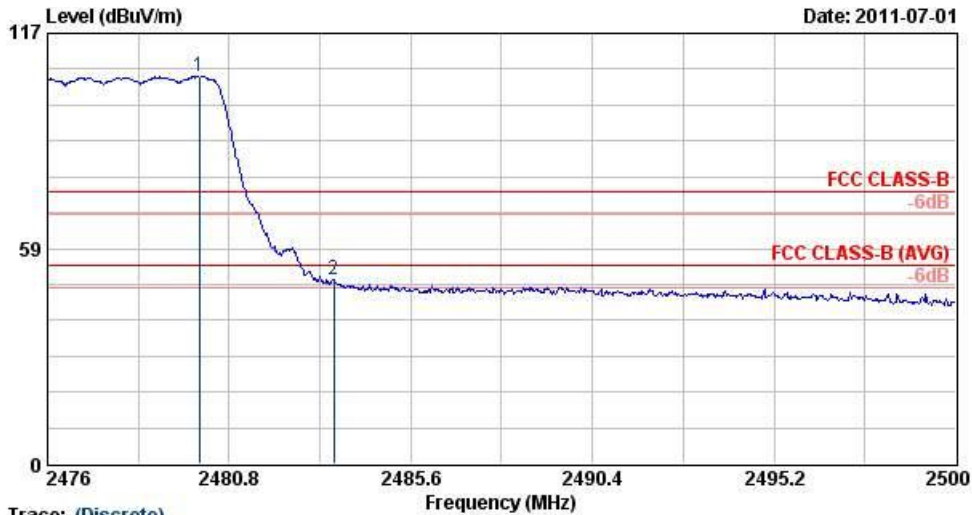

Trace: (Discrete)


Site : D3CH07-HY
 Condition : FCC CLASS-B HF_ANT_100824 HORIZONTAL
 Project : FR 131159-02
 Mode : Mode 3

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2480.00	105.24	31.24	74.00	100.69	32.28	6.18	33.90	100	216	Peak
2	2483.56	49.99	-24.01	74.00	45.43	32.28	6.18	33.90	100	216	Peak

* Marker-Delta Method (RBW/VBW=100KHz): -20.18 dB , Hopping Mode



Test Mode :	Mode 3	Temperature :	23~24°C
Test Channel :	78	Relative Humidity :	46~47%
Test Engineer :	Kai Wang	Polarization :	Vertical

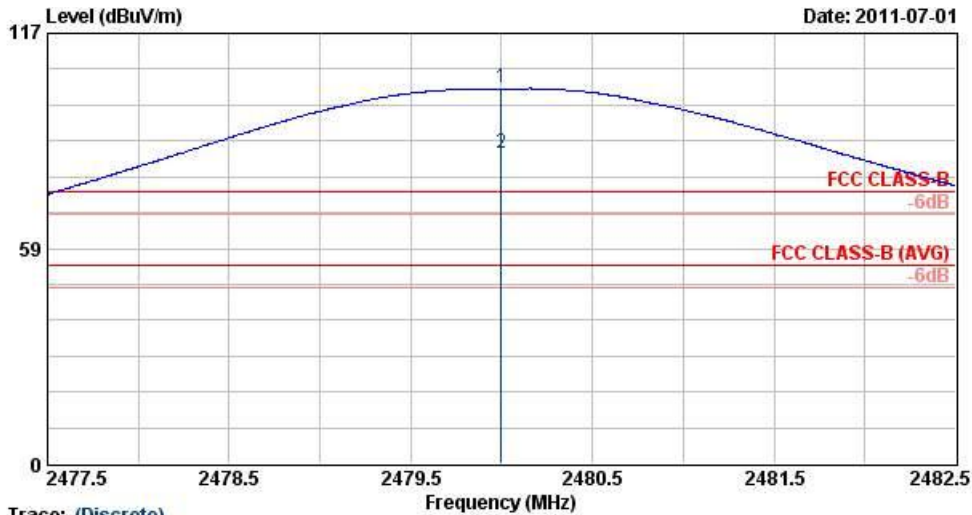


Trace: (Discrete)
 Site : 03CH07-HY
 Condition : FCC CLASS-B HF_ANT_100824 VERTICAL
 Project : FR 131159-02
 Mode : Mode 3

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	2480.00	102.02	28.02	74.00	97.46	32.28	6.18	33.90	112	128	Peak
2 @	2480.00	84.27	30.27	54.00	79.71	32.28	6.18	33.90	112	128	Average

* Maximum field strength of the fundamental emission



Test Mode :	Mode 3	Temperature :	23~24°C
Test Channel :	78	Relative Humidity :	46~47%
Test Engineer :	Kai Wang	Polarization :	Vertical

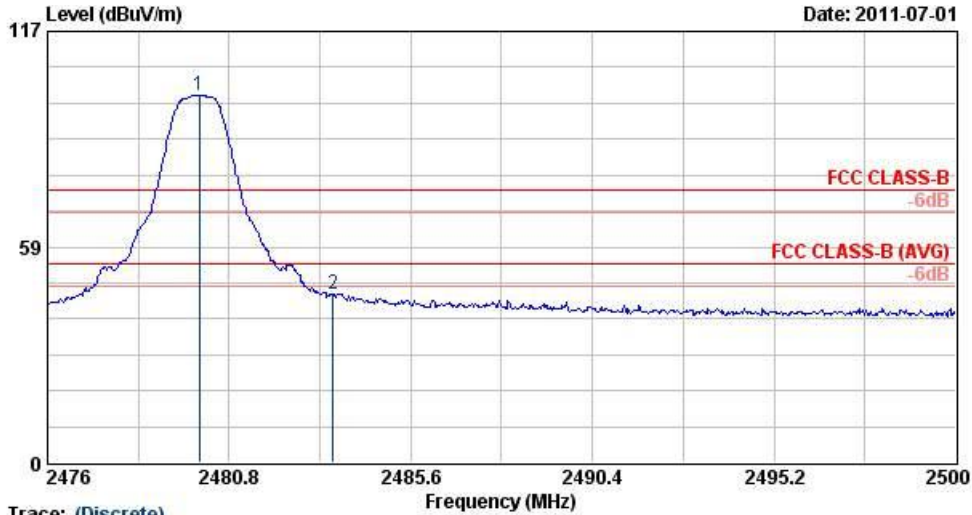

Trace: (Discrete)


Site : 03CH07-HY
 Condition : FCC CLASS-B HF_ANT_100824 VERTICAL
 Project : FR 131159-02
 Mode : Mode 3

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 X	2480.00	99.77	25.77	74.00	95.21	32.28	6.18	33.90	112	128	Peak
2	2483.54	45.83	-28.17	74.00	41.27	32.28	6.18	33.90	112	128	Peak

* Marker-Delta Method (RBW/VBW=100KHz): -23.67 dB , single carrier Mode



Test Mode :	Mode 3	Temperature :	23~24°C
Test Channel :	78	Relative Humidity :	46~47%
Test Engineer :	Kai Wang	Polarization :	Vertical

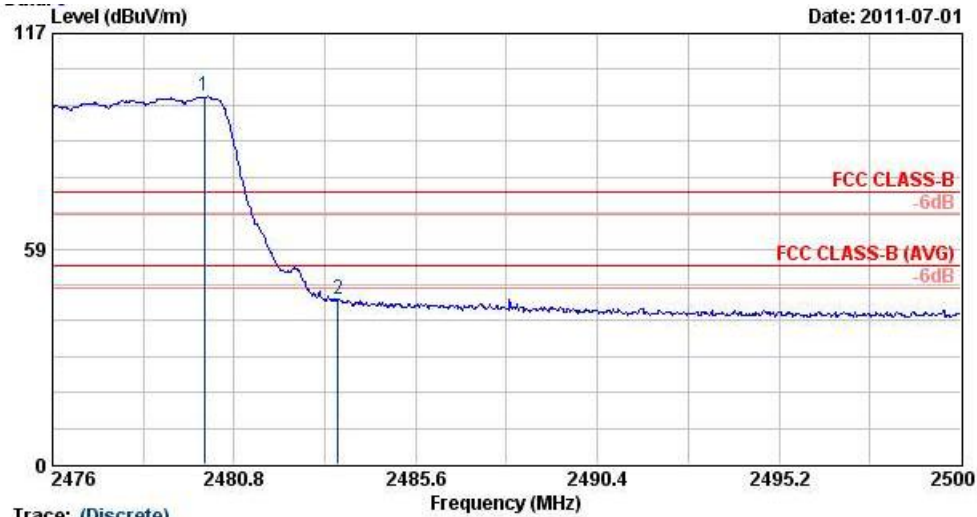

Trace: (Discrete)
 Site : 03CH07-HY
 Condition : FCC CLASS-B HF_ANT_100824 VERTICAL
 Project : FR 131159-02
 Mode : Mode 3


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB	cm	deg	
1 @	2480.00	99.87	25.87	74.00	95.31	32.28	6.18	33.90	112	128	Peak
2	2483.54	44.77	-29.23	74.00	40.21	32.28	6.18	33.90	112	128	Peak

* Marker-Delta Method (RBW/VBW=100KHz): -24.83 dB , Hopping Mode

3.6.7 Test Result of Conducted Band Edges


Test Mode :	Mode 4 and 6	Temperature :	24~26°C
Test Channel :	00 and 78	Relative Humidity :	52~55%
		Test Engineer :	Hank Yu

Low Band Edge Plot on Channel 00

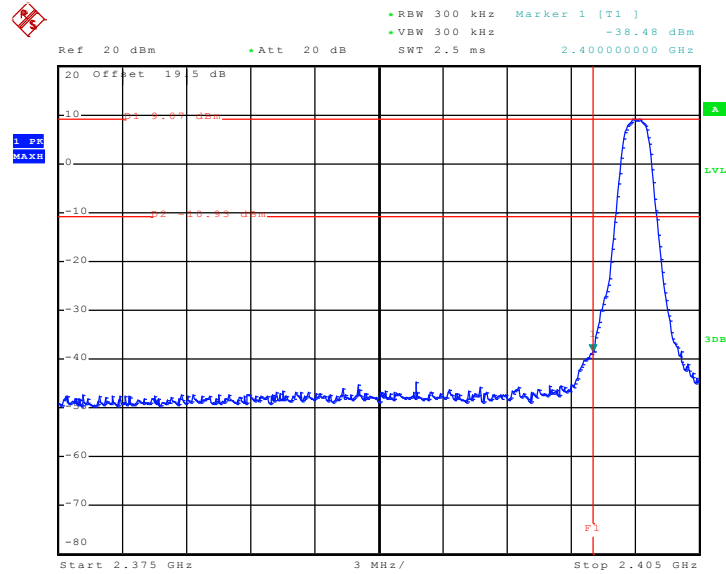

Date: 24.JUN.2011 01:16:02

High Band Edge Plot on Channel 78

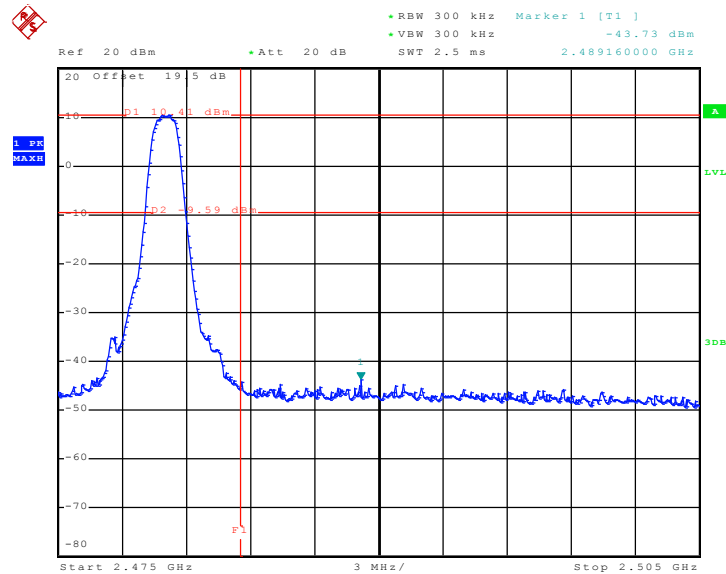

Date: 24.JUN.2011 01:17:05

3.7 Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW) \geq RBW, scan up through 10th harmonic. All harmonics / spurious must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

3.7.4 Test Setup

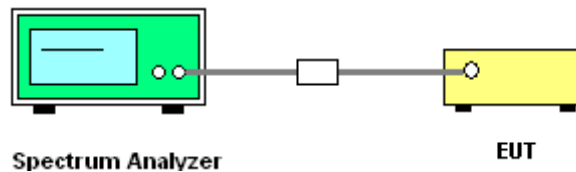




3.7.5 Test Result


Test Mode :	Mode 4	Temperature :	24~26°C
Test Channel :	00	Relative Humidity :	52~55%
		Test Engineer :	Hank Yu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

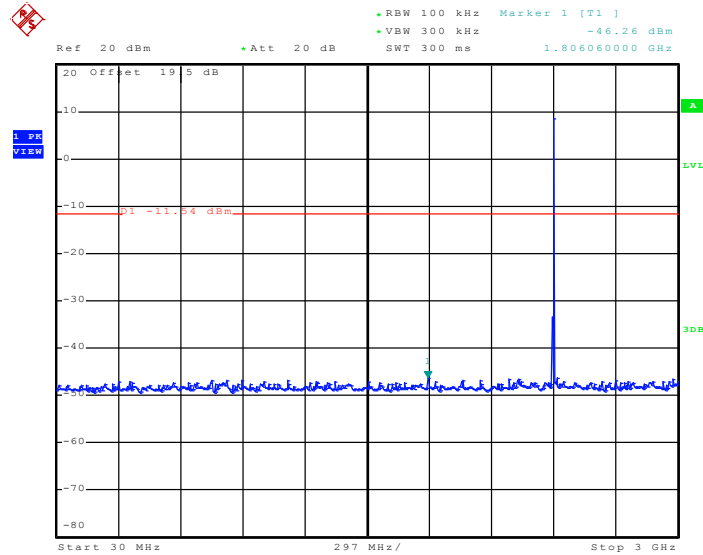

Date: 24.JUN.2011 01:10:00

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

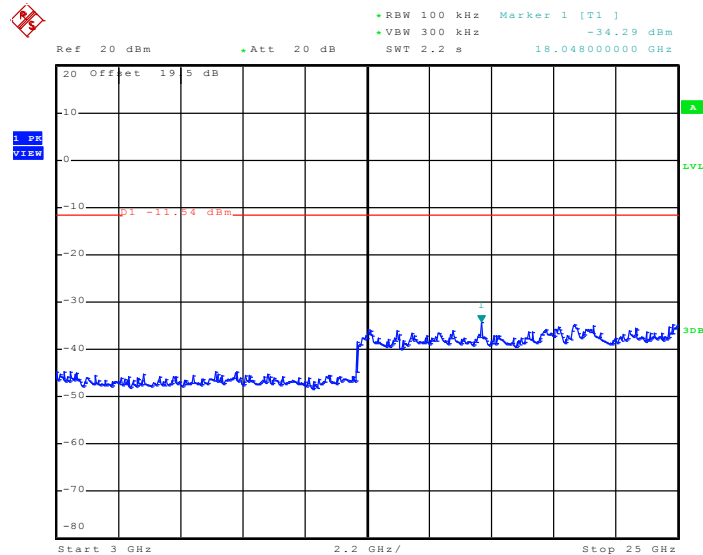


Date: 24.JUN.2011 01:10:12




Test Mode :	Mode 5	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	52~55%
		Test Engineer :	Hank Yu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

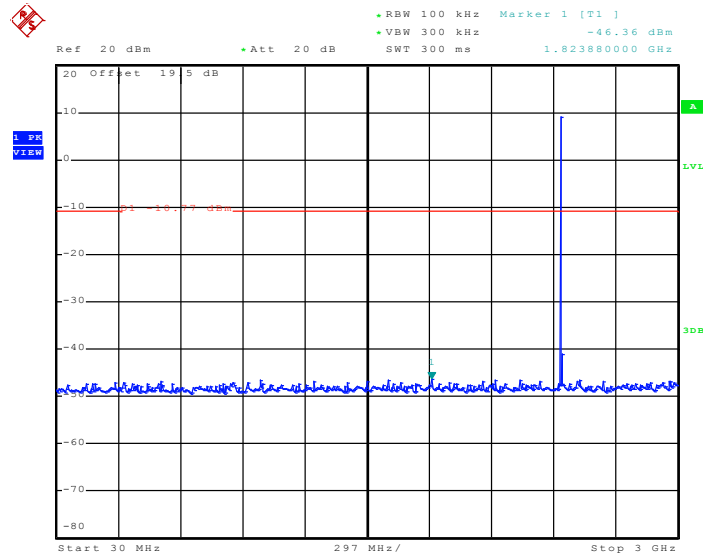

Date: 24.JUN.2011 01:11:04

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

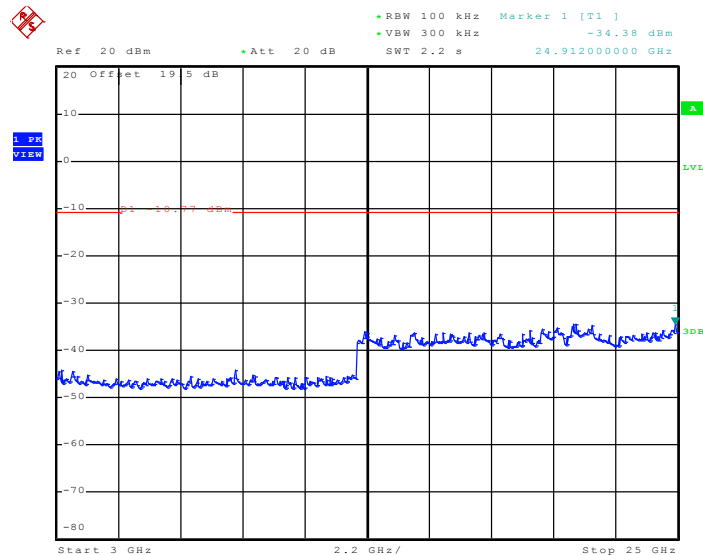


Date: 24.JUN.2011 01:11:15




Test Mode :	Mode 6	Temperature :	24~26°C
Test Channel :	78	Relative Humidity :	52~55%
		Test Engineer :	Hank Yu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

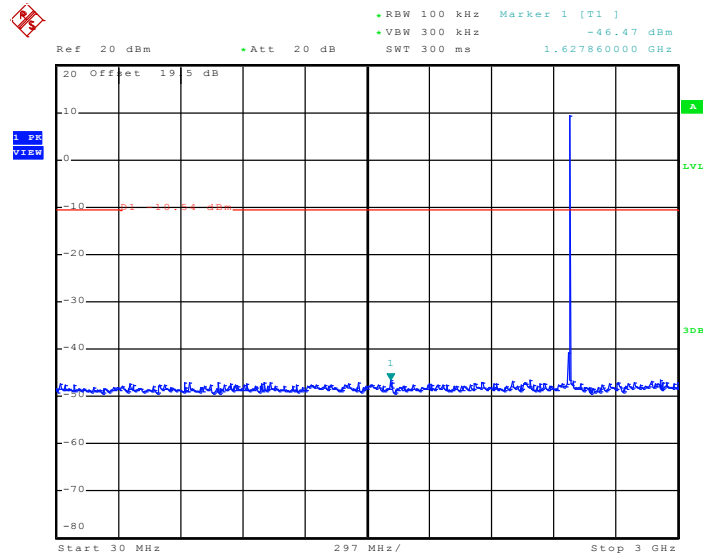

Date: 24.JUN.2011 01:12:07

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

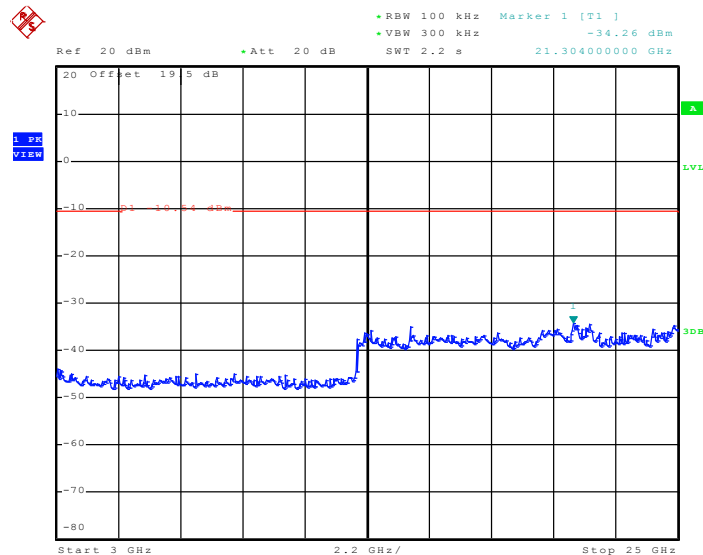

Date: 24.JUN.2011 01:12:19

3.8 AC Conducted Emission Measurement

3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

3.8.3 Test Procedures


1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.8.4 Test Setup

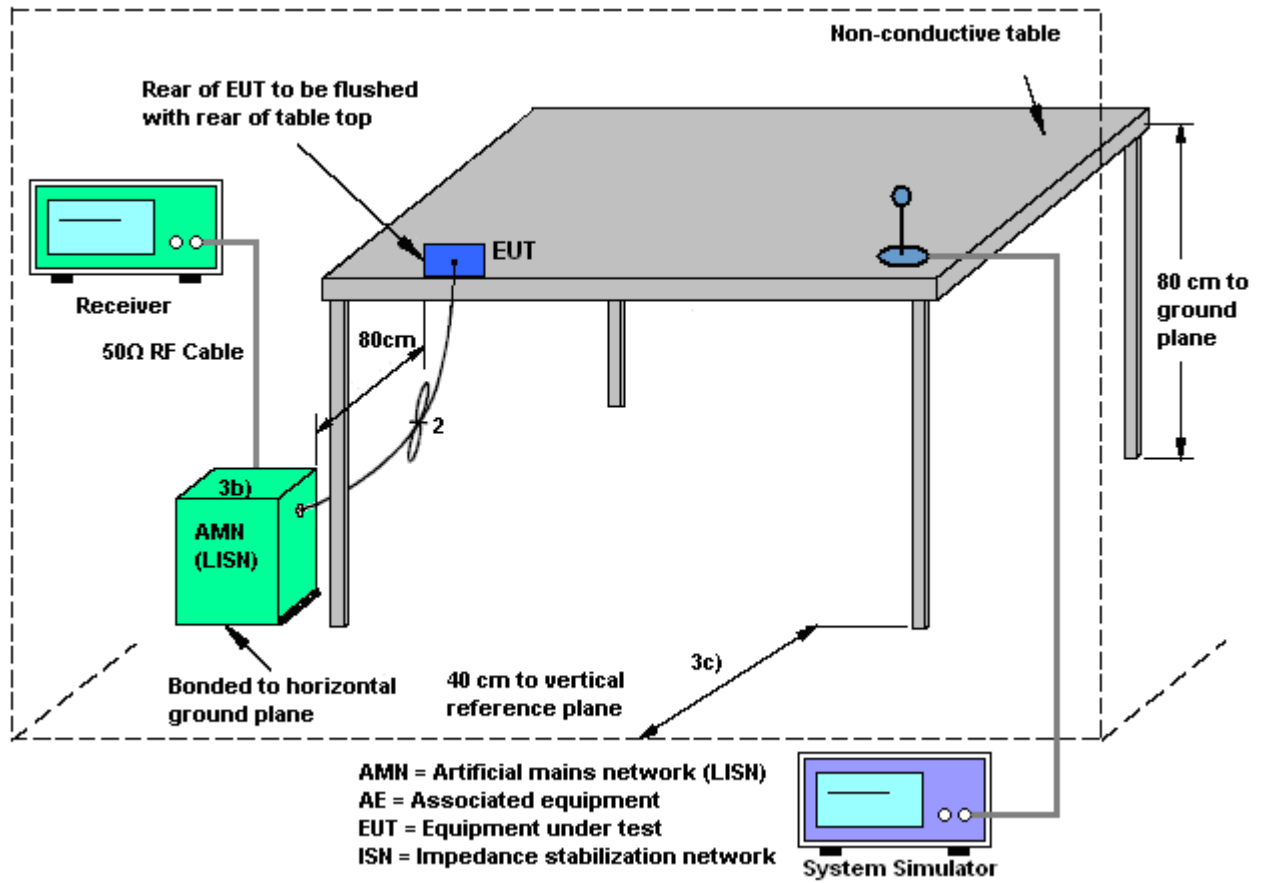

3.8.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Novic Chiang	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link + WLAN Link +TC (Charging from Adapter)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

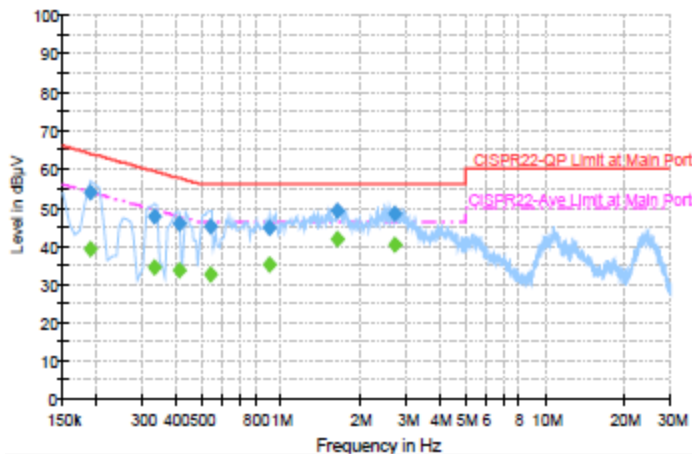

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	53.9	Off	L1	19.4	10.1	64.0
0.334000	47.6	Off	L1	19.3	11.8	59.4
0.414000	45.7	Off	L1	19.4	11.9	57.6
0.542000	45.2	Off	L1	19.3	10.8	56.0
0.910000	44.6	Off	L1	19.4	11.4	56.0
1.638000	48.9	Off	L1	19.4	7.1	56.0
2.702000	48.5	Off	L1	19.5	7.5	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	39.0	Off	L1	19.4	15.0	54.0
0.334000	34.3	Off	L1	19.3	15.1	49.4
0.414000	33.5	Off	L1	19.4	14.1	47.6
0.542000	32.3	Off	L1	19.3	13.7	46.0
0.910000	35.1	Off	L1	19.4	10.9	46.0
1.638000	41.6	Off	L1	19.4	4.4	46.0
2.702000	40.4	Off	L1	19.5	5.6	46.0



Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Novic Chiang	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN Link +TC (Charging from Adapter)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

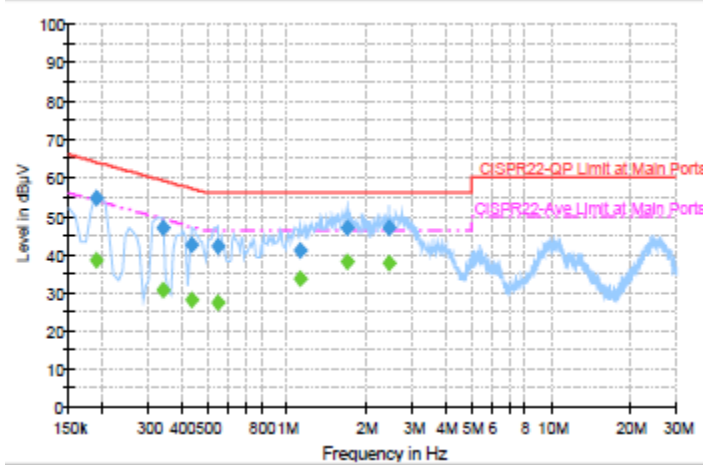

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	54.5	Off	N	19.4	9.5	64.0
0.342000	46.9	Off	N	19.3	12.3	59.2
0.438000	42.5	Off	N	19.4	14.6	57.1
0.550000	42.0	Off	N	19.3	14.0	56.0
1.126000	41.1	Off	N	19.4	14.9	56.0
1.694000	46.7	Off	N	19.5	9.3	56.0
2.446000	46.7	Off	N	19.5	9.3	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	38.5	Off	N	19.4	15.5	54.0
0.342000	30.5	Off	N	19.3	18.7	49.2
0.438000	28.0	Off	N	19.4	19.1	47.1
0.550000	27.3	Off	N	19.3	18.7	46.0
1.126000	33.7	Off	N	19.4	12.3	46.0
1.694000	38.1	Off	N	19.5	7.9	46.0
2.446000	37.8	Off	N	19.5	8.2	46.0

3.9 Radiated Emission Measurement

3.9.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.9.2 Measuring Instruments


See list of measuring instruments of this test report.

3.9.3 Test Procedures


1. The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
2. Use the following spectrum analyzer settings:
 - (1) Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
 - (2) Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.
 Distance extrapolation factor = $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$ (dB)
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.
4. Measured average value for the peak value is greater than 54 dBuV/m

3.9.4 Test Setup


For radiated emissions below 30MHz

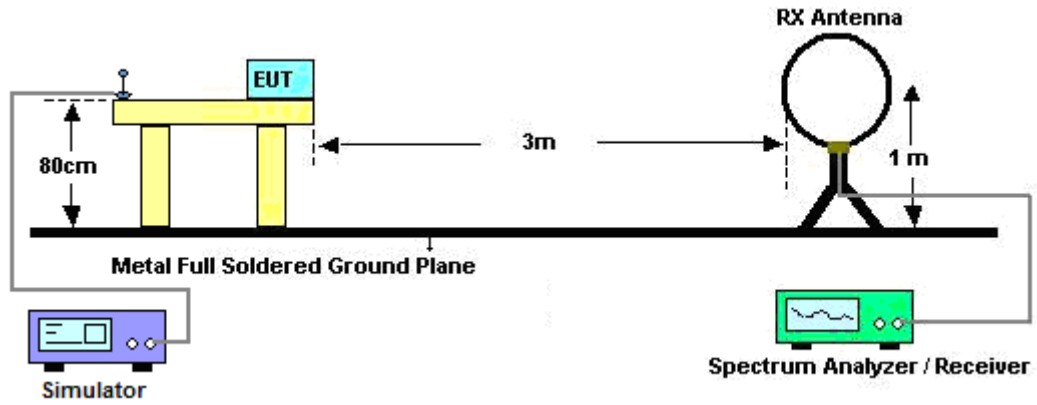

For radiated emissions from 30MHz to 1GHz

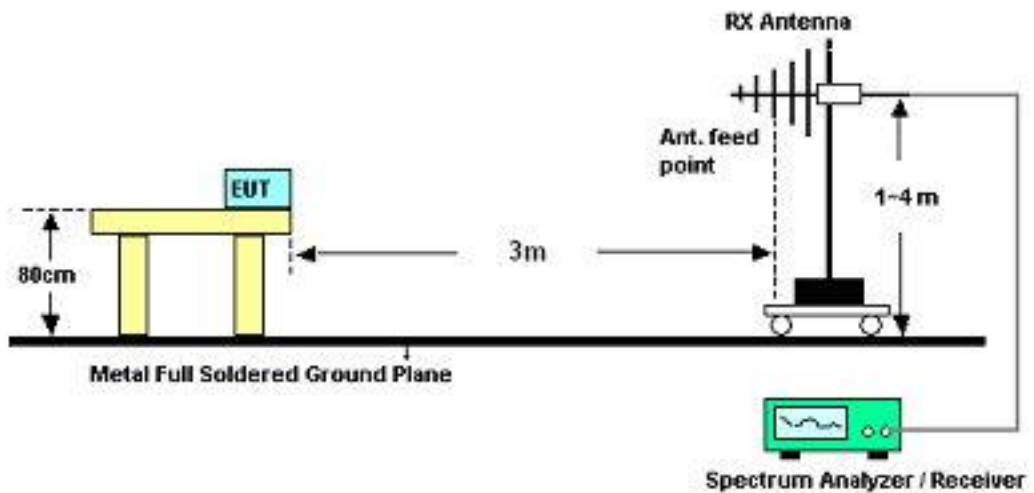

For radiated emissions above 1GHz

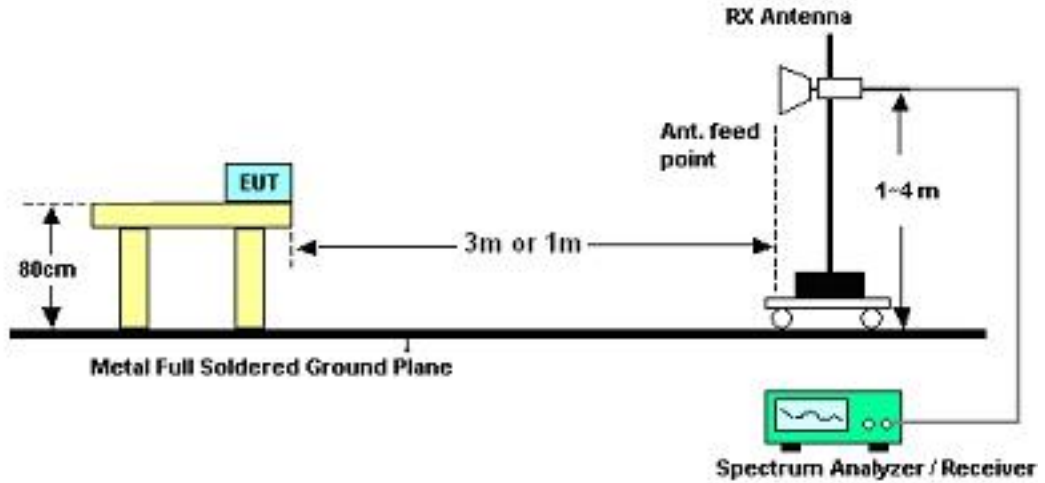

3.9.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Kai Wang	Temperature :	23~24°C	
		Relative Humidity :	46~47%	
Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



3.9.6 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	Mode 1	Temperature :	23~24°C
Test Channel :	00	Relative Humidity :	46~47%
Test Engineer :	Kai Wang	Polarization :	Horizontal
Remark :	2402 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
49.17	24.92	-15.08	40	47.08	8.68	0.69	31.53	139	208	Peak
150.42	22.06	-21.44	43.5	41.31	11.1	1.21	31.56	-	-	Peak
242.22	20.5	-25.5	46	38.27	12.12	1.53	31.42	-	-	Peak
349	23.96	-22.04	46	38.29	14.99	1.97	31.29	-	-	Peak
542.2	22.71	-23.29	46	32.3	18.87	2.53	30.99	-	-	Peak
775.3	25.55	-20.45	46	31.07	22.07	3.1	30.69	-	-	Peak
2388.85	52.14	-21.86	74	47.78	32.18	6.03	33.85	102	227	Peak
2388.85	38.73	-15.27	54	34.37	32.18	6.03	33.85	102	227	Average
2402	108.22	-	-	103.84	32.2	6.03	33.85	102	227	Peak
2402	89.74	-	-	85.38	32.18	6.03	33.85	102	227	Average
2484	32.74	-21.26	54	28.18	32.28	6.18	33.9	102	227	Average
2484	48.97	-25.03	74	44.41	32.28	6.18	33.9	102	227	Peak



Test Mode :	Mode 1	Temperature :	23~24°C
Test Channel :	00	Relative Humidity :	46~47%
Test Engineer :	Kai Wang	Polarization :	Vertical
Remark :	2402 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.54	33.36	-6.64	40	48.01	16.27	0.54	31.46	121	140	Peak
34.86	32.67	-7.33	40	48.23	15.33	0.58	31.47	-	-	Peak
77.25	32.09	-7.91	40	55.78	6.97	0.87	31.53	-	-	Peak
464.5	26.32	-19.68	46	37.43	17.64	2.33	31.08	-	-	Peak
542.2	33.02	-12.98	46	42.61	18.87	2.53	30.99	-	-	Peak
794.2	24.83	-21.17	46	30	22.38	3.13	30.68	-	-	Peak
2385.81	47.86	-26.14	74	43.5	32.18	6.03	33.85	100	10	Peak
2385.81	35.15	-18.85	54	30.79	32.18	6.03	33.85	100	10	Average
2402	101.57	-	-	97.19	32.2	6.03	33.85	100	10	Peak
2402	84.34	-	-	79.98	32.18	6.03	33.85	100	10	Average
2492	32.81	-21.19	54	28.23	32.3	6.18	33.9	100	10	Average
2492	45.13	-28.87	74	40.55	32.3	6.18	33.9	100	10	Peak



Test Mode :	Mode 2	Temperature :	23~24°C
Test Channel :	39	Relative Humidity :	46~47%
Test Engineer :	Kai Wang	Polarization :	Horizontal
Remark :	2441 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
50.25	29.82	-10.18	40	52.38	8.28	0.7	31.54	188	102	Peak
150.42	19.57	-23.93	43.5	38.82	11.1	1.21	31.56	-	-	Peak
271.65	25.33	-20.67	46	42.05	13.01	1.64	31.37	-	-	Peak
349	20.97	-25.03	46	35.3	14.99	1.97	31.29	-	-	Peak
542.9	22.65	-23.35	46	32.21	18.89	2.54	30.99	-	-	Peak
775.3	24.32	-21.68	46	29.84	22.07	3.1	30.69	-	-	Peak
2388	50.3	-23.7	74	45.94	32.18	6.03	33.85	100	230	Peak
2388	33.72	-20.28	54	29.36	32.18	6.03	33.85	100	230	Average
2441	106.61	-	-	102.14	32.24	6.11	33.88	100	230	Peak
2441	88.6	-	-	84.13	32.24	6.11	33.88	100	230	Average
2486	50.75	-23.25	74	46.19	32.28	6.18	33.9	100	230	Peak
2486	33.22	-20.78	54	28.66	32.28	6.18	33.9	100	230	Average



Test Mode :	Mode 2	Temperature :	23~24°C
Test Channel :	39	Relative Humidity :	46~47%
Test Engineer :	Kai Wang	Polarization :	Vertical
Remark :	2441 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.54	32.42	-7.58	40	47.07	16.27	0.54	31.46	114	263	Peak
47.01	30.98	-9.02	40	52.35	9.48	0.67	31.52	-	-	Peak
77.25	32.07	-7.93	40	55.76	6.97	0.87	31.53	-	-	Peak
341.3	21.13	-24.87	46	35.78	14.75	1.9	31.3	-	-	Peak
542.2	30.33	-15.67	46	39.92	18.87	2.53	30.99	-	-	Peak
775.3	24.71	-21.29	46	30.23	22.07	3.1	30.69	-	-	Peak
2382	45.87	-28.13	74	41.53	32.16	6.03	33.85	170	4	Peak
2382	33.38	-20.62	54	29.04	32.16	6.03	33.85	170	4	Average
2441	101.71	-	-	97.24	32.24	6.11	33.88	170	4	Peak
2441	84.54	-	-	80.07	32.24	6.11	33.88	170	4	Average
2484	45.29	-28.71	74	40.73	32.28	6.18	33.9	170	4	Peak
2484	32.67	-21.33	54	28.11	32.28	6.18	33.9	170	4	Average



Test Mode :	Mode 3	Temperature :	23~24°C
Test Channel :	78	Relative Humidity :	46~47%
Test Engineer :	Kai Wang	Polarization :	Horizontal
Remark :	2480 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
45.66	24.77	-15.23	40	45.34	10.27	0.66	31.5	124	182	Peak
49.17	24.04	-15.96	40	46.2	8.68	0.69	31.53	-	-	Peak
151.5	18.97	-24.53	43.5	38.28	11.03	1.21	31.55	-	-	Peak
386.1	20.32	-25.68	46	33.29	16.14	2.11	31.22	-	-	Peak
542.2	24.78	-21.22	46	34.37	18.87	2.53	30.99	-	-	Peak
775.3	25.4	-20.6	46	30.92	22.07	3.1	30.69	-	-	Peak
2382	47.9	-26.1	74	43.56	32.16	6.03	33.85	100	216	Peak
2382	32.94	-21.06	54	28.6	32.16	6.03	33.85	100	216	Average
2480	107.3	-	-	102.74	32.28	6.18	33.9	100	216	Peak
2480	89.11	-	-	84.55	32.28	6.18	33.9	100	216	Average
2483.5	72.1	-1.9	74	67.54	32.28	6.18	33.9	100	216	Peak
2483.5	34.72	-19.28	54	30.16	32.28	6.18	33.9	100	216	Average



Test Mode :	Mode 3	Temperature :	23~24°C
Test Channel :	78	Relative Humidity :	46~47%
Test Engineer :	Kai Wang	Polarization :	Vertical
Remark :	2480 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
34.86	32.55	-7.45	40	48.11	15.33	0.58	31.47	117	305	Peak
47.01	30.84	-9.16	40	52.21	9.48	0.67	31.52	-	-	Peak
77.25	32.48	-7.52	40	56.17	6.97	0.87	31.53	-	-	Peak
346.2	21.77	-24.23	46	36.22	14.9	1.94	31.29	-	-	Peak
542.2	29.84	-16.16	46	39.43	18.87	2.53	30.99	-	-	Peak
775.3	26.45	-19.55	46	31.97	22.07	3.1	30.69	-	-	Peak
2390	46.72	-27.28	74	42.36	32.18	6.03	33.85	112	128	Peak
2390	33.35	-20.65	54	28.99	32.18	6.03	33.85	112	128	Average
2480	101.98	-	-	97.42	32.28	6.18	33.9	112	128	Peak
2480	84.71	-	-	80.15	32.28	6.18	33.9	112	128	Average
2483.5	66.78	-7.22	74	62.22	32.28	6.18	33.9	112	128	Peak
2483.5	30.33	-23.67	54	25.77	32.28	6.18	33.9	112	128	Average



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Connected Construction

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
System Simulator	R&S	CMU200	117995	N/A	Aug. 11, 2010	Aug.10, 2011	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP30	101329	9kHz~30GHz	May. 03, 2011	May. 02, 2012	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 13, 2010	Sep. 12, 2011	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	0846202	N/A	Sep. 14, 2010	Sep. 13, 2011	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D35P	TBN-930701	N/A	Jul. 30, 2010	Jul. 29, 2011	Conducted (TH02-HY)
EMI Test Receive	R&S	ESCS 30	100356	9KHz – 2.75GHz	Aug. 16, 2010	Aug. 15, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz – 30MHz	Dec. 03, 2010	Dec. 02, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz – 30MHz	Dec. 01, 2010	Nov. 30, 2011	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 31, 2010	Oct. 30, 2011	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP	101067	9KHz ~ 30GHz	Dec. 03, 2010	Dec. 02, 2011	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 19, 2010	Aug. 18, 2011	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 18, 2010	Oct. 17, 2011	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec. 06, 2010	Dec. 05, 2011	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32dB.GAIN	Mar. 29, 2011	Mar. 28, 2012	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 29, 2010	Jul. 28, 2011	Radiation (03CH07-HY)
Bluetooth Base Station	Anritsu	MT8852B	6K00005722	N/A	N/A	N/A	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $U_c(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				



Appendix A. Photographs of EUT

Please refer to Sporton report number EP131159-02 as below.