

ASUSTeK Computer Inc

4F, No. 150, Li-Te Rd., Peitou, Taipei, 112, Taiwan

Tel: +886-2-28943447 ; Fax: +886-2-28987364

Declaration - MIF for HAC RF Interference Evaluation

To whom it may concern:

This device, with FCC ID: MSQZ016D, Hearing Aid Compatibility Requirement is going to be certified under ANSI C63.19 2011 version per Part 20.19.


For Radio Frequency Interference, Speag's Audio Interference Analyzer (AIA) or other indirect or direct measurement was not used to determine the M rating.

The M rating was determined by measuring the maximum steady state average E-field values in dB (V/m) or average antenna input power as documented in HAC test report exhibit, and adding the MIF value in dB. The MIF values below for the worst-case operation mode for all air interfaces are pre-determined values provided by Speag.

| UID | Communication System Name | MIF(dB) |
|-------|--|---------|
| 10021 | GSM-FDD(TDMA,GMSK) | 3.63 |
| 10011 | UMTS-FDD(WCDMA) | -27.23 |
| 10039 | CDMA2000 (1xRTT, RC1) | -19.77 |
| 10081 | CDMA2000 (1xRTT, RC3) | -19.71 |
| 10295 | CDMA2000 (1xRTT, RC1 SO3, 1/8th Rate 25 fr.) | 3.26 |

We are confirming that the Speag simulation provided represents all the air interface modes applicable for a HAC rating for this handset.

Sincerely,

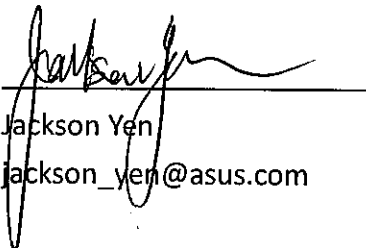

Jackson Yen
jackson_yen@asus.com