



FCC RF Test Report

APPLICANT : ASUSTeK COMPUTER INC.
EQUIPMENT : ASUS Phone(Mobile phone)
BRAND NAME : ASUS
MODEL NAME : ASUS_Z01GS
FCC ID : MSQZ01GS
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Apr. 08, 2017 and testing was completed on Sep. 21, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION5

 1.1 Applicant5

 1.2 Manufacturer.....5

 1.3 Product Feature of Equipment Under Test.....5

 1.4 Modification of EUT6

 1.5 Testing Location7

 1.6 Applicable Standards.....8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST9

 2.1 Carrier Frequency and Channel9

 2.2 Test Mode.....10

 2.3 Connection Diagram of Test System.....11

 2.4 Support Unit used in test configuration and system11

 2.5 EUT Operation Test Setup11

 2.6 Measurement Results Explanation Example.....12

3 TEST RESULT.....13

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement13

 3.2 Maximum Conducted Output Power Measurement16

 3.3 Power Spectral Density Measurement17

 3.4 Unwanted Emissions Measurement.....19

 3.5 AC Conducted Emission Measurement.....24

 3.6 Frequency Stability Measurement.....26

 3.7 Automatically Discontinue Transmission27

 3.8 Antenna Requirements.....28

4 LIST OF MEASURING EQUIPMENT29

5 UNCERTAINTY OF EVALUATION30

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX E. DUTY CYCLE PLOTS

APPENDIX F. SETUP PHOTOGRAPHS



REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION | ISSUED DATE |
|------------|---------|-------------------------|---------------|
| FR7408743F | Rev. 01 | Initial issue of report | Oct. 05, 2017 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description | Limit | Result | Remark |
|----------------|--------------------|--|-----------------------------|--------|---|
| 3.1 | 15.403(i) | 6dB, 26dB and 99% Occupied Bandwidth | > 500kHz | Pass | - |
| 3.2 | 15.407(a) | Maximum Conducted Output Power | ≤ 30 dBm | Pass | - |
| 3.3 | 15.407(a) | Power Spectral Density | ≤ 30 dBm/500kHz | Pass | - |
| 3.4 | 15.407(b) | Unwanted Emissions | 15.407(b)(4)(i) & 15.209(a) | Pass | Under limit 3.29 dB at 5640.800 MHz |
| 3.5 | 15.207 | AC Conducted Emission | 15.207(a) | Pass | Under limit 18.40 dB at 0.166 MHz |
| 3.6 | 15.407(g) | Frequency Stability | Within Operation Band | Pass | - |
| 3.7 | 15.407(c) | Automatically Discontinue Transmission | Discontinue Transmission | Pass | - |
| 3.8 | 15.203 & 15.407(a) | Antenna Requirement | N/A | Pass | - |



1 General Description

1.1 Applicant

ASUSTeK COMPUTER INC.
4F, No. 150, LI-TE RD., PEITOU, TAIPEI, TAIWAN

1.2 Manufacturer

COTEK ELECTRONICS (SUZHOU) CO., LTD.
No. 288, Mayun Road, Suzhou Hi-and-New Tech Park, Jiangsu, PRC

1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, WiGig, FM Receiver, NFC, and GPS.

| Product Specification subjective to this standard | |
|---|--|
| Sample 1 | EUT with SKU 1 |
| Sample 2 | EUT with SKU 2 |
| Sample 3 | EUT with SKU 3 |
| Sample 4 | EUT with SKU 4 |
| Antenna Type | WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna GPS / Glonass / BDS / Galileo : PIFA Antenna NFC: Loop Antenna FM: Integral Antenna (Earphone acting as FM antenna deemed as an integral antenna) |



<Sample Information>

| SKU MB | SKU1 | SKU2 |
|--------------|-------------------------------|-------------------------------|
| DDR4X | 6G/ Hynix | 6G/ Hynix |
| UFS 2.1 | 128G/ Toshiba | 64G/ Toshiba |
| CPU | MSM-8998 | |
| TP Module | TIANMA/TA055VVHM09-03 ON CELL | TIANMA/TA055VVHM09-05 ON CELL |
| Front Camera | CHICONY/CBAH81120003870LH | CHICONY/CBAH81120003871LH |
| Rear Camera | 12M+16M/SEMCO/MOMDM82PG3A | |
| Battery | ATL POLY/C11P1701/SMP | |

| SKU MB | SKU3 | SKU4 |
|--------------|---------------------------|-----------------------|
| DDR4X | 6G/ Samsung | 6G/ Hynix |
| UFS 2.1 | 256G/ Samsung | 64G/ Samsung |
| CPU | MSM-8998 | |
| TP Module | TIANMA/TA055VVHM08-05 | TIANMA/TA055VVHM09-05 |
| Front Camera | CHICONY/CBAH81120003871LH | |
| Rear Camera | 12M+16M/SEMCO/MOMDM82PG3A | |
| Battery | ATL POLY/C11P1701/SMP | |

Remark: All tests were performed with sample 1.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

| | | |
|---------------------------|--|---------|
| Test Site | SPORTON INTERNATIONAL INC. | |
| Test Site Location | No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978 | |
| Test Site No. | Sporton Site No. | |
| | TH05-HY | CO05-HY |

Note: The test site complies with ANSI C63.4 2014 requirement.

| | | |
|---------------------------|--|--|
| Test Site | SPORTON INTERNATIONAL INC. | |
| Test Site Location | No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855 | |
| Test Site No. | Sporton Site No. | |
| | 03CH13-HY | |

Note: The test site complies with ANSI C63.4 2014 requirement



1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

| Frequency Band | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|--------------------------------------|---------|-------------|---------|-------------|
| 5725-5850 MHz Band 4 (U-NII-3) | 149 | 5745 | 157 | 5785 |
| | 151* | 5755 | 159* | 5795 |
| | 153 | 5765 | 161 | 5805 |
| | 155# | 5775 | 165 | 5825 |

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "#n" were 802.11ac VHT80.



2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

Single Antenna

| Modulation | Data Rate |
|----------------|-----------|
| 802.11a | 6 Mbps |
| 802.11n HT20 | MCS0 |
| 802.11n HT40 | MCS0 |
| 802.11ac VHT80 | MCS0 |


MIMO Antenna

| Modulation | Data Rate |
|----------------|-----------|
| 802.11a | 6 Mbps |
| 802.11n HT20 | MCS0 |
| 802.11n HT40 | MCS0 |
| 802.11ac VHT80 | MCS0 |

| | |
|------------------------------|--|
| AC Conducted Emission | Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link (5G) + Camera (front) + SD (play MP3) + Earphone + USB Cable 1 (Charging from Adaptor 1) |
|------------------------------|--|

| Ch. # | Band IV : 5725-5850 MHz | | | |
|----------|-------------------------|--------------|--------------|----------------|
| | 802.11a | 802.11n HT20 | 802.11n HT40 | 802.11ac VHT80 |
| L Low | 149 | 149 | 151 | - |
| M Middle | 157 | 157 | - | 155 |
| H High | 165 | 165 | 159 | - |

2.3 Connection Diagram of Test System

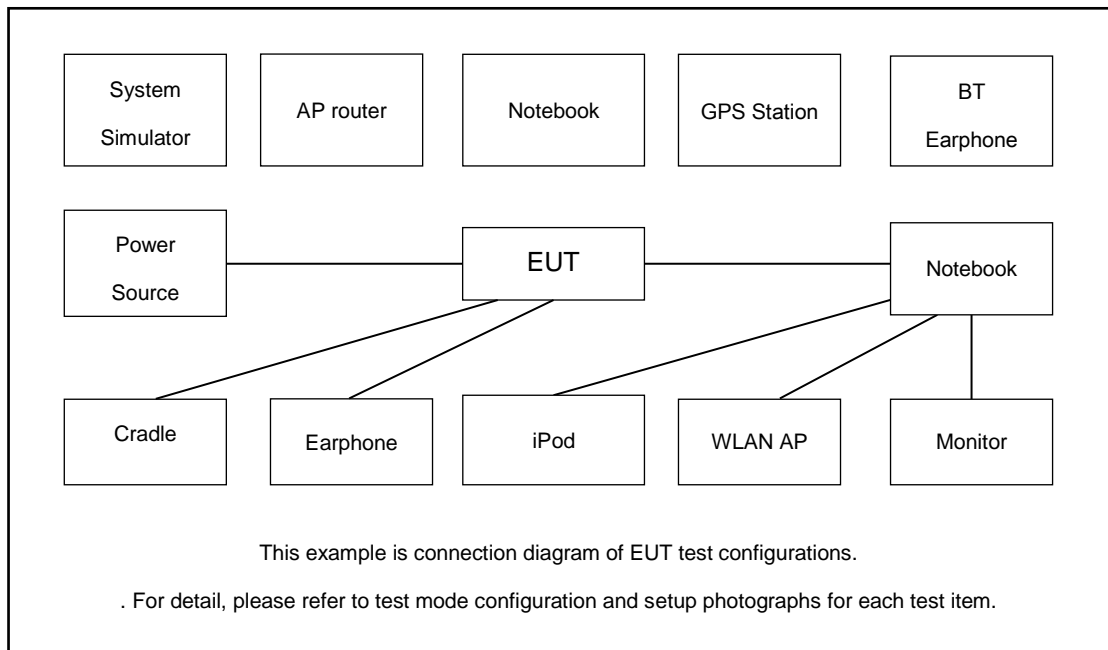

2.4 Support Unit used in test configuration and system

| Item | Equipment | Trade Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|--------------------|---------------|----------------|--|------------|--|
| 1. | Base Station | Anritsu | MT8820C | N/A | N/A | Unshielded,1.8m |
| 2. | Bluetooth Earphone | Sony Ericsson | MW600 | PY700A2029 | N/A | N/A |
| 3. | WLAN AP | ASUS | RT-AC66U | MSQ-RTAC66U | N/A | Unshielded,1.8m |
| 4. | Notebook | DELL | Latitude E6320 | FCC DoC/ Contains FCC ID: QDS-BRCM1054 | N/A | AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m |
| 5. | SD Card | SanDisk | MicroSD HC | FCC DoC | N/A | N/A |

2.5 EUT Operation Test Setup

The RF test items, programmed RF utility, “QRCT.exe” installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.



3.1.4 Test Setup

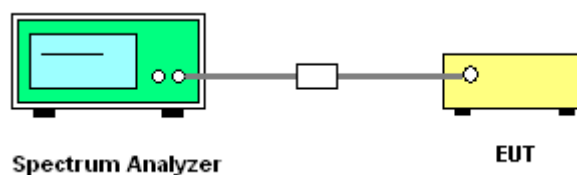




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

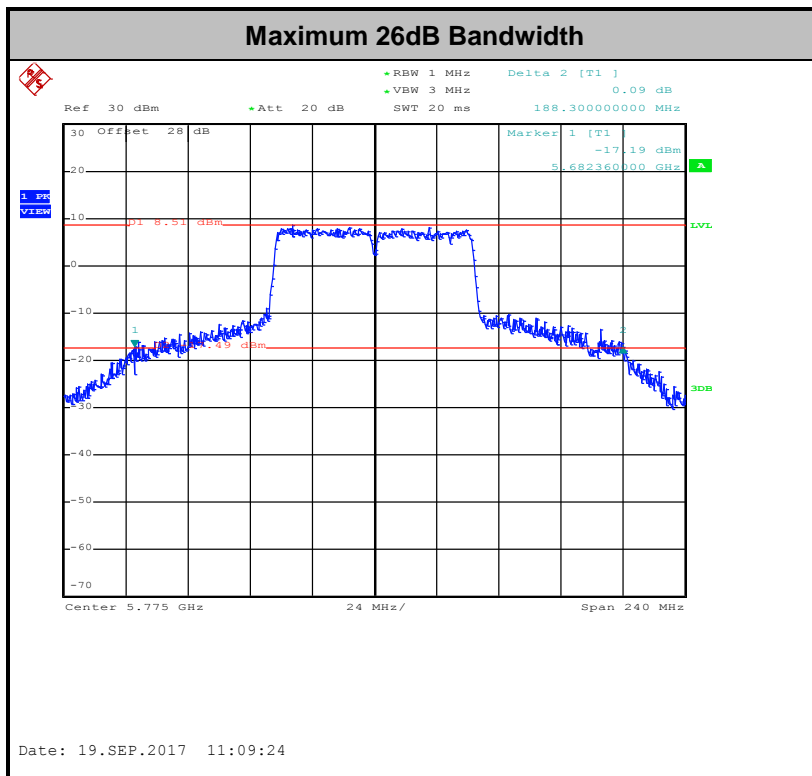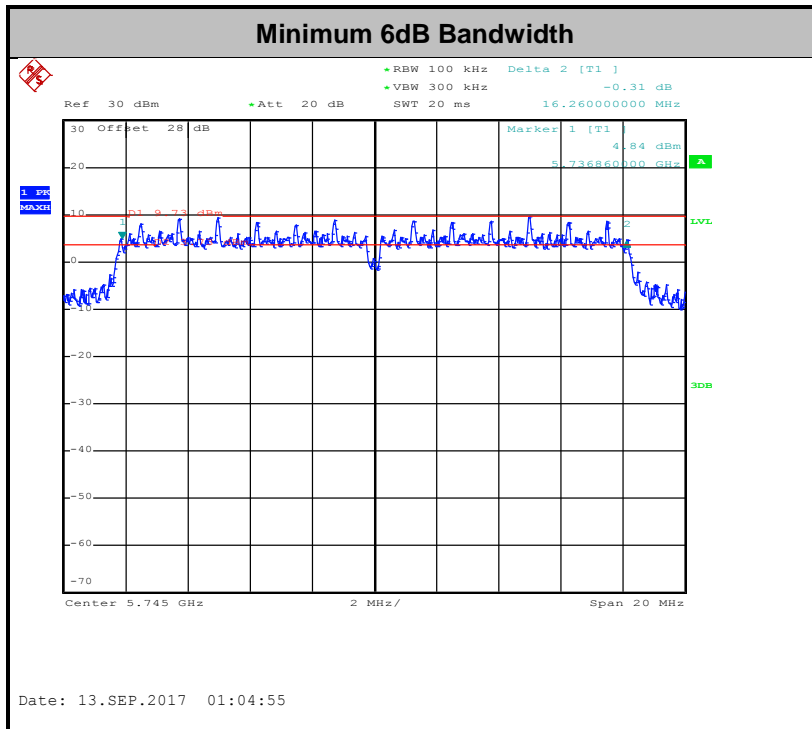

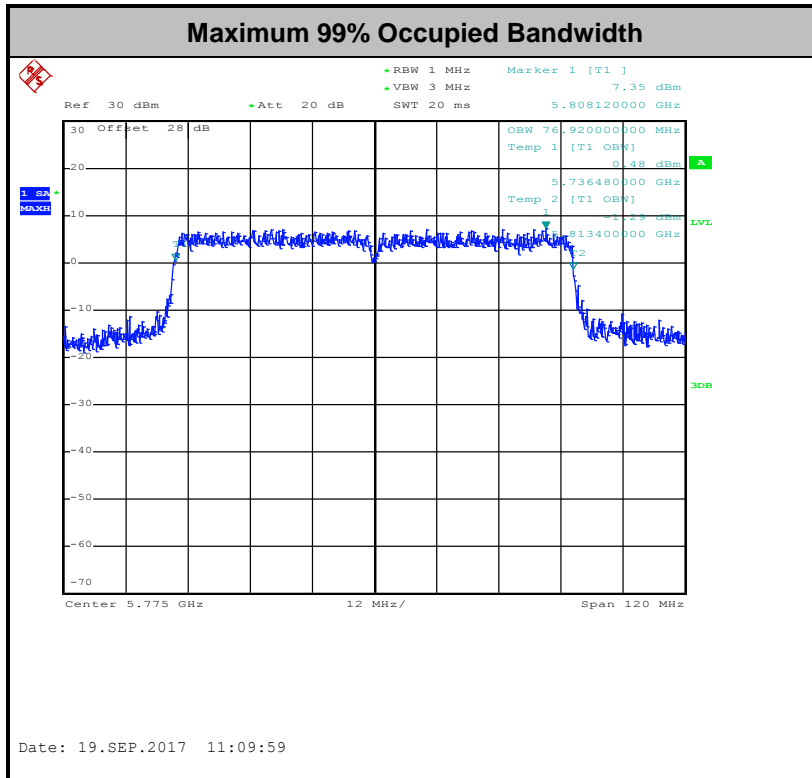

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

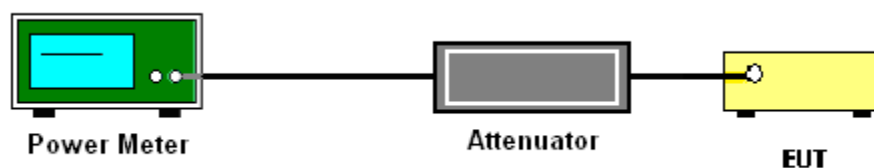

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{ANT})$ dB.


With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{ANT})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{ANT})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{ANT}^{th}$ of the PSD limit.

3.3.4 Test Setup

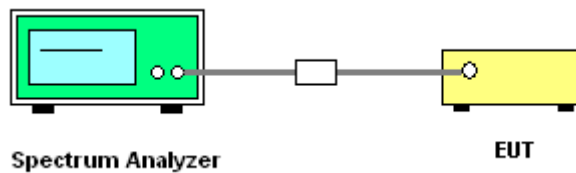

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

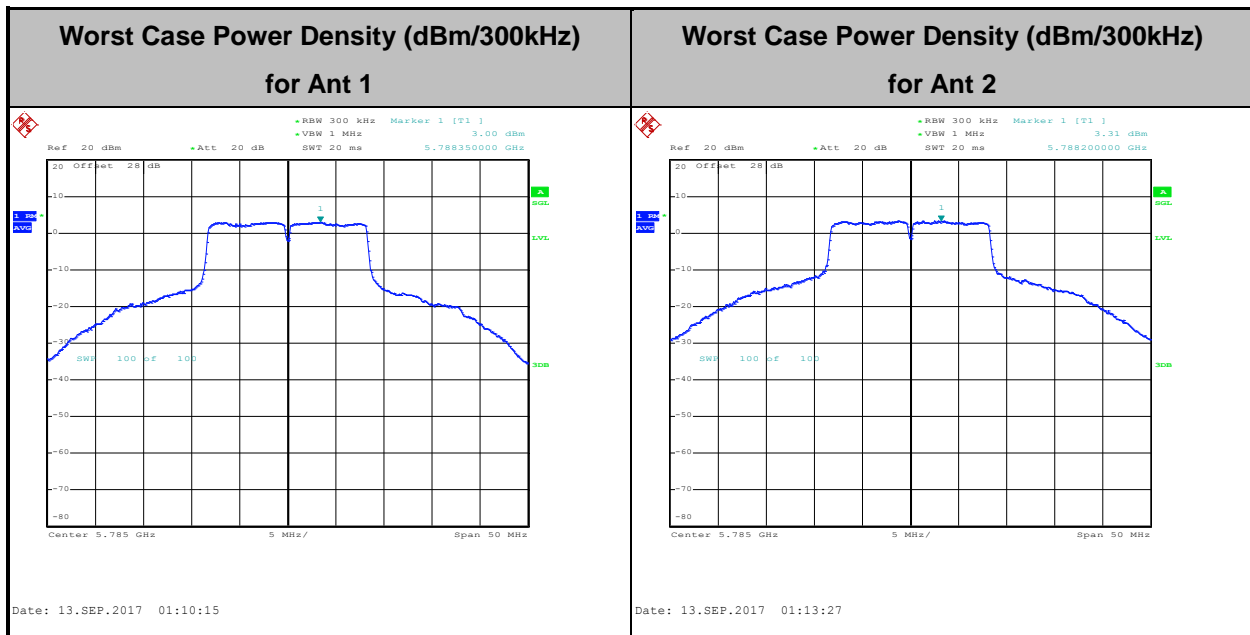



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30.0 | 30 | 30 |
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



| EIRP (dBm) | Field Strength at 3m (dBµV/m) |
|------------|-------------------------------|
| -17 | 78.3 |
| - 27 | 68.3 |

(3) KDB789033 D02 v01r04 G)2)c)

- (i) Section 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and 2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz. However, an out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz dBm/MHz peak emission limit.
- (ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the alternative limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold


(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz


- $VBW = 10 \text{ Hz}$, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
 3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
 4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
 5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
 6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
 7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

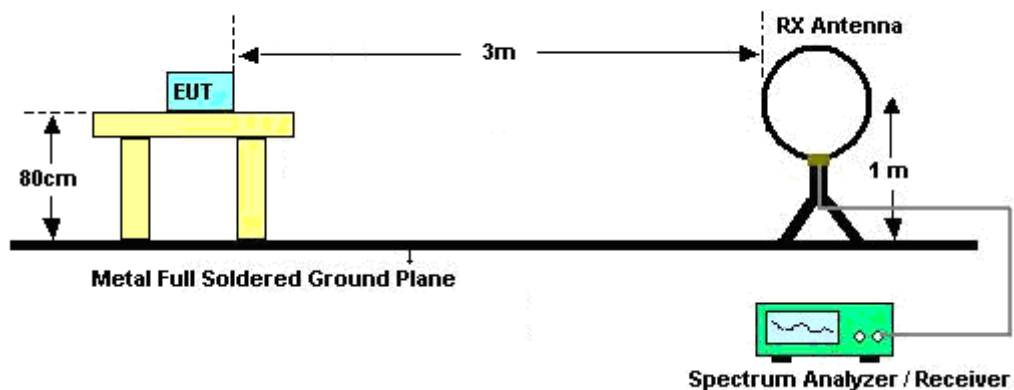

For radiated emissions from 30MHz to 1GHz

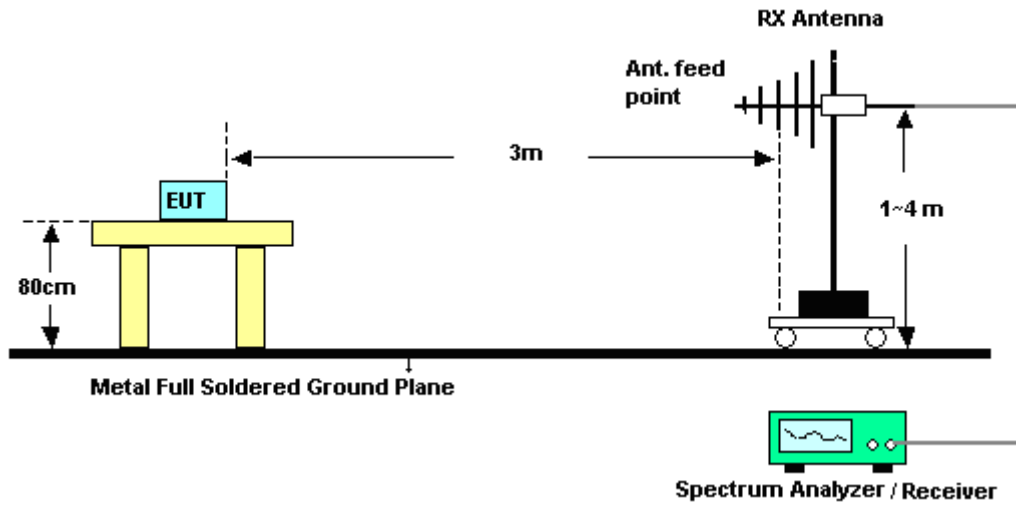

For radiated emissions above 1GHz

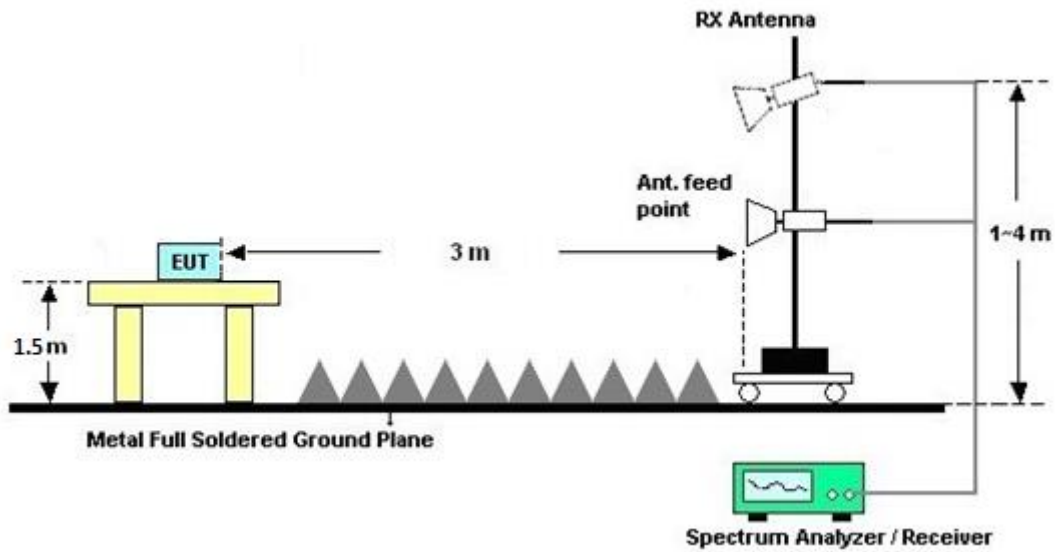



3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission (MHz) | Conducted limit (dB μ V) | |
|-----------------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

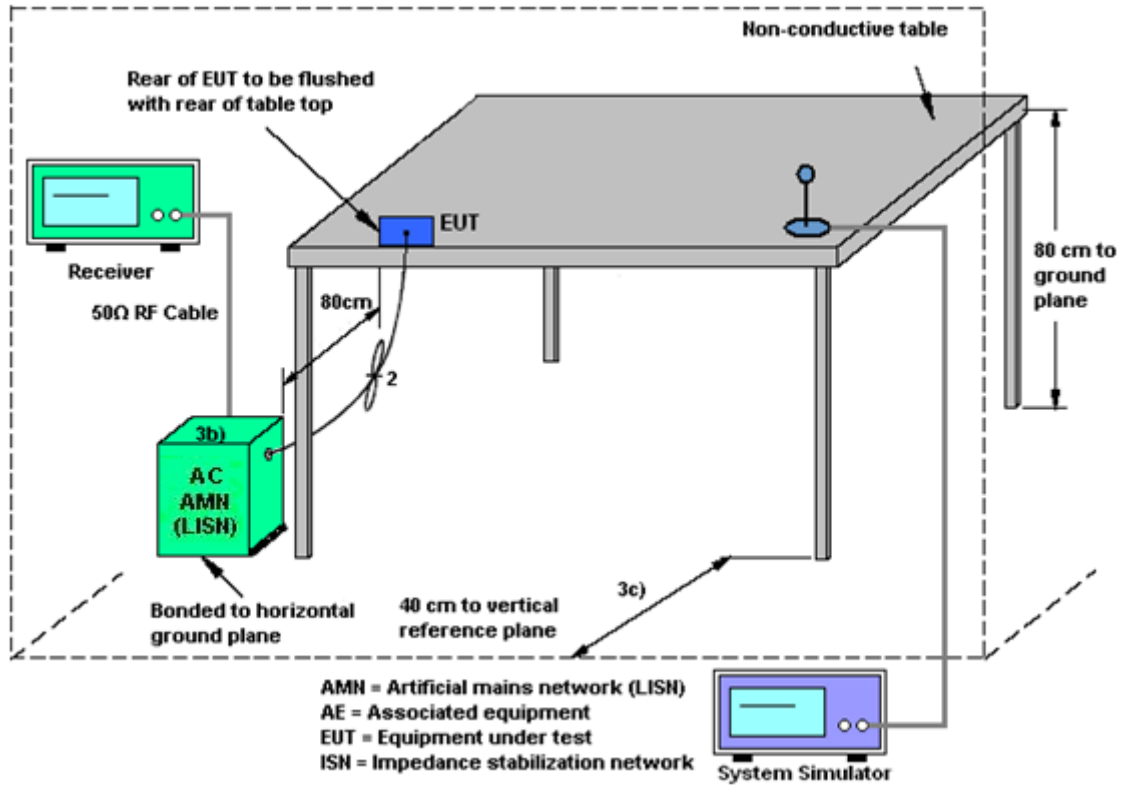

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup



3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.8 Antenna Requirements

3.8.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.8.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

| | | | DG for Power (dBi) | DG for PSD (dBi) | Power Limit Reduction (dB) | PSD Limit Reduction (dB) |
|---------|----------------|----------------|-----------------------------|---------------------------|-------------------------------------|-----------------------------------|
| | Ant 1 (dBi) | Ant 2 (dBi) | | | | |
| Band IV | 0.30 | -1.40 | 0.30 | 2.50 | 0.00 | 0.00 |

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)



4 List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|---------------------------|-------------------|---------------------------------|-----------------|--------------------|------------------|---------------------------------|---------------|--------------------------|
| Power Meter | Anritsu | ML2495A | 0932001 | 300MHz~40GHz | Sep. 29, 2016 | Aug.29.2017~ Sep.21.2017 | Sep. 28, 2017 | Conducted (TH05-HY) |
| Power Sensor | Anritsu | MA2411B | 0846202 | 300MHz~40GHz | Sep. 29, 2016 | Aug.29.2017~ Sep.21.2017 | Sep. 28, 2017 | Conducted (TH05-HY) |
| Spectrum Analyzer | Rohde & Schwarz | FSP30 | 101067 | 9kHz ~ 30GHz | Nov. 17, 2016 | Aug.29.2017~ Sep.21.2017 | Nov. 16, 2017 | Conducted (TH05-HY) |
| Temperature Chamber | ESPEC | SH-641 | 92013720 | -40℃ ~90℃ | Aug. 28, 2017 | Aug.29.2017~ Sep.21.2017 | Aug. 27, 2018 | Conducted (TH05-HY) |
| Programmable Power Supply | GW Instek | PSS-2005 | EL890094 | 1V~20V 0.5A~5A | Oct. 11, 2016 | Aug.29.2017~ Sep.21.2017 | Oct. 10, 2017 | Conducted (TH05-HY) |
| AC Power Source | ChainTek | APC-1000W | N/A | N/A | N/A | Sep. 21, 2017 | N/A | Conduction (CO05-HY) |
| EMI Test Receiver | Rohde & Schwarz | ESCI 7 | 100724 | 9kHz~7GHz | Sep. 20, 2017 | Sep. 21, 2017 | Sep. 19, 2018 | Conduction (CO05-HY) |
| LISN | Rohde & Schwarz | ENV216 | 100080 | 9kHz~30MHz | Nov. 29, 2016 | Sep. 21, 2017 | Nov. 28, 2017 | Conduction (CO05-HY) |
| LISN | Rohde & Schwarz | ENV216 | 100081 | 9kHz~30MHz | Dec. 06, 2016 | Sep. 21, 2017 | Dec. 05, 2017 | Conduction (CO05-HY) |
| Loop Antenna | Rohde & Schwarz | HFH2-Z2 | 100315 | 9 kHz~30 MHz | May. 15, 2017 | Sep. 12, 2017~ Sep. 19, 2017 | May. 14, 2019 | Radiation (03CH13-HY) |
| Amplifier | Sonoma-Instrument | 310 N | 187282 | 9KHz~1GHz | Dec. 21, 2016 | Sep. 12, 2017~ Sep. 19, 2017 | Dec. 20, 2017 | Radiation (03CH13-HY) |
| Bilog Antenna | TESEQ | CBL 6111D&00800 N1D01N-06 | 40103&04 | 30MHz to 1GHz | Jan. 07, 2017 | Sep. 12, 2017~ Sep. 19, 2017 | Jan. 06, 2018 | Radiation (03CH13-HY) |
| Horn Antenna | SCHWARZBECK | BBHA 9120 D | 9120D-1241 | 1GHz ~ 18GHz | May. 02, 2017 | Sep. 12, 2017~ Sep. 19, 2017 | May. 01, 2018 | Radiation (03CH13-HY) |
| Preamplifier | Keysight | 83017A | MY53270147 | 1GHz~26.5GHz | Jan. 09, 2017 | Sep. 12, 2017~ Sep. 19, 2017 | Jan. 08, 2018 | Radiation (03CH13-HY) |
| Spectrum Analyzer | Keysight | N9010A | MY55370526 | N/A | Mar. 15, 2017 | Sep. 12, 2017~ Sep. 19, 2017 | Mar. 14, 2018 | Radiation (03CH13-HY) |
| Antenna Mast | EMEC | AM-BS-4500-B | N/A | 1m~4m | N/A | Sep. 12, 2017~ Sep. 19, 2017 | N/A | Radiation (03CH13-HY) |
| Turn Table | EMEC | TT2000 | N/A | 0~360 Degree | N/A | Sep. 12, 2017~ Sep. 19, 2017 | N/A | Radiation (03CH13-HY) |
| Preamplifier | MITEQ | AMF-7D-0010 1800 | 2025787 | 1GHZ~18GHZ | Feb. 13, 2017 | Sep. 12, 2017~ Sep. 19, 2017 | Feb. 12, 2018 | Radiation (03CH13-HY) |
| EMI Test Receiver | Agilent | N9038A(MXE) | MY53290053 | 20Hz to 26.5GHz | Jan. 12, 2017 | Sep. 12, 2017~ Sep. 19, 2017 | Jan. 11, 2018 | Radiation (03CH13-HY) |
| SHF-EHF Horn Antenna | SCHWARZBECK | BBHA 9170 | BBHA917058 4 | 18GHz- 40GHz | Nov. 08, 2016 | Sep. 12, 2017~ Sep. 19, 2017 | Nov. 07, 2017 | Radiation (03CH13-HY) |
| Preamplifier | MITEQ | TTA 1840-35-HG | 1887435 | 18GHz ~ 40GHz | Oct. 13, 2016 | Sep. 12, 2017~ Sep. 19, 2017 | Oct. 12, 2017 | Radiation (03CH13-HY) |



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

| | |
|---|-----|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 2.7 |
|---|-----|

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|-----|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.9 |
|---|-----|

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

| | |
|---|-----|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 5.4 |
|---|-----|

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

| | |
|---|-----|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.3 |
|---|-----|

Appendix A. Test Result of Conducted Test Items

| | | | | |
|----------------|-----------------------------------|--------------------|-------|----|
| Test Engineer: | Ethan Lin/Shiming Liu / Allen Lin | Temperature: | 21~25 | °C |
| Test Date: | 2017/8/29~2017/9/21 | Relative Humidity: | 51~54 | % |

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

| Band IV | | | | | | | | | | | | | |
|---------|-----------|-----|-----|-------------|---------------------|-------|----------------------|--------|----------------------|-------|---------------------------------|-------|-----------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 99% Bandwidth (MHz) | | 26dB Bandwidth (MHz) | | 6 dB Bandwidth (MHz) | | 6 dB Bandwidth Min. Limit (MHz) | | Pass/Fail |
| | | | | | Ant 1 | Ant 2 | Ant 1 | Ant 2 | Ant 1 | Ant 2 | Ant 1 | Ant 2 | |
| 11a | 6Mbps | 2 | 149 | 5745 | 23.95 | 29.00 | 45.25 | 46.90 | 16.30 | 16.26 | 0.5 | 0.5 | Pass |
| 11a | 6Mbps | 2 | 157 | 5785 | 24.95 | 30.30 | 45.30 | 46.30 | 16.28 | 16.28 | 0.5 | 0.5 | Pass |
| 11a | 6Mbps | 2 | 165 | 5825 | 25.35 | 30.15 | 44.95 | 48.05 | 16.30 | 16.26 | 0.5 | 0.5 | Pass |
| HT20 | MCS0 | 2 | 149 | 5745 | 20.55 | 23.65 | 45.10 | 47.65 | 17.54 | 17.52 | 0.5 | 0.5 | Pass |
| HT20 | MCS0 | 2 | 157 | 5785 | 20.45 | 24.90 | 45.90 | 47.60 | 17.52 | 17.52 | 0.5 | 0.5 | Pass |
| HT20 | MCS0 | 2 | 165 | 5825 | 22.90 | 28.15 | 48.35 | 46.80 | 17.52 | 17.52 | 0.5 | 0.5 | Pass |
| HT40 | MCS0 | 2 | 151 | 5755 | 38.20 | 52.30 | 83.82 | 100.28 | 36.32 | 36.28 | 0.5 | 0.5 | Pass |
| HT40 | MCS0 | 2 | 159 | 5795 | 40.10 | 53.50 | 92.52 | 98.43 | 36.36 | 36.32 | 0.5 | 0.5 | Pass |
| VHT80 | MCS0 | 2 | 155 | 5775 | 76.56 | 76.92 | 167.08 | 188.30 | 76.30 | 75.44 | 0.5 | 0.5 | Pass |

TEST RESULTS DATA
Average Power Table

| Band IV | | | | | | | | | | | | | | |
|---------|-----------|-----|-----|-------------|------------------|-------|-------------------------------|-------|-------|---------------------------------|-------|----------|-------|-----------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Duty Factor (dB) | | Average Conducted Power (dBm) | | | FCC Conducted Power Limit (dBm) | | DG (dBi) | | Pass/Fail |
| | | | | | Ant 1 | Ant 2 | Ant 1 | Ant 2 | SUM | Ant 1 | Ant 2 | Ant 1 | Ant 2 | |
| 11a | 6Mbps | 1 | 149 | 5745 | 0.08 | 0.08 | 18.72 | 18.83 | | 30.00 | 30.00 | 0.30 | -1.40 | Pass |
| 11a | 6Mbps | 1 | 157 | 5785 | 0.08 | 0.08 | 18.50 | 18.75 | | 30.00 | 30.00 | 0.30 | -1.40 | Pass |
| 11a | 6Mbps | 1 | 165 | 5825 | 0.08 | 0.08 | 18.58 | 18.72 | | 30.00 | 30.00 | 0.30 | -1.40 | Pass |
| HT20 | MCS0 | 1 | 149 | 5745 | 0.11 | 0.11 | 18.56 | 18.67 | | 30.00 | 30.00 | 0.30 | -1.40 | Pass |
| HT20 | MCS0 | 1 | 157 | 5785 | 0.11 | 0.11 | 18.31 | 18.68 | | 30.00 | 30.00 | 0.30 | -1.40 | Pass |
| HT20 | MCS0 | 1 | 165 | 5825 | 0.11 | 0.11 | 18.66 | 18.81 | | 30.00 | 30.00 | 0.30 | -1.40 | Pass |
| HT40 | MCS0 | 1 | 151 | 5755 | 0.18 | 0.18 | 18.43 | 18.80 | | 30.00 | 30.00 | 0.30 | -1.40 | Pass |
| HT40 | MCS0 | 1 | 159 | 5795 | 0.18 | 0.18 | 18.23 | 18.83 | | 30.00 | 30.00 | 0.30 | -1.40 | Pass |
| VHT20 | MCS0 | 1 | 149 | 5745 | 0.11 | 0.11 | 18.50 | 18.65 | | 30.00 | 30.00 | 0.30 | -1.40 | Pass |
| VHT20 | MCS0 | 1 | 157 | 5785 | 0.11 | 0.11 | 18.29 | 18.64 | | 30.00 | 30.00 | 0.30 | -1.40 | Pass |
| VHT20 | MCS0 | 1 | 165 | 5825 | 0.11 | 0.11 | 18.60 | 18.63 | | 30.00 | 30.00 | 0.30 | -1.40 | Pass |
| VHT40 | MCS0 | 1 | 151 | 5755 | 0.22 | 0.18 | 18.42 | 18.78 | | 30.00 | 30.00 | 0.30 | -1.40 | Pass |
| VHT40 | MCS0 | 1 | 159 | 5795 | 0.22 | 0.18 | 18.22 | 18.80 | | 30.00 | 30.00 | 0.30 | -1.40 | Pass |
| VHT80 | MCS0 | 1 | 155 | 5775 | 0.32 | 0.36 | 17.52 | 17.50 | | 30.00 | 30.00 | 0.30 | -1.40 | Pass |
| 11a | 6Mbps | 2 | 149 | 5745 | 0.12 | 0.12 | 18.88 | 18.95 | 21.93 | 30.00 | | 0.30 | | Pass |
| 11a | 6Mbps | 2 | 157 | 5785 | 0.12 | 0.12 | 18.52 | 18.97 | 21.77 | 30.00 | | 0.30 | | Pass |
| 11a | 6Mbps | 2 | 165 | 5825 | 0.12 | 0.12 | 18.62 | 18.88 | 21.77 | 30.00 | | 0.30 | | Pass |
| HT20 | MCS0 | 2 | 149 | 5745 | 0.09 | 0.09 | 18.57 | 18.69 | 21.64 | 30.00 | | 0.30 | | Pass |
| HT20 | MCS0 | 2 | 157 | 5785 | 0.09 | 0.09 | 18.32 | 18.77 | 21.56 | 30.00 | | 0.30 | | Pass |
| HT20 | MCS0 | 2 | 165 | 5825 | 0.09 | 0.09 | 18.74 | 18.84 | 21.80 | 30.00 | | 0.30 | | Pass |
| HT40 | MCS0 | 2 | 151 | 5755 | 0.18 | 0.18 | 18.45 | 18.83 | 21.65 | 30.00 | | 0.30 | | Pass |
| HT40 | MCS0 | 2 | 159 | 5795 | 0.18 | 0.18 | 18.26 | 18.88 | 21.59 | 30.00 | | 0.30 | | Pass |
| VHT20 | MCS0 | 2 | 149 | 5745 | 0.11 | 0.11 | 18.51 | 18.66 | 21.59 | 30.00 | | 0.30 | | Pass |
| VHT20 | MCS0 | 2 | 157 | 5785 | 0.11 | 0.11 | 18.31 | 18.71 | 21.52 | 30.00 | | 0.30 | | Pass |
| VHT20 | MCS0 | 2 | 165 | 5825 | 0.11 | 0.11 | 18.61 | 18.83 | 21.73 | 30.00 | | 0.30 | | Pass |
| VHT40 | MCS0 | 2 | 151 | 5755 | 0.18 | 0.22 | 18.43 | 18.82 | 21.64 | 30.00 | | 0.30 | | Pass |
| VHT40 | MCS0 | 2 | 159 | 5795 | 0.18 | 0.22 | 18.23 | 18.87 | 21.57 | 30.00 | | 0.30 | | Pass |
| VHT80 | MCS0 | 2 | 155 | 5775 | 0.36 | 0.32 | 17.74 | 17.68 | 20.72 | 30.00 | | 0.30 | | Pass |

TEST RESULTS DATA
Power Spectral Density

| Band IV | | | | | | | | | | | | | | | | |
|---------|-----------|-----|-----|-------------|------------------|-------|---------------------------------|-------|------------------------------------|-------|-----|--------------------------------|-------|----------|-------|------------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Duty Factor (dB) | | 10log (500kHz /RBW) Factor (dB) | | Average Power Density (dBm/500kHz) | | | Average PSD Limit (dBm/500kHz) | | DG (dBi) | | Pass /Fail |
| | | | | | Ant 1 | Ant 2 | Ant 1 | Ant 2 | Ant 1 | Ant 2 | SUM | Ant 1 | Ant 2 | Ant 1 | Ant 2 | |
| 11a | 6Mbps | 2 | 149 | 5745 | 0.12 | 0.12 | 2.22 | | | | | 8.59 | 30.00 | 2.50 | | Pass |
| 11a | 6Mbps | 2 | 157 | 5785 | 0.12 | 0.12 | 2.22 | | | | | 8.66 | 30.00 | 2.50 | | Pass |
| 11a | 6Mbps | 2 | 165 | 5825 | 0.12 | 0.12 | 2.22 | | | | | 8.45 | 30.00 | 2.50 | | Pass |
| HT20 | MCS0 | 2 | 149 | 5745 | 0.09 | 0.09 | 2.22 | | | | | 7.47 | 30.00 | 2.50 | | Pass |
| HT20 | MCS0 | 2 | 157 | 5785 | 0.09 | 0.09 | 2.22 | | | | | 7.34 | 30.00 | 2.50 | | Pass |
| HT20 | MCS0 | 2 | 165 | 5825 | 0.09 | 0.09 | 2.22 | | | | | 7.77 | 30.00 | 2.50 | | Pass |
| HT40 | MCS0 | 2 | 151 | 5755 | 0.18 | 0.18 | 2.22 | | | | | 3.81 | 30.00 | 2.50 | | Pass |
| HT40 | MCS0 | 2 | 159 | 5795 | 0.18 | 0.18 | 2.22 | | | | | 3.88 | 30.00 | 2.50 | | Pass |
| VHT80 | MCS0 | 2 | 155 | 5775 | 0.36 | 0.32 | 2.22 | | | | | -0.30 | 30.00 | 2.50 | | Pass |

TEST RESULTS DATA
Frequency Stability

| Band IV | | | | | | | | | | |
|---------|-----------|-----|-----|-------------|------------------------|---------------------------|---------------------------|------------------|-------------|------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Center Frequency (MHz) | Frequency Deviation (MHz) | Frequency Stability (ppm) | Temperature (°C) | Voltage (V) | Note |
| 11a | 6Mbps | 1 | 149 | 5745 | 5744.975 | -0.025 | -4.35 | 50 | 3.85 | |
| 11a | 6Mbps | 1 | 149 | 5745 | 5745.050 | 0.050 | 8.70 | -30 | 3.85 | |
| 11a | 6Mbps | 1 | 149 | 5745 | 5744.975 | -0.025 | -4.35 | 20 | 4.2 | |
| 11a | 6Mbps | 1 | 149 | 5745 | 5745.000 | 0.000 | 0.00 | 20 | 3.6 | |
| 11a | 6Mbps | 1 | 149 | 5745 | 5745.000 | 0.000 | 0.00 | 20 | 3.85 | |




Appendix B. AC Conducted Emission Test Results

| | | | |
|-----------------|------------|---------------------|---------|
| Test Engineer : | Shareef Yu | Temperature : | 26~27°C |
| | | Relative Humidity : | 58~62% |

EUT Information

Report NO : 740843
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

ENV216 Auto Test FCC Power Bar - L

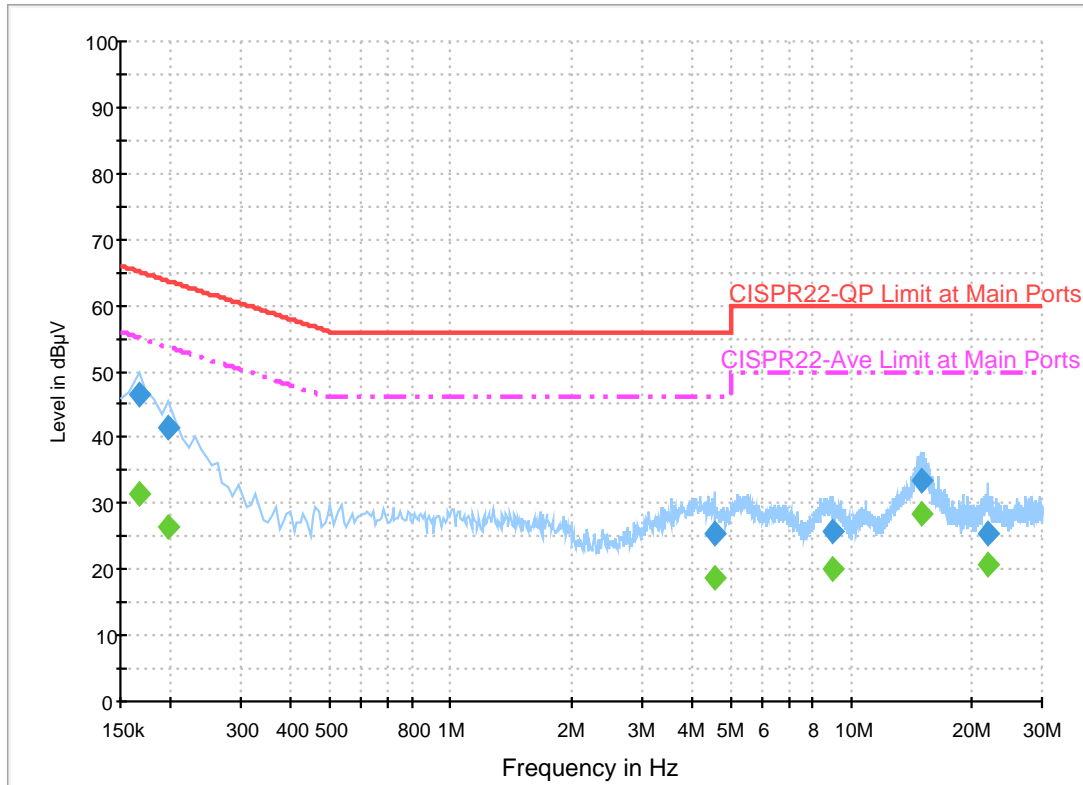

Final Result 1

| Frequency (MHz) | QuasiPeak (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|------------------|--------|------|------------|-------------|--------------|
| 0.166000 | 46.5 | Off | L1 | 19.6 | 18.7 | 65.2 |
| 0.198000 | 41.4 | Off | L1 | 19.6 | 22.3 | 63.7 |
| 4.590000 | 25.3 | Off | L1 | 19.7 | 30.7 | 56.0 |
| 9.022000 | 25.7 | Off | L1 | 20.0 | 34.3 | 60.0 |
| 15.006000 | 33.3 | Off | L1 | 20.3 | 26.7 | 60.0 |
| 21.910000 | 25.6 | Off | L1 | 20.7 | 34.4 | 60.0 |


Final Result 2

| Frequency (MHz) | Average (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.166000 | 31.3 | Off | L1 | 19.6 | 23.9 | 55.2 |
| 0.198000 | 26.3 | Off | L1 | 19.6 | 27.4 | 53.7 |
| 4.590000 | 18.9 | Off | L1 | 19.7 | 27.1 | 46.0 |
| 9.022000 | 20.2 | Off | L1 | 20.0 | 29.8 | 50.0 |
| 15.006000 | 28.5 | Off | L1 | 20.3 | 21.5 | 50.0 |
| 21.910000 | 20.7 | Off | L1 | 20.7 | 29.3 | 50.0 |

EUT Information

Report NO : 740843
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

ENV216 Auto Test FCC Power Bar - N

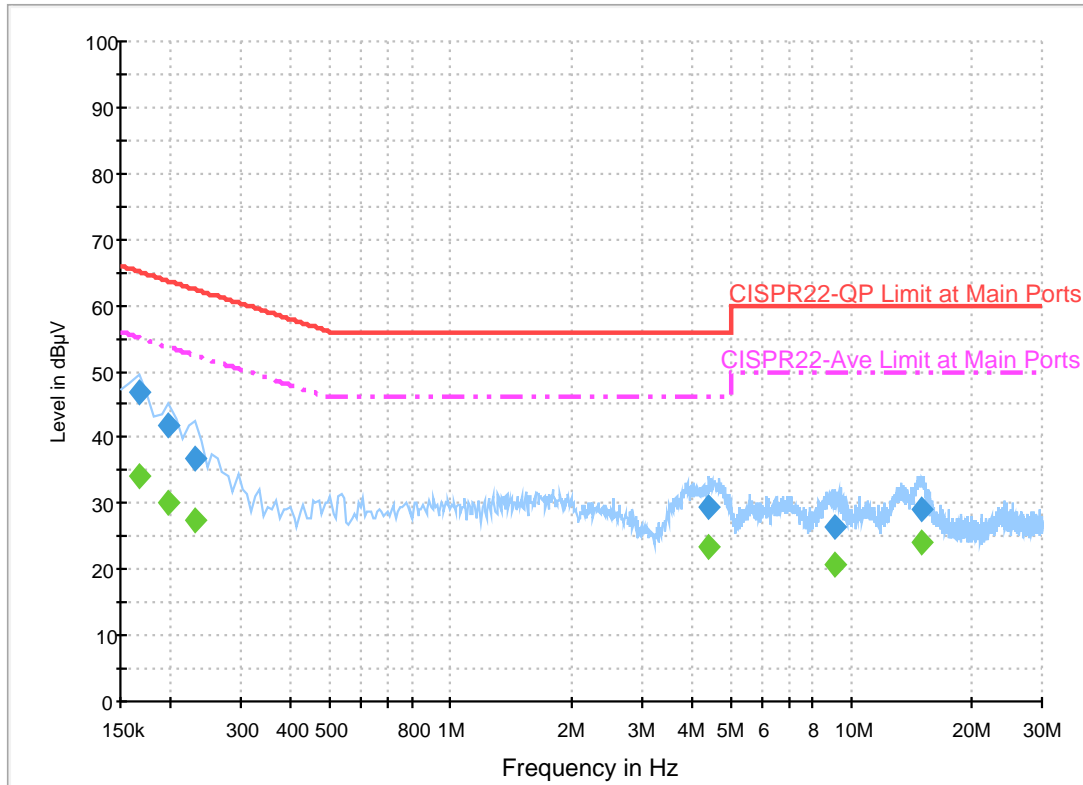

Final Result 1

| Frequency (MHz) | QuasiPeak (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|------------------|--------|------|------------|-------------|--------------|
| 0.166000 | 46.8 | Off | N | 19.5 | 18.4 | 65.2 |
| 0.198000 | 41.7 | Off | N | 19.5 | 22.0 | 63.7 |
| 0.230000 | 36.7 | Off | N | 19.5 | 25.7 | 62.4 |
| 4.438000 | 29.4 | Off | N | 19.7 | 26.6 | 56.0 |
| 9.110000 | 26.3 | Off | N | 20.0 | 33.7 | 60.0 |
| 15.086000 | 29.0 | Off | N | 20.4 | 31.0 | 60.0 |

Final Result 2

| Frequency (MHz) | Average (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.166000 | 34.2 | Off | N | 19.5 | 21.0 | 55.2 |
| 0.198000 | 30.0 | Off | N | 19.5 | 23.7 | 53.7 |
| 0.230000 | 27.3 | Off | N | 19.5 | 25.1 | 52.4 |
| 4.438000 | 23.3 | Off | N | 19.7 | 22.7 | 46.0 |
| 9.110000 | 20.7 | Off | N | 20.0 | 29.3 | 50.0 |
| 15.086000 | 24.1 | Off | N | 20.4 | 25.9 | 50.0 |



Appendix C. Radiated Spurious Emission

| | | | |
|-----------------|---|---------------------|-------------|
| Test Engineer : | Alex Jheng , Bill Chang , and Wilson Wu | Temperature : | 24.5~25.3°C |
| | | Relative Humidity : | 49~51% |

Band 4 - 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

| WIFI Ant. | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) | |
|-----------------------------|------|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|---|
| 802.11n HT20 CH 149 5745MHz | | 5628.2 | 49.76 | -18.44 | 68.2 | 40.19 | 32.52 | 7.72 | 30.67 | 225 | 294 | P | H | |
| | | 5700 | 61.03 | -44.17 | 105.2 | 51.35 | 32.59 | 7.79 | 30.7 | 225 | 294 | P | H | |
| | | 5719.4 | 72.59 | -38.04 | 110.63 | 62.87 | 32.62 | 7.81 | 30.71 | 225 | 294 | P | H | |
| | | 5723.4 | 84.87 | -33.68 | 118.55 | 75.15 | 32.62 | 7.81 | 30.71 | 225 | 294 | P | H | |
| | * | 5745 | 113.34 | - | - | 103.6 | 32.64 | 7.83 | 30.73 | 225 | 294 | P | H | |
| | * | 5745 | 105.73 | - | - | 95.99 | 32.64 | 7.83 | 30.73 | 225 | 294 | A | H | |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | 5617.4 | 50.21 | -17.99 | 68.2 | 40.66 | 32.52 | 7.7 | 30.67 | 100 | 271 | P | V |
| | | | 5699.6 | 59.21 | -45.7 | 104.91 | 49.53 | 32.59 | 7.79 | 30.7 | 100 | 271 | P | V |
| | | | 5719.8 | 69.56 | -41.18 | 110.74 | 59.84 | 32.62 | 7.81 | 30.71 | 100 | 271 | P | V |
| | | | 5722.6 | 81.74 | -34.99 | 116.73 | 72.02 | 32.62 | 7.81 | 30.71 | 100 | 271 | P | V |
| | * | | 5745 | 107.8 | - | - | 98.06 | 32.64 | 7.83 | 30.73 | 100 | 271 | P | V |
| | * | | 5745 | 100.61 | - | - | 90.87 | 32.64 | 7.83 | 30.73 | 100 | 271 | A | V |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |



| WIFI Ant. 1+2 | Note | Frequency (MHz) | Level (dBµV/m) | Over Limit (dB) | Limit Line (dBµV/m) | Read Level (dBµV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) | |
|--------------------------------------|------|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-----------------|------------|---|
| 802.11n HT20 CH 157 5785MHz | | 5644.4 | 49.38 | -18.82 | 68.2 | 39.8 | 32.54 | 7.72 | 30.68 | 231 | 294 | P | H | |
| | | 5696.4 | 52.09 | -50.46 | 102.55 | 42.43 | 32.59 | 7.77 | 30.7 | 231 | 294 | P | H | |
| | | 5719.6 | 54.24 | -56.45 | 110.69 | 44.52 | 32.62 | 7.81 | 30.71 | 231 | 294 | P | H | |
| | | 5721.6 | 55.35 | -59.1 | 114.45 | 45.63 | 32.62 | 7.81 | 30.71 | 231 | 294 | P | H | |
| | * | 5785 | 113.3 | - | - | 103.5 | 32.68 | 7.86 | 30.74 | 231 | 294 | P | H | |
| | * | 5785 | 105.93 | - | - | 96.13 | 32.68 | 7.86 | 30.74 | 231 | 294 | A | H | |
| | | 5854 | 53.48 | -59.6 | 113.08 | 43.61 | 32.76 | 7.88 | 30.77 | 231 | 294 | P | H | |
| | | 5855.6 | 54.82 | -55.81 | 110.63 | 44.95 | 32.76 | 7.88 | 30.77 | 231 | 294 | P | H | |
| | | 5876.8 | 51.9 | -51.96 | 103.86 | 42.02 | 32.78 | 7.88 | 30.78 | 231 | 294 | P | H | |
| | | 5925.4 | 49.4 | -18.8 | 68.2 | 39.49 | 32.83 | 7.89 | 30.81 | 231 | 294 | P | H | |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | 5637.2 | 48.89 | -19.31 | 68.2 | 39.3 | 32.54 | 7.72 | 30.67 | 100 | 271 | P | V |
| | | | 5688.8 | 48.92 | -48.02 | 96.94 | 39.26 | 32.59 | 7.77 | 30.7 | 100 | 271 | P | V |
| | | | 5709.8 | 52.17 | -55.78 | 107.95 | 42.47 | 32.61 | 7.79 | 30.7 | 100 | 271 | P | V |
| | | | 5723.2 | 49.1 | -69 | 118.1 | 39.38 | 32.62 | 7.81 | 30.71 | 100 | 271 | P | V |
| | * | | 5785 | 108.42 | - | - | 98.62 | 32.68 | 7.86 | 30.74 | 100 | 271 | P | V |
| | * | | 5785 | 100.74 | - | - | 90.94 | 32.68 | 7.86 | 30.74 | 100 | 271 | A | V |
| | | | 5853.4 | 48.88 | -65.57 | 114.45 | 39.03 | 32.74 | 7.88 | 30.77 | 100 | 271 | P | V |
| | | | 5859.4 | 48.5 | -61.07 | 109.57 | 38.63 | 32.76 | 7.88 | 30.77 | 100 | 271 | P | V |
| | | 5921.6 | 50.07 | -20.64 | 70.71 | 40.16 | 32.83 | 7.89 | 30.81 | 100 | 271 | P | V | |
| | | 5932.8 | 48.96 | -19.24 | 68.2 | 39.05 | 32.83 | 7.89 | 30.81 | 100 | 271 | P | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |



| WIFI Ant. 1+2 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) | |
|--------------------------------------|---|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|---|
| 802.11n HT20 CH 165 5825MHz | * | 5825 | 113.41 | - | - | 103.56 | 32.73 | 7.88 | 30.76 | 225 | 298 | P | H | |
| | * | 5825 | 106.22 | - | - | 96.37 | 32.73 | 7.88 | 30.76 | 225 | 298 | A | H | |
| | | 5852 | 79.82 | -37.82 | 117.64 | 69.97 | 32.74 | 7.88 | 30.77 | 225 | 298 | P | H | |
| | | 5856.6 | 78.77 | -31.58 | 110.35 | 68.9 | 32.76 | 7.88 | 30.77 | 225 | 298 | P | H | |
| | | 5877.6 | 62.85 | -40.42 | 103.27 | 52.97 | 32.78 | 7.88 | 30.78 | 225 | 298 | P | H | |
| | | 5926.8 | 50.16 | -18.04 | 68.2 | 40.25 | 32.83 | 7.89 | 30.81 | 225 | 298 | P | H | |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | * | 5825 | 108.74 | - | - | 98.89 | 32.73 | 7.88 | 30.76 | 100 | 256 | P | V | |
| | * | 5825 | 101.06 | - | - | 91.21 | 32.73 | 7.88 | 30.76 | 100 | 256 | A | V | |
| | | 5850.2 | 73.45 | -48.29 | 121.74 | 63.6 | 32.74 | 7.88 | 30.77 | 100 | 256 | P | V | |
| | | 5856.8 | 66.72 | -43.58 | 110.3 | 56.85 | 32.76 | 7.88 | 30.77 | 100 | 256 | P | V | |
| | | 5875.8 | 54.07 | -50.54 | 104.61 | 44.19 | 32.78 | 7.88 | 30.78 | 100 | 256 | P | V | |
| | | 5939.6 | 48.95 | -19.25 | 68.2 | 39.03 | 32.85 | 7.89 | 30.82 | 100 | 256 | P | V | |
| | | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | | |



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

| WIFI Ant. 1+2 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|-----------------------------|--|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|
| 802.11n HT20 CH 149 5745MHz | | 11490 | 46.74 | -27.26 | 74 | 60.41 | 39.91 | 11.3 | 65.39 | 100 | 0 | P | H |
| | | 17235 | 53.29 | -14.91 | 68.2 | 62.92 | 40.56 | 13.44 | 64.27 | 100 | 0 | P | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | 11490 | 46.84 | -27.16 | 74 | 60.51 | 39.91 | 11.3 | 65.39 | 100 | 0 | P | V |
| | | 17235 | 51.44 | -16.76 | 68.2 | 61.07 | 40.56 | 13.44 | 64.27 | 100 | 0 | P | V |
| | | | | | | | | | | | | | |
| 802.11n HT20 CH 157 5785MHz | | 11570 | 46.04 | -27.96 | 74 | 59.86 | 39.73 | 11.31 | 65.37 | 100 | 0 | P | H |
| | | 17355 | 50.64 | -17.56 | 68.2 | 59.76 | 40.84 | 13.52 | 64.11 | 100 | 0 | P | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | 11570 | 46.1 | -27.9 | 74 | 59.92 | 39.73 | 11.31 | 65.37 | 100 | 0 | P | V |
| | | 17355 | 50.09 | -18.11 | 68.2 | 59.21 | 40.84 | 13.52 | 64.11 | 100 | 0 | P | V |
| | | | | | | | | | | | | | |
| 802.11n HT20 CH 165 5825MHz | | 11650 | 46.59 | -27.41 | 74 | 60.51 | 39.57 | 11.34 | 65.34 | 100 | 0 | P | H |
| | | 17475 | 50.45 | -17.75 | 68.2 | 59.07 | 41.12 | 13.59 | 63.95 | 100 | 0 | P | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | 11650 | 47.67 | -26.33 | 74 | 61.59 | 39.57 | 11.34 | 65.34 | 100 | 0 | P | V |
| | | 17475 | 49.92 | -18.28 | 68.2 | 58.54 | 41.12 | 13.59 | 63.95 | 100 | 0 | P | V |
| | | | | | | | | | | | | | |
| Remark | 1. No other spurious found. | | | | | | | | | | | | |
| | 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

| WIFI Ant. 1+2 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|---------------|------|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|
| | | 5642.2 | 59.49 | -8.71 | 68.2 | 49.91 | 32.54 | 7.72 | 30.68 | 234 | 294 | P | H |
| | | 5698.6 | 73.03 | -31.14 | 104.17 | 63.37 | 32.59 | 7.77 | 30.7 | 234 | 294 | P | H |
| | | 5718 | 88.29 | -21.95 | 110.24 | 78.57 | 32.62 | 7.81 | 30.71 | 234 | 294 | P | H |
| | | 5724.8 | 88.89 | -32.85 | 121.74 | 79.17 | 32.62 | 7.81 | 30.71 | 234 | 294 | P | H |
| | * | 5755 | 110.48 | - | - | 100.71 | 32.66 | 7.84 | 30.73 | 234 | 294 | P | H |
| | * | 5755 | 103.56 | - | - | 93.79 | 32.66 | 7.84 | 30.73 | 234 | 294 | A | H |
| | | 5850.2 | 56.19 | -65.55 | 121.74 | 46.34 | 32.74 | 7.88 | 30.77 | 234 | 294 | P | H |
| | | 5862.6 | 57.08 | -51.59 | 108.67 | 47.22 | 32.76 | 7.88 | 30.78 | 234 | 294 | P | H |
| | | 5887.4 | 54.26 | -41.73 | 95.99 | 44.38 | 32.78 | 7.88 | 30.78 | 234 | 294 | P | H |
| | | 5925.8 | 50.29 | -17.91 | 68.2 | 40.38 | 32.83 | 7.89 | 30.81 | 234 | 294 | P | H |
| 802.11n | | | | | | | | | | | | | H |
| HT40 | | | | | | | | | | | | | H |
| CH 151 | | 5635.8 | 53.88 | -14.32 | 68.2 | 44.29 | 32.54 | 7.72 | 30.67 | 100 | 270 | P | V |
| 5755MHz | | 5695.6 | 65.5 | -36.46 | 101.96 | 55.84 | 32.59 | 7.77 | 30.7 | 100 | 270 | P | V |
| | | 5719.8 | 78.82 | -31.92 | 110.74 | 69.1 | 32.62 | 7.81 | 30.71 | 100 | 270 | P | V |
| | | 5723.2 | 81.83 | -36.27 | 118.1 | 72.11 | 32.62 | 7.81 | 30.71 | 100 | 270 | P | V |
| | * | 5755 | 105.28 | - | - | 95.51 | 32.66 | 7.84 | 30.73 | 100 | 270 | P | V |
| | * | 5755 | 98.14 | - | - | 88.37 | 32.66 | 7.84 | 30.73 | 100 | 270 | A | V |
| | | 5854 | 51.48 | -61.6 | 113.08 | 41.61 | 32.76 | 7.88 | 30.77 | 100 | 270 | P | V |
| | | 5869.4 | 50.77 | -56 | 106.77 | 40.91 | 32.76 | 7.88 | 30.78 | 100 | 270 | P | V |
| | | 5921.2 | 50.38 | -20.62 | 71 | 40.49 | 32.81 | 7.89 | 30.81 | 100 | 270 | P | V |
| | | 5936.8 | 48.79 | -19.41 | 68.2 | 38.88 | 32.83 | 7.89 | 30.81 | 100 | 270 | P | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |



| WIFI Ant. 1+2 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|---------------|---|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|
| | | 5625 | 51.69 | -16.51 | 68.2 | 42.14 | 32.52 | 7.7 | 30.67 | 228 | 298 | P | H |
| | | 5699 | 61.13 | -43.33 | 104.46 | 51.47 | 32.59 | 7.77 | 30.7 | 228 | 298 | P | H |
| | | 5716.2 | 64.8 | -44.94 | 109.74 | 55.11 | 32.61 | 7.79 | 30.71 | 228 | 298 | P | H |
| | | 5722.4 | 67.38 | -48.89 | 116.27 | 57.66 | 32.62 | 7.81 | 30.71 | 228 | 298 | P | H |
| | * | 5795 | 111.45 | - | - | 101.63 | 32.69 | 7.88 | 30.75 | 228 | 298 | P | H |
| | * | 5795 | 103.78 | - | - | 93.96 | 32.69 | 7.88 | 30.75 | 228 | 298 | A | H |
| | | 5850.4 | 75.17 | -46.12 | 121.29 | 65.32 | 32.74 | 7.88 | 30.77 | 228 | 298 | P | H |
| | | 5862.4 | 70.42 | -38.31 | 108.73 | 60.55 | 32.76 | 7.88 | 30.77 | 228 | 298 | P | H |
| | | 5882 | 63.79 | -36.21 | 100 | 53.91 | 32.78 | 7.88 | 30.78 | 228 | 298 | P | H |
| | | 5925.8 | 53.77 | -14.43 | 68.2 | 43.86 | 32.83 | 7.89 | 30.81 | 228 | 298 | P | H |
| 802.11n | | | | | | | | | | | | | H |
| HT40 | | | | | | | | | | | | | H |
| CH 159 | | 5633.8 | 50.09 | -18.11 | 68.2 | 40.5 | 32.54 | 7.72 | 30.67 | 100 | 269 | P | V |
| 5795MHz | | 5698.4 | 54.76 | -49.26 | 104.02 | 45.1 | 32.59 | 7.77 | 30.7 | 100 | 269 | P | V |
| | | 5717 | 59.07 | -50.89 | 109.96 | 49.38 | 32.61 | 7.79 | 30.71 | 100 | 269 | P | V |
| | | 5723 | 59.24 | -58.4 | 117.64 | 49.52 | 32.62 | 7.81 | 30.71 | 100 | 269 | P | V |
| | * | 5795 | 105.55 | - | - | 95.73 | 32.69 | 7.88 | 30.75 | 100 | 269 | P | V |
| | * | 5795 | 98.39 | - | - | 88.57 | 32.69 | 7.88 | 30.75 | 100 | 269 | A | V |
| | | 5850.6 | 61.6 | -59.23 | 120.83 | 51.75 | 32.74 | 7.88 | 30.77 | 100 | 269 | P | V |
| | | 5857.8 | 63.74 | -46.27 | 110.01 | 53.87 | 32.76 | 7.88 | 30.77 | 100 | 269 | P | V |
| | | 5881 | 56.71 | -44.03 | 100.74 | 46.83 | 32.78 | 7.88 | 30.78 | 100 | 269 | P | V |
| | | 5935.2 | 50.03 | -18.17 | 68.2 | 40.12 | 32.83 | 7.89 | 30.81 | 100 | 269 | P | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

| WIFI Ant. 1+2 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) | |
|--------------------------------------|---------------|---|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|---|
| | | 5640.8 | 64.91 | -3.29 | 68.2 | 55.33 | 32.54 | 7.72 | 30.68 | 230 | 293 | P | H | |
| | | 5682.8 | 78.65 | -13.86 | 92.51 | 69 | 32.57 | 7.77 | 30.69 | 230 | 293 | P | H | |
| | | 5717.2 | 83.03 | -26.99 | 110.02 | 73.34 | 32.61 | 7.79 | 30.71 | 230 | 293 | P | H | |
| | | 5724.2 | 83.72 | -36.66 | 120.38 | 74 | 32.62 | 7.81 | 30.71 | 230 | 293 | P | H | |
| | * | 5775 | 108.52 | - | - | 98.72 | 32.68 | 7.86 | 30.74 | 230 | 293 | P | H | |
| | * | 5775 | 100.88 | - | - | 91.08 | 32.68 | 7.86 | 30.74 | 230 | 293 | A | H | |
| | | 5851.4 | 79.66 | -39.35 | 119.01 | 69.81 | 32.74 | 7.88 | 30.77 | 230 | 293 | P | H | |
| | | 5867 | 80.31 | -27.13 | 107.44 | 70.45 | 32.76 | 7.88 | 30.78 | 230 | 293 | P | H | |
| | | 5881 | 71.43 | -29.31 | 100.74 | 61.55 | 32.78 | 7.88 | 30.78 | 230 | 293 | P | H | |
| | | 5926 | 60.02 | -8.18 | 68.2 | 50.11 | 32.83 | 7.89 | 30.81 | 230 | 293 | P | H | |
| 802.11ac VHT80 CH 155 5775MHz | | | | | | | | | | | | | H | |
| | | | | | | | | | | | | | H | |
| | | | 5638.4 | 56.74 | -11.46 | 68.2 | 47.16 | 32.54 | 7.72 | 30.68 | 100 | 242 | P | V |
| | | | 5699.4 | 71.78 | -32.98 | 104.76 | 62.12 | 32.59 | 7.77 | 30.7 | 100 | 242 | P | V |
| | | | 5720 | 75.29 | -35.51 | 110.8 | 65.57 | 32.62 | 7.81 | 30.71 | 100 | 242 | P | V |
| | | | 5721 | 76.98 | -36.1 | 113.08 | 67.26 | 32.62 | 7.81 | 30.71 | 100 | 242 | P | V |
| | | * | 5775 | 100.52 | - | - | 90.72 | 32.68 | 7.86 | 30.74 | 100 | 242 | P | V |
| | | * | 5775 | 93.25 | - | - | 83.45 | 32.68 | 7.86 | 30.74 | 100 | 242 | A | V |
| | | | 5854.2 | 71.58 | -41.04 | 112.62 | 61.71 | 32.76 | 7.88 | 30.77 | 100 | 242 | P | V |
| | | | 5856.6 | 74.42 | -35.93 | 110.35 | 64.55 | 32.76 | 7.88 | 30.77 | 100 | 242 | P | V |
| | | | 5876.2 | 67.05 | -37.26 | 104.31 | 57.17 | 32.78 | 7.88 | 30.78 | 100 | 242 | P | V |
| | | | 5939 | 52.81 | -15.39 | 68.2 | 42.89 | 32.85 | 7.89 | 30.82 | 100 | 242 | P | V |
| | | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | | V |
| | Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF @ 3m)

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. | |
|---------------------------------|--|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|---|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | | |
| 1+2 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) | |
| 5GHz 802.11ac VHT80 LF | | 103.17 | 27.22 | -16.28 | 43.5 | 44.82 | 13.55 | 1 | 32.29 | - | - | P | H | |
| | | 186.87 | 19.99 | -23.51 | 43.5 | 39.13 | 11.63 | 1.42 | 32.27 | - | - | P | H | |
| | | 217.38 | 22.13 | -23.87 | 46 | 40.95 | 11.88 | 1.48 | 32.25 | - | - | P | H | |
| | | 572.3 | 23.47 | -22.53 | 46 | 30.75 | 22.47 | 2.36 | 32.21 | - | - | P | H | |
| | | 804.7 | 27.58 | -18.42 | 46 | 31.62 | 25.03 | 2.78 | 31.97 | - | - | P | H | |
| | | 957.3 | 30.54 | -15.46 | 46 | 29.93 | 28.39 | 3.07 | 30.99 | 100 | 0 | P | H | |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | 39.99 | 27.52 | -12.48 | 40 | 44.69 | 14.41 | 0.74 | 32.33 | 100 | 0 | P | V |
| | | | 72.12 | 24.43 | -15.57 | 40 | 46.56 | 9.23 | 0.84 | 32.31 | - | - | P | V |
| | | | 102.36 | 23.84 | -19.66 | 43.5 | 41.44 | 13.55 | 1 | 32.29 | - | - | P | V |
| | | | 561.1 | 23.28 | -22.72 | 46 | 30.25 | 22.78 | 2.36 | 32.21 | - | - | P | V |
| | | | 759.2 | 27.67 | -18.33 | 46 | 31.72 | 25.2 | 2.71 | 32.06 | - | - | P | V |
| | | 954.5 | 30.73 | -15.27 | 46 | 30.34 | 28.21 | 3.06 | 31.02 | - | - | P | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| Remark | 1. No other spurious found. 2. All results are PASS against limit line. | | | | | | | | | | | | | |



Note symbol

| | |
|-----|--|
| * | Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. |
| ! | Test result is over limit line. |
| P/A | Peak or Average |
| H/V | Horizontal or Vertical |



A calculation example for radiated spurious emission is shown as below:

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|---------|------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| 1+2 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 802.11b | | 2390 | 55.45 | -18.55 | 74 | 54.51 | 32.22 | 4.58 | 35.86 | 103 | 308 | P | H |
| CH 01 | | | | | | | | | | | | | |
| 2412MHz | | 2390 | 43.54 | -10.46 | 54 | 42.6 | 32.22 | 4.58 | 35.86 | 103 | 308 | A | H |

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

| | | | |
|-----------------|---|---------------------|-------------|
| Test Engineer : | Alex Jheng , Bill Chang , and Wilson Wu | Temperature : | 24.5~25.3°C |
| | | Relative Humidity : | 49~51% |

Band 4 - 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

| WIFI | Band 4 5725~5850MHz Band Edge @ 3m | |
|-------------|--|---|
| ANT | 802.11n HT20 CH149 5745MHz | |
| 1+2 | Horizontal | Fundamental |
| Peak | <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 740843 Mode : 34 Power : 19</p> | <p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 740843 Mode : 34 Power : 19</p> |



| WIFI | Band 4 5725~5850MHz Band Edge @ 3m | |
|------|--|---|
| ANT | 802.11n HT20 CH149 5745MHz | |
| 1+2 | Vertical | Fundamental |
| Peak | <p> Date: 2017-09-14 PEAK: 125.20 </p> <p> Site : 03CH12-HY Condition : PEAK_BE(84)_16-24 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 740843 Mode : 34 Power : 19 </p> | <p> Date: 2017-09-14 PEAK: 125.20 </p> <p> Site : 03CH12-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 740843 Mode : 34 Power : 19 </p> |





| WIFI | Band 4 5725~5850MHz Band Edge @ 3m | |
|------|--|---|
| ANT | 802.11n HT20 CH157 5785MHz | |
| 1+2 | Horizontal | Fundamental |
| Peak | <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 740843 Mode : 35 Power : 19</p> | <p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 740843 Mode : 35 Power : 19</p> |
| Peak | <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 740843 Mode : 35 Power : 19</p> | Left blank |



| WIFI | Band 4 5725~5850MHz Band Edge @ 3m | |
|------|--|---|
| ANT | 802.11n HT20 CH157 5785MHz | |
| 1+2 | Vertical | Fundamental |
| Peak | <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 740843 Mode : 35 Power : 19</p> | <p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 740843 Mode : 35 Power : 19</p> |
| Peak | <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 740843 Mode : 35 Power : 19</p> | Left blank |

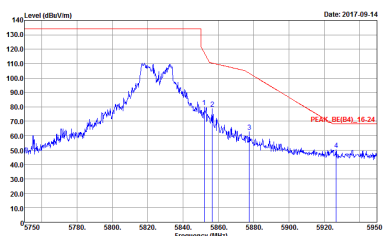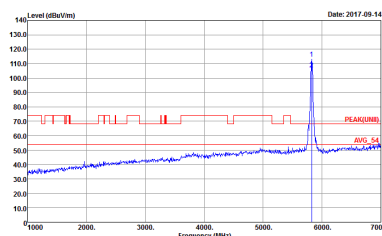

| WIFI | Band 4 5725~5850MHz Band Edge @ 3m | |
|--------------------|--|--|
| ANT | 802.11n HT20 CH165 5825MHz | |
| 1+2 | Horizontal | Fundamental |
| <p>Peak</p> |  <p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 740843 Mode : 36 Power : 19.5</p> |  <p>Site : 03CH12-HY Condition : PEAK(UNII) 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 740843 Mode : 36 Power : 19.5</p> |



| | | |
|------|--|---|
| WIFI | Band 4 5725~5850MHz Band Edge @ 3m | |
| ANT | 802.11n HT20 CH165 5825MHz | |
| 1+2 | Vertical | Fundamental |
| Peak | <p>Site : 03CH12-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 740843 Mode : 36 Power : 19.5</p> | <p>Site : 03CH12-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 740843 Mode : 36 Power : 19.5</p> |



**Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

| WIFI | Band 4 5725~5850MHz Band Edge @ 3m | |
|------|---|--|
| ANT | 802.11n HT40 CH151 5755MHz | |
| 1+2 | Horizontal | Fundamental |
| Peak | <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 740843 Mode : 37 Power : 18.5</p> | <p>Site : 03CH13-HY Condition : PEAK(UNIT) 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 740843 Mode : 37 Power : 18.5</p> |
| Peak | <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 740843 Mode : 37 Power : 18.5</p> | Left blank |



| WIFI | Band 4 5725~5850MHz Band Edge @ 3m | |
|------|--|---|
| ANT | 802.11n HT40 CH151 5755MHz | |
| 1+2 | Vertical | Fundamental |
| Peak | <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 740843 Mode : 37 Power : 18.5</p> | <p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 740843 Mode : 37 Power : 18.5</p> |
| Peak | <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 740843 Mode : 37 Power : 18.5</p> | Left blank |



| WIFI | Band 4 5725~5850MHz Band Edge @ 3m | |
|------|---|---|
| ANT | 802.11n HT40 CH159 5795MHz | |
| 1+2 | Horizontal | Fundamental |
| Peak | <p> Date: 2017-09-14 PEAK_BE(84)_15-20 Site : 03CH13-HY Condition : PEAK_BE(84)_16-24 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 740843 Mode : 38 Power : 18.5 </p> | <p> Date: 2017-09-14 PEAK(84)_15-20 Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 740843 Mode : 38 Power : 18.5 </p> |
| Peak | <p> Date: 2017-09-14 PEAK_BE(84)_15-24 Site : 03CH13-HY Condition : PEAK_BE(84)_16-24 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 740843 Mode : 38 Power : 18.5 </p> | Left blank |



| WIFI | Band 4 5725~5850MHz Band Edge @ 3m | |
|------|--|---|
| ANT | 802.11n HT40 CH159 5795MHz | |
| 1+2 | Vertical | Fundamental |
| Peak | <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 740843 Mode : 38 Power : 18.5</p> | <p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 740843 Mode : 38 Power : 18.5</p> |
| Peak | <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 740843 Mode : 38 Power : 18.5</p> | Left blank |



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

| WIFI | Band 4 5725~5850MHz Band Edge @ 3m | |
|------|--|---|
| ANT | 802.11ac VHT80 CH155 5775MHz | |
| 1+2 | Horizontal | Fundamental |
| Peak | <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 740843 Mode : 39 Power : 17.5</p> | <p>Site : 03CH13-HY Condition : PEAK(UM) 3m HORN_91200_1241 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 740843 Mode : 39 Power : 17.5</p> |
| Peak | <p>Site : 03CH13-HY Condition : PEAK_BE(B4)_16-24 3m HORN_91200_1241 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 740843 Mode : 39 Power : 17.5</p> | Left blank |





| WIFI | Band 4 5725~5850MHz Band Edge @ 3m | |
|------|--|---|
| ANT | 802.11ac VHT80 CH155 5775MHz | |
| 1+2 | Vertical | Fundamental |
| Peak | <p>Site : 03CH13-HY Condition : PEAK_BE(84)_16-24 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 740843 Mode : 39 Power : 17.5</p> | <p>Site : 03CH13-HY Condition : PEAK(UNII) 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 740843 Mode : 39 Power : 17.5</p> |
| Peak | <p>Site : 03CH13-HY Condition : PEAK_BE(84)_16-24 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 740843 Mode : 39 Power : 17.5</p> | Left blank |





Band 4 - 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

| | | |
|----------------------------|--|--|
| WIFI | Band 4 5725~5850MHz Harmonic @ 3m | |
| ANT | 802.11n HT20 CH149 5745MHz | |
| 1+2 | Horizontal | Vertical |
| Peak Avg. | <p>Site : 03CH13-HY Condition : PEAK(LINE) 3m SHF_HORN_584 HORIZONTAL Detector : Peak Project : 740843 Mode : 34</p> | <p>Site : 03CH13-HY Condition : PEAK(LINE) 3m SHF_HORN_584 VERTICAL Detector : Peak Project : 740843 Mode : 34</p> |

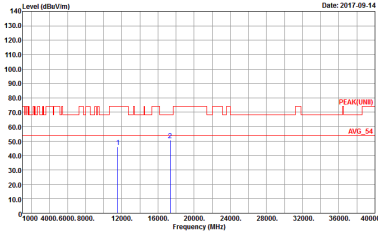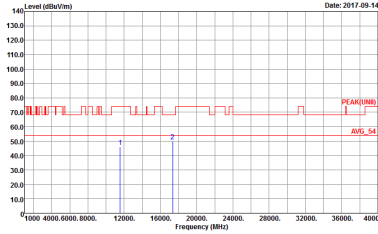

| | | |
|--------------|--|---|
| WIFI | Band 4 5725~5850MHz Harmonic @ 3m | |
| ANT | 802.11n HT20 CH157 5785MHz | |
| 1+2 | Horizontal | Vertical |
| Peak Avg. |  <p>Site : 03CH12-HY Condition : PEAK(UNID) 3m SHF_HORN_584 HORIZONTAL Detector : Peak Project : 740843 Mode : 35</p> |  <p>Site : 03CH12-HY Condition : PEAK(UNID) 3m SHF_HORN_584 VERTICAL Detector : Peak Project : 740843 Mode : 35</p> |

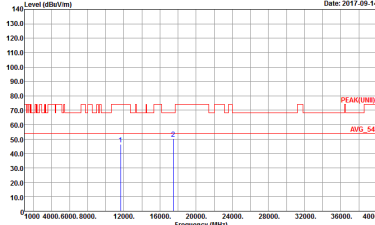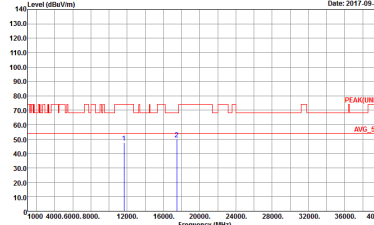

| | | |
|--------------|--|---|
| WIFI | Band 4 5725~5850MHz Harmonic @ 3m | |
| ANT | 802.11n HT20 CH165 5825MHz | |
| 1+2 | Horizontal | Vertical |
| Peak Avg. |  <p>Site : 03CH12-HY Condition : PEAK(UNID) 3m SHF_HORN_584 HORIZONTAL Detector : Peak Project : 740843 Mode : 3s</p> |  <p>Site : 03CH12-HY Condition : PEAK(UNID) 3m SHF_HORN_584 VERTICAL Detector : Peak Project : 740843 Mode : 3s</p> |



Emission below 1GHz
5GHz WIFI 802.11ac VHT80 (LF)

| | | |
|----------------------|--|--|
| WIFI | 5GHz 5725~5850MHz | |
| ANT | 802.11ac VHT80 LF | |
| 1+2 | Horizontal | Vertical |
| QP / Peak | <p>Site : 03CH13-HY Condition : QP 3m BTL0G_40103 HORIZONTAL Detector : Peak Project : 740843 Mode : -40</p> | <p>Site : 03CH13-HY Condition : QP 3m BTL0G_40103 VERTICAL Detector : Peak Project : 740843 Mode : -40</p> |




Appendix E. Duty Cycle Plots

| Antenna | Band | Duty Cycle(%) | T(us) | 1/T(kHz) | VBW Setting |
|---------|--------------------------------|---------------|---------|----------|-------------|
| 1+2 | 802.11a for Ant. 1 | 97.17 | 2060.00 | 0.49 | 1kHz |
| 1+2 | 802.11a for Ant. 2 | 97.17 | 2060.00 | 0.49 | 1kHz |
| 1+2 | 5GHz 802.11n HT20 for Ant. 1 | 97.97 | 1930.00 | 0.52 | 1kHz |
| 1+2 | 5GHz 802.11n HT20 for Ant. 2 | 97.97 | 1930.00 | 0.52 | 1kHz |
| 1+2 | 5GHz 802.11n HT40 for Ant. 1 | 95.96 | 950.00 | 1.05 | 3kHz |
| 1+2 | 5GHz 802.11n HT40 for Ant. 2 | 95.96 | 950.00 | 1.05 | 3kHz |
| 1+2 | 5GHz 802.11ac VHT80 for Ant. 1 | 92.00 | 460.00 | 2.17 | 3kHz |
| 1+2 | 5GHz 802.11ac VHT80 for Ant. 2 | 92.80 | 464.00 | 2.16 | 3kHz |




MIMO <Ant. 1>

802.11a

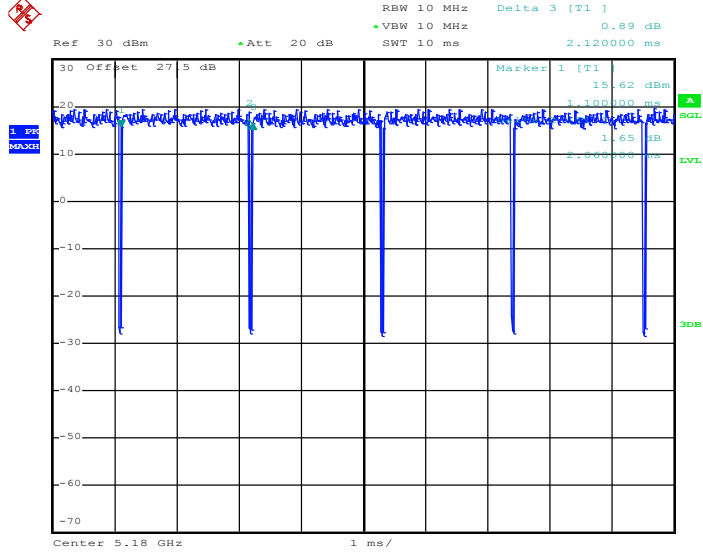

Date: 29.AUG.2017 23:51:21


802.11n HT20

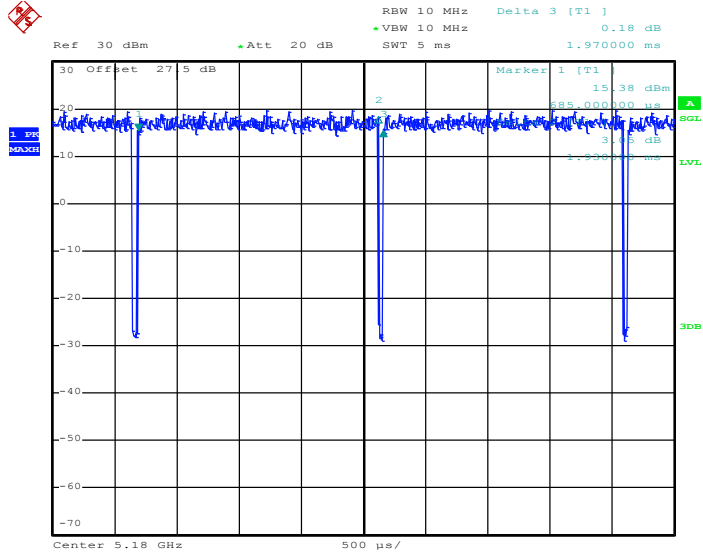

Date: 29.AUG.2017 23:59:09




802.11n HT40

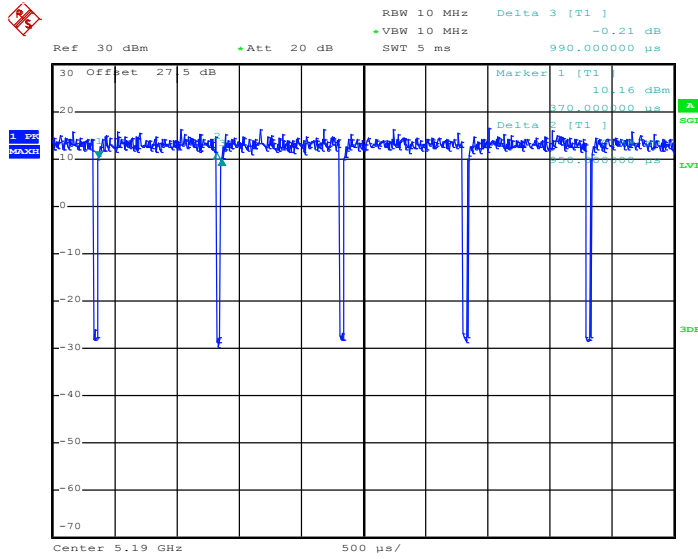

Date: 30.AUG.2017 00:06:52

802.11ac VHT80

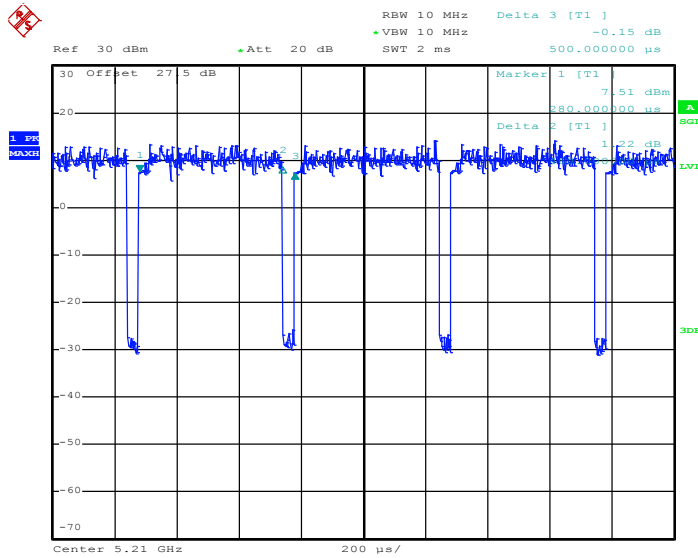


Date: 30.AUG.2017 00:28:28




MIMO <Ant. 2>

802.11a

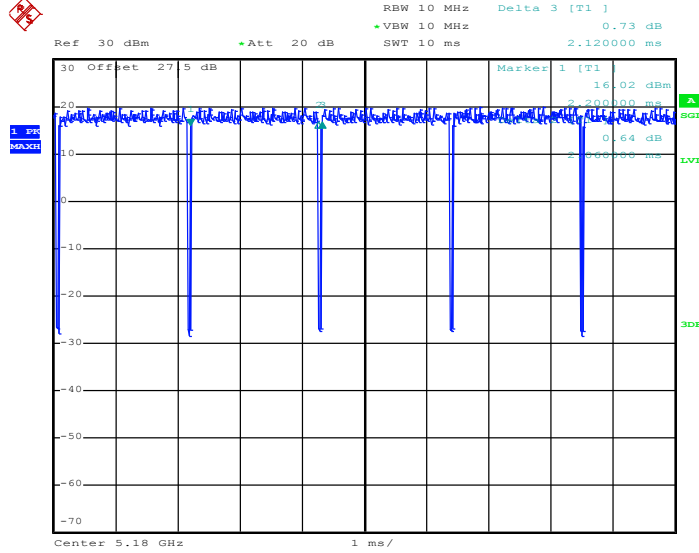

Date: 29.AUG.2017 23:52:08


802.11n HT20

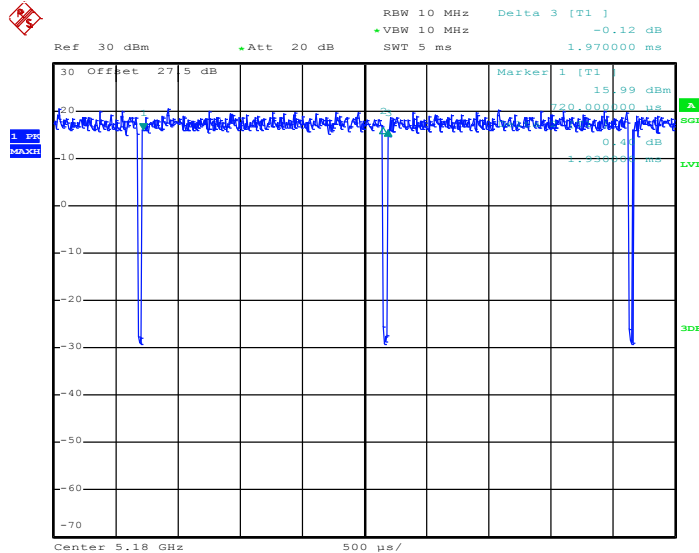

Date: 30.AUG.2017 00:00:20




802.11n HT40

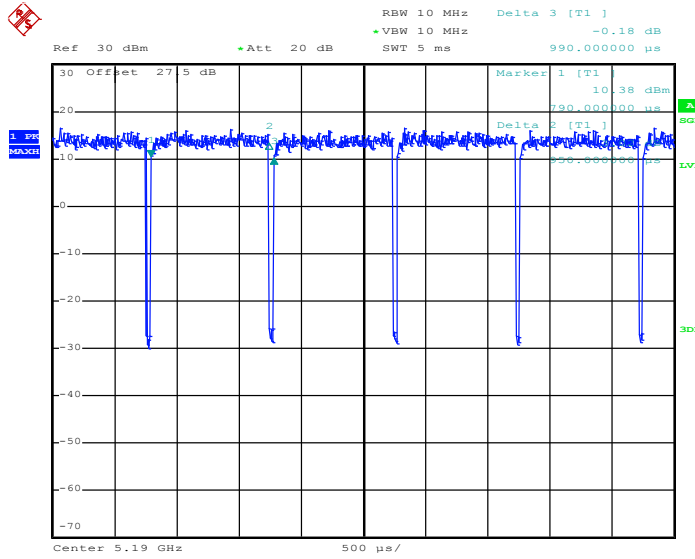

Date: 30.AUG.2017 00:07:54

802.11ac VHT80

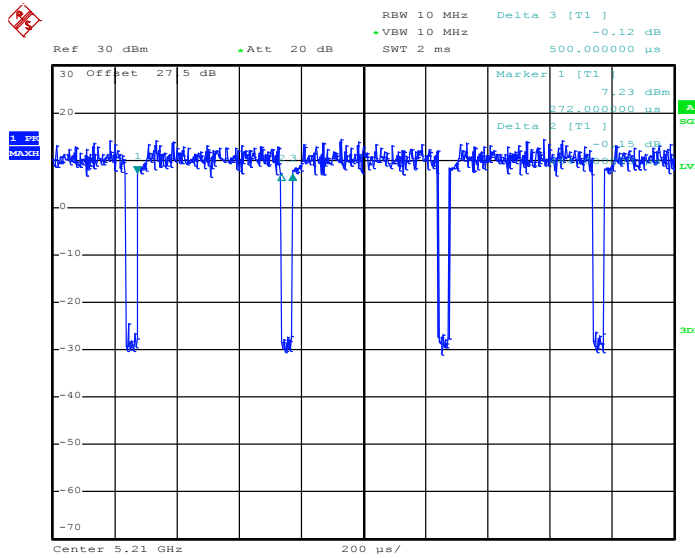

Date: 30.AUG.2017 00:29:10