



Phonecell[®] SX5D

Fixed Wireless F·A·X Phone



**Compact design for voice,
data, *FAX AND MULTIPLE
EXTENSIONS (F·A·X)***

- Voice
- GPRS Packet Data
- Circuit Switched Data
- Short Message Service (SMS)
- Group 3 Analog Fax
- Circuit Switched Computer Fax

Also Featuring

- ✓ Access the Internet and E-Mail
- ✓ Dual RJ-11 connections for multiple extensions
- ✓ Automatic end-of-dialing (no SEND key)
- ✓ Caller ID, call waiting/call hold, call forwarding
- ✓ Speakerphone
- ✓ Large, easy to read LCD
- ✓ PC keyboard can be attached for text messaging
- ✓ Easy set up

Models

- Dual Band 900/1800 GSM Phase 2+
- Dual Band 850/1900 GSM Phase 2+

Phonecell® SX5D


Fixed Wireless F-A-X Phone



Features

- GPRS packet data, multi-slot Class 10 (up to 85.6 kbps)*
- Circuit switched digital computer fax and data (up to 14.4 kbps)*
- Short Message Service (SMS)*
- Group 3 analog fax*
- Compatible with popular supplementary services including caller ID, call waiting/call hold, call forwarding, call barring, multi-party calling, and more*
- DTMF keypad with half duplex speakerphone, mute, redial and flash
- Fully pixilated LCD display for text messaging, phone book, set up, signal-strength indication, etc.
- Soft key access to menu, voice mail, SMS and phone book
- Speed dial
- Volume control and configurable rings per service
- Call logs, clock and call timer
- Extensive security control features
- Built-in signal-strength indication
- Single jack or dual jack for voice and fax operation
- DTMF and pulse-dialing
- Automatic end-of-dialing (no SEND key)
- Supports up to five phones (5 REN)
- Emergency battery backup
- Simple desktop or wall-mount installation
- Standard GSM Mini-SIM (Subscriber Identification Module) 3 volt and 5 volt compatible
- Supports SIM Application Toolkit
- Supports GSM personalization features (GSM 02.22)

Connectivity Options

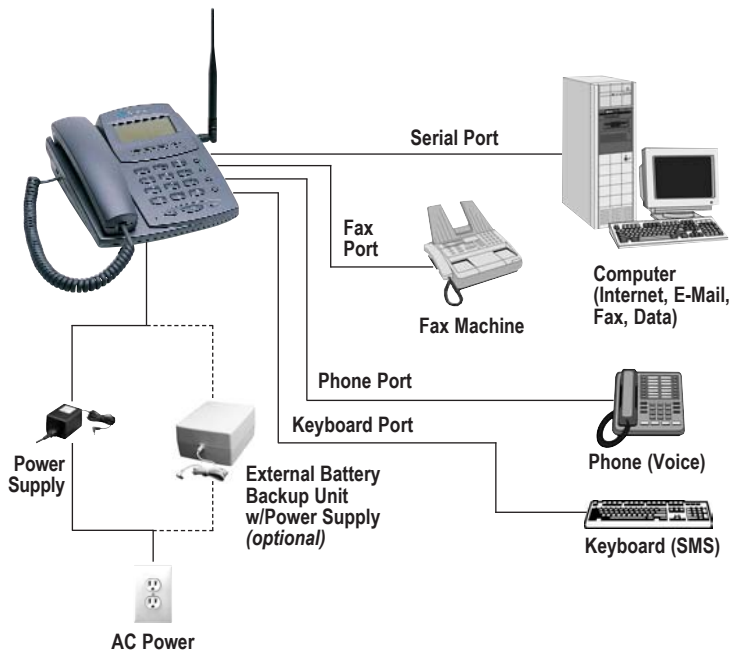

* Subject to network availability.

Models

- Dual Band 900/1800 GSM Phase 2+
- Dual Band 850/1900 GSM Phase 2+

Specifications

Air Interface Standard

- GSM 900/1800 Phase 2+
- GSM 850/1900 TIA/EIA J-STD-007

Transmit Power

- GSM 850 & 900: 2 watts
- GSM 1800 & 1900: 1 watt

Frequency Ranges

	Transmit	Receive
• GSM 850	824-849 MHz	869-894 MHz
• GSM 900	890-915 MHz	935-960 MHz
• GSM 1800	1710-1785 MHz	1805-1880 MHz
• GSM 1900	1850-1910 MHz	1930-1990 MHz

FWT Dimensions and Weight

- Metric (cm) 18.3 x 5.1 x 21.1
- U.S. (inches) 7.2 x 2.0 x 8.3
- 0.73 kg. (1.6 lb.)

Environment

- Operating temperature range: -10°C to +50°C
- Storage temperature range: -40°C to +60°C
- Humidity: 5% to 95%

Intelligent RJ-11 Interface

- Ringer equivalence number (REN) 5.0A
- Dynamic echo cancellation
- PSTN Emulation

LCD Display

- Resolution: 64 pixels high x 132 pixels long
- Characters: Icons and alphanumeric
- Adjustable contrast

Connectors

- RJ-11 interface jack for telephone
- RJ-11 interface jack for Group 3 analog fax
- DB-9 port for GPRS or circuit switched digital PC fax/data
- DIN connector for PC keyboard
- TNC antenna connector (50 ohms)
- DC power input jack

Antenna

- Dipole antenna (included)
 - GSM 900/1800: 2 dBi dual band
 - GSM 850/1900: 2 dBi dual band
- Optional higher gain antennas available

AC-to-DC Switching Power Supply (Included)

- Voltage: 90 - 300 VAC
- Frequency: 50/60 Hz
- Plug options: U.S., U.K., Euro., Australia

Emergency Battery Backup

- 4 "AA" alkaline batteries provide up to 1 hour of air time. (Batteries not included.)

External Battery Backup (Optional)

- External battery backup unit/charger (provides up to 8 hours of air time or 14 hours of standby)

Telular Corporation • Corporate Headquarters • 647 North Lakeview Parkway • Vernon Hills, Illinois 60061 USA
 Phone: 847-247-9400 • Fax: 847-247-0021 • E-mail: sales@telular.com • http://www.telular.com
 Europe/Middle East/Africa • Phone: +44-1753-486-500 • uk@telular.com
 Latin America • Phone: +1-954-217-0522 • miami@telular.com
 Asia/Pacific • Phone: +65-6735-7728 • singapore@telular.com