

FCC TEST REPORT (15.407)

REPORT NO.: RF951023L03

MODEL NO.: BW1180 (Refer to page 6 for more info)

RECEIVED: Oct. 02, 2006

TESTED: Oct. 02 ~ Oct. 27, 2006

ISSUED: Oct. 30, 2006

APPLICANT: Gemtek Technology Co., Ltd.

ADDRESS: No.1, Jen Ai Road, Hsinchu Industrial Park,
Hukou Hsinchu, Taiwan, R.O.C. 303

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 54 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.4	DESCRIPTION OF SUPPORT UNITS	11
4.	TEST TYPES AND RESULTS	12
4.1	CONDUCTED EMISSION MEASUREMENT	12
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	12
4.1.2	TEST INSTRUMENTS	12
4.1.3	TEST PROCEDURES	13
4.1.4	DEVIATION FROM TEST STANDARD	13
4.1.5	TEST SETUP	14
4.1.6	EUT OPERATING CONDITIONS	14
4.1.7	TEST RESULTS	15
4.2	RADIATED EMISSION MEASUREMENT	19
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	19
4.2.2	LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS.....	20
4.2.3	TEST INSTRUMENTS	21
4.2.4	TEST PROCEDURES	22
4.2.5	DEVIATION FROM TEST STANDARD	22
4.2.6	TEST SETUP	23
4.2.7	EUT OPERATING CONDITION	23
4.2.8	TEST RESULTS	24
4.3	PEAK TRANSMIT POWER MEASUREMENT	30
4.3.1	LIMITS OF PEAK TRANSMIT POWER MEASUREMENT.....	30
4.3.2	TEST INSTRUMENTS	30
4.3.3	TEST PROCEDURE	31
4.3.4	DEVIATION FROM TEST STANDARD	31
4.3.5	TEST SETUP	31
4.3.6	EUT OPERATING CONDITIONS	31
4.3.7	TEST RESULTS	32
4.4	PEAK POWER EXCURSION MEASUREMENT	36
4.4.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT.....	36
4.4.2	TEST INSTRUMENTS	36
4.4.3	TEST PROCEDURE	37
4.4.4	DEVIATION FROM TEST STANDARD	37
4.4.5	TEST SETUP	37
4.4.6	EUT OPERATING CONDITIONS	37
4.4.7	TEST RESULTS	38
4.5	PEAK POWER SPECTRAL DENSITY MEASUREMENT	40
4.5.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT.....	40

4.5.2	TEST INSTRUMENTS	40
4.5.3	TEST PROCEDURES	41
4.5.4	DEVIATION FROM TEST STANDARD	41
4.5.5	TEST SETUP	41
4.5.6	EUT OPERATING CONDITIONS	41
4.5.7	TEST RESULTS	42
4.6	FREQUENCY STABILITY	44
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	44
4.6.2	TEST INSTRUMENTS	44
4.6.3	TEST PROCEDURE	44
4.6.4	DEVIATION FROM TEST STANDARD	45
4.6.5	TEST SETUP	45
4.6.6	EUT OPERATING CONDITION	45
4.6.7	TEST RESULTS	46
4.7	BAND EDGES MEASUREMENT	47
4.7.1	TEST INSTRUMENTS	47
4.7.2	TEST PROCEDURE	47
4.7.3	EUT OPERATING CONDITION	47
4.7.4	TEST RESULTS	47
4.8	ANTENNA REQUIREMENT	52
4.8.1	STANDARD APPLICABLE	52
4.8.2	ANTENNA CONNECTED CONSTRUCTION	52
5.	INFORMATION ON THE TESTING LABORATORIES	53
APPENDIX-A	A-1

1. CERTIFICATION

PRODUCT: MOBILE MESH NETWORK SUBSCRIBER UNIT (MMSU)
(Refer to page 6 for more info)

MODEL: BW1180 (Refer to page 6 for more info)

BRAND: BROWAN (Refer to page 6 for more info)

APPLICANT: Gemtek Technology Co., Ltd.

TEST SAMPLE: ENGINEERING SAMPLE

TESTED: Oct. 02 ~ Oct. 27, 2006

STANDARDS: FCC Part 15, Subpart E (Section 15.407)
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , **DATE:** Oct. 30, 2006
Andrea Hsia

TECHNICAL
ACCEPTANCE : Long Chen , **DATE:** Oct. 30, 2006
Responsible for RF Long Chen

APPROVED BY : Gary Chang , **DATE:** Oct. 30, 2006
Gary Chang / Supervisor

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart E (Section 15.407)			
Standard Section	Test Type	Result	Remark
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.06dB at 0.189MHz
15.407(b)(1/2/3) (b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit. Minimum passing margin is -1.25dB at 900.82MHz
15.407(a)(1/2/3)	Peak Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.62 dB
	200MHz ~ 1000MHz	3.64 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	MOBILE MESH NETWORK SUBSCRIBER UNIT (MMSU)
MODEL	BW1180
FCC ID	MXF-A950927AG
POWER SUPPLY	5Vdc from host equipment or AC Adapter
MODULATION TYPE	BPSK,QBSK,16-QAM
MODULATION TECHNOLOGY	OFDM
TRANSFER RATE	802.11g: 24/12/6Mbps 802.11a: 24/12/6Mbps
FREQUENCY RANGE	802.11g: 2.412 ~ 2.462GHz 802.11a: 5.150 ~ 5.250GHz , 5.745 ~ 5.805GHz
NUMBER OF CHANNEL	802.11g: 11 802.11a: 8
CHANNEL SPACING	802.11g: 5MHz 802.11a: 20MHz
OUTPUT POWER	56.754mW for 802.11g 40.458mW for 5.150 ~ 5.250GHz 36.058mW for 5.745 ~ 5.805GHz
ANTENNA TYPE	Integrated antenna with 1.8dBi gain
DATA CABLE	1.03m shielded USB cable without core 1.00m shielded USB cable with one core 1.8m RJ45 cable
I/O PORTS	USB, RJ45
ASSOCIATED DEVICES	NA

NOTE:

1. The structure of all the models are exactly same, the only difference are shown as below:

PRODUCT NAME	MODEL	BRAND
MOBILE MESH NETWORK SUBSCRIBER UNIT (MMSU)	BW1180	BROWAN
SONmetro A230 Pocket Modem	A230	Packet ONE
ODMA Subscriber Unit	PARROT 212B	IWICS

2. The EUT was powered by the following adapter:

Brand:	UNIFIVE
Model:	US300520
Input:	100 ~ 240Vdc, 50/60Hz, 0.3A
Output:	5Vdc, 2A
Power Line:	DC 1.8m non-shielded cable without core

3. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11g technology.
4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES


Operated in 5150 ~ 5250MHz

4 channels are provided to this EUT.


CHANNEL	FREQUENCY
1	5180 MHz
2	5200 MHz
3	5220 MHz
4	5240 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST


Test Mode A

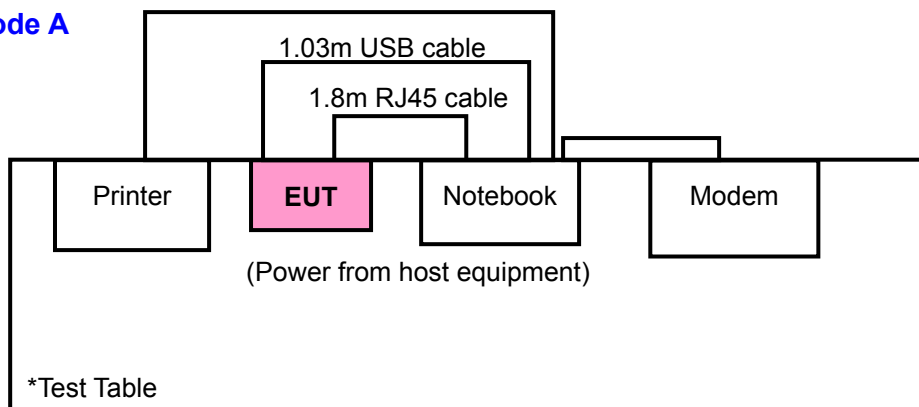

Test Mode B

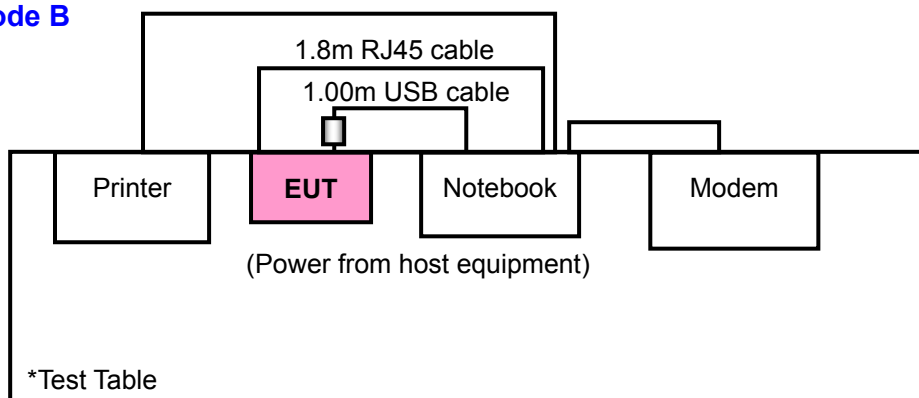

Test Mode C

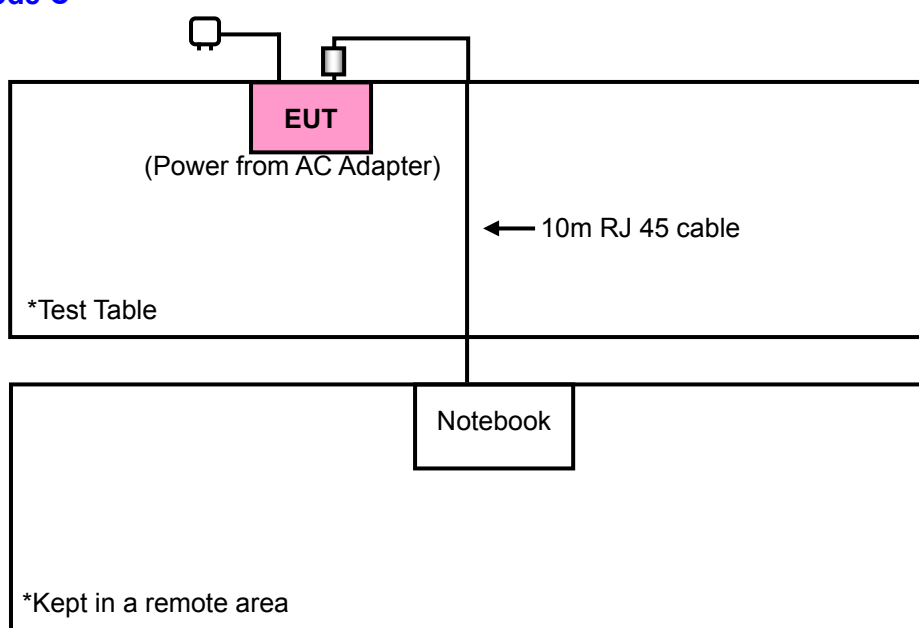

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE<1G	RE≥1G	APCM	
A	√	√	√	√	Powered by host via 1.03m USB cable without core
B	-	√	-	-	Powered by host via 1.00m USB cable with one core
C	√	√	-	-	Powered by AC Adapter

Where **PLC**: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

NOTE: “-” means no effect.

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	1 to 4	1	OFDM	BPSK	6
C	802.11a	1 to 4	1	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	1 to 4	1	OFDM	BPSK	6
B	802.11a	1 to 4	1	OFDM	BPSK	6
C	802.11a	1 to 4	1	OFDM	BPSK	6

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	1 to 4	1, 2, 4	OFDM	BPSK	6

Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	1 to 4	1, 4	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	1 to 4	1, 2, 4	OFDM	BPSK	6

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	20838027664	E2K24CLNS
2	PRINTER	EPSON	LQ-300+	DCGY054146	FCC DoC Approved
3	MODEM	ACEEX	1414V/3	0401008260	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m shielded without core
3	1.2m shielded without core

NOTE: 1. All power cords of the above support units are non shielded (1.8m).
2. For mode C Item 1 act as a communication partner to transfer data.

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 02, 2006
RF signal cable Woken	5D-FB	Cable-HYCO3-01	Jan. 06, 2007
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 09, 2007
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 22, 2007
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

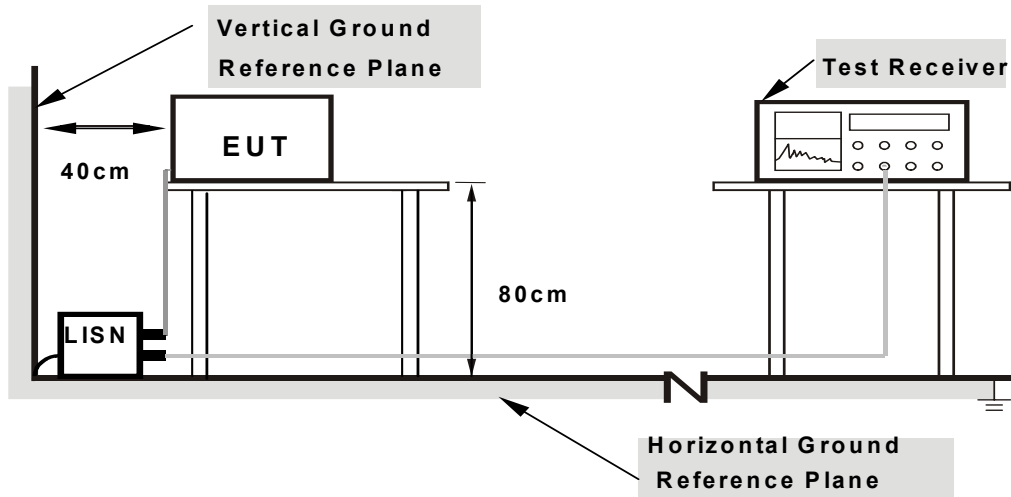

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

Test Mode A:

- a. Connected the EUT to Notebook with USB cable and placed on a testing table.
- b. The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The notebook system sent "H" messages to its screen.
- d. The notebook system sent "H" messages to modem.
- e. The notebook system sent "H" messages to printer, and the printer printed them on paper.
- f. Steps c ~ e were repeated.

Test Mode C:

- a. Connected the EUT to Notebook with RJ 45 cable and placed on a testing table.
- b. The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The notebook system sent "H" messages to its screen.


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	A
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.10	42.83	-	42.93	-	65.38	55.38	-22.45	-
2	0.248	0.10	40.79	-	40.89	-	61.84	51.84	-20.95	-
3	0.349	0.10	36.63	-	36.73	-	58.98	48.98	-22.25	-
4	0.455	0.10	30.81	-	30.91	-	56.78	46.78	-25.87	-
5	0.701	0.10	32.81	-	32.91	-	56.00	46.00	-23.09	-
6	10.191	0.37	39.52	-	39.89	-	60.00	50.00	-20.11	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

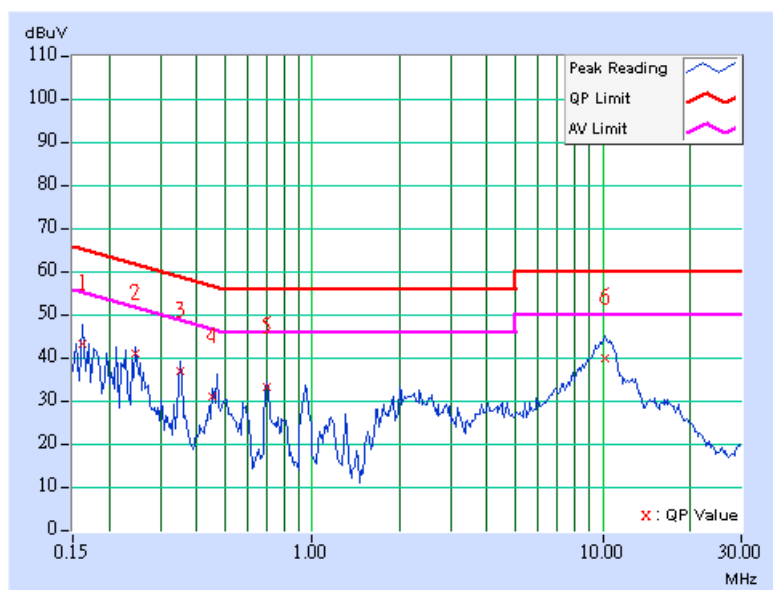

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	A
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.10	43.99	-	44.09	-	65.79	55.79	-21.70	-
2	0.248	0.10	40.47	-	40.57	-	61.84	51.84	-21.27	-
3	0.354	0.10	36.88	-	36.98	-	58.87	48.87	-21.89	-
4	0.459	0.11	29.62	-	29.73	-	56.72	46.72	-26.99	-
5	0.709	0.15	32.14	-	32.29	-	56.00	46.00	-23.71	-
6	10.188	0.47	38.78	-	39.25	-	60.00	50.00	-20.75	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

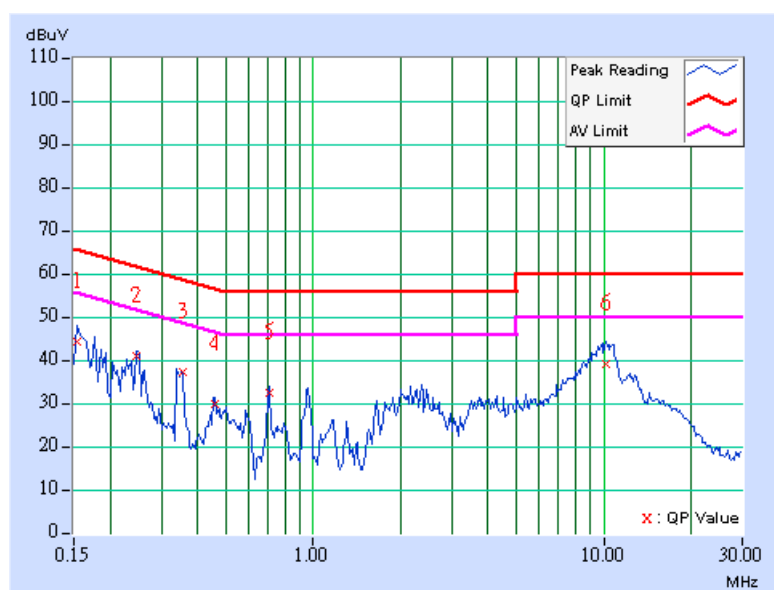

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	C
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.10	50.35	-	50.45	-	64.08	54.08	-13.63	-
2	0.252	0.10	45.47	-	45.57	-	61.71	51.71	-16.14	-
3	0.380	0.10	41.11	-	41.21	-	58.27	48.27	-17.06	-
4	0.951	0.10	34.41	-	34.51	-	56.00	46.00	-21.49	-
5	2.789	0.27	31.67	-	31.94	-	56.00	46.00	-24.06	-
6	6.066	0.37	34.97	-	35.34	-	60.00	50.00	-24.66	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

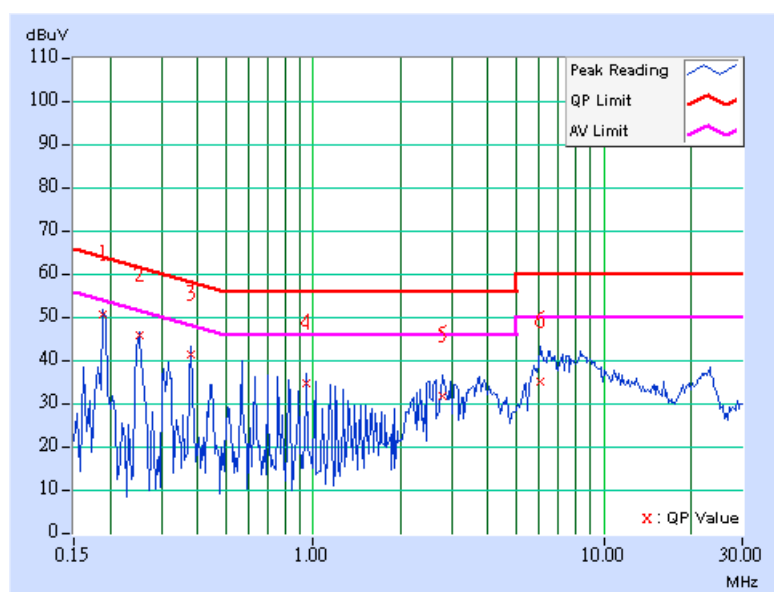

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	C
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.10	50.91	-	51.01	-	64.07	54.07	-13.06	-
2	0.252	0.10	44.91	-	45.01	-	61.71	51.71	-16.70	-
3	0.314	0.10	41.18	-	41.28	-	59.86	49.86	-18.58	-
4	0.818	0.17	34.04	-	34.21	-	56.00	46.00	-21.79	-
5	2.715	0.26	33.60	-	33.86	-	56.00	46.00	-22.14	-
6	6.328	0.40	32.55	-	32.95	-	60.00	50.00	-27.05	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

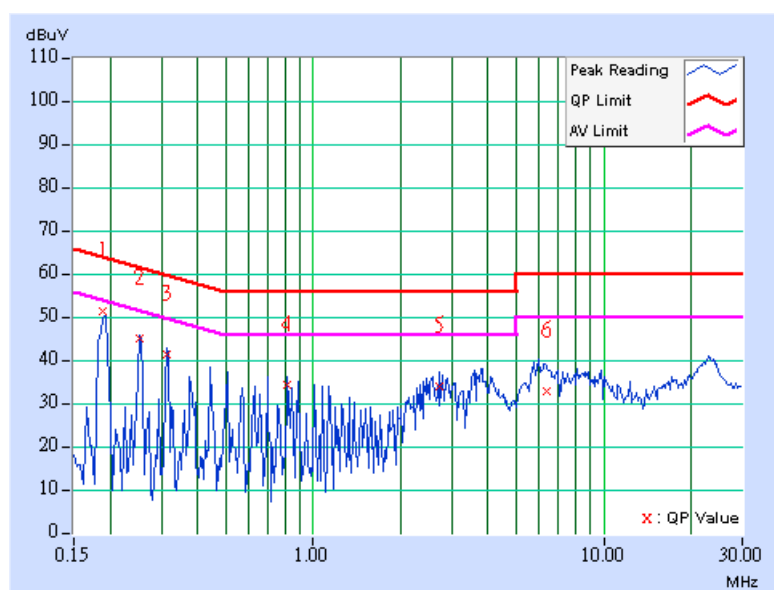

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m) *note 3
5150~5250	-27	68.3
5250~5350	-27	68.3
5725~5825	-27 *note 1	68.3
	-17 *note 2	78.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

4.2.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Jan. 01, 2007
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Dec. 04, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Jan. 15, 2007
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Jan. 01, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 19, 2007
Preamplifier Agilent	8449B	3008A01960	Nov. 09, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219268/4	Dec. 20, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	230129/4	Dec. 20, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA
Turn Table ADT.	TT100.	TT93021704	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA
26GHz ~ 40GHz Amplifier	AMF-6F-2600400	900619	Nov. 13, 2006

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 4.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-4.

4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.2.5 DEVIATION FROM TEST STANDARD

No deviation

4.2.6 TEST SETUP

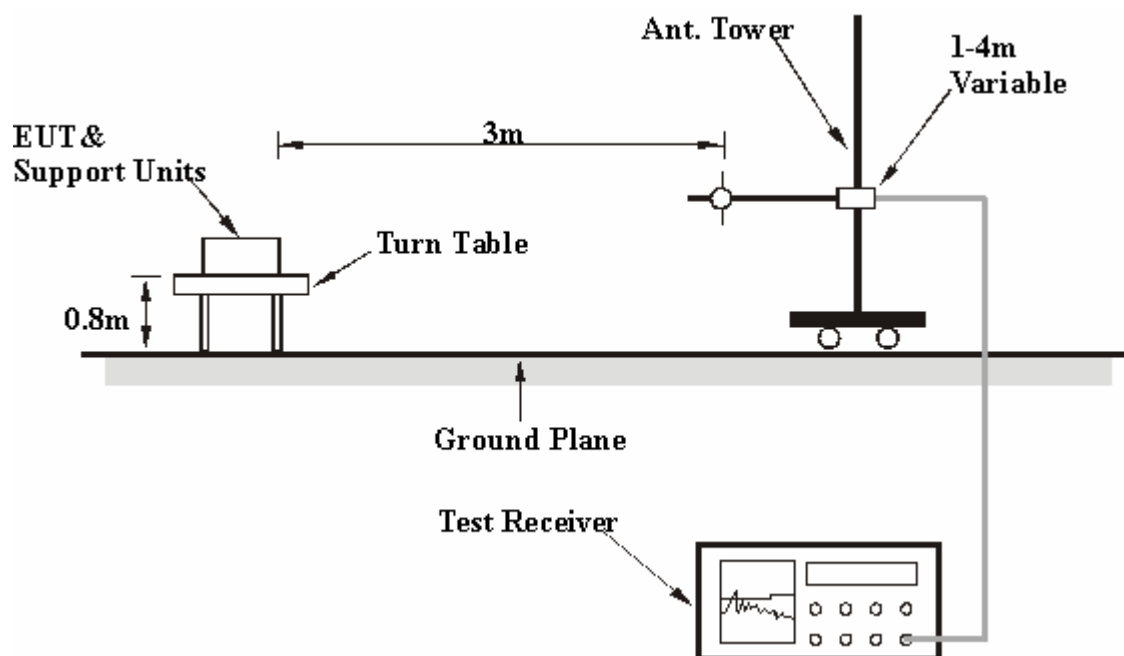

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.7 EUT OPERATING CONDITION

Same as 4.1.6

4.2.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	A
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	267.22	40.50 QP	46.00	-5.50	1.50 H	201	26.86	13.64
2	712.36	42.72 QP	46.00	-3.28	1.00 H	136	18.18	24.54
3	799.84	39.72 QP	46.00	-6.28	1.25 H	165	13.61	26.11
4	858.18	39.82 QP	46.00	-6.18	1.50 H	234	12.96	26.86
5	900.81	44.70 QP	46.00	-1.30	1.50 H	192	17.21	27.49
6	933.94	42.88 QP	46.00	-3.12	1.25 H	126	13.84	29.04

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.82	36.96 QP	40.00	-3.04	1.00 V	84	23.10	13.86
2	249.79	36.96 QP	46.00	-9.04	1.50 V	121	24.53	12.43
3	500.48	35.71 QP	46.00	-10.29	1.25 V	187	15.76	19.95
4	799.82	37.62 QP	46.00	-8.38	1.25 V	313	11.51	26.11
5	900.80	44.64 QP	46.00	-1.36	1.00 V	136	17.15	27.49
6	933.95	43.18 QP	46.00	-2.82	1.00 V	296	14.14	29.04

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	B
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	267.23	36.26 QP	46.00	-9.74	1.25 H	218	22.61	13.65
2	688.90	44.46 QP	46.00	-1.54	1.25 H	326	20.55	23.91
3	799.84	38.74 QP	46.00	-7.26	1.25 H	172	12.63	26.11
4	867.91	40.73 QP	46.00	-5.27	1.25 H	142	13.74	26.99
5	900.75	44.46 QP	46.00	-1.54	1.25 H	175	16.97	27.49
6	933.84	42.36 QP	46.00	-3.64	1.50 H	101	13.33	29.03

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.85	37.10 QP	40.00	-2.90	1.00 V	103	23.23	13.87
2	249.61	36.95 QP	46.00	-9.05	1.50 V	167	24.52	12.43
3	599.64	33.49 QP	46.00	-12.51	1.25 V	203	10.95	22.54
4	799.84	37.26 QP	46.00	-8.74	1.25 V	34	11.15	26.11
5	900.70	44.66 QP	46.00	-1.34	1.00 V	224	17.18	27.48
6	933.85	41.71 QP	46.00	-4.29	1.25 V	20	12.68	29.03

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Quasi-Peak
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TEST MODE	C
TESTED BY	Brad Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	249.71	37.35 QP	46.00	-8.65	1.50 H	121	24.92	12.43
2	399.38	32.64 QP	46.00	-13.36	1.00 H	224	14.86	17.78
3	751.26	43.15 QP	46.00	-2.85	1.25 H	76	17.36	25.79
4	867.88	41.25 QP	46.00	-4.75	1.25 H	74	14.26	26.99
5	933.96	44.73 QP	46.00	-1.27	1.50 H	115	15.69	29.04
6	949.54	40.15 QP	46.00	-5.85	1.00 H	56	10.38	29.77

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	55.42	38.68 QP	40.00	-1.32	1.00 V	95	24.78	13.90
2	249.75	34.46 QP	46.00	-11.54	1.50 V	68	22.03	12.43
3	799.72	38.81 QP	46.00	-7.19	1.25 V	100	12.70	26.11
4	867.88	40.24 QP	46.00	-5.76	1.00 V	26	13.25	26.99
5	900.82	44.75 QP	46.00	-1.25	1.25 V	32	17.26	27.49
6	933.95	44.74 QP	46.00	-1.26	1.00 V	64	15.70	29.04

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

802.11a OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1200.00	51.66 PK	74.00	-22.34	1.20 H	169	23.25	28.41
1	#1200.00	48.47 AV	54.00	-5.53	1.20 H	169	20.06	28.41
2	#5150.00	47.87 PK	74.00	-26.13	1.00 H	19	8.59	39.28
2	#5150.00	36.65 AV	54.00	-17.35	1.00 H	19	-2.63	39.28
3	*5180.00	97.59 PK			1.00 H	19	58.28	39.31
3	*5180.00	86.97 AV			1.00 H	19	47.66	39.31
4	10360.00	59.05 PK	68.30	-9.25	1.01 H	24	8.78	50.27

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1200.00	48.65 PK	74.00	-25.35	1.05 V	14	20.24	28.41
1	#1200.00	43.26 AV	54.00	-10.74	1.05 V	14	14.85	28.41
2	#5150.00	57.96 PK	74.00	-16.14	1.57 V	27	18.68	39.28
2	#5150.00	46.72 AV	54.00	-7.28	1.57 V	27	7.44	39.28
3	*5180.00	107.82 PK			1.57 V	27	68.51	39.31
3	*5180.00	96.51 AV			1.57 V	27	57.20	39.31
4	10360.00	59.07 PK	68.30	-9.23	1.01 V	24	8.80	50.27

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 2	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1200.00	51.87 PK	74.00	-22.13	1.18 H	172	23.46	28.41
1	#1200.00	48.69 AV	54.00	-5.31	1.18 H	172	20.28	28.41
2	*5200.00	97.28 PK			1.01 H	21	57.95	39.33
2	*5200.00	86.68 AV			1.01 H	21	47.35	39.33
3	10400.00	59.47 PK	68.30	-8.83	1.02 H	38	9.13	50.34

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1200.00	48.72 PK	74.00	-25.28	1.03 V	26	20.31	28.41
1	#1200.00	43.38 AV	54.00	-10.62	1.03 V	26	14.97	28.41
2	*5200.00	107.51 PK			1.55 V	30	68.18	39.33
2	*5200.00	96.20 AV			1.55 V	30	56.87	39.33
3	10400.00	59.15 PK	68.30	-9.15	1.06 V	58	8.81	50.34

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. “*” : Fundamental frequency
 6. “#”The radiated frequency falling in the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	DETECTOR FUNCTION	Peak(PK) Average (AV)
TRANSFER RATE	6Mbps	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1200.00	51.57 PK	74.00	-22.43	1.15 H	24	23.16	28.41
1	#1200.00	48.35 AV	54.00	-5.65	1.15 H	24	19.94	28.41
2	*5240.00	97.06 PK			1.01 H	24	57.70	39.36
2	*5240.00	86.42 AV			1.01 H	24	47.06	39.36
3	10480.00	59.38 PK	68.30	-8.92	1.18 H	245	8.80	50.58

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#1200.00	48.62 PK	74.00	-25.38	1.13 V	25	20.21	28.41
1	#1200.00	43.21 AV	54.00	-10.79	1.13 V	25	14.80	28.41
2	*5240.00	107.31 PK			1.52 V	30	67.95	39.36
2	*5240.00	96.00 AV			1.52 V	30	56.64	39.36
3	10480.00	59.36 PK	68.30	-8.94	1.05 V	34	8.78	50.58

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.

4.3 PEAK TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 ~ 5.35GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 ~ 5.825GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	E4446A	MY44360128	Dec. 06, 2006
SPECTRUM ANALYZER	FSP40	100040	Jun. 07, 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set span to encompass the entire emission bandwidth of the signal.
3. Set RBW to 1MHz, VBW to 300kHz.
4. Using the spectrum analyzer's channel power measurement function to measure the output power.

NOTE:


The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

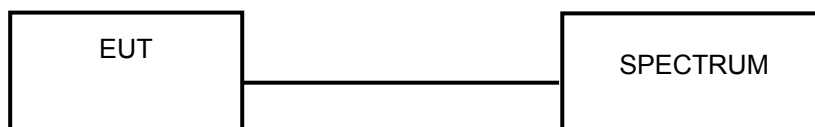

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.3.7 TEST RESULTS


802.11a OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 991hPa
TESTED BY	Long Chen		


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	26dBc Occupied Bandwidth (MHz)	PASS/FAIL
1	5180	39.902	16.01	17.00	31.76	PASS
2	5200	40.458	16.07	17.00	31.04	PASS
4	5240	35.563	15.51	17.00	33.12	PASS

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following pages.


Peak Power Output: CH 1

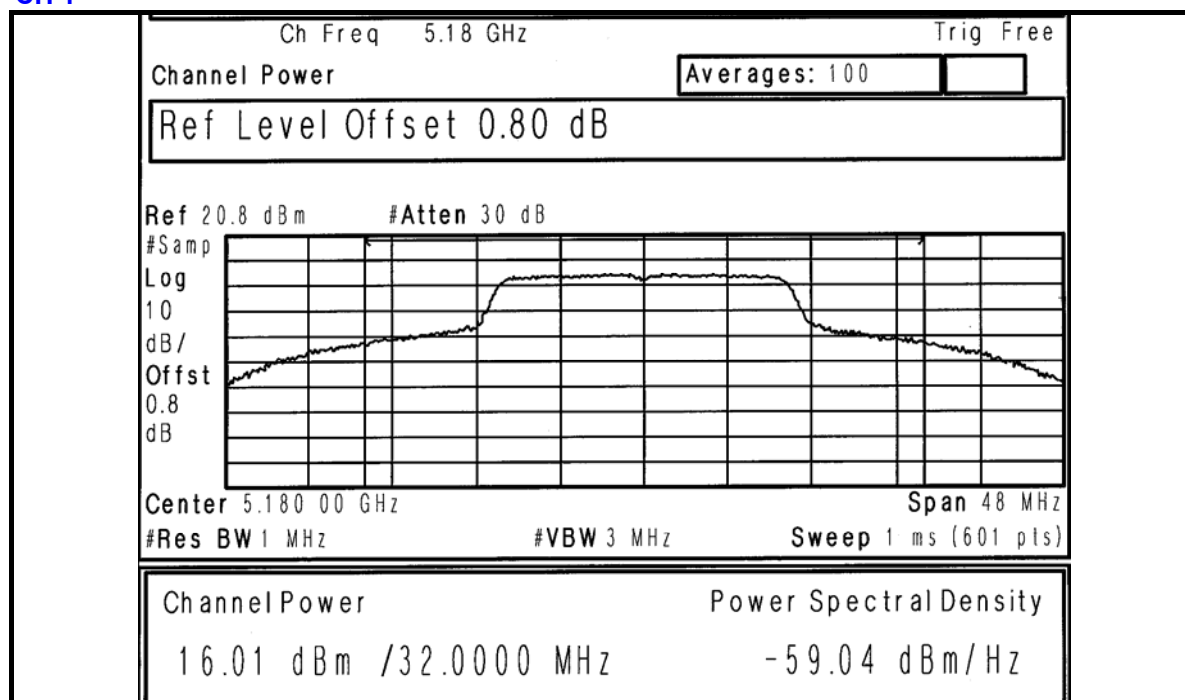


CH 2

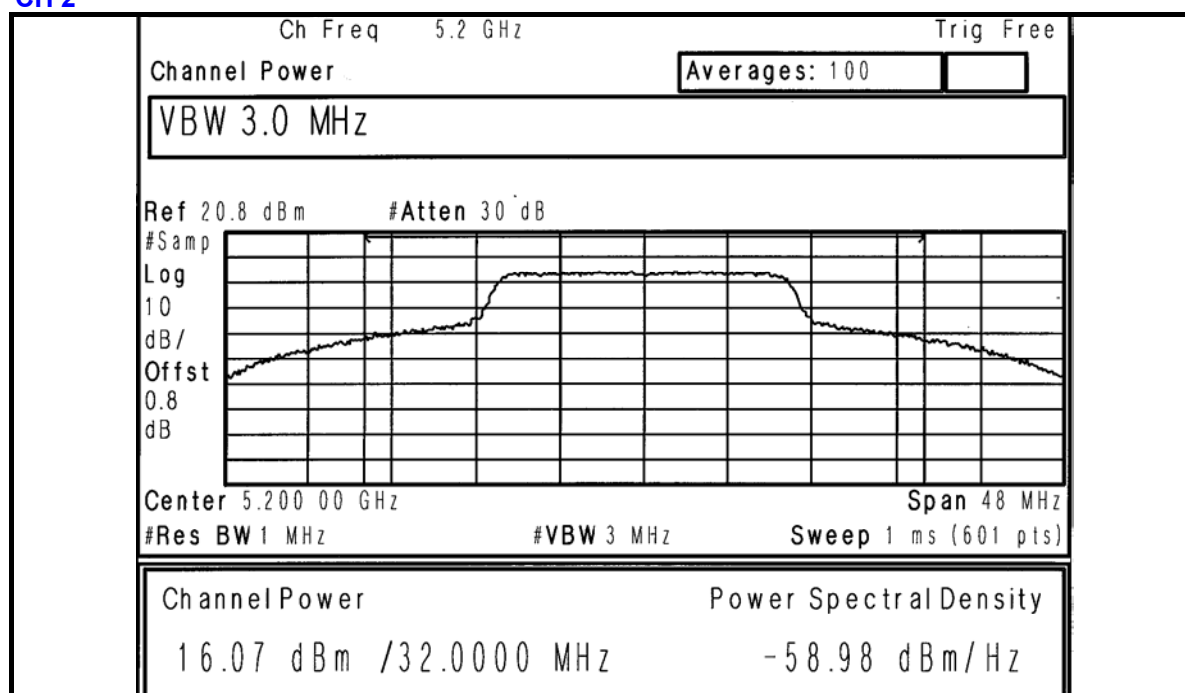


CH 4

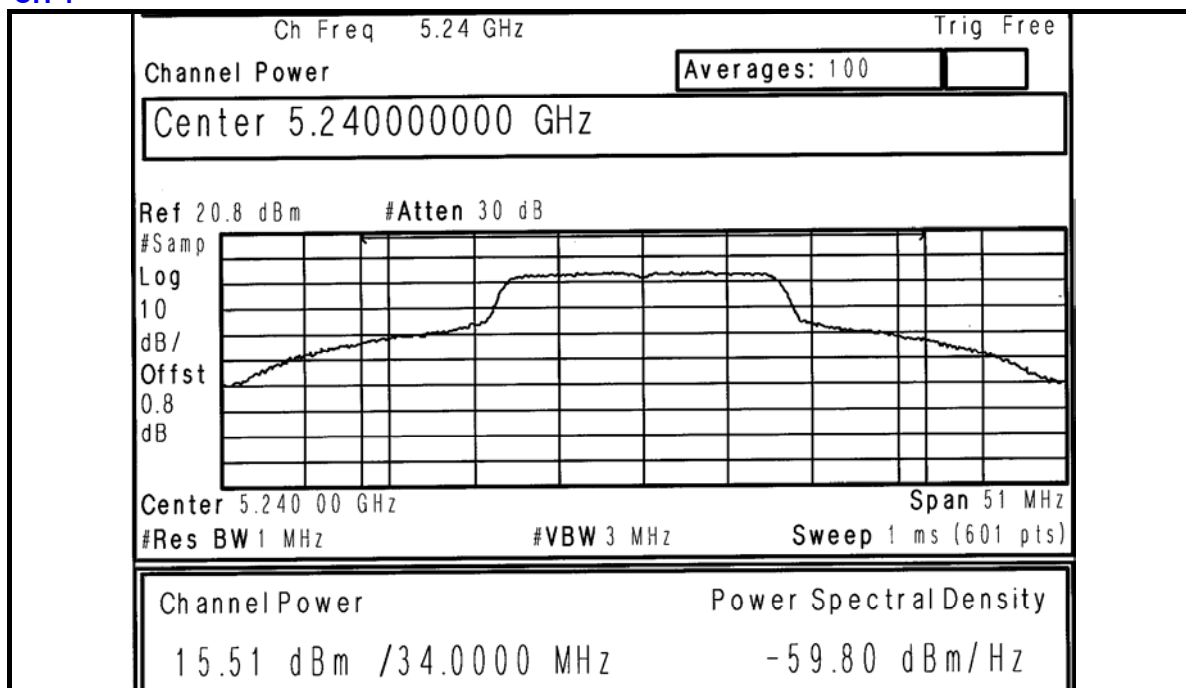


26dB Occupied Bandwidth: CH 1

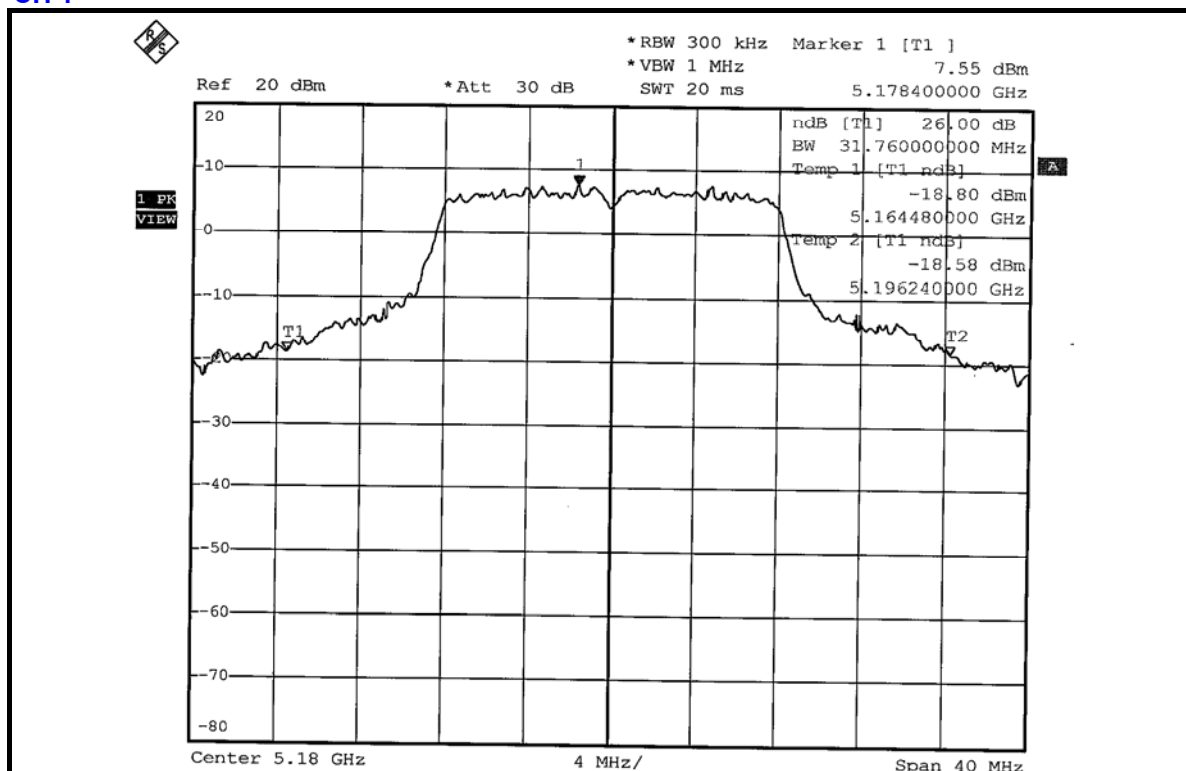

CH 2

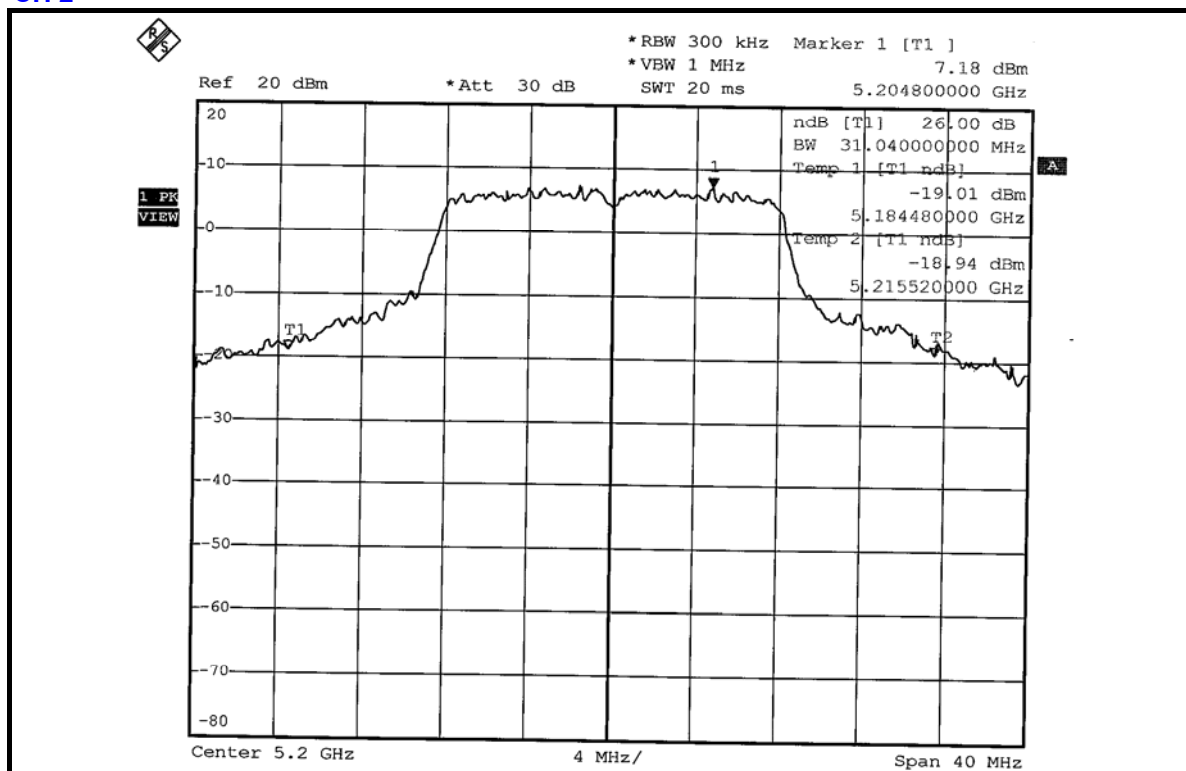

CH 4

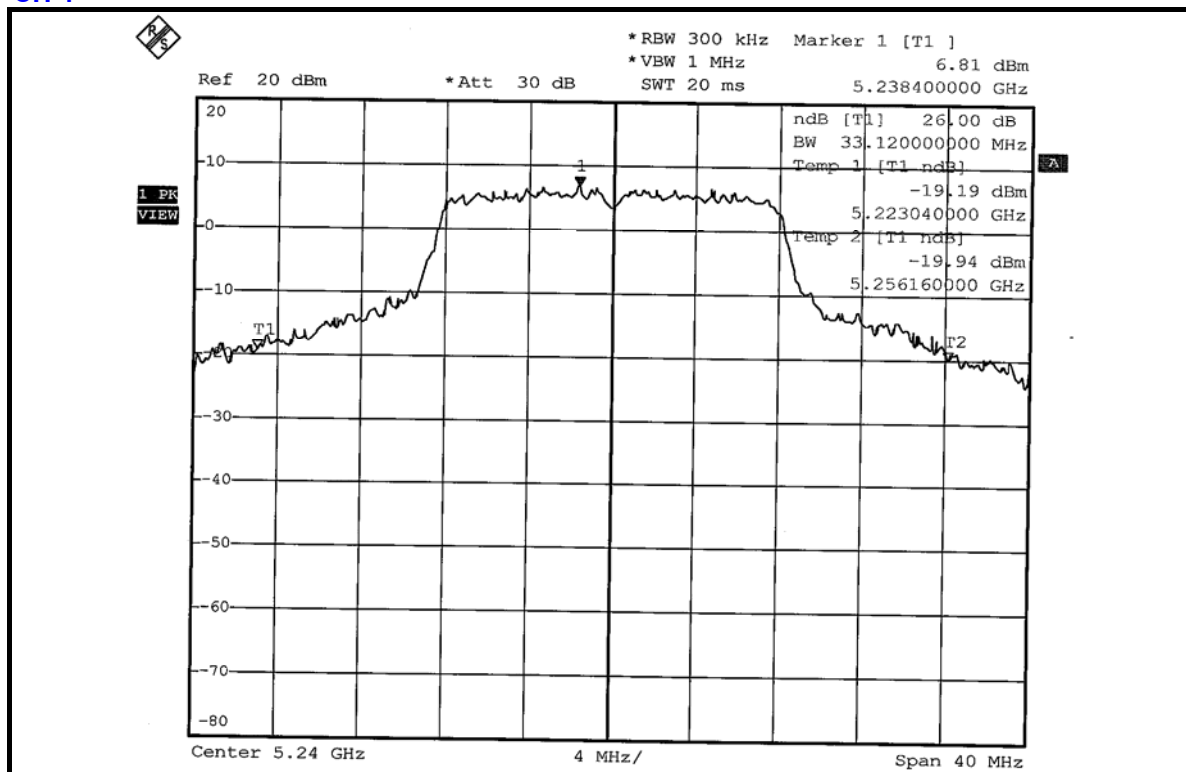

4.4 PEAK POWER EXCURSION MEASUREMENT

4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25 GHz	13dB
5.25 ~ 5.35 GHz	13dB
5.725 ~ 5.825 GHz	13dB

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100040	Jun. 07, 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum bandwidth span to view the entire spectrum.
3. Using peak detector and Max-hold function for Trace 1 (RB=1MHz, VB=3MHz) and 2 (RB=1MHz, VB=300kHz).
4. The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

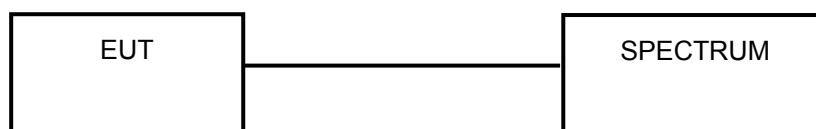

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.


4.4.7 TEST RESULTS

802.11a OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
1	5180	8.48	13	PASS
2	5200	7.47	13	PASS
4	5240	7.59	13	PASS


CH 1

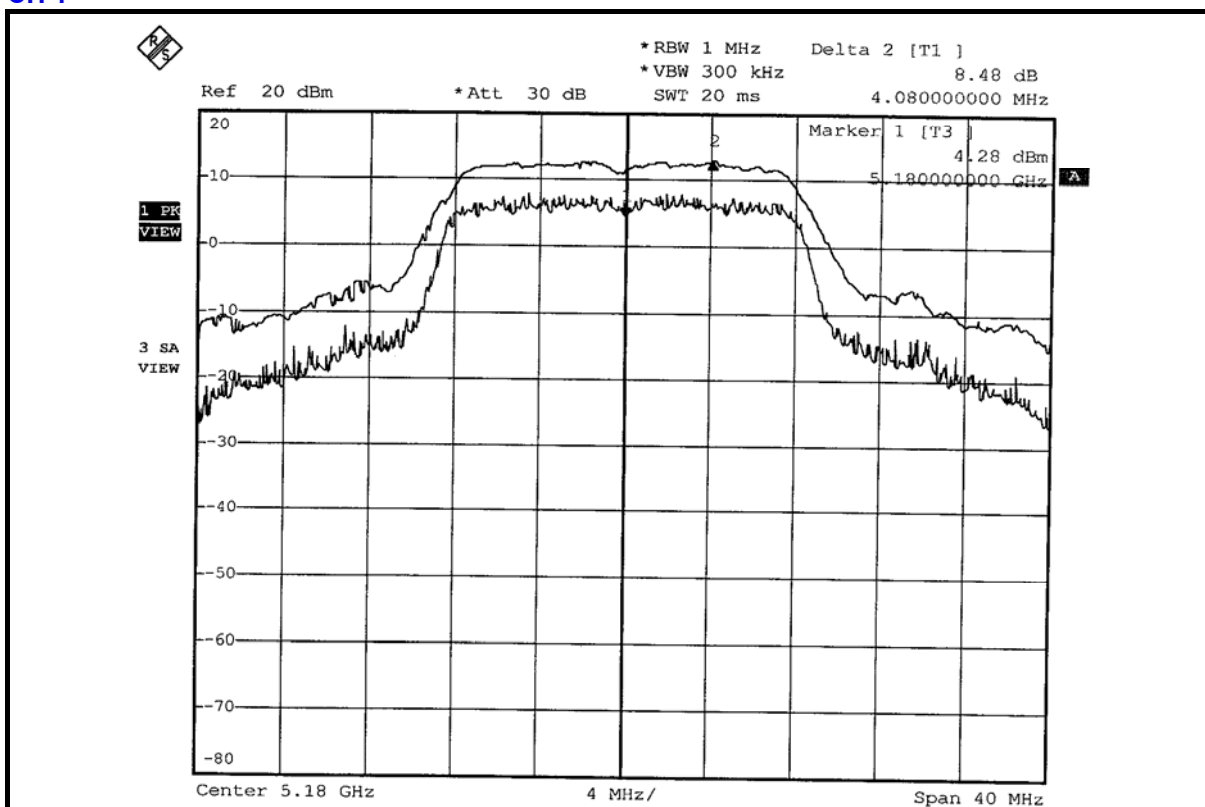

CH 2

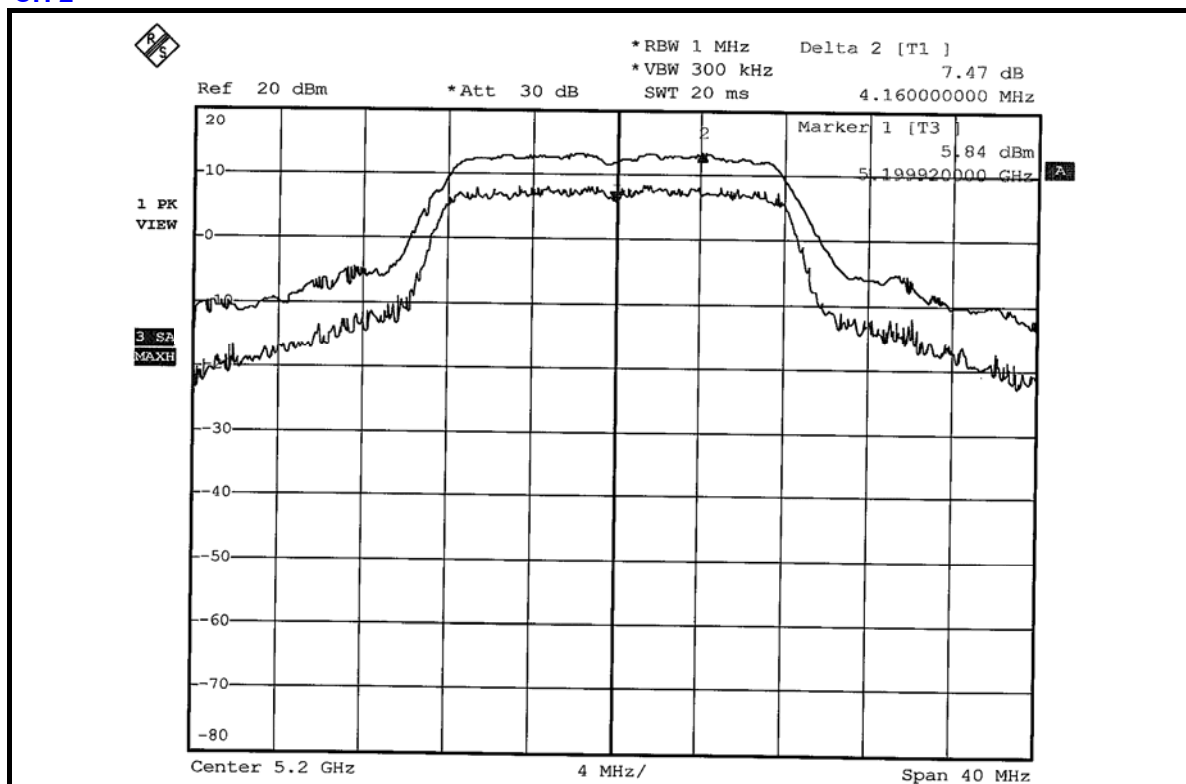

CH 4

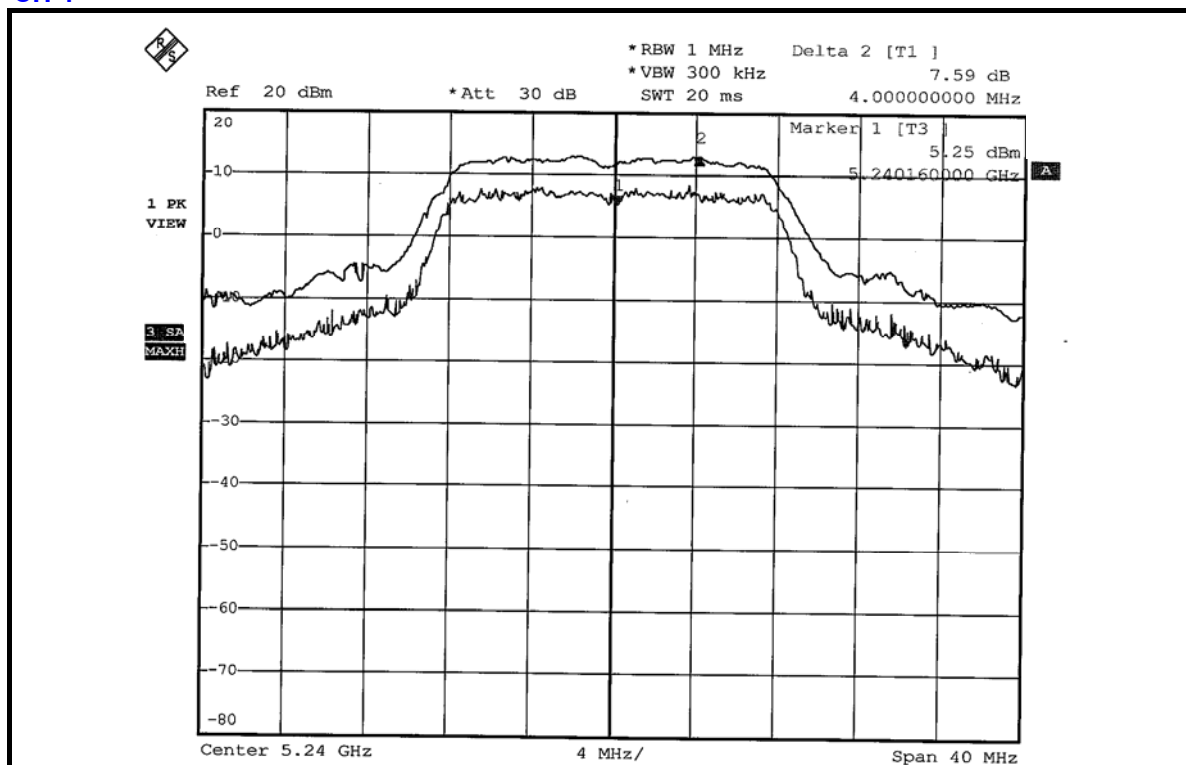

4.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	4dBm
5.25 ~ 5.35GHz	11dBm
5.725 ~ 5.825GHz	17dBm

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100040	Jun. 07, 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURES

1. The transmitter output was connected to the spectrum analyzer.
2. Set RBW=1MHz, VBW=3MHz. The PPSD is the highest level found across the emission in any 1MHz band.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 5.3.6


4.5.7 TEST RESULTS

802.11a OFDM MODULATION


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 54%RH, 991hPa
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5180	2.98	4	PASS
2	5200	2.74	4	PASS
4	5240	2.38	4	PASS


CH 1

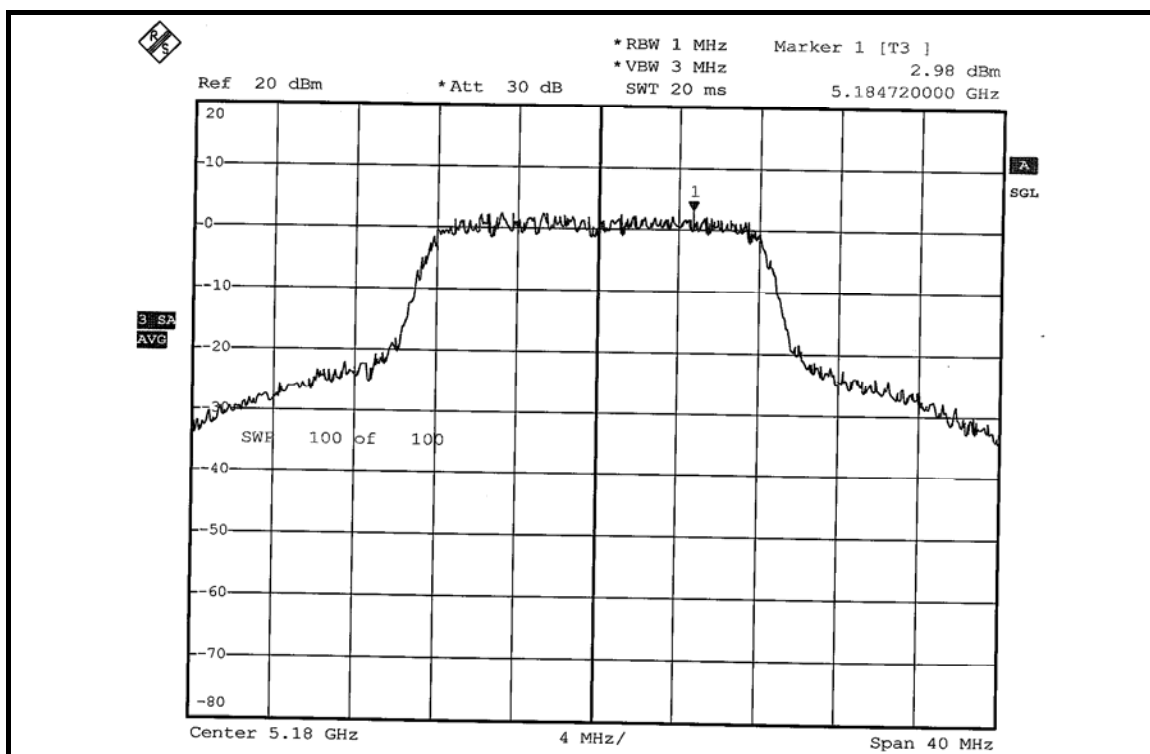

CH 2

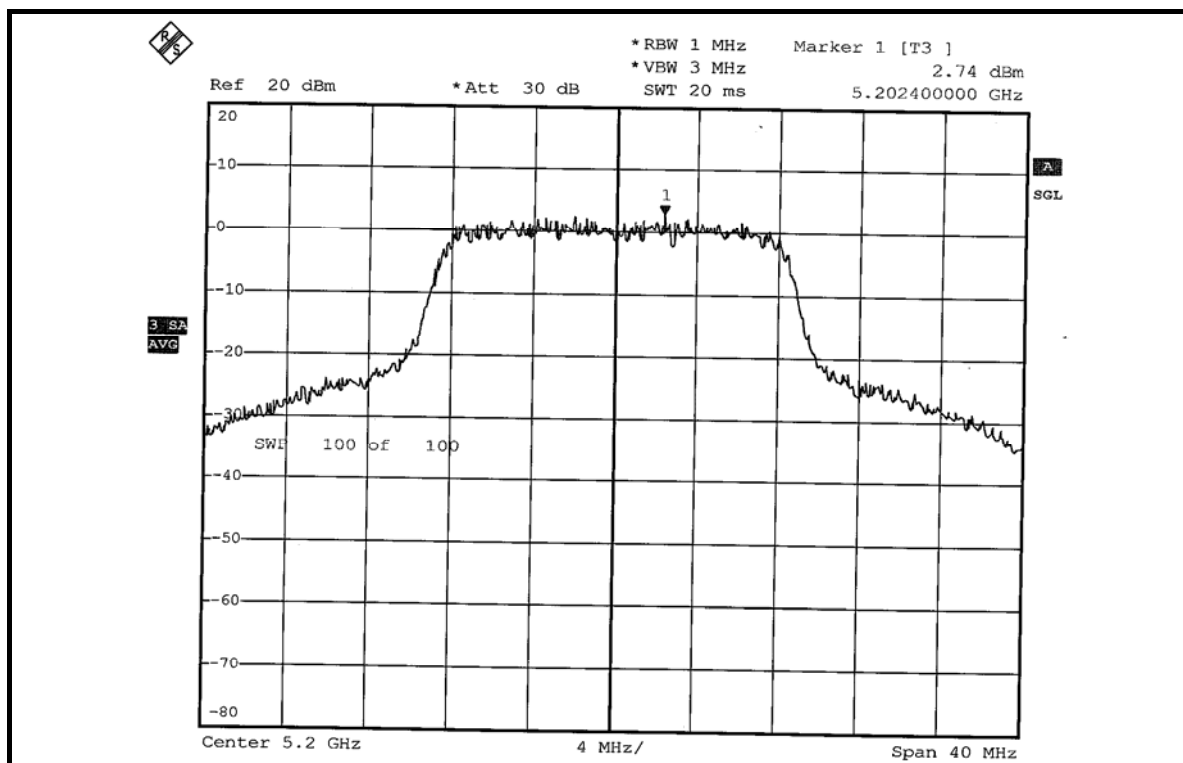

CH 4

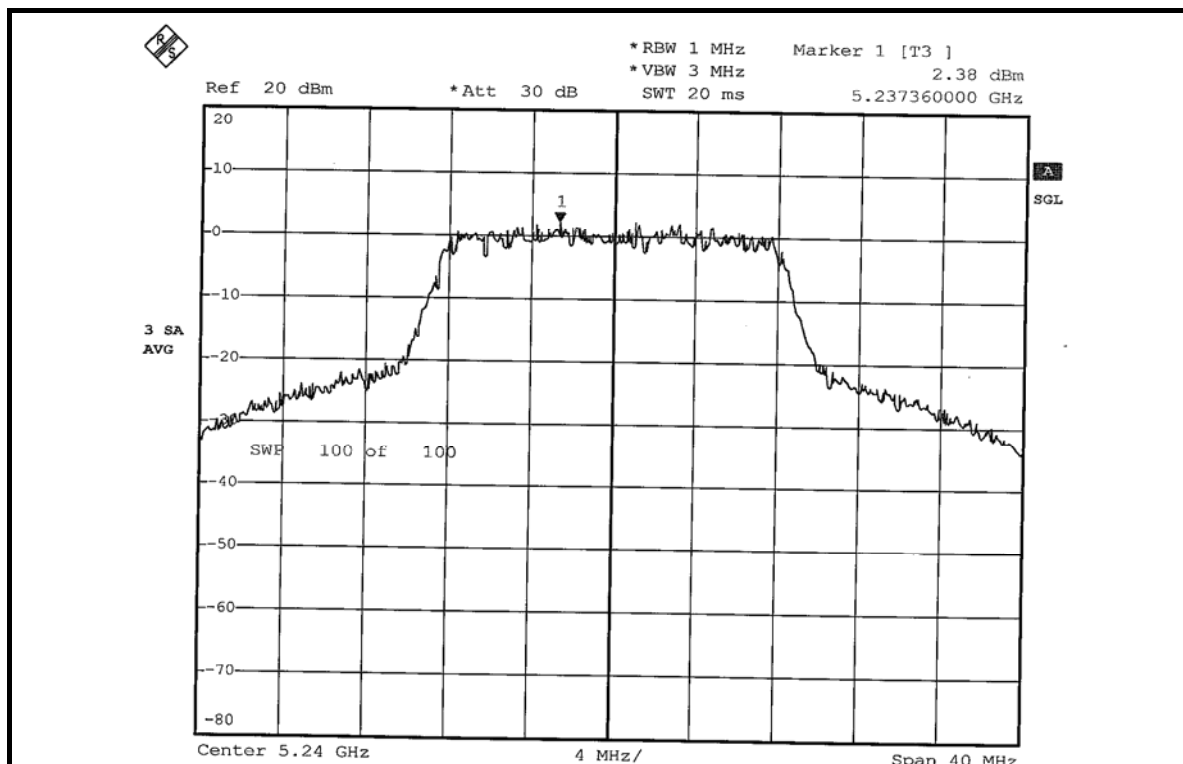

4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.02\%$ of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ANRITSU SPECTRUM ANALYZER	MS2667C	M10281	Mar. 08, 2007
WIT STANDARD TEMPERATURE AND HUMIDITY CHAMBER	TH-4S-C	W981030	Jul. 10, 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at $+20$ degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

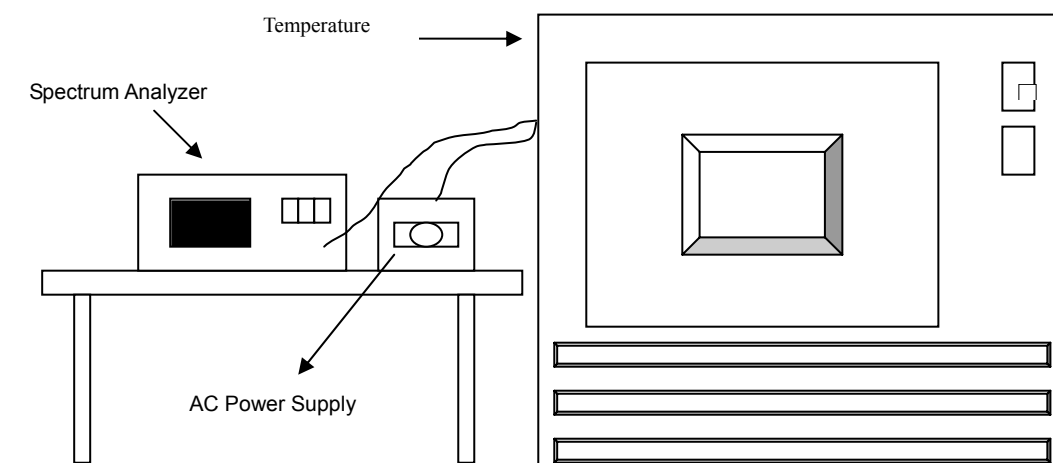

4.6.6 EUT OPERATING CONDITION

Same as Item 4.1.6

4.6.7 TEST RESULTS

Operating frequency: 5200MHz						Limit : $\pm 0.01\%$			
Temp. (°C)	Power supply (Vac)	0 minute		2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	138	5200.01586	0.0003050	5200.01574	0.0003028	5200.01568	0.0003015	5200.01548	0.0002977
	120	5200.01579	0.0003037	5200.01576	0.0003030	5200.01569	0.0003017	5200.01543	0.0002967
	102	5200.01581	0.0003041	5200.01577	0.0003033	5200.01571	0.0003021	5200.01536	0.0002954
40	138	5200.00942	0.0001812	5200.00958	0.0001842	5200.00951	0.0001829	5200.00946	0.0001819
	120	5200.00943	0.0001813	5200.00938	0.0001804	5200.00933	0.0001794	5200.00921	0.0001771
	102	5200.00931	0.0001790	5200.00929	0.0001787	5200.00922	0.0001773	5200.00915	0.0001760
30	138	5200.00025	0.0000048	5200.00033	0.0000063	5200.00026	0.0000050	5200.00013	0.0000025
	120	5200.00019	0.0000037	5200.00019	0.0000036	5200.00011	0.0000021	5200.00006	0.0000012
	102	5200.00013	0.0000025	5200.00014	0.0000027	5199.99993	-0.0000013	5199.99989	-0.0000021
20	138	5199.99672	-0.0000631	5199.99677	-0.0000621	5199.99664	-0.0000647	5199.99664	-0.0000647
	120	5199.99437	-0.0001083	5199.99444	-0.0001070	5199.99429	-0.0001098	5199.99432	-0.0001093
	102	5199.99202	-0.0001534	5199.99210	-0.0001520	5199.99194	-0.0001550	5199.99200	-0.0001539
10	138	5199.98967	-0.0001986	5199.98976	-0.0001969	5199.98959	-0.0002002	5199.98968	-0.0001985
	120	5199.98732	-0.0002438	5199.98742	-0.0002419	5199.98724	-0.0002453	5199.98736	-0.0002432
	102	5199.98497	-0.0002890	5199.98508	-0.0002869	5199.98489	-0.0002905	5199.98503	-0.0002878
0	138	5199.98262	-0.0003341	5199.98274	-0.0003318	5199.98255	-0.0003357	5199.98271	-0.0003324
	120	5199.98028	-0.0003793	5199.98041	-0.0003768	5199.98020	-0.0003808	5199.98039	-0.0003771
	102	5199.97793	-0.0004245	5199.97807	-0.0004218	5199.97785	-0.0004260	5199.97807	-0.0004217
-10	138	5199.97558	-0.0004697	5199.97573	-0.0004667	5199.97550	-0.0004712	5199.97575	-0.0004663
	120	5199.97323	-0.0005148	5199.97339	-0.0005117	5199.97315	-0.0005164	5199.97343	-0.0005109
	102	5199.97088	-0.0005600	5199.97105	-0.0005567	5199.97080	-0.0005615	5199.97111	-0.0005556
-20	138	5199.96853	-0.0006052	5199.96872	-0.0006016	5199.96845	-0.0006067	5199.96879	-0.0006002
	120	5199.96618	-0.0006504	5199.96638	-0.0006466	5199.96610	-0.0006519	5199.96647	-0.0006448
	102	5199.96383	-0.0006956	5199.96404	-0.0006915	5199.96375	-0.0006970	5199.96415	-0.0006895
-30	138	5199.96148	-0.0007407	5199.96170	-0.0007365	5199.96141	-0.0007422	5199.96183	-0.0007341
	120	5199.95913	-0.0007859	5199.95936	-0.0007815	5199.95906	-0.0007874	5199.95951	-0.0007787
	102	5199.95678	-0.0008311	5199.95703	-0.0008264	5199.95671	-0.0008325	5199.95719	-0.0008233

4.7 BAND EDGES MEASUREMENT

4.7.1 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100040	Jun. 07, 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.2 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 1MHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.7.3 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.7.4 TEST RESULTS

For signals in the restricted bands above and below the 5.15 to 5.25GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

The spectrum plots (Peak RBW=VBW=1MHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

Channel 1 (5180MHz)



The band edge emission plot on the next page shows 44.91dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 107.82dBuV/m (Peak), so the maximum field strength in restrict band is $107.82 - 44.91 = 62.91$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 51.02dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 96.51dBuV/m (Average), so the maximum field strength in restrict band is $96.51 - 51.02 = 45.49$ dBuV/m which is under 54dBuV/m limit.



Channel 4 (5240MHz)

The band edge emission plot on the next second page shows 49.92dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 4 is 107.31dBuV/m (Peak), so the maximum field strength in restrict band is $107.31 - 49.92 = 57.39$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 50.41dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 4 is 96.00dBuV/m (Average), so the maximum field strength in restrict band is $96.00 - 50.41 = 45.59$ dBuV/m which is under 54dBuV/m limit.

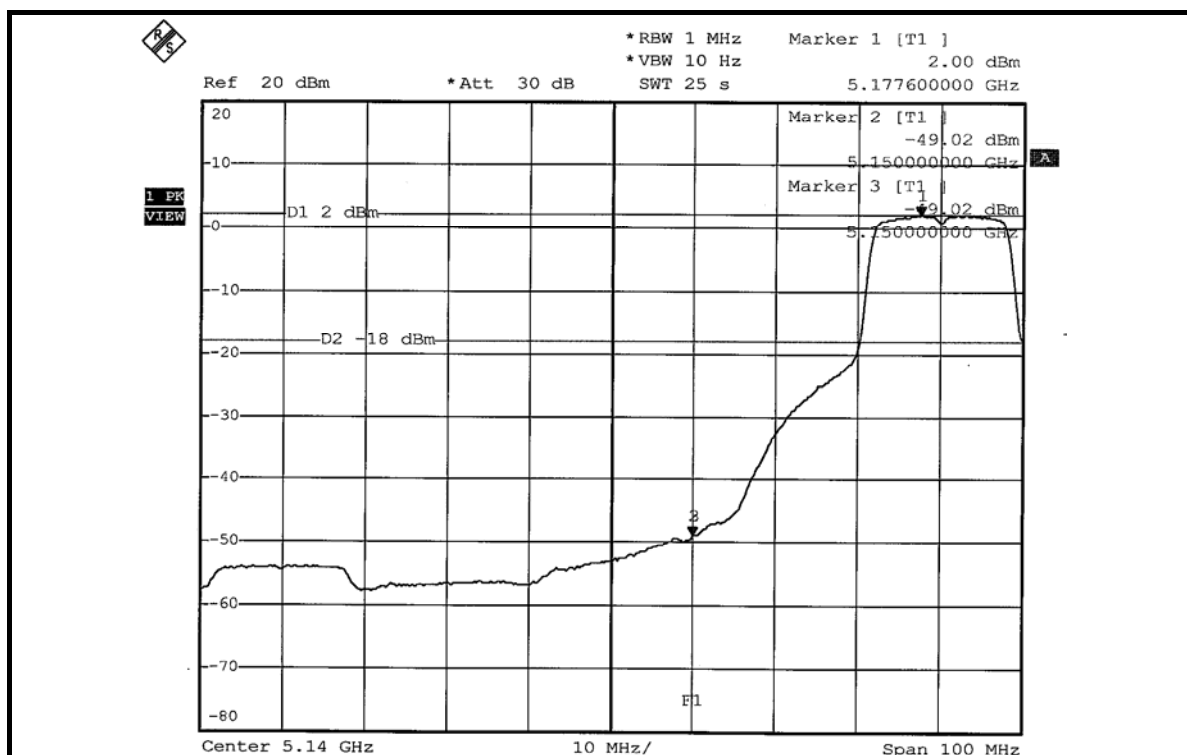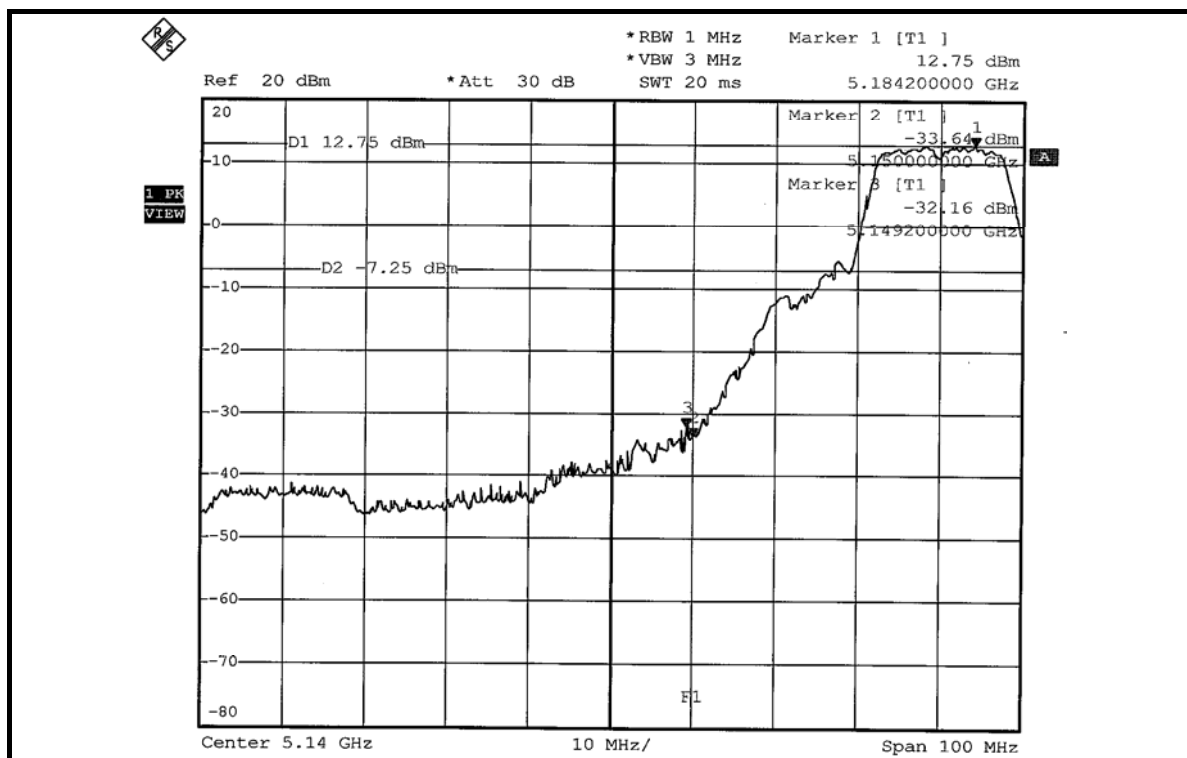

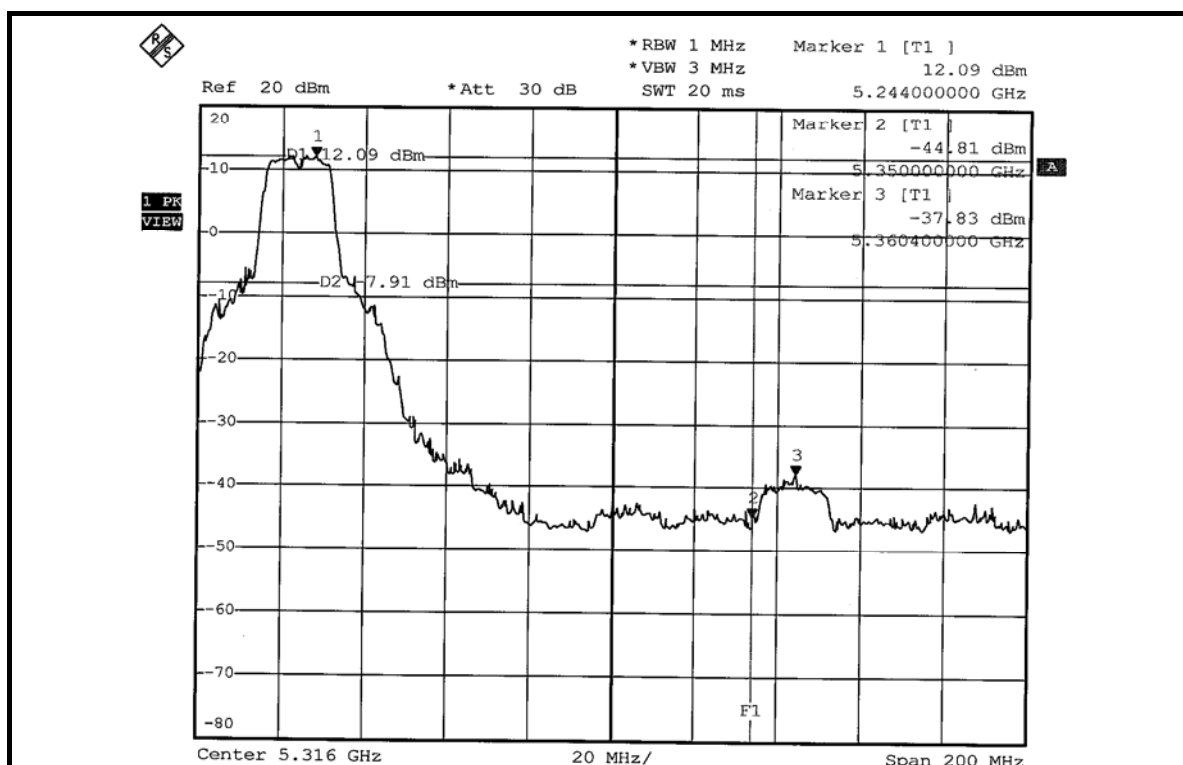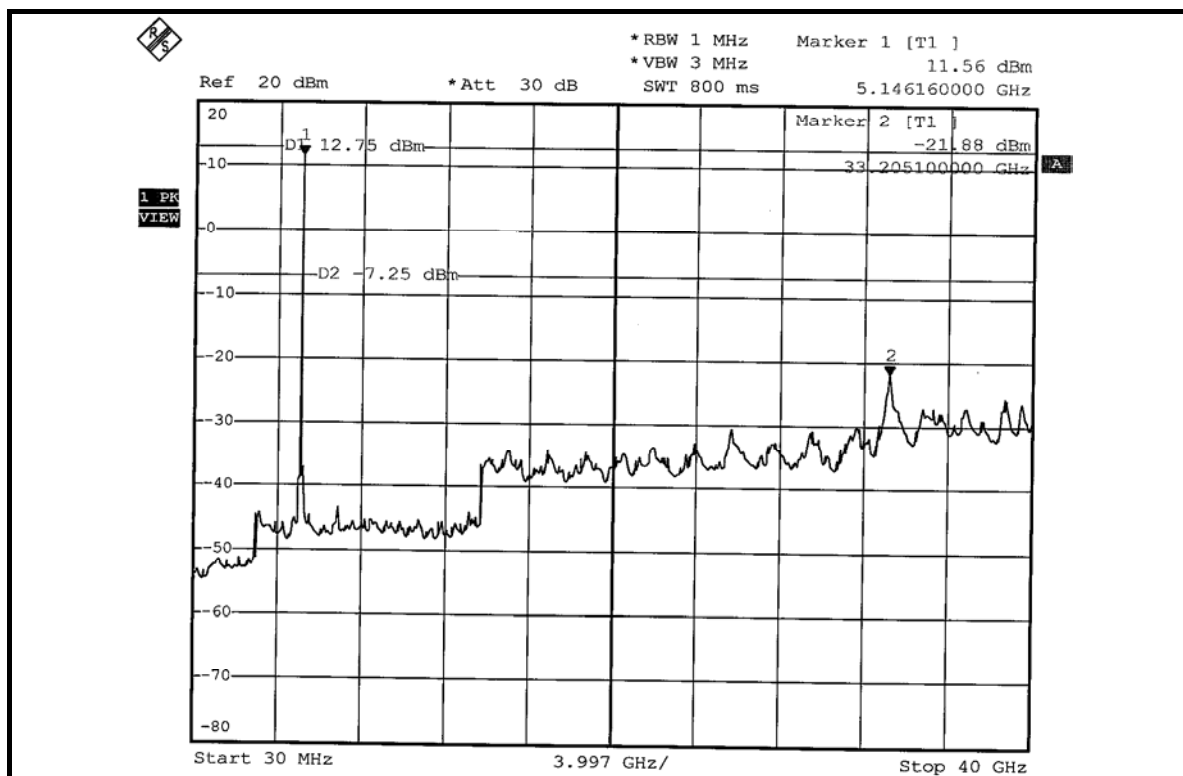

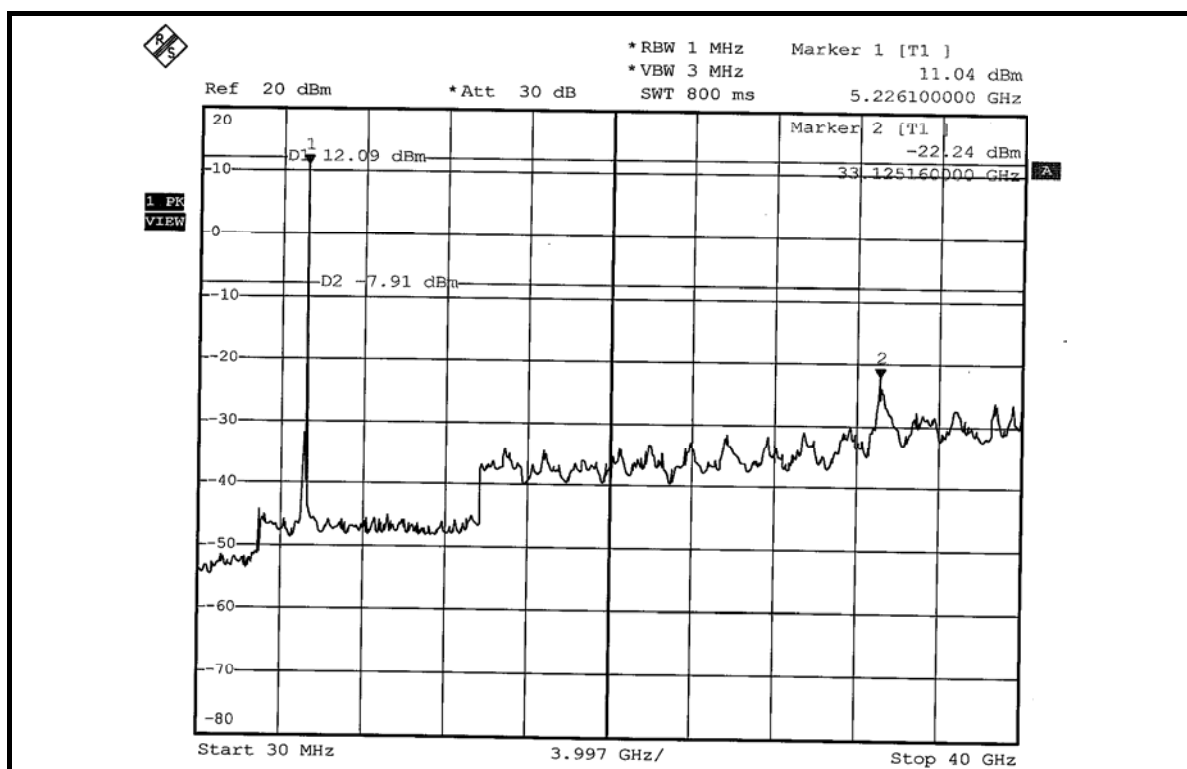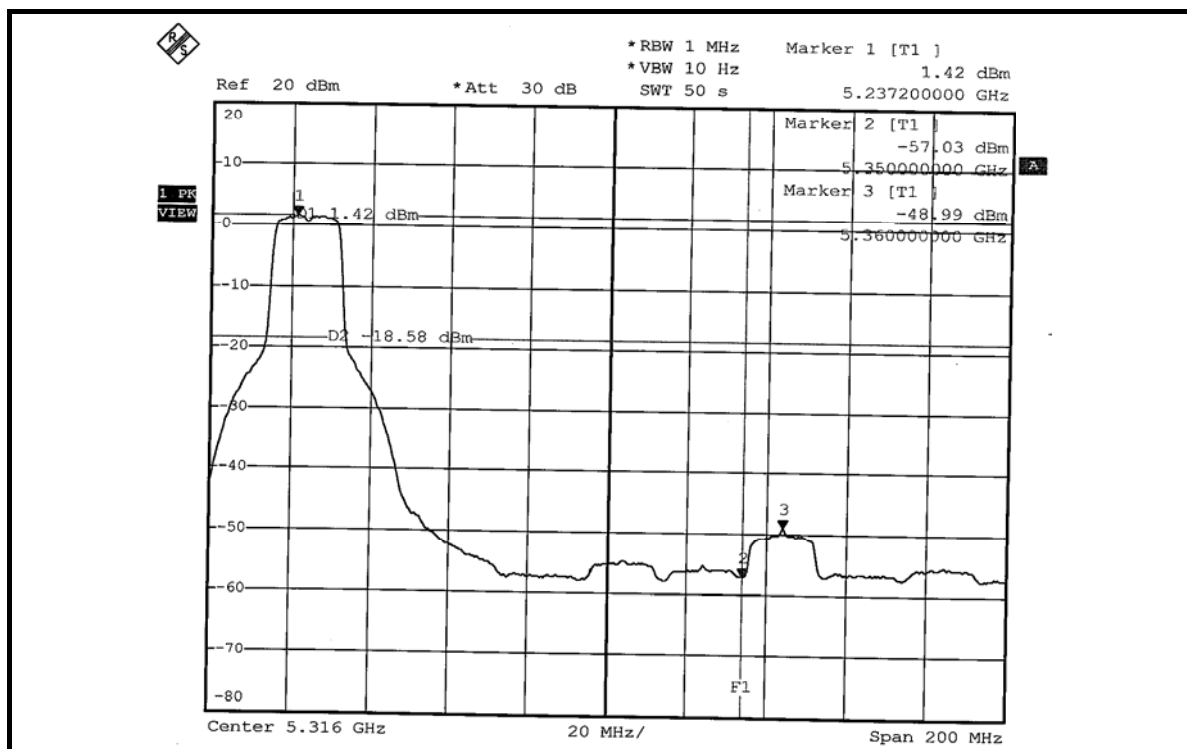

4.8 ANTENNA REQUIREMENT

4.8.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.8.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Integrated antenna with UFL connector. The maximum Gain of the antenna is 1.8dBi.

5. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, NCC
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.