



FCC TEST REPORT

REPORT NO.: RF920408R03B

MODEL NO.: WL-850F

RECEIVED: Aug. 13, 2005

TESTED: Aug. 29 ~ Aug. 30, 2005

ISSUED: Sep. 05, 2005

APPLICANT: Gemtek Technology Co., Ltd.td.

ADDRESS: No. 1, Jen Ai Road, Hsinchu Industrial Park,
Hukou Hsinchu, Taiwan, R.O.C. 303

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang
244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 78 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



No. 2177-01



TABLE OF CONTENTS

1.	CERTIFICATION.....	4
2.	SUMMARY OF TEST RESULTS.....	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	8
3.2.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.2.4	DESCRIPTION OF SUPPORT UNITS.....	10
4.	TEST TYPES AND RESULTS	11
4.1	CONDUCTED EMISSION MEASUREMENT	11
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	11
4.1.2	TEST INSTRUMENTS.....	12
4.1.3	TEST PROCEDURES	13
4.1.4	DEVIATION FROM TEST STANDARD	13
4.1.5	TEST SETUP	14
4.1.6	EUT OPERATING CONDITIONS.....	14
4.1.7	TEST RESULTS	15
4.2	RADIATED EMISSION MEASUREMENT.....	23
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	23
4.2.2	TEST INSTRUMENTS.....	24
4.2.3	TEST PROCEDURES	25
4.2.4	DEVIATION FROM TEST STANDARD	26
4.2.5	TEST SETUP	26
4.2.6	EUT OPERATING CONDITIONS.....	26
4.2.7	TEST RESULTS	27
	TRANSMITTER PARAMETERS	27
	RECEIVER PARAMETERS.....	34
4.3	6dB BANDWIDTH MEASUREMENT	38
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	38
4.3.2	TEST INSTRUMENTS.....	38
4.3.3	TEST PROCEDURE.....	39
4.3.4	DEVIATION FROM TEST STANDARD	39
4.3.5	TEST SETUP	39
4.3.6	EUT OPERATING CONDITIONS.....	39
4.3.7	TEST RESULTS	40
4.4	20dB BANDWIDTH MEASUREMENT	46
4.4.1	TEST INSTRUMENTS.....	46
4.4.2	TEST PROCEDURE.....	46
4.4.3	DEVIATION FROM TEST STANDARD	46
4.4.4	TEST SETUP	46
4.4.5	EUT OPERATING CONDITIONS.....	46
4.4.6	TEST RESULTS	47
4.5	MAXIMUM PEAK OUTPUT POWER.....	53
4.5.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	53



4.5.2	INSTRUMENTS	53
4.5.3	TEST PROCEDURES	54
4.5.4	DEVIATION FROM TEST STANDARD	54
4.5.5	TEST SETUP	54
4.5.6	EUT OPERATING CONDITIONS.....	54
4.5.7	TEST RESULTS	55
4.6	POWER SPECTRAL DENSITY MEASUREMENT	56
4.6.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	56
4.6.2	TEST INSTRUMENTS.....	56
4.6.3	TEST PROCEDURE.....	57
4.6.4	DEVIATION FROM TEST STANDARD	57
4.6.5	TEST SETUP	57
4.6.6	EUT OPERATING CONDITION	57
4.6.7	TEST RESULTS	58
4.7	BAND EDGES MEASUREMENT	64
4.7.1	LIMITS OF BAND EDGES MEASUREMENT.....	64
4.7.2	TEST INSTRUMENTS.....	64
4.7.3	TEST PROCEDURE.....	64
4.7.4	DEVIATION FROM TEST STANDARD	64
4.7.5	EUT OPERATING CONDITION	64
4.7.6	TEST RESULTS	65
4.8	ANTENNA REQUIREMENT	73
4.8.1	STANDARD APPLICABLE.....	73
4.8.2	ANTENNA CONNECTED CONSTRUCTION.....	73
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	74
6.	INFORMATION ON THE TESTING LABORATORIES	78



1. CERTIFICATION

PRODUCT: Mini-PCI Adapter
MODEL NO.: WL-850F
BRAND NAME: Gemtek
APPLICANT: Gemtek Technology Co., Ltd.td.
TESTED: Aug. 29 ~ Aug. 30, 2005
TEST SAMPLE: R&D SAMPLE
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
Canada RSS-210, 2001, Issued 5, Amend 1
ANSI C63.4-2003

The above equipment have been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , **DATE:** Sep. 05, 2005
Andrea Hsia

TECHNICAL ACCEPTANCE : Gary Chang , **DATE:** Sep. 05, 2005
Responsible for RF Gary Chang

APPROVED BY : Cody Chang , **DATE:** Sep. 05, 2005
Cody Chang / Deputy Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C; RSS-210				
Standard Section		Test Type and Limit	Result	REMARK
RSS-210	FCC Part 15			
-	15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -18.46dB at 0.150MHz
6.6	-	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -11.74dB at 10.328MHz.
Amendment 6.2.2 (o)(iv)	15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
6.2.2 (o)(b)	15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
6.2.2 (o)(e1)	15.247(d)	Transmitter Radiated Emissions FCC Limit: Table 15.209 RSS-210 Limit: Table 3	PASS	Meet the requirement of limit. Minimum passing margin is -1.86dB at 2390.00MHz
	-	Receiver Radiated Emissions RSS-210 Limit: Table 3	PASS	Meet the requirement of limit. Minimum passing margin is -2.92dB at 166.07MHz.
6.2.2 (o)(b)	15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
6.2.2 (o)(e1)	15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz ~ 30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.73 dB
	200MHz ~ 1000MHz	3.74 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Mini-PCI Adapter
MODEL NO.	WL-850F
POWER SUPPLY	3.3Vdc from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	98.855mW
ANTENNA TYPE	Dipole antenna with 1.948dBi gain
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:


- This report is issued as a supplementary report of ADT report no.: RF920408R03. This report is prepared for FCC class II permissive change. The differences compared with the original design are following descriptions as below.
 - *C37, C84 bypass capacitor move down 5 mils.
 - *C133 bypass capacitor move right 10mils.
 - *Close solder mask between antenna connector and RF switch. The impedance is still remain the same with V00 (50 ohm +/- 10%).
 - * MAC/BBP ISL3880IK same chip with different mark due to vendor brand name change.
 - * Adding a new antenna.
- The EUT, operates in the 2.4GHz frequency range, lets you connect IEEE 802.11g or IEEE 802.11b devices to the network. With its high-speed data transmissions of up to 54Mbps.
- As customer request, FCC and IC report have been combined in one.
- The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

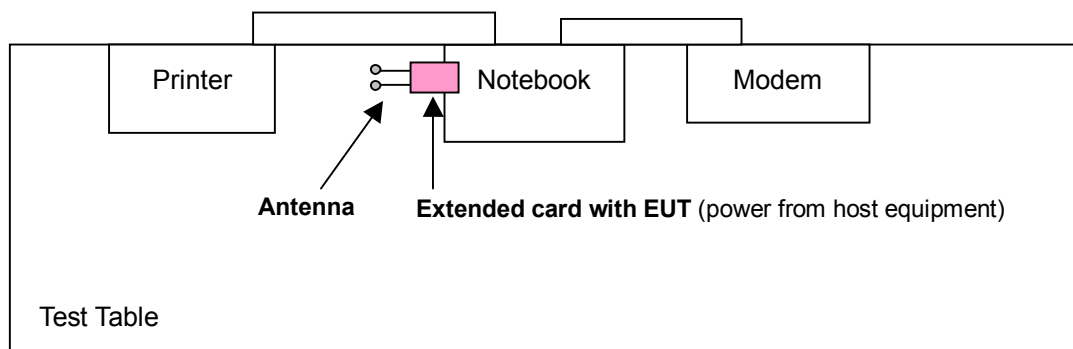



3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission **RE<1G**: Radiated Emission below 1GHz
RE≥1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	REMARK
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	Data For FCC
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	Data For Canada

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	REMARK
802.11g	1 to 11	11	OFDM	BPSK	6	Data For FCC
Receiver	1 to 11	11	OFDM	BPSK	6	Data For Canada



RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	REMARK
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11	Data For FCC
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	Data For Canada
Receiver	1 to 11	1, 6, 11	OFDM	BPSK	6	Data For Canada

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6



3.2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Mini-PCI Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

Canada RSS-210, 2001, Issued 5, Amend 1

ANSI C63.4: 2003

All test items have been performed and recorded as per the above standards.

3.2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	16484462992	E2K24CLNS
2	PRINTER	EPSON	LQ-300+	DCGY047265	FCC DoC Approved
3	MODEM	ACEEX	1414V/3	0401008248	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m shielded cable
3	1.2m shielded cable

NOTE: All power cords of the above support units are non shielded (1.8m).



4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.45 – 30	48	-

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 16, 2005
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 09, 2006
LISN SCHWARZBECK	NNBL 8226-2	8226-142	May. 02, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 15, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 450kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

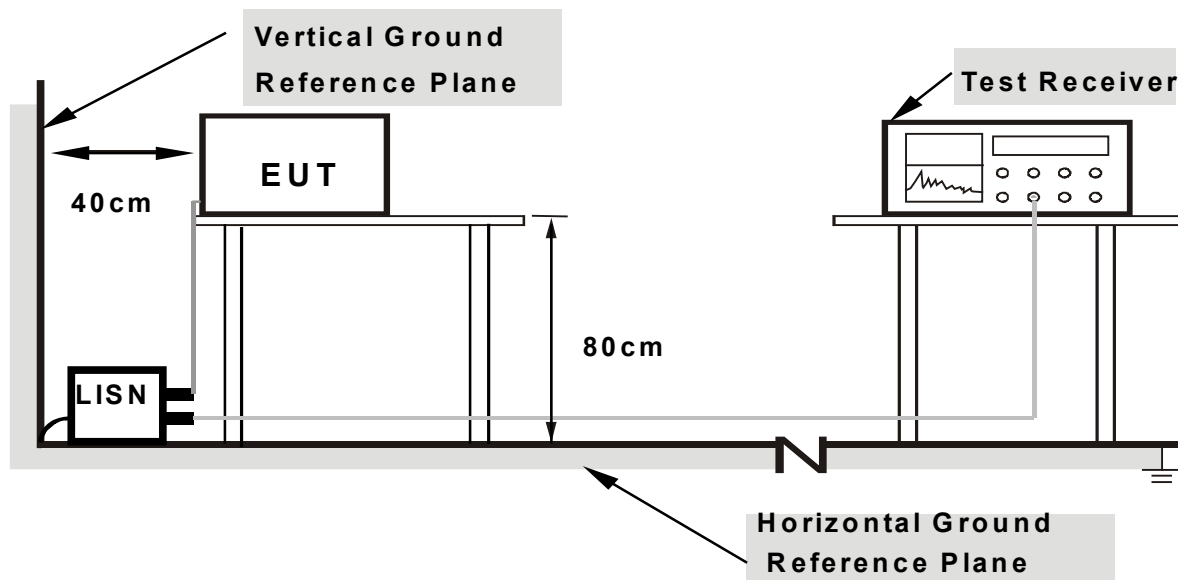

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Connected the EUT to notebook via the extended card and placed on a testing table.
- b. The notebook ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The notebook sent "H" messages to its screen.
- d. The notebook show "H" messages to modem.
- e. The notebook sent "H" messages to printer and the printer prints them on paper.
- f. Repeated item c ~e.




4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA (FOR FCC)

EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.11	46.42	-	46.53	-	66.00	56.00	-19.47	-
2	0.201	0.11	38.29	-	38.40	-	63.58	53.58	-25.18	-
3	0.275	0.11	34.33	-	34.44	-	60.97	50.97	-26.53	-
4	2.406	0.29	24.51	-	24.80	-	56.00	46.00	-31.20	-
5	10.574	0.54	35.23	-	35.77	-	60.00	50.00	-24.23	-
6	16.199	0.67	30.68	-	31.35	-	60.00	50.00	-28.65	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

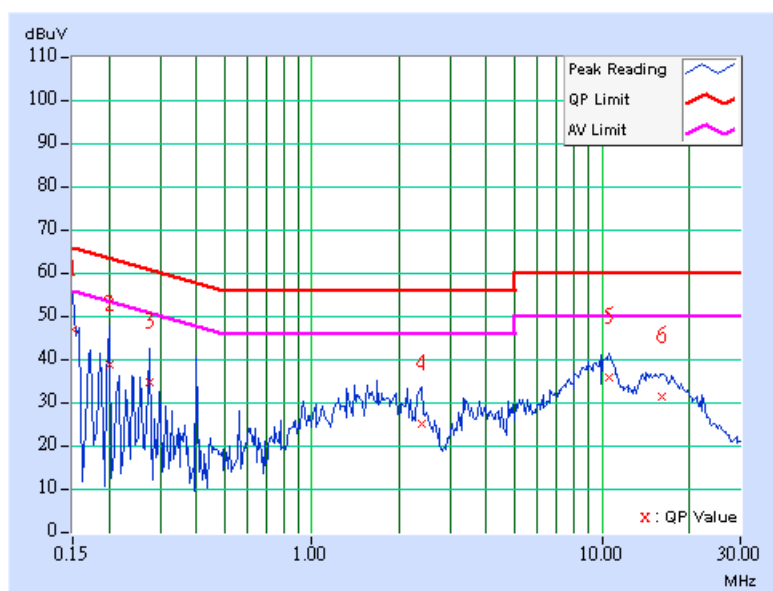




EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.11	38.35	-	38.46	-	63.91	53.91	-25.45	-
2	0.513	0.13	25.18	-	25.31	-	56.00	46.00	-30.69	-
3	1.652	0.25	29.36	-	29.61	-	56.00	46.00	-26.39	-
4	5.383	0.40	23.73	-	24.13	-	60.00	50.00	-35.87	-
5	10.352	0.44	35.82	-	36.26	-	60.00	50.00	-23.74	-
6	14.684	0.45	31.31	-	31.76	-	60.00	50.00	-28.24	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

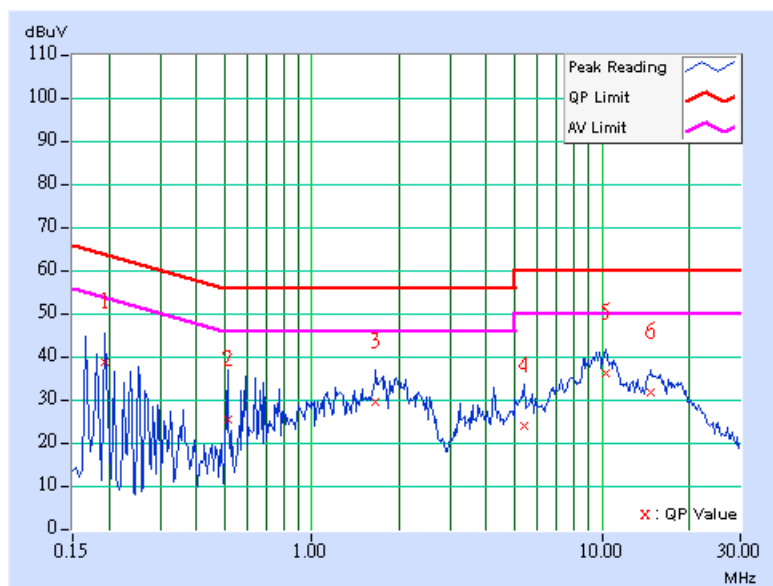




EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.11	42.89	-	43.00	-	64.43	54.43	-21.43	-
2	0.353	0.11	31.16	-	31.27	-	58.89	48.89	-27.62	-
3	1.570	0.25	29.78	-	30.03	-	56.00	46.00	-25.97	-
4	2.109	0.27	28.13	-	28.40	-	56.00	46.00	-27.60	-
5	10.465	0.54	35.27	-	35.81	-	60.00	50.00	-24.19	-
6	14.316	0.55	29.56	-	30.11	-	60.00	50.00	-29.89	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

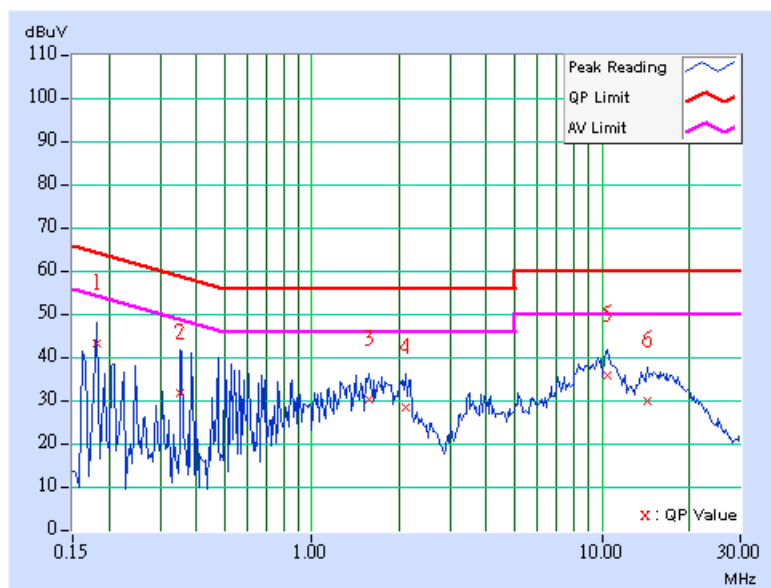




EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	0.11	46.24	-	46.35	-	66.00
2	0.201	0.11	38.59	-	38.70	-	63.58	53.58	-24.88	-
3	0.478	0.13	26.70	-	26.83	-	56.37	46.37	-29.54	-
4	1.492	0.25	28.95	-	29.20	-	56.00	46.00	-26.80	-
5	2.105	0.27	27.09	-	27.36	-	56.00	46.00	-28.64	-
6	10.582	0.44	35.51	-	35.95	-	60.00	50.00	-24.05	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

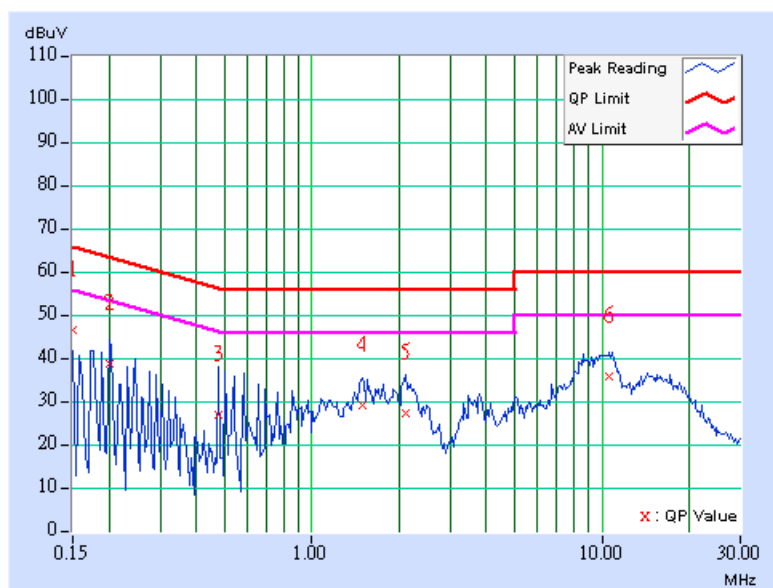




EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	0.11	47.27	-	47.38	-	66.00
2	0.185	0.11	41.82	-	41.93	-	64.25	54.25	-22.32	-
3	0.361	0.11	34.02	-	34.13	-	58.71	48.71	-24.58	-
4	2.266	0.28	26.11	-	26.39	-	56.00	46.00	-29.61	-
5	9.988	0.54	35.01	-	35.55	-	60.00	50.00	-24.45	-
6	17.250	0.77	30.14	-	30.91	-	60.00	50.00	-29.09	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

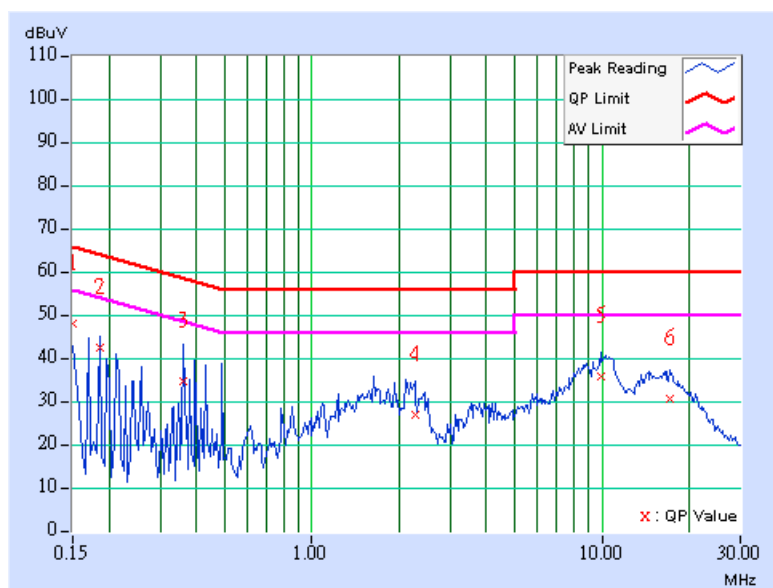




EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.150	0.11	47.43	-	47.54	-	66.00
2	0.201	0.11	40.32	-	40.43	-	63.58	53.58	-23.15	-
3	0.244	0.11	38.90	-	39.01	-	61.97	51.97	-22.96	-
4	1.770	0.26	29.49	-	29.75	-	56.00	46.00	-26.25	-
5	10.016	0.44	35.33	-	35.77	-	60.00	50.00	-24.23	-
6	14.496	0.45	30.72	-	31.17	-	60.00	50.00	-28.83	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

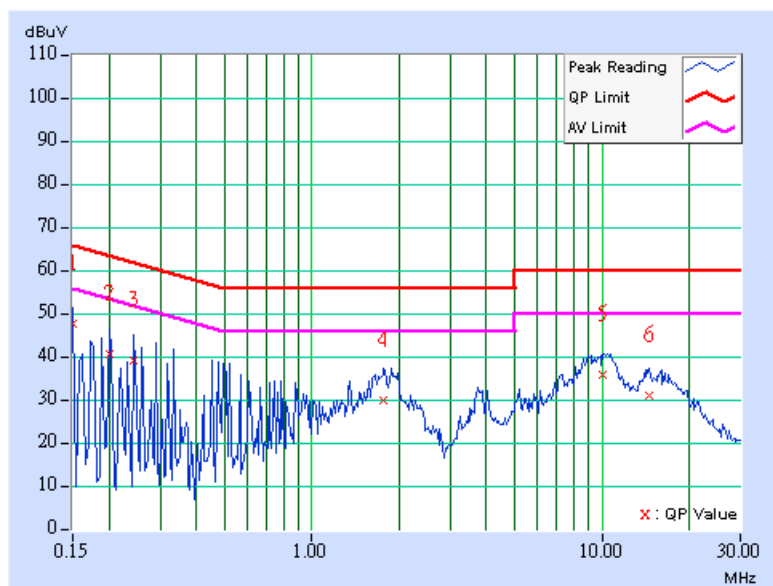




CONDUCTED WORST-CASE DATA (FOR CANADA)

EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.450	0.12	27.63	-	27.75	-	48.00
2	0.524	0.14	24.86	-	25.00	-	48.00	-	-23.00	-
3	2.074	0.26	28.38	-	28.64	-	48.00	-	-19.36	-
4	3.898	0.38	25.02	-	25.40	-	48.00	-	-22.60	-
5	10.055	0.54	35.23	-	35.77	-	48.00	-	-12.23	-
6	14.574	0.55	30.02	-	30.57	-	48.00	-	-17.43	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-":N/A.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

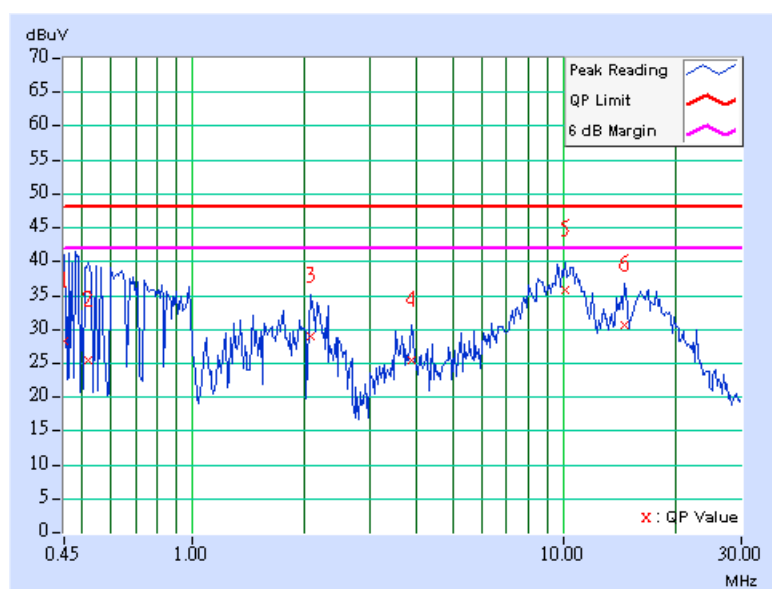




EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Gary Chang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.454	0.12	30.42	-	30.54	-	48.00	-	-17.46	-
2	0.575	0.15	28.83	-	28.98	-	48.00	-	-19.02	-
3	1.602	0.25	29.67	-	29.92	-	48.00	-	-18.08	-
4	2.242	0.28	26.73	-	27.01	-	48.00	-	-20.99	-
5	10.328	0.44	35.82	-	36.26	-	48.00	-	-11.74	-
6	15.313	0.47	30.68	-	31.15	-	48.00	-	-16.85	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-":N/A.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

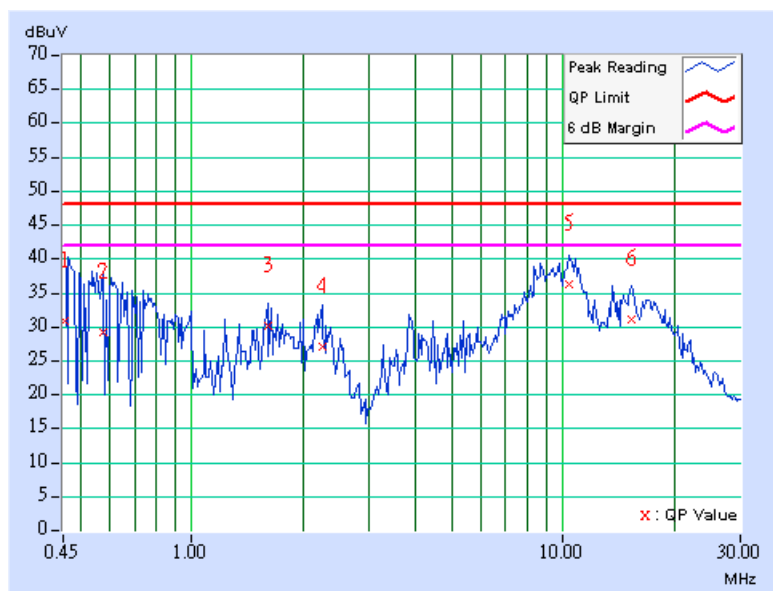



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 (RSS-210 table 3) as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	May. 19, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Nov. 21, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Jun. 01, 2006
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 17, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10633	Nov. 09, 2005
Preamplifier Agilent	8449B	3008A01964	Nov. 06, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218183/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218195/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 2.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The VCCI Site Registration No. is R-237.
 5. The IC Site Registration No. is IC4924-3.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

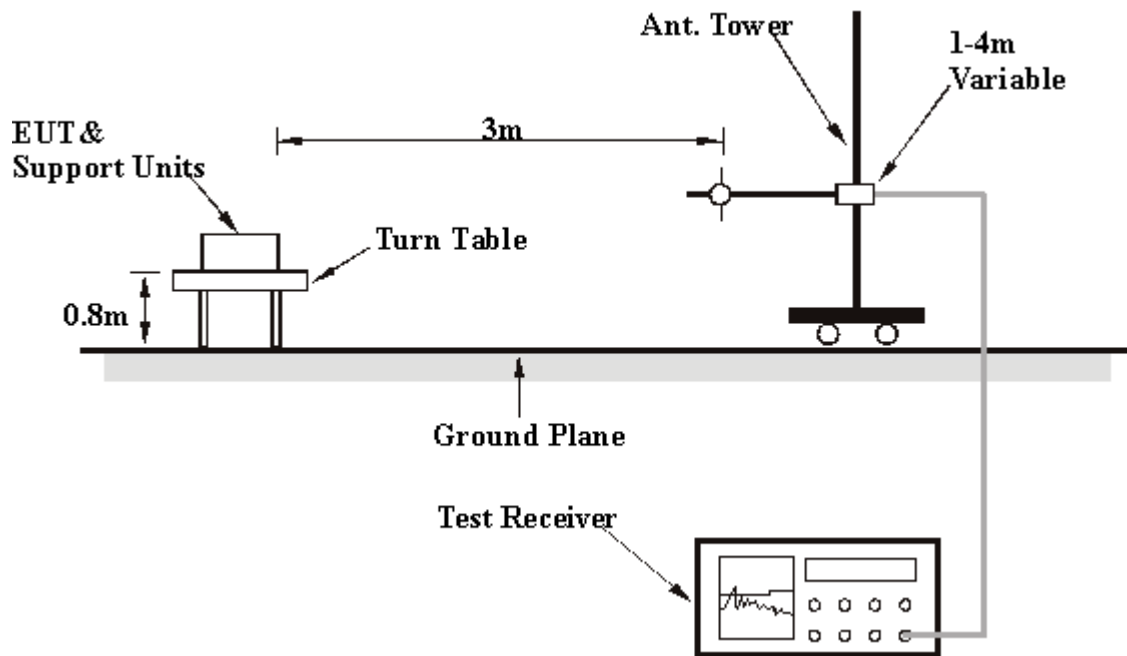

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

TRANSMITTER PARAMETERS

RADIATED WORST-CASE DATA: BELOW 1GHZ

EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.44	33.13 QP	40.00	-6.87	1.50 H	163	18.55	14.58
2	98.04	32.53 QP	43.50	-10.97	2.00 H	10	23.15	9.37
3	133.03	39.38 QP	43.50	-4.12	2.00 H	157	26.83	12.54
4	152.46	41.22 QP	43.50	-2.28	2.00 H	163	27.61	13.61
5	166.07	40.58 QP	43.50	-2.92	1.50 H	337	27.27	13.31
6	199.12	37.38 QP	43.50	-6.12	1.00 H	325	26.10	11.28
7	278.82	33.04 QP	46.00	-12.96	1.00 H	310	18.29	14.74
8	333.25	36.39 QP	46.00	-9.61	1.00 H	355	20.07	16.31
9	364.35	31.49 QP	46.00	-14.51	1.00 H	109	14.51	16.98
10	399.34	33.11 QP	46.00	-12.89	1.00 H	76	15.05	18.06
11	479.04	32.30 QP	46.00	-13.70	1.50 H	358	12.54	19.76
12	560.68	35.09 QP	46.00	-10.91	1.50 H	28	13.55	21.53
13	599.56	31.20 QP	46.00	-14.80	1.00 H	283	8.31	22.90
14	640.38	36.89 QP	46.00	-9.11	1.00 H	286	13.72	23.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	36.35 QP	40.00	-3.65	1.00 V	28	23.40	12.96
2	64.99	29.78 QP	40.00	-10.22	1.00 V	106	16.80	12.98
3	123.31	33.45 QP	43.50	-10.05	1.00 V	319	21.93	11.52
4	160.24	33.41 QP	43.50	-10.09	1.00 V	250	19.62	13.79
5	199.12	32.00 QP	43.50	-11.50	1.00 V	253	20.73	11.28
6	399.34	31.88 QP	46.00	-14.12	1.00 V	259	13.82	18.06
7	560.68	31.96 QP	46.00	-14.04	1.50 V	10	10.43	21.53

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

802.11b DSSS MODULATION

EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	41.78 PK	74.00	-32.22	1.34 H	315	10.38	31.40
1	2390.00	33.68 AV	54.00	-20.32	1.34 H	315	2.28	31.40
2	*2412.00	99.78 PK			1.34 H	315	68.24	31.54
2	*2412.00	91.68 AV			1.34 H	315	60.14	31.54
3	4874.00	47.55 PK	74.00	-26.45	1.30 H	325	10.77	36.78
4	9648.00	55.48 PK	74.00	-18.52	1.05 H	321	8.81	46.67
4	9648.00	42.75 AV	54.00	-11.25	1.05 H	321	-3.92	46.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.26 PK	74.00	-20.74	1.08 V	39	21.86	31.40
1	2390.00	45.34 AV	54.00	-8.66	1.08 V	39	13.94	31.40
2	*2412.00	111.26 PK			1.08 V	39	79.72	31.54
2	*2412.00	103.34 AV			1.08 V	39	71.80	31.54
3	4824.00	47.56 PK	74.00	-26.44	1.14 V	358	10.79	36.77
3	4824.00	35.88 AV	54.00	-18.12	1.14 V	358	-0.89	36.77
4	9648.00	55.65 PK	74.00	-18.35	1.13 V	19	8.98	46.67
4	9648.00	42.85 AV	54.00	-11.15	1.13 V	19	-3.82	46.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	100.32 PK			1.15 H	311	68.63	31.69
1	*2437.00	92.85 AV			1.15 H	311	61.16	31.69
2	4874.00	48.25 PK	74.00	-25.75	1.23 H	32	11.47	36.78
3	9748.00	56.58 PK	74.00	-17.42	1.25 H	315	9.69	46.89
3	9748.00	44.03 AV	54.00	-9.97	1.25 H	315	-2.86	46.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	112.56 PK			1.11 V	306	80.87	31.69
1	*2437.00	104.80 AV			1.11 V	306	73.11	31.69
2	4874.00	48.32 PK	74.00	-25.68	1.34 V	15	11.54	36.78
3	9748.00	56.71 PK	74.00	-17.29	1.16 V	24	9.82	46.89
3	9748.00	43.96 AV	54.00	-10.04	1.16 V	24	-2.93	46.89

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.50	42.99 PK	74.00	-31.01	1.11 H	325	11.00	31.99
1	2483.50	34.32 AV	54.00	-19.68	1.11 H	325	2.33	31.99
2	*2642.00	99.99 PK			1.11 H	325	67.80	32.19
2	*2642.00	91.32 AV			1.11 H	325	59.13	32.19
3	4924.00	48.02 PK	74.00	-25.98	1.20 H	31	11.22	36.80
4	9848.00	56.21 PK	74.00	-17.79	1.05 H	321	9.13	47.08
4	9848.00	44.02 AV	54.00	-9.98	1.05 H	321	-3.06	47.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.90 PK			1.10 V	317	80.05	31.85
1	*2462.00	104.13 AV			1.10 V	317	72.28	31.85
2	2483.50	54.90 PK	74.00	-19.10	1.10 V	317	22.91	31.99
2	2483.50	44.13 AV	54.00	-9.87	1.10 V	317	12.14	31.99
3	4924.00	48.32 PK	74.00	-25.68	1.32 V	25	11.52	36.80
4	9848.00	56.52 PK	74.00	-17.48	1.18 V	35	9.44	47.08
4	9848.00	44.12 AV	54.00	-9.88	1.18 V	35	-2.96	47.08

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

802.11g OFDM MODULATION

EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.33 PK	74.00	-19.67	1.08 H	125	22.93	31.40
1	2390.00	44.81 AV	54.00	-9.19	1.08 H	125	13.41	31.40
2	*2412.00	100.33 PK			1.08 H	125	68.79	31.54
2	*2412.00	90.81 AV			1.08 H	125	59.27	31.54
3	4824.00	47.01 PK	74.00	-26.99	1.55 H	111	10.24	36.77
3	4824.00	35.58 AV	54.00	-18.42	1.55 H	111	-1.19	36.77
4	9648.00	55.12 PK	74.00	-18.88	1.25 H	315	8.45	46.67
4	9648.00	42.25 AV	54.00	-11.75	1.25 H	315	-4.42	46.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.80 PK	74.00	-12.20	1.11 V	106	30.40	31.40
1	2390.00	52.14 AV	54.00	-1.86	1.11 V	106	20.74	31.40
2	*2412.00	108.51 PK			1.11 V	106	76.97	31.54
2	*2412.00	98.85 AV			1.11 V	106	67.31	31.54
3	4824.00	47.65 PK	74.00	-26.35	1.13 V	357	10.88	36.77
3	4824.00	36.85 AV	54.00	-17.15	1.13 V	357	0.08	36.77
4	9648.00	55.71 PK	74.00	-18.29	1.03 V	348	9.04	46.67
4	9648.00	42.92 AV	54.00	-11.08	1.03 V	348	-3.75	46.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	101.89 PK			1.05 H	124	70.20	31.69
1	*2437.00	92.25 AV			1.05 H	124	60.56	31.69
2	4874.00	48.12 PK	74.00	-25.88	1.23 H	114	11.34	36.78
3	9748.00	55.01 PK	74.00	-18.99	1.23 H	114	8.12	46.89
3	9748.00	43.74 AV	54.00	-10.26	1.23 H	114	-3.15	46.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.12 PK			1.13 V	105	78.43	31.69
1	*2437.00	100.02 AV			1.13 V	105	68.33	31.69
2	4874.00	46.82 PK	74.00	-27.18	1.10 V	348	10.03	36.78
2	4874.00	36.06 AV	54.00	-17.94	1.10 V	348	-0.73	36.78
3	9748.00	55.03 PK	74.00	-18.97	1.60 V	347	8.14	46.89
3	9748.00	43.76 AV	54.00	-10.24	1.60 V	347	-3.13	46.89

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.24 PK			1.00 H	345	67.39	31.85
1	*2462.00	89.78 AV			1.00 H	345	57.93	31.85
2	2483.50	59.53 PK	74.00	-14.47	1.00 H	345	27.54	31.99
2	2483.50	47.85 AV	54.00	-6.15	1.00 H	345	15.86	31.99
3	4924.00	45.85 PK	74.00	-28.15	1.00 H	308	9.05	36.80
3	4924.00	33.85 AV	54.00	-20.15	1.00 H	308	-2.95	36.80
4	9848.00	56.02 PK	74.00	-17.98	1.11 H	332	8.94	47.08
4	9848.00	45.95 AV	54.00	-8.05	1.11 H	332	-1.13	47.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.80 PK			1.08 V	25	75.95	31.85
1	*2462.00	98.20 AV			1.08 V	25	66.35	31.85
2	2483.50	65.35 PK	74.00	-8.65	1.07 V	10	33.36	31.99
2	2483.50	51.64 AV	54.00	-2.36	1.07 V	10	19.65	31.99
3	4924.00	46.28 PK	74.00	-27.72	1.07 V	12	9.47	36.80
3	4924.00	34.07 AV	54.00	-19.93	1.07 V	12	-2.74	36.80
4	9848.00	56.74 PK	74.00	-17.26	1.02 V	7	9.66	47.08
4	9848.00	46.29 AV	54.00	-7.71	1.02 V	7	-0.79	47.08

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



RECEIVER PARAMETERS

RADIATED WORST-CASE DATA: BELOW 1GHz

EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.33	30.39 QP	40.00	-9.61	1.00 H	238	16.17	14.22
2	99.98	30.60 QP	43.50	-12.90	1.50 H	109	21.23	9.37
3	133.03	38.94 QP	43.50	-4.56	1.50 H	115	26.40	12.54
4	166.07	40.58 QP	43.50	-2.92	1.50 H	130	27.27	13.31
5	199.12	38.67 QP	43.50	-4.83	1.50 H	88	27.39	11.28
6	278.82	33.37 QP	46.00	-12.63	1.00 H	319	18.62	14.74
7	333.25	36.97 QP	46.00	-9.03	1.00 H	355	20.65	16.31
8	364.35	33.08 QP	46.00	-12.92	1.00 H	100	16.10	16.98
9	399.34	31.00 QP	46.00	-15.00	1.00 H	13	12.95	18.06
10	479.04	34.52 QP	46.00	-11.48	1.50 H	136	14.76	19.76
11	560.68	37.32 QP	46.00	-8.68	1.50 H	151	15.79	21.53
12	595.67	32.55 QP	46.00	-13.45	1.00 H	247	9.80	22.76
13	640.38	36.39 QP	46.00	-9.61	1.00 H	295	13.22	23.17
14	720.08	31.46 QP	46.00	-14.54	1.00 H	229	6.77	24.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	36.73 QP	40.00	-3.27	1.00 V	40	23.77	12.96
2	64.99	31.76 QP	40.00	-8.24	1.50 V	73	18.78	12.98
3	121.36	33.55 QP	43.50	-9.95	1.00 V	202	22.24	11.31
4	166.07	34.47 QP	43.50	-9.03	1.00 V	268	21.16	13.31
5	199.12	27.12 QP	43.50	-16.38	1.00 V	145	15.84	11.28
6	360.46	31.25 QP	46.00	-14.75	1.00 V	226	14.39	16.86
7	560.68	30.16 QP	46.00	-15.84	1.00 V	253	8.63	21.53
8	640.38	28.93 QP	46.00	-17.07	1.00 V	256	5.76	23.17

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



802.11g OFDM MODULATION

EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	46.05 PK	74.00	-27.95	1.02 H	315	9.28	36.77
2	9648.00	54.12 PK	74.00	-19.88	1.08 H	318	7.45	46.67
2	9648.00	43.75 AV	54.00	-10.25	1.08 H	318	-2.92	46.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4824.00	47.78 PK	74.00	-26.22	1.00 V	347	11.01	36.77
1	4824.00	38.47 AV	54.00	-15.53	1.00 V	347	1.70	36.77
2	9648.00	55.68 PK	74.00	-18.32	1.37 H	133	9.01	46.67
2	9648.00	44.98 AV	54.00	-9.02	1.37 H	13	-1.69	46.67

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	46.32 PK	74.00	-27.68	1.03 H	318	9.54	36.78
2	9748.00	54.23 PK	74.00	-19.77	1.25 H	325	7.34	46.89
2	9748.00	43.82 AV	54.00	-10.18	1.25 H	325	-3.07	46.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	47.65 PK	74.00	-26.35	1.05 V	329	10.87	36.78
2	9748.00	55.72 PK	74.00	-18.28	1.02 V	315	8.83	46.89
2	9748.00	44.99 AV	54.00	-9.01	1.02 V	315	-1.90	46.89

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT	Mini-PCI Adapter	MEASUREMENT DETAIL	
MODEL	WL-850F	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	46.32 PK	74.00	-27.68	1.03 H	325	9.52	36.80
2	9848.00	54.25 PK	74.00	-19.75	1.05 H	325	7.17	47.08
2	9848.00	43.85 AV	54.00	-10.15	1.05 H	325	-3.23	47.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	47.81 PK	74.00	-26.19	1.03 V	325	11.01	36.80
2	9848.00	55.71 PK	74.00	-18.29	1.26 V	325	8.63	47.08
2	9848.00	44.98 AV	54.00	-9.02	1.26 V	325	-2.10	47.08

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK 30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS


802.11b DSSS MODULATION

EUT	Mini-PCI Adapter	MODEL	WL-850F
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.56	0.5	PASS
6	2437	11.56	0.5	PASS
11	2462	11.48	0.5	PASS



CH1

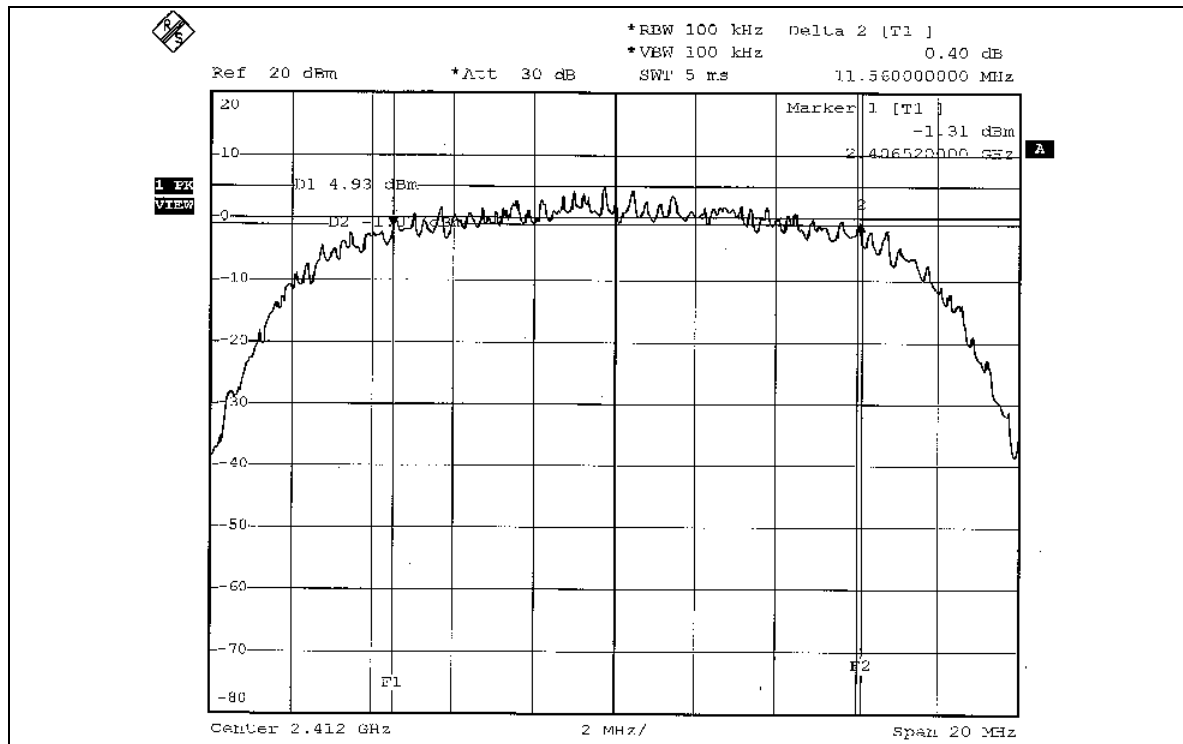


CH6

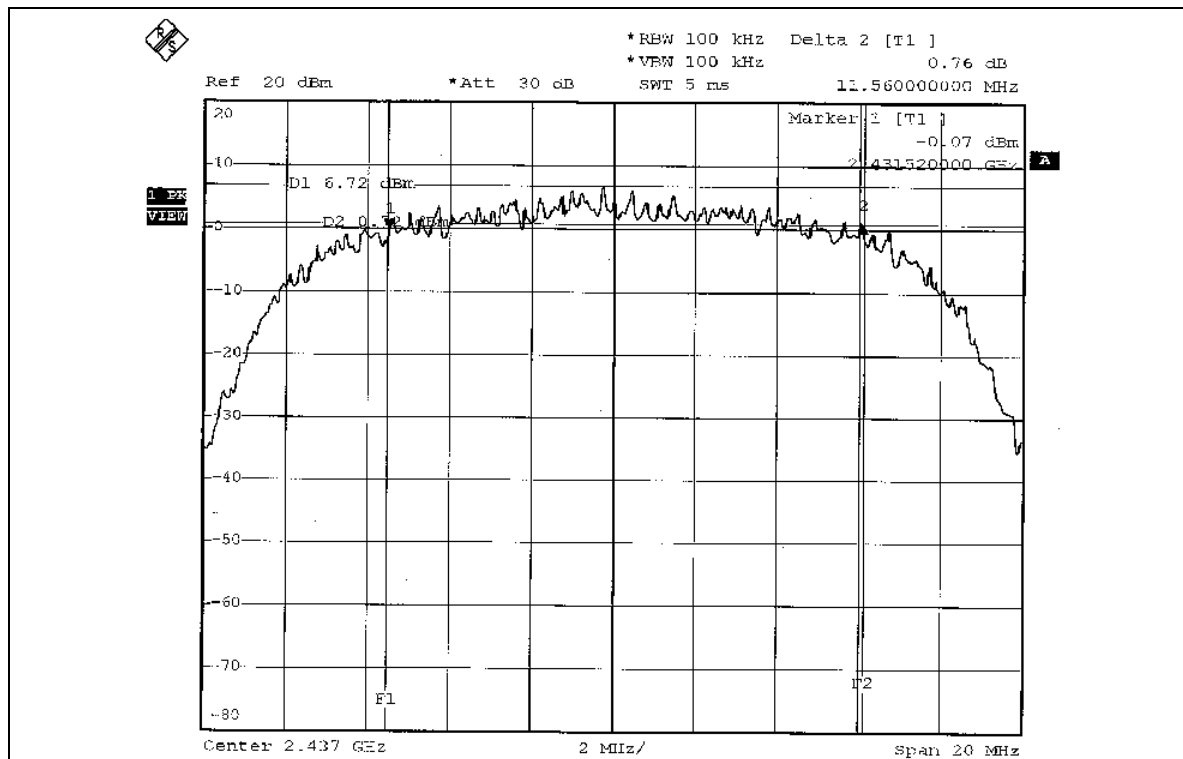



CH11

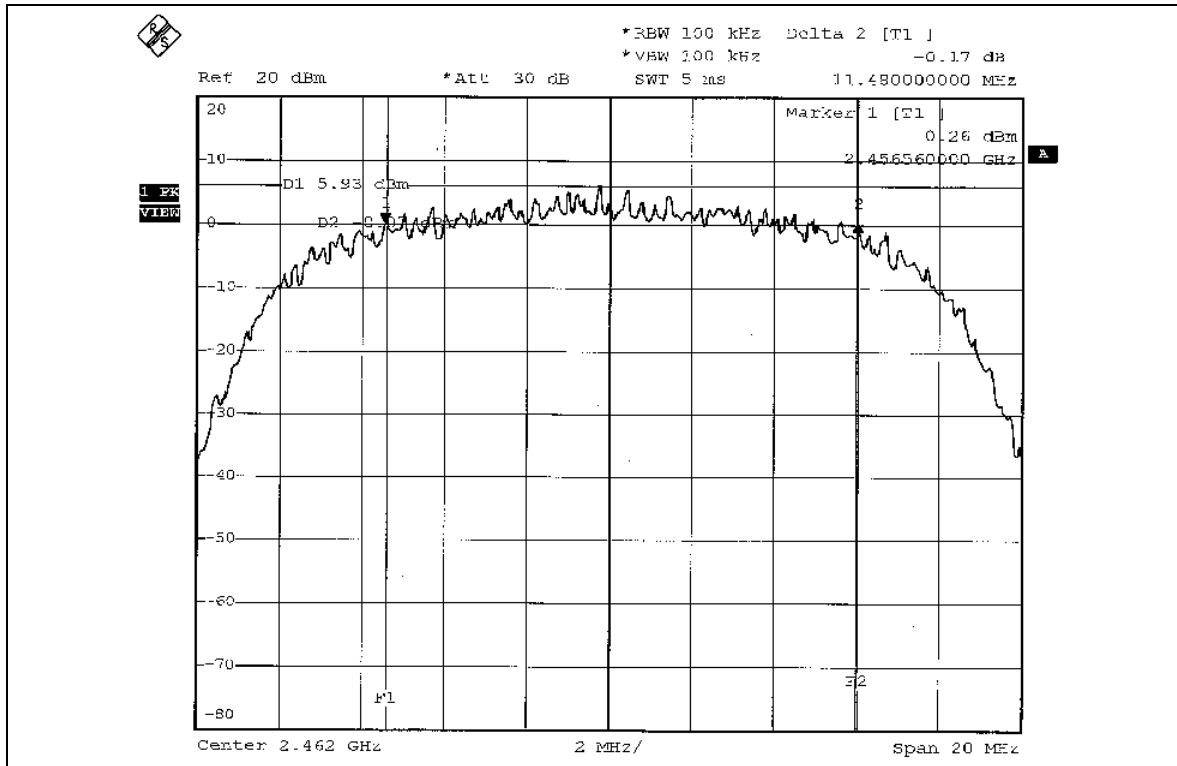




802.11g OFDM MODULATION

EUT	Mini-PCI Adapter	MODEL	WL-850F
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.48	0.5	PASS
6	2437	16.48	0.5	PASS
11	2462	16.44	0.5	PASS



CH1

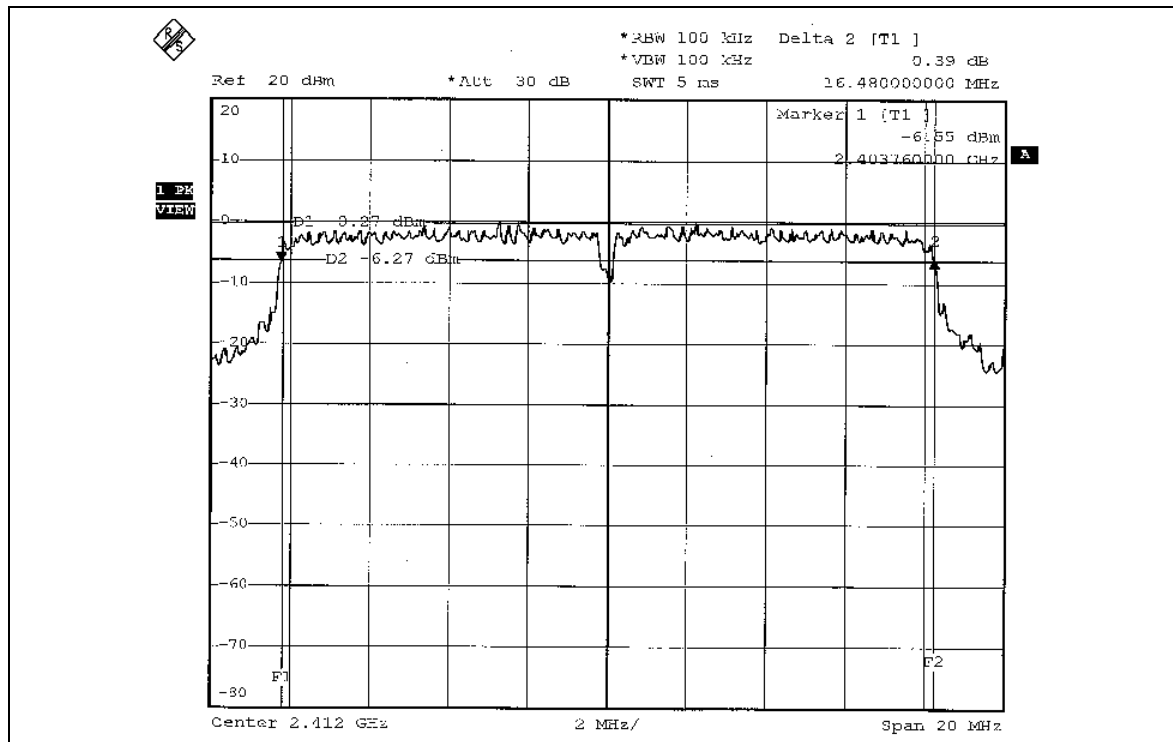


CH6

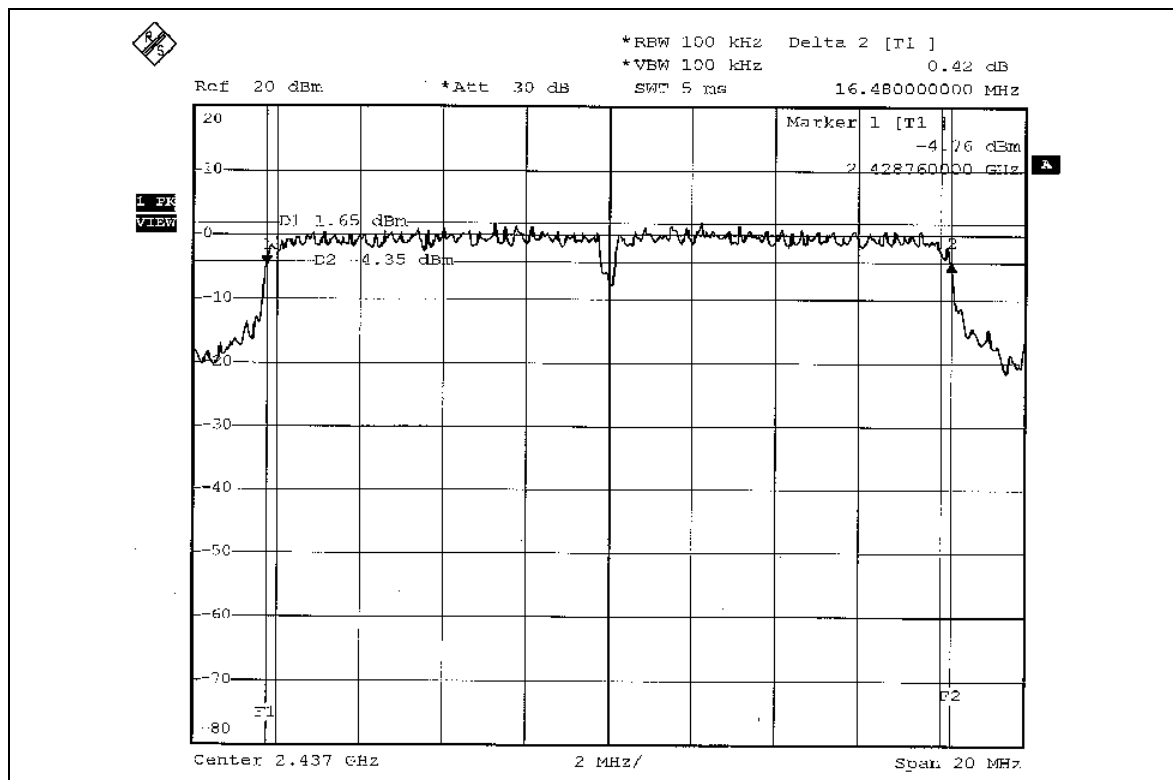



CH11

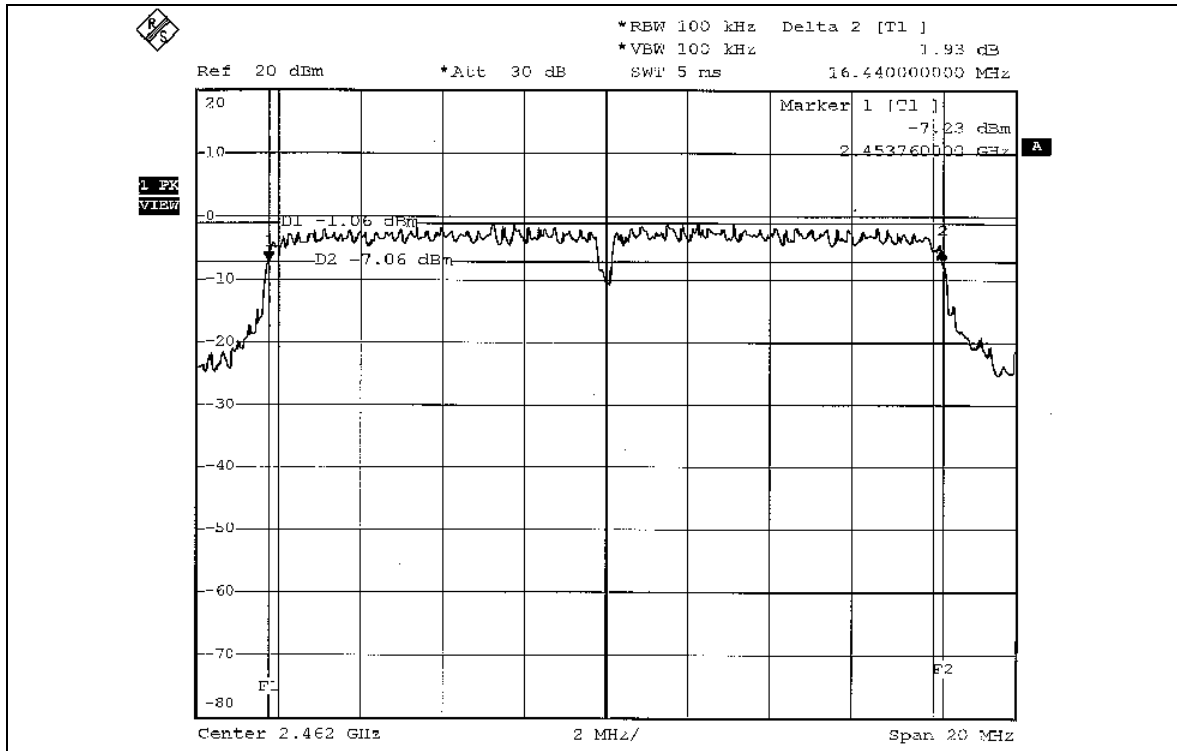

4.4 20dB BANDWIDTH MEASUREMENT

4.4.1 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.2 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.4.6 TEST RESULTS


802.11b DSSS MODULATION

EUT	Mini-PCI Adapter	MODEL	WL-850F
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	PASS/FAIL
1	2412	17.12	PASS
6	2437	17.12	PASS
11	2462	17.08	PASS



CH1

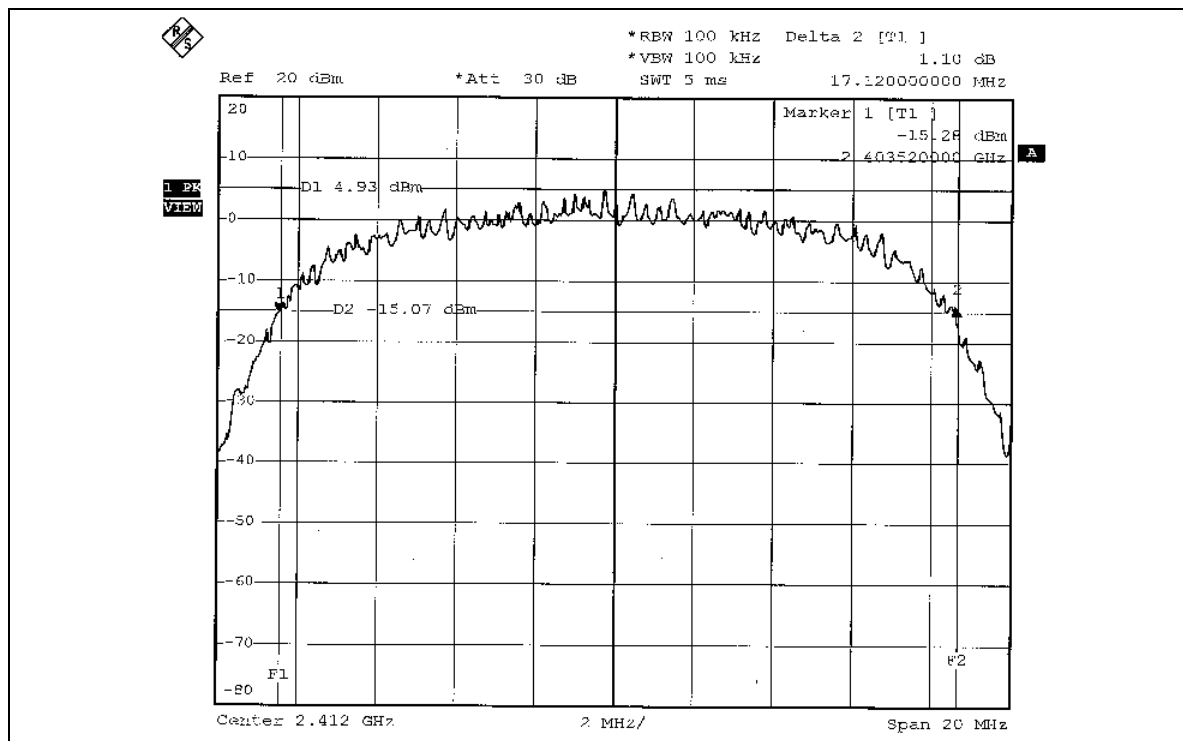


CH6

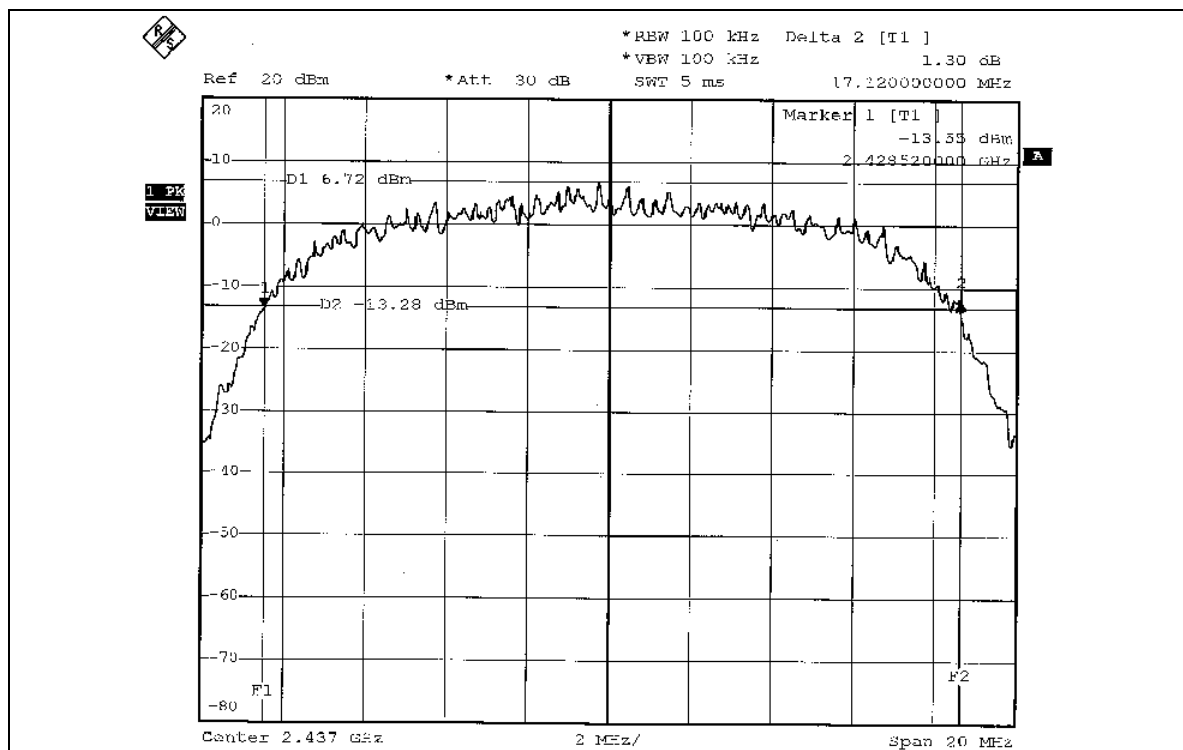



CH11

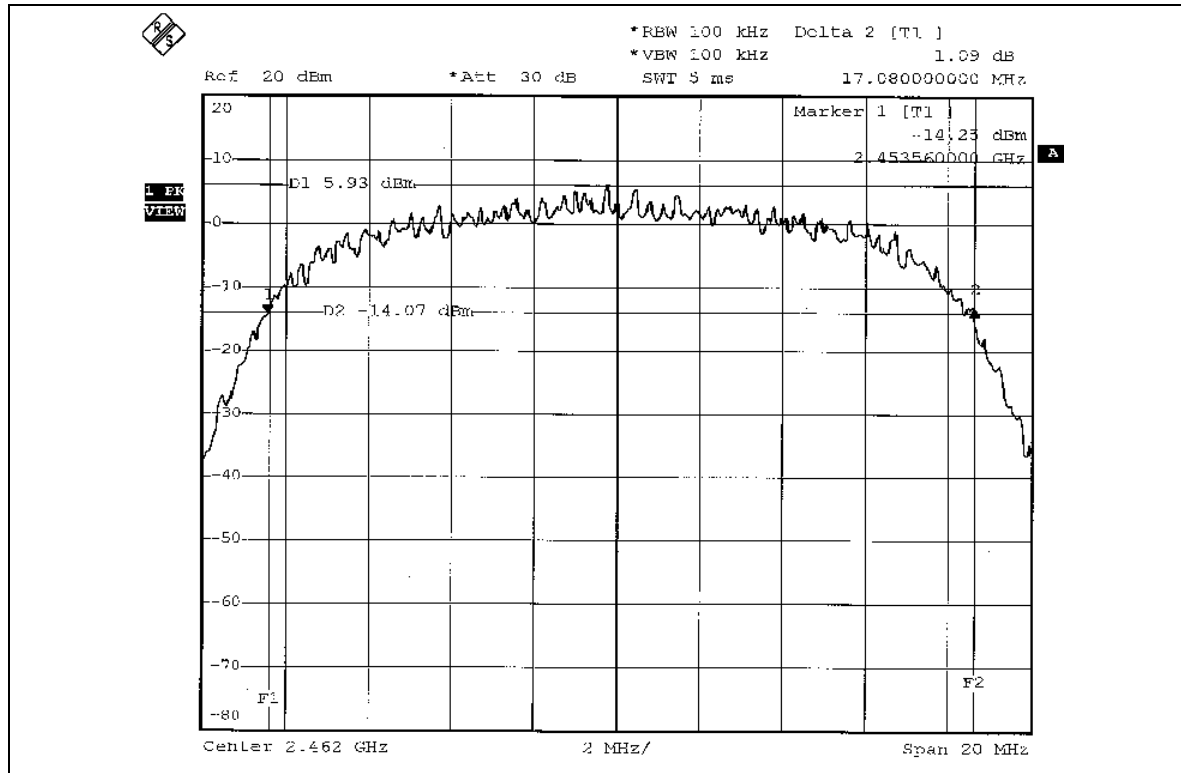




802.11g OFDM MODULATION

EUT	Mini-PCI Adapter	MODEL	WL-850F
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	PASS/FAIL
1	2412	18.72	PASS
6	2437	18.80	PASS
11	2462	18.48	PASS



CH1

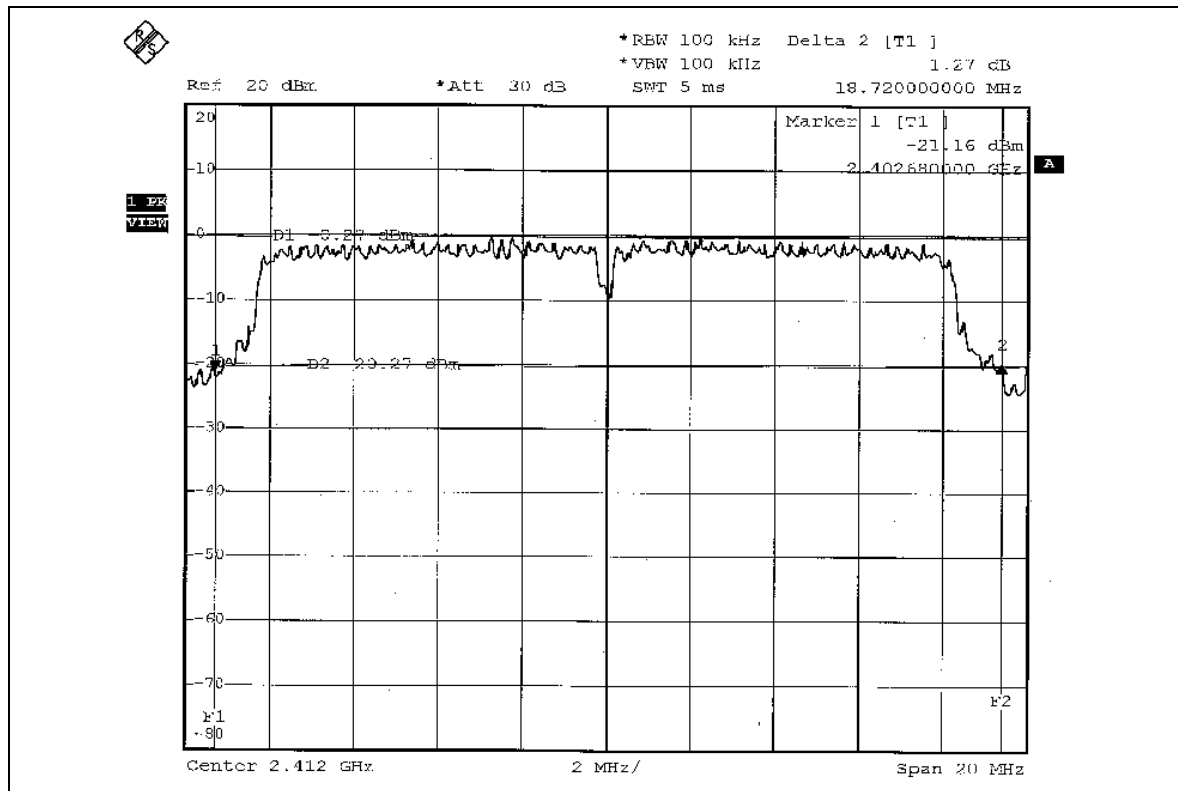


CH6

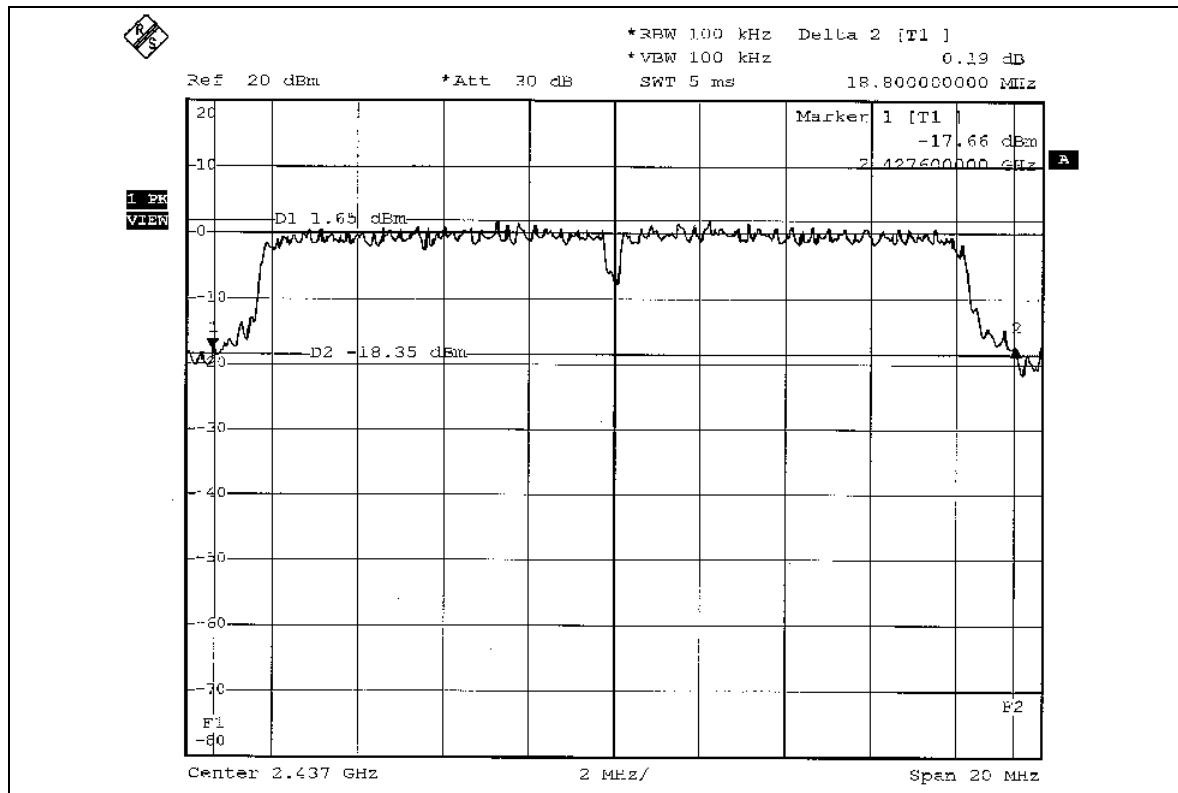



CH11

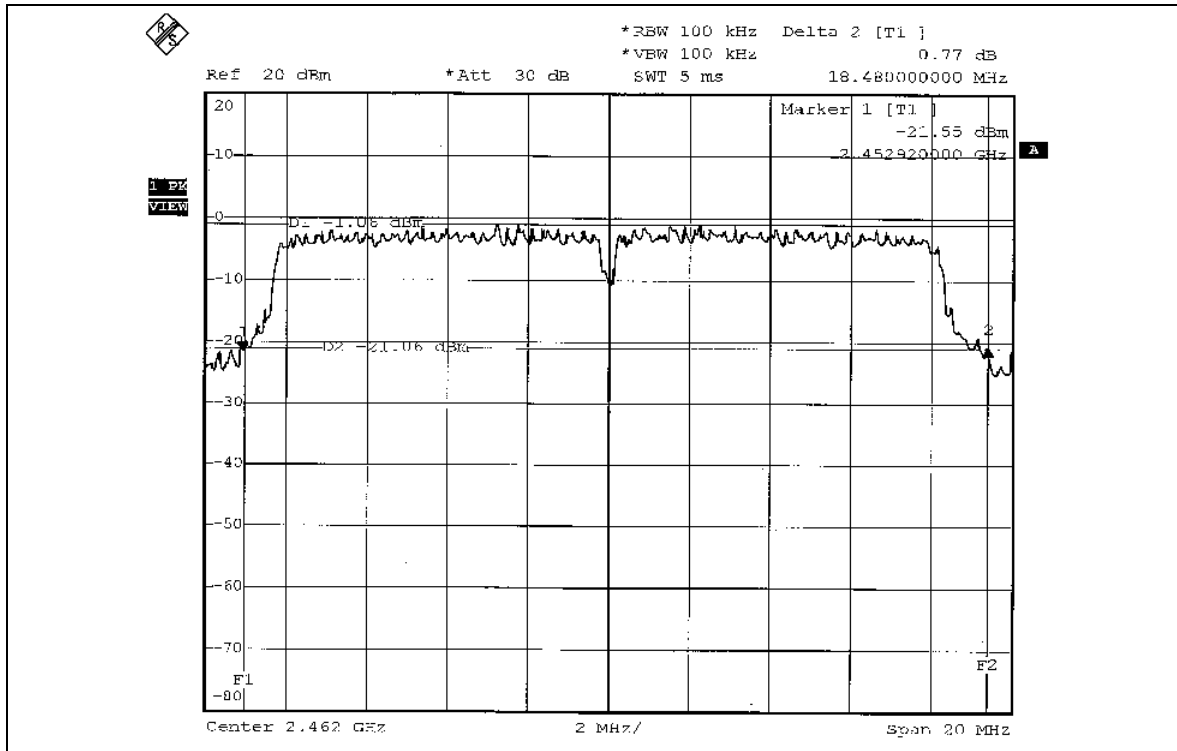



4.5 MAXIMUM PEAK OUTPUT POWER

4.5.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.5.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
POWER METER	E4416A	GB4129176	May 24, 2006
PEAK POWER SENSOR	E9327A	US40441181	May 24, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURES

The transmitter output was connected to the peak power meter.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

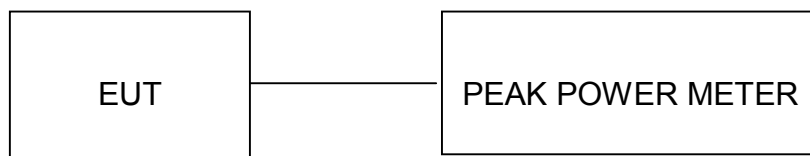

4.5.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.5.7 TEST RESULTS

802.11b DSSS MODULATION

EUT	Mini-PCI Adapter	MODEL	WL-850F
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	41.879	16.22	30	PASS
6	2437	61.094	17.86	30	PASS
11	2462	49.888	16.96	30	PASS

802.11g OFDM MODULATION

EUT	Mini-PCI Adapter	MODEL	WL-850F
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	76.033	18.81	30	PASS
6	2437	98.855	19.95	30	PASS
11	2462	57.677	17.64	30	PASS



4.6 POWER SPECTRAL DENSITY MEASUREMENT

4.6.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

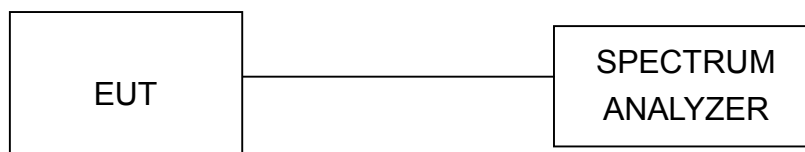

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6



4.6.7 TEST RESULTS


802.11b DSSS MODULATION

EUT	Mini-PCI Adapter	MODEL	WL-850F
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-8.78	8	PASS
6	2437	-6.92	8	PASS
11	2462	-7.69	8	PASS



CH1

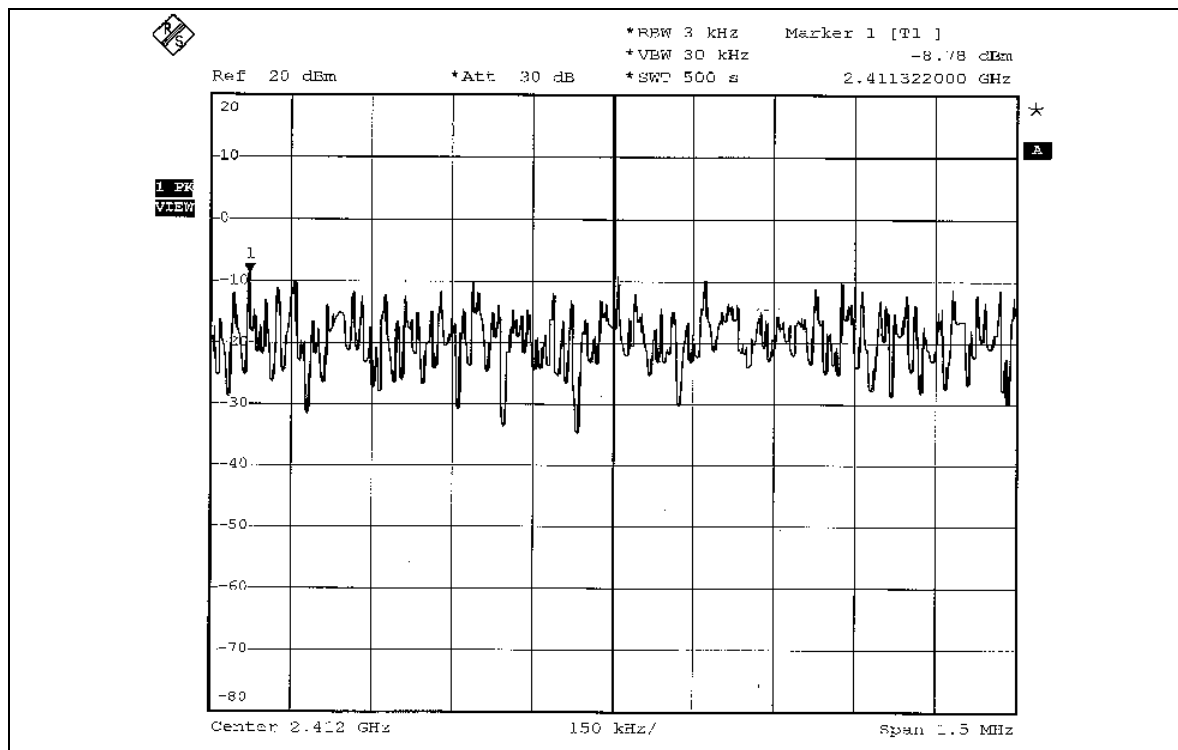


CH6

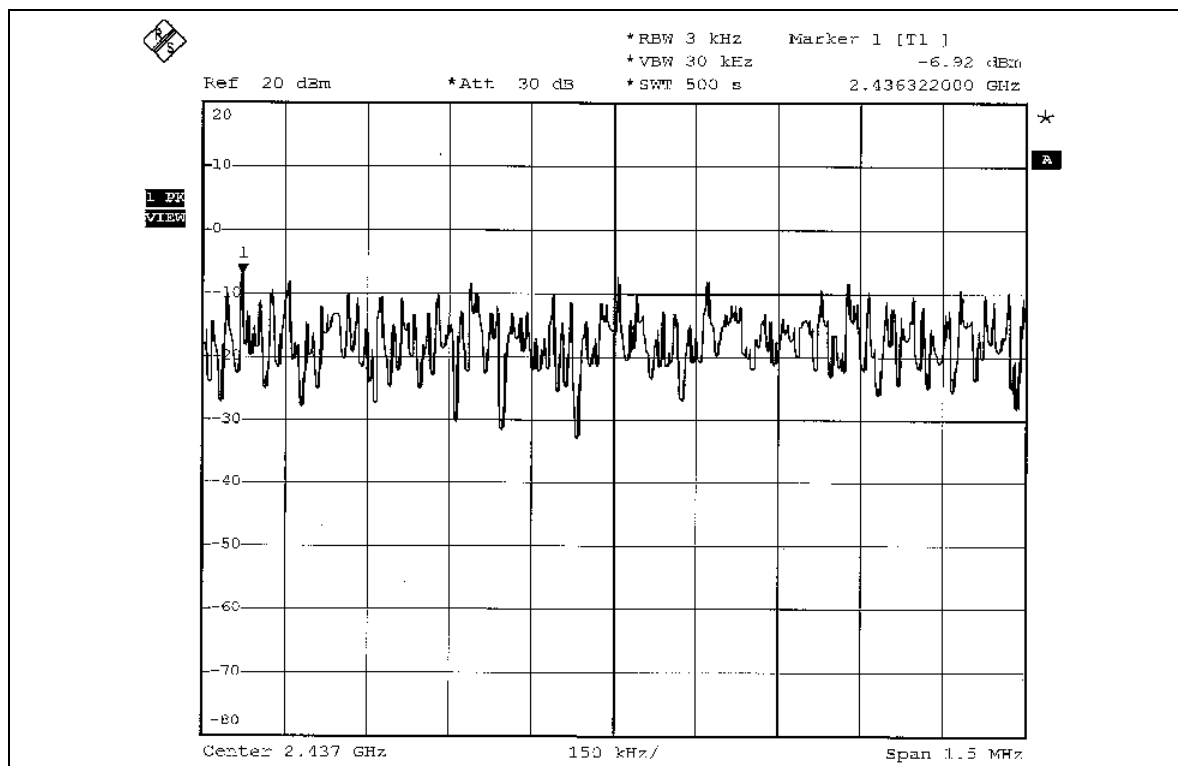



CH11

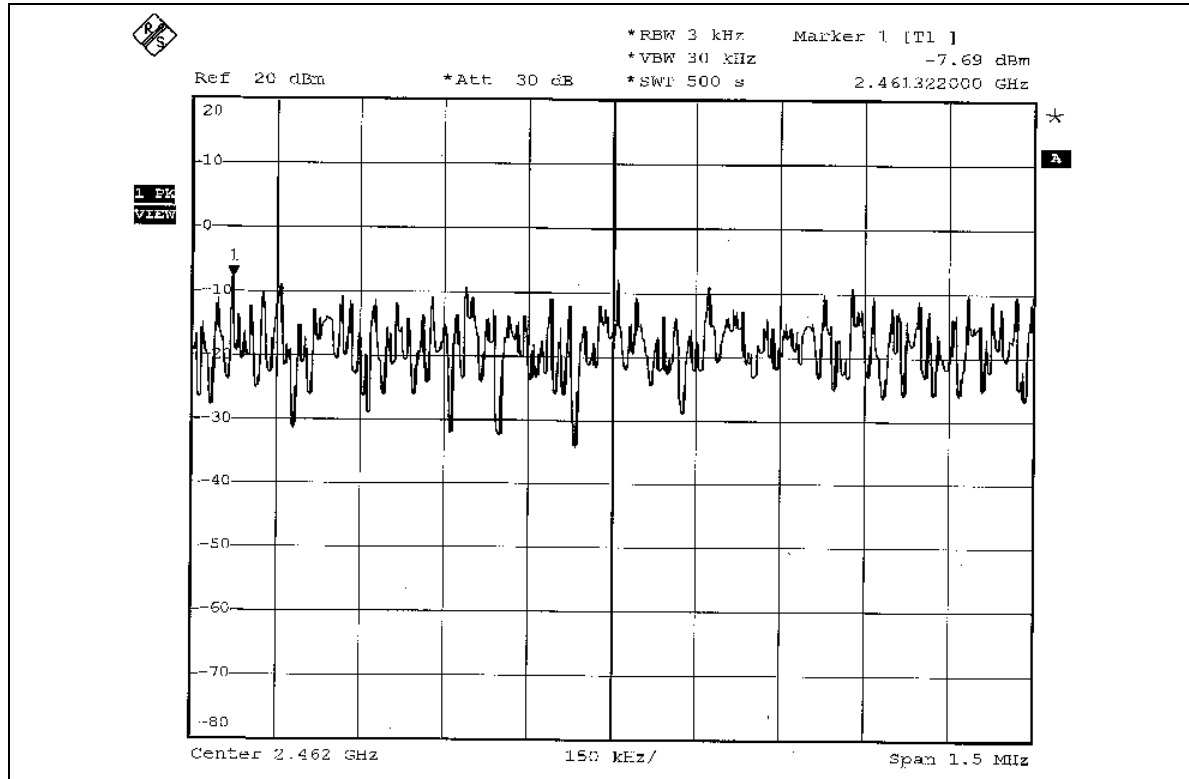




802.11g OFDM MODULATION

EUT	Mini-PCI Adapter	MODEL	WL-850F
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	26deg. C, 66%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-15.81	8	PASS
6	2437	-13.85	8	PASS
11	2462	-16.34	8	PASS



CH1

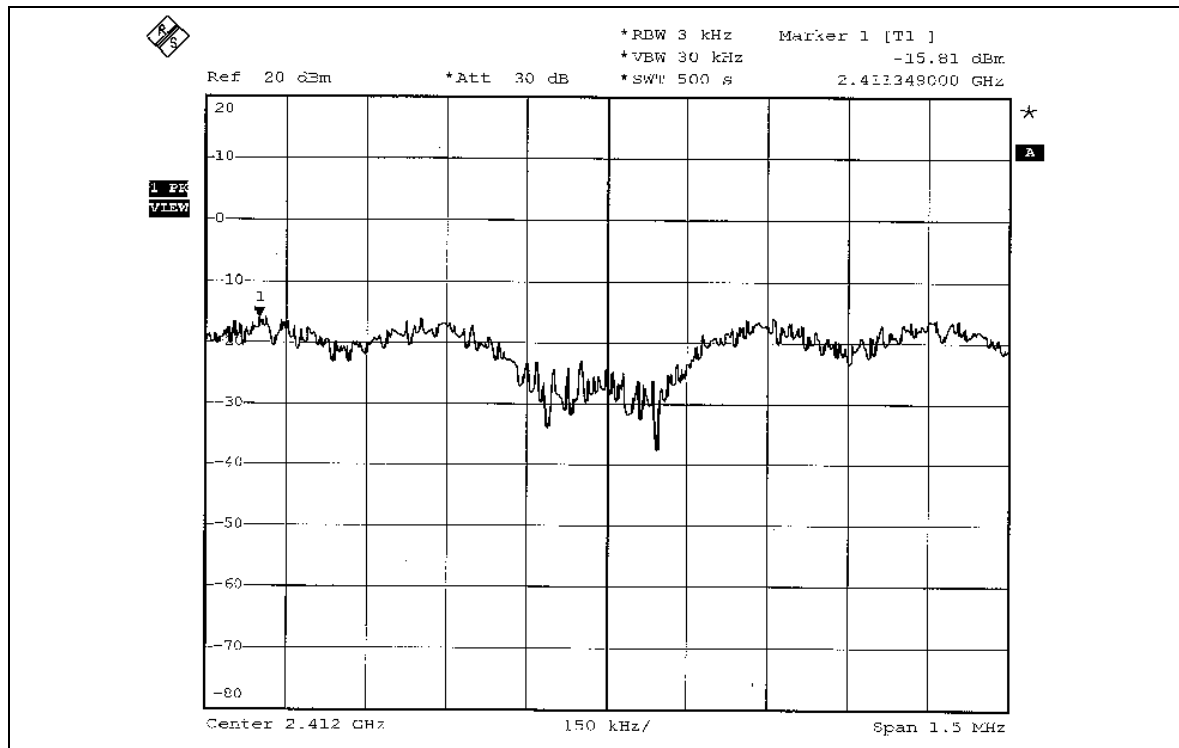


CH6

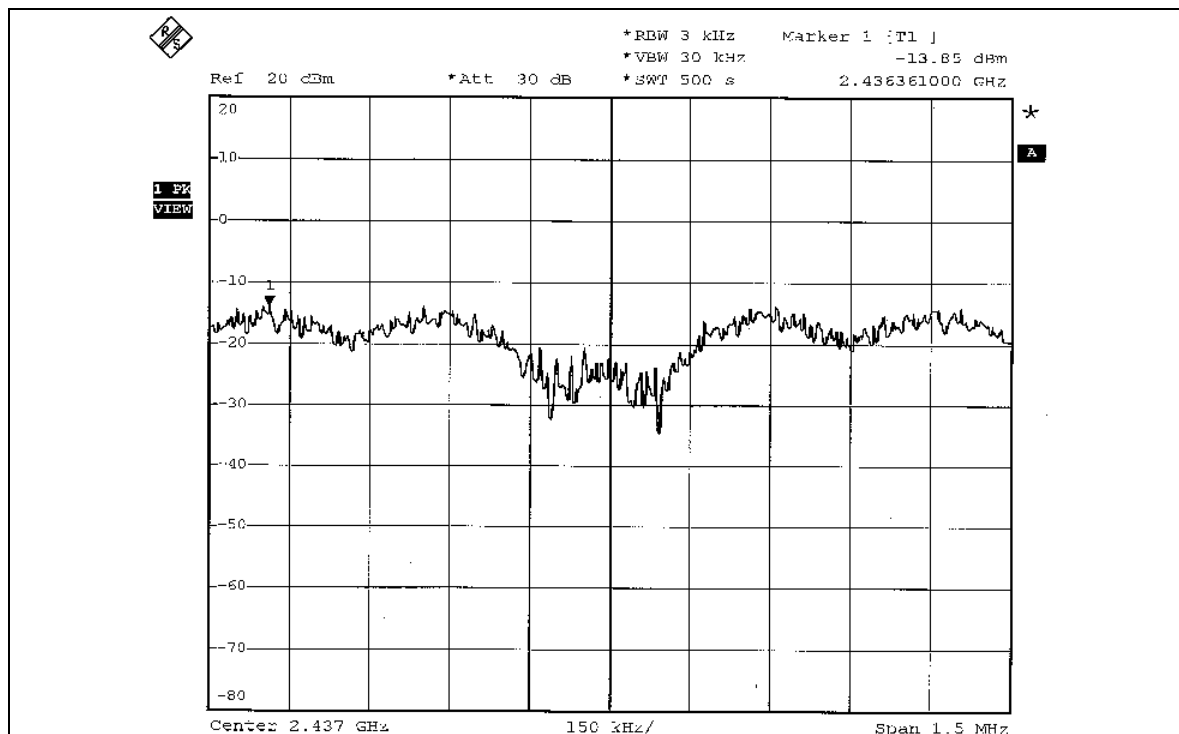



CH11

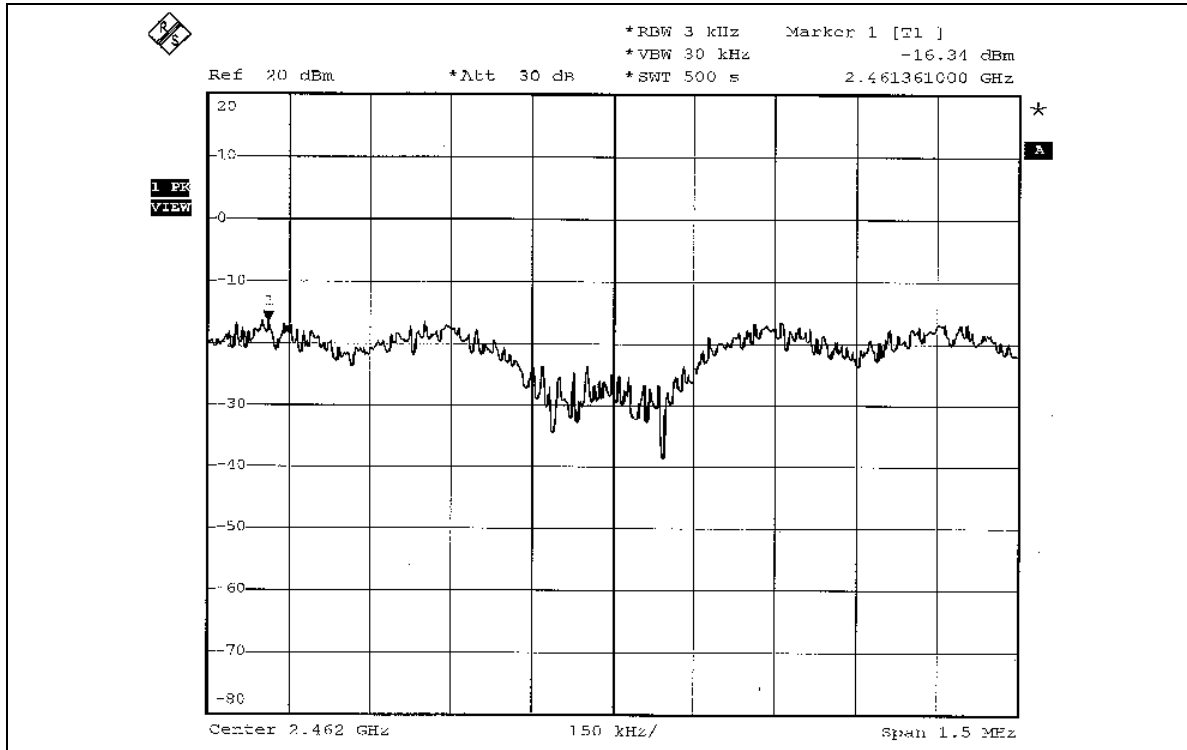



4.7 BAND EDGES MEASUREMENT

4.7.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 EUT OPERATING CONDITION

Same as Item 4.3.6



4.7.6 TEST RESULTS

The spectrum plots are attached on the following 12 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION

NOTE 1:



The band edge emission plot on page 66 show 51.74dBc delta between carrier maximum power and local maximum emission in restrict band (2.3554GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 111.26dBuV/m (Peak), so the maximum field strength in restrict band is $111.26 - 51.74 = 59.52$ dBuV/m, which is under 74dBuV/m limit.



The band edge emission plot on page 66 show 59.05dBc delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 103.34dBuV/m (Average), so the maximum field strength in restrict band is $103.34 - 59.05 = 44.29$ dBuV/m, which is under 54dBuV/m limit.

NOTE 2:

The band edge emission plot on the page 67 show 54.09dBc delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 111.90dBuV/m (Peak), so the maximum field strength in restrict band is $111.90 - 54.09 = 57.81$ dBuV/m, which is under 74dBuV/m limit.

The band edge emission plot on the page 68 show 58.16dBc delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 104.13dBuV/m (Average), so the maximum field strength in restrict band is $104.13 - 58.16 = 45.97$ dBuV/m, which is under 54dBuV/m limit.

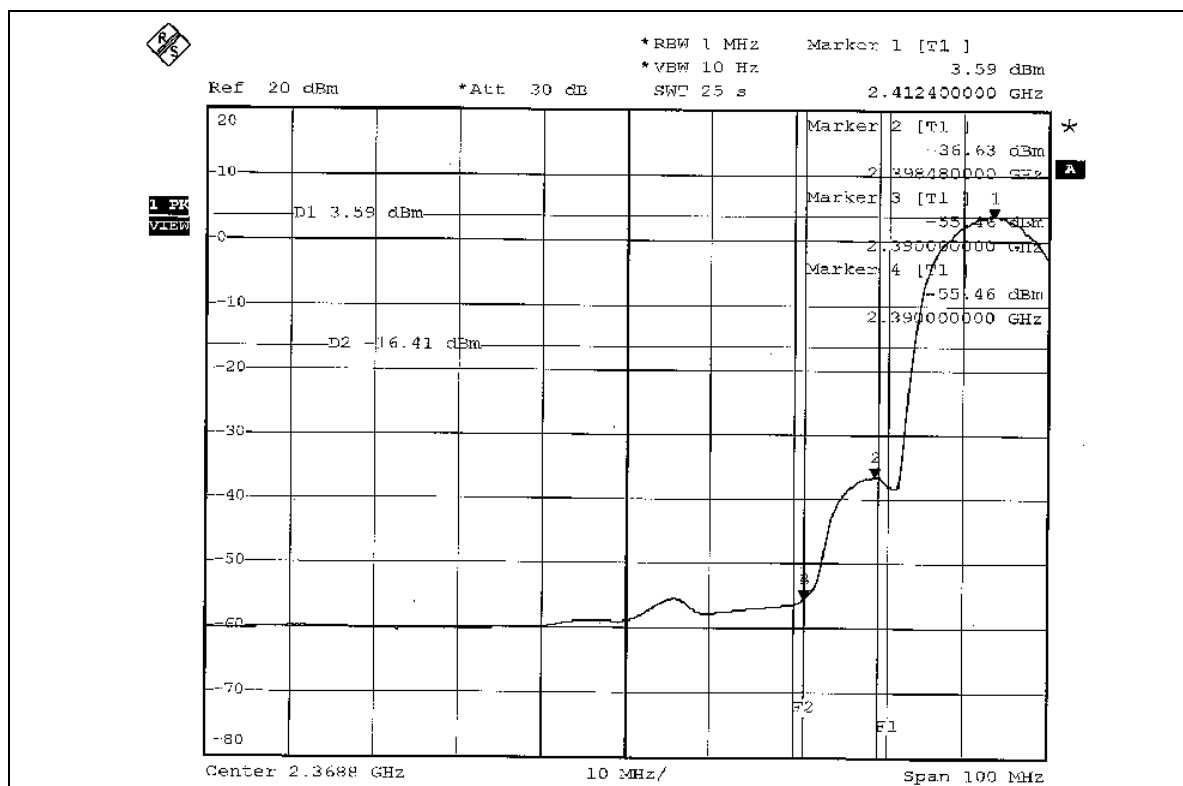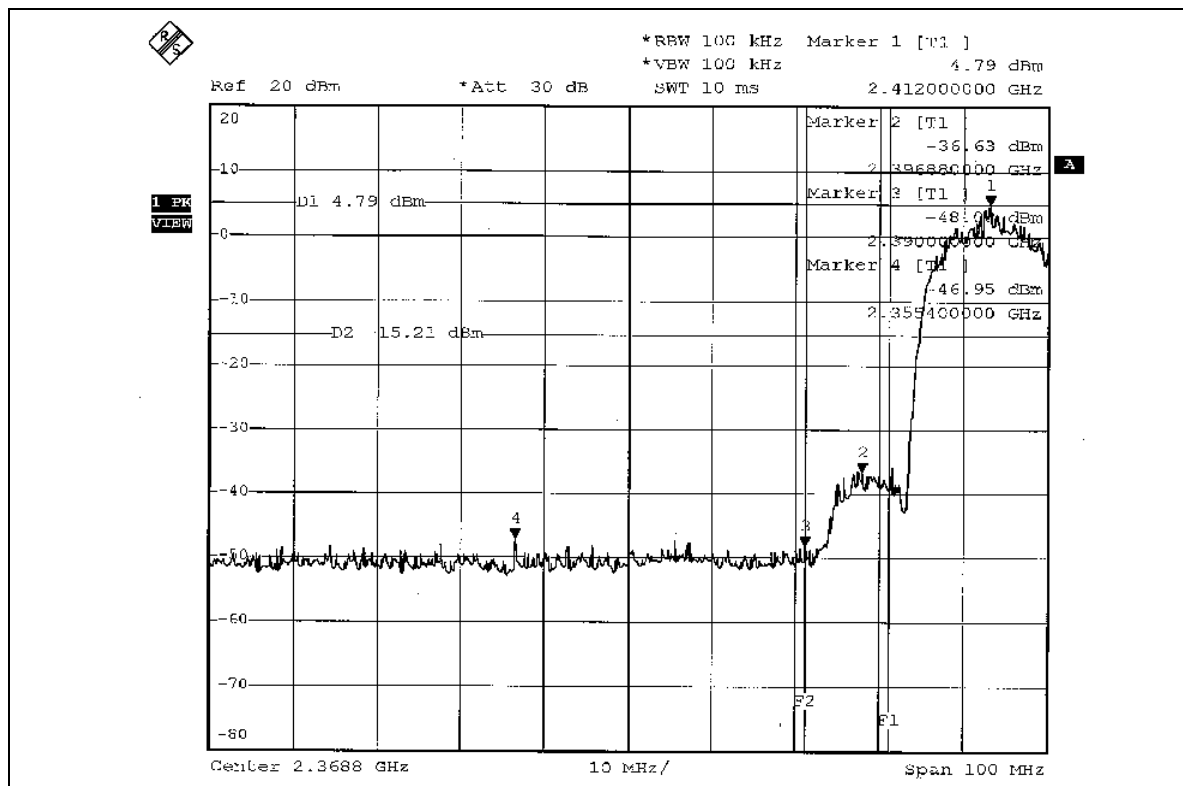

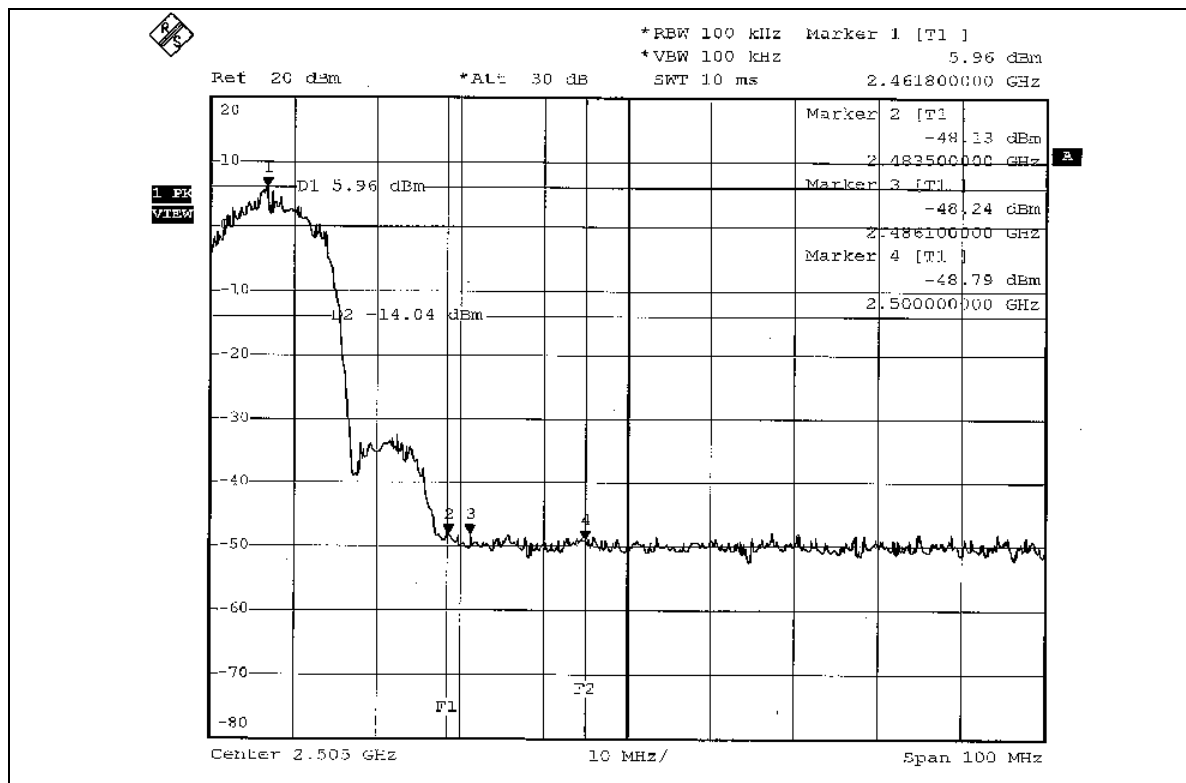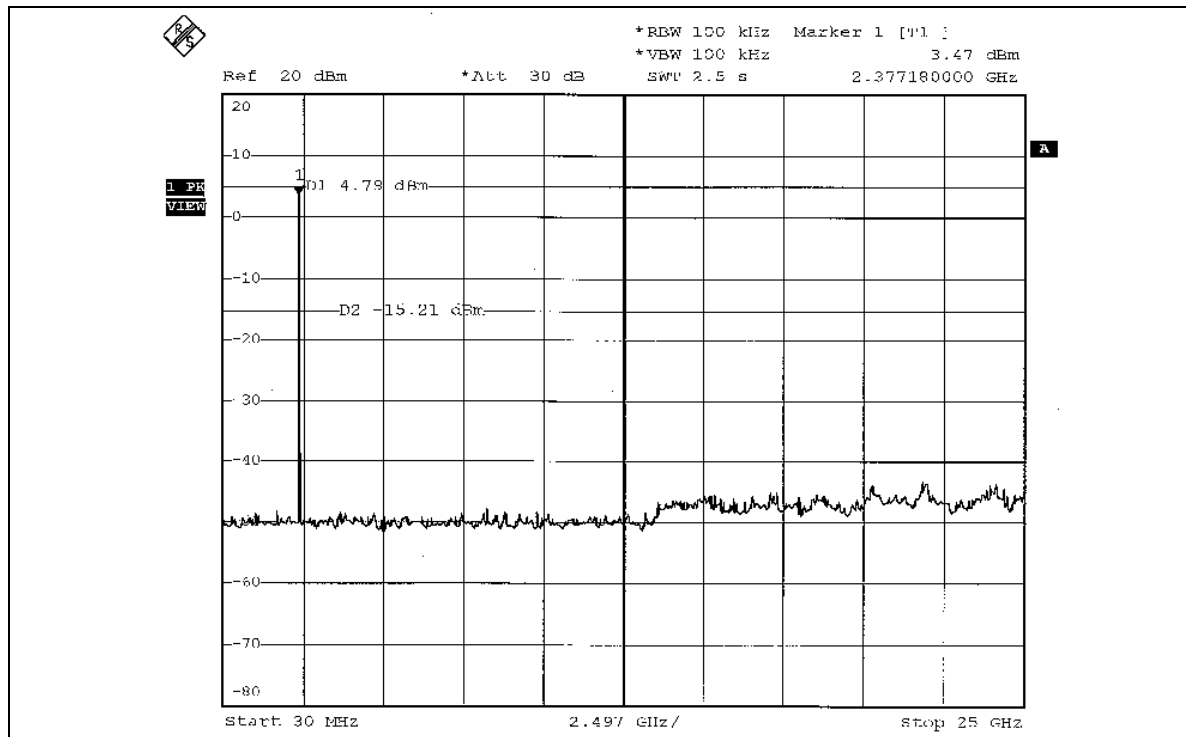



802.11g OFDM MODULATION

NOTE 1:



The band edge emission plot on page 70 show 43.75dBc delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 108.51dBuV/m (Peak), so the maximum field strength in restrict band is $108.51 - 43.75 = 64.76$ dBuV/m, which is under 74dBuV/m limit.



The band edge emission plot on page 70 show 47.46dBc delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 98.85dBuV/m (Average), so the maximum field strength in restrict band is $98.85 - 47.46 = 51.39$ dBuV/m, which is under 54dBuV/m limit.

NOTE 2:

The band edge emission plot on the page 71 show 44.84dBc delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 107.80dBuV/m (Peak), so the maximum field strength in restrict band is $107.80 - 44.84 = 62.96$ dBuV/m, which is under 74dBuV/m limit.

The band edge emission plot on the page 72 show 48.14dBc delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 98.20dBuV/m (Average), so the maximum field strength in restrict band is $98.20 - 48.14 = 50.06$ dBuV/m, which is under 54dBuV/m limit.

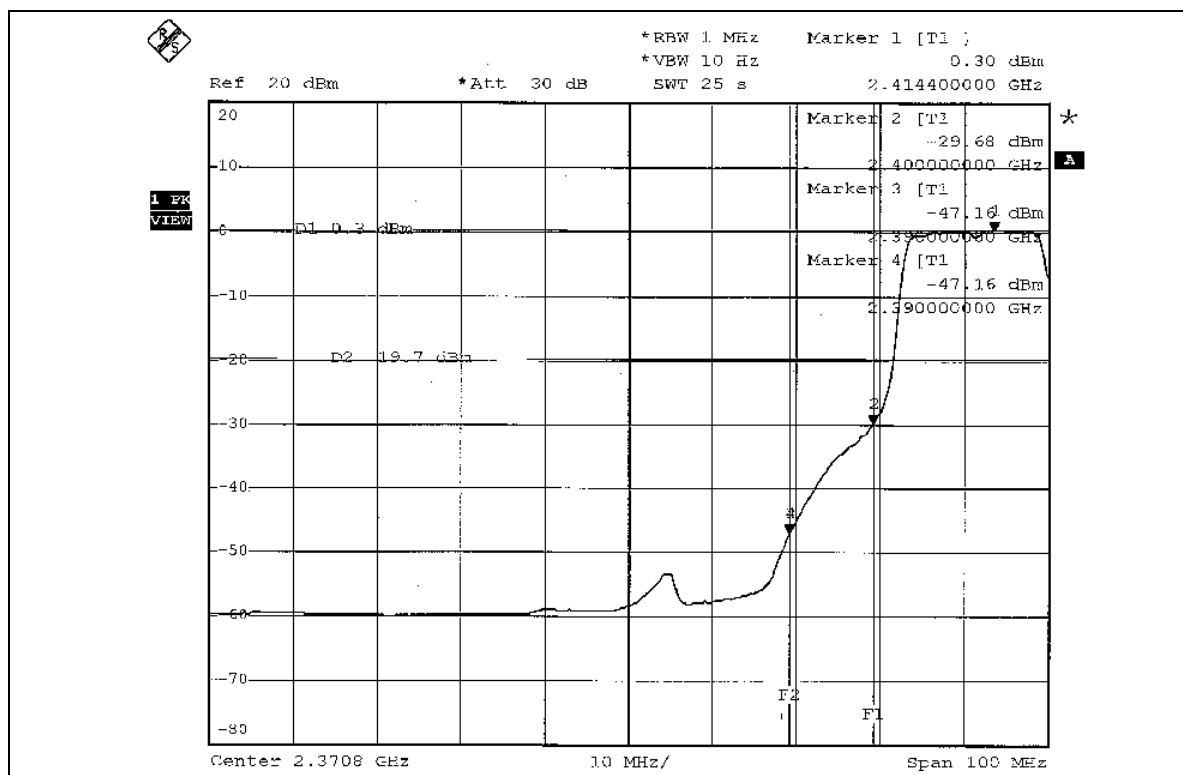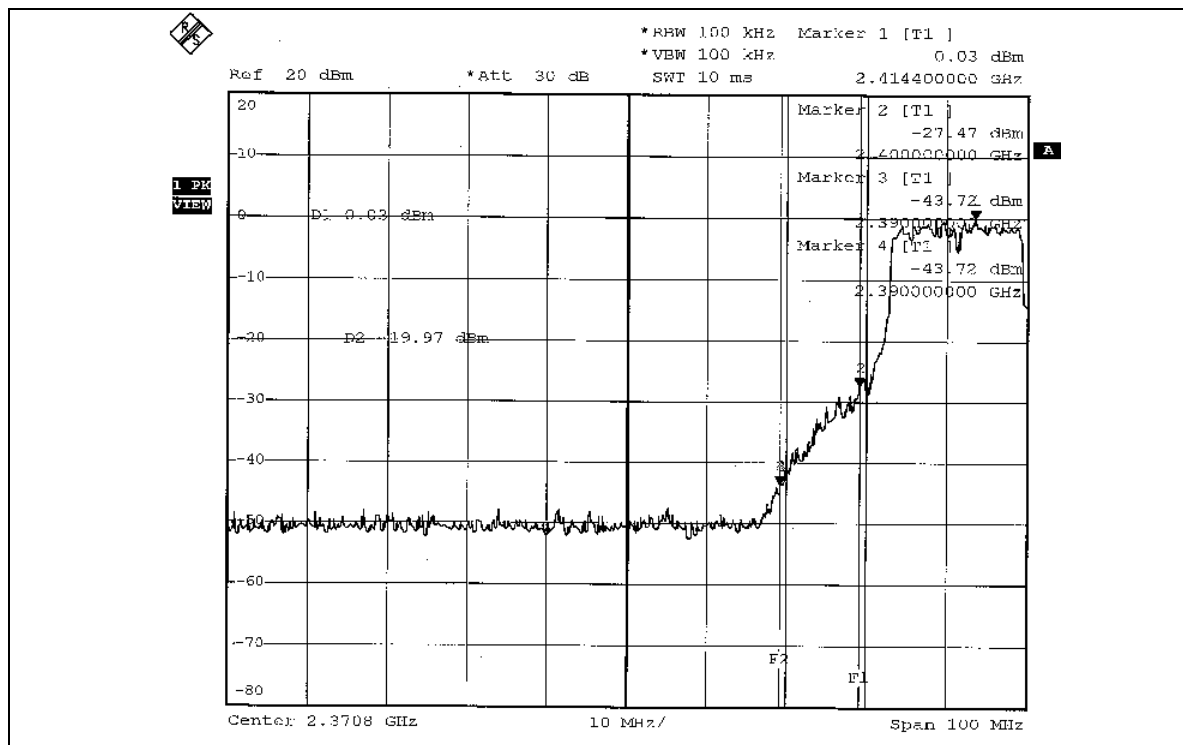

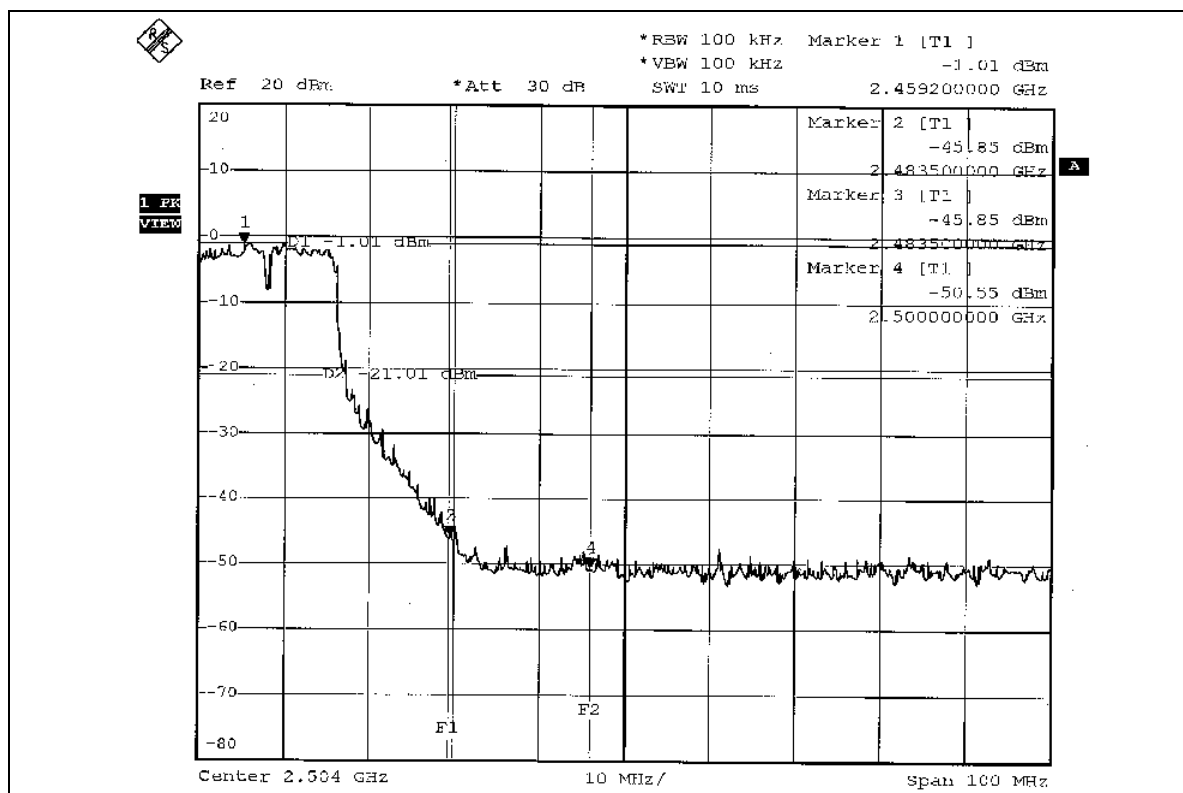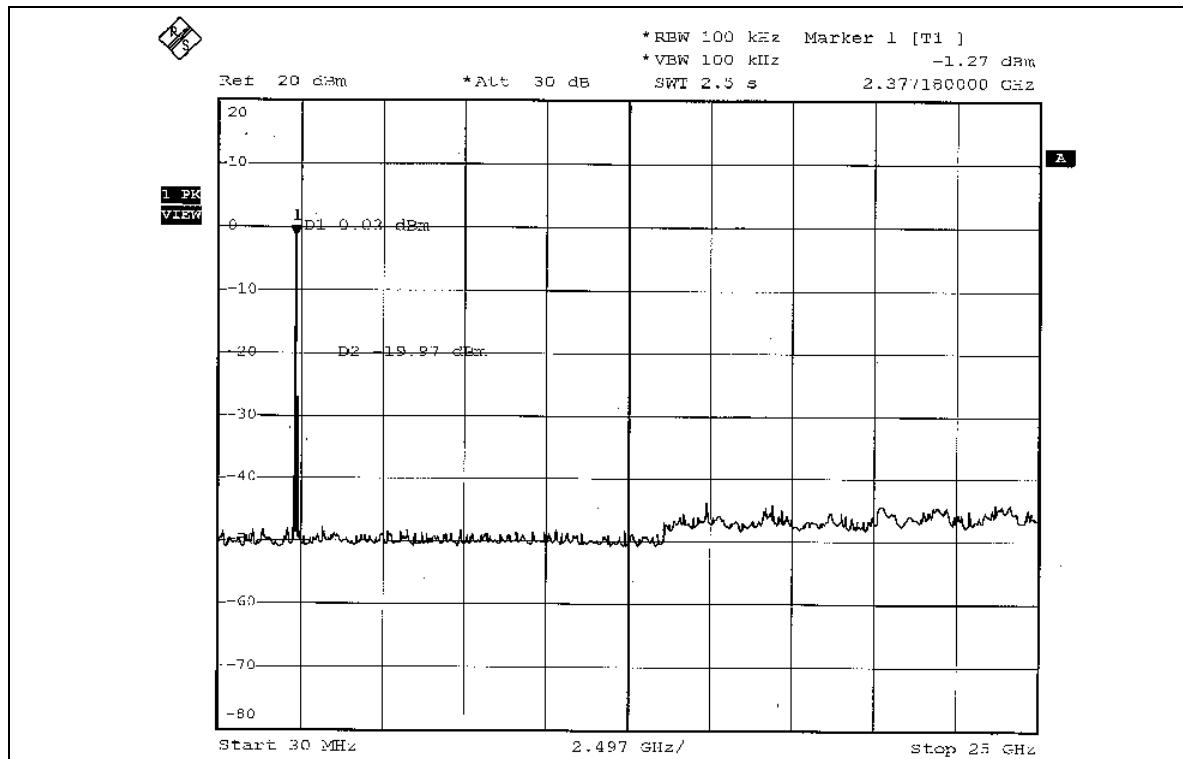



4.8 ANTENNA REQUIREMENT

4.8.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.8.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with UFL antenna connector. The maximum Gain of the antenna is 1.948dBi.



5. PHOTOGRAPHS OF THE TEST CONFIGURATION


CONDUCTED EMISSION TEST





RADIATED EMISSION TEST

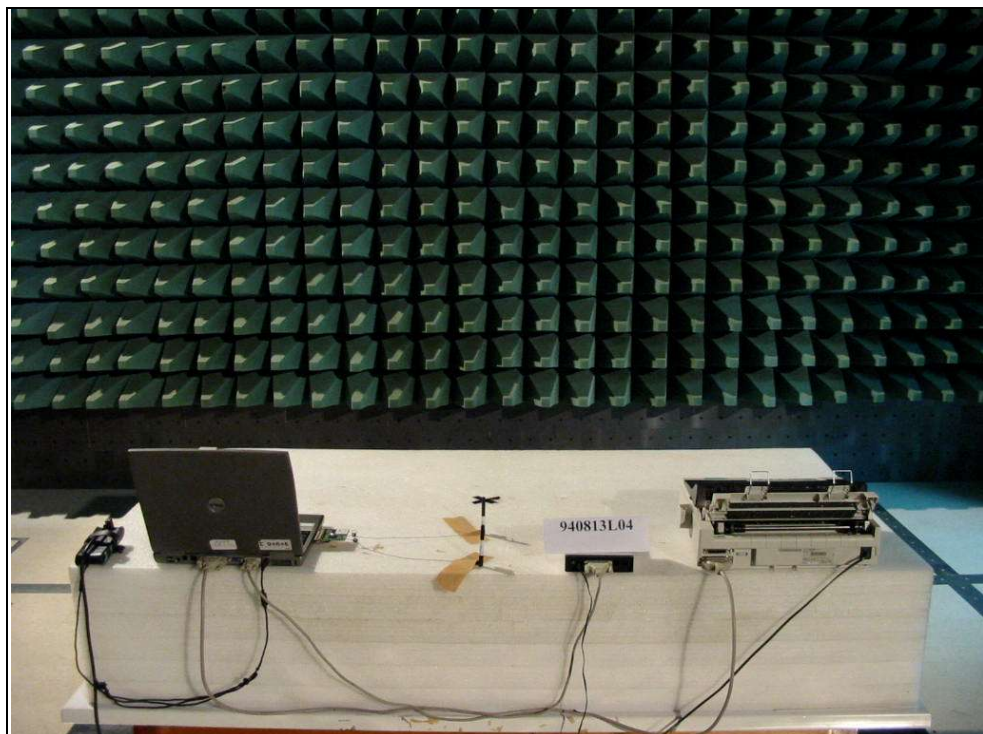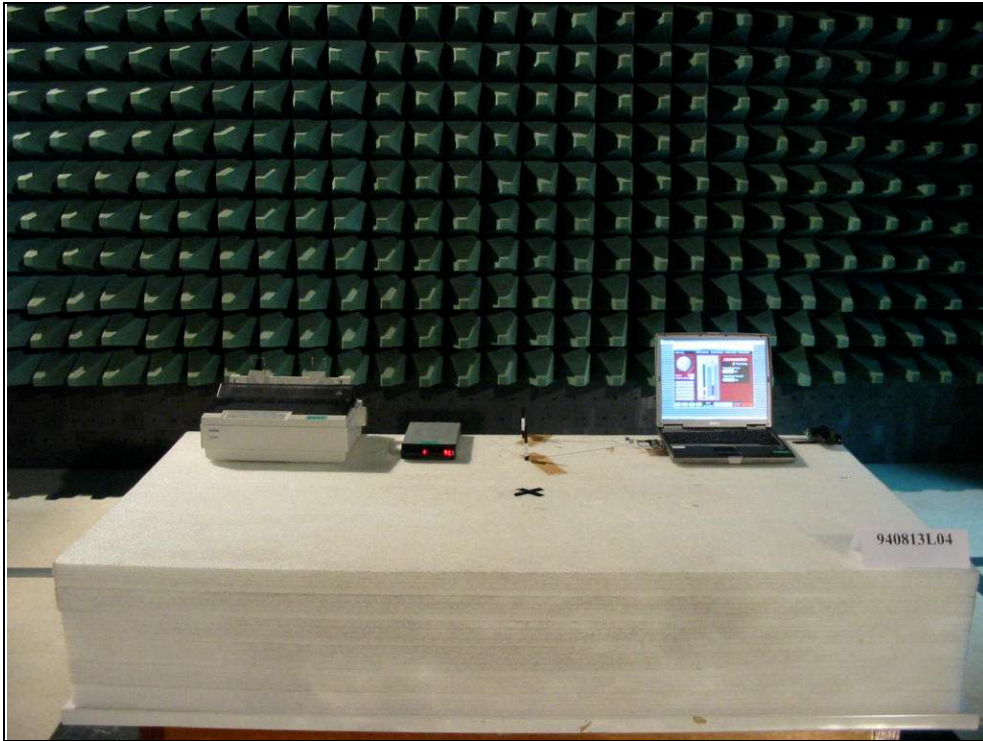

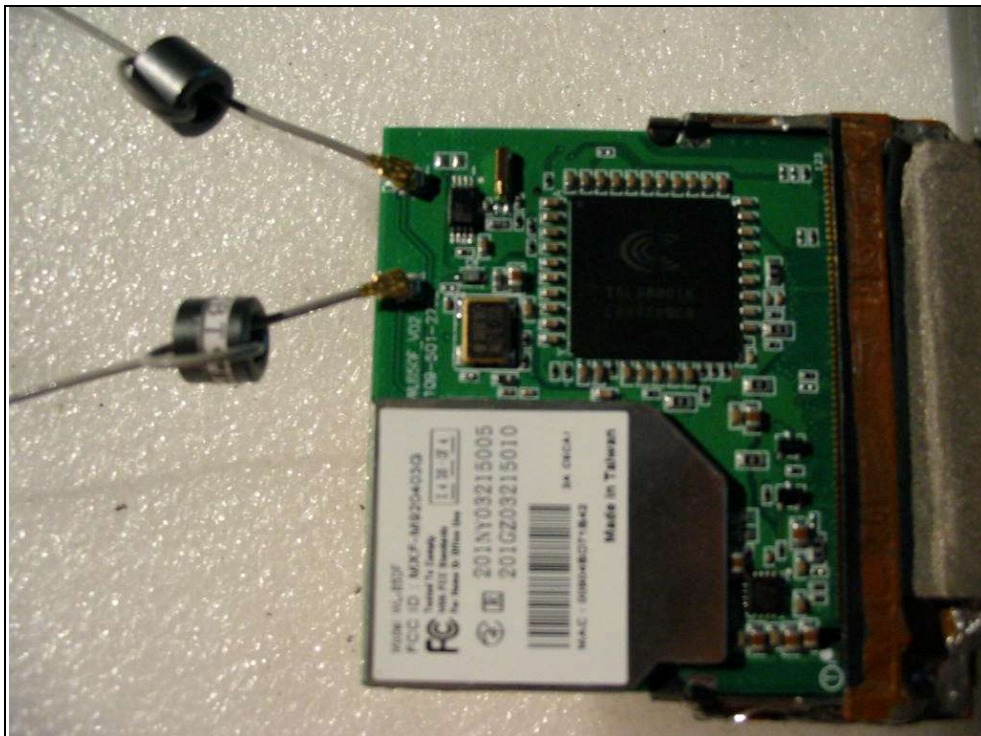



6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also