



FCC TEST REPORT

REPORT NO.: RF920813R01

MODEL NO.: WMIB-100GS

RECEIVED: August 15, 2003

TESTED: August 11 ~ August 16, 2003

APPLICANT: Gemtek Technology Co., Ltd.

ADDRESS: No. 1, Jen Ai Road, Hsinchu Industrial Park,
Hukou, Hsinchu, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 61 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
4	TEST TYPES AND RESULTS	8
4.1	CONDUCTED EMISSION MEASUREMENT	8
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	8
4.1.2	TEST INSTRUMENTS	8
4.1.3	TEST PROCEDURES	9
4.1.4	DEVIATION FROM TEST STANDARD	9
4.1.5	TEST SETUP	10
4.1.6	EUT OPERATING CONDITIONS	10
4.1.7	TEST RESULTS	11
4.2	RADIATED EMISSION MEASUREMENT	17
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	17
4.2.2	TEST INSTRUMENTS	18
4.2.3	TEST PROCEDURES	19
4.2.4	DEVIATION FROM TEST STANDARD	19
4.2.5	TEST SETUP	20
4.2.6	EUT OPERATING CONDITIONS	20
4.2.7	TEST RESULTS	21
4.3	6dB BANDWIDTH MEASUREMENT.....	29
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	29
4.3.2	TEST INSTRUMENTS	29
4.3.3	TEST PROCEDURE	30
4.3.4	DEVIATION FROM TEST STANDARD	30
4.3.5	TEST SETUP	30
4.3.6	EUT OPERATING CONDITIONS	30
4.3.7	TEST RESULTS	31
4.4	MAXIMUM PEAK OUTPUT POWER	39
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	39
4.4.2	TEST INSTRUMENTS	39
4.4.3	TEST PROCEDURES	40



4.4.4	DEVIATION FROM TEST STANDARD	40
4.4.5	TEST SETUP	40
4.4.6	EUT OPERATING CONDITIONS	40
4.4.7	TEST RESULTS	41
4.5	POWER SPECTRAL DENSITY MEASUREMENT	42
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	42
4.5.2	TEST INSTRUMENTS	42
4.5.3	TEST PROCEDURE	43
4.5.4	DEVIATION FROM TEST STANDARD	43
4.5.5	TEST SETUP	43
4.5.6	EUT OPERATING CONDITIONS	43
4.5.7	TEST RESULTS	44
4.6	BAND EDGES MEASUREMENT	52
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	52
4.6.2	TEST INSTRUMENTS	52
4.6.3	TEST PROCEDURE	52
4.6.4	DEVIATION FROM TEST STANDARD	52
4.6.5	EUT OPERATING CONDITION	53
4.6.6	TEST RESULTS	53
4.7	ANTENNA REQUIREMENT	58
4.7.1	STANDARD APPLICABLE	58
4.7.2	ANTENNA CONNECTED CONSTRUCTION	58
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	59
6	INFORMATION ON THE TESTING LABORATORIES	61



1 CERTIFICATION

PRODUCT : Wireless 11g mini-PCI Adapter
MODEL NO. : WMIB-100GS
BRAND : Gemtek
TEST ITEM: Engineering Sample
APPLICANT : Gemtek Technology Co., Ltd.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from August 11 ~ August 16, 2003, The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: Rennie Wang, **DATE:** August 19, 2003
Rennie Wang
APPROVED BY: Dr. Alan Lane, JVP, **DATE:** August 19, 2003



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -1.32dBuV at 0.494MHz / 0.498MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -2.40dBuV/m at 7388.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

NOTE: The information of measurement uncertainty is available upon the customer's request.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless 11g mini-PCI Adapter
MODEL NO.	WMIB-100GS
POWER SUPPLY	3.3VDC from host equipment
MODULATION	DSSS, OFDM
TRANSFER RATE	up to 54Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
CHANNEL SPACING	5MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	15.4dBm
ANTENNA TYPE	PIFA Antenna with 3dBi antenna gain
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The Wireless 11g mini-PCI Adapter is specified to a Tablet PC which brand is Compal and the model name is M1300.
2. The Tablet PC is powered by the following adapter:

BRAND	DELTA ELECTRONICS, INC.
MODEL	ADP-50HH REV.A
INPUT	100-240V, 1.5A
OUTPUT	19V----2.64A

3. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
4. The EUT complies with IEEE 802.11g draft standards, and backwards compatible with IEEE 802.11b products.
5. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

The EUT was pre-tested with the following condition:

Since the EUT is considered a portable unit, it was pre-tested on the positioned of 3 axis. The worst case was found when positioned on X-plane. Therefore only the test data of this X-plane was used for Radiated test.

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate 11Mbps with CCK technique and 6Mbps with OFDM technique, the worst cases, were chosen for final test.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Wireless 11g mini-PCI Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 15, Subpart C. (15.247)

ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	838251/021	Jan. 20, 2004
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	100218	Dec. 18, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100219	Dec. 18, 2003
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100220	Dec. 18, 2003
ROHDE & SCHWARZ 4-wire ISN	ENY41	837032/016	Nov. 29 2003
ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Nov. 29 2003
Software	Cond-V2M3	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C10.01	May. 01, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010770	Mar. 24, 2004
SUHNER Terminator (For ROHDE & SCHWARZ LISN)	65BNC-5001	E1-010773	Apr. 06, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. “*”: These equipment are used for conducted telecom port test only (if tested).
 3. The test was performed in ADT Shielded Room No. 10.
 4. The VCCI Site Registration No. is C-1312.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

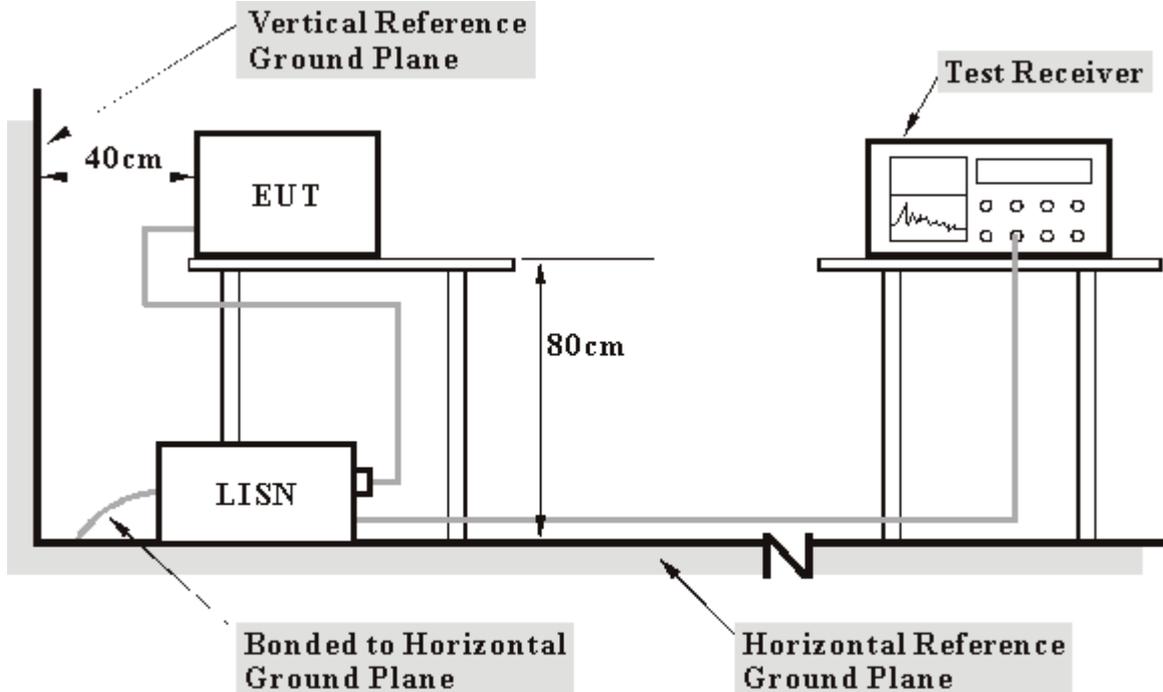

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- b. The computer system sent "H" messages to its screen.




4.1.7 TEST RESULTS

EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	TESTED BY: Hardaway Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.06	46.94	-	47.00	-	65.79	55.79	-18.79	-
2	0.213	0.06	51.62	-	51.68	-	63.11	53.11	-11.43	-
3	0.283	0.06	49.53	-	49.59	-	60.73	50.73	-11.14	-
4	0.494	0.08	46.10	44.71	46.18	44.79	56.10	46.10	-9.93	-1.32
5	2.195	0.18	36.50	-	36.68	-	56.00	46.00	-19.32	-
6	25.398	0.89	33.28	-	34.17	-	60.00	50.00	-25.83	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

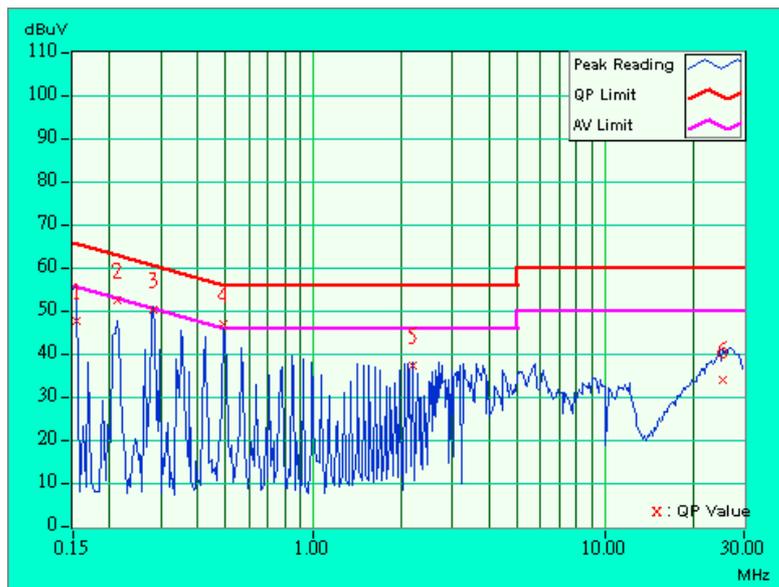




EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
MODE	Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	TESTED BY: Hardaway Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.279	0.05	44.52	-	44.57	-	60.85	50.85	-16.28	-
2	0.349	0.05	42.06	-	42.11	-	58.98	48.98	-16.87	-
3	0.494	0.07	45.96	-	46.03	-	56.10	46.10	-10.08	-
4	5.000	0.24	21.42	-	21.66	-	56.00	46.00	-34.34	-
5	5.578	0.25	29.46	-	29.71	-	60.00	50.00	-30.29	-
6	25.563	0.73	25.88	-	26.61	-	60.00	50.00	-33.39	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

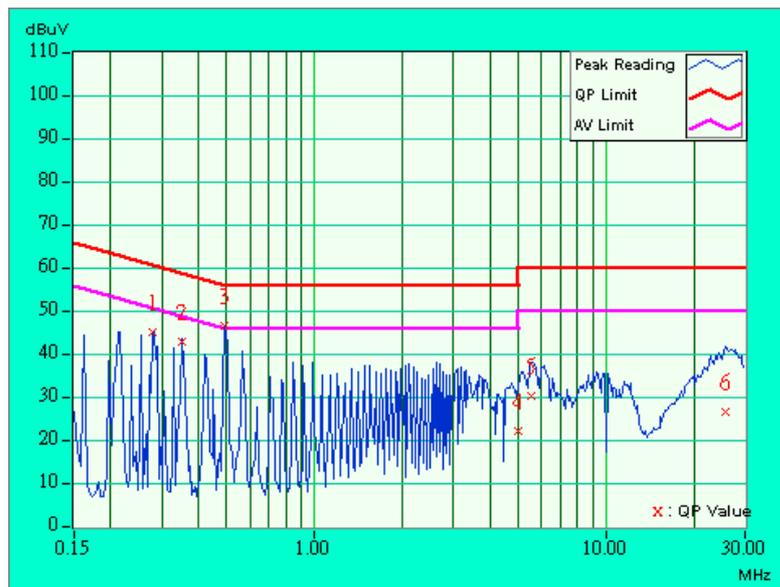




EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	TESTED BY: Hardaway Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.213	0.06	51.48	-	51.54	-	63.11	53.11	-11.57	-
2	0.283	0.06	49.65	-	49.71	-	60.73	50.73	-11.02	-
3	0.427	0.06	42.89	-	42.95	-	57.30	47.30	-14.35	-
4	0.494	0.08	45.84	-	45.92	-	56.10	46.10	-10.19	-
5	5.594	0.27	33.62	-	33.89	-	60.00	50.00	-26.11	-
6	24.152	0.85	35.04	-	35.89	-	60.00	50.00	-24.11	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

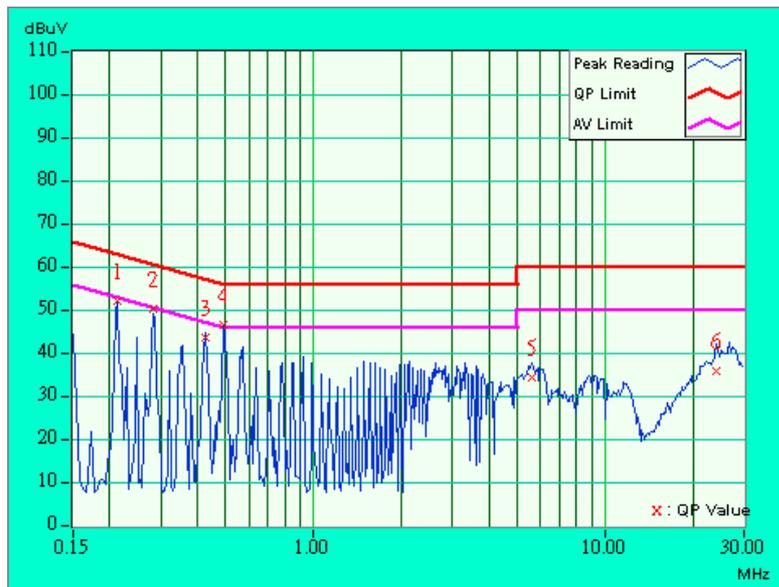




EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
MODE	Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	TESTED BY: Hardaway Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.213	0.05	48.55	-	48.60	-	63.11	53.11	-14.51	-
2	0.283	0.05	47.45	-	47.50	-	60.73	50.73	-13.23	-
3	0.427	0.05	42.95	-	43.00	-	57.30	47.30	-14.30	-
4	0.494	0.07	45.36	-	45.43	-	56.10	46.10	-10.68	-
5	5.598	0.25	32.86	-	33.11	-	60.00	50.00	-26.89	-
6	26.016	0.73	35.85	-	36.58	-	60.00	50.00	-23.42	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

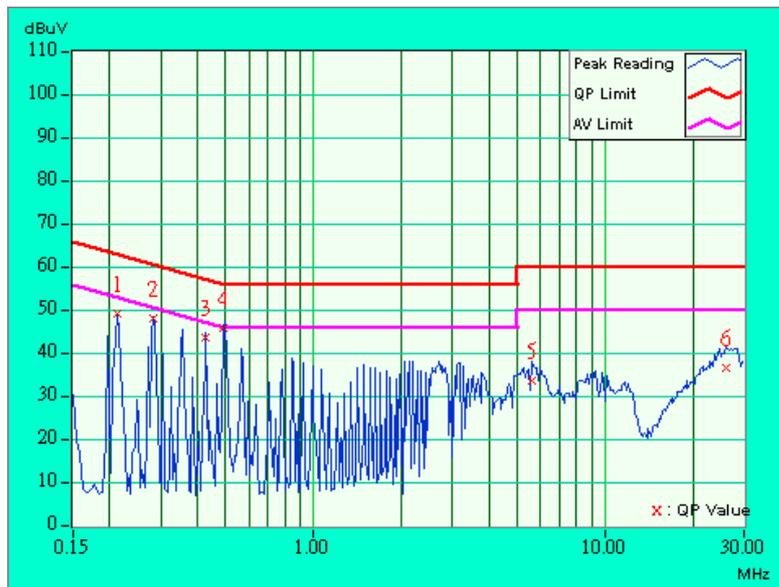




EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	TESTED BY: Hardaway Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.05	50.13	-	50.18	-	66.00	56.00	-15.82	-
2	0.213	0.06	50.93	-	50.99	-	63.11	53.11	-12.12	-
3	0.357	0.06	45.83	-	45.89	-	58.80	48.80	-12.91	-
4	0.498	0.08	46.27	44.64	46.35	44.72	56.04	46.04	-9.69	-1.32
5	5.680	0.28	34.99	-	35.27	-	60.00	50.00	-24.73	-
6	25.262	0.89	26.76	-	27.65	-	60.00	50.00	-32.35	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

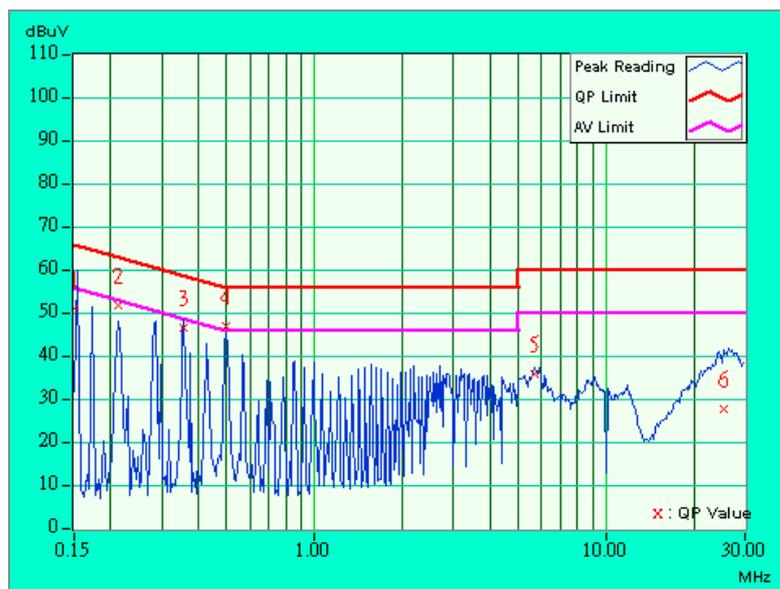




EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
MODE	Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	TESTED BY: Hardaway Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.283	0.05	47.66	-	47.71	-	60.73	50.73	-13.02	-
2	0.427	0.05	43.08	-	43.13	-	57.30	47.30	-14.17	-
3	0.498	0.07	45.82	-	45.89	-	56.04	46.04	-10.15	-
4	0.572	0.08	37.11	-	37.19	-	56.00	46.00	-18.81	-
5	2.621	0.19	33.00	-	33.19	-	56.00	46.00	-22.81	-
6	26.953	0.72	36.65	-	37.37	-	60.00	50.00	-22.63	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

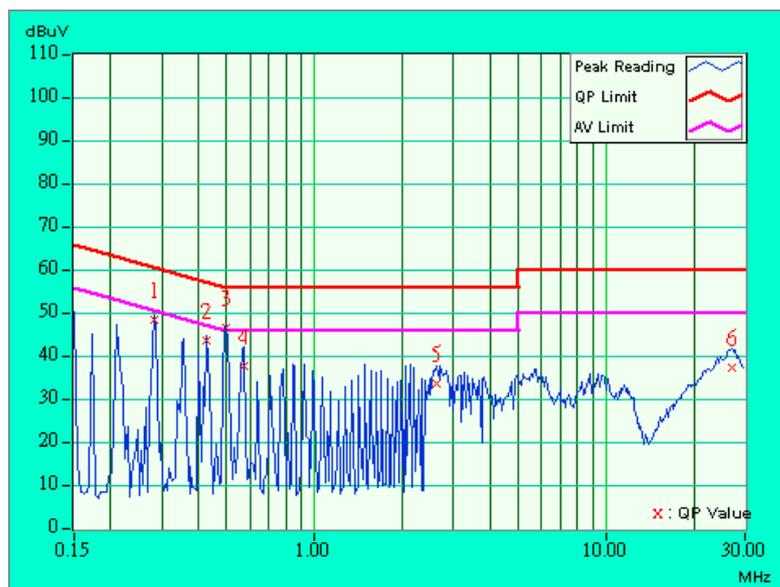



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	Jun. 10, 2004
* HP Preamplifier	8447D	2944A08485	May. 01, 2004
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 13, 2004
ROHDE & SCHWARZ TEST RECEIVER	ESI7	838496/016	Feb. 23, 2004
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Feb. 13, 2004
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* CHASE BILOG Antenna	CBL6112A	2221	July 26, 2004
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	Jun 30, 2004
* EMCO Horn Antenna	3115	9312-4192	Mar. 23 2004
* EMCO Turn Table	1060	1115	NA
* CHANCE Tower	CM-AT40	CM-A010	NA
* Software	ADT_Radiate d_V5.14	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Jan. 05. 2004
* TIMES RF cable	LMR-600	CABLE-ST5-01	Jan. 05. 2004

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. "*" = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. 5.
5. The VCCI Site Registration No. is R-1039.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

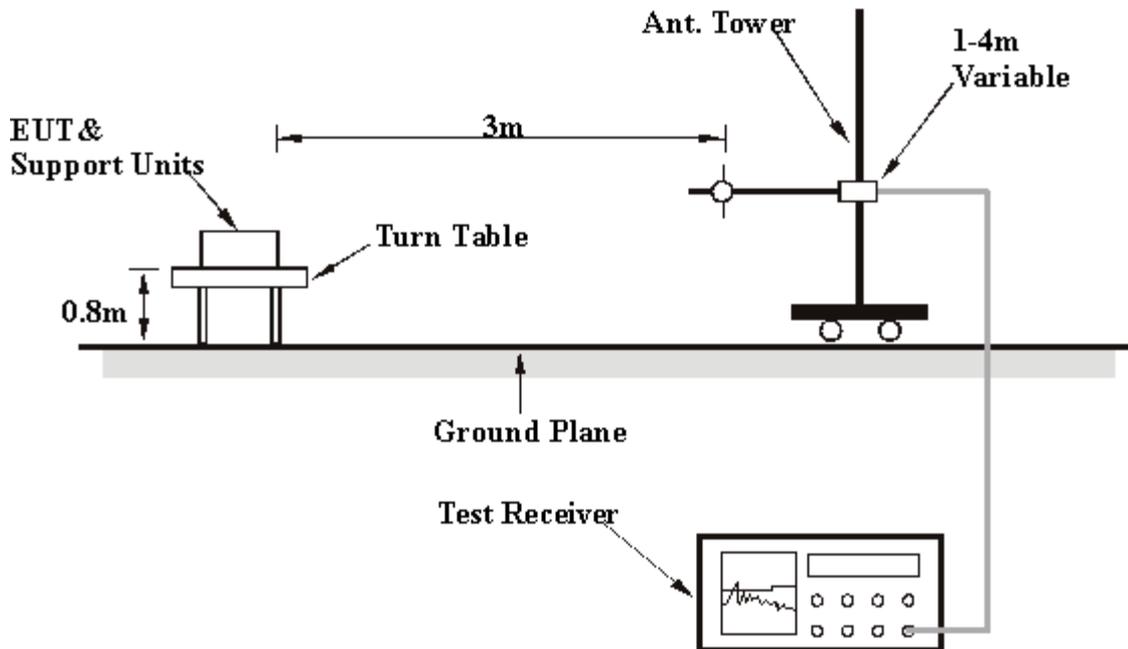

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	TESTED BY: Hardaway Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	85.09	26.2 QP	40.00	-13.80	1.13 H	328	17.40	8.90
2	114.74	31.6 QP	43.50	-11.90	1.82 H	97	18.90	12.70
3	120.70	30.7 QP	43.50	-12.80	1.28 H	262	17.70	13.00
4	175.05	31.4 QP	43.50	-12.10	1.76 H	131	20.90	10.50
5	177.90	30.8 QP	43.50	-12.70	1.76 H	47	20.30	10.50
6	232.73	28.2 QP	46.00	-17.80	1.14 H	237	15.60	12.60
7	260.28	35.0 QP	46.00	-11.00	1.70 H	73	19.90	15.10
8	375.01	32.6 QP	46.00	-13.40	1.54 H	257	15.30	17.30
9	401.50	32.1 QP	46.00	-13.90	1.01 H	1	13.90	18.30
10	664.52	39.3 QP	46.00	-6.70	1.57 H	50	16.80	22.50
11	729.98	39.5 QP	46.00	-6.50	1.20 H	227	16.10	23.40
12	797.55	34.4 QP	46.00	-11.60	1.57 H	339	10.70	23.70
13	862.00	39.8 QP	46.00	-6.20	1.32 H	145	15.50	24.40
14	928.96	40.5 QP	46.00	-5.50	1.24 H	340	15.80	24.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
MODE	Channel 11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	TESTED BY: Hardaway Lee	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	68.93	25.8 QP	40.00	-14.20	1.04 V	151	18.90	6.90
2	85.06	28.7 QP	40.00	-11.30	1.00 V	158	19.80	8.90
3	125.00	34.4 QP	43.50	-9.10	1.20 V	36	21.60	12.80
4	178.05	31.0 QP	43.50	-12.50	1.01 V	0	20.50	10.50
5	213.00	26.3 QP	43.50	-17.20	1.74 V	156	14.80	11.50
6	225.00	30.4 QP	46.00	-15.60	1.33 V	306	18.30	12.20
7	250.00	30.8 QP	46.00	-15.20	1.00 V	253	17.20	13.60
8	375.00	35.0 QP	46.00	-11.00	1.04 V	68	17.60	17.30
9	663.65	40.1 QP	46.00	-5.90	1.03 V	74	17.60	22.50
10	729.95	36.4 QP	46.00	-9.60	1.66 V	307	13.00	23.40
11	796.00	36.9 QP	46.00	-9.10	1.87 V	105	13.20	23.70
12	863.80	38.9 QP	46.00	-7.10	1.22 V	70	14.60	24.40
13	929.15	41.8 QP	46.00	-4.20	1.33 V	263	17.10	24.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
CHANNEL	Channel 1	FREQUENCY RANGE	Above 1000 MHz
MODE	CCK		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	TESTED BY: Hardaway Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	31.3 PK	74.00	-42.70	1.17 H	166	1.70	29.60
2	*2412.00	86.8 PK			1.17 H	166	57.20	29.70
2	*2412.00	73.9 AV			1.17 H	166	44.30	29.70
3	4824.00	51.6 PK	74.00	-22.40	1.39 H	280	16.30	35.30
3	4824.00	36.7 AV	54.00	-17.30	1.39 H	280	1.40	35.30
4	7242.00	51.8 PK	74.00	-22.20	1.51 H	333	10.70	41.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	32.1 PK	74.00	-41.90	1.05 V	69	2.50	29.60
2	*2412.00	87.6 PK			1.31 V	345	58.00	29.70
2	*2412.00	74.9 AV			1.31 V	345	45.30	29.70
3	4824.00	47.9 PK	74.00	-26.10	1.31 V	345	12.60	35.30
4	7237.00	54.8 PK	74.00	-19.20	1.47 V	33	13.70	41.10
4	7237.00	42.5 AV	54.00	-11.50	1.47 V	33	1.40	41.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
CHANNEL	Channel 6	FREQUENCY RANGE	Above 1000 MHz
MODE	CCK		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	TESTED BY: Hardaway Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	95.3 PK			1.23 H	285	65.60	29.70
1	*2437.00	80.5 AV			1.23 H	285	50.80	29.70
2	4874.00	51.5 PK	74.00	-22.50	1.23 H	285	16.00	35.50
3	7311.00	63.0 PK	74.00	-11.00	1.47 H	85	21.70	41.30
3	7311.00	50.2 AV	54.00	-3.80	1.47 H	85	8.90	41.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	90.6 PK			1.05 V	169	60.90	29.70
1	*2437.00	77.8 AV			1.05 V	169	48.10	29.70
2	4874.00	50.9 PK	74.00	-23.10	1.75 V	22	15.40	35.50
3	7311.00	60.8 PK	74.00	-13.20	1.98 V	122	19.50	41.30
3	7311.00	50.8 AV	54.00	-3.20	1.98 V	122	9.50	41.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
CHANNEL	Channel 11	FREQUENCY RANGE	Above 1000 MHz
MODE	CCK		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	TESTED BY: Hardaway Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.0 PK			1.11 H	265	68.20	29.80
1	*2462.00	84.0 AV			1.11 H	265	54.20	29.80
2	2483.50	42.5 PK	74.00	-31.50	1.11 H	265	12.60	29.90
3	4924.00	50.9 PK	74.00	-23.10	1.27 H	300	15.20	35.70
4	7389.00	65.2 PK	74.00	-8.80	1.80 H	166	23.70	41.50
4	7389.00	51.0 AV	54.00	-3.00	1.80 H	166	9.60	41.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.4 PK			1.70 V	128	65.60	29.80
1	*2462.00	82.1 AV			1.70 V	128	52.30	29.80
2	4924.00	54.0 PK	74.00	-20.00	1.27 V	300	18.30	35.70
2	4924.00	37.4 AV	54.00	-16.60	1.27 V	300	1.80	35.70
3	7388.00	65.1 PK	74.00	-8.90	1.85 V	265	23.70	41.50
3	7388.00	51.6 AV	54.00	-2.40	1.85 V	265	10.10	41.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
CHANNEL	Channel 1	FREQUENCY RANGE	Above 1000 MHz
MODE	OFDM		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	TESTED BY: Hardaway Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	31.8 PK	74.00	-42.20	1.00 H	100	2.20	29.60
2	*2412.00	87.3 PK			1.55 H	180	57.60	29.70
2	*2412.00	74.3 AV			1.55 H	180	44.60	29.70
3	4824.00	47.7 PK	74.00	-26.30	1.34 H	100	12.50	35.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2412.00	83.2 PK			1.63 V	82	53.50	29.70
1	*2412.00	71.2 AV			1.63 V	82	41.50	29.70
2	4824.00	47.5 PK	74.00	-26.50	1.11 V	282	12.20	35.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
CHANNEL	Channel 6	FREQUENCY RANGE	Above 1000 MHz
MODE	OFDM		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	TESTED BY: Hardaway Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	90.3 PK			1.13 H	42	60.50	29.70
1	*2437.00	77.7 AV			1.13 H	42	47.90	29.70
2	4874.00	50.5 PK	74.00	-23.50	1.25 H	142	15.00	35.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	91.0 PK			1.00 V	87	61.20	29.70
1	*2437.00	82.9 AV			1.00 V	87	53.10	29.70
2	4874.00	52.4 PK	74.00	-21.60	1.09 V	133	16.90	35.50

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
CHANNEL	Channel 11	FREQUENCY RANGE	Above 1000 MHz
MODE	OFDM		
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	30deg. C, 60%RH, 991hPa	TESTED BY: Hardaway Lee	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.4 PK			1.95 H	287	65.50	29.80
1	*2462.00	82.3 AV			1.95 H	287	52.50	29.80
2	4924.00	53.7 PK	74.00	-20.30	1.05 H	77	18.00	35.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	90.5 PK			1.93 V	63	60.70	29.80
1	*2462.00	77.0 AV			1.93 V	63	47.20	29.80
2	4924.00	52.7 PK	74.00	-21.30	1.54 V	277	17.00	35.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS

EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
		MODE	CCK
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 63%RH, 991hPa
TESTED BY: Cody Chang			

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	10.96	0.5	PASS
6	2437	10.96	0.5	PASS
11	2462	10.36	0.5	PASS




CH1

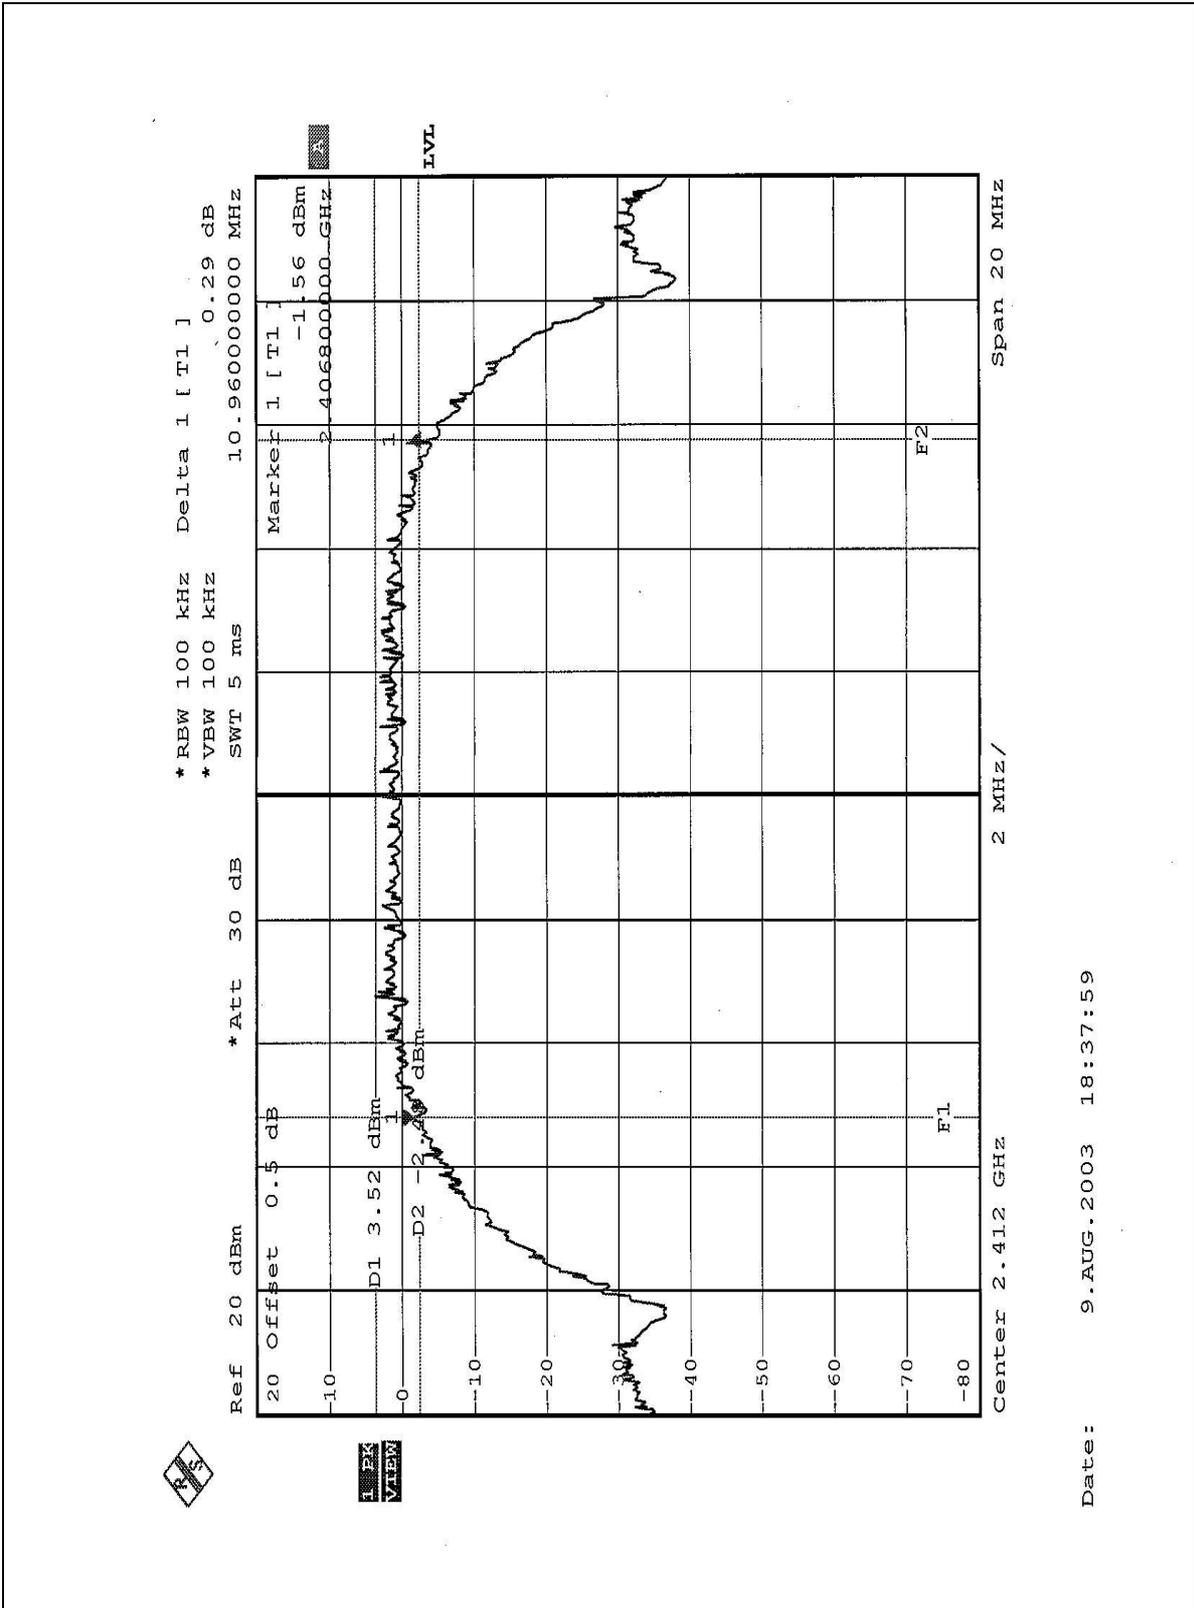

Date: 9.AUG.2003 18:37:59




CH6

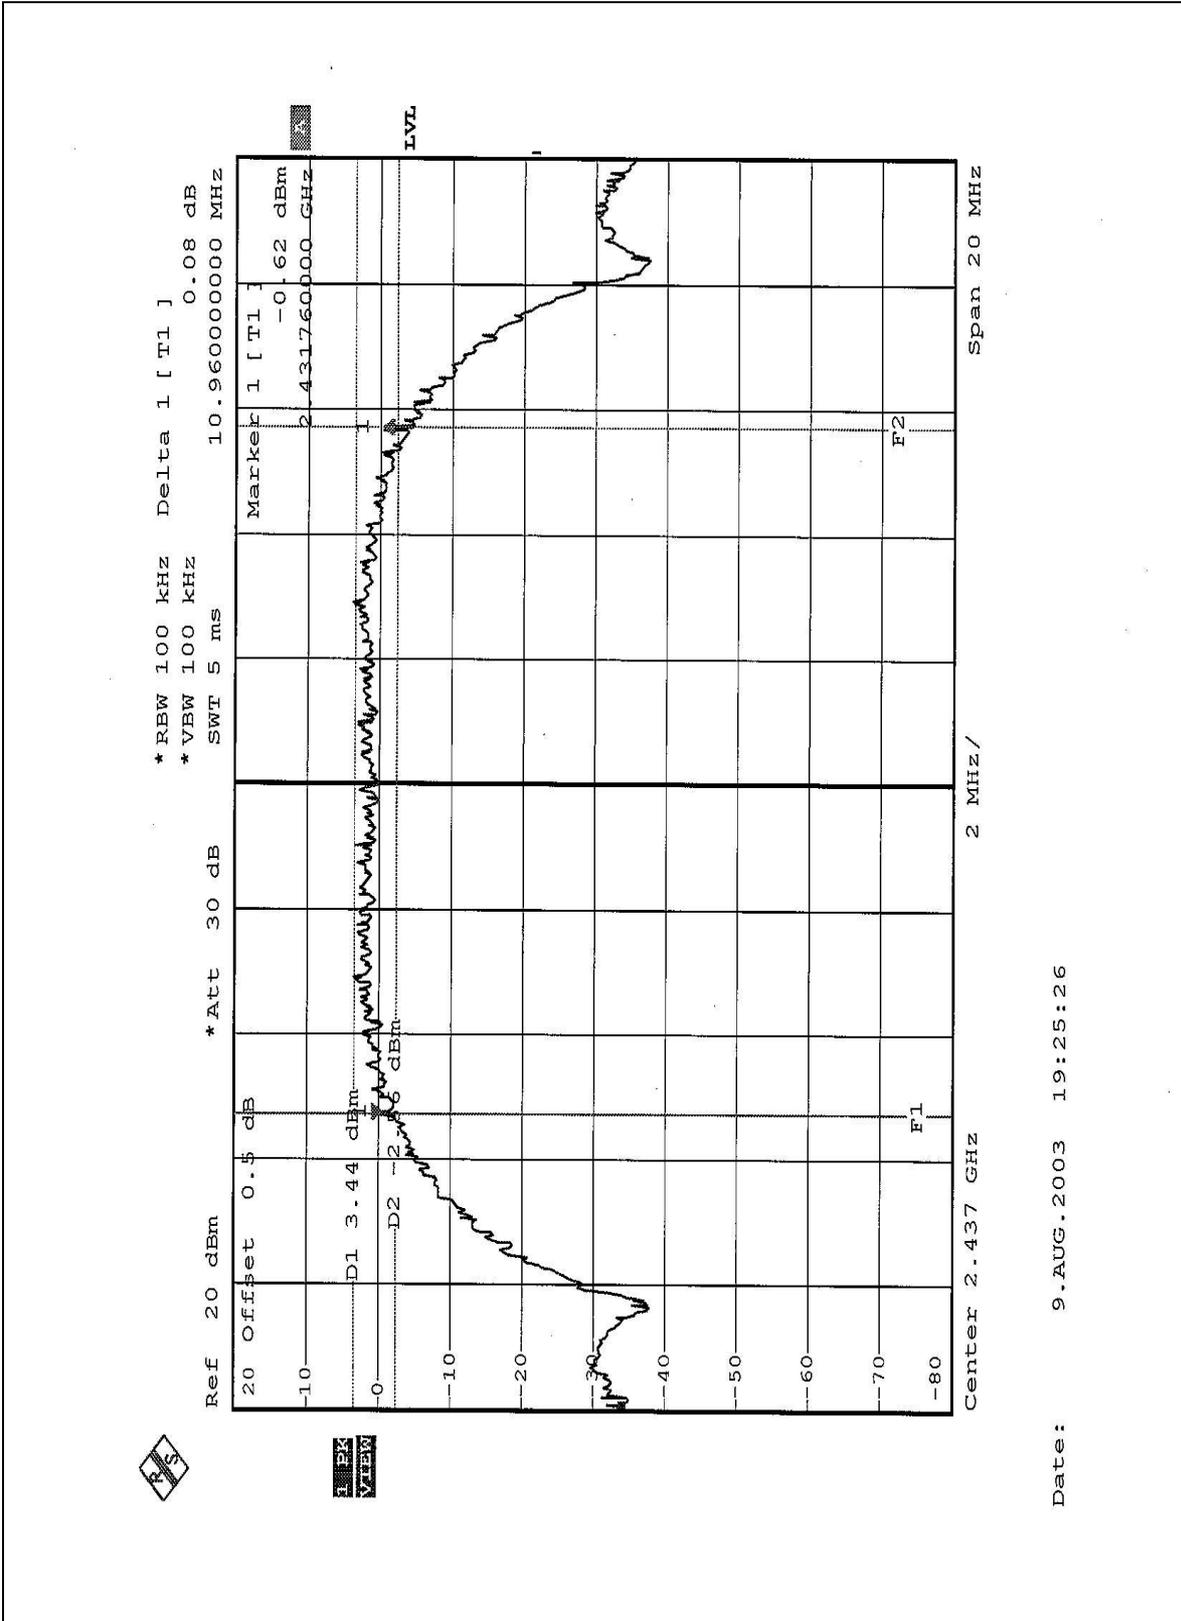

Date: 9.AUG.2003 19:25:26



CH11

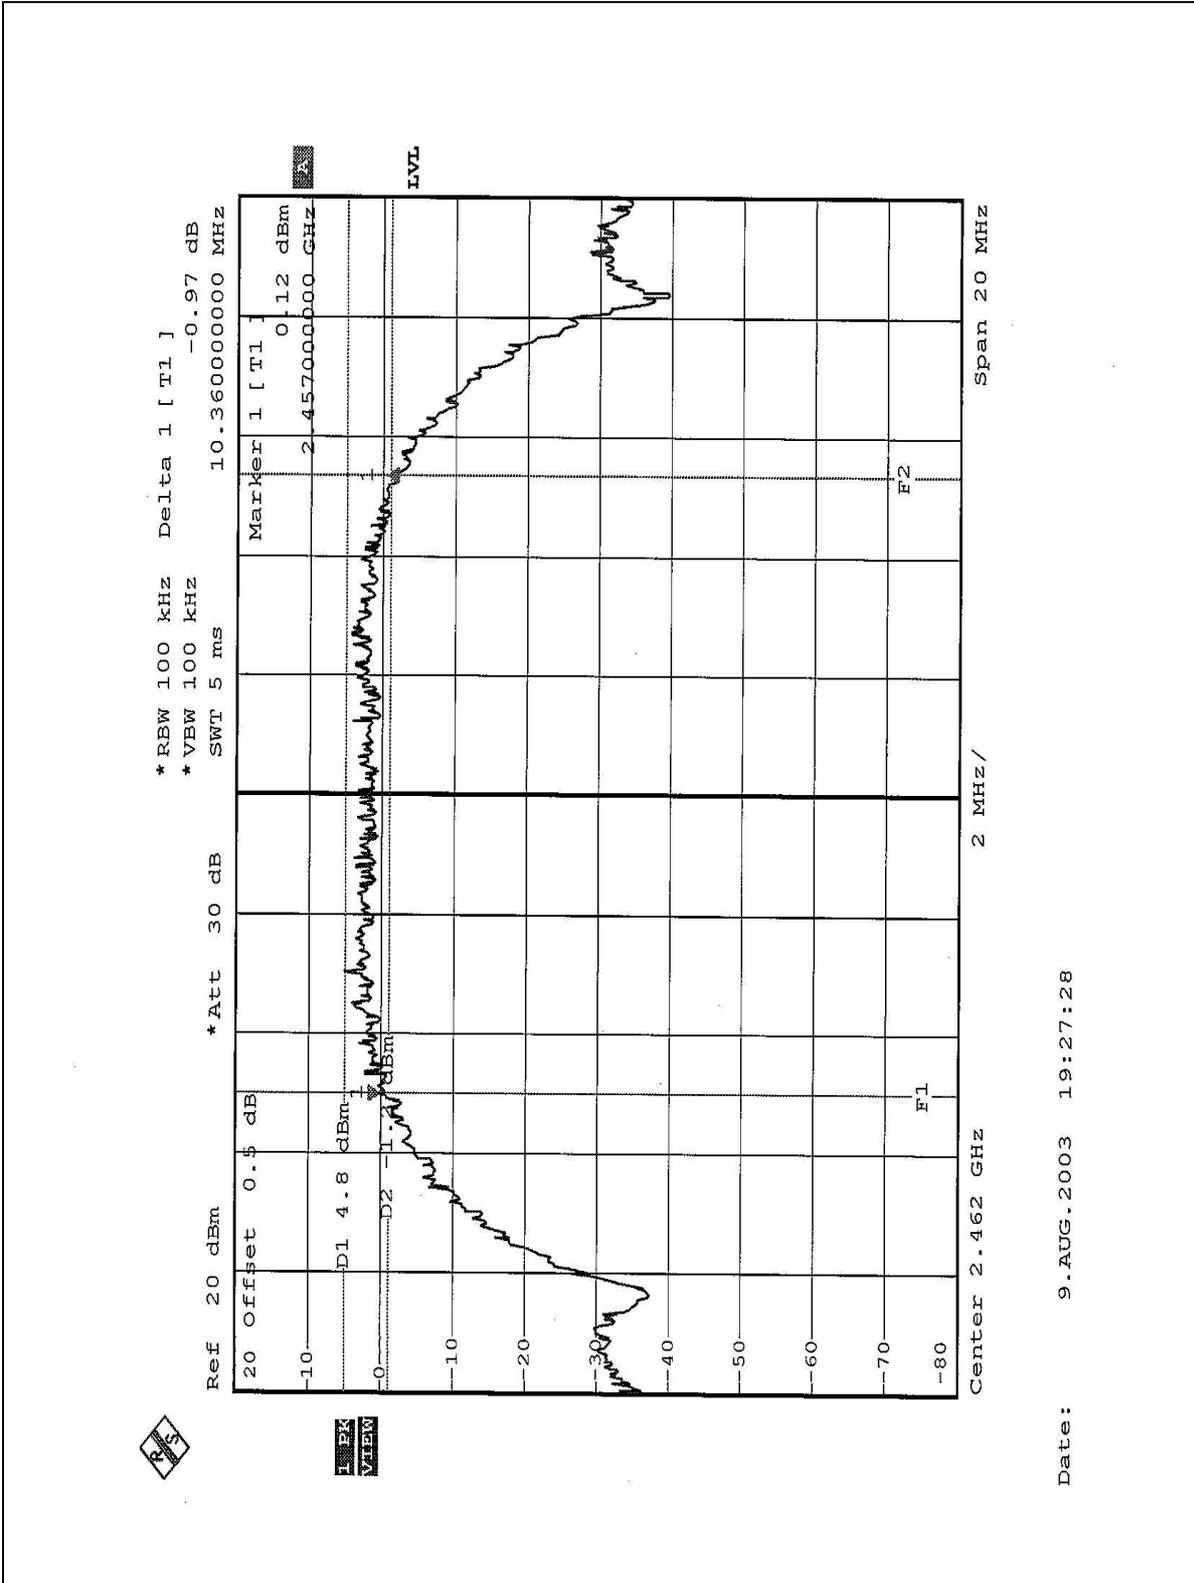

Date: 9.AUG.2003 19:27:28




EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
		MODE	OFDM
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 63%RH, 991hPa
TESTED BY: Cody Chang			

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.36	0.5	PASS
6	2437	16.40	0.5	PASS
11	2462	16.40	0.5	PASS




CH1

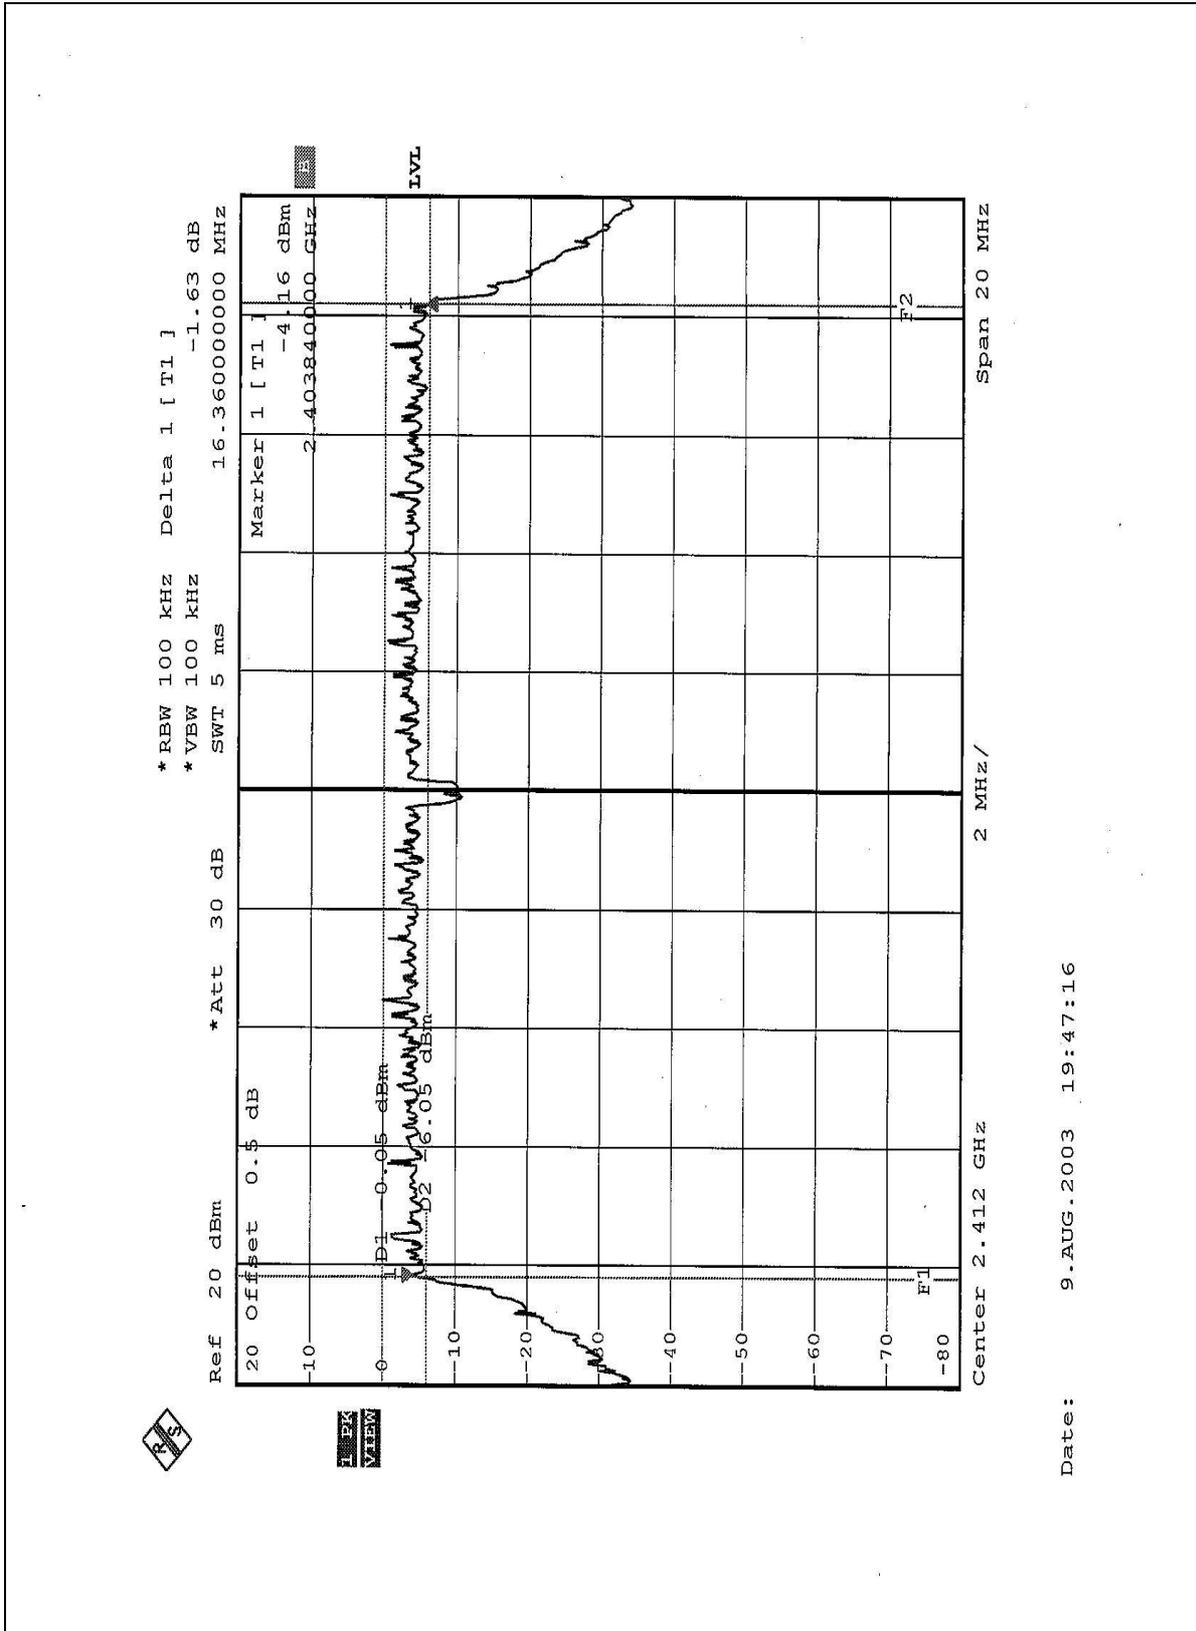

Date: 9.AUG.2003 19:47:16




CH6

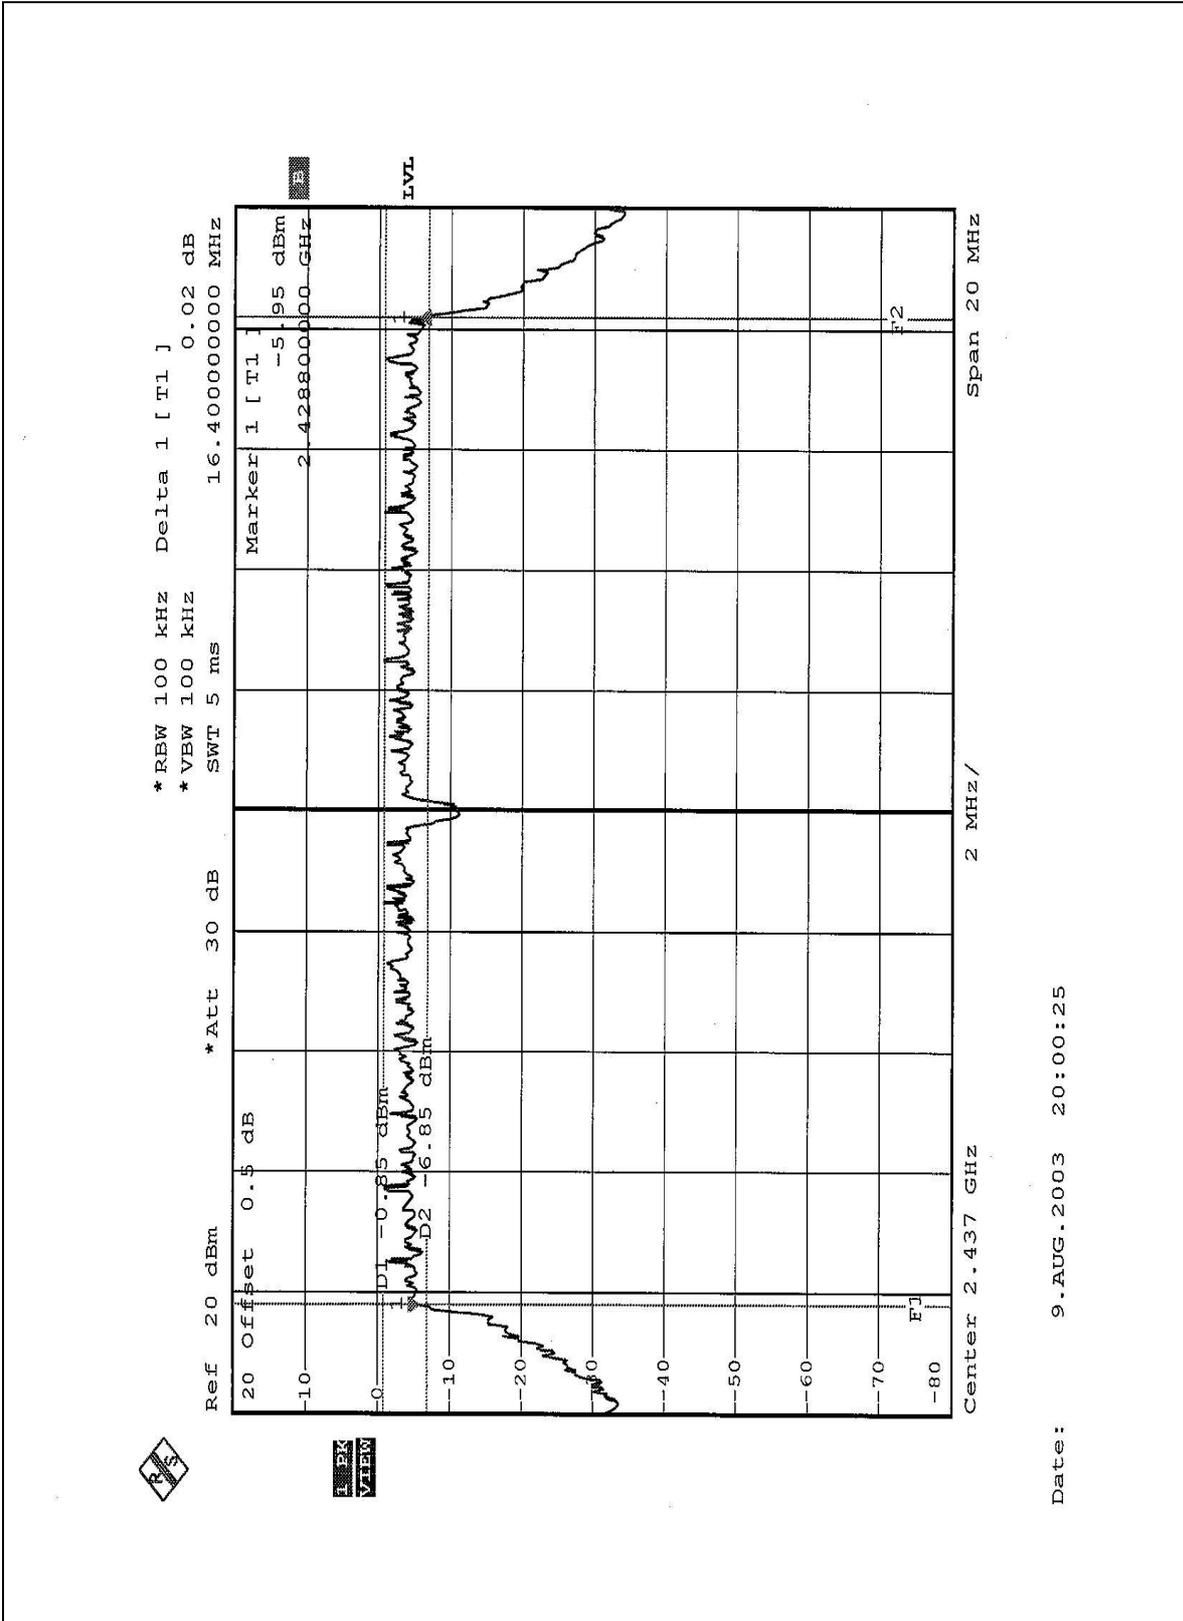

Date: 9.AUG.2003 20:00:25



CH11

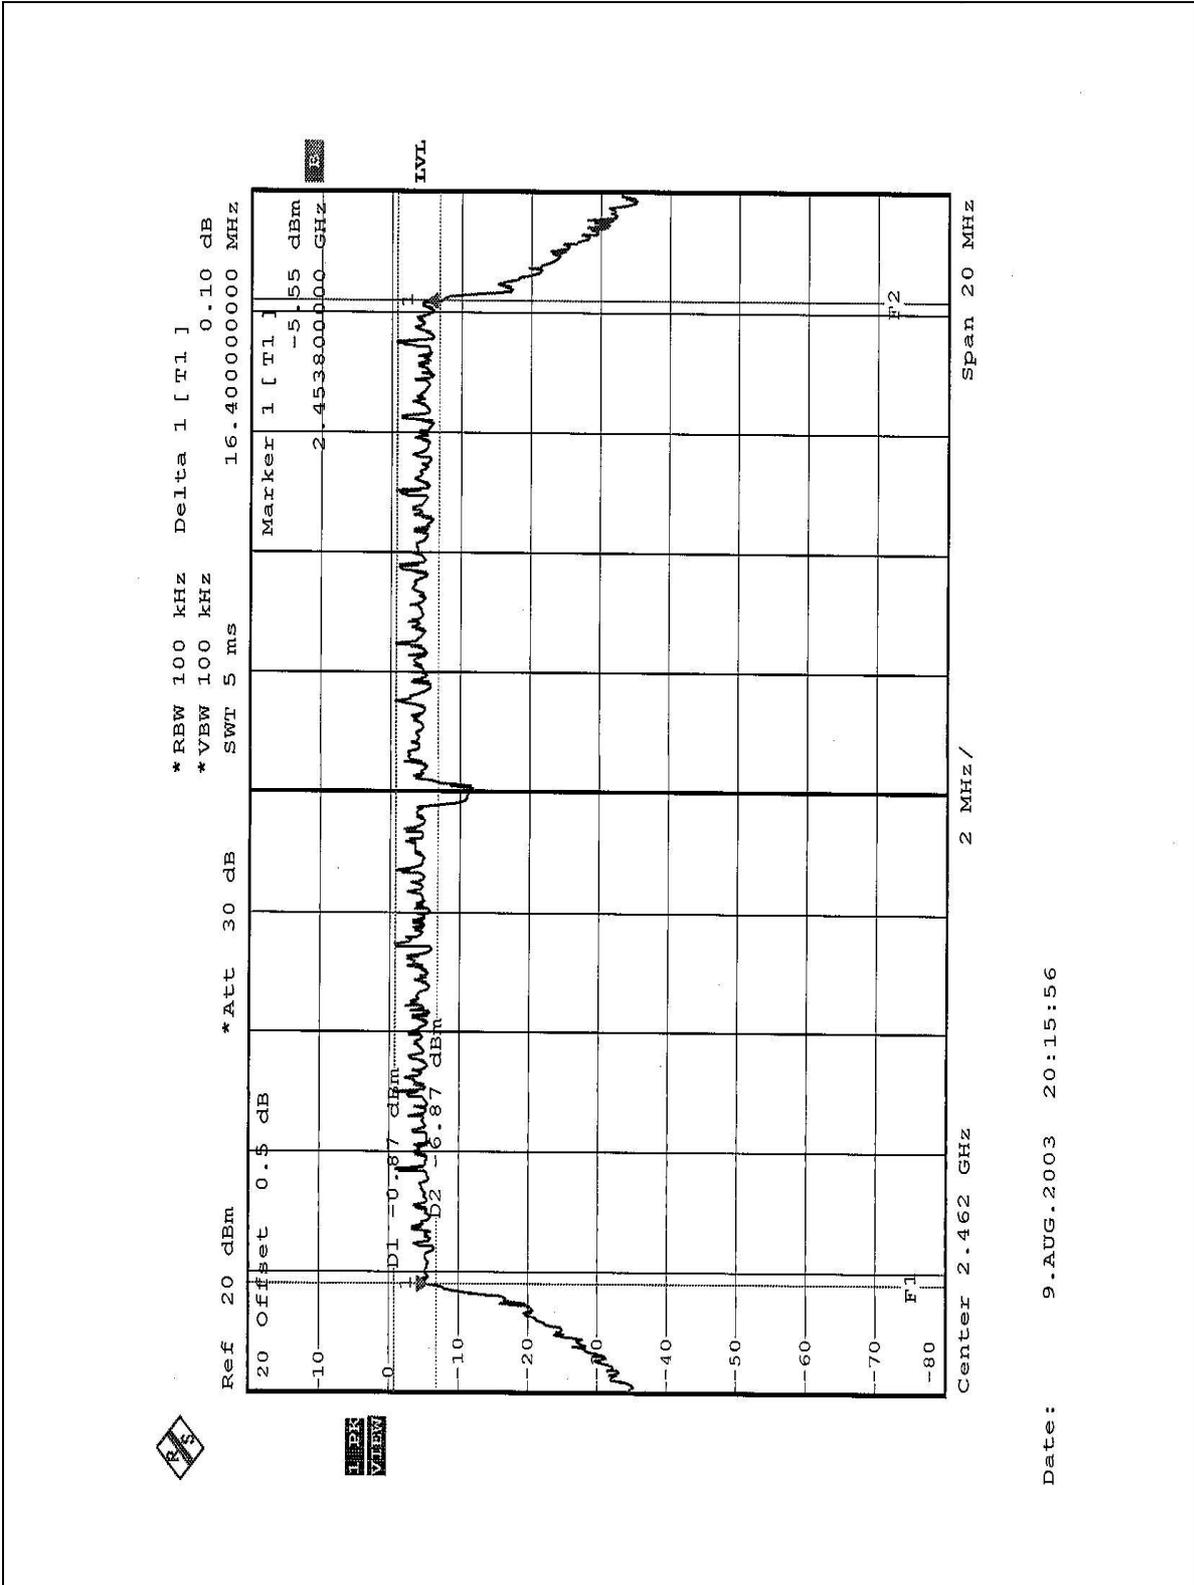

Date: 9.AUG.2003 20:15:56



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2003
R&S SIGNAL GENERATOR	SMP04	100011	May 28, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	B048470	Mar. 05, 2004
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




4.4.3 TEST PROCEDURES

- 1 A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
- 2 Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
- 3 Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS

EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
		MODE	CCK
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 63%RH, 991hPa
TESTED BY: Cody Chang			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.20	30	PASS
6	2437	15.10	30	PASS
11	2462	15.30	30	PASS

EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
		MODE	OFDM
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 63%RH, 991hPa
TESTED BY: Cody Chang			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.30	30	PASS
6	2437	15.20	30	PASS
11	2462	15.40	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6




4.5.7 TEST RESULTS

EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
		MODE	CCK
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 63%RH, 991hPa
TESTED BY: Cody Chang			

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-10.24	8	PASS
6	2437	-9.64	8	PASS
11	2462	-10.30	8	PASS




CH1

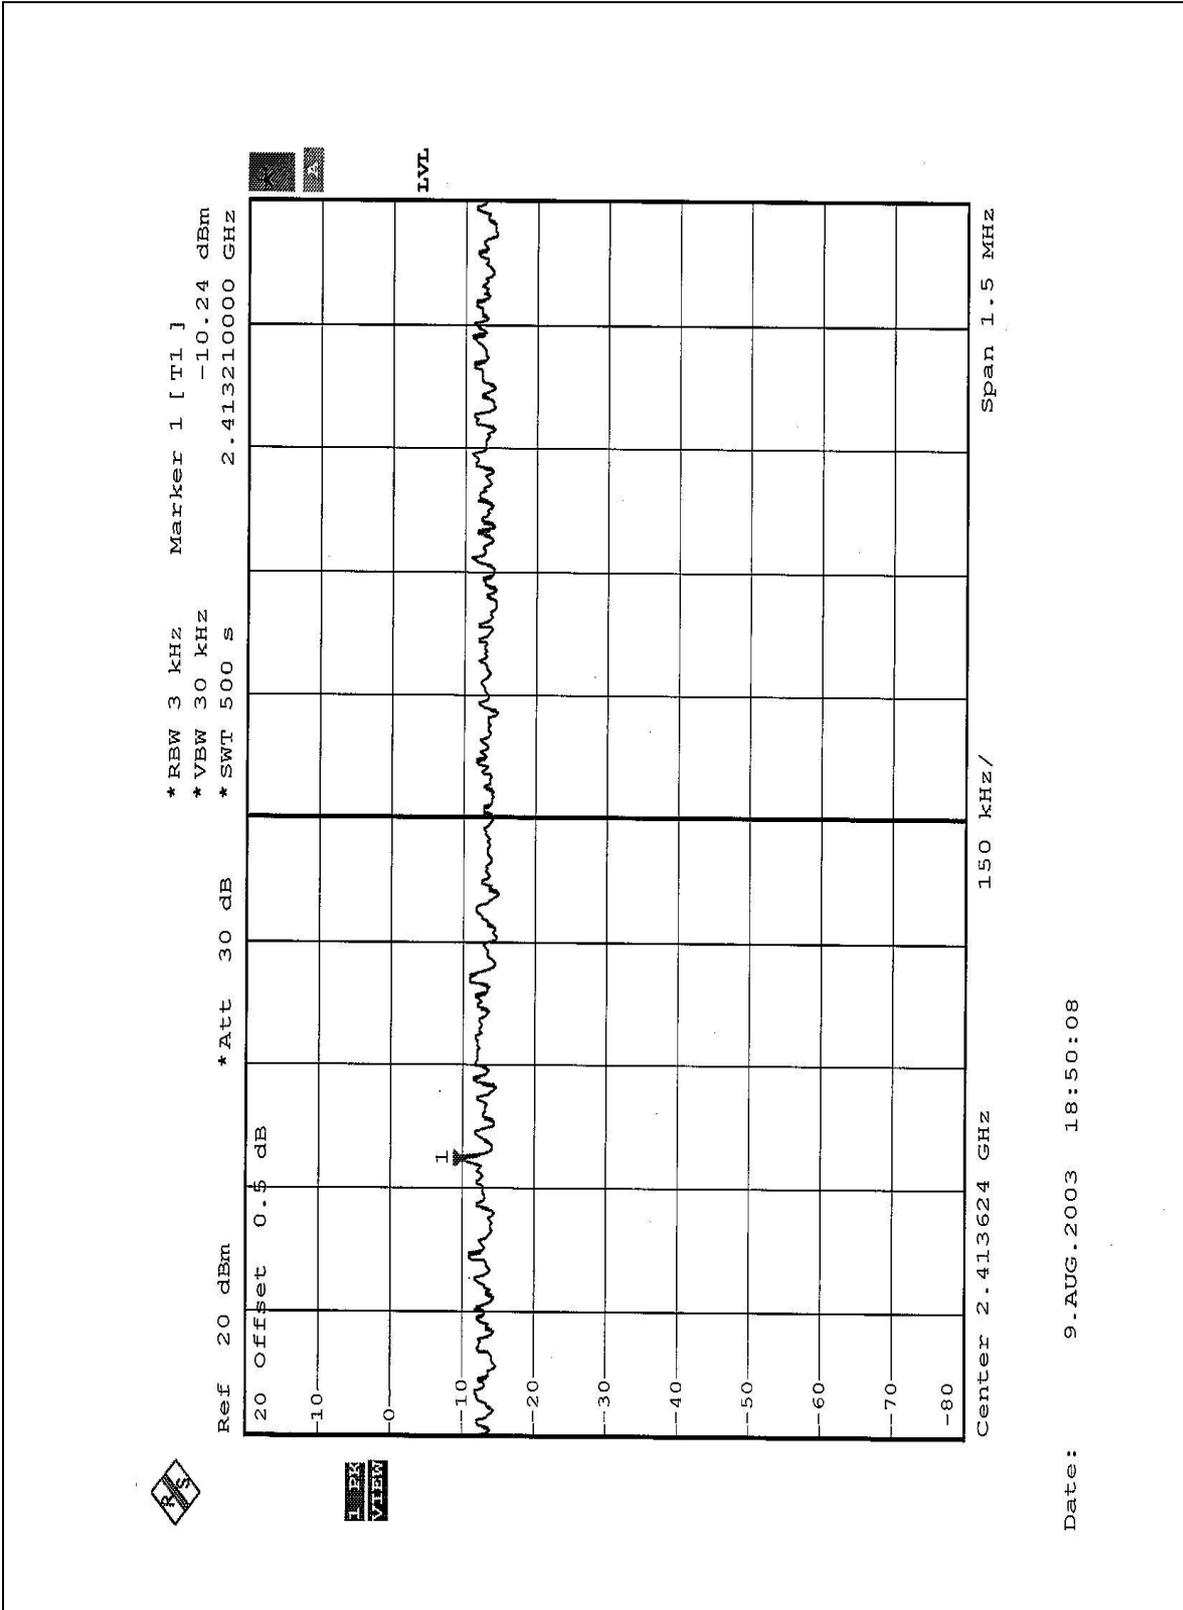

Date: 9.AUG.2003 18:50:08




CH6

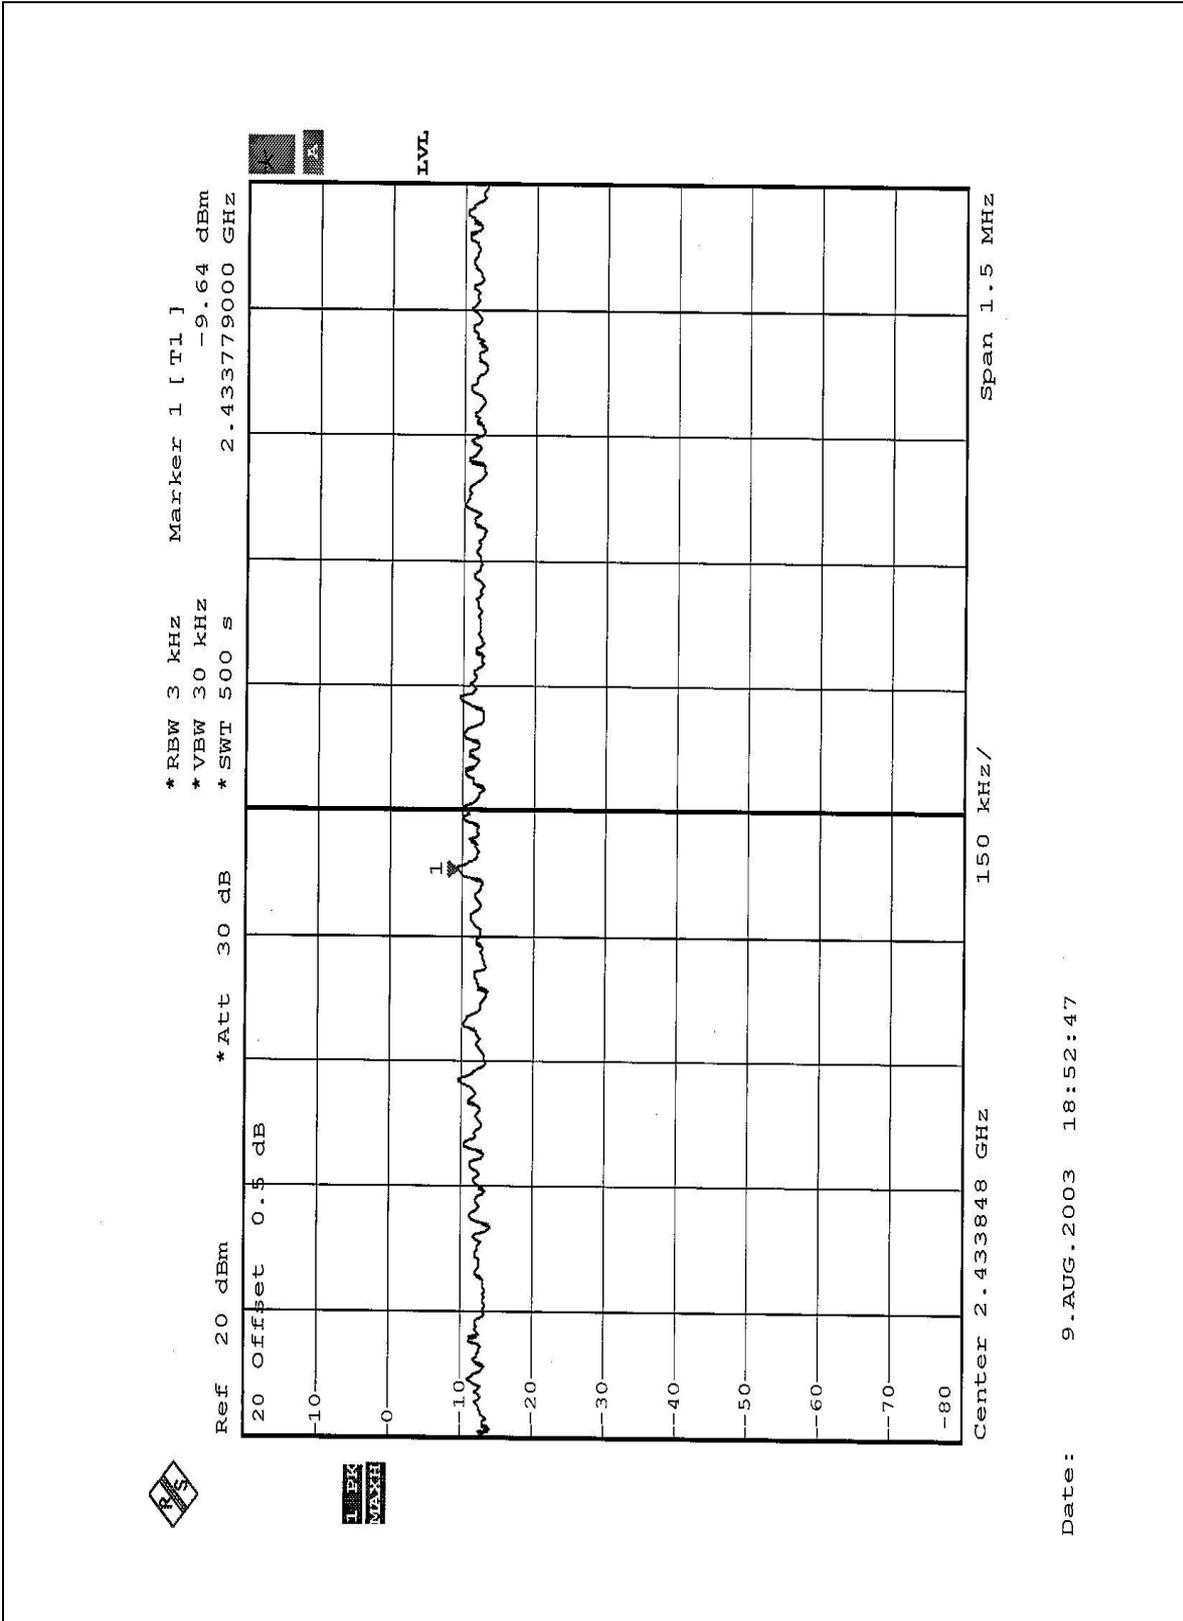



CH11

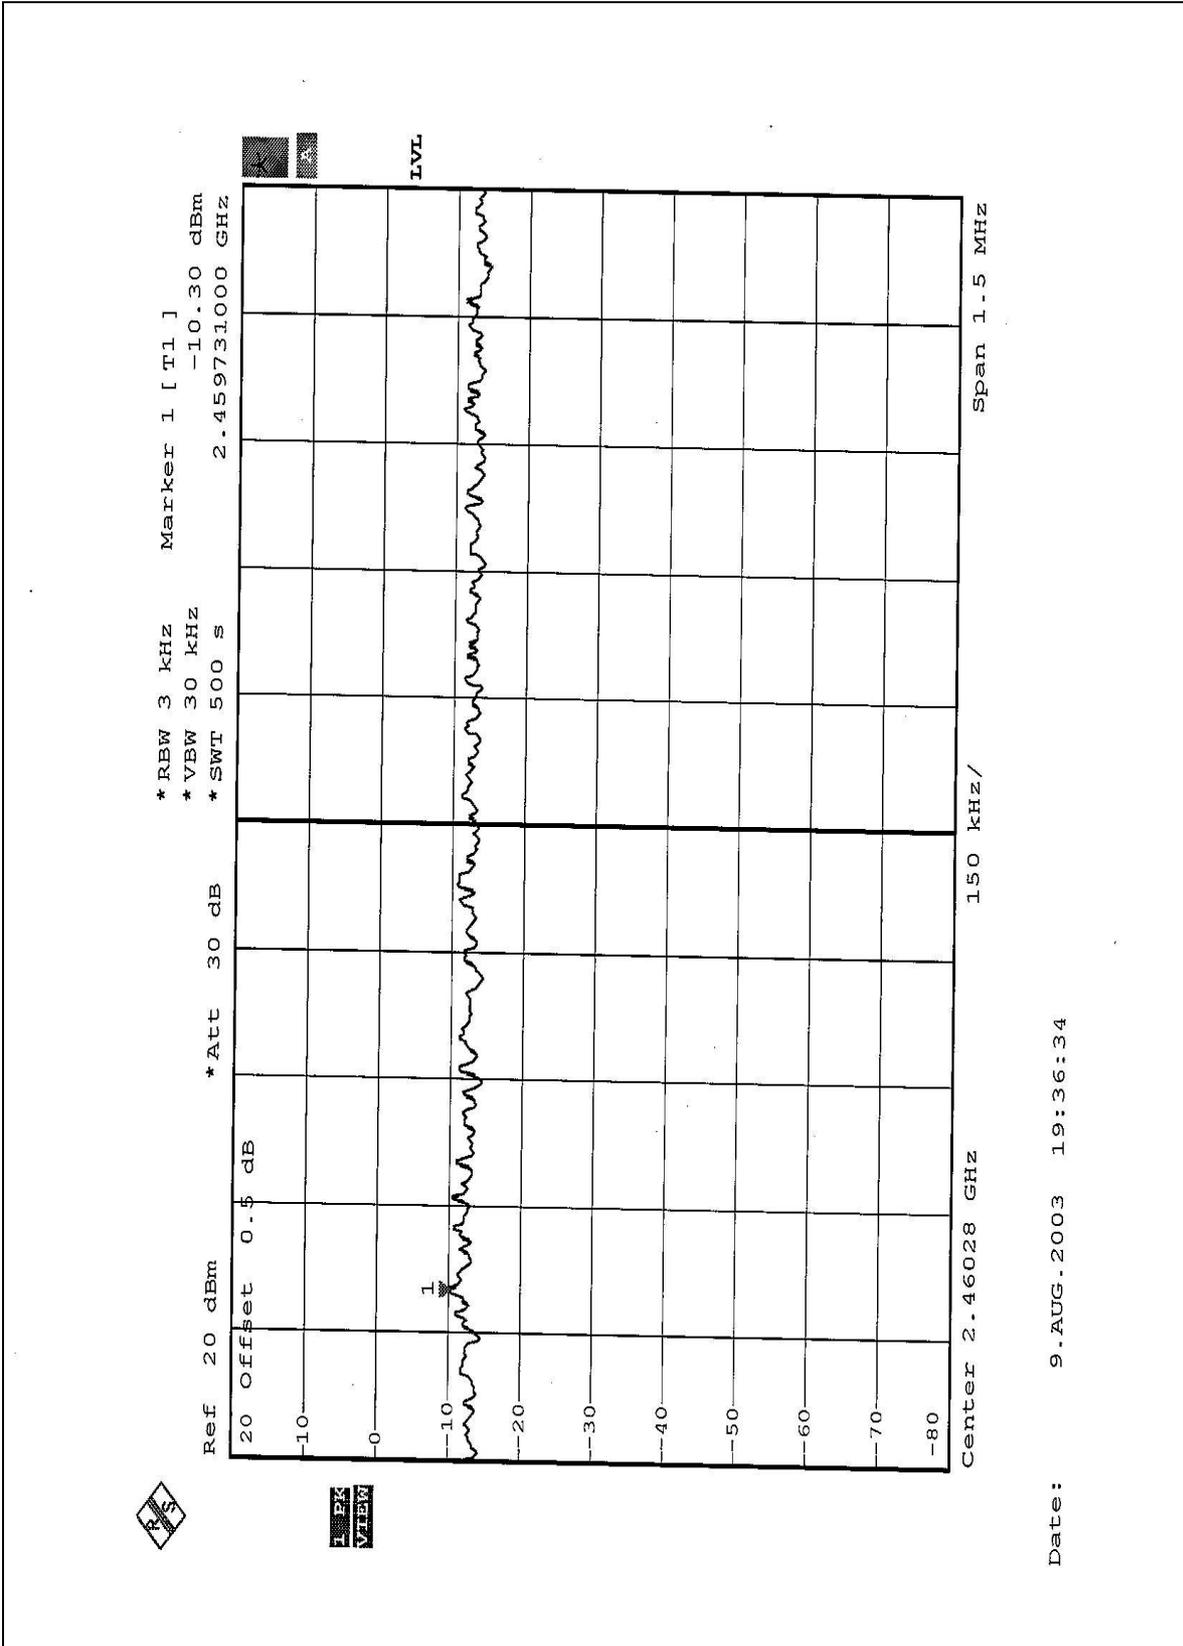

Date: 9.AUG.2003 19:36:34




EUT	Wireless 11g mini-PCI Adapter	MODEL	WMIB-100GS
		MODE	CCK
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 63%RH, 991hPa
TESTED BY: Cody Chang			

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.92	8	PASS
6	2437	-14.07	8	PASS
11	2462	-13.51	8	PASS




CH1

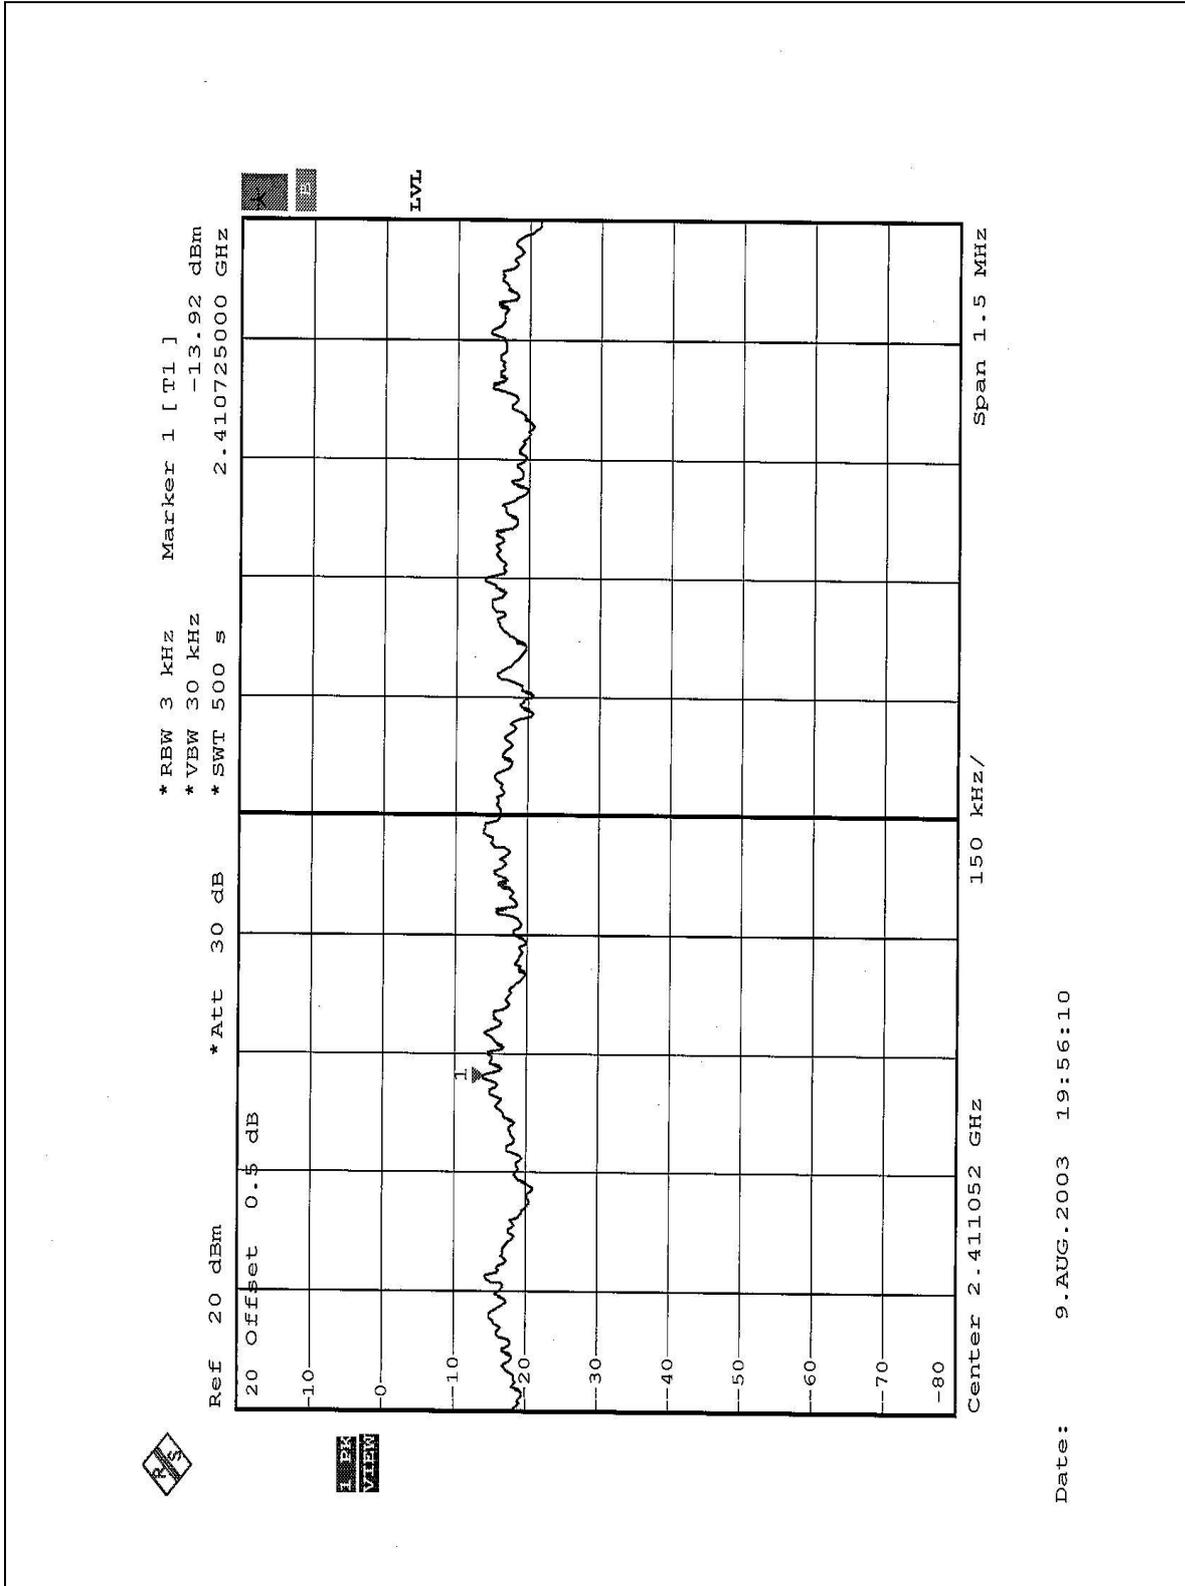

Date: 9.AUG.2003 19:56:10



CH6

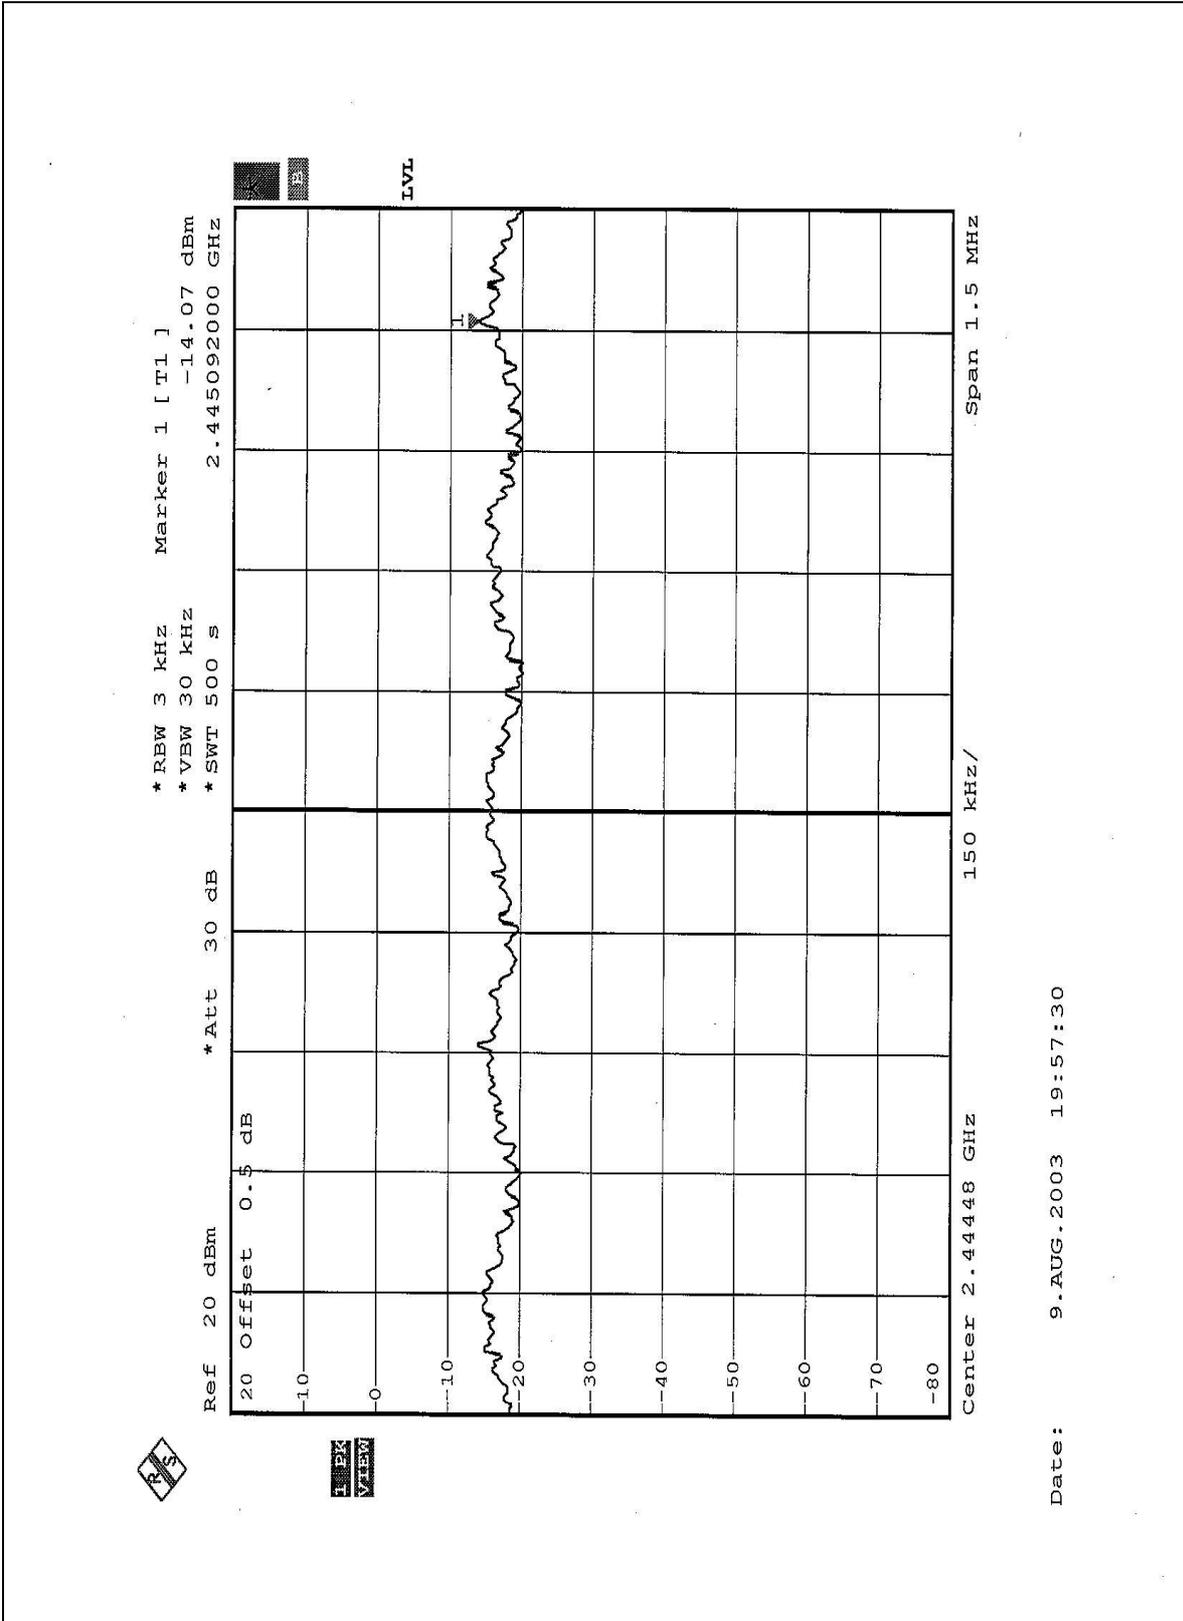


I PK VIEW

Date: 9.AUG.2003 19:57:30



CH11

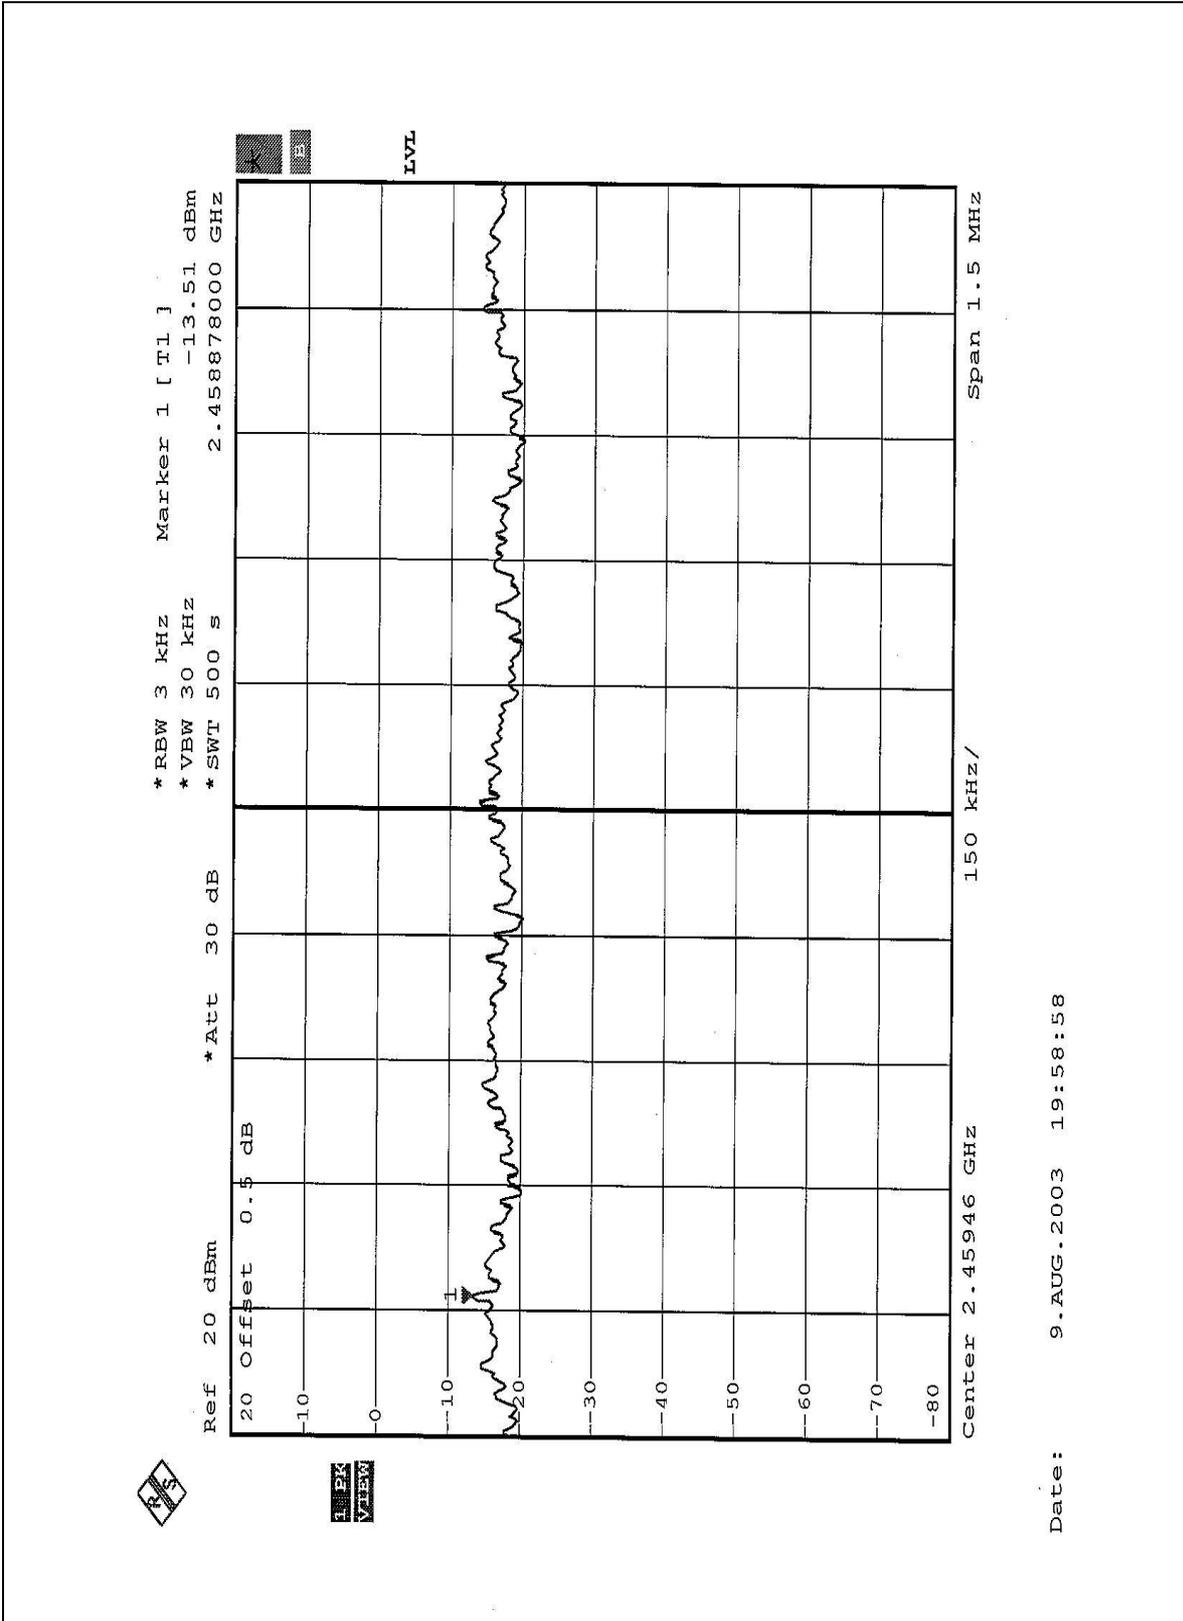



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2003

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 1 MHz and 300 Hz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation



4.6.5 EUT OPERATING CONDITION


Same as Item 4.3.6

4.6.6 TEST RESULTS


The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE 1: The band edge emission plot of CCK technique on the following 2 pages shows 50.78dB / 49.02dB delta between carrier maximum power and local maximum emission in restrict band (2.3896GHz / 2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 (page 25) is 84.0 dBuV/m, so the maximum field strength in restrict band is $84.0 - 49.02 = 34.98$ dBuV/m which is under 54dBuV/m limit.


NOTE 2: The band edge emission plot of OFDM technique on the following 3-4 pages shows 45.41dB/ 46.17dB delta between carrier maximum power and local maximum emission in restrict band (2.3896GHz / 2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 (page 28) is 82.3 dBuV/m, so the maximum field strength in restrict band is $82.3 - 46.17 = 36.13$ dBuV/m which is under 54dBuV/m limit.

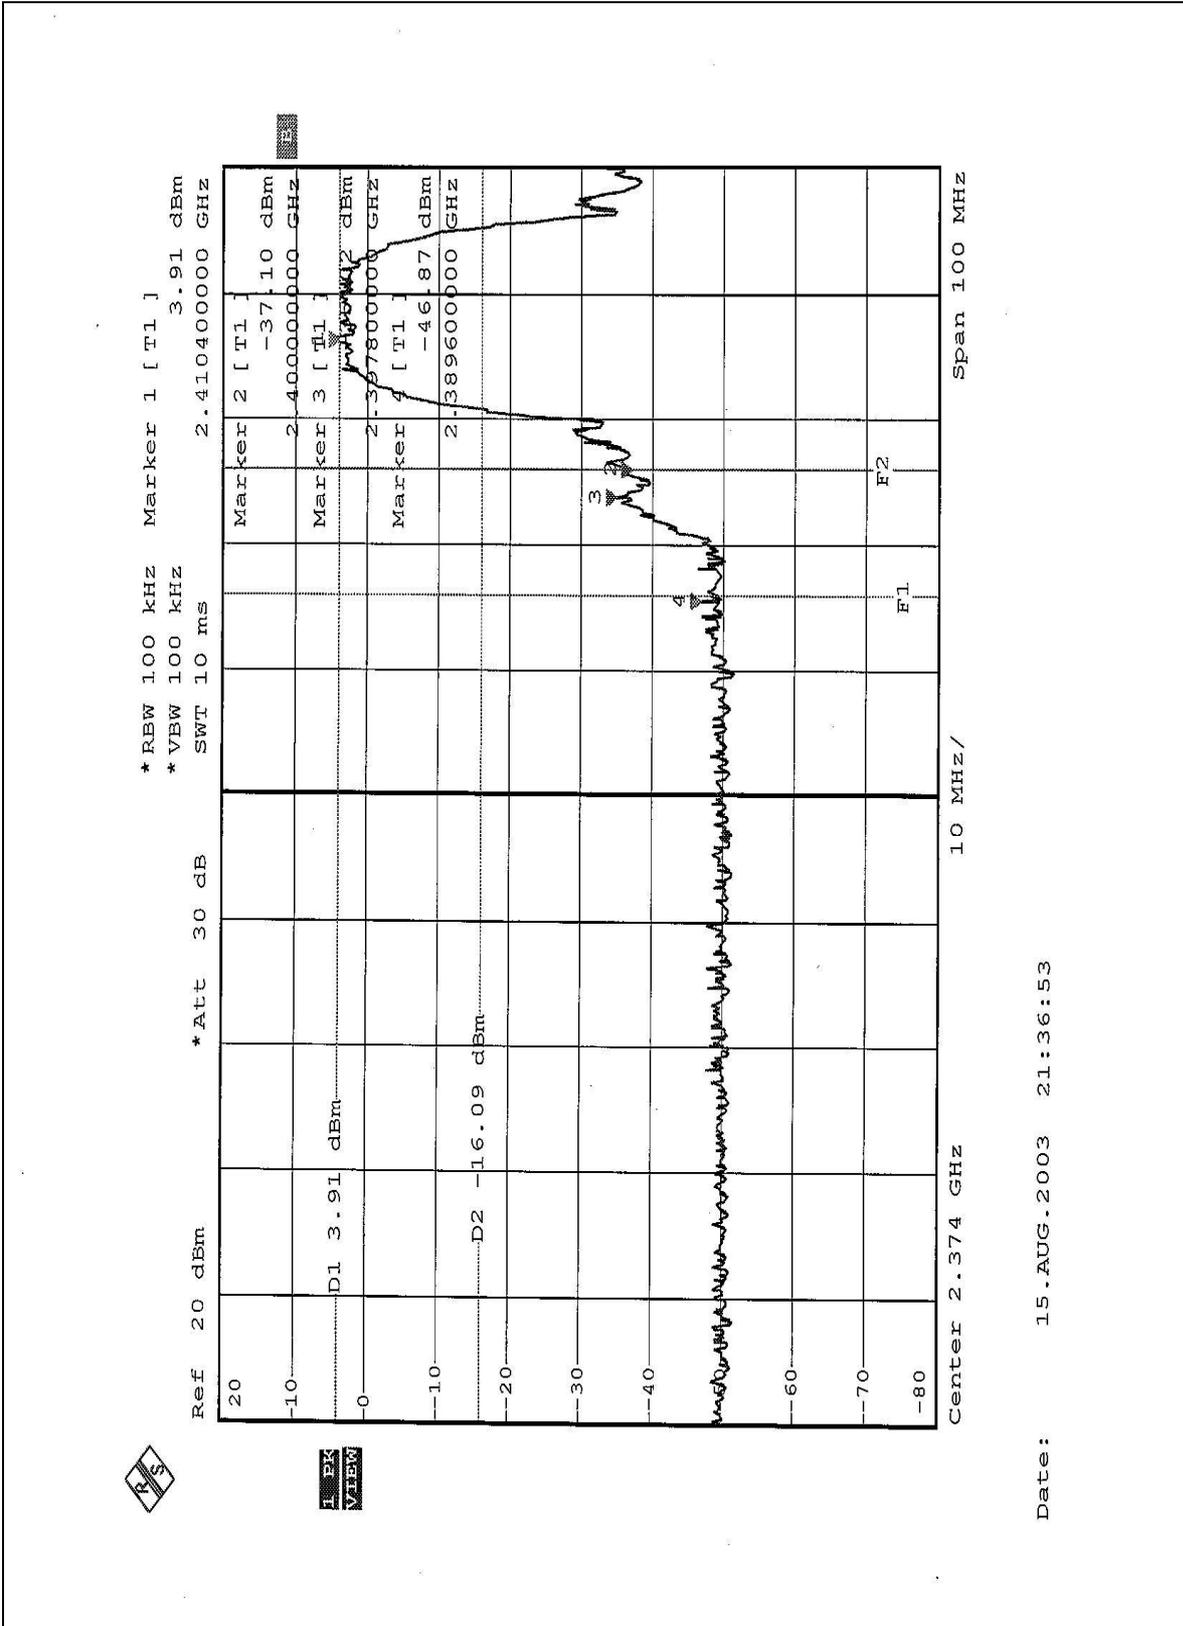


Date: 15.AUG.2003 21:36:53

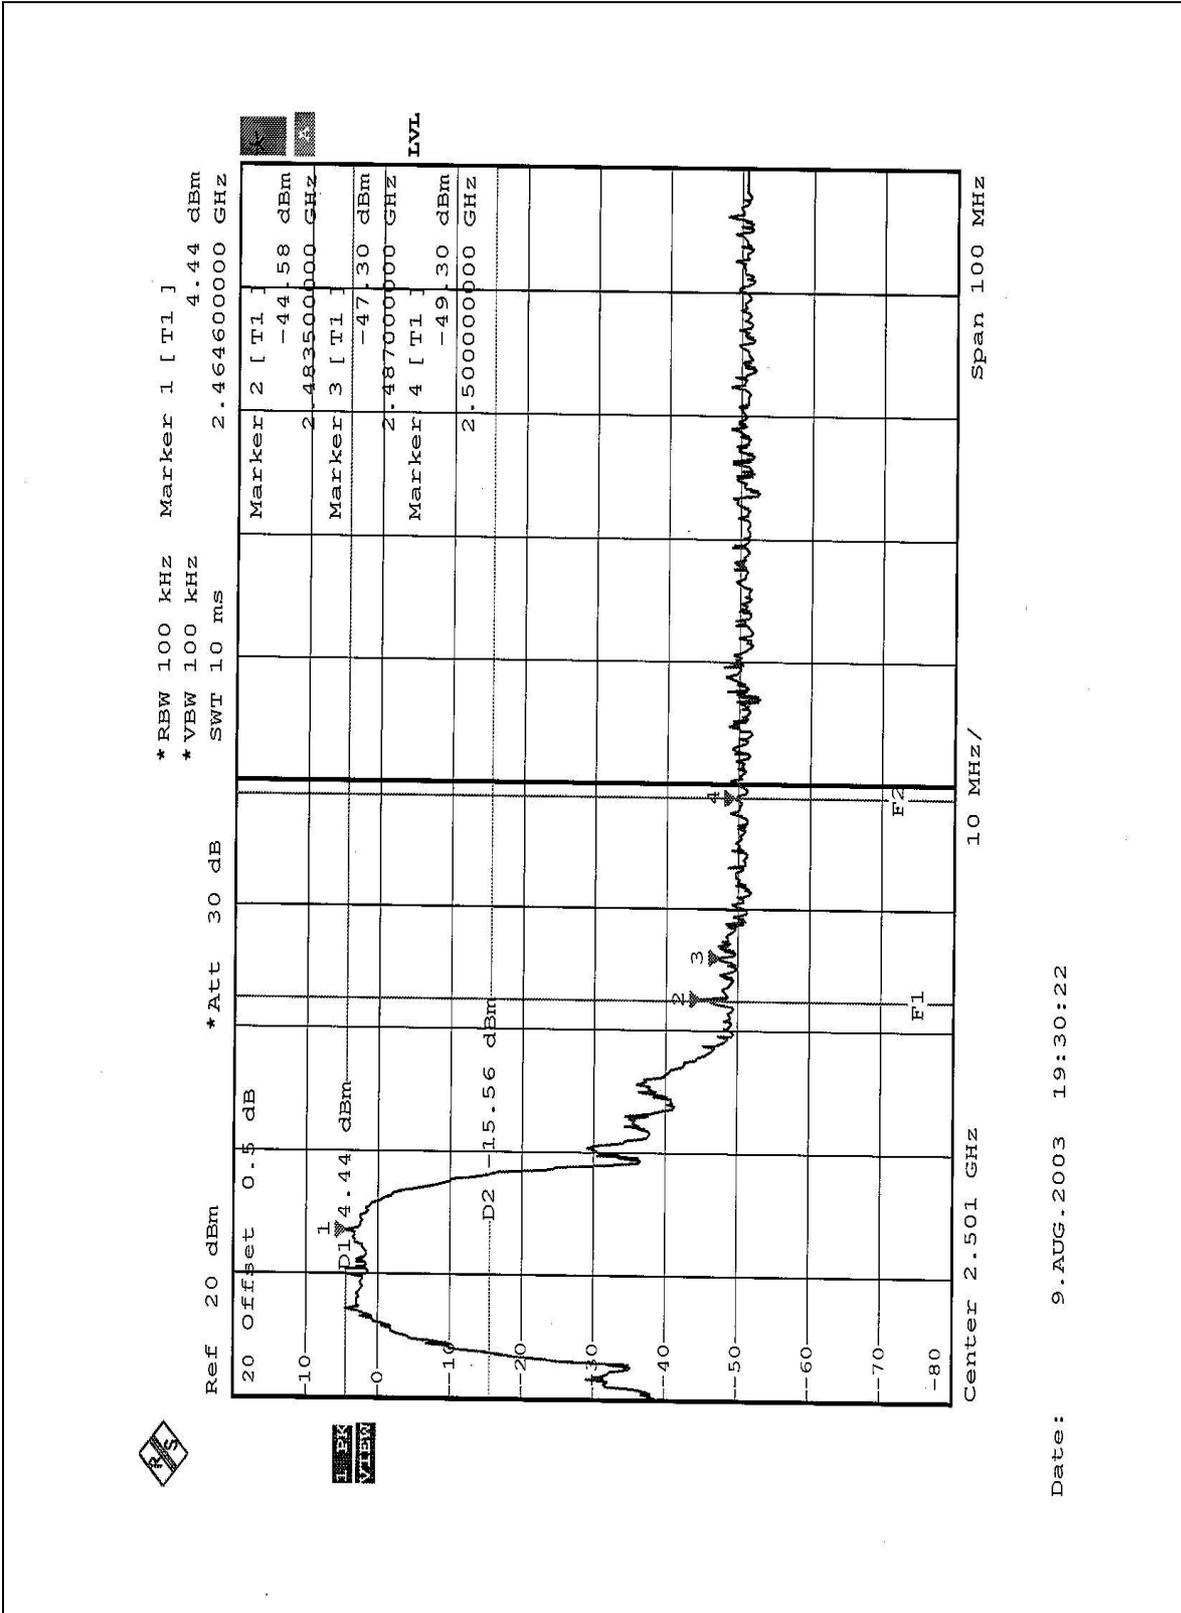

Date: 9.AUG.2003 19:30:22

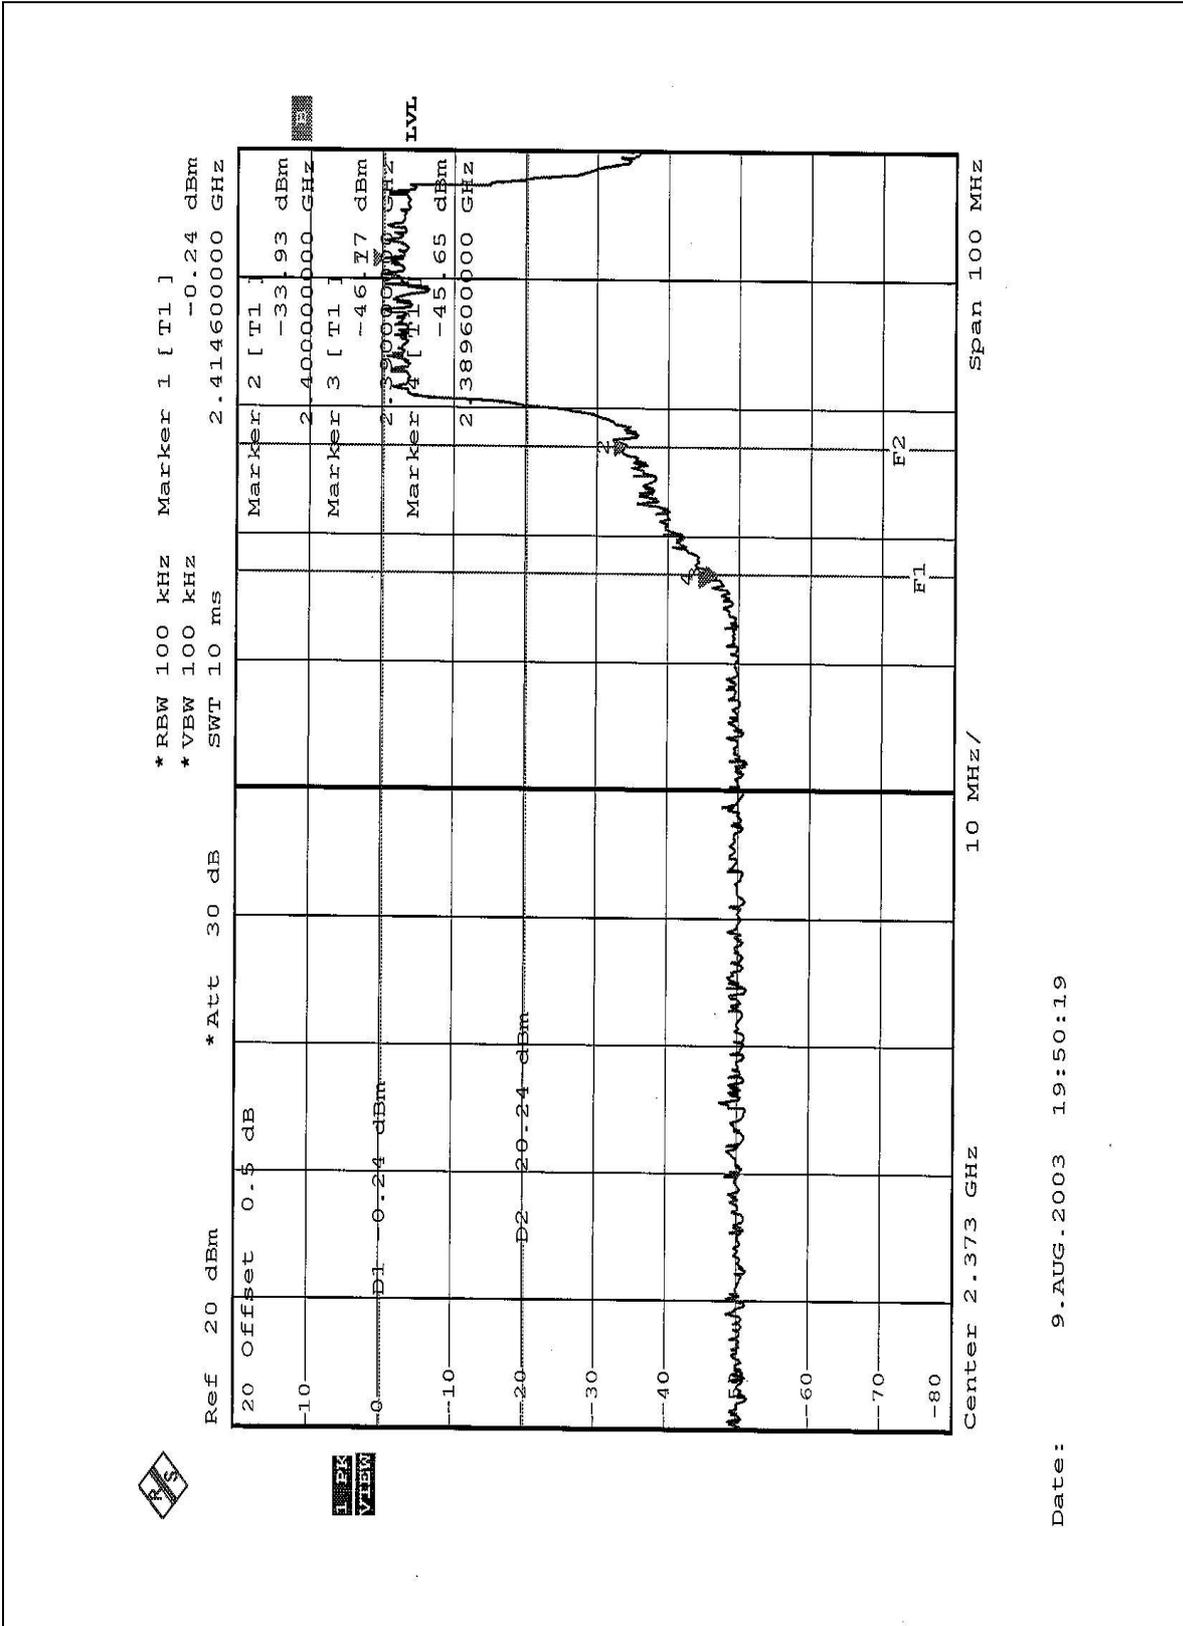

Date: 9.AUG.2003 19:50:19

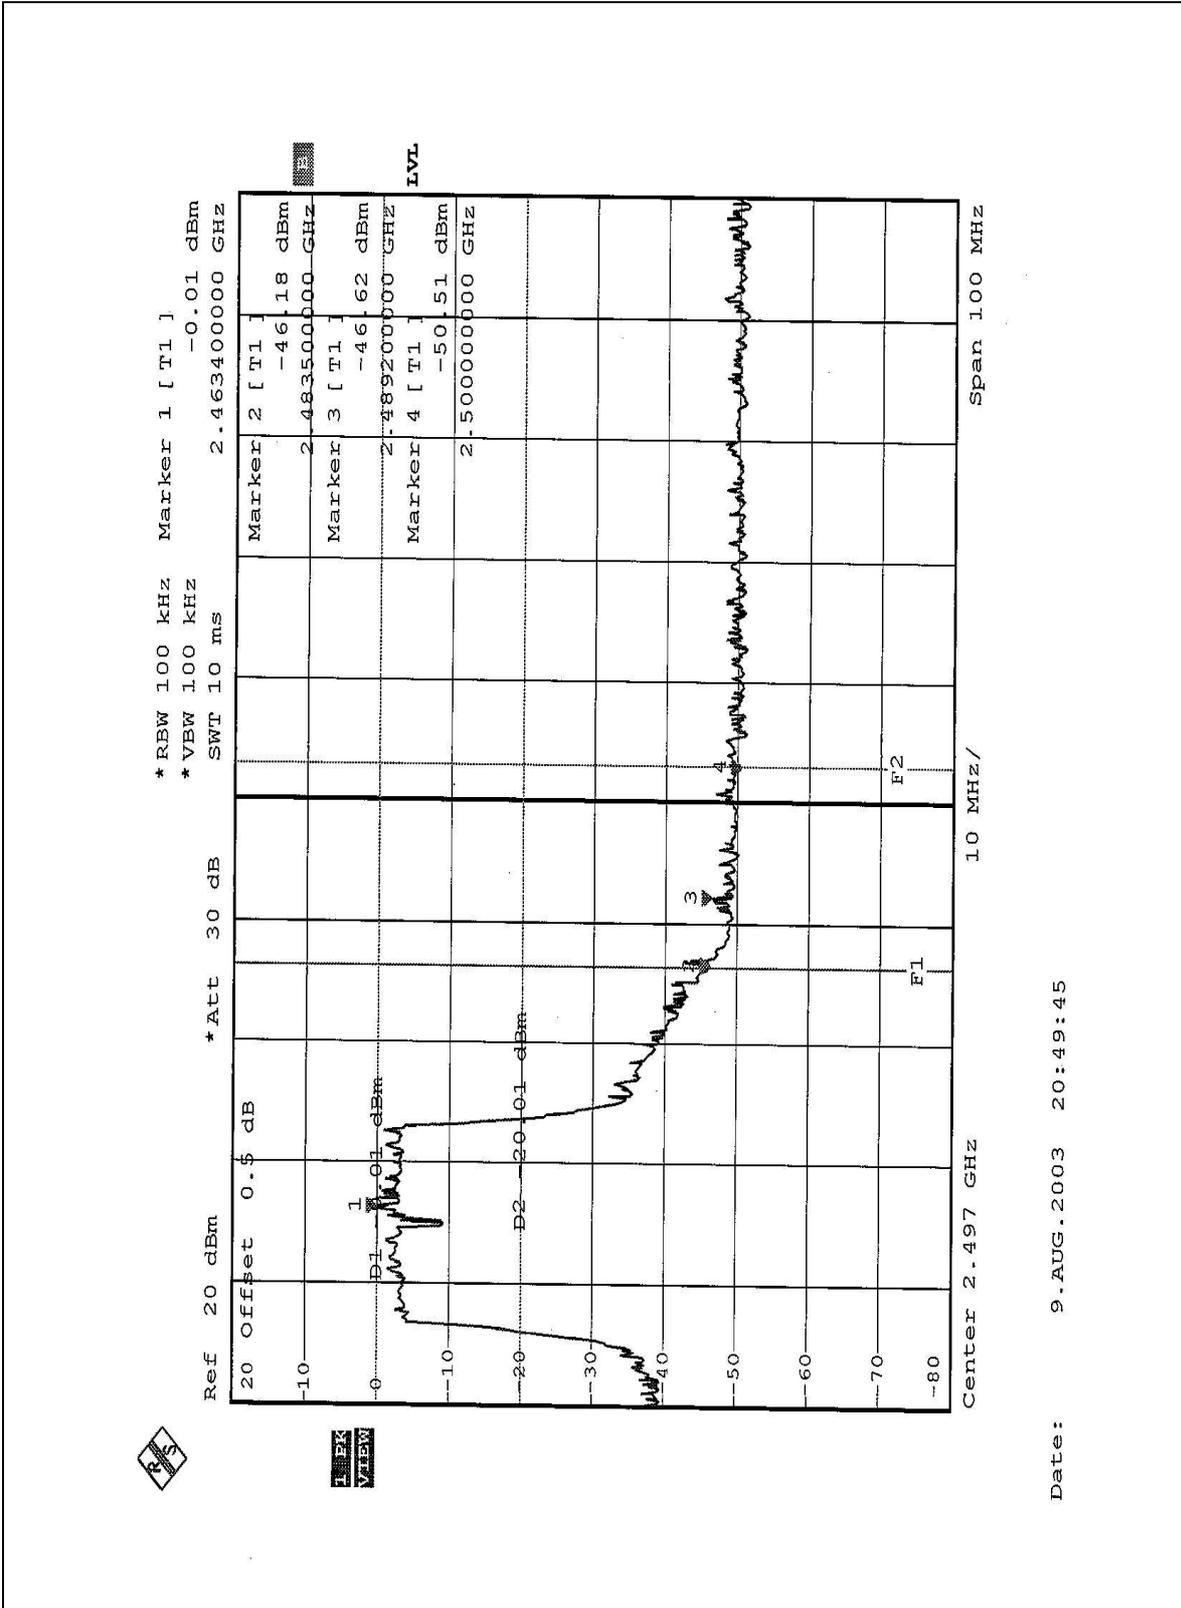



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is PIFA antenna with UFL antenna connector. The maximum Gain of this antenna is 3dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST



RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.