



FCC TEST REPORT

REPORT NO.: RF930715L19

MODEL NO.: WRTD-117GW (refer to page
7 for other models)

RECEIVED: July 16, 2004

TESTED: July 19 ~ July 23, 2004

APPLICANT: Gemtek Technology Co., Ltd.

ADDRESS: No.1, Jen Ai Road, Hsinchu Industrial Park,
Hukou, Hsinchu 303, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 19, Hwa Ya 2nd Rd., Kueishan, Taoyuan,
Taiwan, R.O.C.

This test report consists of 69 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
2.1	GENERAL DESCRIPTION OF EUT	6
3	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	8
3.4	DESCRIPTION OF SUPPORT UNITS	9
3.5	CONFIGURATION OF SYSTEM UNDER TEST	10
4	TEST TYPES AND RESULTS	11
4.1	CONDUCTED EMISSION MEASUREMENT	11
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	11
4.1.2	TEST INSTRUMENTS	11
4.1.3	TEST PROCEDURES	12
4.1.4	DEVIATION FROM TEST STANDARD	12
4.1.5	TEST SETUP	13
4.1.6	EUT OPERATING CONDITIONS	14
4.1.7	TEST RESULTS	15
4.2	RADIATED EMISSION MEASUREMENT	21
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	21
4.2.2	TEST INSTRUMENTS	22
4.2.3	TEST PROCEDURES	23
4.2.4	DEVIATION FROM TEST STANDARD	23
4.2.5	TEST SETUP	24
4.2.6	EUT OPERATING CONDITIONS	24
4.2.7	TEST RESULTS	25
4.3	6dB BANDWIDTH MEASUREMENT	33
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	33
4.3.2	TEST INSTRUMENTS	33
4.3.3	TEST PROCEDURE	34
4.3.4	DEVIATION FROM TEST STANDARD	34
4.3.5	TEST SETUP	34
4.3.6	EUT OPERATING CONDITIONS	34
4.3.7	TEST RESULTS	35
4.4	MAXIMUM PEAK OUTPUT POWER	43



4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	43
4.4.2	TEST INSTRUMENTS	43
4.4.3	TEST PROCEDURES	44
4.4.4	DEVIATION FROM TEST STANDARD.....	44
4.4.5	TEST SETUP	44
4.4.6	EUT OPERATING CONDITIONS	44
4.4.7	TEST RESULTS	45
4.5	POWER SPECTRAL DENSITY MEASUREMENT.....	46
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	46
4.5.2	TEST INSTRUMENTS.....	46
4.5.3	TEST PROCEDURE	47
4.5.4	DEVIATION FROM TEST STANDARD.....	47
4.5.5	TEST SETUP	47
4.5.6	EUT OPERATING CONDITIONS	47
4.5.7	TEST RESULTS	48
4.6	BAND EDGES MEASUREMENT	56
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	56
4.6.2	TEST INSTRUMENTS.....	56
4.6.3	TEST PROCEDURE	56
4.6.4	DEVIATION FROM TEST STANDARD.....	56
4.6.5	EUT OPERATING CONDITION.....	56
4.6.6	TEST RESULTS	57
4.7	ANTENNA REQUIREMENT	66
4.7.1	STANDARD APPLICABLE	66
4.7.2	ANTENNA CONNECTED CONSTRUCTION	66
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	67
6	INFORMATION ON THE TESTING LABORATORIES	69



1 CERTIFICATION

PRODUCT : Wireless AP VPN Router
MODEL NO. : WRTD-117GW (refer to page 7 for other models)
BRAND NAME : Gemtek (refer to page 7 for other brand names)
APPLICANT : Gemtek Technology Co., Ltd.
TESTED : July 19 ~ July 23, 2004
TEST ITEM : Engineering Sample
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2001

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Windy Chou , **DATE:** July 27, 2004
(Windy Chou)

TECHNICAL
ACCEPTANCE : Gary Chang , **DATE:** July 27, 2004
Responsible for RF (Gary Chang)

APPROVED BY : Cody Chang , **DATE:** July 27, 2004
(Cody Chang, Supervisor)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -8.44dB at 1.500MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.98dB at 500.42MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 GENERAL DESCRIPTION OF EUT

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9k~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.73 dB
	200MHz ~1000MHz	3.74 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless AP VPN Router
MODEL NO.	WRTD-117GW
POWER SUPPLY	5.0Vdc from power adapter
MODULATION TYPE	BPSK, QPSK, CCK, 16QAM, 64QAM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	15.00dBm
ANTENNA TYPE	Dipole antenna with 5dBi gain
DATA CABLE	NA
I/O PORTS	RJ45
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT was tested with the following adapters:

BRAND:	LEI
MODEL :	MT15-5050250-A1
INPUT :	100-120Vac, 50/60Hz, 0.5A
OUTPUT :	5.0Vdc, 2.5A

2. This EUT has other different models and brand names that listed below due to marketing requirement.

Brand	Model
Flex-P	Wilson 2.0
Neo Vantage	NV20VRAG

3. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
 4. The EUT complies with IEEE 802.11g draft standards and backwards compatible with IEEE 802.11b products.
 5. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, the worst case, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. From our experience and technical viewpoint, we have chosen data rates 11Mbps for CCK technique and 6Mbps for OFDM technique, as the worst cases for the test among other data rates.
4. Two test modes were presented in the following sections. The test mode A was for CCK technique and the test mode B was for OFDM technique.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Wireless AP VPN Router. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4: 2001

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	16484462992	E2K24CLNS
2	NOTEBOOK COMPUTER	DELL	PP05L	12130898320	E2K24CLNS
3	PRINTER	EPSON	LQ-300+	DCGY054146	FCC DoC Approved
4	MODEM	ACEEX	1414V/3	0401008260	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	1.2m shielded cable without core
4	1.2m shielded cable without core

NOTE: 1. All power cords of the above support units are non shielded (1.8m).
2. Item 2 act as a communication partner to transfer data.

3.5 CONFIGURATION OF SYSTEM UNDER TEST

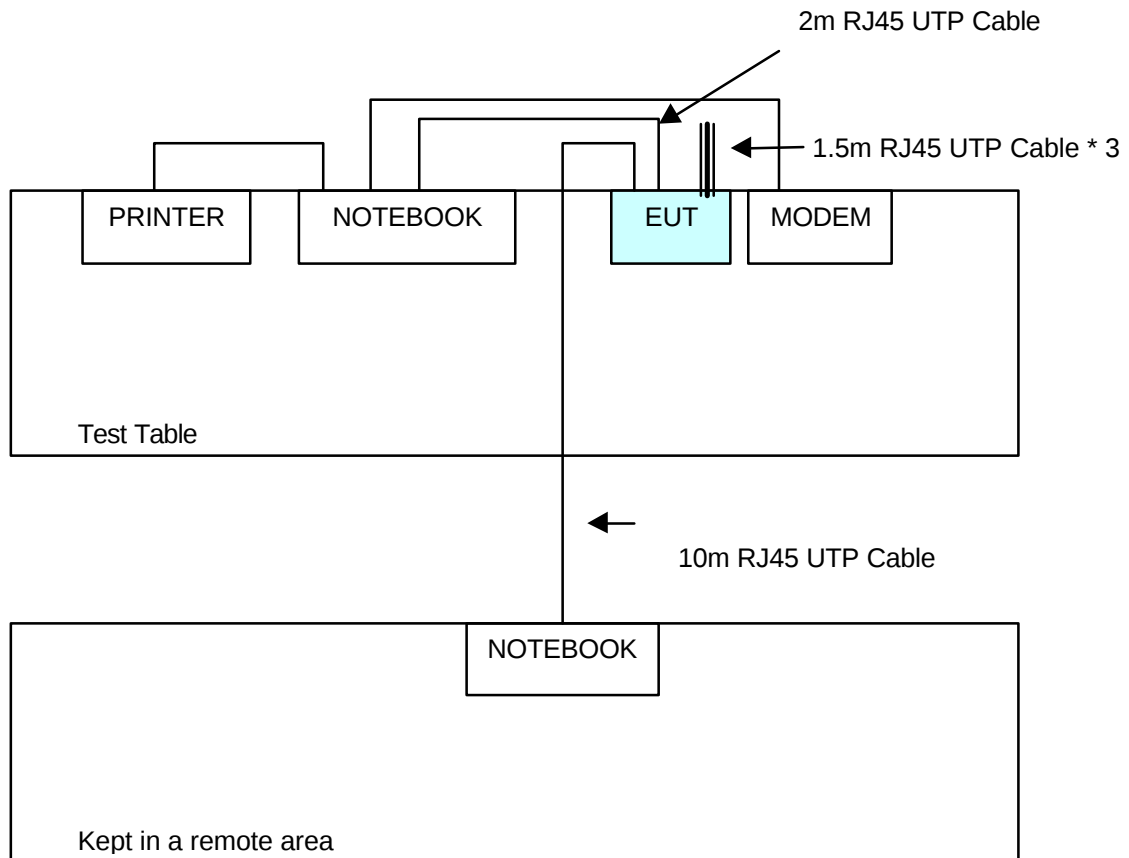

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Dec. 11, 2004
RF signal cable Woken	5D-FB	Cable-HyC02-01	Mar. 07, 2005
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Mar. 10, 2005
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Mar. 04, 2005
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels (Limit -20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

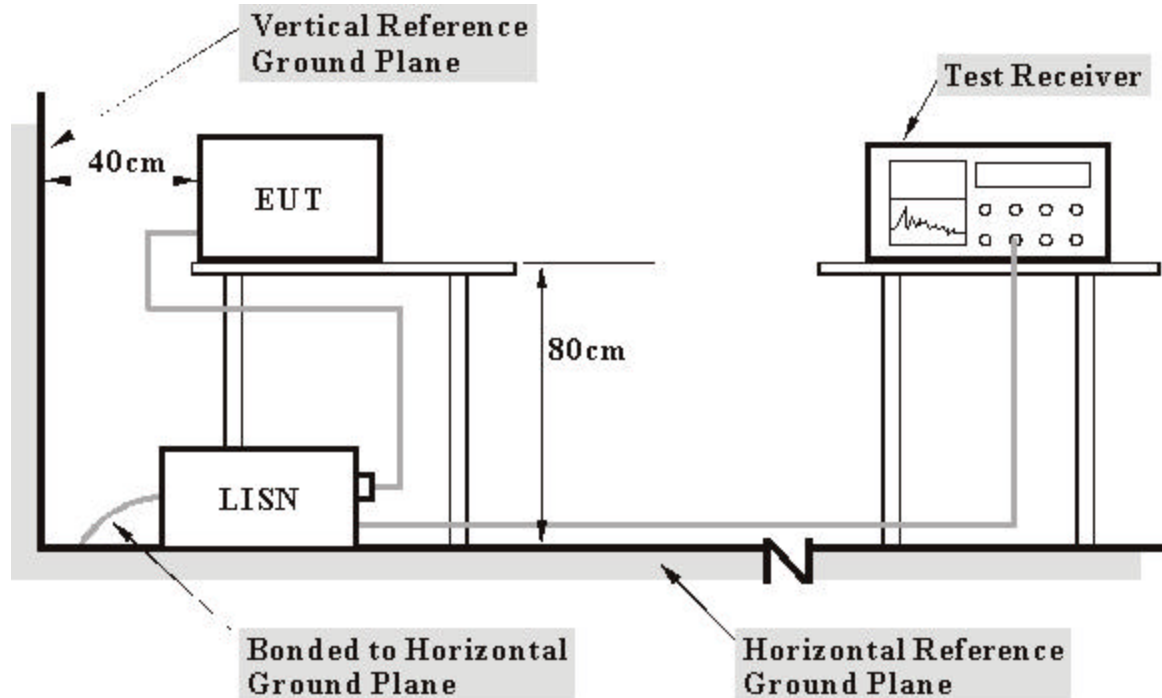

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.6 EUT OPERATING CONDITIONS


- a. Placed the EUT on the testing table.
- b. Prepared another Notebook system to act as a communication partner and placed it outside of testing area.
- c. The communication partner run a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency via an RJ45 cable.
- d. The communication partner sent data to EUT by command "PING".

4.1.7 TEST RESULTS

EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TESTED BY: Leo Hung	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.10	41.62	-	41.72	-	65.38	55.38	-23.65	-
2	0.427	0.12	40.35	-	40.47	-	57.30	47.30	-16.83	-
3	0.908	0.23	40.46	-	40.69	-	56.00	46.00	-15.31	-
4	1.438	0.25	47.26	35.91	47.51	36.16	56.00	46.00	-8.49	-9.84
5	2.133	0.26	43.35	-	43.61	-	56.00	46.00	-12.39	-
6	4.332	0.33	39.02	-	39.35	-	56.00	46.00	-16.65	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

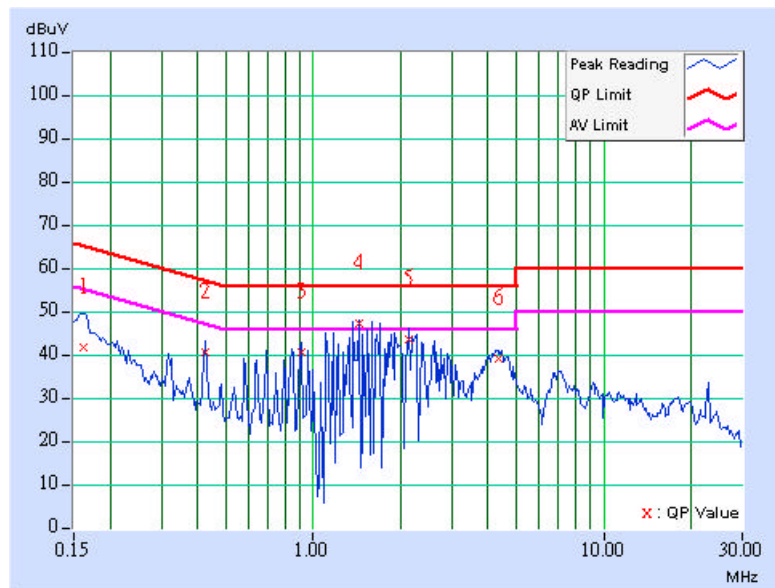

EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TESTED BY: Leo Hung	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.163	0.10	40.47	-	40.57	-	65.30	55.30	-24.74	-
2	0.963	0.23	38.95	-	39.18	-	56.00	46.00	-16.82	-
3	1.383	0.24	45.77	36.19	46.01	36.43	56.00	46.00	-9.99	-9.57
4	2.340	0.26	40.43	-	40.69	-	56.00	46.00	-15.31	-
5	4.484	0.32	39.64	-	39.96	-	56.00	46.00	-16.04	-
6	6.852	0.41	33.26	-	33.67	-	60.00	50.00	-26.33	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

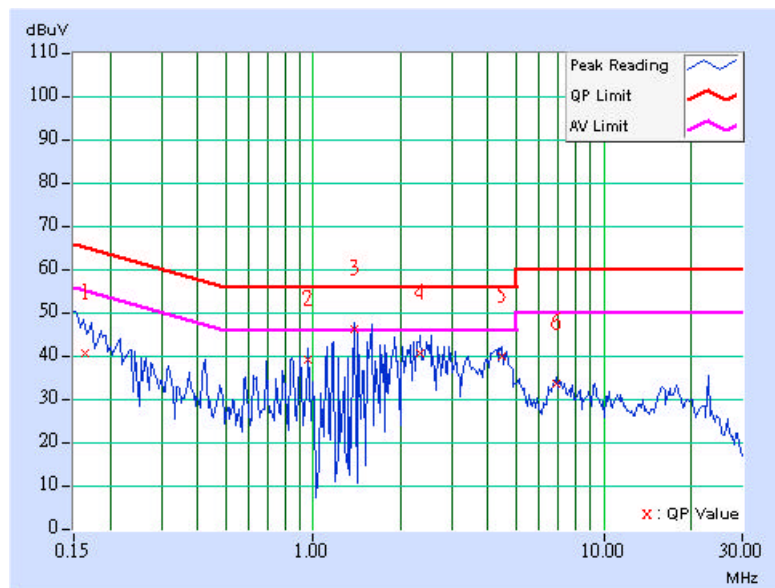

EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TESTED BY: Leo Hung	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.10	42.10	-	42.20	-	65.58	55.58	-23.37	-
2	0.319	0.11	37.30	-	37.41	-	59.74	49.74	-22.33	-
3	1.387	0.25	45.98	36.33	46.23	36.58	56.00	46.00	-9.77	-9.42
4	4.270	0.33	39.33	-	39.66	-	56.00	46.00	-16.34	-
5	6.789	0.43	33.61	-	34.04	-	60.00	50.00	-25.96	-
6	22.914	1.06	31.37	-	32.43	-	60.00	50.00	-27.57	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

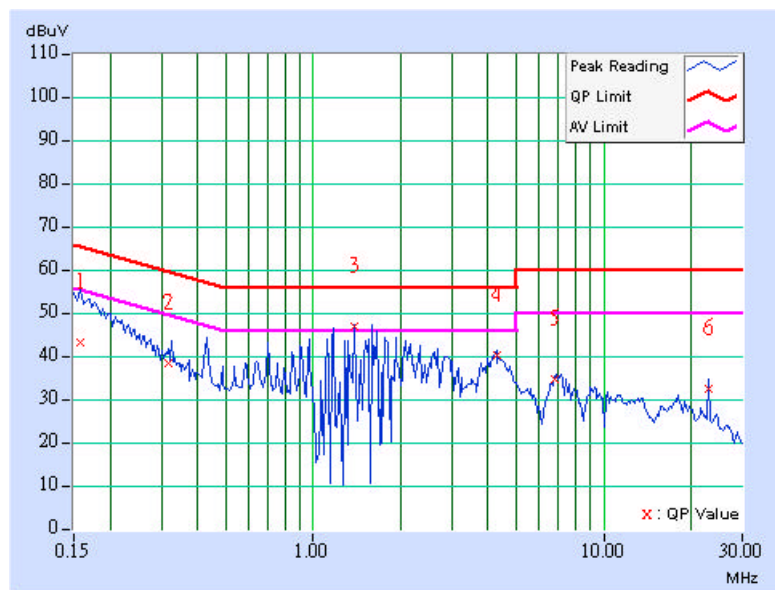

EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TESTED BY: Leo Hung	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.165	0.10	41.58	-	41.68	-	65.22	55.22	-23.54	-
2	0.427	0.12	38.27	-	38.39	-	57.30	47.30	-18.91	-
3	1.586	0.25	40.22	-	40.47	-	56.00	46.00	-15.53	-
4	2.129	0.25	41.93	-	42.18	-	56.00	46.00	-13.82	-
5	4.262	0.31	39.92	-	40.23	-	56.00	46.00	-15.77	-
6	7.059	0.42	33.20	-	33.62	-	60.00	50.00	-26.38	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

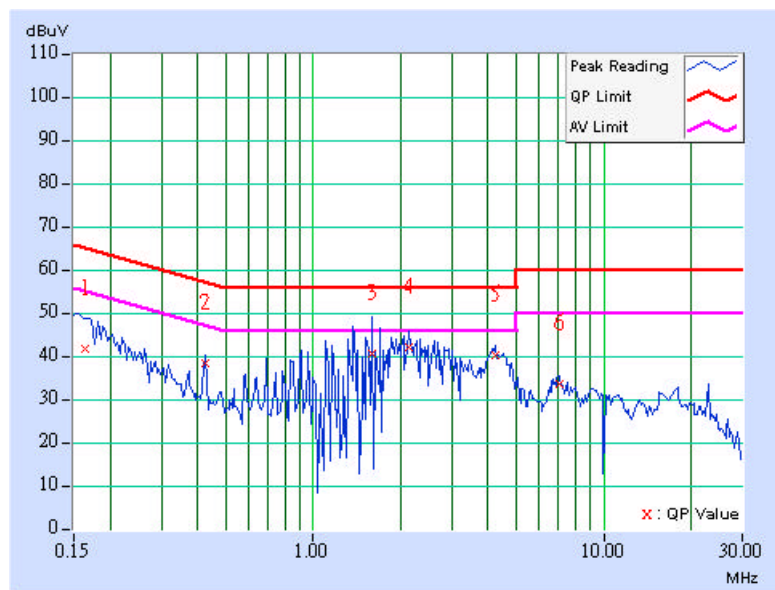

EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TESTED BY: Leo Hung	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.10	42.86	-	42.96	-	65.35	55.35	-22.39	-
2	0.431	0.12	40.66	-	40.78	-	57.23	47.23	-16.45	-
3	1.500	0.26	47.30	35.62	47.56	35.88	56.00	46.00	-8.44	-10.12
4	2.258	0.27	42.75	-	43.02	-	56.00	46.00	-12.98	-
5	4.133	0.32	39.54	-	39.86	-	56.00	46.00	-16.14	-
6	22.926	1.06	31.51	-	32.57	-	60.00	50.00	-27.43	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

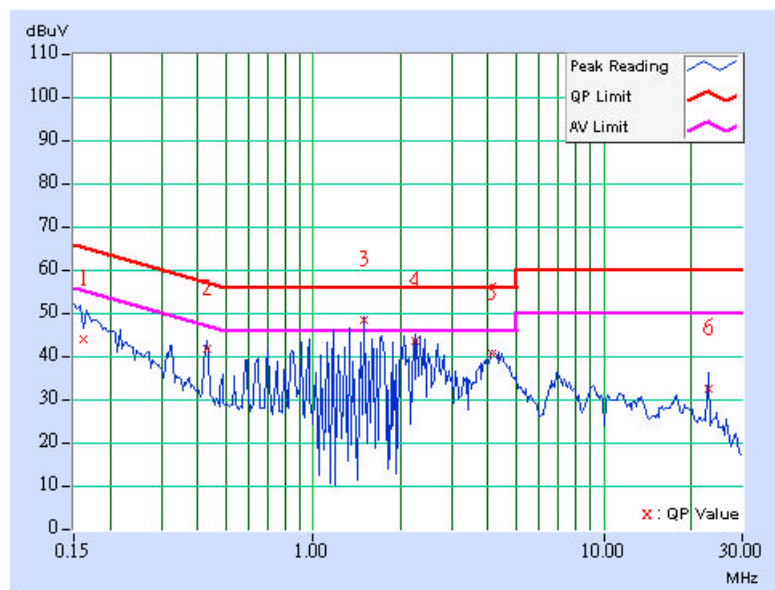

EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Netural (N)
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TESTED BY: Leo Hung	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.10	41.96	-	42.06	-	65.18	55.18	-23.12	-
2	0.896	0.22	32.31	-	32.53	-	56.00	46.00	-23.47	-
3	1.715	0.25	46.46	34.61	46.71	34.86	56.00	46.00	-9.29	-11.14
4	2.672	0.27	39.35	-	39.62	-	56.00	46.00	-16.38	-
5	4.273	0.32	40.58	-	40.90	-	56.00	46.00	-15.10	-
6	22.918	0.68	31.13	-	31.81	-	60.00	50.00	-28.19	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

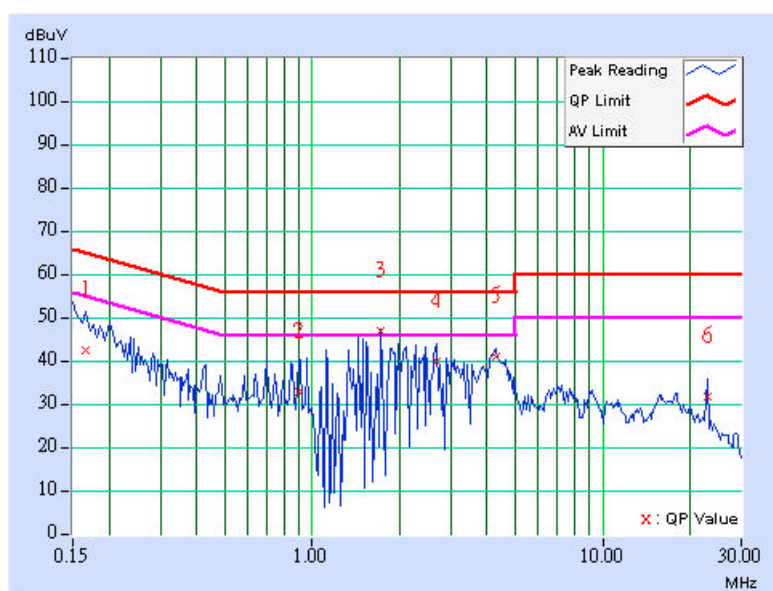



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Jan. 13, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Dec. 15, 2004
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170241	Feb. 23, 2005
Preamplifier Agilent	8449B	3008A01961	Jan. 22, 2005
Preamplifier Agilent	8447D	2944A10629	Jan. 14, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218182/4	Mar. 04, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218194/4	Mar. 04, 2005
Software ADT.	ADT_Radiated_V5.1 4	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 1.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-2.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

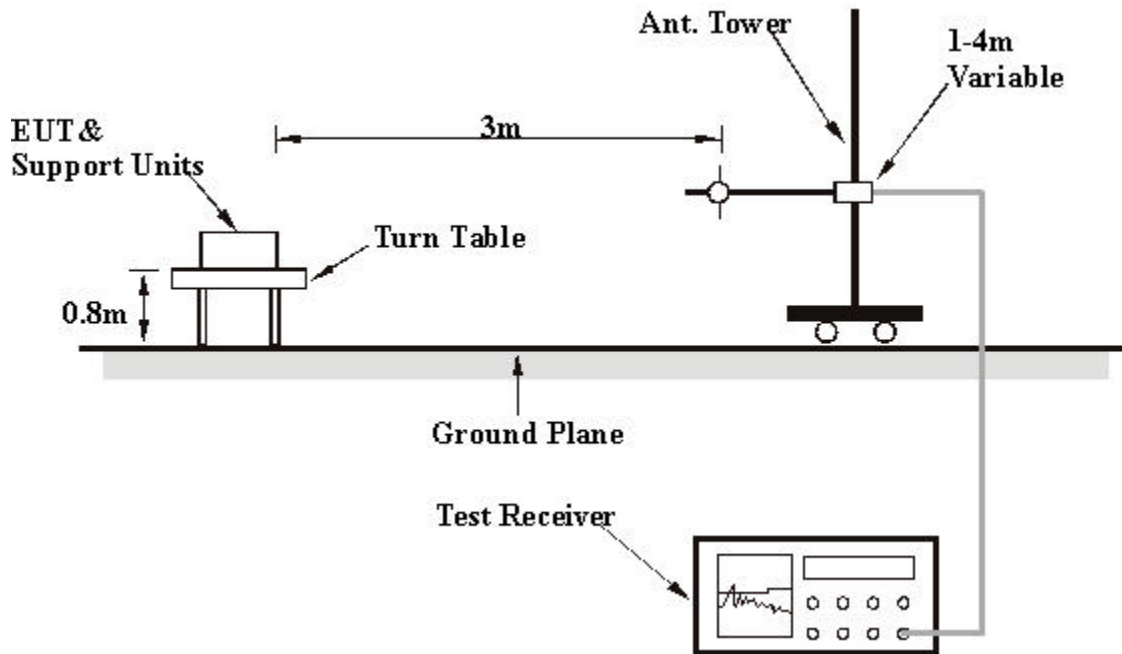

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
CHANNEL	11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120 Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26 deg. C, 62% RH, 991 hPa	TESTED BY: Match Tsui	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	94.15	30.62 QP	43.50	-12.88	2.00 H	13	20.09	10.52
2	206.89	33.55 QP	43.50	-9.95	1.25 H	31	22.01	11.54
3	249.66	38.49 QP	46.00	-7.51	1.25 H	1	25.27	13.22
4	298.26	31.70 QP	46.00	-14.30	1.00 H	283	17.23	14.47
5	344.91	33.73 QP	46.00	-12.27	1.00 H	268	18.20	15.53
6	374.07	38.73 QP	46.00	-7.27	1.00 H	211	22.55	16.18
7	399.34	34.89 QP	46.00	-11.11	2.50 H	178	18.16	16.74
8	436.27	36.68 QP	46.00	-9.32	2.00 H	88	18.97	17.71
9	459.60	41.11 QP	46.00	-4.89	1.75 H	346	22.92	18.20
10	482.93	36.25 QP	46.00	-9.75	1.75 H	334	17.75	18.50
11	500.42	44.02 QP	46.00	-1.98	1.00 H	133	25.28	18.74
12	529.58	31.28 QP	46.00	-14.72	1.50 H	250	11.98	19.30
13	644.27	34.91 QP	46.00	-11.09	1.50 H	265	13.31	21.60
14	675.37	33.02 QP	46.00	-12.98	2.50 H	166	11.02	21.99
15	751.18	35.53 QP	46.00	-10.47	1.25 H	7	11.99	23.54
16	828.94	33.25 QP	46.00	-12.75	2.00 H	127	9.21	24.03

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
CHANNEL	11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120 Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26 deg. C, 62% RH, 991 hPa	TESTED BY: Match Tsui	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.93	36.80 QP	40.00	-3.20	1.00 V	79	23.87	12.93
2	88.00	36.32 QP	40.00	-3.68	1.00 V	4	26.17	10.15
3	109.70	35.94 QP	43.50	-7.56	1.00 V	289	23.97	11.97
4	206.89	35.58 QP	43.50	-7.92	1.00 V	322	24.04	11.54
5	249.66	36.73 QP	46.00	-9.27	1.00 V	163	23.51	13.22
6	344.91	35.28 QP	46.00	-10.72	1.75 V	22	19.75	15.53
7	374.07	34.84 QP	46.00	-11.16	1.50 V	97	18.66	16.18
8	391.56	34.70 QP	46.00	-11.30	1.25 V	358	18.14	16.56
9	438.22	38.62 QP	46.00	-7.38	1.25 V	46	20.86	17.76
10	461.54	35.51 QP	46.00	-10.49	1.25 V	181	17.29	18.22
11	500.42	41.99 QP	46.00	-4.01	1.00 V	307	23.25	18.74
12	531.52	34.72 QP	46.00	-11.28	1.00 V	301	15.38	19.34
13	646.21	40.64 QP	46.00	-5.36	1.75 V	250	19.01	21.63
14	751.18	34.00 QP	46.00	-12.00	1.00 V	358	10.47	23.54
15	799.78	34.32 QP	46.00	-11.68	1.25 V	205	10.50	23.82
16	830.88	36.98 QP	46.00	-9.02	1.25 V	55	12.93	24.05

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60% RH, 991 hPa	TEST MODE	A
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1500.00	45.92 PK	74.00	-28.08	1.00 H	98	17.91	28.01
1	1500.00	40.56 AV	54.00	-13.44	1.00 H	98	12.55	28.01
2	2374.00	40.01 PK	74.00	-33.99	1.24 H	355	9.28	30.73
2	2374.00	40.01 PK	74.00	-33.99	1.24 H	355	9.28	30.73
3	*2412.00	101.00 PK			1.24 H	355	70.12	30.88
3	*2412.00	92.84 AV			1.24 H	355	61.96	30.88
4	4824.00	50.13 PK	74.00	-23.87	1.02 H	10	13.68	36.45
4	4824.00	50.13 PK	74.00	-23.87	1.02 H	10	13.68	36.45
5	9648.00	50.92 PK	74.00	-23.08	1.05 H	218	7.15	43.77
5	9648.00	42.03 AV	54.00	-11.97	1.05 H	218	-1.74	43.77

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1500.00	46.34 PK	74.00	-27.66	1.10 V	1	18.33	28.01
1	1500.00	46.34 PK	74.00	-27.66	1.10 V	1	18.33	28.01
2	2374.00	54.34 PK	74.00	-19.66	1.00 V	292	23.61	30.73
2	2374.00	41.88 AV	54.00	-12.12	1.00 V	292	11.15	30.73
3	2374.00	51.08 PK	74.00	-22.92	1.24 V	159	20.35	30.73
3	2374.00	42.91 AV	54.00	-11.09	1.24 V	159	12.18	30.73
4	*2412.00	112.07 PK			1.24 V	159	81.19	30.88
4	*2412.00	103.90 AV			1.24 V	159	73.02	30.88
5	4824.00	57.99 PK	74.00	-16.01	1.14 V	324	21.54	36.45
5	4824.00	47.08 AV	54.00	-6.92	1.14 V	324	10.63	36.45
6	9648.00	55.60 PK	74.00	-18.40	1.20 V	352	11.83	43.77
6	9648.00	44.44 AV	54.00	-9.56	1.20 V	352	0.67	43.77

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency



EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
CHANNEL	6	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60% RH, 991 hPa	TEST MODE	A
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1500.00	46.36 PK	74.00	-27.64	1.01 H	97	18.35	28.01
1	1500.00	40.68 AV	54.00	-13.32	1.01 H	97	12.67	28.01
2	*2437.00	100.34 PK			1.17 H	360	69.36	30.98
2	*2437.00	92.41 AV			1.17 H	360	61.43	30.98
3	4874.00	50.23 PK	74.00	-23.77	1.22 H	308	13.62	36.61
3	4874.00	41.71 AV	54.00	-12.29	1.22 H	308	5.10	36.61
4	9748.00	50.74 PK	74.00	-23.26	1.12 H	211	10.65	40.09
4	9748.00	38.81 AV	54.00	-15.19	1.12 H	211	10.65	40.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1500.00	44.31 PK	74.00	-29.69	1.20 V	191	16.30	28.01
1	1500.00	37.59 AV	54.00	-16.41	1.20 V	191	9.58	28.01
2	2350.00	47.11 PK	74.00	-26.89	1.00 V	356	16.49	30.62
2	2350.00	37.22 AV	54.00	-16.78	1.00 V	356	6.60	30.62
3	*2437.00	113.13 PK			1.20 V	117	82.15	30.98
3	*2437.00	105.36 AV			1.20 V	117	74.38	30.98
4	4874.00	55.90 PK	74.00	-18.10	1.37 V	332	19.29	36.61
4	4874.00	47.62 AV	54.00	-6.38	1.37 V	332	11.01	36.61
5	9748.00	51.65 PK	74.00	-22.35	1.19 V	37	11.56	40.09
5	9748.00	39.76 AV	54.00	-14.24	1.19 V	37	-0.33	40.09

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency



EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
CHANNEL	11	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60% RH, 991 hPa	TEST MODE	A
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1500.00	43.70 PK	74.00	-30.30	1.08 H	166	15.69	28.01
1	1500.00	36.50 AV	54.00	-17.50	1.08 H	166	8.49	28.01
2	*2462.00	100.39 PK			1.00 H	360	69.31	31.08
2	*2462.00	92.59 AV			1.00 H	360	61.51	31.08
3	2483.50	40.77 PK	74.00	-33.23	1.00 H	360	9.60	31.17
3	2483.50	32.97 AV	54.00	-21.03	1.00 H	360	1.80	31.17
4	4924.00	49.12 PK	74.00	-24.88	1.22 H	306	12.32	36.80
4	4924.00	41.21 AV	54.00	-12.79	1.22 H	306	4.41	36.80
5	9848.00	48.57 PK	74.00	-25.43	1.05 H	113	11.58	36.99
5	9848.00	34.28 AV	54.00	-19.72	1.05 H	113	-2.71	36.99

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1500.00	45.42 PK	74.00	-28.58	1.07 V	360	17.41	28.01
1	1500.00	40.31 AV	54.00	-13.69	1.07 V	360	12.30	28.01
2	*2462.00	112.84 PK			1.23 V	142	81.76	31.08
2	*2462.00	104.89 AV			1.23 V	142	73.81	31.08
3	2483.50	53.22 PK	74.00	-20.78	1.23 V	142	22.05	31.17
3	2483.50	45.27 AV	54.00	-8.73	1.23 V	142	14.10	31.17
4	2500.00	49.63 PK	74.00	-24.37	1.14 V	115	18.39	31.24
4	2500.00	8.89 AV	54.00	-13.87	1.14 V	115	8.89	31.24
5	4924.00	52.43 PK	74.00	-21.57	1.02 V	287	15.63	36.80
5	4924.00	46.32 AV	54.00	-7.68	1.02 V	287	9.52	36.80
6	9848.00	48.29 PK	74.00	-25.71	1.16 V	358	11.30	36.99
6	9848.00	36.08 AV	54.00	-17.92	1.16 V	358	-0.91	36.99

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency



EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60% RH, 991 hPa	TEST MODE	B
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1500.00	44.95 PK	74.00	-29.05	1.00 H	50	16.94	28.01
1	1500.00	38.68 AV	54.00	-15.32	1.00 H	50	10.67	28.01
2	2376.00	43.23 PK	74.00	-30.77	1.00 H	360	12.50	30.73
2	2376.00	33.52 AV	54.00	-20.48	1.00 H	360	2.79	30.73
3	*2412.00	98.54 PK			1.00 H	360	67.66	30.88
3	*2412.00	88.83 AV			1.00 H	360	57.95	30.88
4	4824.00	50.10 PK	74.00	-23.90	1.39 H	304	13.65	36.45
4	4824.00	41.63 AV	54.00	-12.37	1.39 H	304	5.18	36.45
5	9648.00	53.91 PK	74.00	-20.09	1.03 H	34	10.14	43.77
5	9648.00	42.19 AV	54.00	-11.81	1.03 H	34	-1.58	43.77

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2376.00	55.55 PK	74.00	-18.45	1.27 V	177	24.82	30.73
1	2376.00	44.04 AV	54.00	-9.96	1.27 V	177	13.31	30.73
2	2376.00	55.40 PK	74.00	-18.60	1.05 V	298	24.67	30.73
2	2376.00	51.41 AV	54.00	-2.59	1.05 V	298	20.68	30.73
3	*2412.00	110.71 PK			1.05 V	298	79.83	30.88
3	*2412.00	100.98 AV			1.05 V	298	70.10	30.88
4	4824.00	54.49 PK	74.00	-19.51	1.26 V	305	18.04	36.45
4	4824.00	46.26 AV	54.00	-7.74	1.26 V	305	9.81	36.45
5	9648.00	54.80 PK	74.00	-19.20	1.26 V	8	11.03	43.77
5	9648.00	43.71 AV	54.00	-10.29	1.26 V	8	-0.06	43.77

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency



EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
CHANNEL	6	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60% RH, 991 hPa	TEST MODE	B
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1500.00	43.80 PK	74.00	-30.20	1.35 H	276	15.79	28.01
1	1500.00	36.30 AV	54.00	-17.70	1.35 H	276	8.29	28.01
2	*2437.00	96.85 PK			1.24 H	169	65.87	30.98
2	*2437.00	87.37 AV			1.24 H	169	56.39	30.98
3	4874.00	50.46 PK	74.00	-23.54	1.28 H	7	13.85	36.61
3	4874.00	40.95 AV	54.00	-13.05	1.28 H	7	4.34	36.61
4	9748.00	50.62 PK	74.00	-23.38	1.24 H	169	10.53	40.09
4	9748.00	38.98 AV	54.00	-15.02	1.24 H	169	-1.11	40.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1500.00	43.79 PK	74.00	-30.21	1.00 V	122	15.78	28.01
1	1500.00	38.13 AV	54.00	-15.87	1.00 V	122	10.12	28.01
2	*2437.00	110.48 PK			1.24 V	353	79.50	30.98
2	*2437.00	100.84 AV			1.24 V	353	69.86	30.98
3	4874.00	52.82 PK	74.00	-21.18	1.00 V	308	16.21	36.61
3	4874.00	47.85 AV	54.00	-6.15	1.00 V	308	11.24	36.61
4	9748.00	48.21 PK	74.00	-25.79	1.02 V	218	8.12	40.09
4	9748.00	40.18 AV	54.00	-13.82	1.02 V	218	0.09	40.09

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency



EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
CHANNEL	11	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 60% RH, 991 hPa	TEST MODE	B
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1440.00	45.53 PK	74.00	-28.47	1.14 H	1	17.25	28.28
1	1440.00	35.61 AV	54.00	-18.39	1.14 H	1	7.33	28.28
2	*2462.00	99.15 PK			1.40 H	308	68.07	31.08
2	*2462.00	89.28 AV			1.40 H	308	58.20	31.08
3	2483.50	40.15 PK	74.00	-33.85	1.40 H	308	8.98	31.17
3	2483.50	30.28 AV	54.00	-23.72	1.40 H	308	-0.89	31.17
4	2498.00	53.84 PK	74.00	-20.16	1.15 H	309	22.61	31.23
4	2498.00	43.04 AV	54.00	-10.96	1.15 H	309	11.81	31.23
5	4924.00	53.33 PK	74.00	-20.67	1.00 H	143	16.53	36.80
5	4924.00	47.44 AV	54.00	-6.56	1.00 H	143	10.64	36.80
6	9848.00	48.53 PK	74.00	-25.47	1.15 H	1	11.54	36.99
6	9848.00	36.31 AV	54.00	-17.69	1.15 H	1	-0.68	36.99

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1500.00	45.42 PK	74.00	-28.58	1.07 V	360	17.41	28.01
1	1500.00	40.31 AV	54.00	-13.69	1.07 V	360	12.30	28.01
2	*2462.00	112.84 PK			1.23 V	142	81.76	31.08
2	*2462.00	103.40 AV			1.23 V	142	72.32	31.08
3	2483.50	53.22 PK	74.00	-20.78	1.23 V	142	22.05	31.17
3	2483.50	45.27 AV	54.00	-8.73	1.23 V	142	14.10	31.17
4	2500.00	49.63 PK	74.00	-24.37	1.14 V	115	18.39	31.24
4	2500.00	40.13 AV	54.00	-13.87	1.14 V	115	8.89	31.24
5	4924.00	52.43 PK	74.00	-21.57	1.02 V	287	15.63	36.80
5	4924.00	46.32 AV	54.00	-7.68	1.02 V	287	9.52	36.80
6	9848.00	48.29 PK	74.00	-25.71	1.16 V	358	11.30	36.99
6	9848.00	36.08 AV	54.00	-17.92	1.16 V	358	-0.91	36.99

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TEST MODE	A	TESTED BY	Leo Hung


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	10.40	0.5	PASS
6	2437	9.92	0.5	PASS
11	2462	10.12	0.5	PASS




CH1

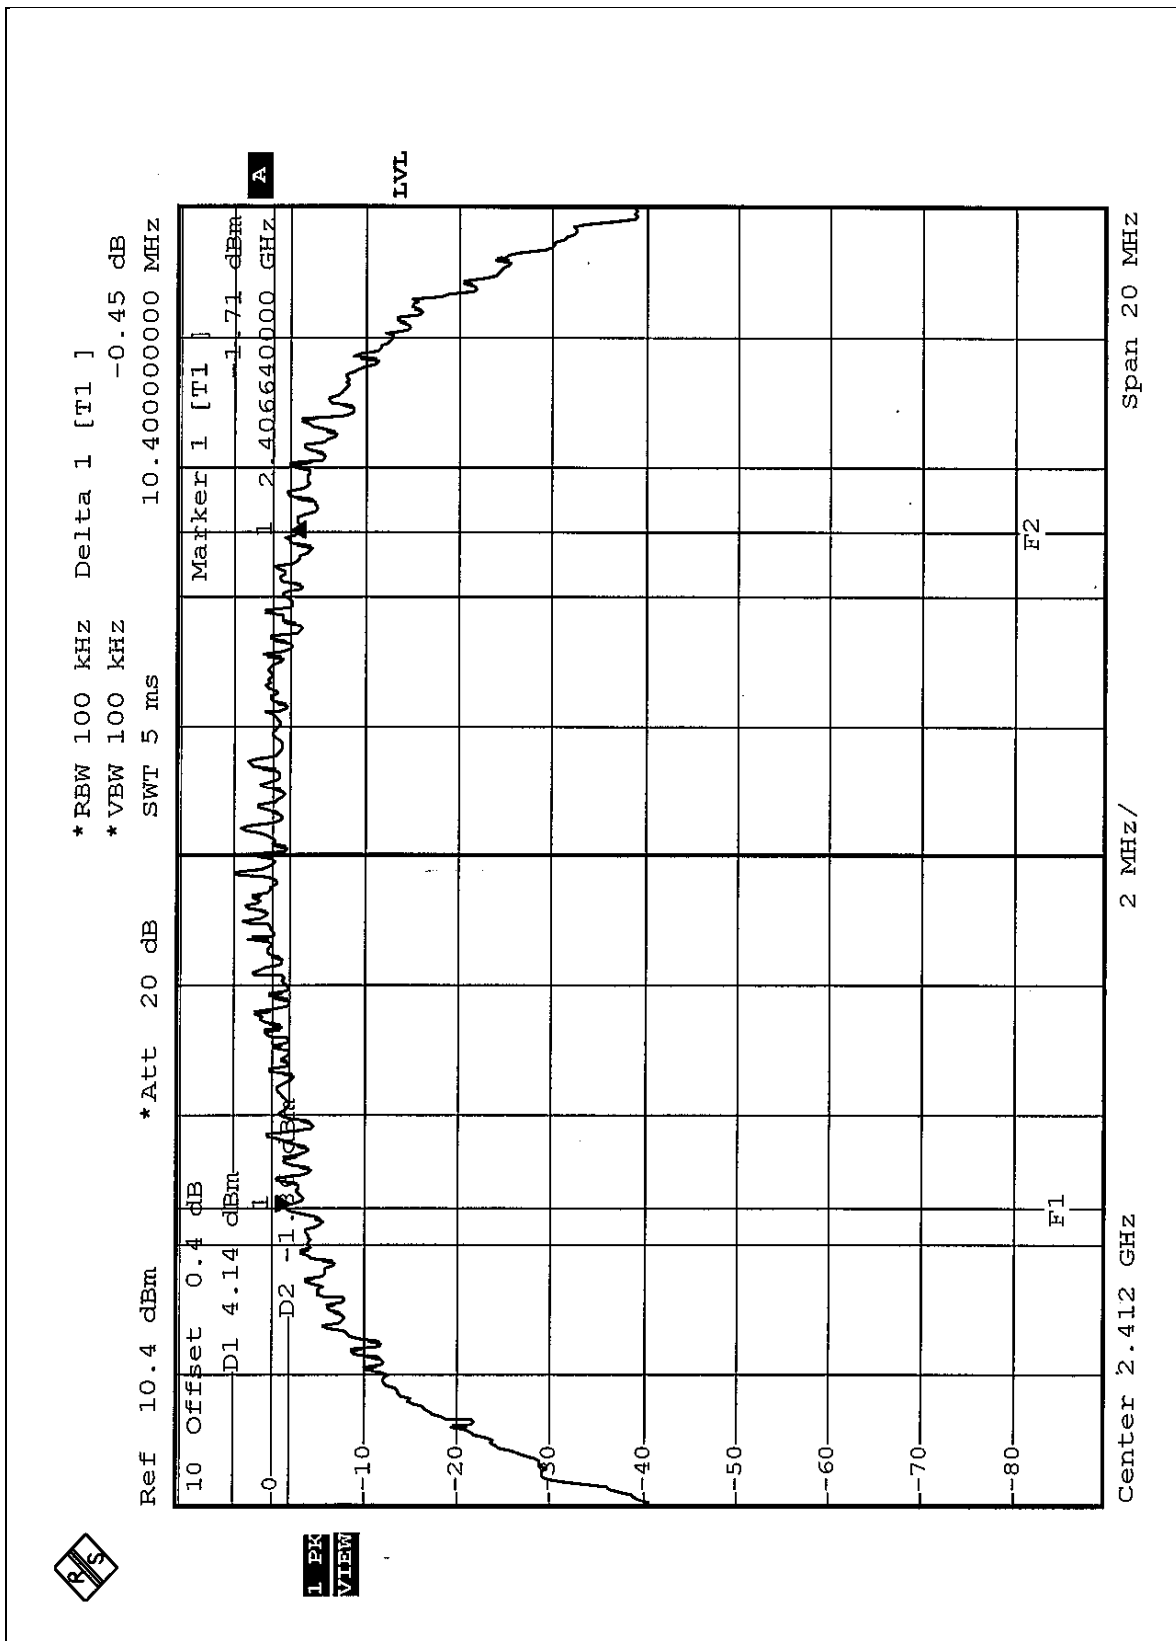

CH6

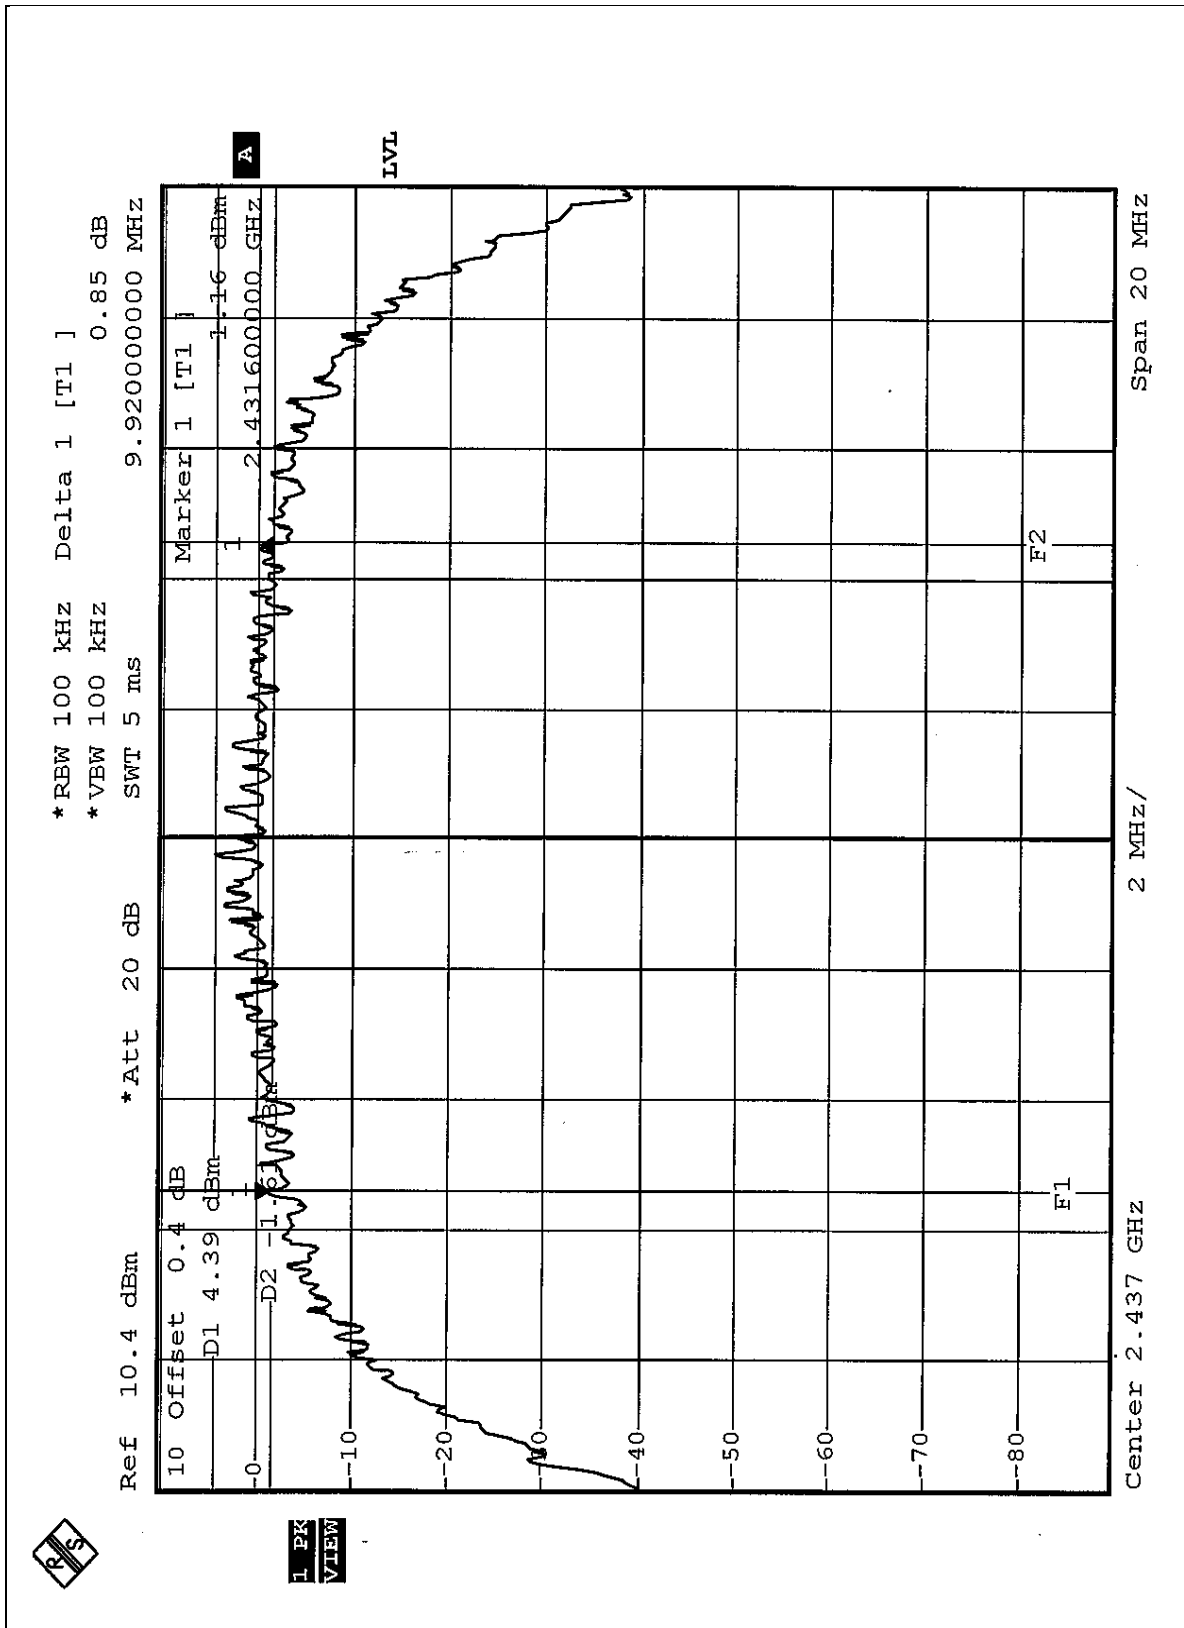

CH11

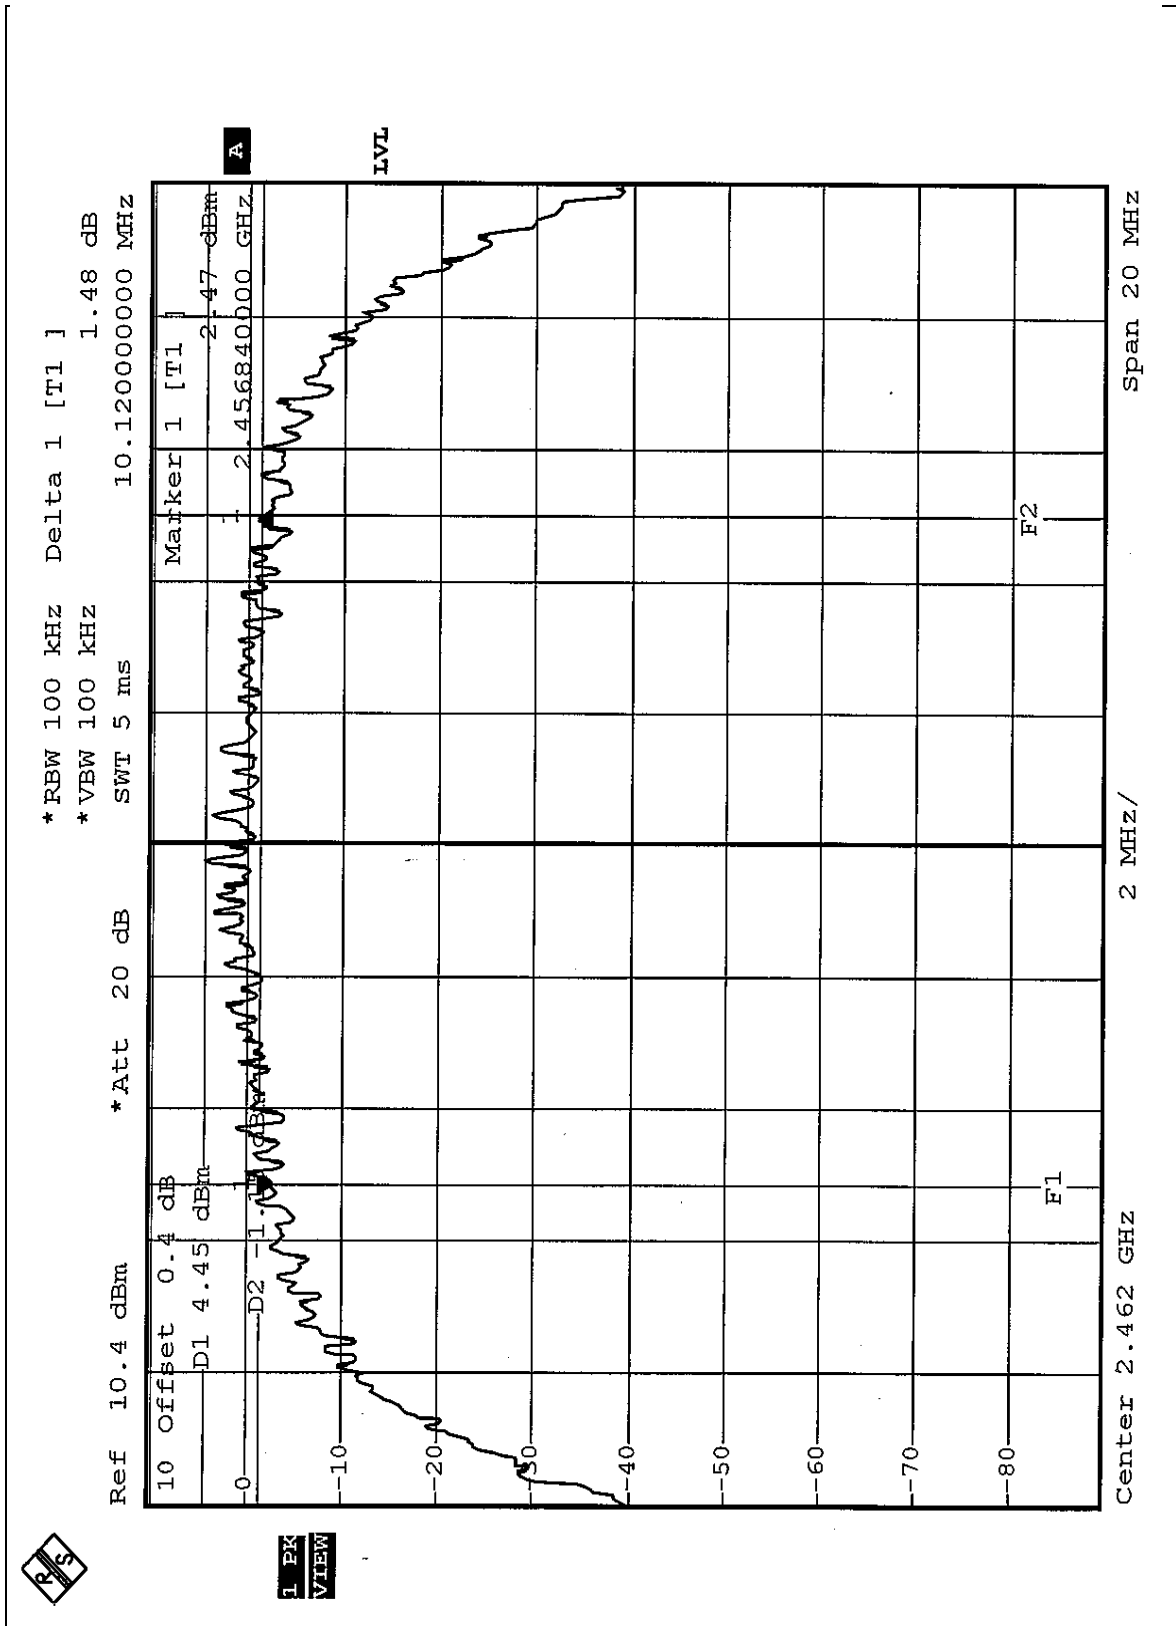





EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TEST MODE	B	TESTED BY	Leo Hung

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.48	0.5	PASS
6	2437	16.44	0.5	PASS
11	2462	16.44	0.5	PASS


CH1

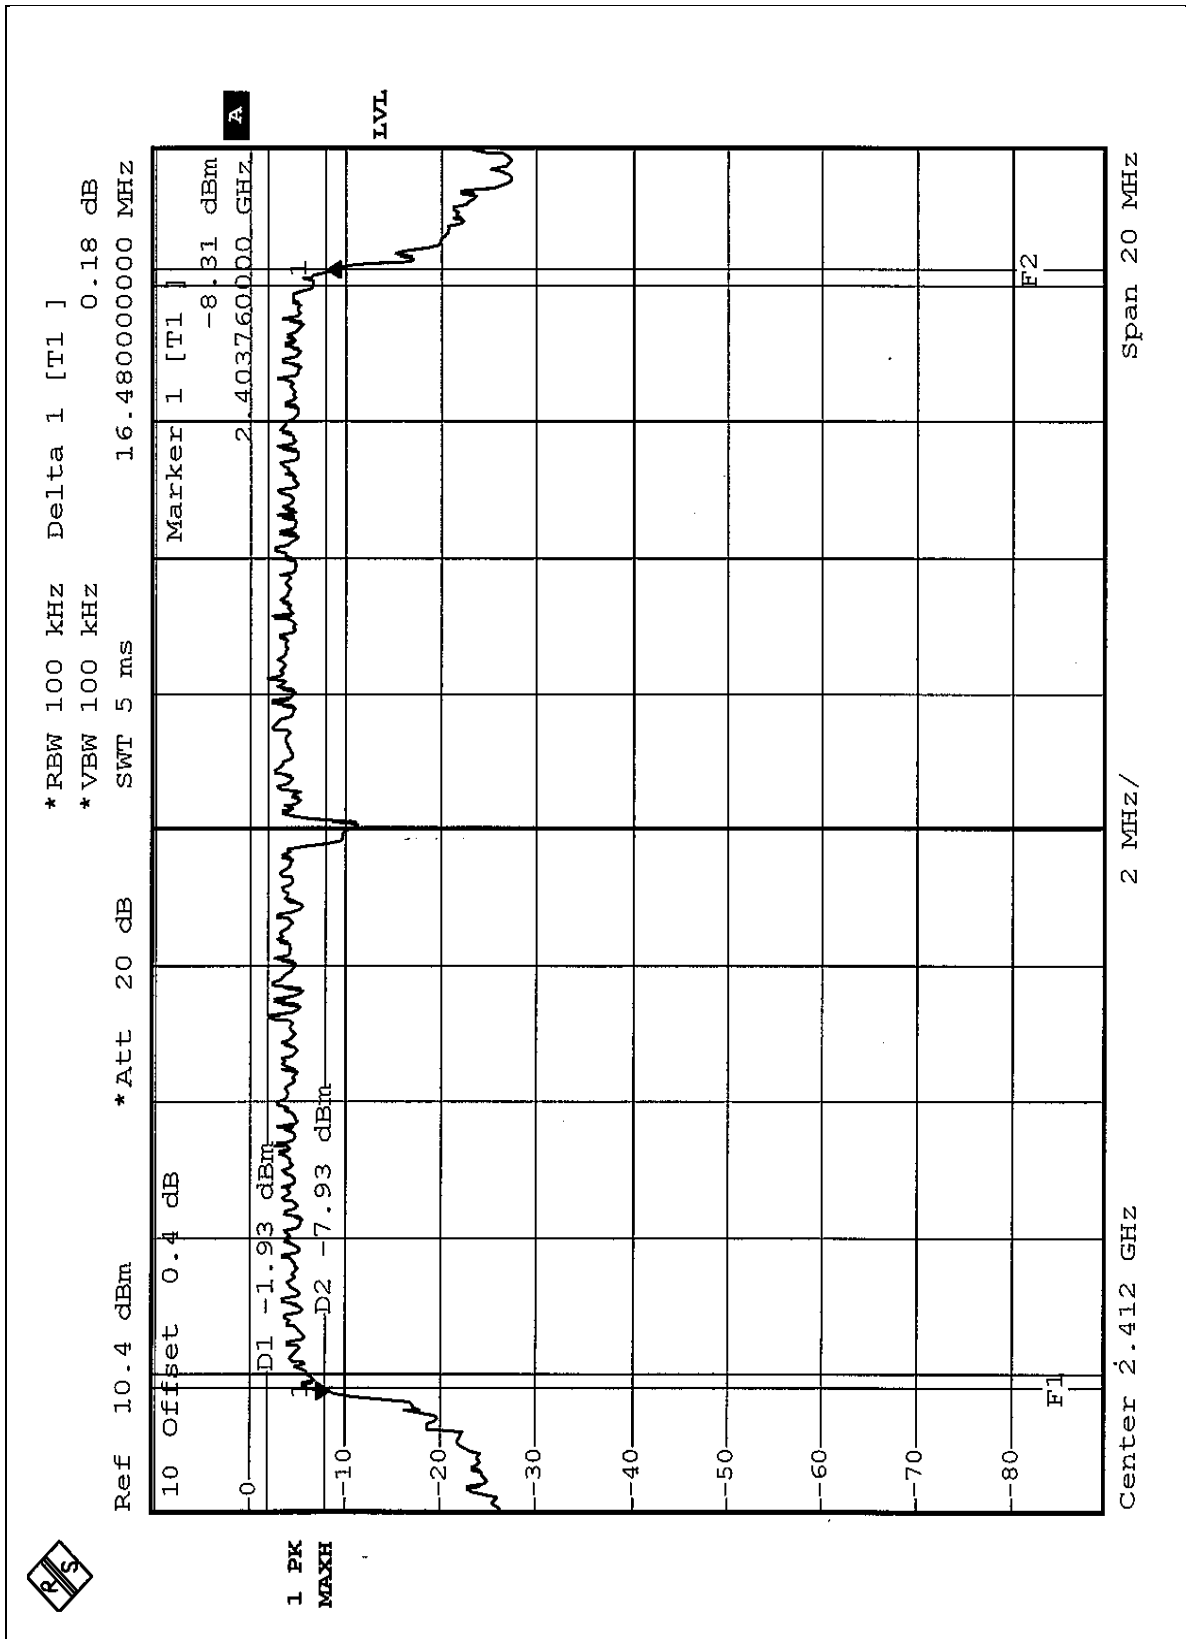

CH6

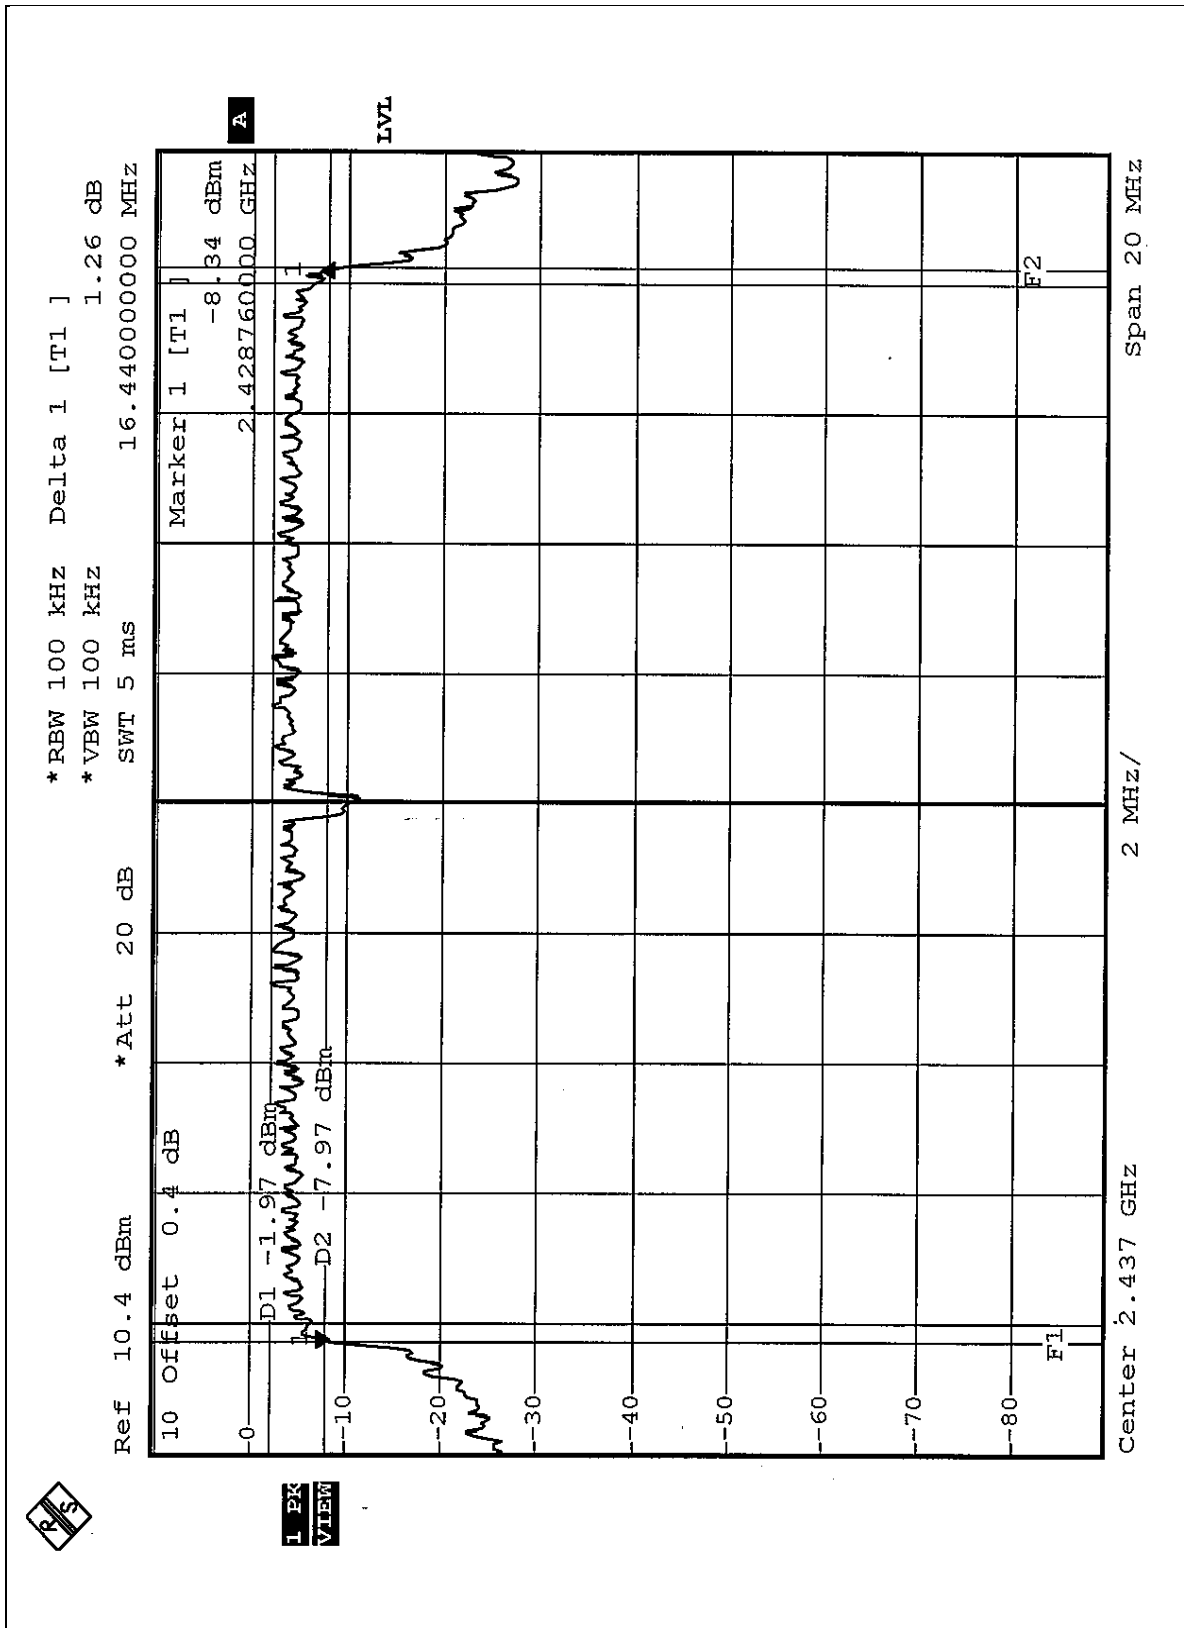

CH11

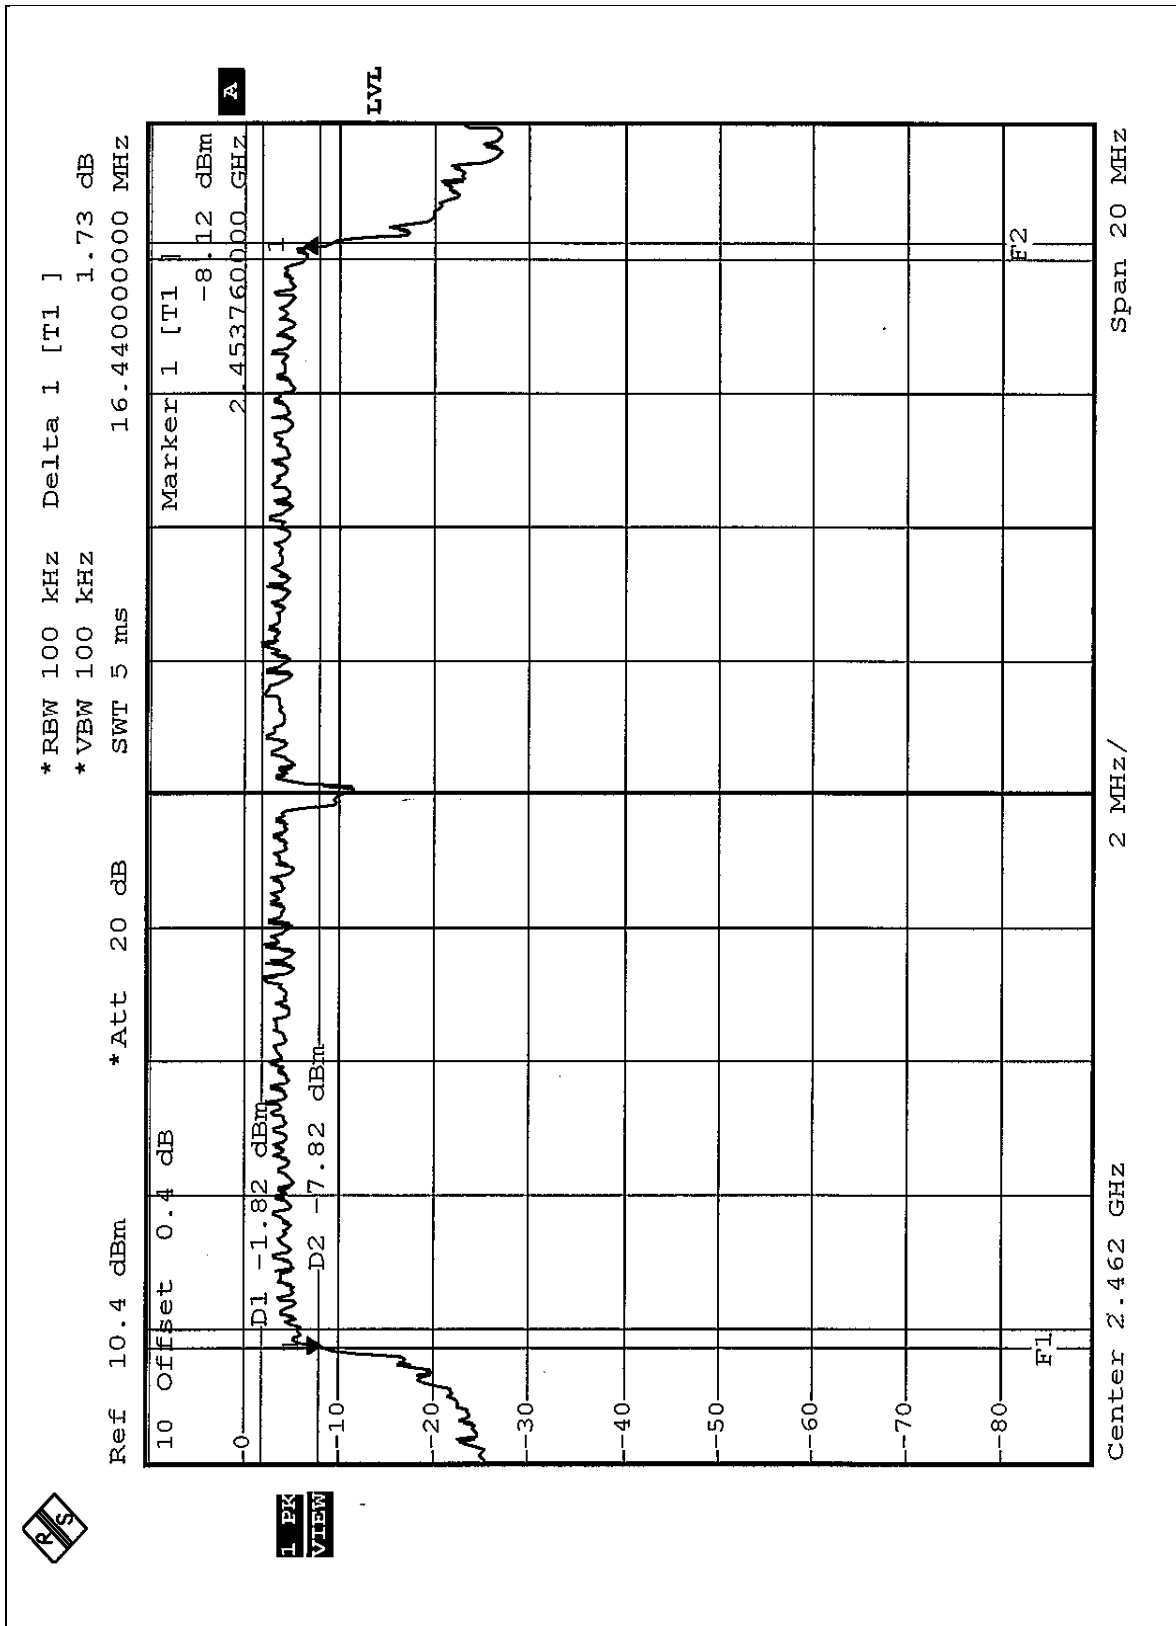

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	C019167	Feb. 1, 2005
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G. was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS

EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TEST MODE	A	TESTED BY	Leo Hung

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.00	30	PASS
6	2437	15.00	30	PASS
11	2462	15.00	30	PASS

EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TEST MODE	B	TESTED BY	Leo Hung

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.00	30	PASS
6	2437	15.00	30	PASS
11	2462	15.00	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS


Same as 4.3.6

4.5.7 TEST RESULTS

EUT	Wireless AP VPN Router	MODEL	WRTD-117GW
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TEST MODE	A	TESTED BY	Leo Hung

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-9.77	8	PASS
6	2437	-9.50	8	PASS
11	2462	-9.45	8	PASS

CH1

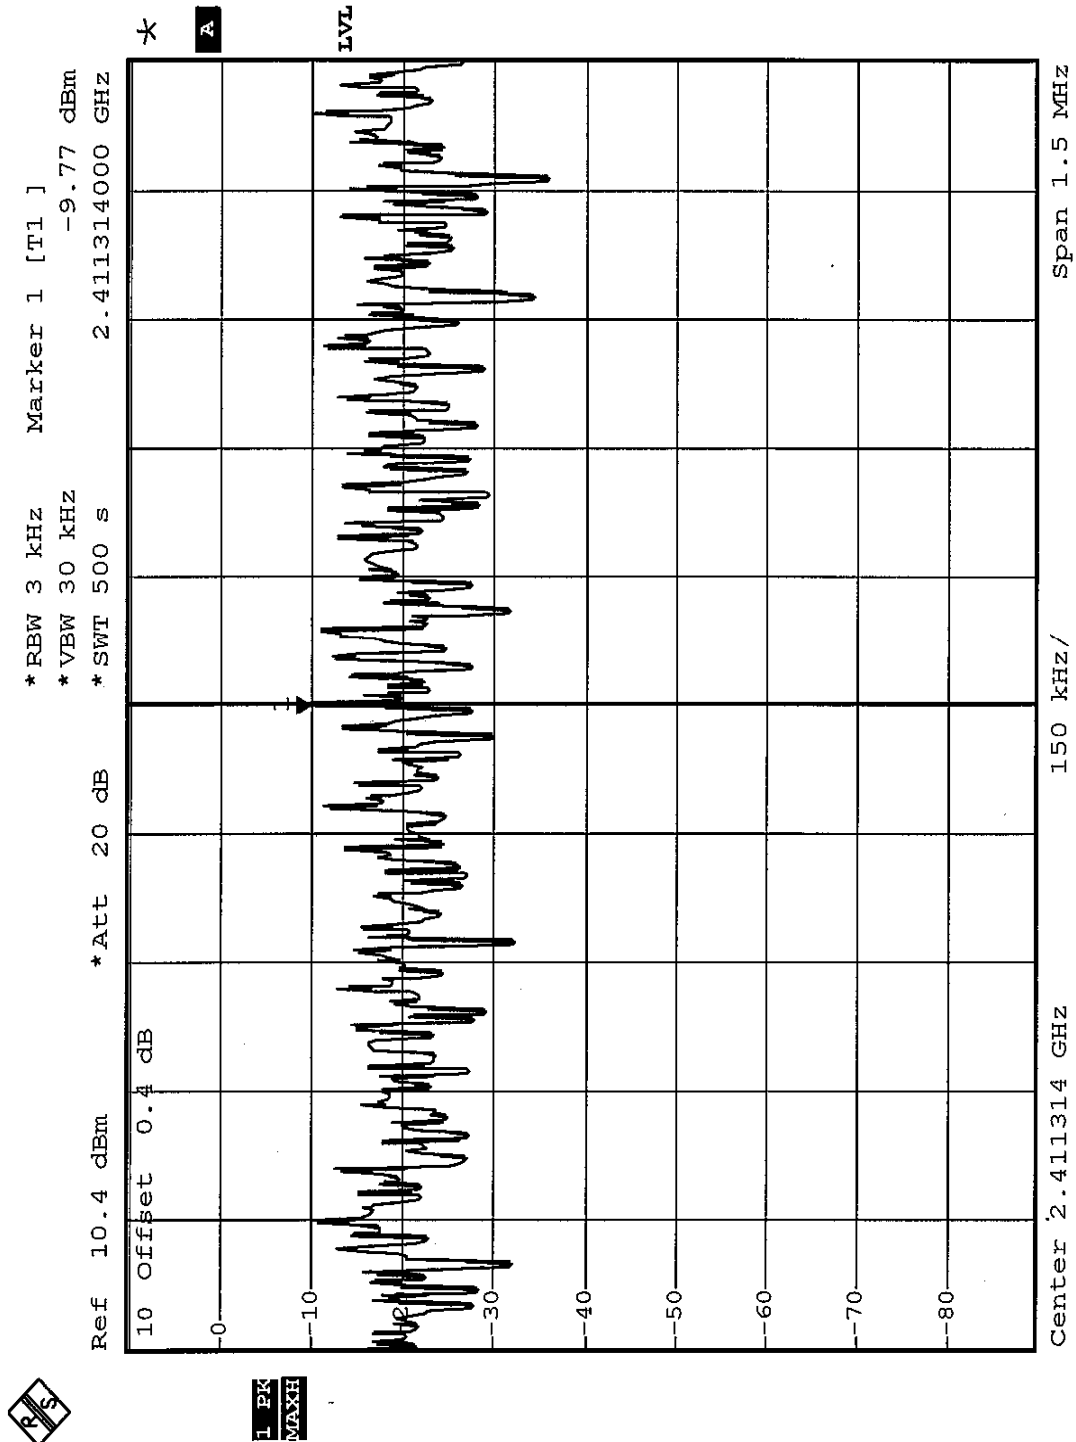

CH6

