


## Design Template for SC4480E-520-SBST Serial No. Sticker

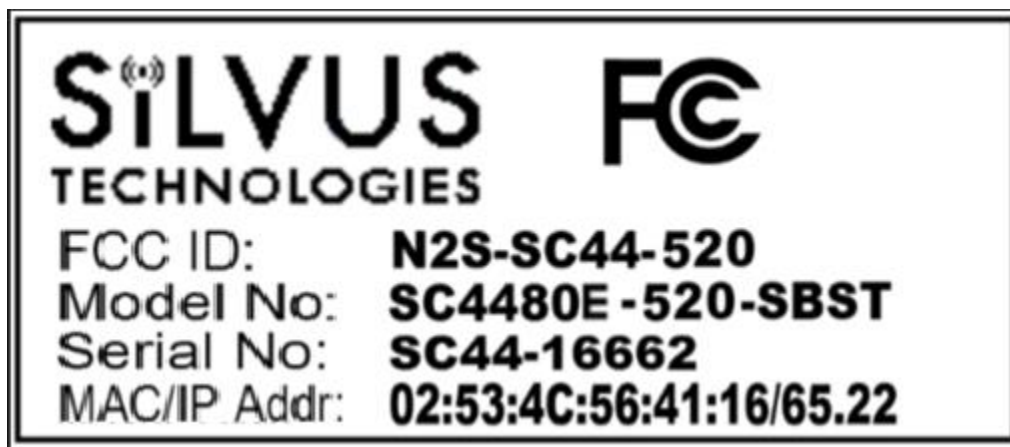

### SPECIFICATIONS

<b>Part Number:</b> M71C-500-595-BK	
Average Outdoor Durability	8 to 10 Years
Material Number	<a href="#">B-595</a>
Catalog Page #	<a href="#">358</a>
Dimensions	0.5 in H
UOM	Roll of 50 Feet
Finish	Gloss
Indoor or Outdoor Use	Outdoor Use
Label/Tape Size	0.5 in H x 0.5 in W x 50 ft L
Maximum Service Temperature °F	180 °F
Minimum Service Temperature °F	-40 °F
Pre-Printed Areas on Label	Colored Write-On Area
Product Number	142365
UPC	754473198657
Roll Length	50 ft
Roll/Tape Size	0.5 in W x 50 ft L
Roll Width	0.5 in
Thickness	0.004 in
Trade Name	BMP®71
Adhesive Type	Acrylic
Color	Black
For Use with Printer	BMP®71 Label Printer
Label/Media Format	Roll
Material	Vinyl
Print Technology	Thermal Transfer
Resistance Properties	Abrasion-Resistant, Chemical-Resistant, Oil-Resistant

## Position of Serial No. Sticker on Unit



This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label for the 2-part statement will be the same material has the label on page 1

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



172.20.71.31

The device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

172.20.71.31

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.