

Date: 2007-04-10 Page 1 of 15

No.: HM158258

Applicant: Wild Planet Entertainment Inc.

225 Bush Street, 13/F San Francisco, CA94104 U.S.A.

Description of Samples: Model name: Mobile Spy Ear

> 70181 Model no .:

Brand name: SPY GEAR

FCC ID: N3EMOBILESPYEAR

Date Samples Received: 2007-02-22

Date Tested: 2007-02-27

Investigation Requested: FCC Part 15 Subpart C

The submitted product COMPLIED with the requirements of Conclusions:

> Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on

Section 2.2 in this Test Report.

Remarks:

LEE Kam Chuen, EMD For and on behalf of

The Hong Kong Standards and Testing Centre Ltd



Date: 2007-04-10 Page 2 of 15

No.: HM158258

CONTENT:

	Cover Content	Page 1 of 15 Page 2-3 of 15
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 4 of 15
1.2	Applicant Details Applicant HKSTC Code Number for Applicant Manufacturer	Page 4 of 15
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 of 15
1.4	Date of Order	Page 5 of 15
1.5	Submitted Samples	Page 5 of 15
1.6	Test Duration	Page 5 of 15
1.7	Country of Origin	Page 5 of 15
2.0	Technical Details	
2.1	Investigations Requested	Page 6 of 15
2.2	Test Standards and Results Summary	Page 6 of 15
<u>3.0</u>	<u>Test Results</u>	
3.1	Emission	Page 7-10 of 15
3.2	Bandwidth Measurement	Page 11-12 of 15



Date: 2007-04-10 Page 3 of 15

No.: HM158258

Appendix A

List of Measurement Equipment Page 13 of 15

Appendix B

Photographs Page 14-15 of 15



Date: 2007-04-10 Page 4 of 15

No.: HM158258

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

1.2 Applicant Details Applicant

Wild Planet Entertainment Inc. 225 Bush Street, 13/F San Francisco, CA94104 U.S.A.

Manufacturer

Acctron Co. Ltd. Unit 5, 5/F., Apec Plaza, No. 49, Hoi Yuen Road, Kwun Tong, Kowloon, Hong Kong



Date: 2007-04-10 Page 5 of 15

No.: HM158258

1.3 Equipment Under Test [EUT] Description of Sample

Model Name: Mobile Spy Ear
Manufacturer: Acctron Co. Ltd.
Brand Name: SPY GEAR
Model Number: 70181

Input Voltage: 9Vd.c ("6FF" size battery x 1)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Wild Planet Entertainment Inc. The transmitter is a 1 trigger transmitter. The EUT continues to transmit while trigger is being pressed, It is voice transmitter, Modulation by microphone, and type is amplitude modulation.

1.4 Date of Order

2007-02-22

1.5 Submitted Sample(s):

1 Sample

1.6 Test Duration

2007-02-27

1.7 Country of Origin

China

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-04-10 Page 6 of 15

No.: HM158258

2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2005 and ANSI C63.4:2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class /	Т	est Resu	lt
			Severity	Pass	Failed	N/A
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.235	ANSI C63.4:2003	N/A	\boxtimes		
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	N/A			
Conducted Emissions on AC, 0.15MHz to 30MHz	FCC 47CFR 15.207	ANSI C63.4:2003	N/A			

Note: N/A - Not Applicable



Date: 2007-04-10 Page 7 of 15

No.: HM158258

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 - 1000MHz)


Test Requirement: FCC 47CFR 15.235
Test Method: ANSI C63.4:2003
Test Date: 2007-02-27
Mode of Operation: Tx mode

Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: Semi-anechoic chamber located on the G/F of HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Test Setup:

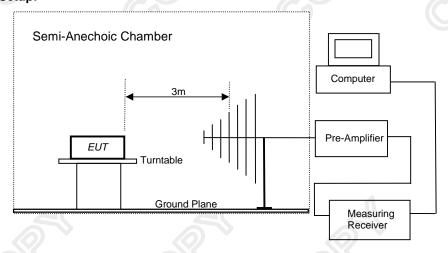



Date: 2007-04-10 Page 8 of 15

No.: HM158258

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

Frequency Range of	Field Strength of	Field Strength of
Fundamental	Fundamental Emission [Peak]	Fundamental Emission [Average]
[MHz]	[μV/m]	[μV/m]
49.82-49.90	100,000	10,000

Results:

Field Strength of Fundamental Emissions Peak Value							
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field	
	Level @3m Factor Strength Strength Polarity						
MHz	MHz dBμV dB/m dBμV/m μV/m μV/m						
49.86	30.2	9.1	39.3	92.3	100,000	Vertical	

Field Strength of Fundamental Emissions Average Value								
			Average vall	ue				
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m Factor Strength Strength Polarity							
MHz	MHz dBμV dB/m dBμV/m μV/m μV/m							
49.86	26.7	9.1	35.8	61.7	10,000	Vertical		

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz ±5.2dB



Date: 2007-04-10 Page 9 of 15

No.: HM158258

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range	Quasi-Peak Limits
[MHz]	[μV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results:

	Radiated Emissions					
			Quasi-Peal	K		
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field
	Level @3m	Factor	Strength	Strength		Polarity
MHz	dΒμV	dB/m	dBµV/m	μV/m	μV/m	
99.72	< 1.0	10.8	< 11.8	< 3.9	150	Vertical
149.58	< 1.0	9.8	< 10.8	< 3.5	150	Vertical
199.44	< 1.0	11.5	< 12.5	< 4.2	150	Vertical
249.30	< 1.0	15.9	< 16.9	< 7.0	200	Vertical
299.16	< 1.0	17.4	< 18.4	< 8.3	200	Vertical
349.02	< 1.0	17.2	< 18.2	< 8.1	200	Vertical
398.88	< 1.0	18.8	< 19.8	< 9.8	200	Vertical
448.74	< 1.0	19.7	< 20.7	< 10.8	200	Vertical
498.60	< 1.0	20.6	< 21.6	< 12.0	200	Vertical

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz ±5.2dB



Date: 2007-04-10 Page 10 of 15

No.: HM158258

3.1.2 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207 Test Method: ANSI C63.4:2003

Test Date: N/A Mode of Operation: N/A

Results: N/A

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.



Date: 2007-04-10 Page 11 of 15

No.: HM158258

3.2 26dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.235

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2007-02-27 Mode of Operation: On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.




Date: 2007-04-10 Page 12 of 15

No.: HM158258


Limits for 26dB Bandwidth of Fundamental Emission:

Frequency Range	26dB Bandwidth	FCC Limits
[MHz]	[KHz]	[MHz]
49.86	43.8	within 49.82-49.90

26dB Bandwidth of Fundamental Emission

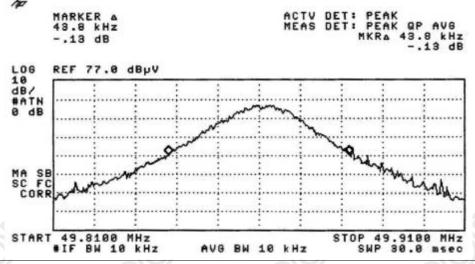

26dB Bandwidth of Fundamental Emission

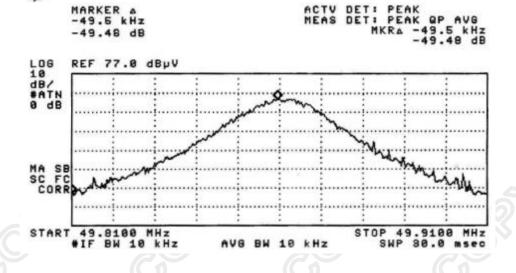

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-04-10 Page 13 of 15

No.: HM158258

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192	
EM008	SPECTRUM ANALYZER DISPLAY	HEWLETT PACKARD	HP85662A	3144A20514	
EM009	QUASI PEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702	
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410	
EM011	ATTENUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595	
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262	
EM020	HORN ANTENNA	ETS-Linggren	3115	4032	
EM022	LOOP ANTENNA	ETS-Linggren	6502	1189-2424	
EM072	SIGNAL GENERATOR	HEWLETT PACKARD	8640B	1948A11892	
EM083	OPEN AREA TEST SITE	HKSTC	N/A	N/A	
EM131	EMC ANALYZER	HEWLETT PACKARD	8595EM	3710A00155	
EM145	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCS 30	830245/021	
EM195	ANTENNA POSITIONING MAST	ETS-Linggren	2075	2368	
EM196	MULTI-DEVICE CONTROLLER	ETS-Linggren	2090	1662	
EM215	MULTIDEVICE CONTROLER	ETS-Linggren	2090	00024676	
EM216	MINI MAST SYSTEM	ETS-Linggren	2075	00026842	
EM217	ELECTRIC POWERED TURNTABLE	ETS-Linggren	2088	00029144	
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3	-	
EM219	BICONILOG ANTENNA	ETS-Linggren	3142C	00029071	
EM229	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB40	100248	

Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.
EM078	VARIAC	SHANGHAI VOLTAGE	TDGC-3/0.5	N/A
EM081	SMALL SCREENED ROOM	MIKO INST HK	N/A	N/A
EM119	LISN	ROHDE & SCHWARZ	ESH3-Z5	0831.5518.52
EM127	ISOLATION TRANSFORMER 220 TO 300V	WING SUN	N/A	N/A
EM233	PULSE LIMITER	ROHDE & SCHWARZ	ESH3-Z2	100314
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072
EM154	SHIELDING ROOM	SIEMENA MATSUSHITA COMPONENTS	N/A	803-740-057-99A
EM197	LISN	ETS-Linggren	4825/2	1193

Remarks:-

CM Corrective Maintenance N/A Not Applicable or Not Available

TBD To Be Determined



Date: 2007-04-10 Page 14 of 15

No.: HM158258

Appendix B

Photographs of EUT

Front View of the product



Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View



The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date: 2007-04-10 Page 15 of 15

No.: HM158258

Photographs of EUT

Measurement of Radiated Emission Test Set Up

Measurement of Radiated Emission Test Set Up

***** End of Test Report *****