

RF TEST REPORT



Report No.: FCC_IC_SL17052001-SLX-014_DSS
Supersede Report No.:

Applicant	:	Silex Technology, Inc.
Product Name	:	802.11a/b/g/n/ac + BT4.1 module
Model No.	:	SX-SDPAC
Test Standard	:	47 CFR 15.247 RSS-247 Issue 2, February 2017
Test Method	:	ANSI C63.10: 2013 RSS-Gen Issue 4, Nov 2014 FCC Public Notice DA 00-705
FCC ID	:	N6C-SDPAC
IC ID	:	4908A-SDPAC
Dates of test	:	10/01/2017 – 10/04/2017
Issue Date	:	10/04/2017
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification <input checked="" type="checkbox"/>		
Equipment did not comply with the specification <input type="checkbox"/>		

This Test Report is Issued Under the Authority of:

Rachana Khanduri	Chen Ge
Test Engineer	Engineer Reviewer

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemic.com; Follow us at:



Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & Radio Equipment Directive (RED)
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

CONTENTS

1	REPORT REVISION HISTORY	4
2	EXECUTIVE SUMMARY	5
3	CUSTOMER INFORMATION	5
4	TEST SITE INFORMATION	5
5	MODIFICATION	5
6	EUT INFORMATION	6
6.1	EUT Description	6
6.2	Spec for BT Radio	6
6.3	EUT test modes/configuration Description.....	6
6.4	EUT Photos	7
6.5	EUT Test Setup Photos	8
7	SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION.....	9
7.1	Supporting Equipment	9
7.2	Cabling Description	9
7.3	Test Software Description	9
8	TEST SUMMARY	10
9	MEASUREMENT UNCERTAINTY	11
9.1	Conducted Emissions	11
9.2	Radiated Emissions (30MHz to 1GHz).....	11
9.3	Radiated Emissions (1GHz to 40GHz).....	12
9.4	RF conducted measurement.....	12
10	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	13
10.1	Transmitter Radiated Spurious Emissions Below 1GHz.....	13
10.2	Transmitter Radiated Spurious Emissions > 1GHz & Restricted band & non-restricted band emission	15
	ANNEX A. TEST INSTRUMENT	20
	ANNEX B. SIEMIC ACCREDITATION	21

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC-IC_SL17052001-SLX-014_DSS	None	Original	10/04/2017

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Silex Technology, Inc.
Product Name: 802.11a/b/g/n/ac + BT 4.1 module
Model No.: SX-SDPAC

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

Applicant Name	Silex Technology, Inc
Applicant Address	2-3-1 Hikaridai, Seika-cho, Kyoto, 619-0237 Japan.
Manufacturer Name	Silex Technology, Inc
Manufacturer Address	2-3-1 Hikaridai, Seika-cho, Kyoto, 619-0237 Japan.

4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-

6 EUT Information

6.1 EUT Description

Product Name	802.11a/b/g/n/ac + BT 4.1 module
Model No.	SX-SDPAC
Trade Name	Silex
Serial No.	EVTQ216005
Input Power (EUT-Battery)	5VDC
Input Power (USB Hub)	100-240VAC 50/60Hz
Power Adapter Manu/Model	N/A
Power Adapter SN	N/A
Hardware Version	120005-PCBA_REV-05
Software Version	v20170911-MFG
Date of EUT received	09/28/2017
Equipment Class/ Category	DTS, UNII
Port/Connectors	-


6.2 Spec for BT Radio

Radio Type	Bluetooth (Ver4.0+EDR)
Operating Frequency	2402MHz-2480MHz
Modulation	FHSS (BDR, EDR)
Channel Spacing	1MHz (BDR, EDR)
Antenna Type	Chip
Antenna Gain	1 dBi
Antenna Connector Type	-
Note	Johanson 2450AD14A5500

6.3 EUT test modes/configuration Description

Mode	Note
Bluetooth	BDR (GFSK)
Bluetooth	EDR (8-DPSK)

6.4 EUT Photos

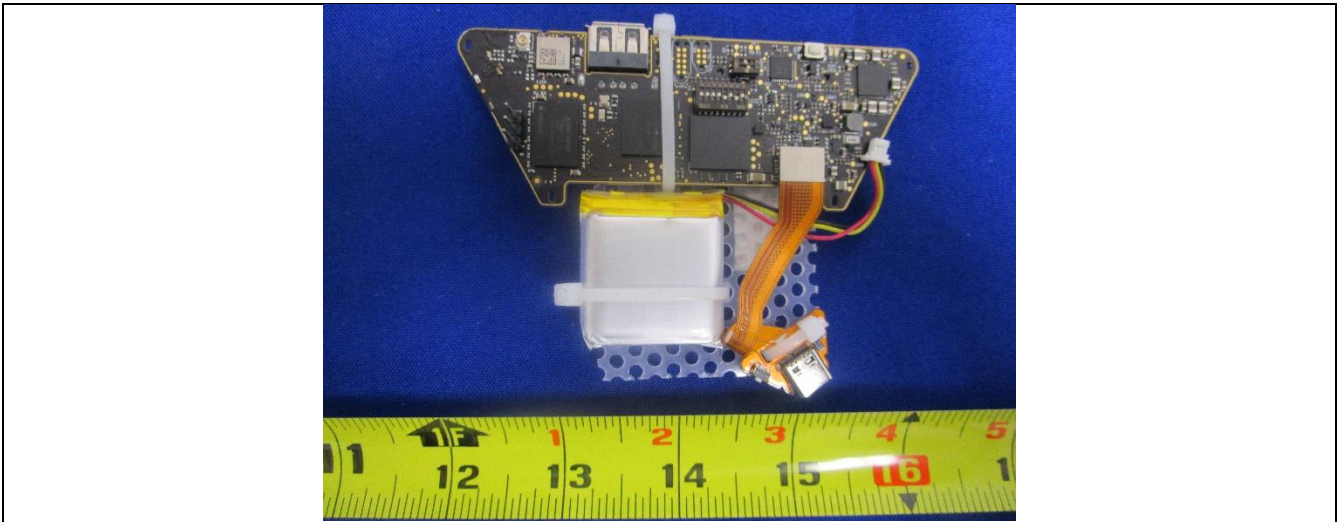

EUT-Top View with Battery




EUT- Bottom View




Antenna Photo


6.5 EUT Test Setup Photos

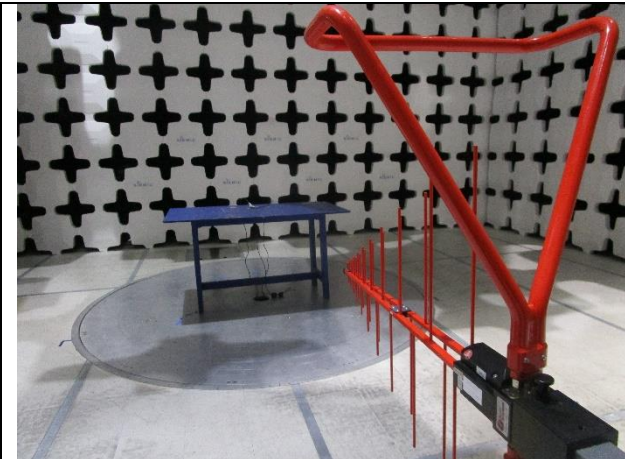

Radiated Emissions (<1GHz) – Front View

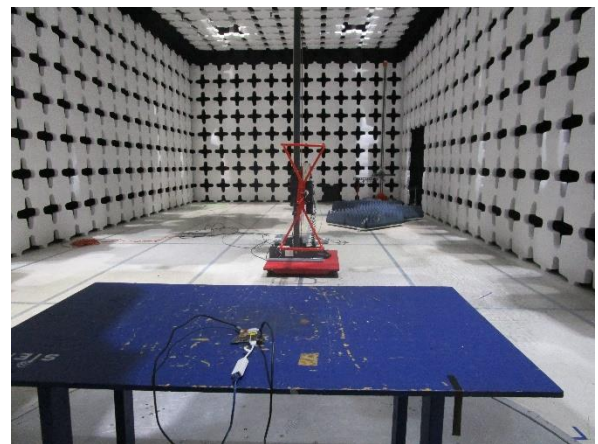

Radiated Emissions (<1GHz) – Rear View

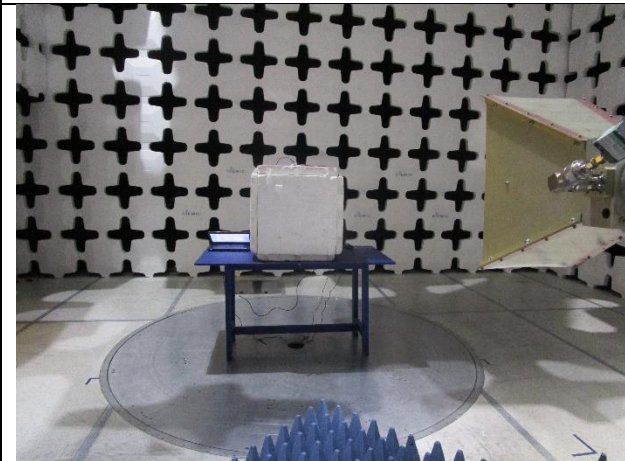

Radiated Emissions (>1GHz) – Front View



Radiated Emissions (>1GHz) – Rear View

7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	VOSTRO 1520	38031083173	Dell	-
2	USB Hub	TP-Link	N/A	N/A	-
3	Netgear Network Switch	DS106	DS06D05045896	Bay Networks	-

7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
USB	EUT	USB	USB Hub	USB	2	N/A	-
Serial-to-USB Adapter	EUT	Serial	Laptop	USB	2	N/A	-
USB to Ethernet Adapter	EUT	USB	RJ45	Ethernet Switch	2	N/A	-
RJ45	Laptop	RJ45	RJ45	Ethernet Switch	2	N/A	-

7.3 Test Software Description

Test Item	Software	Description
RF Testing	QRCT	Set the EUT to transmit continuously in diferent test mode

8 Test Summary

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Restricted Band of Operation	FCC	15.205	FCC	ANSI C63.10: 2013 Public Notice DA 00-705	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS Gen 8.10		RSS Gen Issue 4: 2014	
AC Conducted Emissions Voltage	FCC	15.207(a)	FCC	ANSI C63.10: 2013	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS Gen 8.8		RSS Gen Issue 4: 2014	

DSS Band Requirement

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Channel Separation	FCC	15.247 (a)(1)	FCC	Public Notice DA 00-705	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.1.5)	IC	-	
20dB Occupied Bandwidth	FCC	15.247(a)(1)	FCC	Public Notice DA 00-705	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.1.2)	IC	-	
99% Occupied Bandwidth	FCC	15.247(a)(2)	FCC		<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS Gen 6.6	IC	RSS Gen Issue 4: 2014 -	
Number of Hopping Channels	FCC	15.247(a)(1)	FCC	Public Notice DA 00-705	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.1.5)	IC	-	
Band Edge and Radiated Spurious Emissions	FCC	15.247(d)	FCC	Public Notice DA 00-705	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A
	IC	RSS247(5.5)	IC	-	
Time of Occupancy	FCC	15.247(a)(1)	FCC	Public Notice DA 00-705	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.1.5)	IC	-	
Output Power	FCC	15.247(b)	FCC	Public Notice DA 00-705	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.4.2)	IC	-	
Receiver Spurious Emissions	FCC	15.247(d)	FCC	-	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS Gen (7.1)	IC	RSS Gen (7.1)	
Antenna Gain > 6 dBi	FCC	15.247(e)	FCC	Public Notice DA 00-705	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.4.6)	IC	-	
Power Spectral Density	FCC	15.247(e)	FCC	Public Notice DA 00-705	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.2.2)	IC	-	
Hybrid System Requirement	FCC	15.247(f)	FCC	Public Notice DA 00-705	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.3)	IC	-	
Hopping Capability	FCC	15.247(g)	FCC	Public Notice DA 00-705	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS247 (5.1.5)	IC	-	
RF Exposure requirement	FCC	15.247(i)	FCC	Public Notice DA 00-705	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
	IC	RSS Gen(3.2)	IC	-	

- | | |
|--------|---|
| Remark | <ol style="list-style-type: none"> All measurement uncertainties are not taken into consideration for all presented test result. The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual. Please refer to test report SL15101901-SLX-027 for N/A test items. |
|--------|---|

9 Measurement Uncertainty

9.1 Conducted Emissions

The test is to measure the conducted emissions to the mains port of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the LISN
- Uncertainty of cables
- Uncertainty due to the mismatches
- Etc, see the below table for details

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Filter Insertion Loss	0.25	Normal	2	1	0.125
LISN Insertion Loss	0.40	Normal	2	1	0.20
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.86605081
PRF Response	1.5	Rectangular	1.732	1	0.86605081
Mismatch LISN - Receiver	0.25	U-Shape	1.414	1	0.1768033
LISN Impedance	2.5	Triangular	2.449	1	1.0208248
Combined Standard Uncertainty					1.928133
Expanded Uncertainty (K=2)					3.856266

The total derived measurement uncertainty is +/- 3.86 dB.

9.2 Radiated Emissions (30MHz to 1GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- NSA Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Filter Insertion Loss	0.25	Normal	2	1	0.125
Antenna Factor	0.65	Normal	2	1	0.325
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.86605081
PRF Response	1.5	Rectangular	1.732	1	0.86605081
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
NSA Calibration	4.0	U-Shape	1.414	1	2.8288543
Combined Standard Uncertainty					3.0059131
Expanded Uncertainty (K=2)					6.0118262

The total derived measurement uncertainty is +/- 6.00 dB.

9.3 Radiated Emissions (1GHz to 40GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- VSWR Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.0692840
Cable Insertion Loss	0.21	Normal	2	1	0.1050000
Filter Insertion Loss	0.25	Normal	2	1	0.1250000
Antenna Factor	0.65	Normal	2	1	0.3250000
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.8660508
PRF Response	1.5	Rectangular	1.732	1	0.8660508
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
VSWR Calibration	2.0	U-Shape	1.414	1	1.4144272
Combined Standard Uncertainty					4.2363
Expanded Uncertainty (K=2)					8.4726

The total derived measurement uncertainty is +/- 8.47 dB.

9.4 RF conducted measurement

The test is to measure the RF output power from the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the Reference Level Uncertainty
- Uncertainty of variable attenuators
- Uncertainty of cables
- Uncertainty due to the mismatches


Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Reference Level	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Attenuator	0.25	Normal	2	1	0.125
Mismatch	0.25	U-Shape	1.414	1	0.1768033
Combined Standard Uncertainty					0.476087
Expanded Uncertainty (K=2)					0.952174

The total derived measurement uncertainty is +/- 0.95 dB.

10 Measurements, Examination and Derived Results

10.1 Transmitter Radiated Spurious Emissions Below 1GHz

Requirement(s):

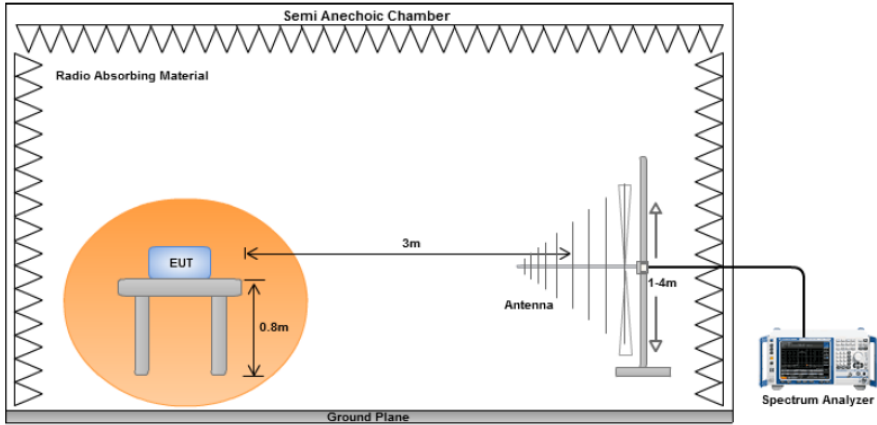Spec	Item	Requirement	Applicable										
47CFR§15.247(d), RSS247(5.5)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (uV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	☒
Frequency range (MHz)	Field Strength (uV/m)												
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												
Test Setup													
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. A Quasi-peak measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 												
Remark	The EUT was scanned up to 1GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.												
Result	☒ Pass ☐ Fail												


Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test was done by **Rachana Khanduri** at **10m Chamber**.

Radiated Emission Test Results (Below 1GHz)

Test specification:	Radiated Spurious Emissions (30MHz – 1000MHz)		
Environmental Conditions:	Temp(°C):	22	Result : <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
	Humidity (%):	37	
	Atmospheric(mbar):	1021	
Mains Power:	120VAC, 60Hz		
Tested by:	Rachana Khanduri		
Test Date:	10/04/2017		
Remarks:	BDR 2441MHz		

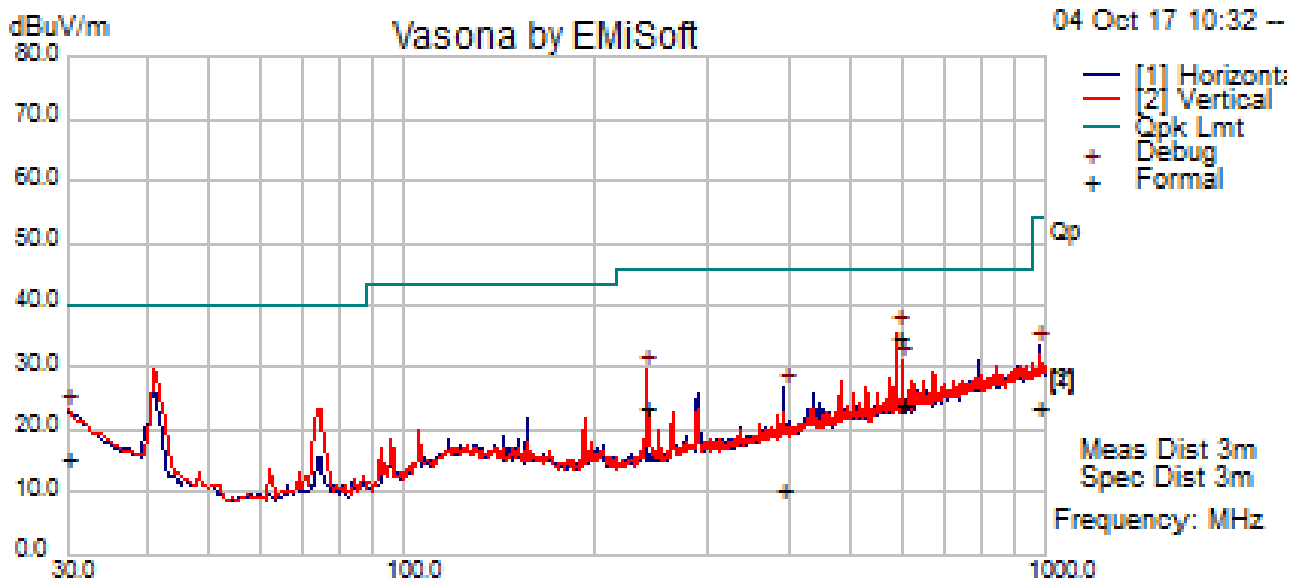


Quasi Max Measurement

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
589.11	37.52	15.07	-17.92	34.66	Quasi Max	V	100	11	46	-11.34	Pass
600.07	26.78	15.14	-17.97	23.95	Quasi Max	V	144	316	46	-22.05	Pass
240.01	35.47	13.08	-24.87	23.68	Quasi Max	V	114	70	46	-22.32	Pass
30.00	17.67	11.29	-13.86	15.10	Quasi Max	V	117	226	40	-24.90	Pass
982.08	19.26	16.82	-12.44	23.64	Quasi Max	V	105	159	54	-30.36	Pass
392.35	17.57	13.98	-21.24	10.31	Quasi Max	H	400	143	46	-35.69	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

10.2 Transmitter Radiated Spurious Emissions > 1GHz & Restricted band & non-restricted band emission

Requirement(s):

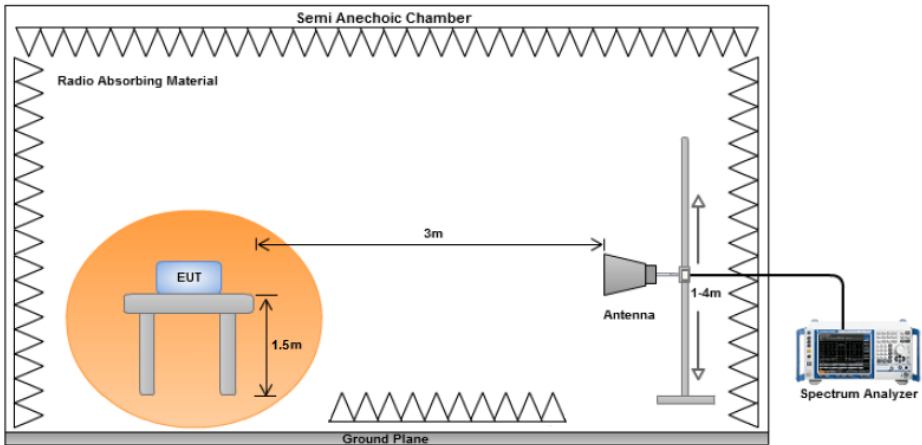Spec	Item	Requirement	Applicable
47CFR§15.247(d), RSS247(5.5)	a)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required <input checked="" type="checkbox"/> 20 dB down <input type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
	b)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>
Test Setup			
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. An average measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 		
Remark	The EUT was scanned up to 26GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A

Test was done by **Rachana Khanduri** at 10m Chamber.

Radiated Emission Test Results

Bluetooth BDR – 2402MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
1989.98	60.81	2.74	-6.08	57.47	Peak Max	V	121	184	74	-16.53	Pass
14938.55	38.87	8.09	8.04	55.00	Peak Max	V	128	223	74	-19.01	Pass
6964.83	38.37	5.22	0.95	44.54	Peak Max	V	185	331	74	-29.46	Pass
1989.98	30.48	2.74	-6.08	27.14	Average Max	V	121	184	54	-26.86	Pass
14938.55	26.65	8.09	8.04	42.78	Average Max	V	128	223	54	-11.22	Pass
6964.83	26.29	5.22	0.95	32.46	Average Max	V	185	331	54	-21.54	Pass

Bluetooth BDR – 2441MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
4884.65	40.14	4.20	-2.16	42.19	Peak Max	V	220	240	74	-31.81	Pass
7321.29	39.08	5.35	0.88	45.31	Peak Max	V	303	17	74	-28.69	Pass
1998.96	50.46	2.75	-6.04	47.17	Peak Max	V	134	208	74	-26.83	Pass
4884.65	26.24	4.20	-2.16	28.29	Average Max	H	331	4	54	-25.72	Pass
7321.29	26.51	5.35	0.88	32.74	Average Max	H	137	305	54	-21.26	Pass
1998.96	28.97	2.75	-6.04	25.67	Average Max	V	134	208	54	-28.33	Pass

Bluetooth BDR – 2480MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
4960.33	39.05	4.25	-2.17	41.13	Peak Max	V	100	325	74	-32.87	Pass
7438.76	39.63	5.40	0.60	45.62	Peak Max	H	100	115	74	-28.38	Pass
1192.47	51.14	2.31	-10.62	42.83	Peak Max	V	197	125	74	-31.17	Pass
4960.33	26.29	4.25	-2.17	28.37	Average Max	V	100	325	54	-25.63	Pass
7438.76	26.70	5.40	0.60	32.69	Average Max	H	100	115	54	-21.31	Pass
1192.47	30.89	2.31	-10.62	22.57	Average Max	V	197	125	54	-31.43	Pass

Bluetooth EDR – 2402MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
4804.04	39.15	4.15	-2.03	41.28	Peak Max	H	167	53	74	-32.72	Pass
1200.05	51.63	2.31	-10.57	43.37	Peak Max	V	110	290	74	-30.63	Pass
6966.77	38.49	5.22	0.95	44.66	Peak Max	V	259	300	74	-29.34	Pass
4804.04	26.12	4.15	-2.03	28.25	Average Max	H	167	53	54	-25.75	Pass
1200.05	36.15	2.31	-10.57	27.89	Average Max	V	110	290	54	-26.11	Pass
6966.77	26.22	5.22	0.95	32.40	Average Max	V	259	300	54	-21.60	Pass

Bluetooth EDR – 2441MHz



Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
7321.98	38.91	5.35	0.88	45.14	Peak Max	H	254	107	74	-28.86	Pass
1997.13	57.18	2.75	-6.05	53.88	Peak Max	V	128	80	74	-20.12	Pass
4882.27	40.32	4.2	-2.15	42.37	Peak Max	V	99	230	74	-31.63	Pass
7321.98	26.42	5.35	0.88	32.66	Average Max	H	254	107	54	-21.35	Pass
1997.13	29.39	2.75	-6.05	26.08	Average Max	V	128	80	54	-27.92	Pass
4882.27	26.24	4.2	-2.15	28.29	Average Max	H	377	231	54	-25.71	Pass


Bluetooth EDR – 2480MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
1989.94	50.34	2.74	-6.08	47.00	Peak Max	V	174	238	74	-27.00	Pass
4960.03	39.30	4.25	-2.17	41.38	Peak Max	V	392	143	74	-32.62	Pass
7440.89	39.18	5.40	0.60	45.18	Peak Max	V	197	22	74	-28.82	Pass
1989.94	28.80	2.74	-6.08	25.46	Average Max	V	174	238	54	-28.54	Pass
4960.03	26.24	4.25	-2.17	28.31	Average Max	V	392	143	54	-25.69	Pass
7440.89	26.65	5.40	0.60	32.65	Average Max	V	197	22	54	-21.35	Pass


Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

Restricted Band Test plot (Bluetooth BDR/EDR)

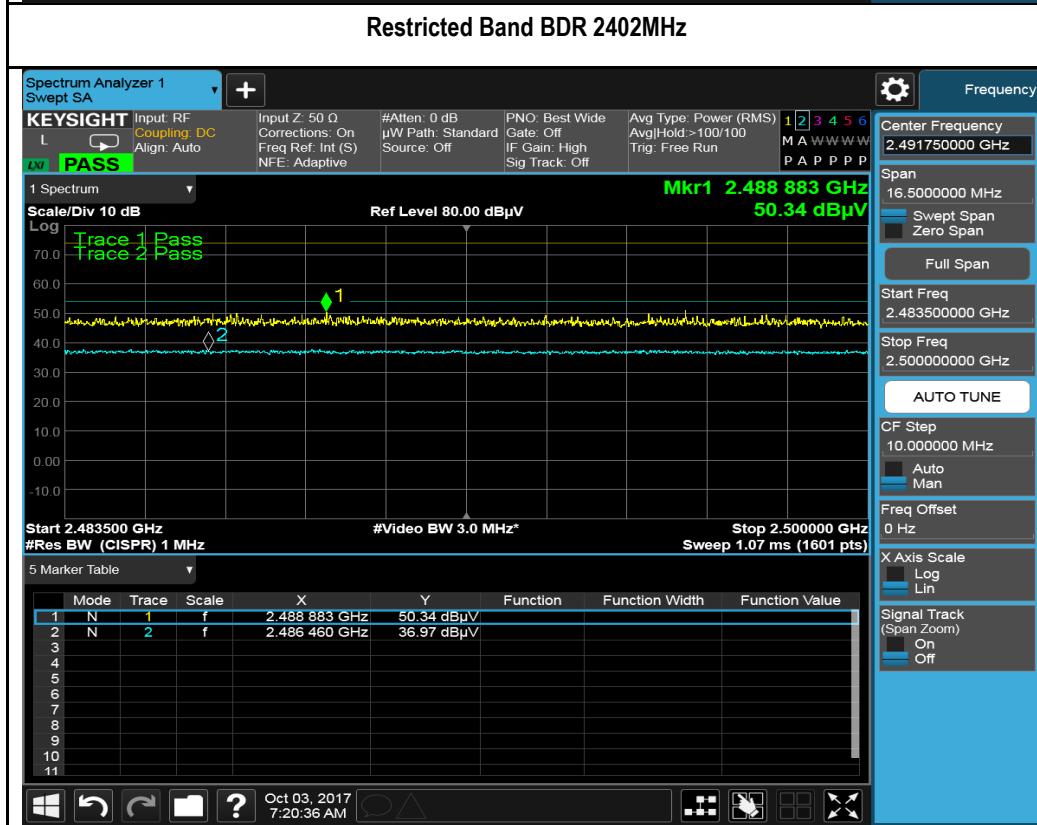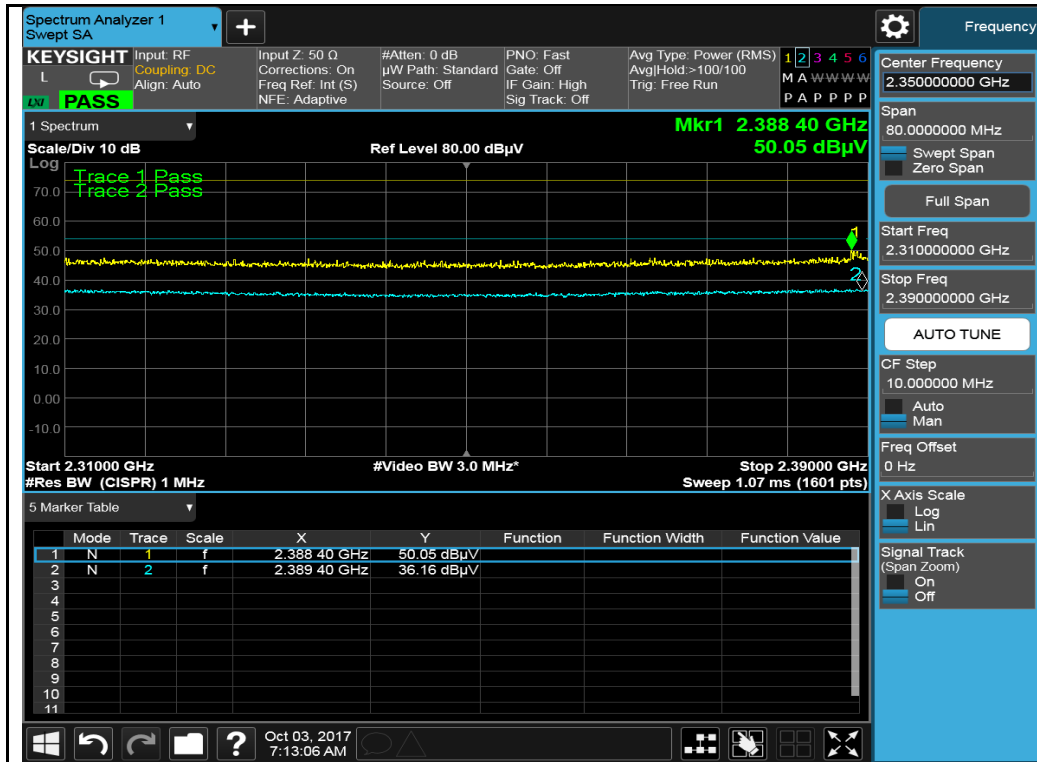

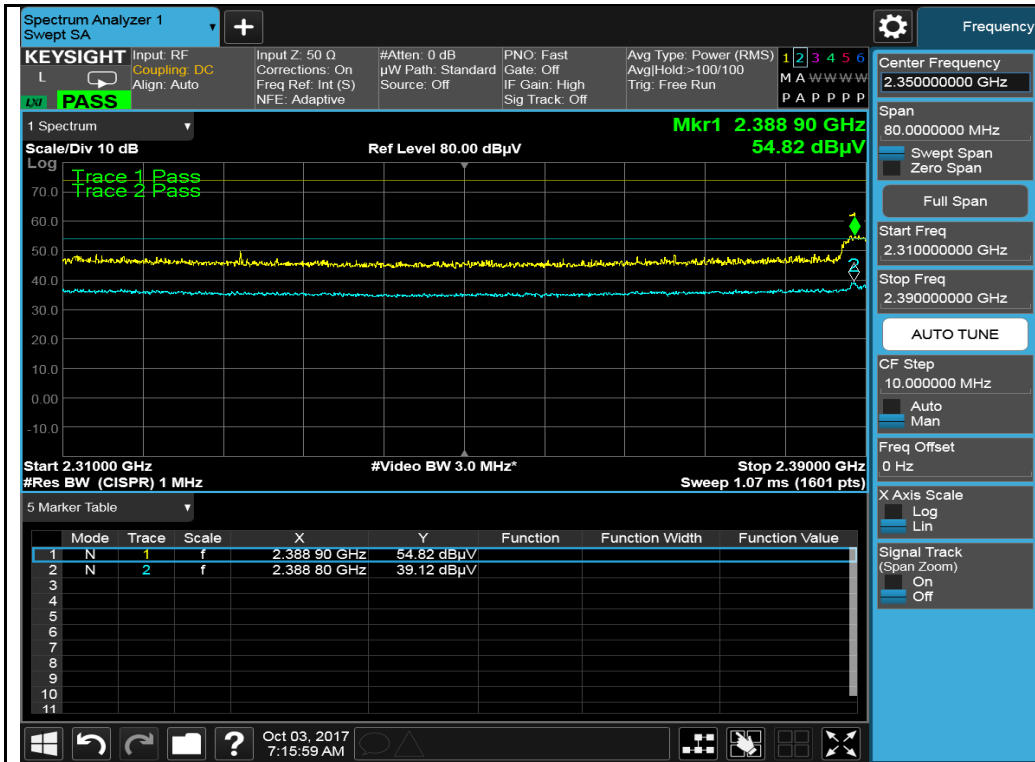

Restricted Band EDR 2402MHz

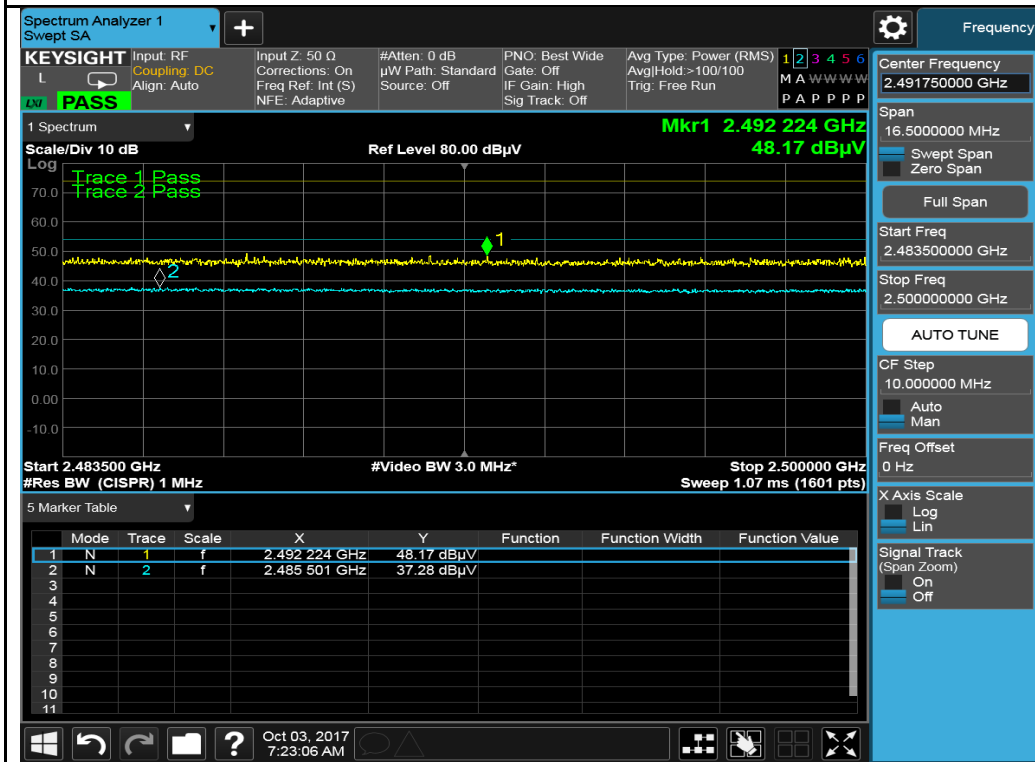























Restricted Band EDR 2480MHz

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Radiated Emissions						
Keysight EXA 44GHz Spectrum Analyzer	N9010A	MY51440112	11/02/2016	1 Year	11/02/2017	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	01/13/2017	1 Year	01/13/2018	<input checked="" type="checkbox"/>
Horn Antenna (1GHz~26GHz)	3115	100059	08/11/2016	1 Year	08/11/2017	<input checked="" type="checkbox"/>
Horn Antenna (18GHz~40GHz)	PA-840	181251	06/23/2017	1 Year	06/23/2018	<input checked="" type="checkbox"/>
Preamplifier (100KHz~7GHz)	LPA-6-30	11170602	02/09/2017	1 Year	02/09/2018	<input checked="" type="checkbox"/>
Pre-Amplifier (1-40GHz)	SAS-474	579	05/04/2017	1 Year	05/04/2018	<input checked="" type="checkbox"/>
10 Meters SAC	10M	N/A	10/06/2016	1 Year	10/06/2017	<input checked="" type="checkbox"/>

Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1 , A2 , A3 , A4 , B1 , B2 , B3 , B4 , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio Equipment: EN45011: EN ISO/IEC 17065
		Electromagnetic Compatibility: EN45011 – EN ISO/IEC 17065
Singapore iDA CB(Certification Body)	 	Phase I , Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p>Radio: A1. Terminal equipment for purpose of calling</p> <p>Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p>EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI</p> <p>EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p>
		<p>Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p> <p>Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		R-3083: Radiation 3 meter site
		<p>C-3421: Main Ports Conducted Interference Measurement</p> <p>T-1597: Telecommunication Ports Conducted Interference Measurement</p>
Australia CAB Recognition		<p>EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p>
		<p>Radiocommunications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p>
		<p>Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2