

FCC TEST REPORT

according to

FCC Rules and Regulations

Part 15 Subpart C

Applicant	Silex Technology Inc.
Address	15-15 Takaida, Higashiosaka-shi, Osaka 577-0053 Japan
Equipment	802.11 Wireless Device Server
Model No.	SX-200
Series No.	SX-600, XRX-600
FCC ID	N6C-SX-200
Trade Name	Silex

Laboratory Accreditation



1332

- The test result refers exclusively to the test presented test model / sample.,
- Without written approval of **Exclusive Certification Corp.** the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

Contents

1. Report of Measurements and Examinations	5
1.1 List of Measurements and Examinations	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment under Test.....	6
2.2 RF Specifications	6
2.3 Test Mode and Test Software.....	7
2.4 Description of Test System.....	7
2.5 Connection Diagram of Test System.....	8
2.6 General Information of Test.....	9
2.7 Description of series model.....	9
2.8 History of this test report	9
3. Antenna Requirements	10
3.1 Standard Applicable	10
3.2 Antenna Construction and Directional Gain.....	10
4. Test of Conducted Emission	11
4.1 Test Limit	11
4.2 Test Procedures	11
4.3 Typical Test Setup	12
4.4 Measurement equipment	12
4.5 Test Result and Data of 802.11b/g.....	13
4.6 Test Result and Data of 802.11a	17
4.7 Test Photographs	21
5. Test of Radiated Emission	22
5.1 Test Limit	22
5.2 Test Procedures	23
5.3 Typical Test Setup	24
5.4 Measurement equipment	24
5.5 Test Result and Data of 802.11b/g.....	25
5.6 Test Result and Data of 802.11a	41
5.7 Test Photographs	48
6. 6dB Bandwidth Measurement Data	49
6.1 Test Limit	49
6.2 Test Procedures	49
6.3 Test Setup Layout	49
6.4 Measurement equipment	49
6.5 Test Result and Data of 802.11b/g.....	49
6.6 Test Result and Data of 802.11a	50
7. Maximum Peak Output Power	56
7.1 Test Limit	56
7.2 Test Procedures	56
7.3 Test Setup Layout	56
7.4 Measurement equipment	56
7.5 Test Result and Data of 802.11b/g.....	56
7.6 Test Result and Data of 802.11a	57
8. Band Edges Measurement	63
8.1 Test Limit	63

8.2	Test Procedure :	63
8.3	Test Setup Layout	63
8.4	Measurement equipment	63
8.5	Test Result and Data of 802.11b/g	63
8.6	Test Result and Data of 802.11a	64
8.7	Restrict band emission Measurement Data	71
9.	Power Spectral Density	72
9.1	Test Limit	72
9.2	Test Procedures	72
9.3	Test Setup Layout :	72
9.4	Measurement equipment	72
9.5	Test Result and Data of 802.11b/g	72
9.6	Test Result and Data of 802.11b/g	73
10.	Restricted Bands of Operation	79
10.1	Labeling Requirement	79
Appendix A. Photographs of EUT		A1 ~ A8

CERTIFICATE OF COMPLIANCE

according to

FCC Rules and Regulations

Part 15 Subpart C

Applicant	Silex Technology Inc.
Address	15-15 Takaida, Higashiosaka-shi, Osaka 577-0053 Japan
Equipment	802.11 Wireless Device Server
Model No.	SX-200
Series No.	SX-600, XRX-600
FCC ID	Silex

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4** The equipment was **passed** the test performed according to **FCC Rules and Regulations Part 15 Subpart C (2003)**.

The test was carried out on May 01, 2006 at **Exclusive Certification Corp.**

Signature


Anson Chou / Manager

1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. Conducted Emission	Pass
15.209	. Radiated Emission	Pass
15.247(a)(2)	. 6dB Bandwidth	Pass
15.247(b)	. Maximum Peak Output Power	Pass
15.247(c)	. 100kHz Bandwidth of Frequency Band Edges	Pass
15.247(d)	. Power Spectral Density	Pass
1.1307 1.1310 2.1091 2.1093	. RF Exposure Compliance	Pass

Test engineer: _____

Jerry

2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

- Compatibility: compatible with IEEE 802.11a, 802.11b, 802.11h and 802.11j WLAN standards
- Security: supports 64 or 128 bit WEP encryption, WPA, 802.1x.
- Support for 54, 48, 36, 24, 18, 12, 9 and 6Mbps OFDM, 5.5Mbps CCK and legacy 2 and 1Mbps data rates
- Drivers supports Windows 2000 (SR1), XP and Linux
- Supports dual diversity antenna
- Standard MiniPCI Type IIIB form factor
- Intelligent power control, including 802.11 Power Save Mode
- Ad-Hoc and Infrastructure modes supported
- FCC Parts 15 certified (USA), WiFi and RoHS compliant

2.2 RF Specifications

Radio Emission Type	Comply with IEEE 802.11a, 802.11b, 802.11g, 802.11h and 802.11j DSSS (Direct Sequence Spread Spectrum) physical layer.
Operating Frequency	2.412 GHz ~ 2.484 GHz ISM band 2.4 GHz ~ 2.497 GHz (Japan ISM band) 4.9 GHz ~ 5.9 GHz ISM band
Data Modulation types	OFDM (Orthogonal Frequency Division Multiplexing) CCK (Complementary Code Keying) DQPSK (Differential Quadrature Phase Shift Keying), DBPSK (Differential Binary Phase Shift Keying)
Channel Number	Channels 1-11 (and 12-14) for IEEE 802.11b/g Channels 36, 40, 44, 48, 52, 56, 60, 64, 149, 153, 157, 161, 165 for IEEE 802.11a
Data Rate	54Mbps with fall back rates of 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 Mbps
Security	64/128 bits WEP Encryption, WPA, 802.1x Authentication
Media Access Protocol	CSMA/CA (Carrier Sense Multiple Access with Collision Avoidance) with ACK architecture, 32 bits MAC-layer
Antenna Connector Type	2 pieces of SMT ultra-miniature coaxial connectors
Operating Voltage	3.3 VDC \pm 5%
Bus Interface	Mini PCI
Antenna port impedance	50ohm
Channel Switching Speed	260 uSec
LO Settling Time	61 uSec

2.3 Test Mode and Test Software

The following test mode and test software was performed for conduction and radiation test:

- 802.11b (CH LO: 2412MHz) • 802.11b (CH MID: 2437MHz) • 802.11b (CH HI: 2462MHz)
- 802.11g (CH LO: 2412MHz) • 802.11g (CH MID: 2437MHz) • 802.11g (CH HI: 2462MHz)
- 802.11a (CH LO: 5745MHz) • 802.11a (CH MID: 5785MHz) • 802.11a (CH HI: 5825MHz)
- An executive programs, "Hyper terminal.exe" Application under WIN XP.
- Modulation type: DSSS / OFDM .


2.4 Description of Test System

Device	Manufacturer	Model No.	Description
PC	IBM	IGV	Power Cable, Unshielding 1.8 m
Monitor	SlimAGE	510A	Power Cable, Adapter Unshielding 1.8 m Data Cable, VGA shielding 1.35 m
Keyboard	IBM	KB-0225	Data Cable, PS2 shielding 1.85 m
Mouse	IBM	MO28VO	Data Cable, USB shielding 1.85 m
Modem	ACEXX	DM-1414	Power Cable, Adapter Unshielding 1.8 m Data Cable, RS232 Unshielding 1.35 m
Printer	HP	Desk Jet400	Power Cable, Adapter Unshielding 1.8 m Data Cable, PRINT Shielding 1.6 m
Printer	HP	LJ-1015	Power Cable, Adapter Unshielding 1.8 m Data Cable, PRINT Shielding 1.6 m
Printer	Epson	S-C43UX	Power Cable, Adapter Unshielding 1.8 m Data Cable, PRINT Shielding 1.6 m

Use Cable:

Cable	Description
RJ-45*1	Unshielding, 1.5m

2.5 Connection Diagram of Test System

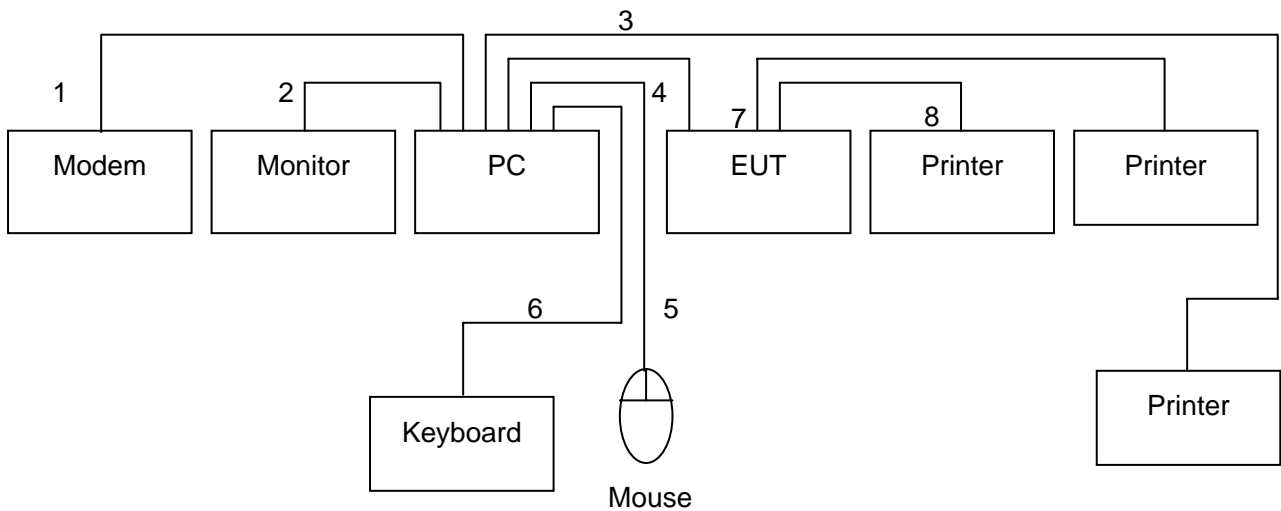

1. The I/O cable is connected from PC to the Modem.
2. The I/O cable is connected from PC to the Monitor.
3. The I/O cable is connected from PC to the Printer.
4. The RJ 45 cable is connected from PC to the EUT.
5. The I/O cable is connected from PC to the Mouse.
6. The I/O cable is connected from PC to the Keyboard.
7. The I/O cable is connected from EUT to the Printer.
8. The I/O cable is connected from EUT to the Printer.

2.6 General Information of Test

Test Site:	Exclusive Certification Corp. 4F-2, No. 28, Lane 78, Xing-Ai Rd. Nei-hu, Taipei City 114 Taiwan R.O.C.
Test Site Location (OATS1-SD):	No.68-1, Shihbachongsi, shihding Township, Taipei City 223, Taiwan, R.O.C.
Registration Number:	632249
Test Voltage:	AC 120V/ 60Hz
Test in Compliance with:	ANSI C63.4-2003 FCC Part 15 Subpart C
Frequency Range Investigated:	Conducted : from 150kHz to 30 MHz Radiated : from 30 MHz to 40GHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.

2.7 Description of series model

Model No.	Printer server function
SX-200	Enable
SX-600	Disable
XRX-600	Disable

Note: the printer server function to be control by firmware, and the electronics is identical.

2.8 History of this test report

ORIGINAL.

3. Antenna Requirements

3.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2 Antenna Construction and Directional Gain

Antenna 1:

Antenna type: Reverse SMA connect, Dipole antenna

Antenna Gain: 2 dBi for 2.4 GHz Band.

0 dBi for 5 GHz Band.

Antenna 2:

Antenna type: Reverse SMA connect, Dipole antenna

Antenna Gain: 5 dBi for 2.4 GHz Band.

3 dBi for 5 GHz Band.

4. Test of Conducted Emission

4.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

*Decreases with the logarithm of the frequency.

4.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

4.3 Typical Test Setup

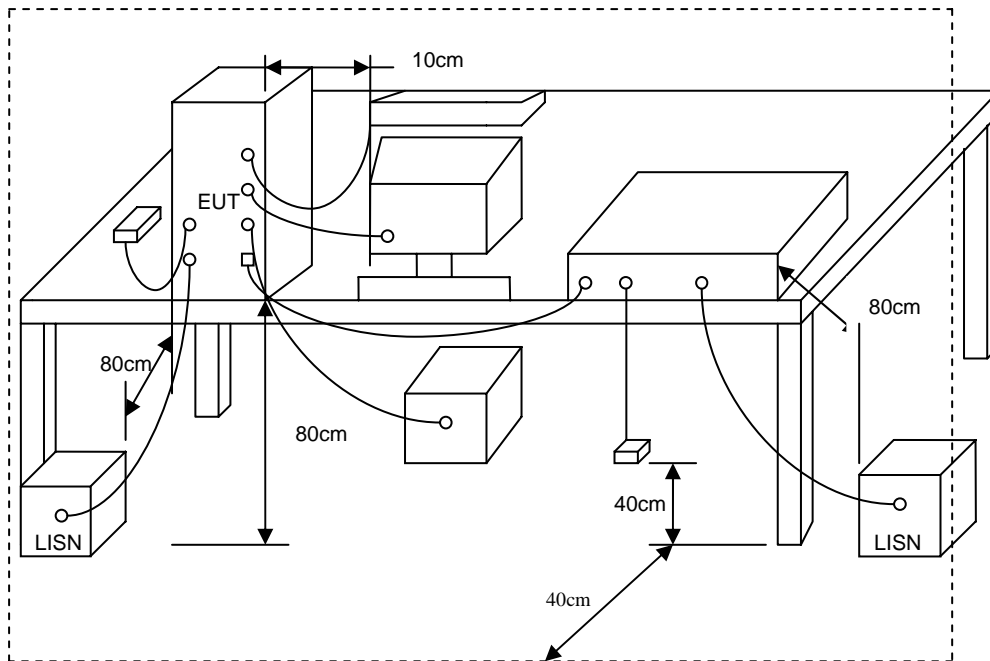


4.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Valid Date
Receiver	SCR3501	Schaffner	437	2006/11/03
LISN	NNB-2/16Z	MESS TEC	02/10191	2007/03/30
LISN	NNB-2/16Z	ROLF HEINE	03/10058	2007/04/26

4.5 Test Result and Data of 802.11b/g

EUT : SX-200
 Power : AC 120V
 Test Mode : 802.11g CH 1
 Memo : MT12-4120100-A1

Pol/Phase : NEUTRAL
 Temperature : 25 °C
 Humidity : 65 %

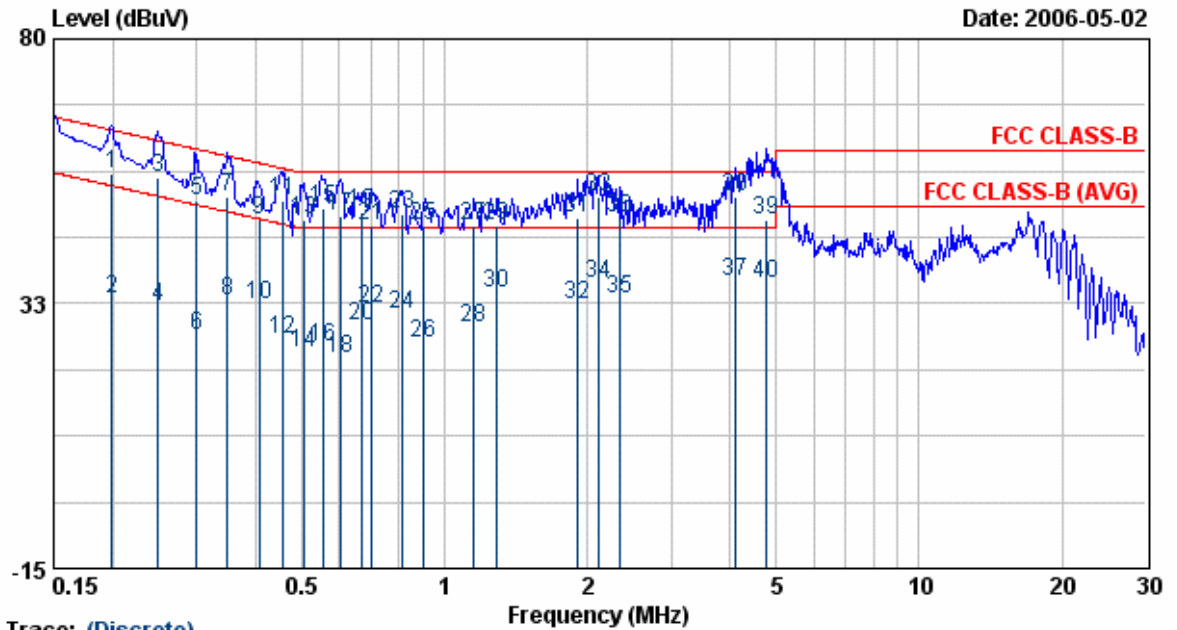

Trace: (Discrete)


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.20	55.52	0.20	55.72	63.66	-7.94	QP
0.20	33.33	0.20	33.53	53.66	-20.13	AVERAGE
0.25	54.70	0.29	54.99	61.81	-6.81	QP
0.25	31.65	0.29	31.94	51.81	-19.86	AVERAGE
0.30	50.45	0.38	50.83	60.23	-9.40	QP
0.30	26.28	0.38	26.66	50.23	-23.57	AVERAGE
0.35	51.18	0.44	51.62	59.00	-7.38	QP
0.35	32.48	0.44	32.92	49.00	-16.08	AVERAGE
0.41	47.05	0.50	47.55	57.73	-10.18	QP
0.41	31.87	0.50	32.37	47.73	-15.36	AVERAGE
0.46	50.32	0.50	50.82	56.76	-5.94	QP
0.46	25.60	0.50	26.10	46.76	-20.66	AVERAGE
0.50	47.16	0.50	47.66	56.00	-8.34	QP
0.50	23.31	0.50	23.81	46.00	-22.19	AVERAGE
0.55	49.27	0.50	49.77	56.00	-6.23	QP
0.55	24.24	0.50	24.74	46.00	-21.26	AVERAGE
0.60	47.81	0.50	48.31	56.00	-7.69	QP
0.60	22.25	0.50	22.75	46.00	-23.25	AVERAGE
0.67	48.50	0.50	49.00	56.00	-7.00	QP
0.67	27.88	0.50	28.38	46.00	-17.62	AVERAGE
0.70	46.07	0.50	46.57	56.00	-9.43	QP
0.70	31.24	0.50	31.74	46.00	-14.26	AVERAGE
0.82	48.12	0.50	48.62	56.00	-7.38	QP

0.82	30.00	0.50	30.50	46.00	-15.50	AVERAGE
0.91	45.92	0.50	46.42	56.00	-9.58	QP
0.91	24.82	0.50	25.32	46.00	-20.68	AVERAGE
1.15	45.94	0.52	46.46	56.00	-9.54	QP
1.15	27.65	0.52	28.17	46.00	-17.83	AVERAGE
1.29	46.11	0.54	46.65	56.00	-9.35	QP
1.29	33.92	0.54	34.46	46.00	-11.54	AVERAGE
1.91	47.15	0.59	47.74	56.00	-8.26	QP
1.91	31.82	0.59	32.41	46.00	-13.59	AVERAGE
2.11	51.06	0.60	51.66	56.00	-4.34	QP
2.11	35.65	0.60	36.25	46.00	-9.75	AVERAGE
2.35	32.79	0.60	33.39	46.00	-12.61	AVERAGE
2.35	47.33	0.60	47.93	56.00	-8.07	QP
4.10	35.84	0.60	36.44	46.00	-9.56	AVERAGE
4.10	50.97	0.60	51.57	56.00	-4.43	QP
4.75	46.92	0.60	47.52	56.00	-8.48	QP
4.75	35.38	0.60	35.98	46.00	-10.02	AVERAGE

-
- Remarks:
1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss
 3. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
 4. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
 5. The data is worse case.

EUT : SX-200
 Power : AC 120V
 Test Mode : 802.11g CH 1
 Memo : MT12-4120100-A1

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 65 %

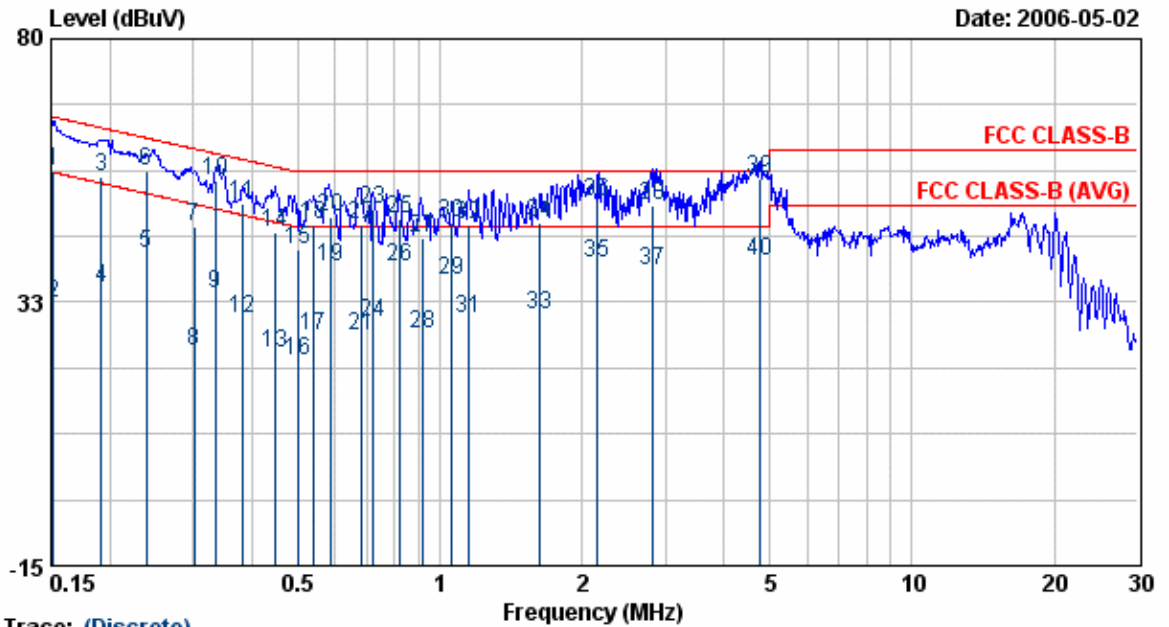

Trace: (Discrete)


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.15	55.62	0.38	56.00	65.91	-9.91	QP
0.15	32.03	0.38	32.41	55.91	-23.50	AVERAGE
0.19	54.66	0.31	54.97	63.96	-8.99	QP
0.19	34.86	0.31	35.17	53.96	-18.79	AVERAGE
0.24	40.90	0.38	41.28	52.13	-10.86	AVERAGE
0.24	55.64	0.38	56.02	62.13	-6.12	QP
0.30	45.83	0.48	46.31	60.18	-13.87	QP
0.30	23.06	0.48	23.54	50.18	-26.64	AVERAGE
0.33	33.45	0.52	33.97	49.33	-15.36	AVERAGE
0.33	53.92	0.52	54.44	59.33	-4.89	QP
0.38	49.64	0.58	50.22	58.23	-8.01	QP
0.38	28.92	0.58	29.50	48.23	-18.73	AVERAGE
0.45	22.74	0.59	23.33	46.94	-23.61	AVERAGE
0.45	44.56	0.59	45.15	56.94	-11.79	QP
0.50	41.39	0.58	41.97	56.01	-14.04	QP
0.50	21.22	0.58	21.80	46.01	-24.21	AVERAGE
0.54	25.75	0.57	26.32	46.00	-19.68	AVERAGE
0.54	45.98	0.57	46.55	56.00	-9.45	QP
0.59	38.25	0.56	38.81	46.00	-7.19	AVERAGE
0.59	47.40	0.56	47.96	56.00	-8.04	QP
0.68	25.94	0.54	26.48	46.00	-19.52	AVERAGE
0.68	46.07	0.54	46.61	56.00	-9.39	QP
0.72	48.60	0.54	49.14	56.00	-6.86	QP

0.72	28.18	0.54	28.72	46.00	-17.28	AVERAGE
0.82	47.09	0.52	47.61	56.00	-8.39	QP
0.82	38.28	0.52	38.80	46.00	-7.20	AVERAGE
0.92	43.42	0.51	43.93	56.00	-12.07	QP
0.92	26.35	0.51	26.86	46.00	-19.14	AVERAGE
1.05	36.04	0.52	36.56	46.00	-9.44	AVERAGE
1.05	46.20	0.52	46.72	56.00	-9.28	QP
1.16	29.12	0.54	29.66	46.00	-16.34	AVERAGE
1.16	46.01	0.54	46.55	56.00	-9.45	QP
1.63	29.75	0.64	30.39	46.00	-15.61	AVERAGE
1.63	46.29	0.64	46.93	56.00	-9.07	QP
2.16	38.96	0.70	39.66	46.00	-6.34	AVERAGE
2.16	49.79	0.70	50.49	56.00	-5.51	QP
2.81	37.41	0.70	38.11	46.00	-7.89	AVERAGE
2.81	49.15	0.70	49.85	56.00	-6.15	QP
4.74	54.10	0.68	54.78	56.00	-1.22	QP
4.74	39.35	0.68	40.03	46.00	-5.97	AVERAGE

- Remarks:
1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss
 3. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
 4. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
 5. The data is worse case.

4.6 Test Result and Data of 802.11a

EUT : SX-200
 Power : AC 120V
 Test Mode : 802.11a CH 9
 Memo : MT12-4120100-A1
 Pol/Phase : NEUTRAL
 Temperature : 25 °C
 Humidity : 65 %

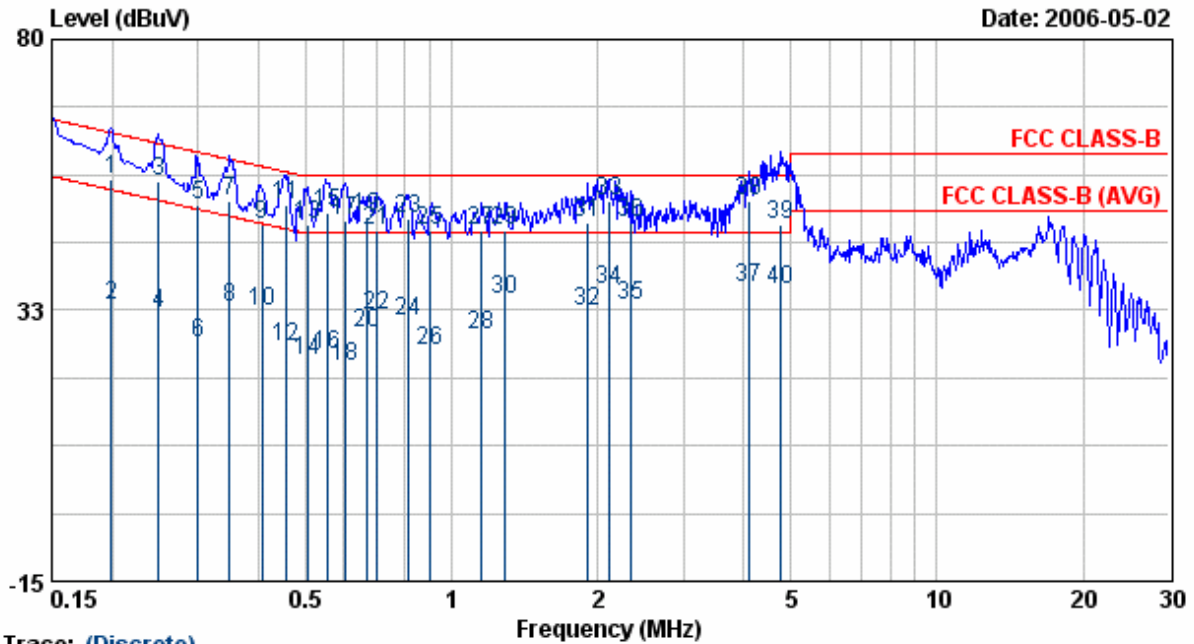

Trace: (Discrete)


Freq	Read Level	Factor	Level	Limit	Over Limit	Remark
MHz	dBuV	dB	dBuV	dBuV	dBuV	
0.20	55.16	0.20	55.36	63.66	-8.30	QP
0.20	33.22	0.20	33.42	53.66	-20.24	AVERAGE
0.25	54.70	0.29	54.99	61.81	-6.81	QP
0.25	31.65	0.29	31.94	51.81	-19.86	AVERAGE
0.30	50.45	0.38	50.83	60.23	-9.40	QP
0.30	26.28	0.38	26.66	50.23	-23.57	AVERAGE
0.35	51.18	0.44	51.62	59.00	-7.38	QP
0.35	32.48	0.44	32.92	49.00	-16.08	AVERAGE
0.41	47.05	0.50	47.55	57.73	-10.18	QP
0.41	31.87	0.50	32.37	47.73	-15.36	AVERAGE
0.46	50.32	0.50	50.82	56.76	-5.94	QP
0.46	25.60	0.50	26.10	46.76	-20.66	AVERAGE
0.50	47.16	0.50	47.66	56.00	-8.34	QP
0.50	23.31	0.50	23.81	46.00	-22.19	AVERAGE
0.55	49.27	0.50	49.77	56.00	-6.23	QP
0.55	24.24	0.50	24.74	46.00	-21.26	AVERAGE
0.60	47.81	0.50	48.31	56.00	-7.69	QP
0.60	22.25	0.50	22.75	46.00	-23.25	AVERAGE
0.67	48.50	0.50	49.00	56.00	-7.00	QP
0.67	27.88	0.50	28.38	46.00	-17.62	AVERAGE
0.70	46.07	0.50	46.57	56.00	-9.43	QP
0.70	31.24	0.50	31.74	46.00	-14.26	AVERAGE
0.82	48.12	0.50	48.62	56.00	-7.38	QP
0.82	30.00	0.50	30.50	46.00	-15.50	AVERAGE
0.91	45.92	0.50	46.42	56.00	-9.58	QP

0.91	24.82	0.50	25.32	46.00	-20.68	AVERAGE
1.15	45.94	0.52	46.46	56.00	-9.54	QP
1.15	27.65	0.52	28.17	46.00	-17.83	AVERAGE
1.29	46.11	0.54	46.65	56.00	-9.35	QP
1.29	33.92	0.54	34.46	46.00	-11.54	AVERAGE
1.91	47.15	0.59	47.74	56.00	-8.26	QP
1.91	31.82	0.59	32.41	46.00	-13.59	AVERAGE
2.11	51.06	0.60	51.66	56.00	-4.34	QP
2.11	35.65	0.60	36.25	46.00	-9.75	AVERAGE
2.35	32.79	0.60	33.39	46.00	-12.61	AVERAGE
2.35	47.33	0.60	47.93	56.00	-8.07	QP
4.10	35.84	0.60	36.44	46.00	-9.56	AVERAGE
4.10	50.97	0.60	51.57	56.00	-4.43	QP
4.75	46.92	0.60	47.52	56.00	-8.48	QP
4.75	35.38	0.60	35.98	46.00	-10.02	AVERAGE

- Remarks:
1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss
 3. According to technical experiences, all spurious emission of 802.11a mode at channel 9, 11, 13 are almost the same below 1GHz, so that the channel 9 was chosen as representative in final test.
 4. The data is worse case.

EUT : SX-200
 Power : AC 120V
 Test Mode : 802.11a CH 9
 Memo : MT12-4120100-A1

Pol/Phase : LINE
 Temperature : 25 °C
 Humidity : 65 %

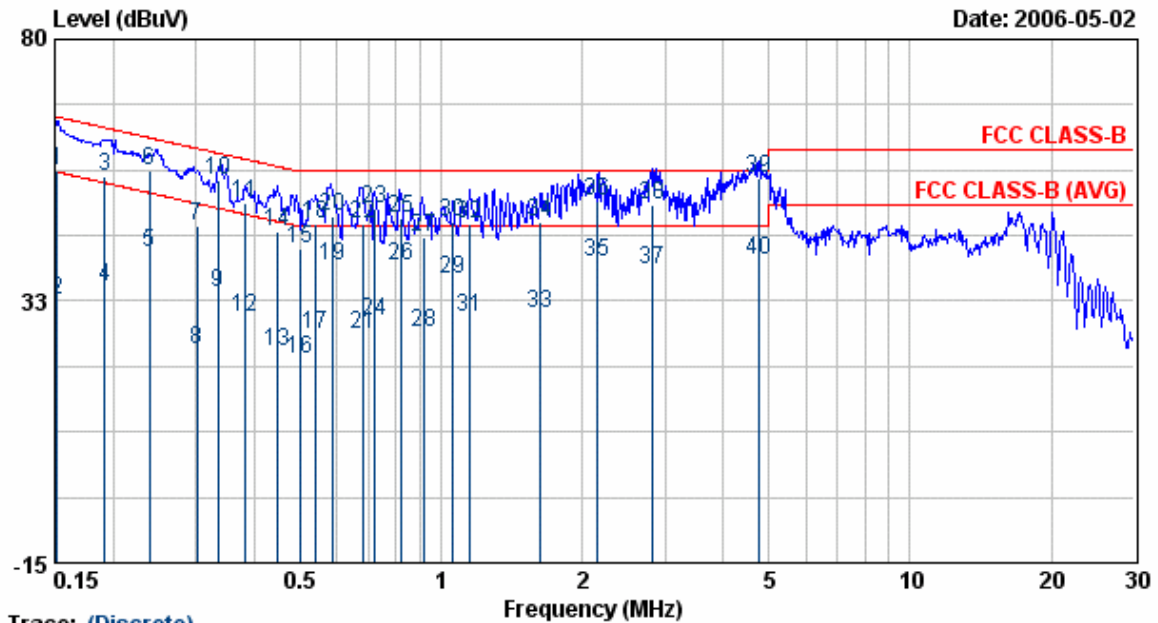

0.82	38.28	0.52	38.80	46.00	-7.20	AVERAGE
0.92	43.42	0.51	43.93	56.00	-12.07	QP
0.92	26.35	0.51	26.86	46.00	-19.14	AVERAGE
1.05	36.04	0.52	36.56	46.00	-9.44	AVERAGE
1.05	46.20	0.52	46.72	56.00	-9.28	QP
1.16	29.12	0.54	29.66	46.00	-16.34	AVERAGE
1.16	46.01	0.54	46.55	56.00	-9.45	QP
1.63	29.75	0.64	30.39	46.00	-15.61	AVERAGE
1.63	46.29	0.64	46.93	56.00	-9.07	QP
2.16	38.96	0.70	39.66	46.00	-6.34	AVERAGE
2.16	49.79	0.70	50.49	56.00	-5.51	QP
2.81	37.41	0.70	38.11	46.00	-7.89	AVERAGE
2.81	49.15	0.70	49.85	56.00	-6.15	QP
4.74	54.10	0.68	54.78	56.00	-1.22	QP
4.74	39.35	0.68	40.03	46.00	-5.97	AVERAGE

- Remarks:
1. Level = Read Level + Factor
 2. Factor = LISN(ISN) Factor + Cable Loss
 3. According to technical experiences, all spurious emission of 802.11a mode at channel 9,11,13 are almost the same below 1GHz, so that the channel 9 was chosen as representative in final test.
 4. The data is worse case.


Test engineer: Ben

4.7 Test Photographs

Front View



Rear View

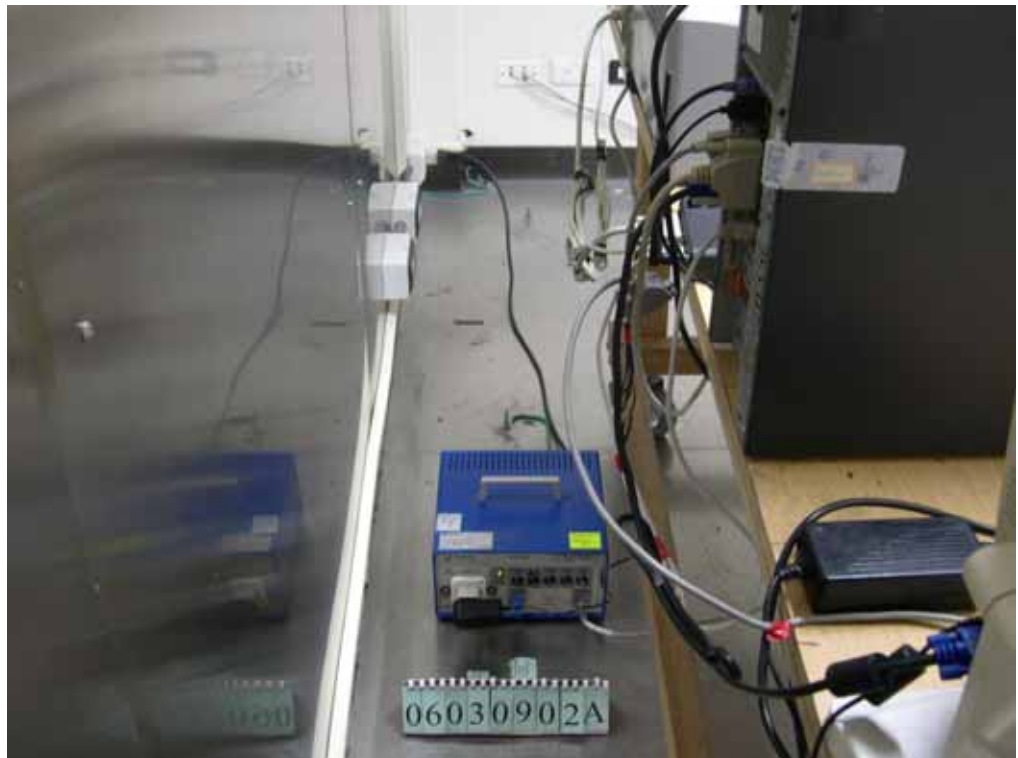

5. Test of Radiated Emission

5.1 Test Limit

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2003. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance Meters	Radiated (μ V / M)	Radiated (dB μ V / M)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0


For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the above table.

Frequency (MHz)	Distance Meters	Radiated (dB μ V / M)
30-230	10	30
230-1000	10	37

5.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.3 Typical Test Setup

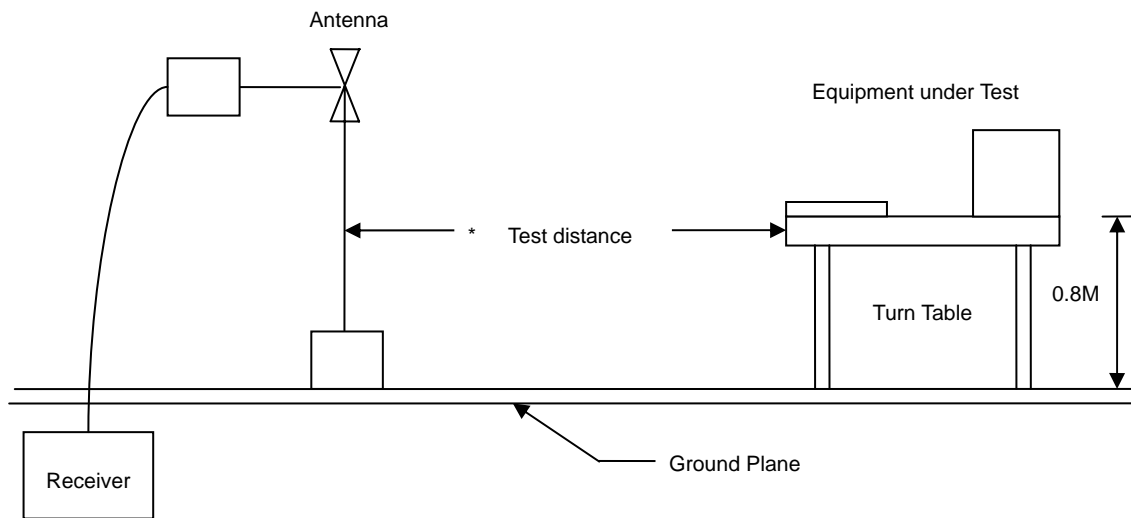


5.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Valid Date
EMI Receiver	8546A	HP	3807A00454	2007/04/13
Spectrum Analyzer	FSP40	R&S	100047	2007/01/16
Horn Antenna	3115	EMCO	31589	2007/02/12
Horn Antenna	3116	EMCO	31970	2007/02/09
Bilog Antenna	CBL6112B	Schaffner	2840	2007/04/19
Amplifier	8449B	Agilent	3008A01954	2007/01/08
Amplifier	8447D	Agilent	2944A10531	2006/08/09
Amplifier	PA-840	COM-POWER	711885	2006/08/10

5.5 Test Result and Data of 802.11b/g

EUT	: SX-200	Pol/Phase	: HORIZONTAL
Power	: AC 120V	Temperature	: 24 °C
Test Mode	: Transmit/Receive	Humidity	: 70 %
Operation Channel	: 1	Atmospheric Pressure	: 1015 hPa
Modulation Type	: 802.11g		
Rate	: 54 Mbps		
Memo	: MT12-4120100-A1		

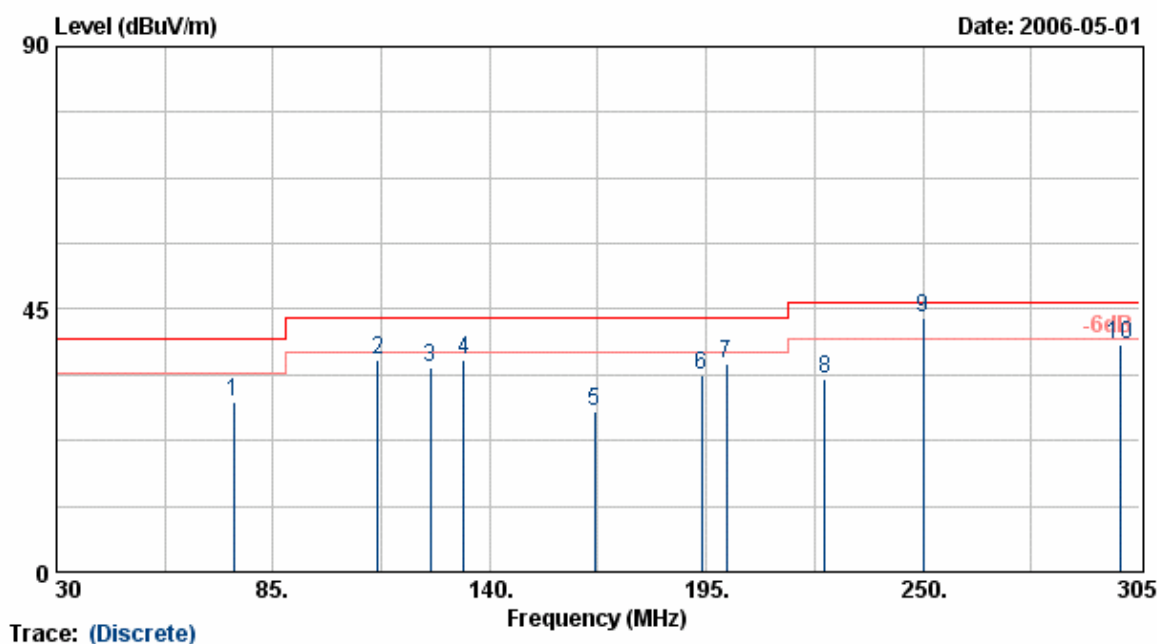


Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
75.05	49.33	-20.27	29.06	40.00	-10.94	Peak	85	200
111.64	52.66	-16.33	36.33	43.50	-7.17	Peak	77	200
125.03	50.83	-15.68	35.15	43.50	-8.35	Peak	77	200
133.38	52.15	-15.75	36.40	43.50	-7.10	Peak	169	200
166.70	44.69	-17.14	27.55	43.50	-15.95	Peak	66	200
193.85	51.66	-17.84	33.82	43.50	-9.68	Peak	88	200
200.01	53.55	-18.01	35.54	43.50	-7.96	Peak	100	200
225.00	50.06	-17.07	32.99	46.00	-13.01	Peak	330	200
250.06	57.66	-14.02	43.64	46.00	-2.36	QP	312	200
300.00	52.00	-13.21	38.79	46.00	-7.21	Peak	312	200

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

EUT : SX-200
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 1
 Modulation Type : 802.11g
 Rate : 54 Mbps
 Memo : MT12-4120100-A1
 Pol/Phase : HORIZONTAL
 Temperature : 24 °C
 Humidity : 70 %
 Atmospheric Pressure: 1015 hPa

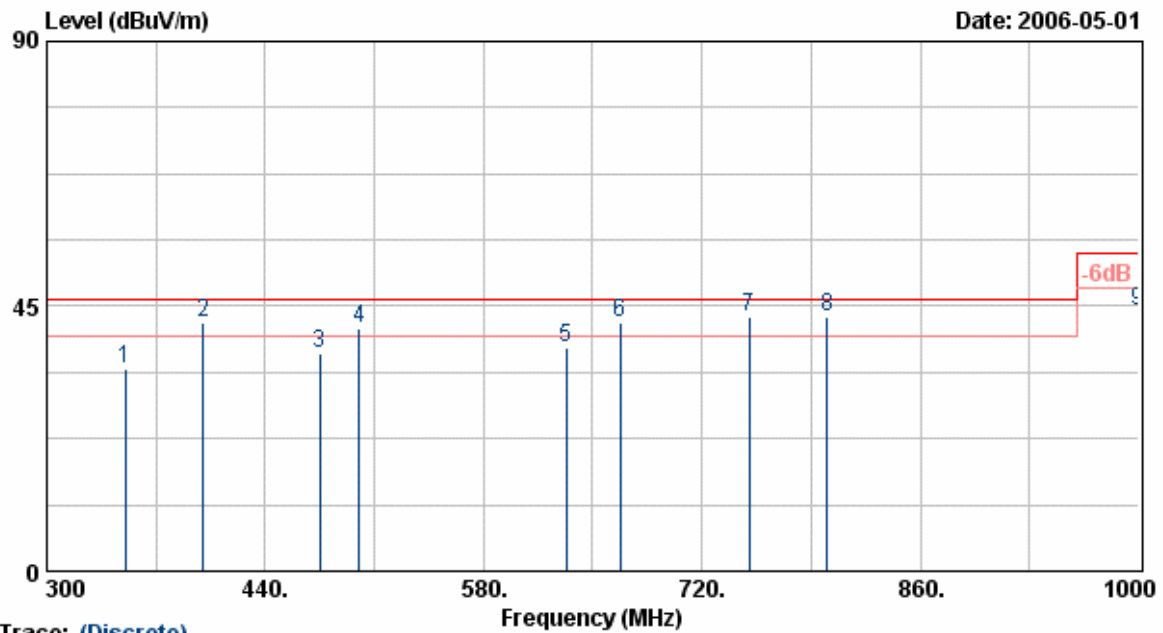


Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
350.40	45.88	-11.54	34.34	46.00	-11.66	Peak	254	200
400.06	52.36	-10.12	42.24	46.00	-3.76	QP	32	200
475.06	44.23	-7.41	36.82	46.00	-9.18	Peak	0	200
500.06	47.66	-6.58	41.08	46.00	-4.92	QP	45	200
633.26	41.25	-3.36	37.89	46.00	-8.11	Peak	0	200
667.75	45.24	-3.03	42.21	46.00	-3.79	QP	0	200
750.09	44.78	-1.44	43.34	46.00	-2.66	QP	156	200
800.09	44.63	-1.53	43.10	46.00	-2.90	QP	156	200
999.98	43.20	0.96	44.16	54.00	-9.84	Peak	351	200

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

EUT : SX-200
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 1
 Modulation Type : 802.11g
 Rate : 54 Mbps
 Memo : MT12-4120100-A1

Pol/Phase : VERTICAL
 Temperature : 24 °C
 Humidity : 70 %
 Atmospheric Pressure: 1015 hPa

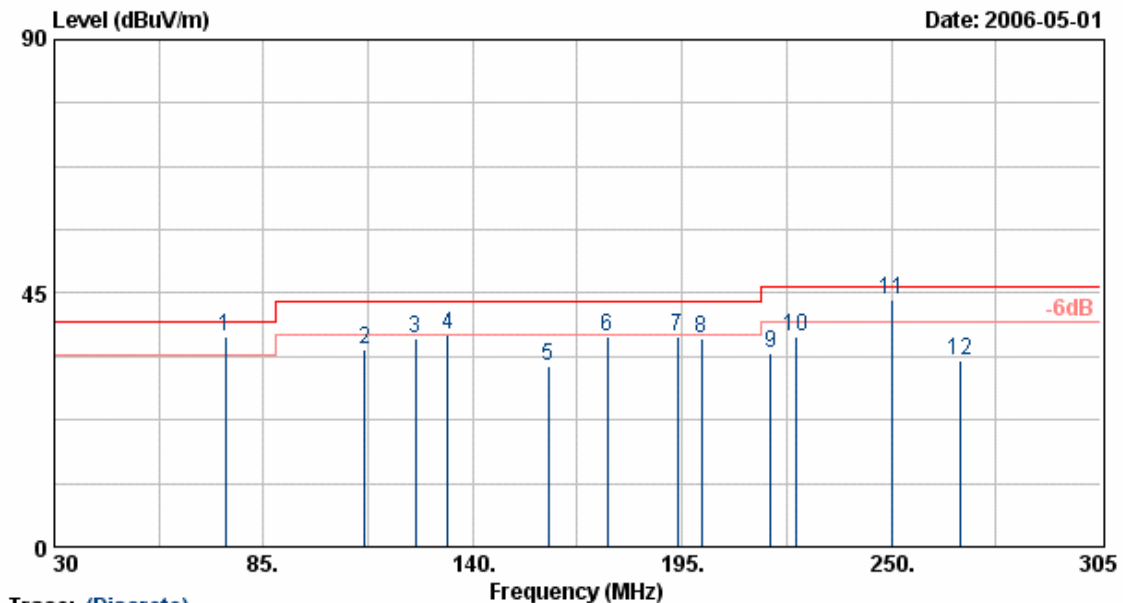

Trace: (Discrete)


Frequency (MHz)	Meter Reading (dBUV)	Corrected Factor (dBUV/m)	Result (dBUV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
75.04	57.55	-20.28	37.27	40.00	-2.73	QP	93	100
111.64	51.35	-16.33	35.02	43.50	-8.48	Peak	211	100
125.05	52.66	-15.68	36.98	43.50	-6.52	Peak	211	100
133.35	53.45	-15.75	37.70	43.50	-5.80	QP	0	100
159.80	48.74	-16.60	32.14	43.50	-11.36	Peak	144	100
175.30	55.21	-17.82	37.39	43.50	-6.11	Peak	323	100
193.80	55.22	-17.84	37.38	43.50	-6.12	Peak	323	100
200.03	54.84	-18.01	36.83	43.50	-6.67	Peak	300	100
218.25	52.20	-17.77	34.43	46.00	-11.57	Peak	35	100
225.00	54.33	-17.07	37.26	46.00	-8.74	Peak	35	100
250.04	57.74	-14.02	43.72	46.00	-2.28	QP	0	100
268.34	46.68	-13.52	33.16	46.00	-12.84	Peak	0	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same,so the 802.11g mode chosen as representative in final test.
5. According to technical experiences,all spurious emission of 802.11g mode at channel 1,6,11 are almost the same below 1GHz,so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

EUT : SX-200
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 1
 Modulation Type : 802.11g
 Rate : 54 Mbps
 Memo : MT12-4120100-A1

Pol/Phase : VERTICAL
 Temperature : 24 °C
 Humidity : 70 %
 Atmospheric Pressure: 1015 hPa

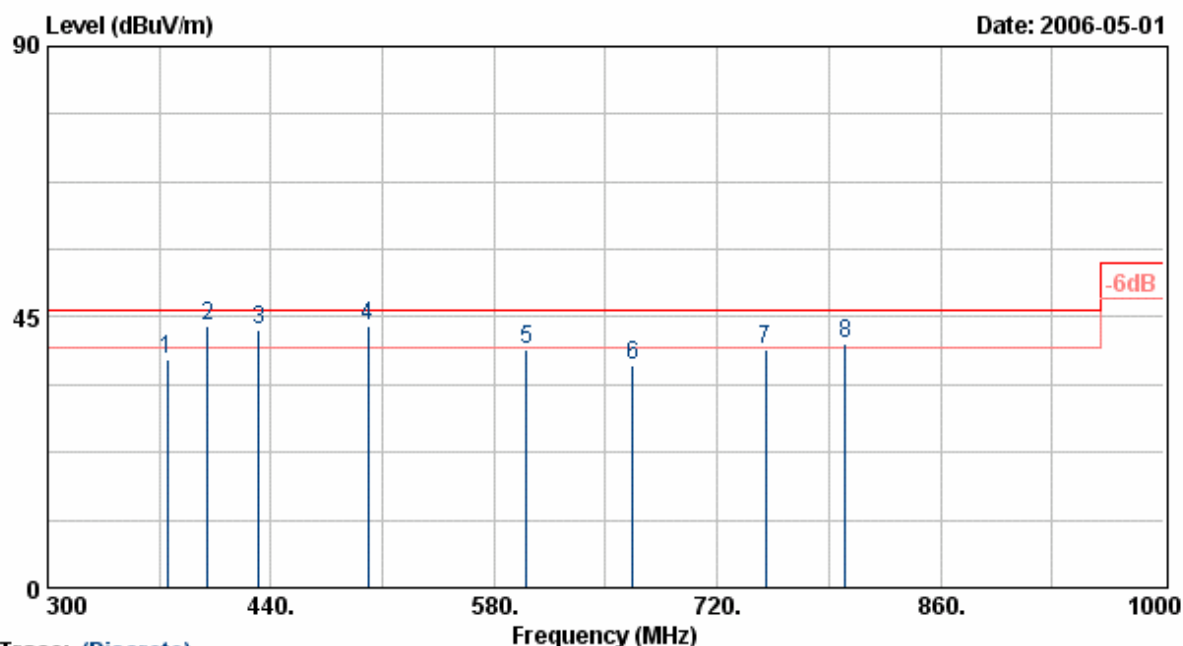

Trace: (Discrete)


Frequency (MHz)	Meter Reading (dBUV)	Corrected Factor (dBUV/m)	Result (dBUV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
375.03	48.88	-10.75	38.13	46.00	-7.87	Peak	166	100
400.05	53.76	-10.12	43.64	46.00	-2.36	QP	166	100
432.30	51.78	-8.86	42.92	46.00	-3.08	QP	223	100
500.65	49.96	-6.54	43.42	46.00	-2.58	QP	223	100
600.04	43.48	-3.79	39.69	46.00	-6.31	Peak	131	100
666.75	40.00	-3.01	36.99	46.00	-9.01	Peak	131	100
750.00	40.88	-1.44	39.45	46.00	-6.56	Peak	0	100
800.10	42.25	-1.53	40.72	46.00	-5.28	QP	0	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. All emission below 1GHz at 802.11b/g mode are all the same, so the 802.11g mode chosen as representative in final test.
5. According to technical experiences, all spurious emission of 802.11g mode at channel 1, 6, 11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.
6. The data is worse case.

EUT : SX-200
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 1
 Modulation Type : 802.11b
 Rate : 11 Mbps
 Memo : MT12-4120100-A1

Pol/Phase : HORIZONTAL
 Temperature : 24 °C
 Humidity : 70 %
 Atmospheric Pressure: 1015 hPa

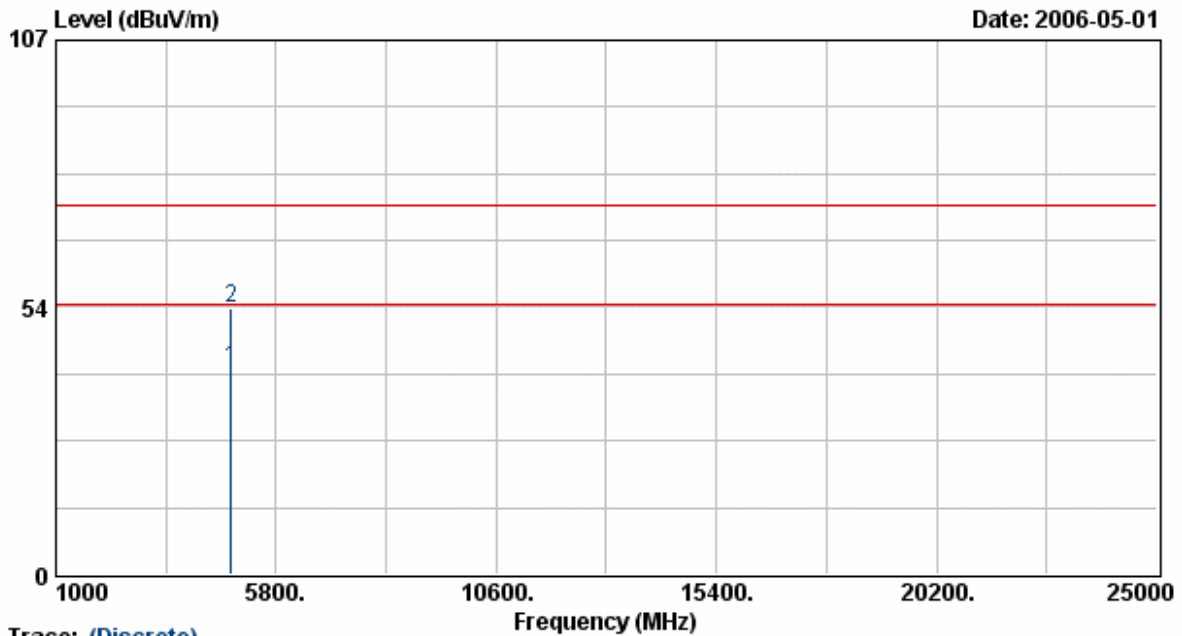

Trace: (Discrete)


Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
4823.97	35.65	5.71	41.36	54.00	-12.64	Average	200	100
4823.97	47.50	5.71	53.21	74.00	-20.79	Peak	200	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT : SX-200
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 1
 Modulation Type : 802.11b
 Rate : 11 Mbps
 Memo : MT12-4120100-A1

Pol/Phase : VERTICAL
 Temperature : 24 °C
 Humidity : 70 %
 Atmospheric Pressure: 1015 hPa

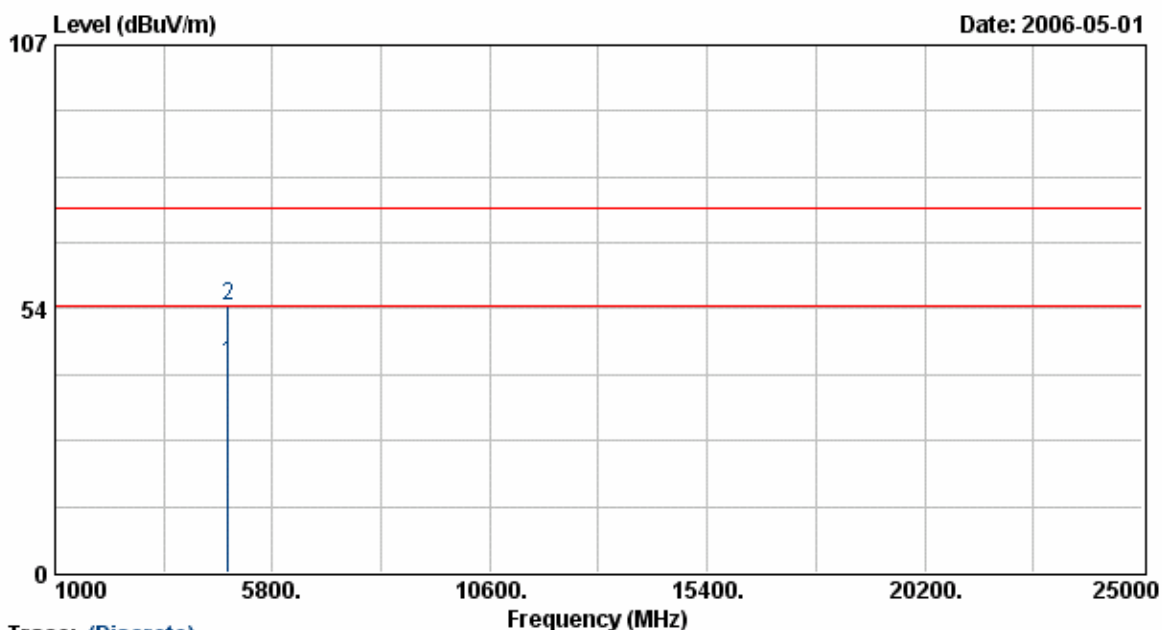

Trace: (Discrete)

Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
4824.00	36.55	5.71	42.26	54.00	-11.74	Average	188	100
4824.00	48.32	5.71	54.03	74.00	-19.97	Peak	188	100


Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

```

EUT           : SX-200
Power         : AC 120V
Test Mode     : Transmit/Receive
Operation Channel: 6
Modulation Type : 802.11b
Rate         : 11 Mbps
Memo         : MT12-4120100-A1

Pol/Phase    : HORIZONTAL
Temperature   : 24 °C
Humidity     : 70 %
Atmospheric Pressure: 1015 hPa
    
```

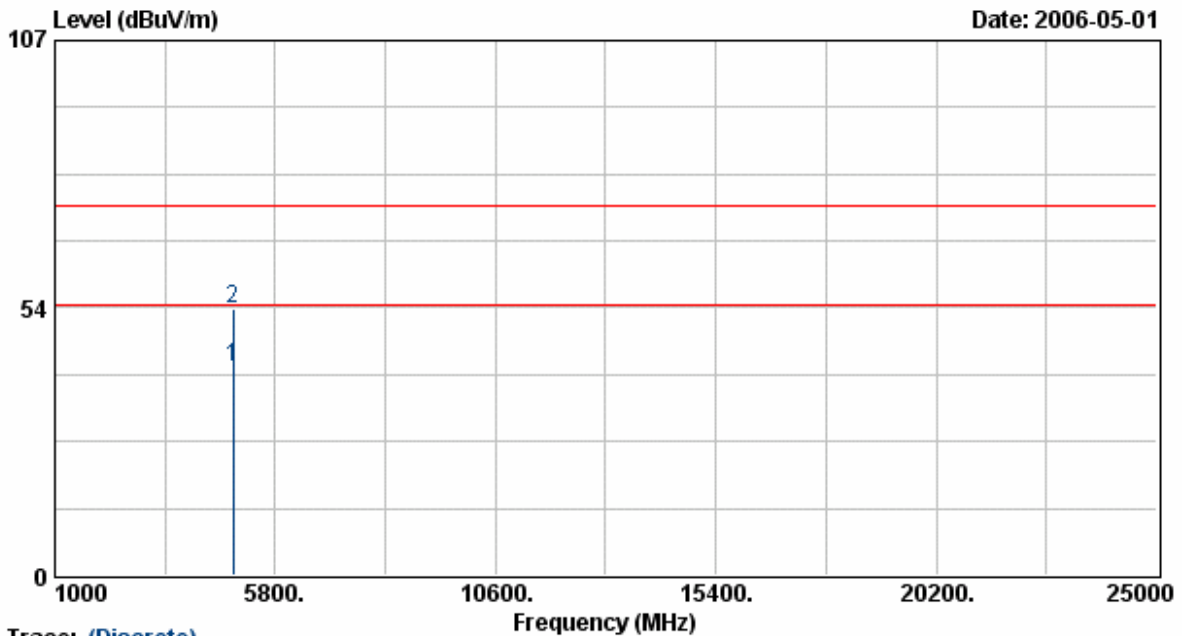


Trace: (Discrete)

Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
4874.00	35.88	5.85	41.73	54.00	-12.27	Average	200	100
4874.00	47.62	5.85	53.47	74.00	-20.53	Peak	200	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT	: SX-200	Pol/Phase	: VERTICAL
Power	: AC 120V	Temperature	: 24 °C
Test Mode	: Transmit/Receive	Humidity	: 70 %
Operation Channel	: 6	Atmospheric Pressure	: 1015 hPa
Modulation Type	: 802.11b		
Rate	: 11 Mbps		
Memo	: MT12-4120100-A1		

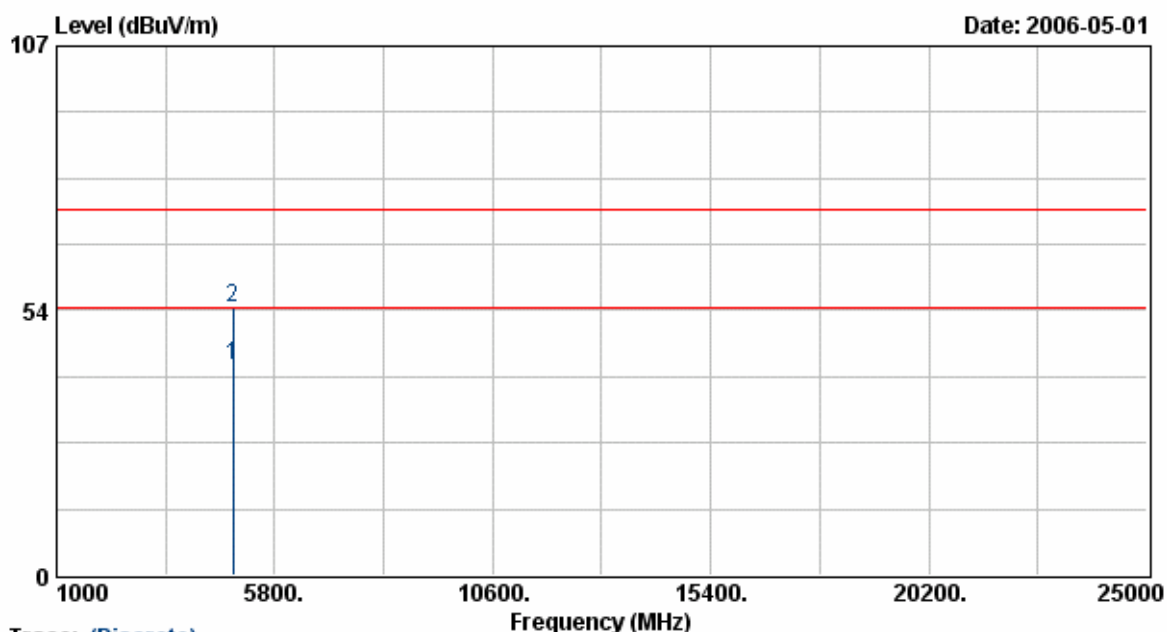

Trace: (Discrete)


Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
4873.99	36.41	5.85	42.26	54.00	-11.74	Average	188	100
4873.99	48.15	5.85	54.00	74.00	-20.00	Peak	188	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT : SX-200
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 11
 Modulation Type : 802.11b
 Rate : 11 Mbps
 Memo : MT12-4120100-A1

Pol/Phase : HORIZONTAL
 Temperature : 24 °C
 Humidity : 70 %
 Atmospheric Pressure: 1015 hPa

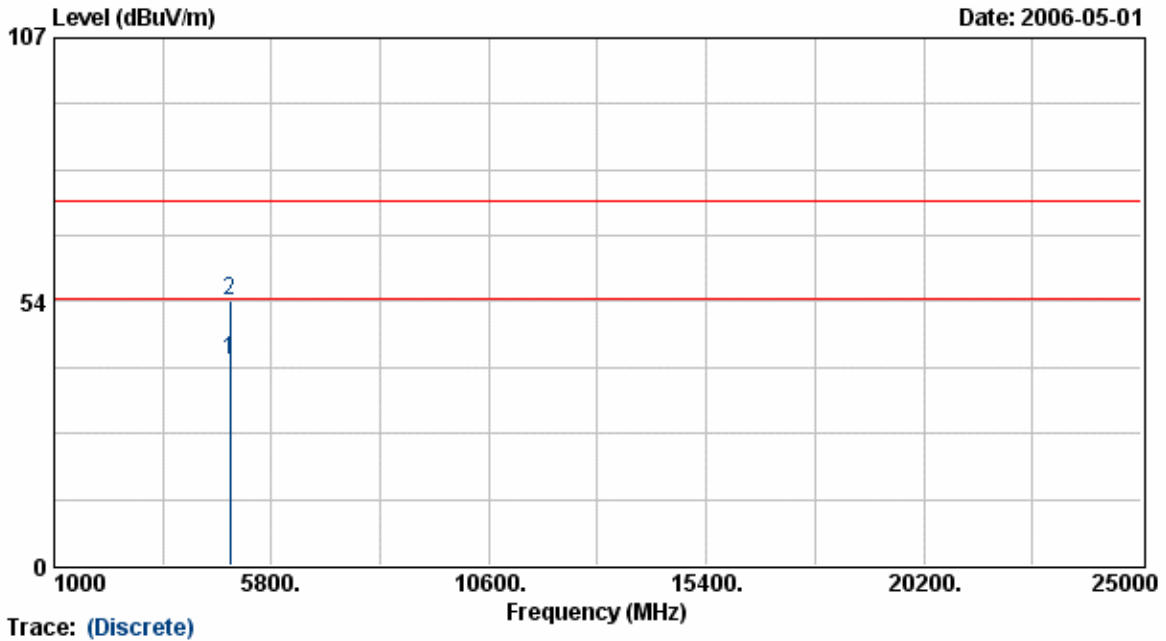


Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
4874.00	35.89	5.85	41.74	54.00	-12.26	Average	200	100
4874.00	47.67	5.85	53.52	74.00	-20.48	Peak	200	100

- Notes:
1. Result = Meter Reading + Corrected Factor
 2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
 3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
 4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
 5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
 6. The other emissions is too low to be measured.

EUT : SX-200
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 11
 Modulation Type : 802.11b
 Rate : 11 Mbps
 Memo : MT12-4120100-A1

Pol/Phase : VERTICAL
 Temperature : 24 °C
 Humidity : 70 %
 Atmospheric Pressure: 1015 hPa

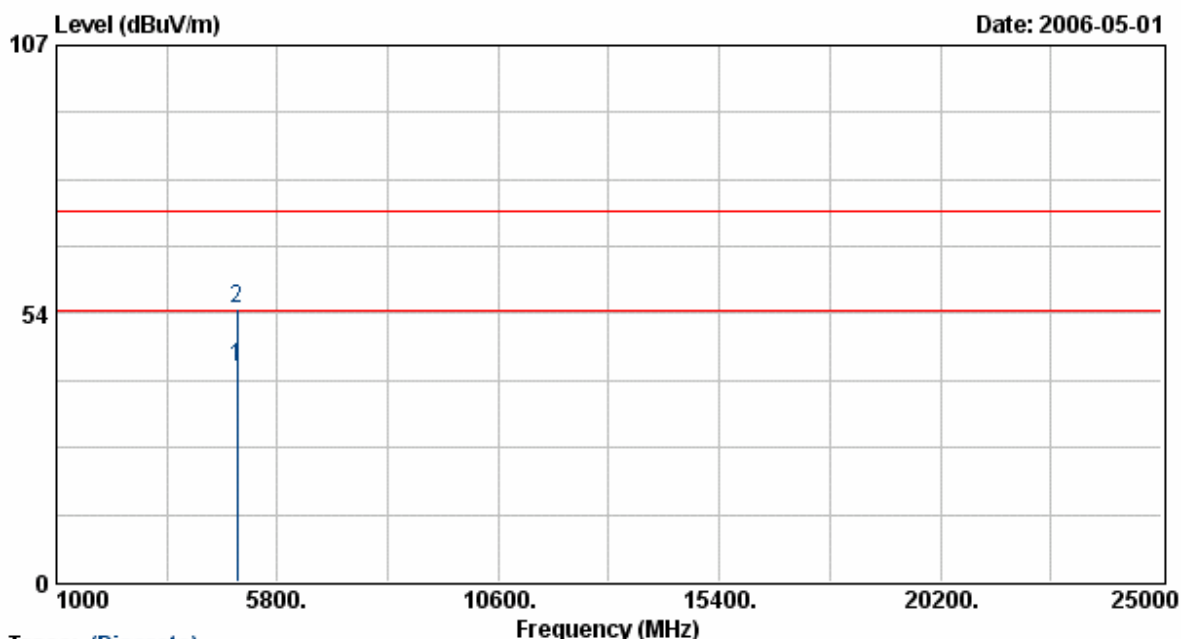


Trace: (Discrete)

Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
4924.00	36.62	5.99	42.61	54.00	-11.39	Average	188	100
4924.00	48.41	5.99	54.40	74.00	-19.60	Peak	188	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT	: SX-200	Pol/Phase	: HORIZONTAL
Power	: AC 120V	Temperature	: 24 °C
Test Mode	: Transmit/Receive	Humidity	: 70 %
Operation Channel	: 1	Atmospheric Pressure	: 1015 hPa
Modulation Type	: 802.11g		
Rate	: 54 Mbps		
Memo	: MT12-4120100-A1		

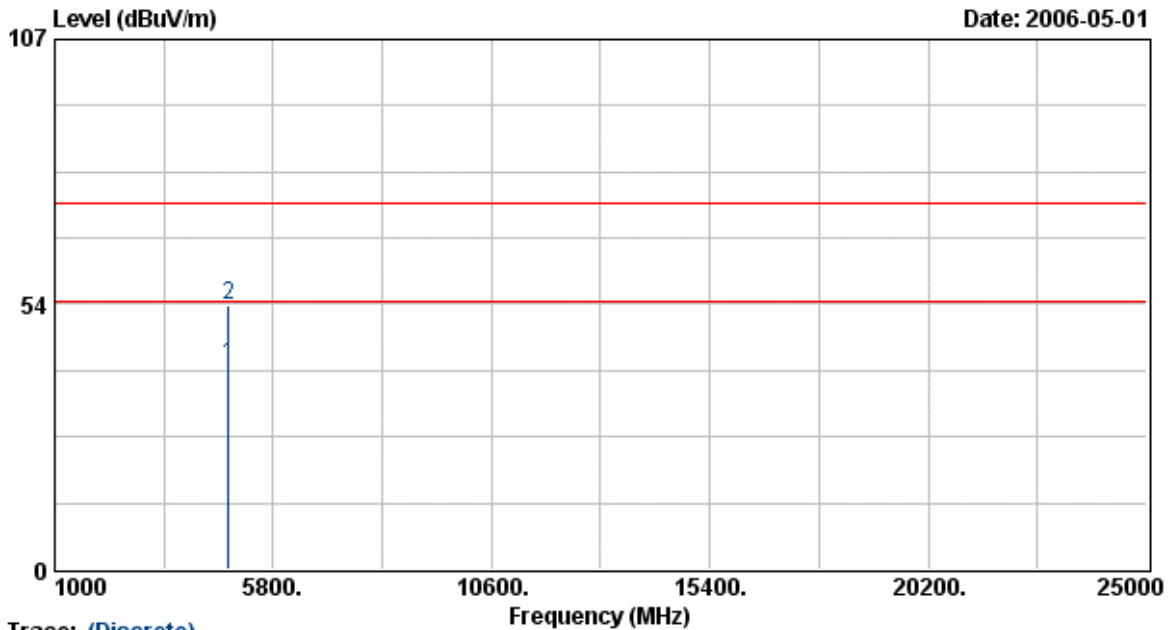


Trace: (Discrete)

Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
4823.96	35.66	5.71	41.37	54.00	-12.63	Average	200	100
4823.96	47.52	5.71	53.23	74.00	-20.77	Peak	200	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT	: SX-200	Pol/Phase	: VERTICAL
Power	: AC 120V	Temperature	: 24 °C
Test Mode	: Transmit/Receive	Humidity	: 70 %
Operation Channel	: 1	Atmospheric Pressure	: 1015 hPa
Modulation Type	: 802.11g		
Rate	: 54 Mbps		
Memo	: MT12-4120100-A1		

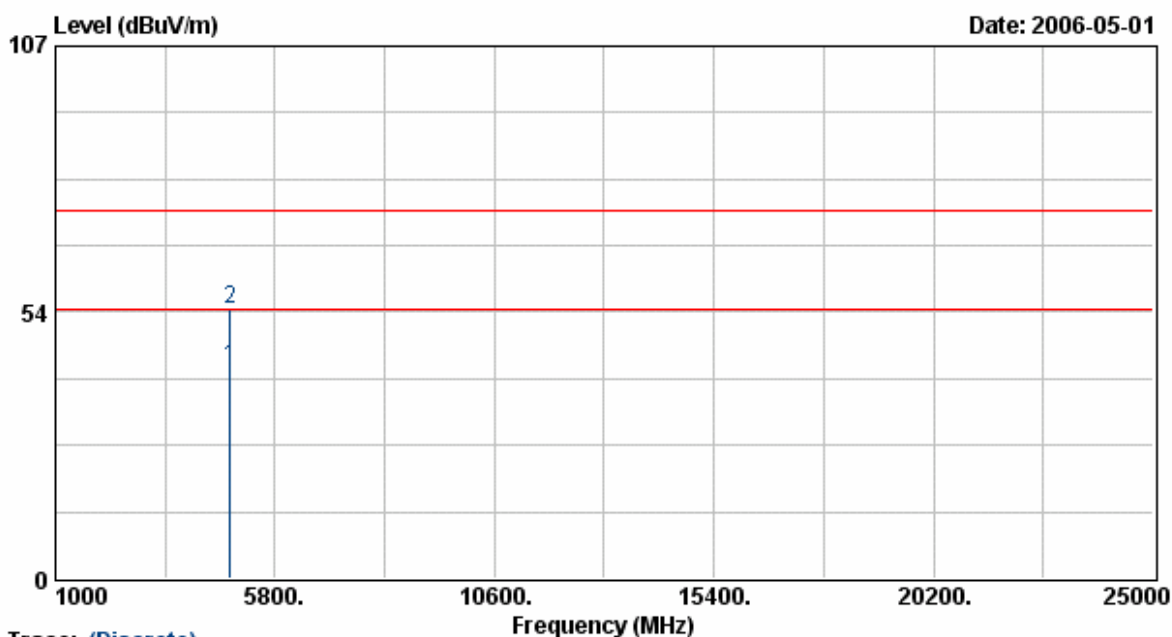


Trace: (Discrete)

Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
4823.95	36.85	5.71	42.56	54.00	-11.44	Average	188	100
4823.95	48.57	5.71	54.28	74.00	-19.72	Peak	188	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT	: SX-200	Pol/Phase	: HORIZONTAL
Power	: AC 120V	Temperature	: 24 °C
Test Mode	: Transmit/Receive	Humidity	: 70 %
Operation Channel	: 6	Atmospheric Pressure	: 1015 hPa
Modulation Type	: 802.11g		
Rate	: 54 Mbps		
Memo	: MT12-4120100-A1		

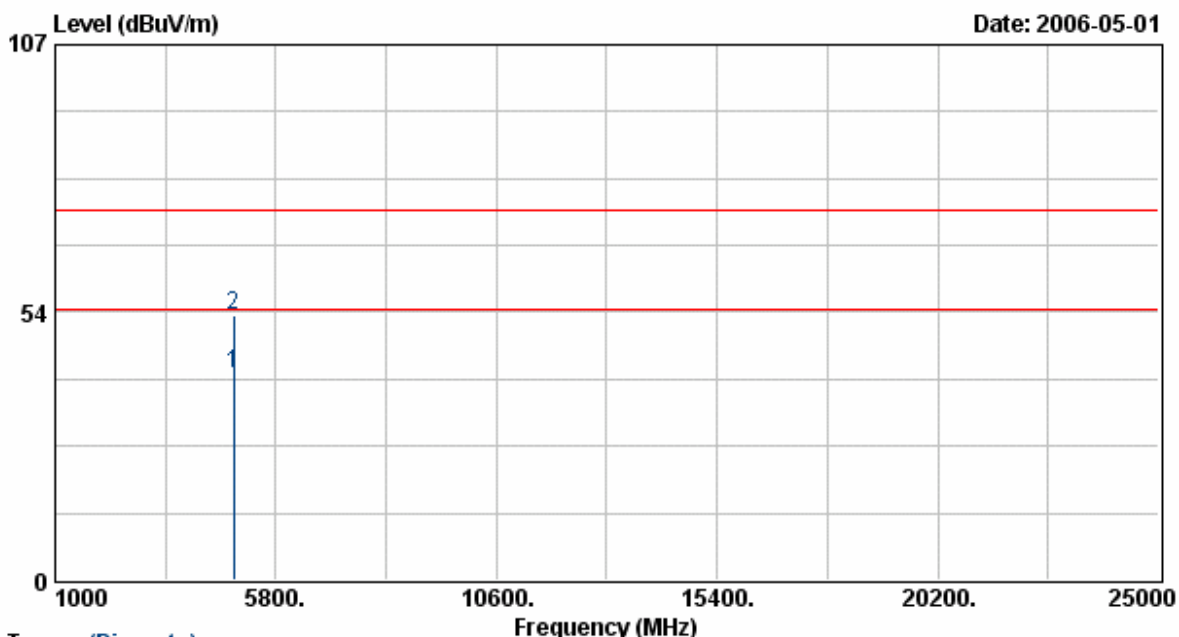

Trace: (Discrete)


Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
4874.00	35.40	5.85	41.25	54.00	-12.75	Average	200	100
4874.00	47.11	5.85	52.96	74.00	-21.04	Peak	200	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT : SX-200
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 6
 Modulation Type : 802.11g
 Rate : 54 Mbps
 Memo : MT12-4120100-A1

Pol/Phase : VERTICAL
 Temperature : 24 °C
 Humidity : 70 %
 Atmospheric Pressure: 1015 hPa

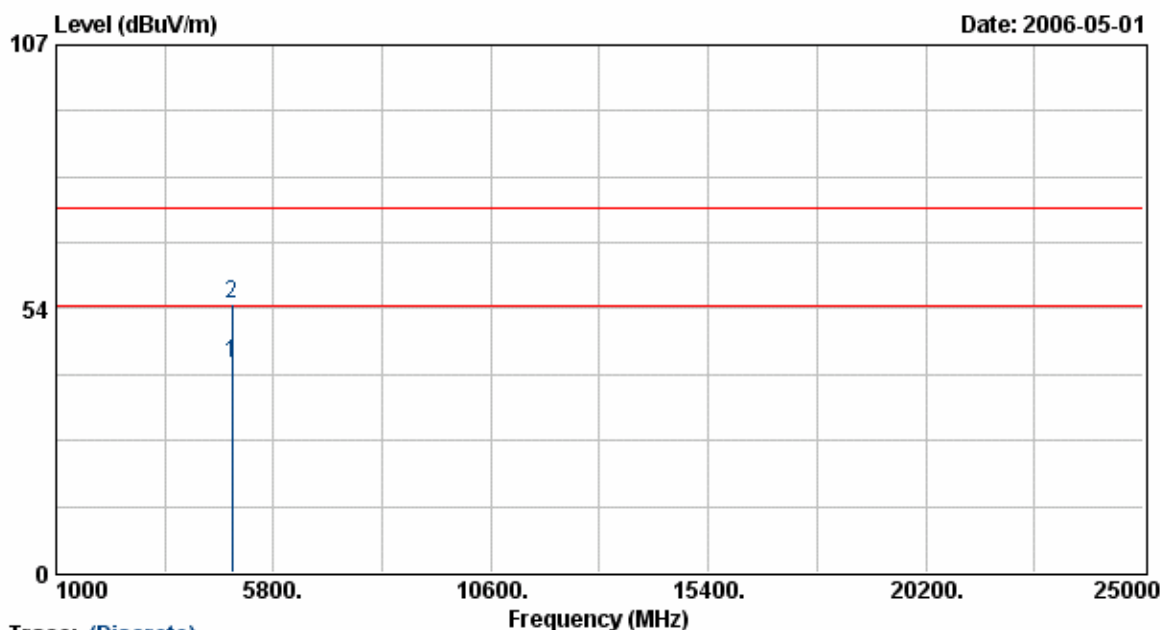

Trace: (Discrete)


Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
4874.00	36.69	5.85	42.54	54.00	-11.46	Average	188	100
4874.00	48.45	5.85	54.30	74.00	-19.70	Peak	188	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT : SX-200
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 11
 Modulation Type : 802.11g
 Rate : 54 Mbps
 Memo : MT12-4120100-A1

Pol/Phase : HORIZONTAL
 Temperature : 24 °C
 Humidity : 70 %
 Atmospheric Pressure: 1015 hPa

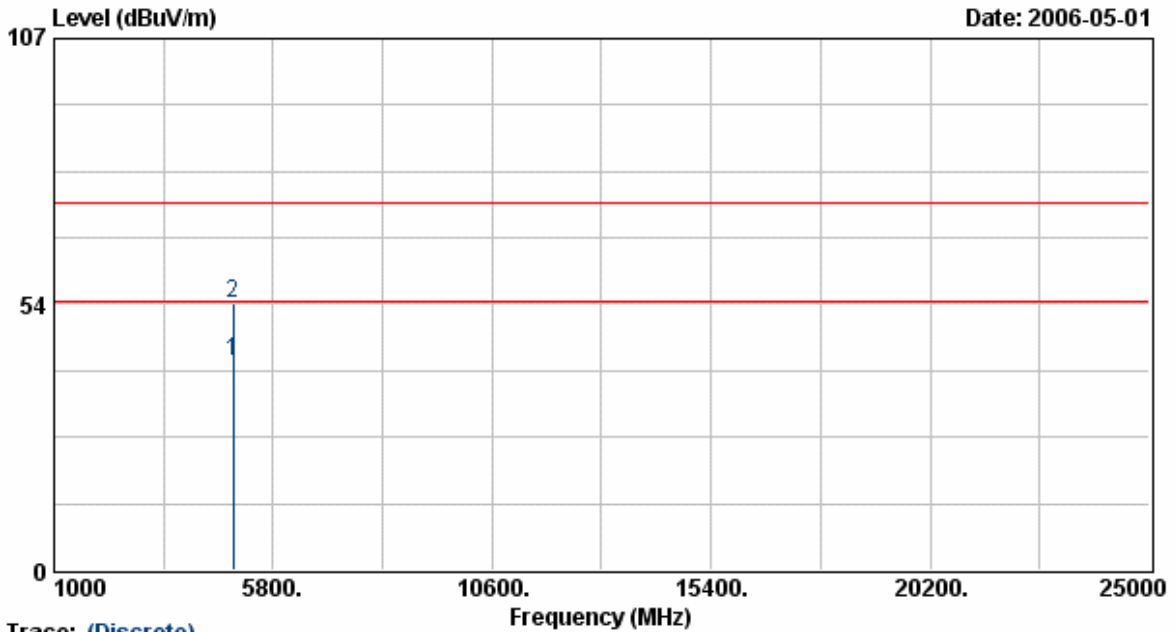


Trace: (Discrete)

Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
4924.00	35.92	5.99	41.91	54.00	-12.09	Average	200	100
4924.00	47.66	5.99	53.65	74.00	-20.35	Peak	200	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

EUT	: SX-200	Pol/Phase	: VERTICAL
Power	: AC 120V	Temperature	: 24 °C
Test Mode	: Transmit/Receive	Humidity	: 70 %
Operation Channel	: 11	Atmospheric Pressure	: 1015 hPa
Modulation Type	: 802.11g		
Rate	: 54 Mbps		
Memo	: MT12-4120100-A1		

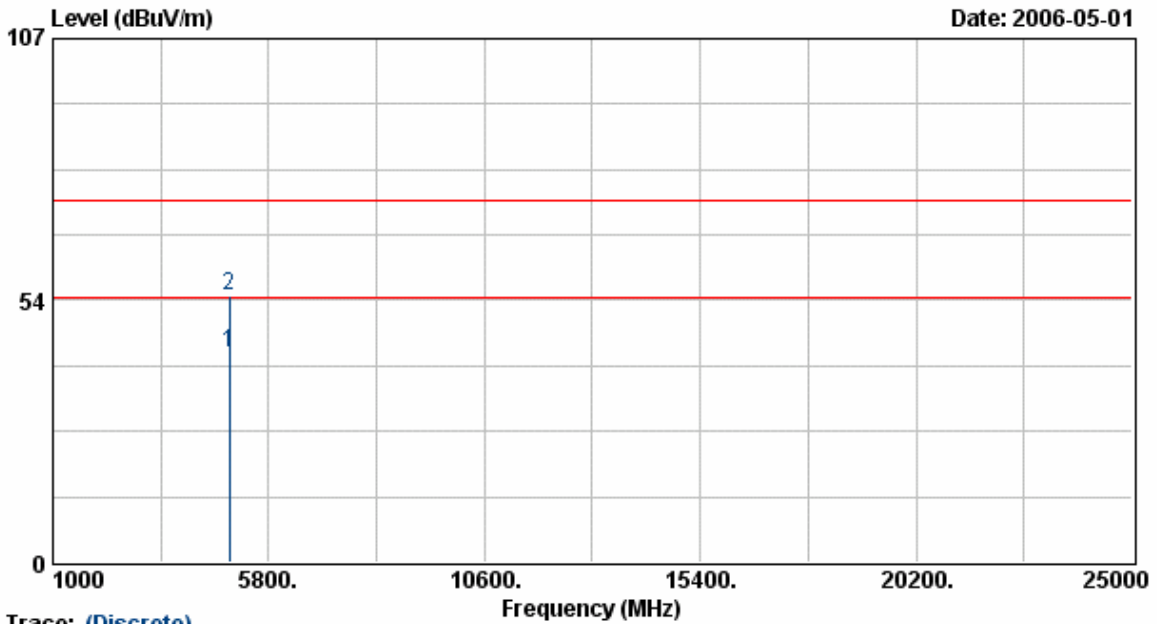

Trace: (Discrete)

Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
4924.00	36.74	5.99	42.73	54.00	-11.27	Average	188	100
4924.00	48.61	5.99	54.60	74.00	-19.40	Peak	188	100

Notes:


1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too low to be measured.

5.6 Test Result and Data of 802.11a

```

EUT          : SX-200
Power        : AC 120V
Test Mode    : Transmit/Receive
Operation Channel: 9
Modulation Type : 802.11a
Rate         : 54 Mbps
Memo         : MT12-4120100-A1

Pol/Phase    : HORIZONTAL
Temperature   : 24 °C
Humidity      : 70 %
Atmospheric Pressure: 1015 hPa
    
```

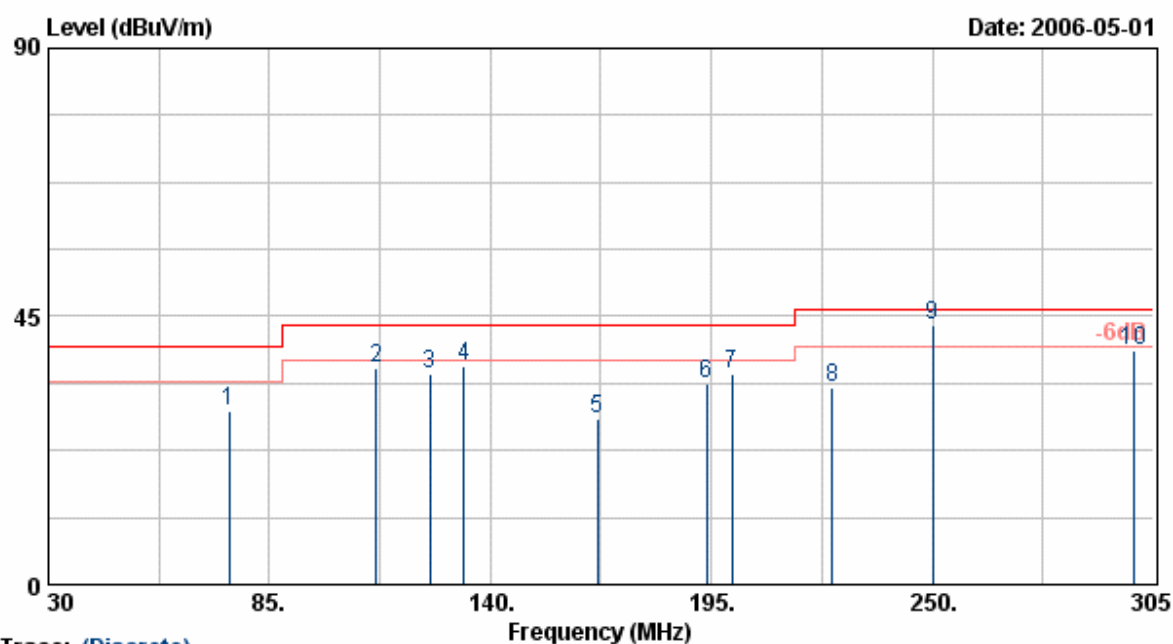


Trace: (Discrete)

Frequency (MHz)	Meter Reading (dBUV)	Corrected Factor (dBUV/m)	Result (dBUV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
75.05	49.54	-20.27	29.27	40.00	-10.73	Peak	85	200
111.64	52.60	-16.33	36.27	43.50	-7.23	Peak	77	200
125.03	50.89	-15.68	35.21	43.50	-8.29	Peak	77	200
133.38	52.46	-15.75	36.71	43.50	-6.79	Peak	169	200
166.70	44.95	-17.14	27.81	43.50	-15.69	Peak	66	200
193.85	51.41	-17.84	33.57	43.50	-9.93	Peak	88	200
200.01	53.50	-18.01	35.49	43.50	-8.01	Peak	100	200
225.00	50.09	-17.07	33.02	46.00	-12.98	Peak	330	200
250.06	57.60	-14.02	43.58	46.00	-2.42	QP	312	200
300.00	52.33	-13.21	39.12	46.00	-6.88	Peak	312	200

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a mode at channel 9,11,13 are almost the same below 1GHz, so that the channel 9 was chosen as representative in final test.
5. The data is worse case.

EUT : SX-200
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 9
 Modulation Type : 802.11a
 Rate : 54 Mbps
 Memo : MT12-4120100-A1
 Pol/Phase : HORIZONTAL
 Temperature : 24 °C
 Humidity : 70 %
 Atmospheric Pressure: 1015 hPa

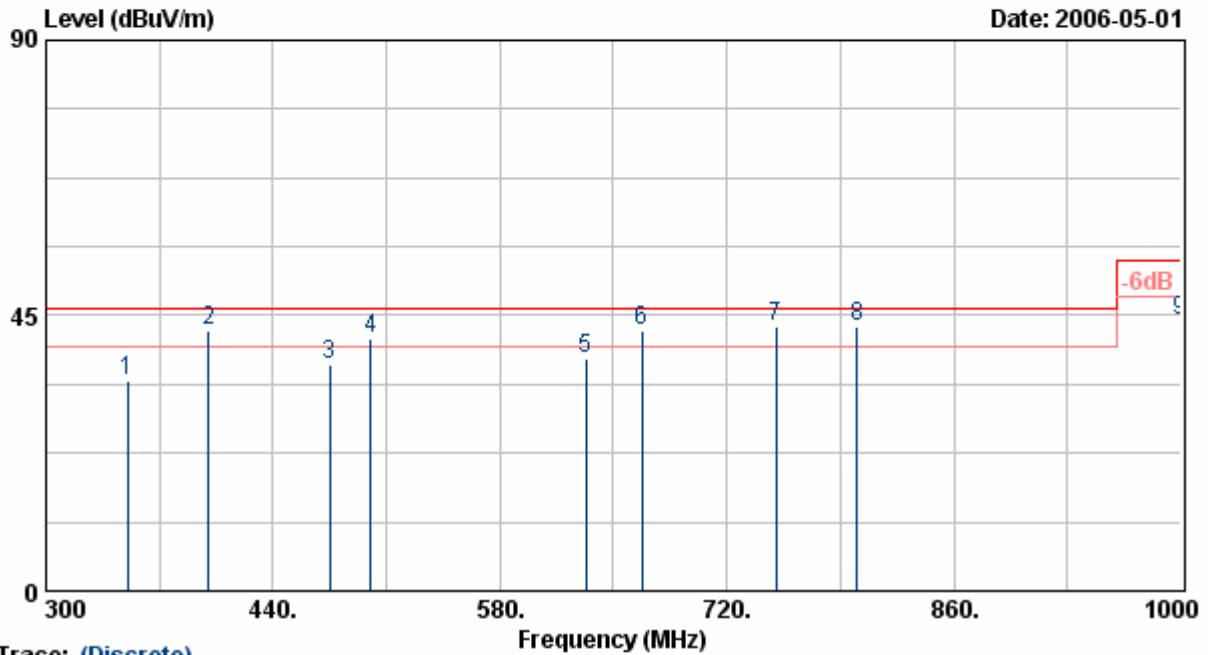

Trace: (Discrete)


Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
350.40	45.99	-11.54	34.45	46.00	-11.55	Peak	254	200
400.06	52.68	-10.12	42.56	46.00	-3.44	QP	32	200
475.06	44.36	-7.41	36.95	46.00	-9.05	Peak	0	200
500.06	47.89	-6.58	41.31	46.00	-4.69	QP	45	200
633.26	41.46	-3.36	38.10	46.00	-7.90	Peak	0	200
667.75	45.44	-3.03	42.41	46.00	-3.59	QP	0	200
750.09	44.70	-1.44	43.26	46.00	-2.74	QP	156	200
800.09	44.63	-1.53	43.10	46.00	-2.90	QP	156	200
999.98	43.29	0.96	44.25	54.00	-9.75	Peak	351	200

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a mode at channel 9,11,13 are almost the same below 1GHz, so that the channel 9 was chosen as representative in final test.
5. The data is worse case.

EUT : SX-200
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel : 9
 Modulation Type : 802.11a
 Rate : 54 Mbps
 Memo : MT12-4120100-A1

Pol/Phase : VERTICAL
 Temperature : 24 °C
 Humidity : 70 %
 Atmospheric Pressure : 1015 hPa

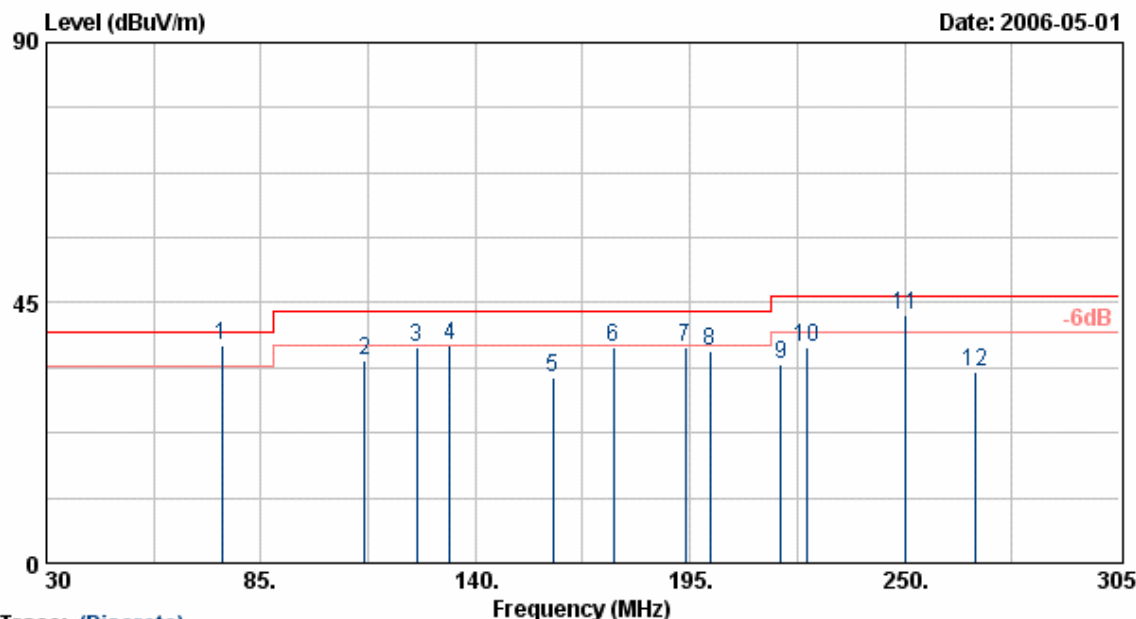


Frequency (MHz)	Meter Reading (dBuV)	Corrected Factor (dBuV/m)	Result (dBuV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
75.04	57.85	-20.28	37.57	40.00	-2.43	QP	93	100
111.64	51.47	-16.33	35.14	43.50	-8.36	Peak	211	100
125.05	52.89	-15.68	37.21	43.50	-6.29	Peak	211	100
133.35	53.33	-15.75	37.58	43.50	-5.92	QP	0	100
159.80	48.70	-16.60	32.10	43.50	-11.40	Peak	144	100
175.30	55.14	-17.82	37.32	43.50	-6.18	Peak	323	100
193.80	55.29	-17.84	37.45	43.50	-6.05	Peak	323	100
200.03	54.80	-18.01	36.79	43.50	-6.71	Peak	300	100
218.25	52.29	-17.77	34.52	46.00	-11.48	Peak	35	100
225.00	54.45	-17.07	37.38	46.00	-8.62	Peak	35	100
250.04	56.74	-14.02	42.72	46.00	-3.28	QP	0	100
268.34	46.68	-13.52	33.16	46.00	-12.84	Peak	0	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a mode at channel 9,11,13 are almost the same below 1GHz, so that the channel 9 was chosen as representative in final test.
5. The data is worse case.

EUT : SX-200
 Power : AC 120V
 Test Mode : Transmit/Receive
 Operation Channel: 9
 Modulation Type : 802.11a
 Rate : 54 Mbps
 Memo : MT12-4120100-A1
 Pol/Phase : VERTICAL
 Temperature : 24 °C
 Humidity : 70 %
 Atmospheric Pressure: 1015 hPa

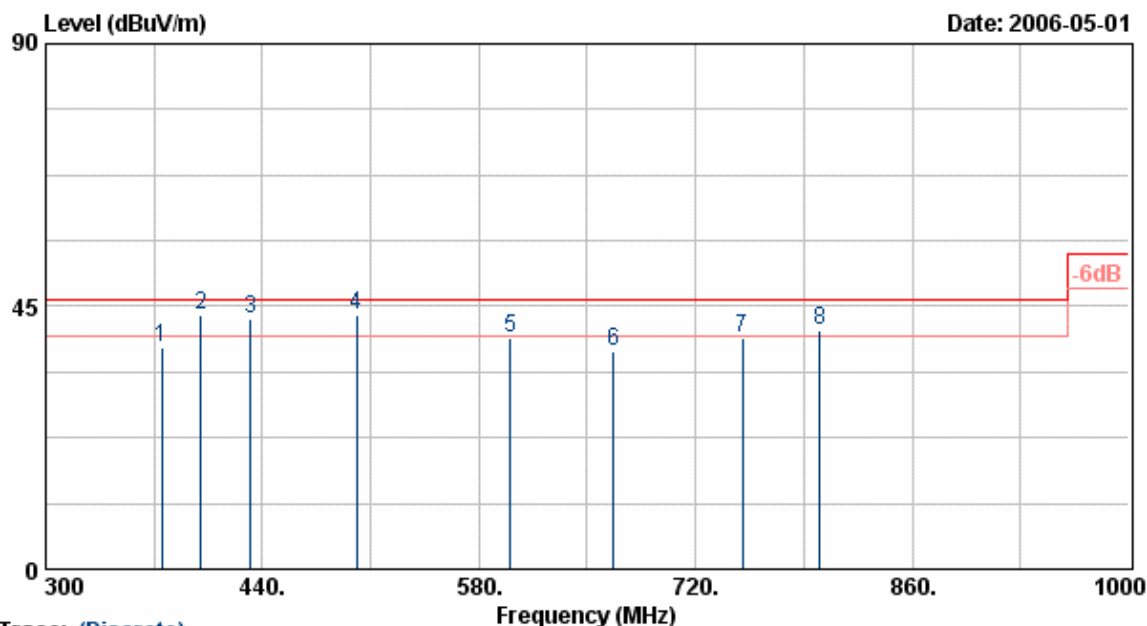

Trace: (Discrete)

Frequency (MHz)	Meter Reading (dBUV)	Corrected Factor (dBUV/m)	Result (dBUV/m)	Limit (dB)	Margin (dB)	Remark	Table Deg.	Ant High (cm)
375.03	48.80	-10.75	38.05	46.00	-7.95	Peak	166	100
400.05	53.65	-10.12	43.53	46.00	-2.47	QP	166	100
432.30	51.77	-8.86	42.91	46.00	-3.09	QP	223	100
500.65	49.96	-6.54	43.42	46.00	-2.58	QP	223	100
600.04	43.31	-3.79	39.52	46.00	-6.48	Peak	131	100
666.75	40.22	-3.01	37.21	46.00	-8.79	Peak	131	100
750.00	40.95	-1.44	39.52	46.00	-6.49	Peak	0	100
800.10	42.49	-1.53	40.96	46.00	-5.04	QP	0	100

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120KHz and video bandwidth is 300kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. According to technical experiences, all spurious emission of 802.11a mode at channel 9, 11, 13 are almost the same below 1GHz, so that the channel 9 was chosen as representative in final test.
5. The data is worse case.

Emission frequencies 1~40 GHz

Test Mode: Normal, Channel 09, Transmit Rate: 54Mbps

Test Date: May. 01, 2006 Temperature: 24 Humidity: 70% Atmospheric pressure: 1015 hPa

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Remark	Table Deg.	Ant High (m)
11490.00	H	---	16.85	---	54.0	---	Ave	---	---
17235.00	H	---	22.41	---	54.0	---	Ave	---	---
22980.00	H	---	31.49	---	54.0	---	Ave	---	---
28725.00	H	---	33.65	---	68.3	---	Peak	---	---
11490.00	V	---	16.54	---	54.0	---	Ave	---	---
17235.00	V	---	21.99	---	54.0	---	Ave	---	---
22980.00	V	---	31.49	---	54.0	---	Ave	---	---
28725.00	V	---	33.65	---	68.3	---	Peak	---	---

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120 kHz and video bandwidth is 300 kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.

Emission frequencies 1~40 GHz

Test Mode: Normal, Channel 11, Transmit Rate: 54Mbps

Test Date: May. 01, 2006 Temperature: 24 Humidity: 70% Atmospheric pressure: 1015 hPa

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Remark	Table Deg.	Ant High (m)
11570.00	H	---	16.72	---	54.0	---	Ave	---	---
17355.00	H	---	23.04	---	68.3	---	Peak	---	---
23140.00	H	---	31.62	---	54.0	---	Ave	---	---
28925.00	H	---	33.61	---	68.3	---	Peak	---	---
11570.00	V	---	16.49	---	54.0	---	Ave	---	---
17355.00	V	---	22.77	---	68.3	---	Peak	---	---
23140.00	V	---	31.62	---	54.0	---	Ave	---	---
28925.00	V	---	33.61	---	68.3	---	Peak	---	---

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120 kHz and video bandwidth is 300 kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured.

Emission frequencies 1~40 GHz

Test Mode: Normal, Channel 13, Transmit Rate: 9Mbps

Test Date: May. 01, 2006 Temperature: 24 Humidity: 70% Atmospheric pressure: 1015 hPa

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result@3m (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)	Remark	Table Deg.	Ant High (m)
11650.00	H	---	16.56	---	54.0	---	Ave	---	---
17435.00	H	---	23.45	---	68.3	---	Peak	---	---
23300.00	H	---	31.83	---	54.0	---	Ave	---	---
29125.00	H	---	33.66	---	68.3	---	Peak	---	---
11650.00	V	---	16.41	---	54.0	---	Ave	---	---
17435.00	V	---	23.54	---	68.3	---	Peak	---	---
23300.00	V	---	31.83	---	54.0	---	Ave	---	---
29125.00	V	---	33.66	---	68.3	---	Peak	---	---

Notes:

1. Result = Meter Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 120 kHz and video bandwidth is 300 kHz for Peak detection and Quasi-peak detection at frequency below 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.
6. The other emissions is too below to be measured

5.7 Test Photographs

Front View



Rear View



6. 6dB Bandwidth Measurement Data


6.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

6.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

6.3 Test Setup Layout



6.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Valid Date.
Spectrum Analyzer	FSP40	R&S	100047	2007/01/16

6.5 Test Result and Data of 802.11b/g

- (1) Modulation Standard: IEEE 802.11b (11Mbps)

Test Date: Apr. 28, 2006 Temperature: 25 Humidity: 68% Atmospheric pressure: 1015 hPa

Channel	Frequency (MHz)	6dB Bandwidth (MHz)
01	2412	11.6
06	2437	11.6
11	2462	11.5

- (2) Modulation Standard: IEEE 802.11g (54Mbps)

Test Date: Apr. 28, 2006 Temperature: 25 Humidity: 68% Atmospheric pressure: 1015 hPa

Channel	Frequency (MHz)	6dB Bandwidth (MHz)
01	2412	16.4
06	2437	16.4
11	2462	16.4

6.6 Test Result and Data of 802.11a


(1) Modulation Standard: IEEE 802.11a (54Mbps)

Test Date: Apr. 29, 2006 Temperature: 25 Humidity: 68% Atmospheric pressure: 1014 hPa

Channel	Frequency (MHz)	6dB Bandwidth (MHz)
9	5745	16.4
11	5785	16.5
13	5825	16.5


Modulation Standard: 802.11b (11Mbps)

Channel: 01

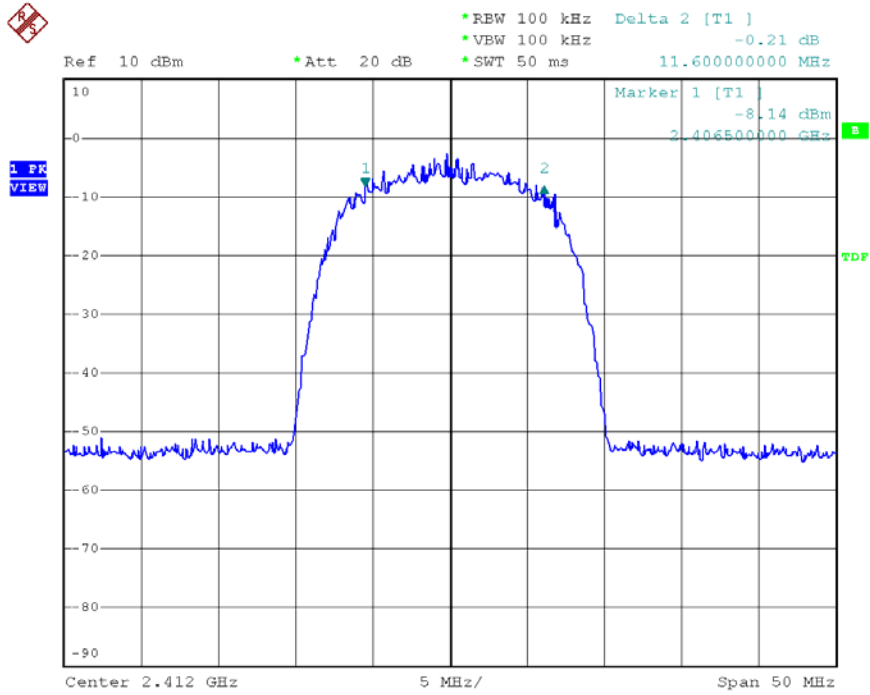


Date: 28.APR.2006 15:25:25

Channel:06

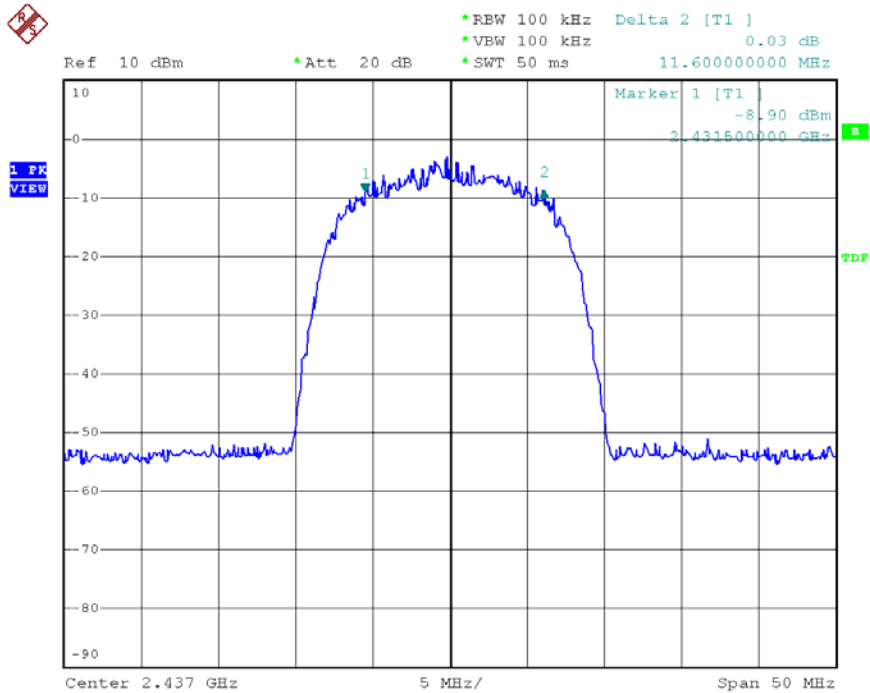


Date: 28.APR.2006 15:28:59

Channel: 11

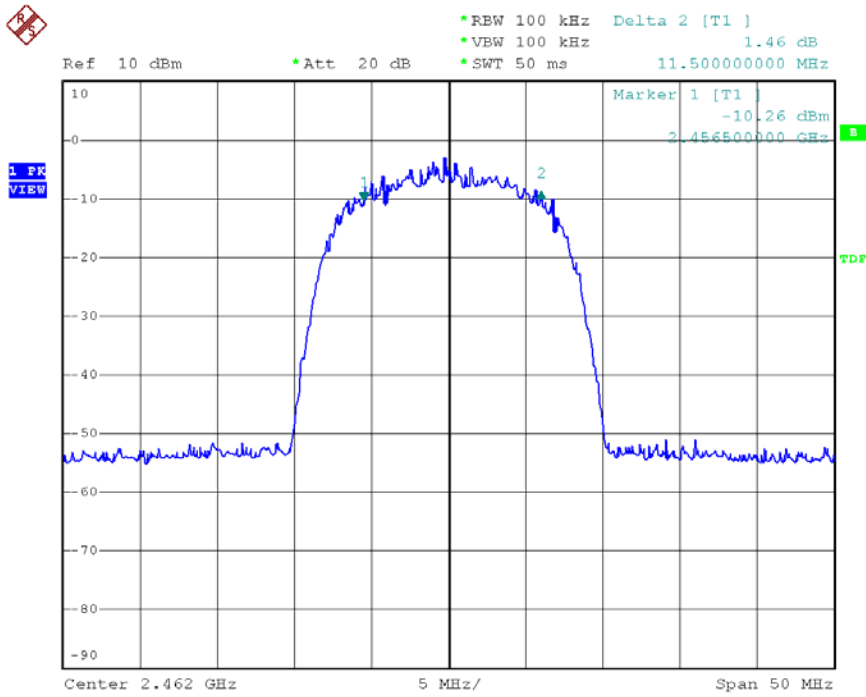


Date: 28.APR.2006 15:32:22

Modulation Standard:802.11g (54Mbps)
Channel:01

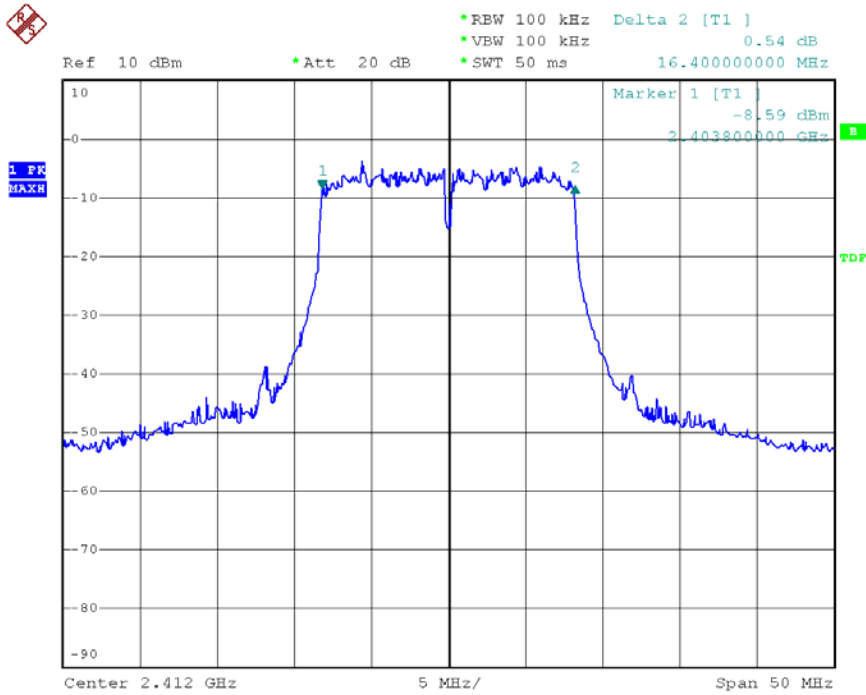


Date: 28.APR.2006 15:46:49

Channel: 06

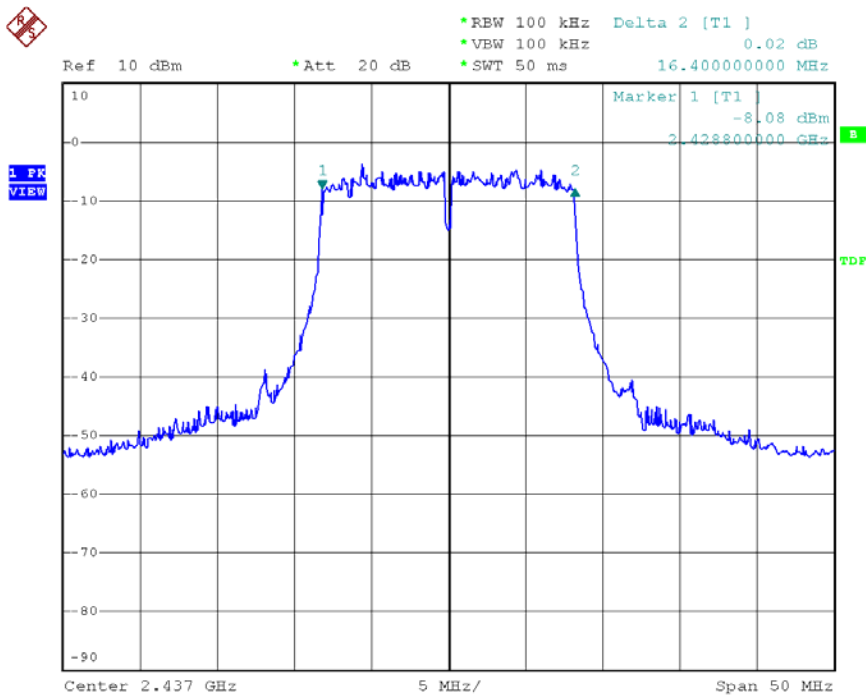

Date: 28.APR.2006 15:39:04


Channel:11

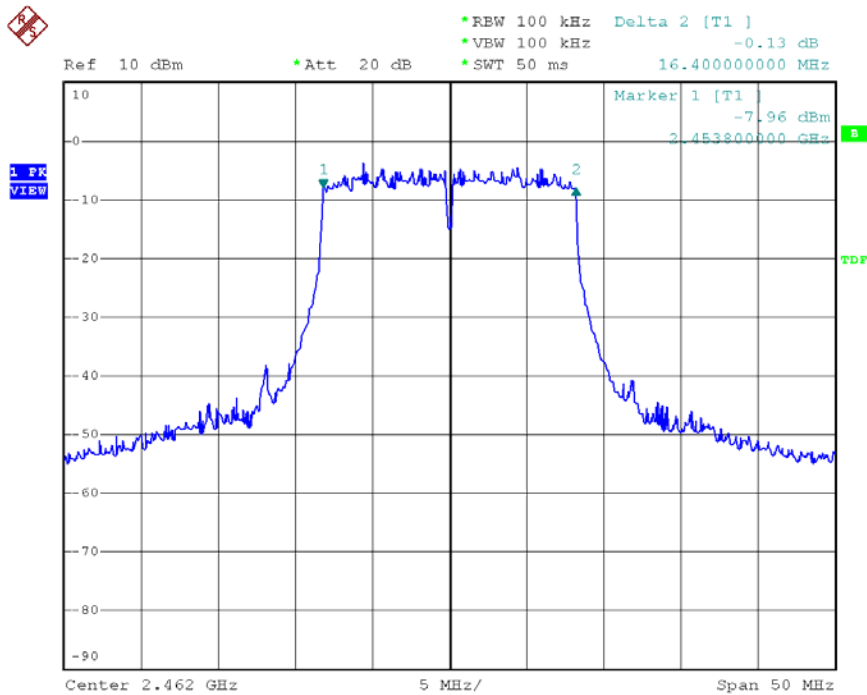

Date: 28.APR.2006 15:36:51


Modulation Standard: 802.11a (54Mbps)

Channel: 09

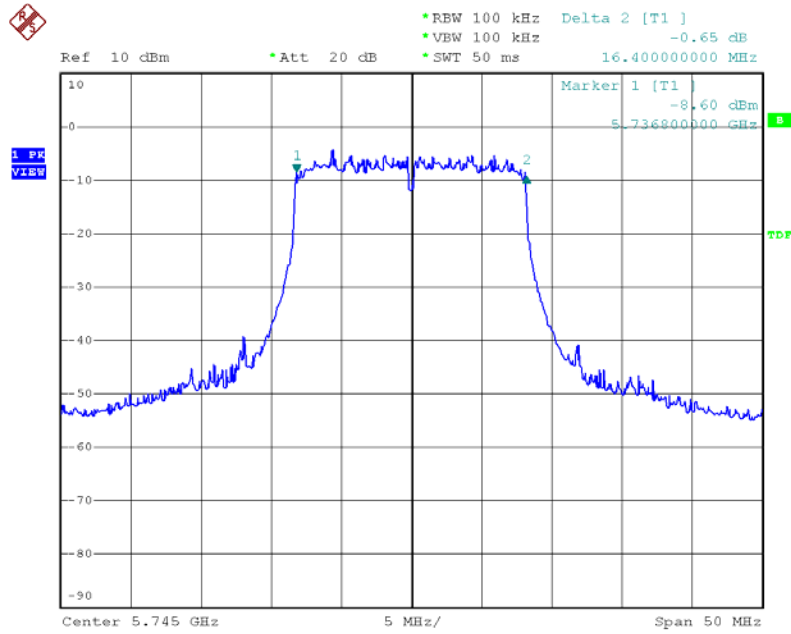


Date: 1.MAY.2006 11:09:19

Channel:11

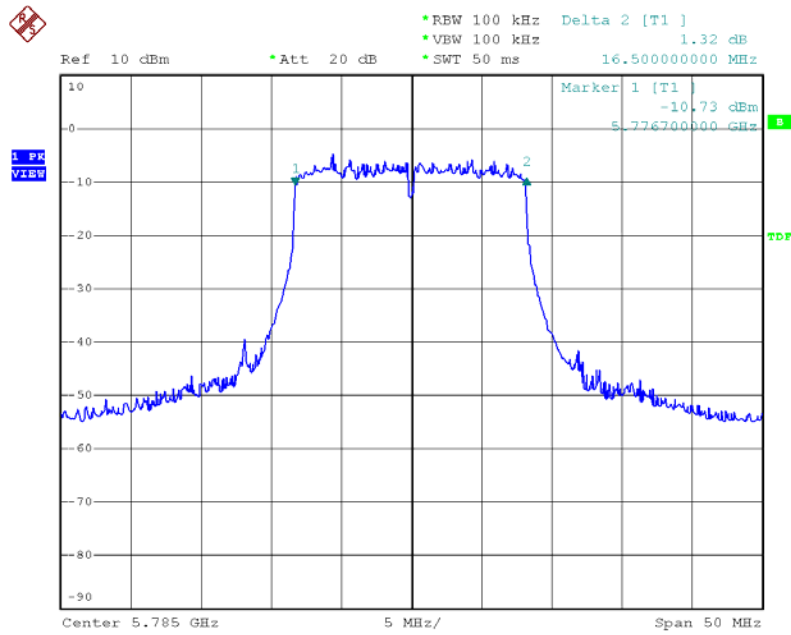

Date: 1.MAY.2006 11:10:34

Channel: 13

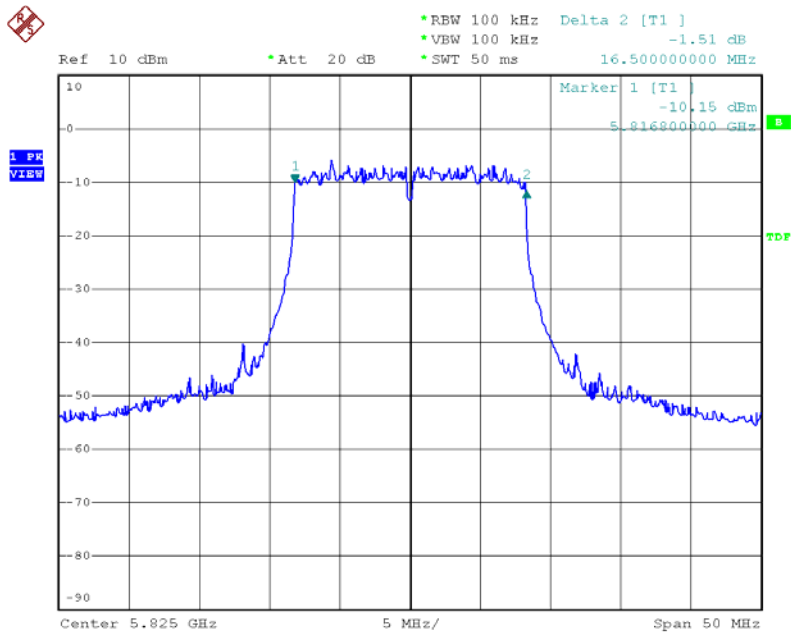

Date: 1.MAY.2006 11:06:48

7. Maximum Peak Output Power


7.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

7.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

7.3 Test Setup Layout



7.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Valid Date.
Spectrum Analyzer	FSP40	R&S	100047	2007/01/16

7.5 Test Result and Data of 802.11b/g

(1) Modulation Standard: IEEE 802.11b (11Mbps)

Test Date: Apr. 28, 2006 Temperature: 25 Humidity: 68% Atmospheric pressure: 1015 hPa

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
01	2412	12.64	18.4
06	2437	12.66	18.5
11	2462	12.59	18.2

(2) Modulation Standard: IEEE 802.11g (54Mbps)

Test Date: Apr. 28, 2006 Temperature: 25 Humidity: 68% Atmospheric pressure: 1015 hPa

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
01	2412	16.55	45.2
06	2437	16.53	45.0
11	2462	16.49	44.6


7.6 Test Result and Data of 802.11a

(1) Modulation Standard: IEEE 802.11a (54Mbps)

Test Date: Apr. 29, 2006 Temperature: 25 Humidity: 68% Atmospheric pressure: 1014 hPa


Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
9	5745	15.90	38.9
11	5785	15.23	33.3
13	5825	14.59	28.8

Modulation Standard: 802.11b (11Mbps)
 Channel: 01

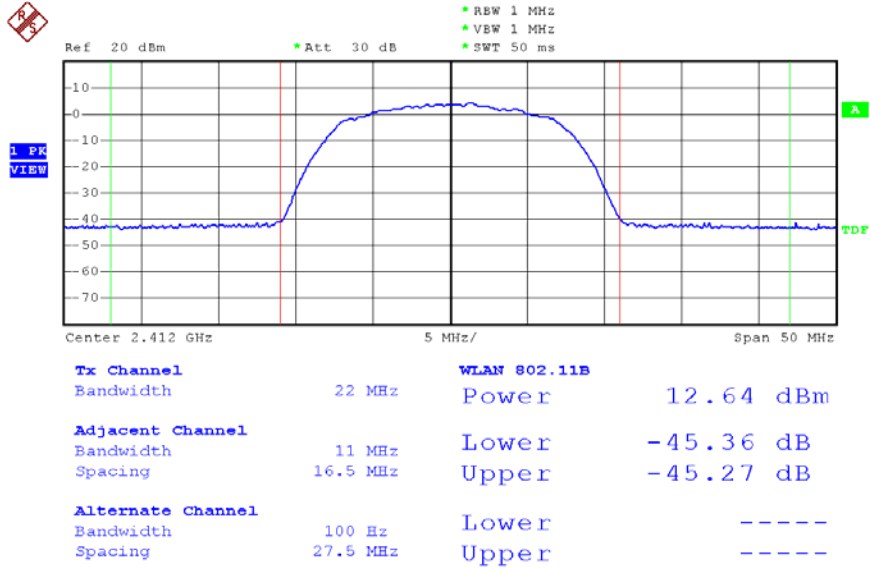


Date: 28.APR.2006 15:07:23

Channel:06

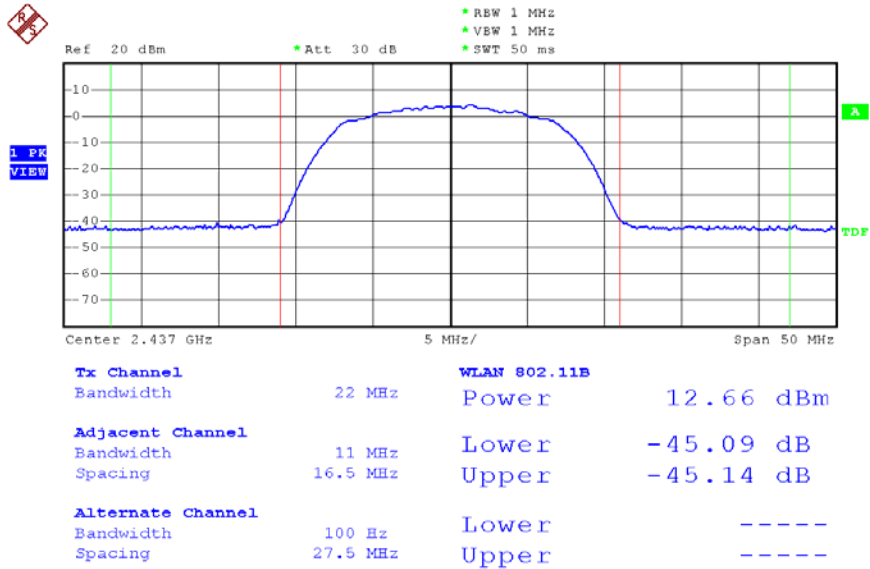


Date: 28.APR.2006 15:09:05

Channel: 11

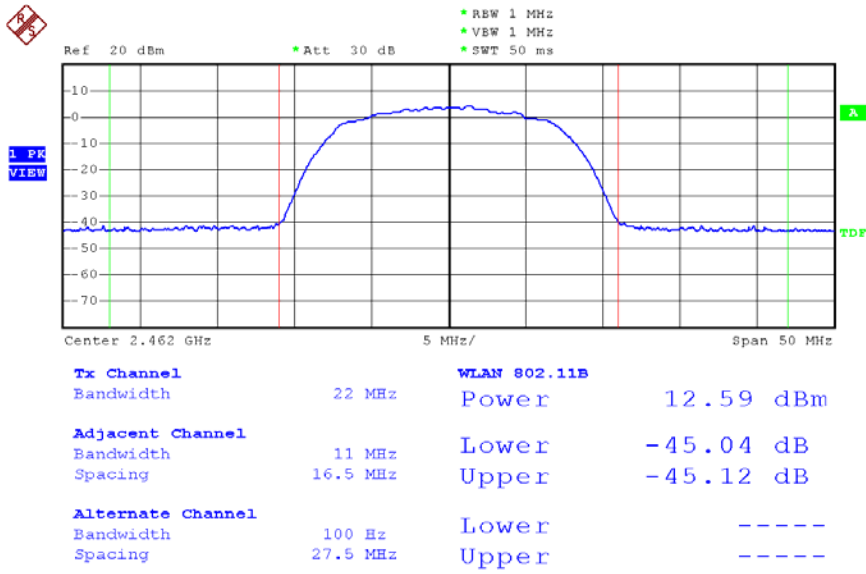


Date: 28.APR.2006 15:11:15

Modulation Standard:802.11g (54Mbps)
Channel:01

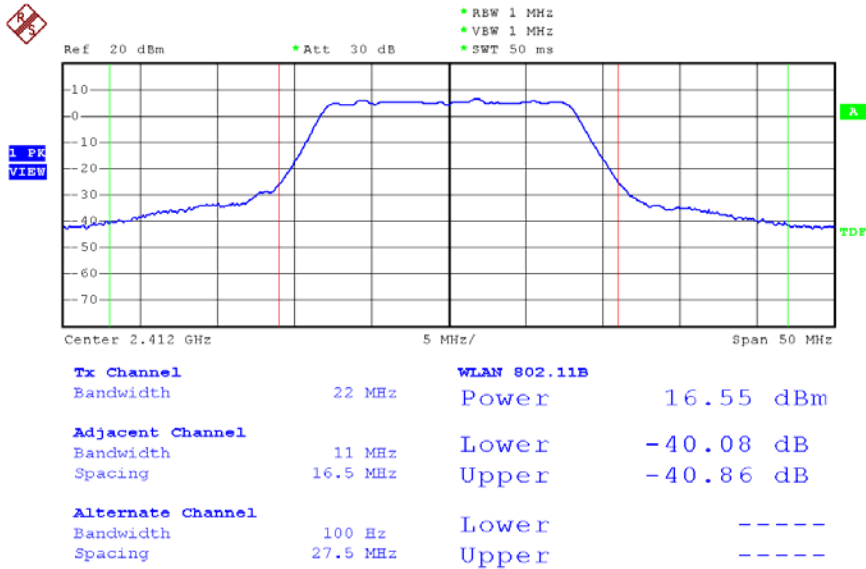


Date: 28.APR.2006 15:15:57

Channel: 06

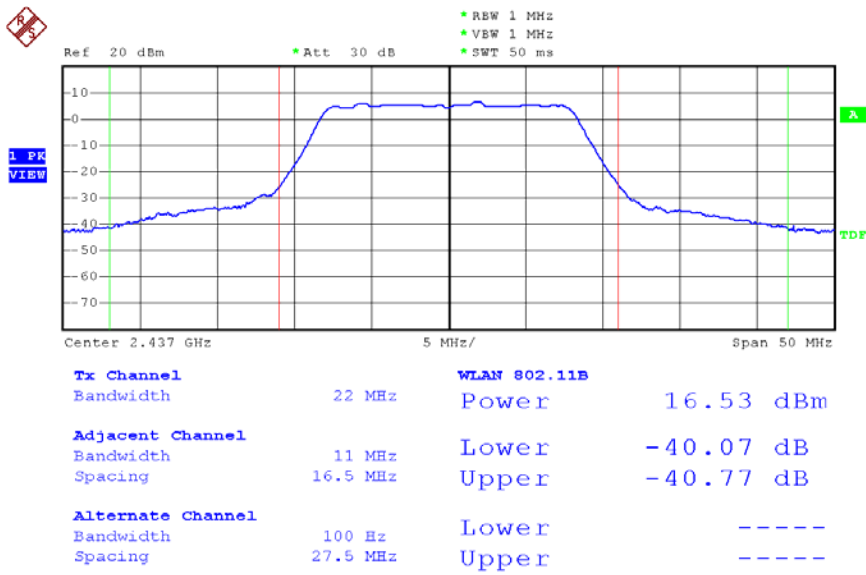

Date: 28.APR.2006 15:14:48


Channel:11

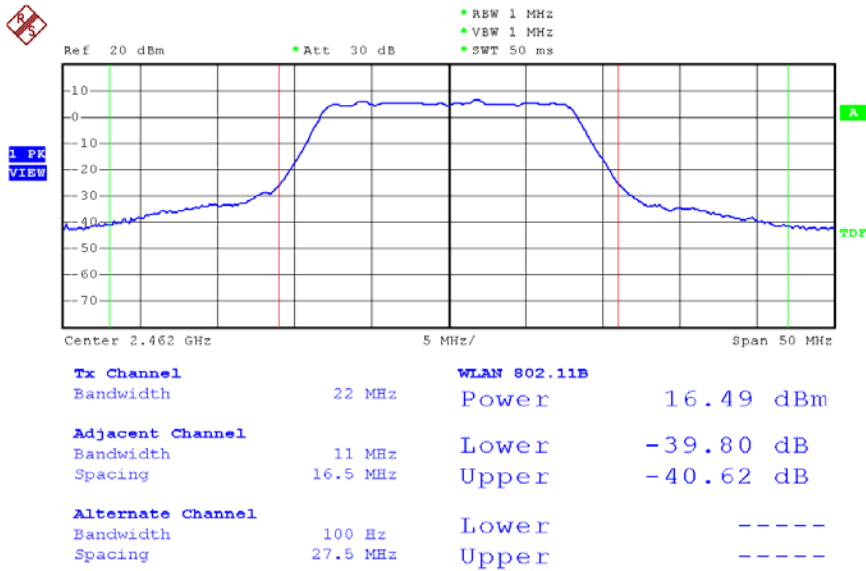

Date: 28.APR.2006 15:13:38


Modulation Standard: 802.11a (54Mbps)

Channel: 09

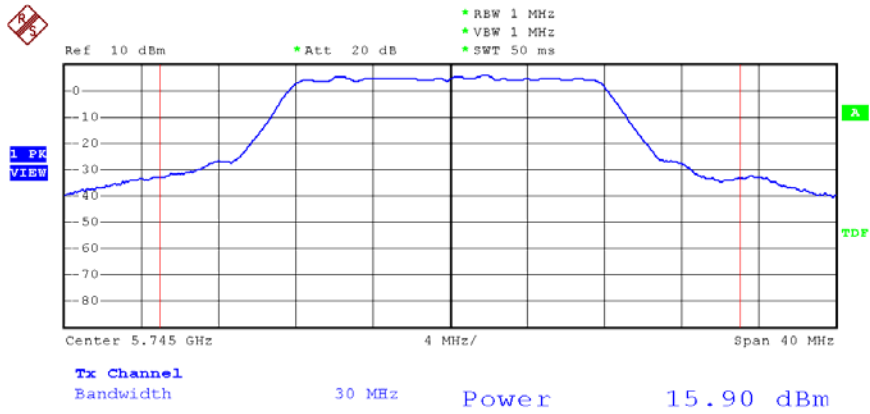


Date: 1.MAY.2006 11:01:50

Channel:11

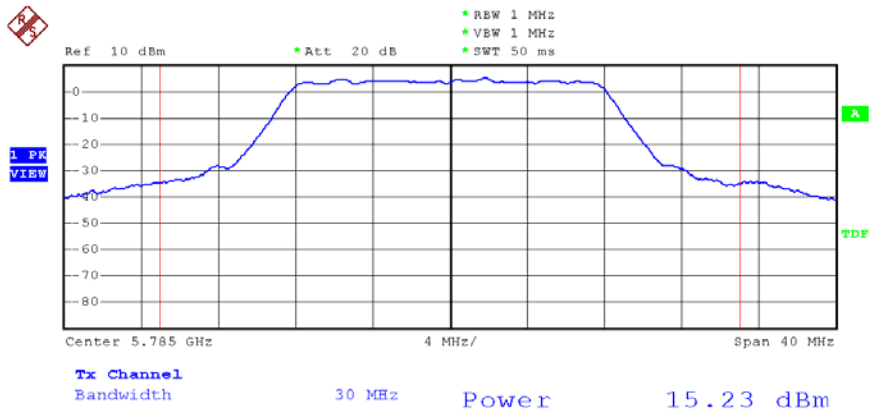

Date: 1.MAY.2006 11:02:37

Channel: 13

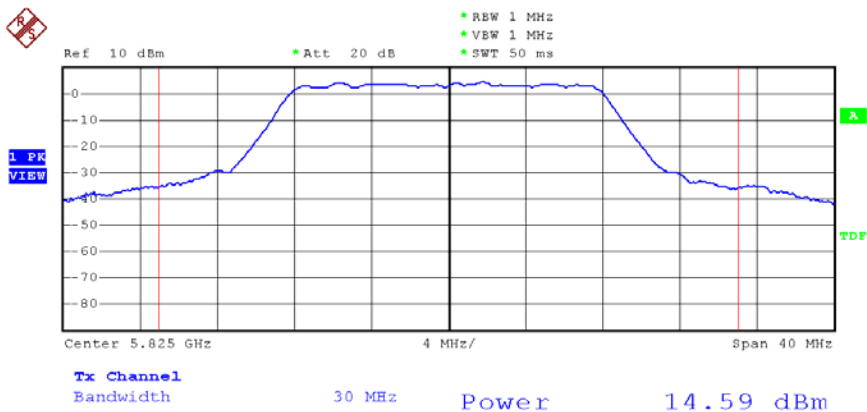

Date: 1.MAY.2006 11:03:34

8. Band Edges Measurement


8.1 Test Limit

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

8.2 Test Procedure :

- a. The transmitter output was connected to the spectrum analyzer via a low lose cable.
- b. Set both RBW and VBW of spectrum analyzer to 100 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. The band edges was measured and recorded.

8.3 Test Setup Layout



8.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Valid Date.
Spectrum Analyzer	FSP40	R&S	100047	2007/01/16

8.5 Test Result and Data of 802.11b/g

(1) Modulation Standard: IEEE 802.11b (11Mbps)

Test Date: Apr. 28, 2006 Temperature: 25 Humidity: 68% Atmospheric pressure: 1015 hPa

Channel	Frequency	maximum value in frequency (MHz)	maximum value is (dBm)
01	2412	2396.2	-51.40
11	2462	2568.1	-52.69

(2) Modulation Standard: IEEE 802.11g (54Mbps)

Test Date: Apr. 28, 2006 Temperature: 25 Humidity: 68% Atmospheric pressure: 1015 hPa

Channel	Frequency	maximum value in frequency (MHz)	maximum value is (dBm)
01	2412	2399.8	-42.44
11	2462	2497.8	-50.86

8.6 Test Result and Data of 802.11a


(1) Modulation Standard: IEEE 802.11a (54Mbps)

Test Date: Apr. 29, 2006 Temperature: 25 Humidity: 68% Atmospheric pressure: 1014 hPa


Channel	Frequency	maximum value in frequency (MHz)	maximum value is (dBm)
9	5745	40000.00	-45.28
13	5825	40000.00	-44.87

Modulation Standard: 802.11b (11Mbps)

Channel: 01

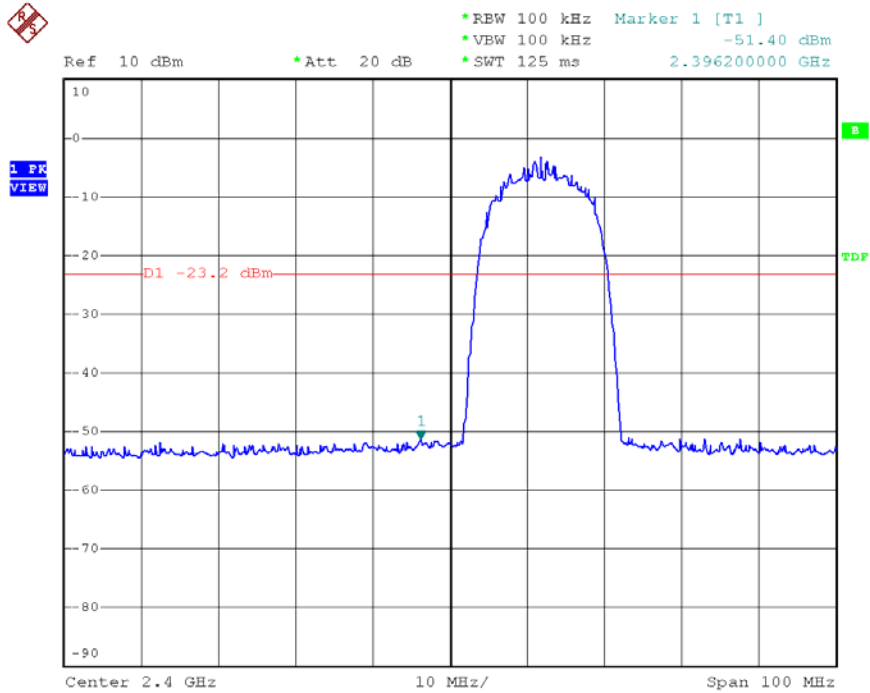


Date: 28.APR.2006 16:24:58

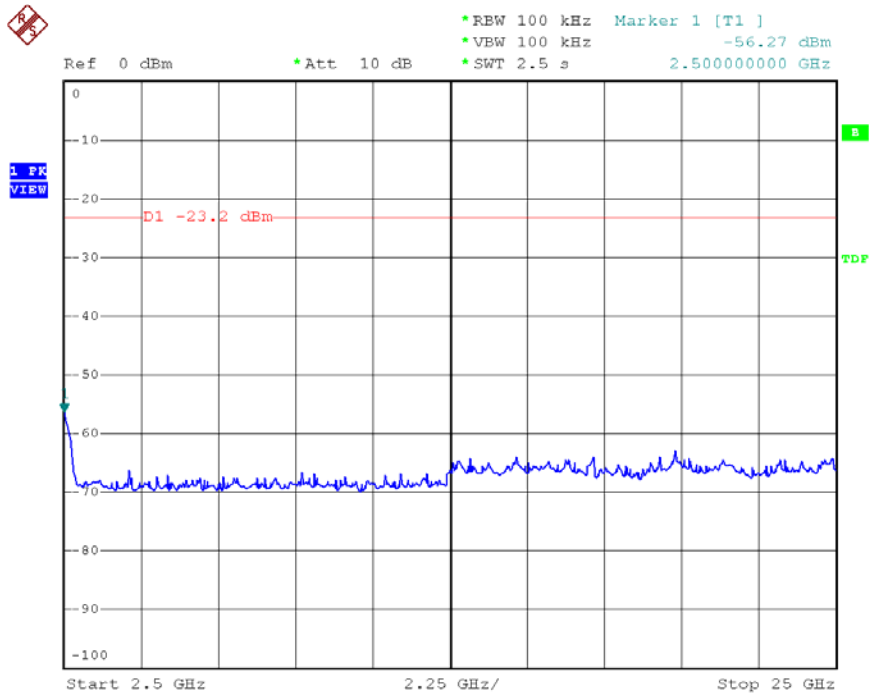


Date: 28.APR.2006 16:26:40

Channel: 11

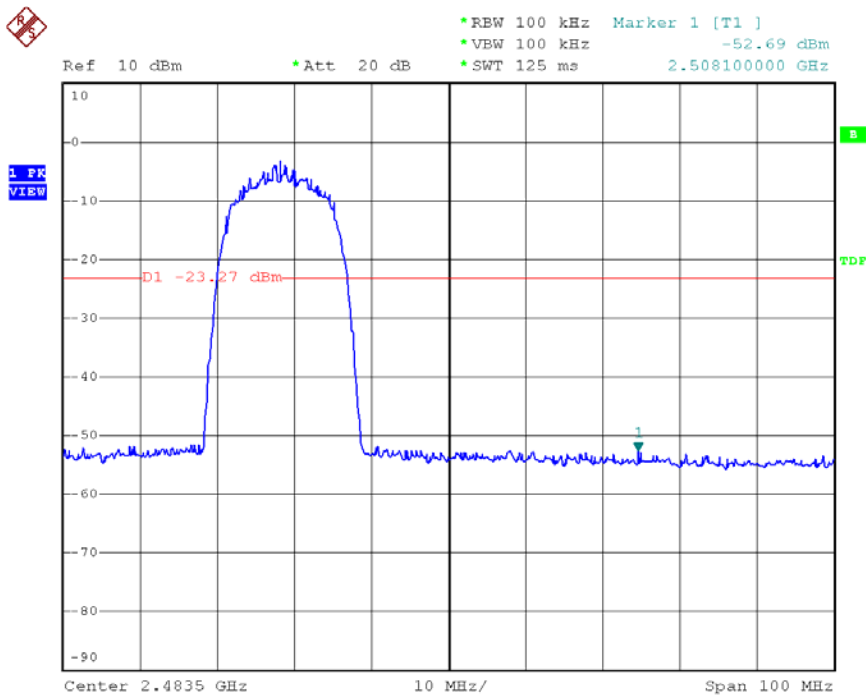


Date: 28.APR.2006 16:33:43

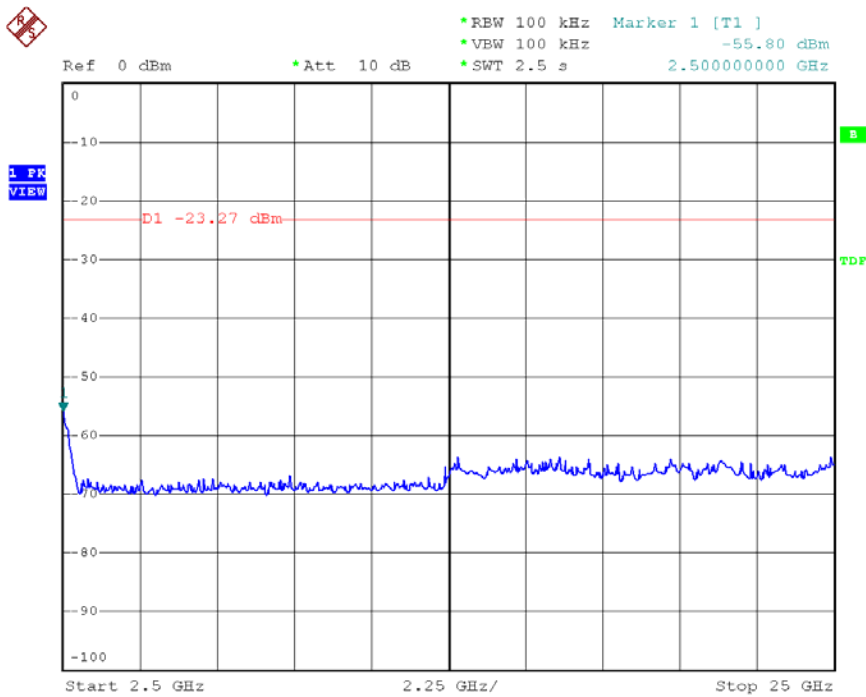


Date: 28.APR.2006 16:31:21

Modulation Standard: 802.11g (54Mbps)

Channel: 01

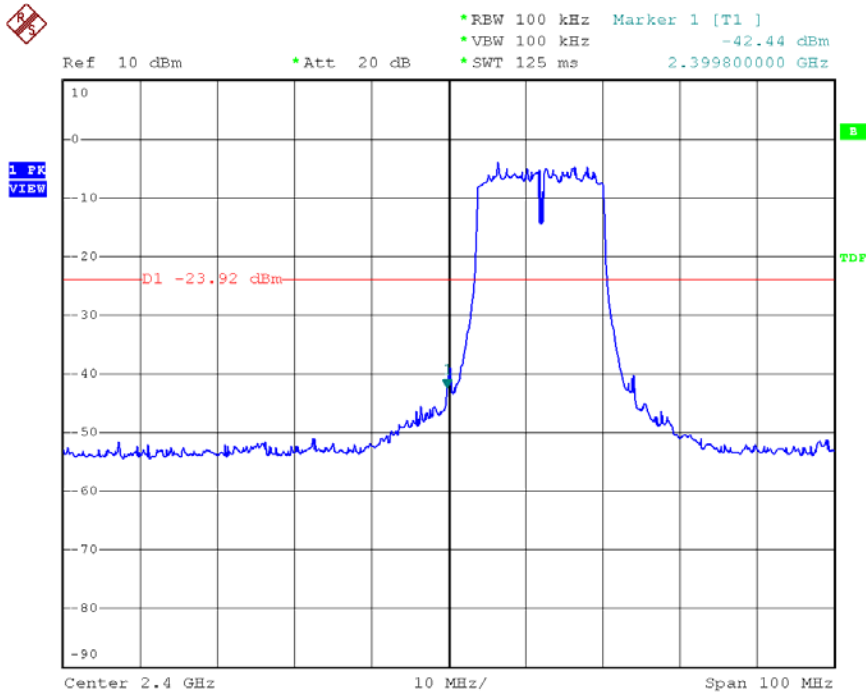


Date: 28.APR.2006 16:00:45

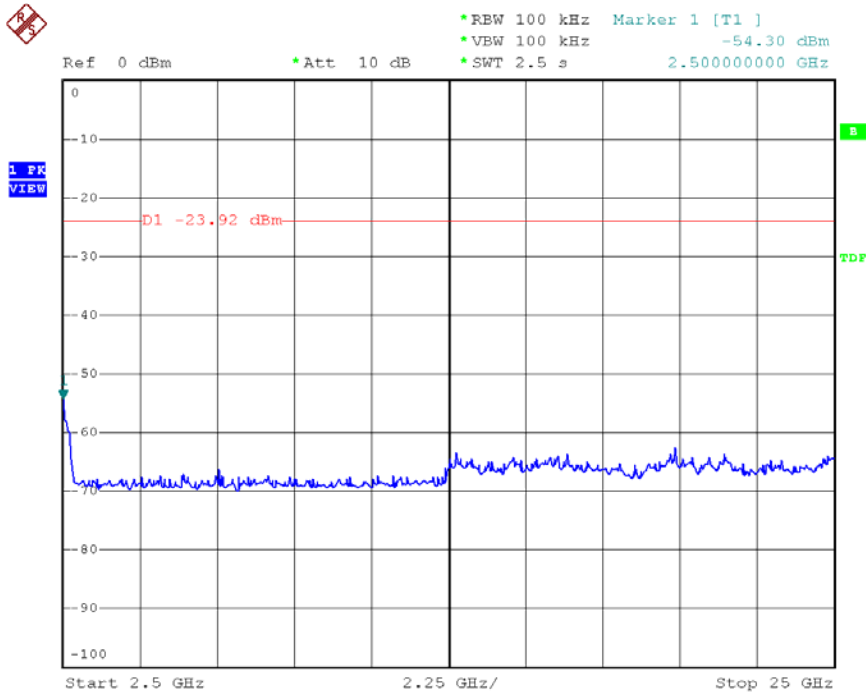


Date: 28.APR.2006 16:02:38

Channel: 11

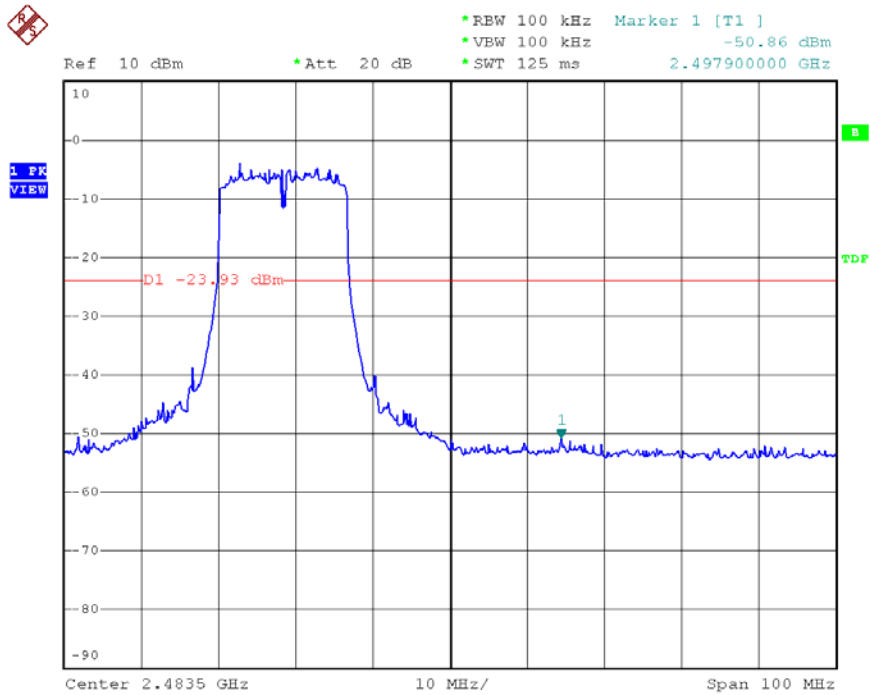


Date: 28.APR.2006 16:05:40

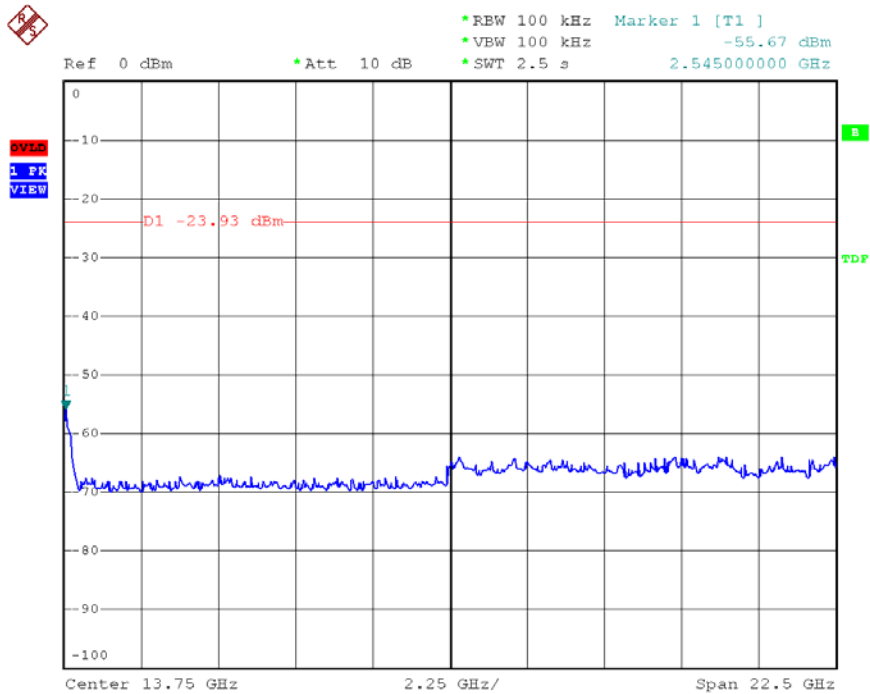


Date: 28.APR.2006 16:07:02

Modulation Standard: 802.11a (54Mbps)

Channel: 09

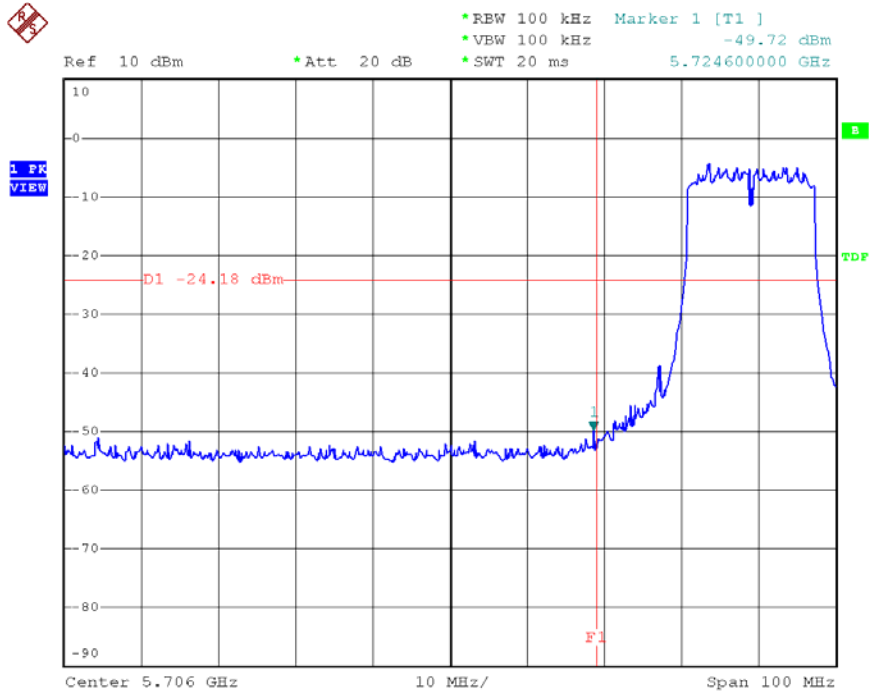


Date: 1.MAY.2006 11:33:30

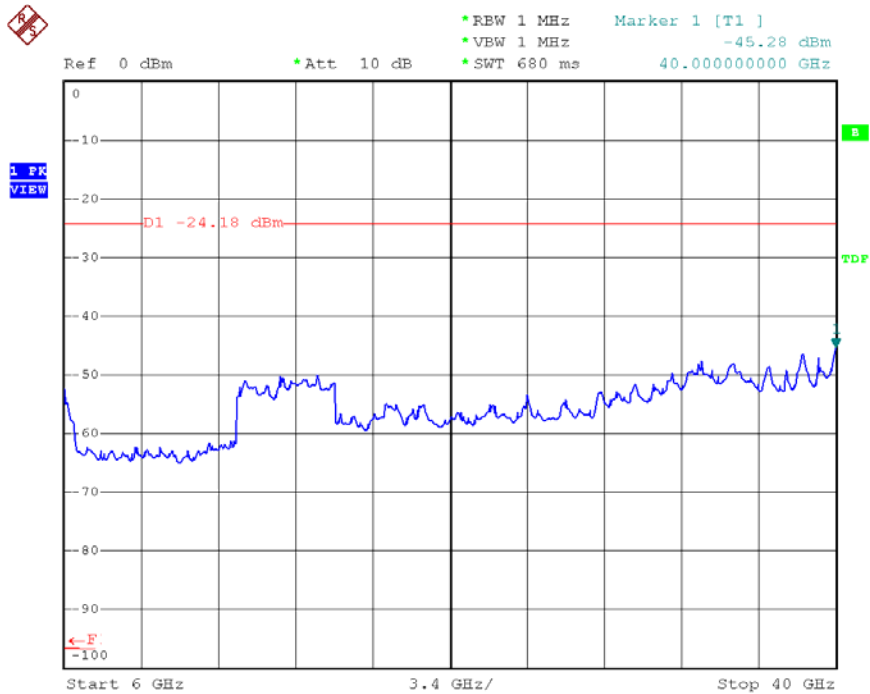


Date: 1.MAY.2006 11:35:52

Channel: 13

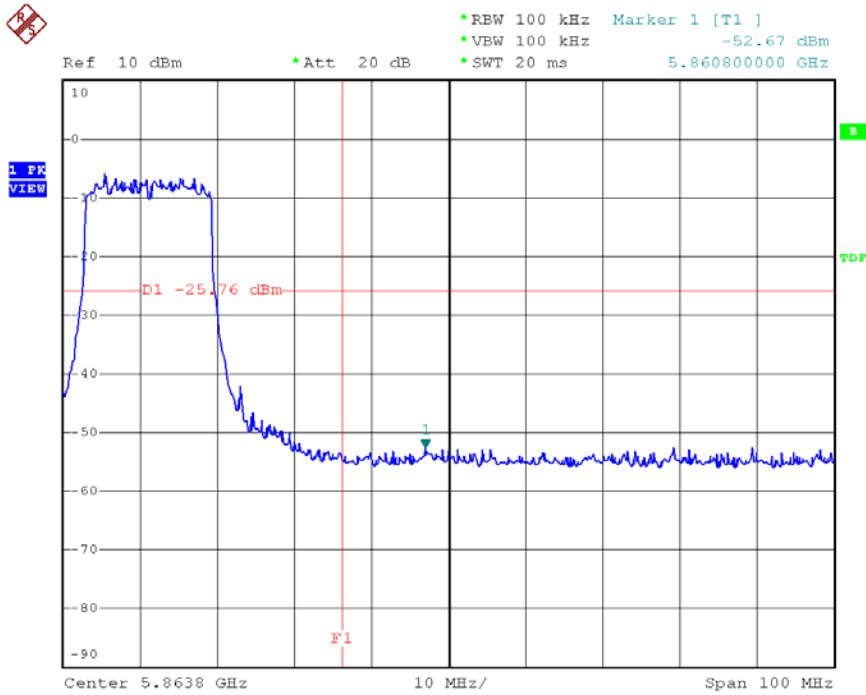

Date: 1.MAY.2006 11:38:20

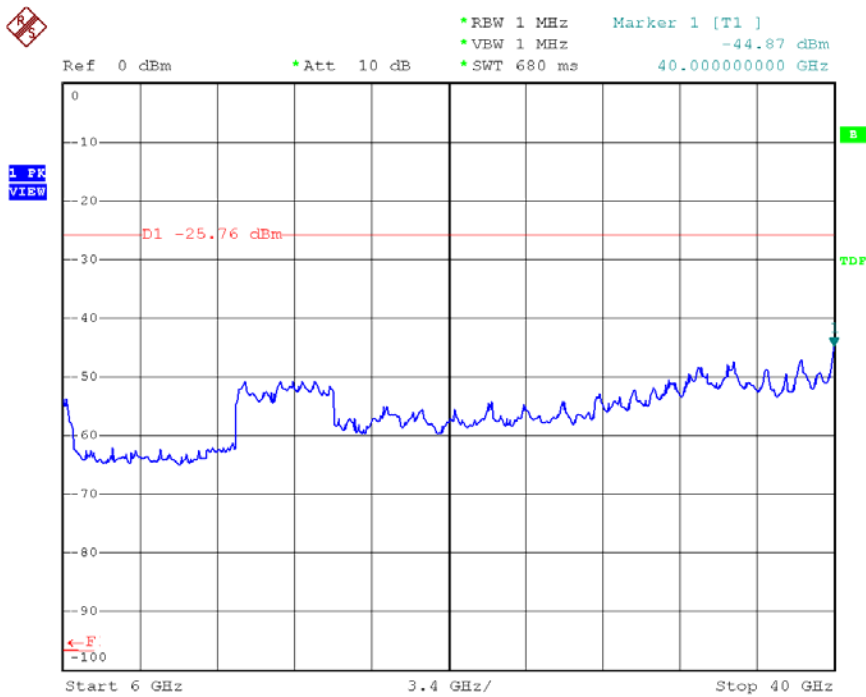

Date: 1.MAY.2006 11:39:33

8.7 Restrict band emission Measurement Data

Modulation Standard: IEEE 802.11b (11Mbps)

Test Date: May. 01, 2006 Temperature: 24 Humidity: 70% Atmospheric pressure: 1015 hPa

a) Channel 1

Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2374.562	H	51.86	-0.80	51.06	Peak	74	54	-22.94	200	1.2
2345.988	H	39.99	-0.89	39.10	Ave	74	54	-14.90	200	1.2
2368.140	V	54.72	-0.82	53.90	Peak	74	54	-20.10	188	1.0
2389.968	V	42.95	-0.76	42.19	Ave	74	54	-11.81	188	1.0

b) Channel 11

Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2490.272	H	52.00	-0.43	51.57	Peak	74	54	-22.43	200	1.2
2485.864	H	40.26	-0.44	39.82	Ave	74	54	-14.18	200	1.2
2491.522	V	54.61	-0.43	54.18	Peak	74	54	-19.82	188	1.0
2489.968	V	43.03	-0.76	42.27	Ave	74	54	-11.73	188	1.0

Modulation Standard: 802.11g (54Mbps)

Test Date: May. 01, 2006 Temperature: 24 Humidity: 70% Atmospheric pressure: 1015 hPa

a) Channel 1

Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2356.716	H	52.51	-0.86	51.65	Peak	74	54	-22.35	200	1.2
2373.240	H	40.92	-0.81	40.11	Ave	74	54	-13.89	200	1.2
2365.080	V	55.96	-0.83	55.13	Peak	74	54	-18.87	188	1.0
2350.392	V	44.22	-0.88	43.34	Ave	74	54	-10.66	188	1.0

b) Channel 11

Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2483.508	H	52.88	-0.45	52.43	Peak	74	54	-21.57	200	1.2
2483.508	H	41.17	-0.45	40.72	Ave	74	54	-13.28	200	1.2
2483.508	V	56.07	-0.45	55.62	Peak	74	54	-18.38	188	1.0
2483.508	V	44.85	-0.45	44.40	Ave	74	54	-9.60	188	1.0

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz

9. Power Spectral Density


9.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

9.2 Test Procedures

- a. The transmitter output was connected to spectrum analyzer.
- b. The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=span/3KHz.
- c. The power spectral density was measured and recorded.
- d. The Sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

9.3 Test Setup Layout :



9.4 Measurement equipment

Instrument/Ancillary	Type	Manufacturer	Serial No.	Valid Date.
Spectrum Analyzer	FSP40	R&S	100047	2007/01/16

9.5 Test Result and Data of 802.11b/g

(1) Modulation Standard: IEEE 802.11b (11Mbps)

Test Date: Apr. 28 2006 Temperature: 25 Humidity: 68% Atmospheric pressure: 1015 hPa

Channel	Frequency	Maximum Power Density of 3 kHz Bandwidth (dBm)
01	2412	-17.04
06	2437	-16.99
11	2462	-16.82

(2) Modulation Standard: IEEE 802.11g (54Mbps)

Test Date: Apr. 28 2006 Temperature: 25 Humidity: 68% Atmospheric pressure: 1015 hPa

Channel	Frequency	Maximum Power Density of 3 kHz Bandwidth (dBm)
01	2412	-18.22
06	2437	-18.60
11	2462	-18.34


9.6 Test Result and Data of 802.11b/g

(1) Modulation Standard: IEEE 802.11g (54Mbps)

Test Date: Apr. 29, 2006 Temperature: 25 Humidity: 68% Atmospheric pressure: 1014 hPa


Channel	Frequency	Maximum Power Density of 3 kHz Bandwidth (dBm)
09	5745	-17.09
11	5785	-18.14
13	5825	-18.86

Modulation Standard: 802.11b (11Mbps)
Channel: 01

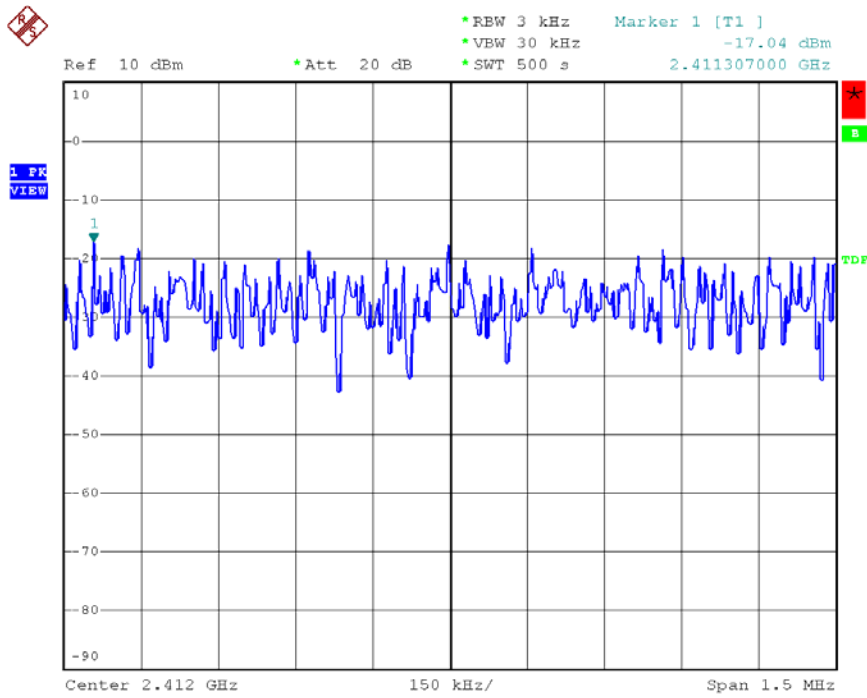


Date: 28.APR.2006 16:44:37

Channel:06

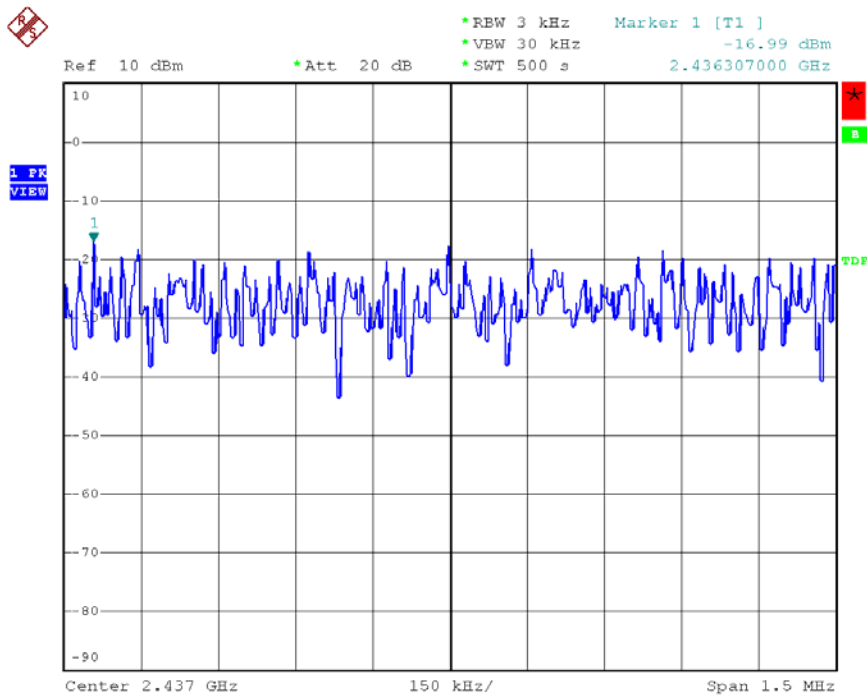


Date: 28.APR.2006 16:52:50

Channel: 11

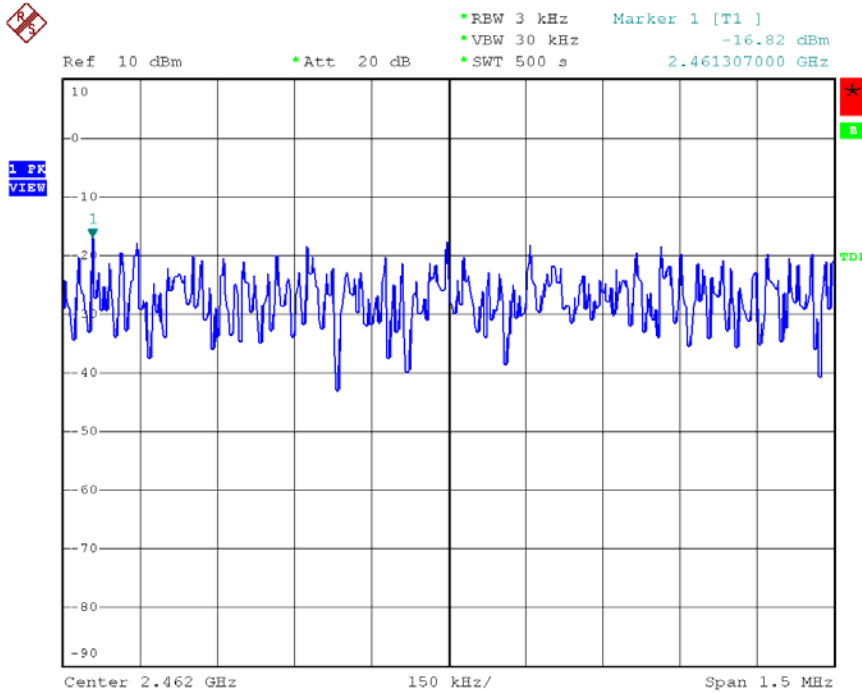


Date: 28.APR.2006 18:05:54

Modulation Standard:802.11g (54Mbps)
Channel:01

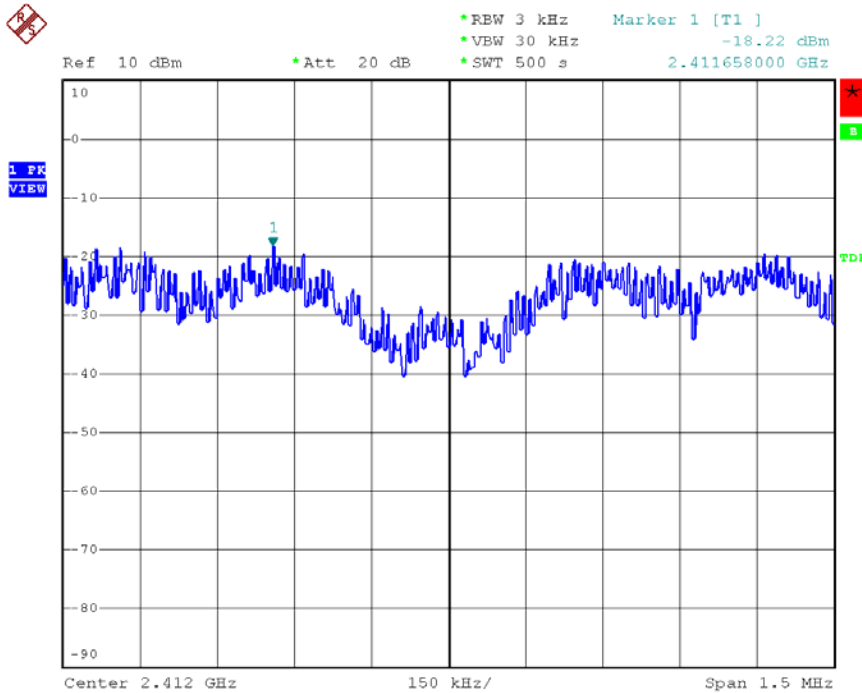


Date: 28.APR.2006 17:19:58

Channel: 06

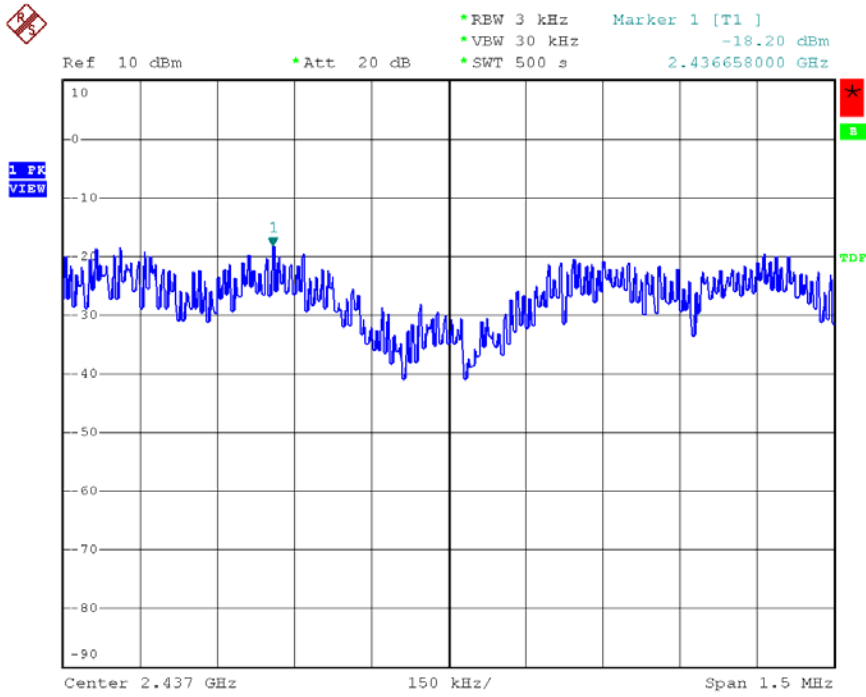

Date: 28.APR.2006 17:33:48


Channel:11

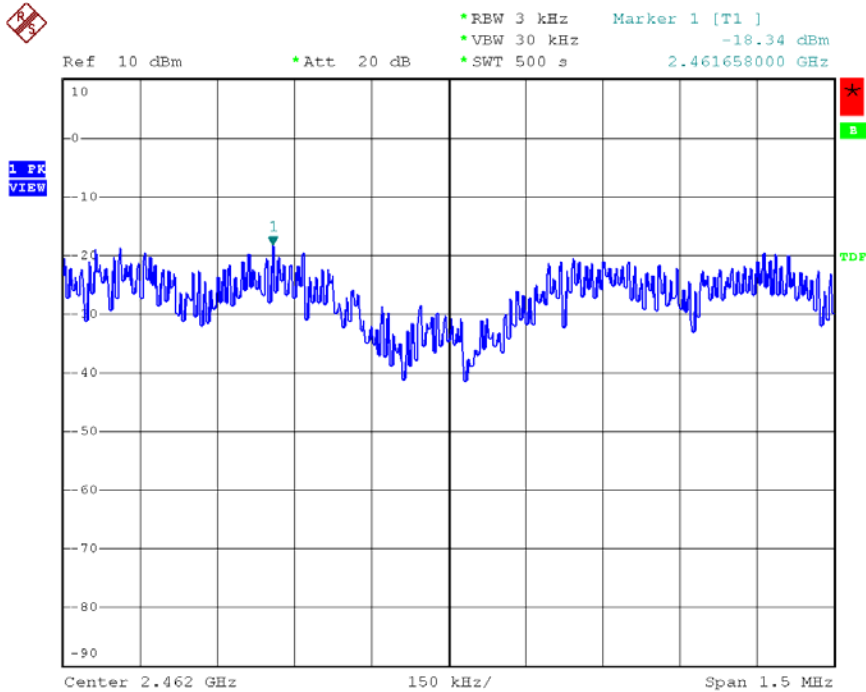

Date: 28.APR.2006 17:46:01


Modulation Standard: 802.11a (54Mbps)

Channel: 09

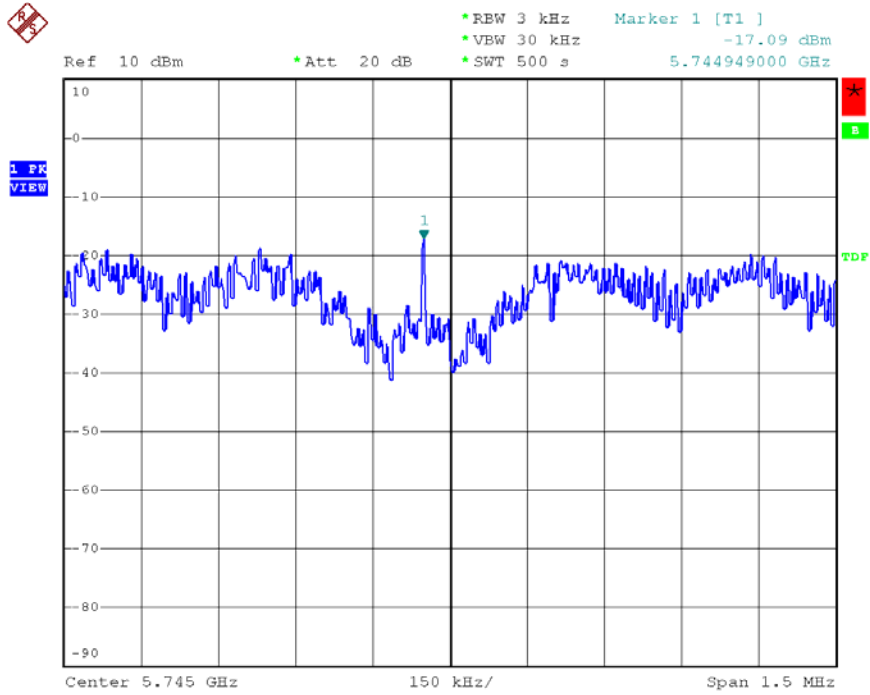


Date: 1.MAY.2006 11:18:10

Channel:11

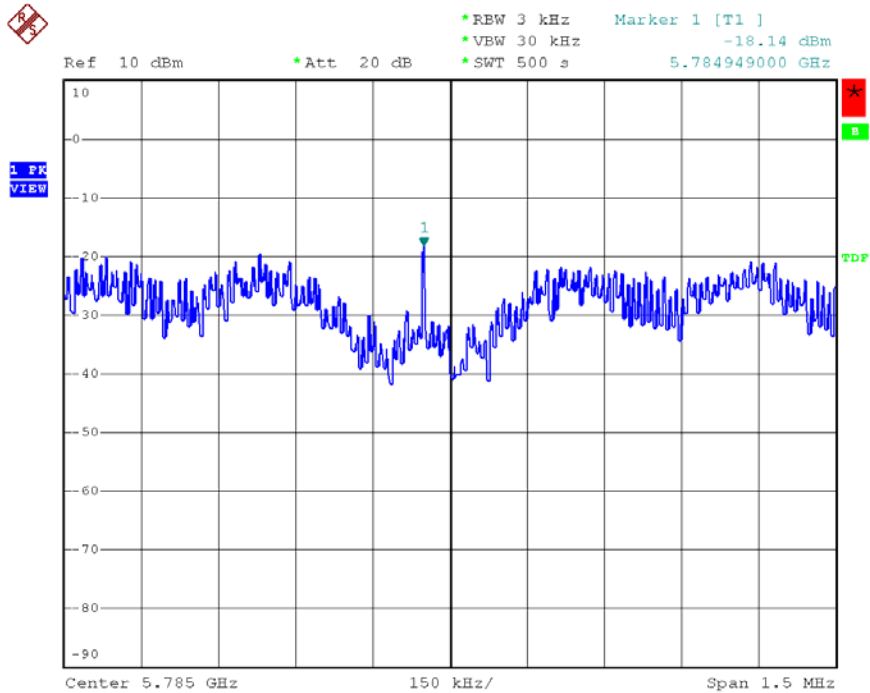

Date: 1.MAY.2006 11:13:07

Channel: 13

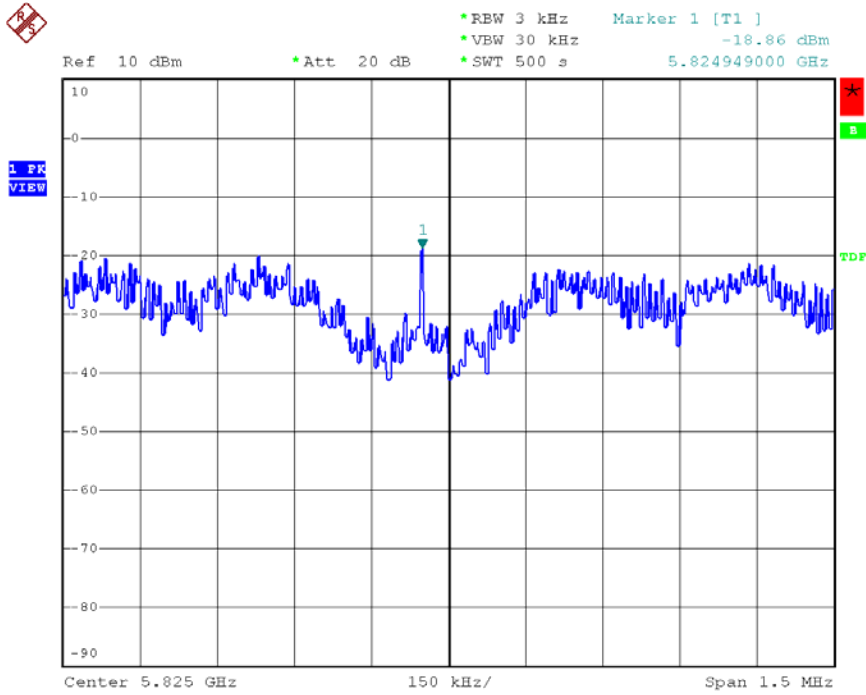

Date: 1.MAY.2006 11:26:29

10. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

10.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.